


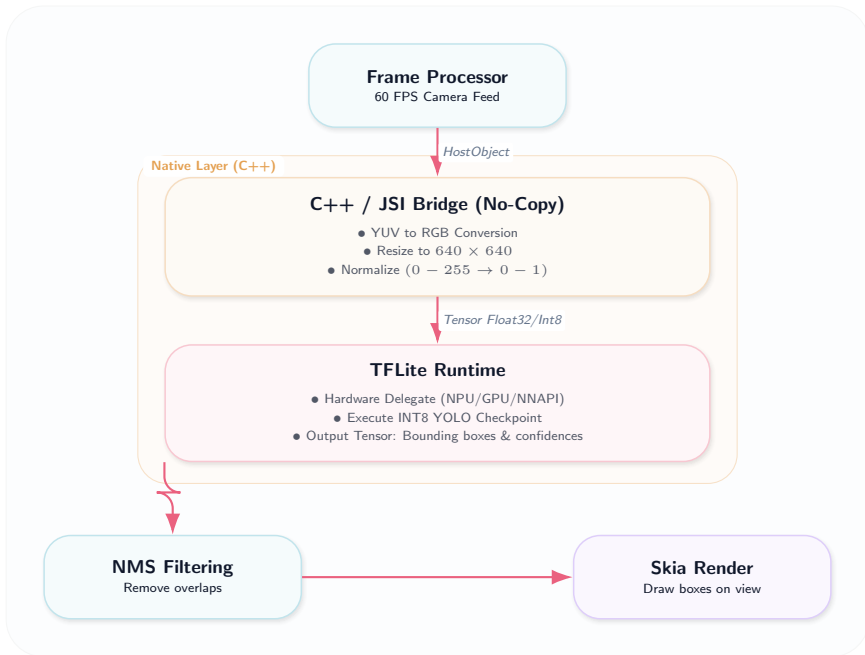

Performance — To achieve real-time (30+ FPS) AR overlays, frames are never serialized to base64 or passed over the React Native bridge. Instead, C++ JSI bindings manage the memory pointers directly from the camera buffer to the TFLite runtime, preventing garbage collection stutters.