Window counts per session x task — 27 eligible patients, non-overlapping 10 s windows

Filled = OFF (condition C), hollow = ON (condition A). A fixed-K rule must equalise the two ends of every line.

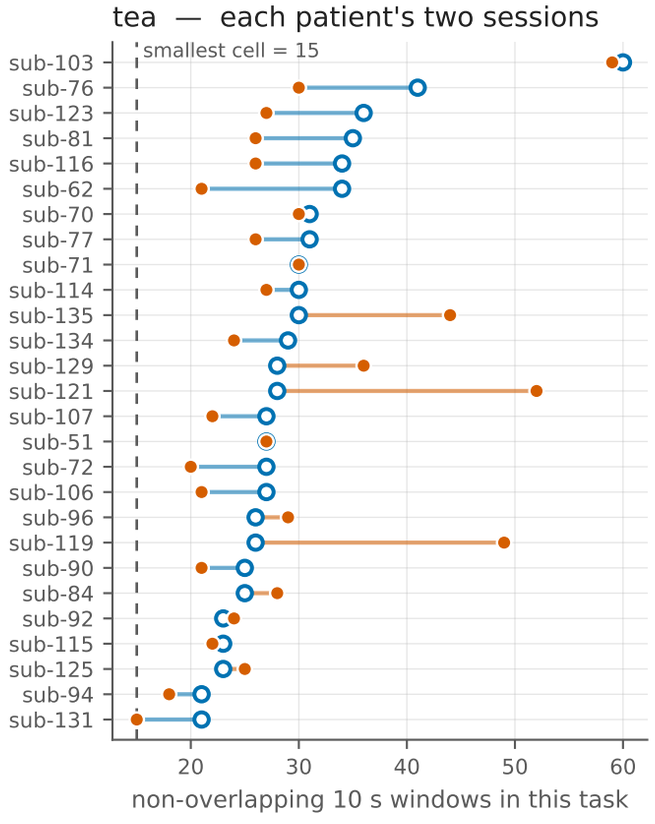

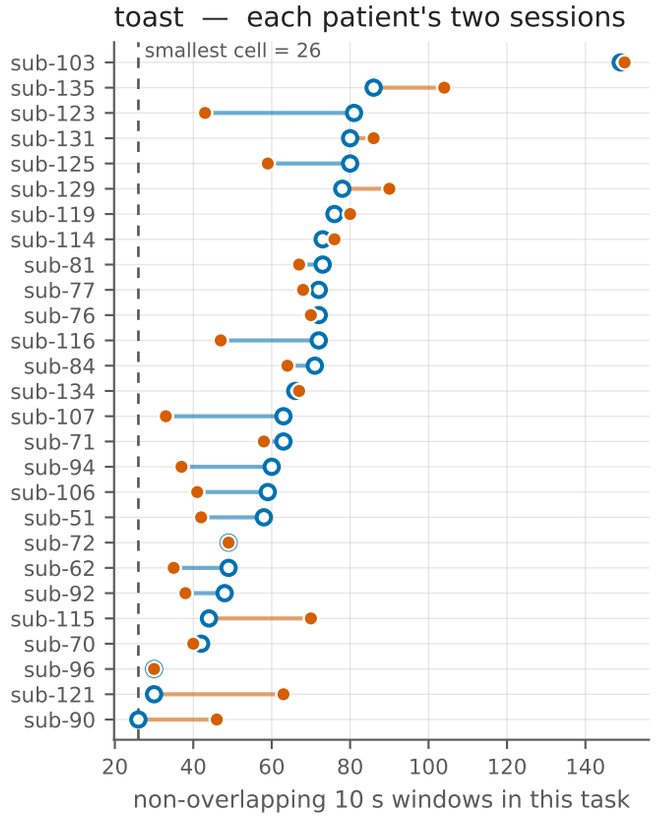

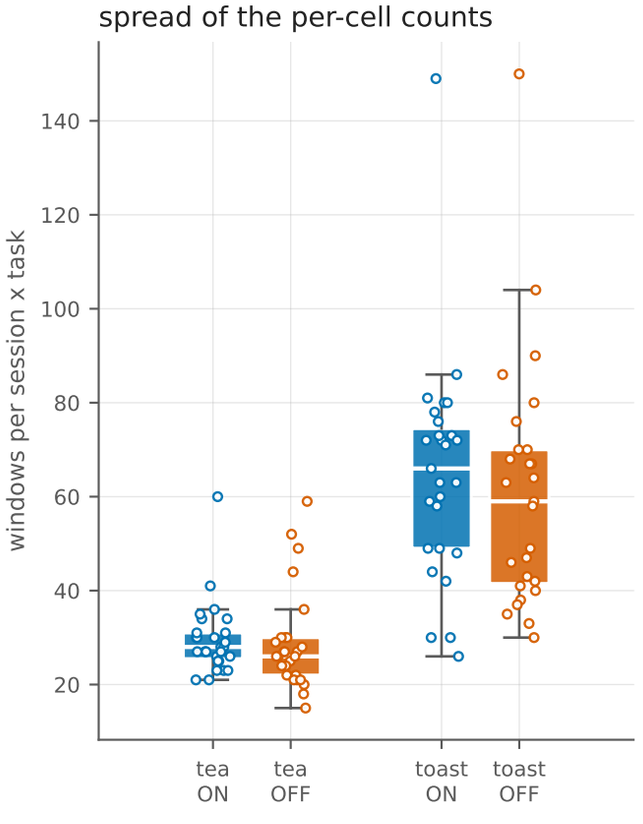

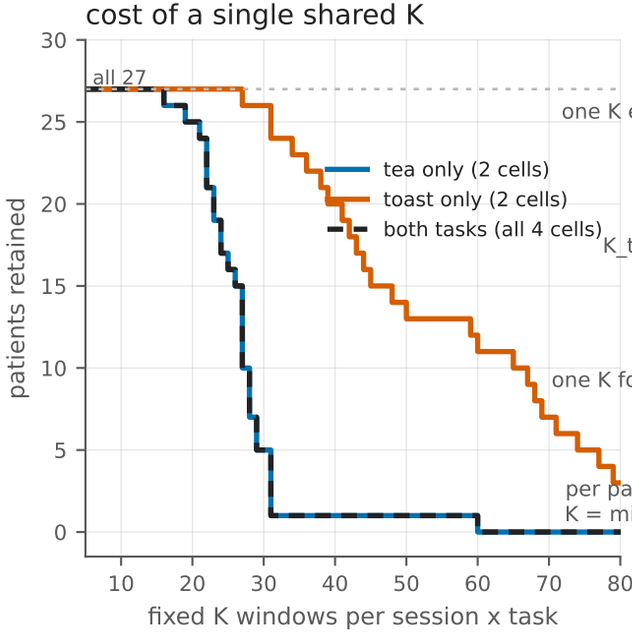

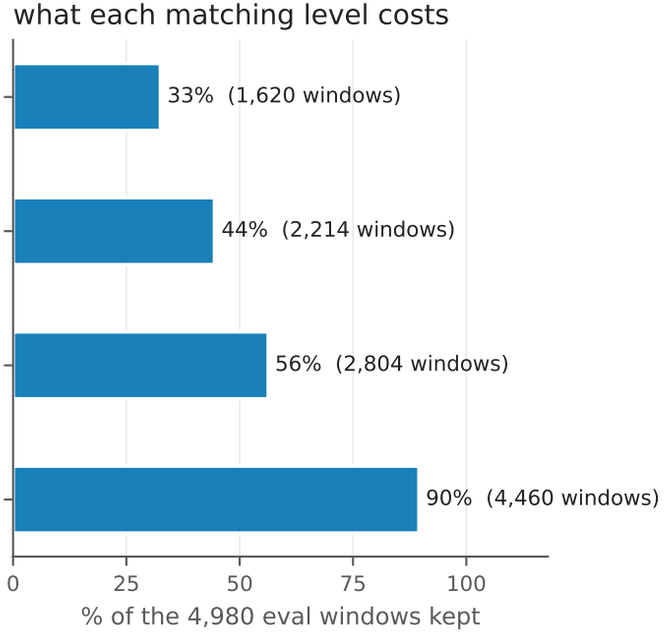

Is the count itself a label?

tea: ON longer in 17/27 patients (sign p = 0.108)
toast: ON longer in 15/27 patients (sign p = 0.424)

median |ON-OFF| gap: 17% of the longer session (tea), 13% (toast)

'shorter session = OFF' rule, within patient:
tea 0.667 toast 0.593 bal-acc
absolute-count threshold, leave-one-patient-out:
tea 0.611 toast 0.500 bal-acc