

Module ()

Assessment Title

Author: Luke Birkett

Candidate ID: 22411525

Word Count:

Abstract

This report

AI Usage Statement

In accordance with university guidelines, generative AI tools—specifically Gemini—were used strictly in an assistive role throughout the preparation of this report. AI was deployed as a refining and coding partner to improve report readability through spell-checking, grammar refinement, and copywriting iteration. It was also utilized to convert technical functions and explanations into $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ equations and to generate inline code comments. AI was not used to generate any original content. AI was not used to derive insights or analyse results. All methodologies, analysis, conclusions, and interpretations represent my own independent work based on learning from this module. All AI-assisted text and code were carefully reviewed, edited, and approved prior to submission, and I take full responsibility for all submitted material.

Contents

1	Introduction	1
1.1	Network Science Introduction	1
1.2	Why Apply Network Science to Football	1
1.3	How Apply Network Science to Football	1
1.4	The Null Baseline Problem and Project Scope	1
2	Data	2
3	Passing Network Paradigms	3
4	Football Network Metrics	4
4.1	Metric Suite	4
4.2	Degree-Based Metrics	4
4.3	Average Shortest Path (d)	5
4.4	Betweenness Centrality ($g(i)$)	5
4.5	Clustering: Transitive Triads ($I_{\text{transitive}}$)	6
5	Empirical Baseline Constraints	8
6	Traditional Nulls	9
6.1	Erdős–Rényi (ER) Random Model	9
6.2	Null Network Validation	9
7	Markovian Null Model	11
7.1	Markovian Processes and Stochastic Transformations	11
7.1.1	Justifying First-Order Markovian Processes	11
7.2	Domain Requirements & Spatial Resampling Design	11
7.3	Data Corpus Engineering	12
7.4	Recipient Probability Distribution Training	12
7.5	Generative Markovian Recipient Resampling	14
7.6	Sample Null Passing Network	14
7.6.1	Topological Degree Diagnostics	15
8	Null Validation	16
8.1	Macro-Level Heterogeneity and Structural Density	16
8.2	Workload Variance	16
8.3	Role Realism	16
8.4	Generative Matrix Variance	16
9	Null-Baselined Metric Evaluation	18
9.1	Experimental Setup & Simulation Scope	18
9.2	Macro-Level Evaluation: Global Circulation Distance (d)	18
9.3	Meso-Level Evaluation: Transitive Triad Dynamics ($I_{\text{transitive}}$)	18
9.4	Micro-Level Evaluation: Positional Betweenness Centrality ($g(i)$)	20

10 Conclusion, Limitations, and Future Work	21
10.1 Conclusion	21
10.2 Limitations	21
10.3 Future Work	21
Appendices	24
A Football Network Metrics Taxonomy	24
B Dataset and Positional Taxonomy	27
C Null Model Triad Evaluation	28
D Condensed Positional Taxonomy and Mapping Logical	29
E Original Position Counts	30
F Resampled Player Pass Share	31
G Sense Checking the Resampled Recipient Dataset	32
H League Wide Striker Pass Summary	34

List of Tables

1	Summary of Dataset Statistics (WSL 2023/2024)	2
2	Highest Pass Sample Network Macro Degree Metrics	5
3	ER Null Macro-Level Network Metrics vs. Empirical Sample	9
4	Spatial Recipient Probability Distribution for Pitch Bin (5, 5).	13
5	Sample Event Resampling and Player Mapping Stream.	14
6	Sample Null Macro-Level Metrics vs. Empirical and ER Baselines.	15
7	Tier 1 Spatial Markovian Null Model Validation Summary ($N = 500$ Iterations).	17
8	Null-Baselined Macro Evaluation Summary.	18
9	Null-Baselined Meso Evaluation Summary (Transitive Triads Top 20).	19
10	Null-Baselined Micro Evaluation Summary (Positional Betweenness Centrality).	20
11	Micro-Scale Network Metrics and Football Interpretations [1].	25
12	Macro-Scale Network Metrics and Football Interpretations [1].	26
13	Distribution of Starting Formations Within the Modal Pass-Volume Tier (200–299 Passes, $n = 94$).	27
14	Top 10 Active Transitive Triads (Erdős–Rényi Null Model).	28
15	Condensed Position Categories with Original Positions and Total Pass Volume.	29
16	Original Granular Position Counts Across Season Corpus.	30
17	Change in Pass Share: Empirical vs. Resampled Receptions.	31
18	League-Wide Striker Pass Execution Summary.	33
19	League-Wide Striker Pass Execution Summary.	34

List of Figures

1	Raw Pass Plotting: Sub-plot 1 Individual Player vs. Sub-plot 2 Whole Team.	2
2	Pitch-overlay PassMap vs. frameless spatial PassMap.	3
3	Highest Pass Sample Network Betweenness Centrality $g(i)$ distribution. .	6
4	Top Transitive Triads Overlay.	7
5	League Match-Team Pass Distribution Histogram (WSL 2023/2024). . .	8
6	ER Null Network Visual (Left) and ER Triad Network Plot (Right). . . .	10
7	Pitch Plot Segmented into a 10×10 Spatial Grid.	13
8	Empirical PassMap (Left) vs. Spatial Null Realization PassMap (Right). .	14
9	Pitch plot illustrating spatial reception areas for the resampled striker position.	32

1 Introduction

1.1 Network Science Introduction

Network science provides a versatile framework for modeling complex systems, abstracting real-world interactions into formal graphs of nodes and links to evaluate overall topology and system dynamics. Its applications span identifying key central entities in social systems [2, 3], detecting functional sub-communities [4], modeling biological and information cascades [5], and assessing structural robustness against failures [6, 7]. By shifting away from isolationist views of individual components, network science reveals the emergent organizational principles and collective behaviors governing modern complex systems.

1.2 Why Apply Network Science to Football

This report focuses on applying network science to sport [8], specifically football [9]. Traditional football analytics relies primarily on isolated, terminal metrics such as completed passes, goals scored, or advanced modeled parameters like Expected Goals [10] to quantify performance. However, evaluating players in isolation is fundamentally limited because football operates as a complex adaptive system [11]. Team success cannot be understood through isolated actions alone, instead it emerges from continuous collective interactions, dynamic spatial relationships, and overarching tactical organization across the squad [1].

1.3 How Apply Network Science to Football

Applying network science requires decomposing a complex system into discrete nodes and directed edges. In football, outfield teammates are modeled as nodes ($N = 11$), while relational interactions between them form the connecting edges. Completed passes provide a pragmatic, objective event stream encoding tactical intent and spatial structure. Representing players as nodes and directed pass volumes as weighted edges forms the foundation of the PassMap paradigm [12]. A comprehensive taxonomy of these network paradigms and their topological variations is detailed and visualized in Section 3.

1.4 The Null Baseline Problem and Project Scope

Evaluating raw football network metrics in isolation offers limited analytical value, as network properties are shaped by underlying topological and spatial constraints. Without baseline distributions, analysts cannot separate deliberate tactical execution from stochastic match noise. Constructing valid null models in football requires reconciling randomized generative processes with physical pitch geometry, spatial proximity, and positional roles. Responding to explicit calls for null models in football from contemporary literature [1], this project develops a 1st-order Spatial Markovian null framework to generate domain-aware reference ensembles, establishing a robust statistical baseline for tactical evaluation.

2 Data

The dataset comprises StatsBomb event data from the 2023/2024 FA Women’s Super League (`competition_id: 37`, `season_id: 281`). Focusing on women’s football directly addresses literature deficits regarding the overreliance on short men’s samples and the systemic underrepresentation of longitudinal women’s datasets [1, 13].

Raw non-relational event logs are engineered into directed, weighted adjacency matrices A_{ij} . For our PassMap framework, we isolate completed passes using four attributes:

- Passer (source node i) + Role
- Recipient (target node j) + Role
- Origin (x_1, y_1)
- Destination (x_2, y_2)

StatsBomb’s 120×80 yard pitch coordinates are rescaled to a normalized 100×100 grid to standardize across varying venue dimensions [11]. Figure 1 illustrates this raw pass data before network transformation.

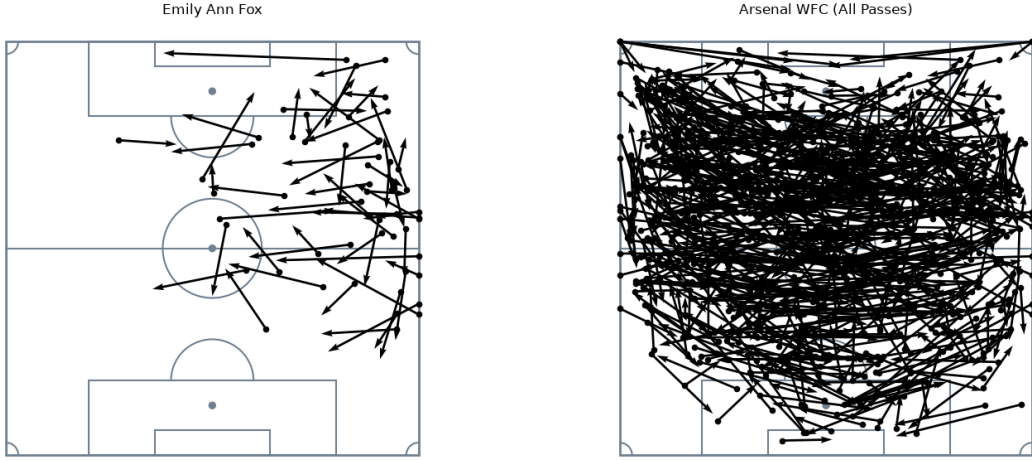


Figure 1: Raw Pass Plotting: Sub-plot 1 Individual Player vs. Sub-plot 2 Whole Team.

Table 1: Summary of Dataset Statistics (WSL 2023/2024)

Metric Category	Dataset Statistic
Competition/Season	FA Women’s Super League (WSL) 2023/2024
Total Matches	132
Total Team Networks	264
Total Season Passes Recorded	89,781
Match-Team Mean Passes	399 (Range: 120–847)

3 Passing Network Paradigms

Team’s passes are modeled using the PassMap paradigm popularized by Buldú et al. [11] and represented as a directed, weighted graph $G = (V, E, W)$ where edges (E) denote completed passes and edge weights (W) quantify pass volume between nodes over a full match.

While literature outlines alternative formulations—such as purely geographic Pitch-Location networks or high-density composite Player-Pitch networks [12, 14]—this project focuses exclusively on the Player PassMap paradigm. Here, the node set corresponds directly to the eleven on-pitch players ($|V| = 11$) which are enriched with identities and mean spatial (x, y) coordinates as node attributes. Most network properties are invariant to the node coordinates but allocating them significantly enhances visual interpretability.

Player Networks represent the standard approach in football analytics [9, 13, 15]. They maintain intuitive alignment with real-world tactical play while avoiding artificial spatial discretization steps that lack consensus standards [14, 16].

To preserve an $N = 11$ network structure despite match substitutions, we model only the eleven players with the highest total volume. Unlike literature methods that merge substitutes into contiguous positional nodes — obscuring individual identities — or expand the graph ($N > 11$), distorting density and clustering metrics [11, 14], this parsimonious filtering isolates true player dynamics without skewing core network properties.

As shown in Figure 2, plotting these networks either directly overlaying pitch boundaries or in a frameless spatial layout preserves structural clarity while surfacing emergent team interactions.

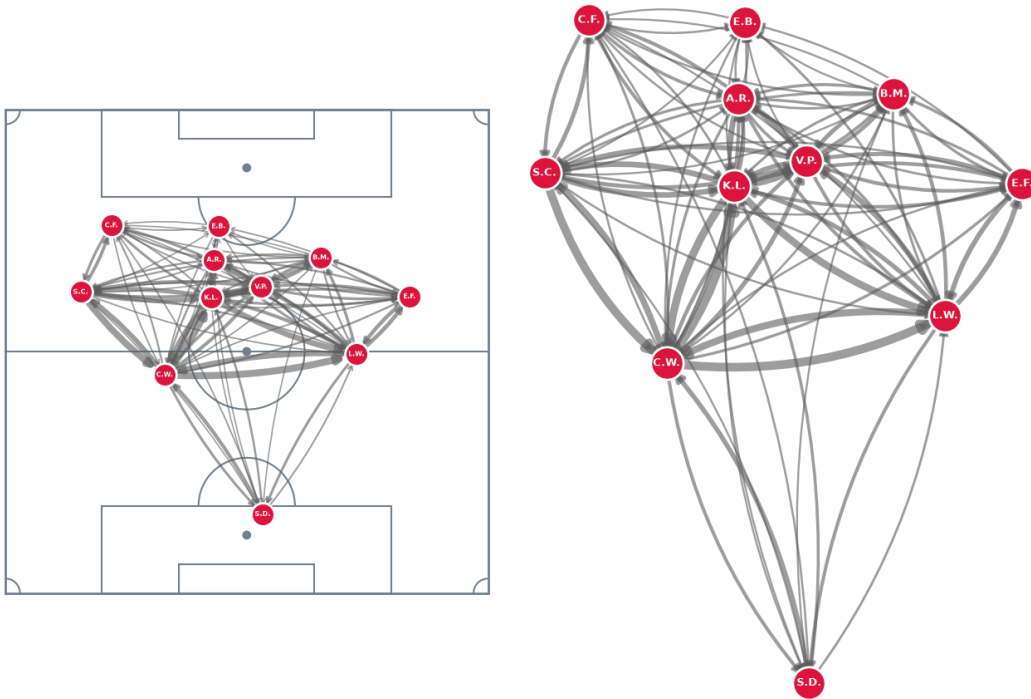


Figure 2: Pitch-overlay PassMap vs. frameless spatial PassMap.

4 Football Network Metrics

Applying network science to football allows us to decompose and analyze system tactics through mathematical properties [17]. Gama et al. [1] provide a comprehensive translation of network properties into footballing interpretations (Appendix Table 11, Appendix Table 12).

To demonstrate the utility of network analysis, we compose a suite of metrics which we apply to the high-volume outlier network from Figure 2 (Arsenal WFC), a match which recorded the season’s highest pass volume for a single team. This is a particularly compelling instance to evaluate in order to determine whether the observed topological properties represent deliberate tactical execution or are merely emergent artifacts of extreme pass volume.

4.1 Metric Suite

To systematically map network properties to tactical concepts, analysis is categorized into three structural scales: Macro, Meso, and Micro [13, 15]. This project targets a core suite of metrics across these scales to balance theoretical rigor with clear domain interpretation.

Macro-scale analysis evaluates global team cohesion, structural fluidity, and spatial dominance across the entire network [?, 18]. We examine overall connectivity and structural skew through Unweighted Degree Heterogeneity (CV_k) and Team Node Volume Variance ($\text{Var}(s_{\text{tot}})$), alongside multi-step cohesion using the Global Average Shortest Path (d).

Meso-scale analysis assesses localized sub-graphs and multi-player combinational passing channels [19]. We quantify passing triangle strength and progressive build-up chains using Transitive Triad Intensity ($I_{\text{transitive}}$), ranking clusters by their weakest link (W_{min}).

Micro-scale analysis evaluates individual player workload, system asymmetry, and possession control [11, 17]. We measure pitch control through Betweenness Centrality ($g(i)$) based on inverted topological distance ($l_{ij} = 1/w_{ij}$).

4.2 Degree-Based Metrics

Degree-based metrics evaluate system topology using direct, 1-hop connections, avoiding global path-traversal costs to provide a computationally efficient proxy for tactical systems and pass distribution [14].

Evaluating unweighted degree across our high-volume sample network yields a Mean Unweighted Degree of $\langle k \rangle = 16.18$, indicating high overall connectivity out of a theoretical maximum bound of 20. The low Coefficient of Variation ($CV_k = 0.1724$) and near-identical Normalized Second Moment ($\langle k^2 \rangle / \langle k \rangle = 16.66$) confirm that the existence of passing lanes is widely distributed across squad positions, eliminating absolute topological bottlenecks.

However, introducing weighted metrics highlights a critical tactical distinction between structural availability and actual flow of passes. The high Team Node Volume Variance ($\text{Var}(s_{\text{tot}}) = 5,681.90$) reveals that while available passing channels are widespread, pass workload is heavily skewed through specific players.

Table 2: Highest Pass Sample Network Macro Degree Metrics

Metric	Value
Team Node Volume Variance $\text{Var}(s_{\text{tot}})$	5681.9008
Mean Unweighted Degree $\langle k \rangle$	16.1818
Degree Variance $\text{Var}(k)$	7.7851
Degree Standard Deviation σ_k	2.7902
Second Moment $\langle k^2 \rangle$	269.6364
Coefficient of Variation CV_k	0.1724
Normalized Second Moment $\langle k^2 \rangle / \langle k \rangle$	16.6629

4.3 Average Shortest Path (d)

In PassMaps, edge weights (w_{ij}) reflect completed passes from player i to player j . Pass volume is a stronger indicator of connectivity than physical distance, so edge weights are inverted to derive a topological distance:

$$l_{ij} = \frac{1}{w_{ij}} \quad (1)$$

This transformation ensures high-frequency passing channels yield lower topological resistance. Using Dijkstra’s algorithm, the shortest path (p_{ij}) between any pair of players represents the minimal cumulative cost required to move possession through the network.

The macro-level baseline of a team’s passing structure is established by the global average shortest path length (d), defined as:

$$d = \frac{1}{N(N-1)} \sum_{i \neq j} p_{ij} \quad (2)$$

Arsenal WFC demonstrates strong circulation efficiency with a global path length of $d = 0.1884$, meaning the average cost to route possession between any two arbitrary players is less than 0.20. Low path length (d) is a prerequisite of the Small-World phenomenon [18]. In football, it indicates an integrated network capable of rapid ball circulation. However, evaluating $d = 0.1884$ in isolation is arbitrary and cannot confirm tactical superiority. This requires statistical benchmarking against domain-aware null models.

4.4 Betweenness Centrality ($g(i)$)

To evaluate which players act as essential routing hubs, Betweenness Centrality ($g(i)$) is analyzed. Moving beyond volume, betweenness measures the proportion of a network’s shortest topological paths ($l_{ij} = 1/w_{ij}$) traversing a given node, identifying possession flow:

$$g(i) = \sum_{s \neq i \neq t} \frac{\sigma_{st}(i)}{\sigma_{st}} \quad (3)$$

where σ_{st} represents the total shortest paths between source player s and target player t , and $\sigma_{st}(i)$ is the number of those paths passing through player i .

Providing deeper inference than 1-hop volume metrics, high scores denote players upon whom phase transitions depend, whereas scores of 0.0000 mark peripheral endpoints whose exclusion does not disrupt global network routing.

In our sample network, central defenders Lotte Wubben-Moy ($g(i) = 0.3222$) and Leah Williamson ($g(i) = 0.3000$) record the highest centrality, acting as primary structural pivots during recycling and build-up phases—a finding consistent with contemporary football network literature [13].

Interpreting betweenness in football requires a key domain-specific nuance. In classic network science, high betweenness denotes a central bottleneck bridge. In football, topological distance allows a physically longer route to represent an easier, low-resistance option. Therefore, deep-lying central defenders can exhibit high centrality by recycling and re-routing phases of play.

Midfielders Kim Little (0.1778) and Victoria Pelova (0.1389) follow as traditional vertically bridging central players. Conversely, front-line attackers and the goalkeeper register scores of 0.0000, confirming their roles as terminal nodes rather than network traffic bridges.

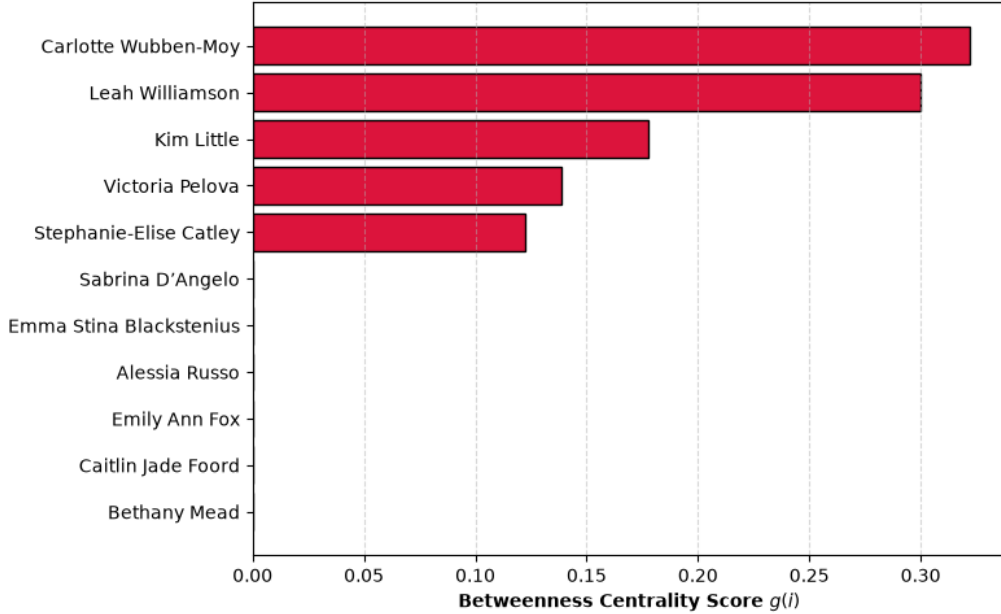


Figure 3: Highest Pass Sample Network Betweenness Centrality $g(i)$ distribution.

4.5 Clustering: Transitive Triads ($I_{\text{transitive}}$)

To evaluate localized spatial cohesiveness and combinational dynamics across the squad, we analyze Transitive Triad Intensity ($I_{\text{transitive}}$). Standard unweighted clustering coefficients can be misleading in football because they treat all connections equally regardless of direction or volume. Transitive triads explicitly isolate progressive wall-passes and multi-option positional triangles ($A \rightarrow B \rightarrow C$ with $A \rightarrow C$), omitting backward cyclic loops ($A \rightarrow B \rightarrow C \rightarrow A$) that rarely denote tactical progression.

As passing networks are weighted by pass volume, a triad’s operational strength is constrained by its weakest link:

$$W_{\min} = \min(W_{AB}, W_{BC}, W_{AC}) \quad (4)$$

By ranking individual triads by the strength of their weakest link ($W_{\min}$), we isolate the specific three-player passing circuits where Arsenal most frequently established progressive combination play.

The highest-capacity triad (Kim Little, Lotte Wubben-Moy, Leah Williamson, $W_{\min} = 116.0$) highlights a resilient central triangle anchoring initial build-up out of defense, while left-sided loops involving Steph Catley account for three of the top six most active circuits, indicating asymmetric possessional competency. Overlaying these top-capacity transitive triads onto the PassMap (Figure 4) converts a dense network into identifiable passing triangles.

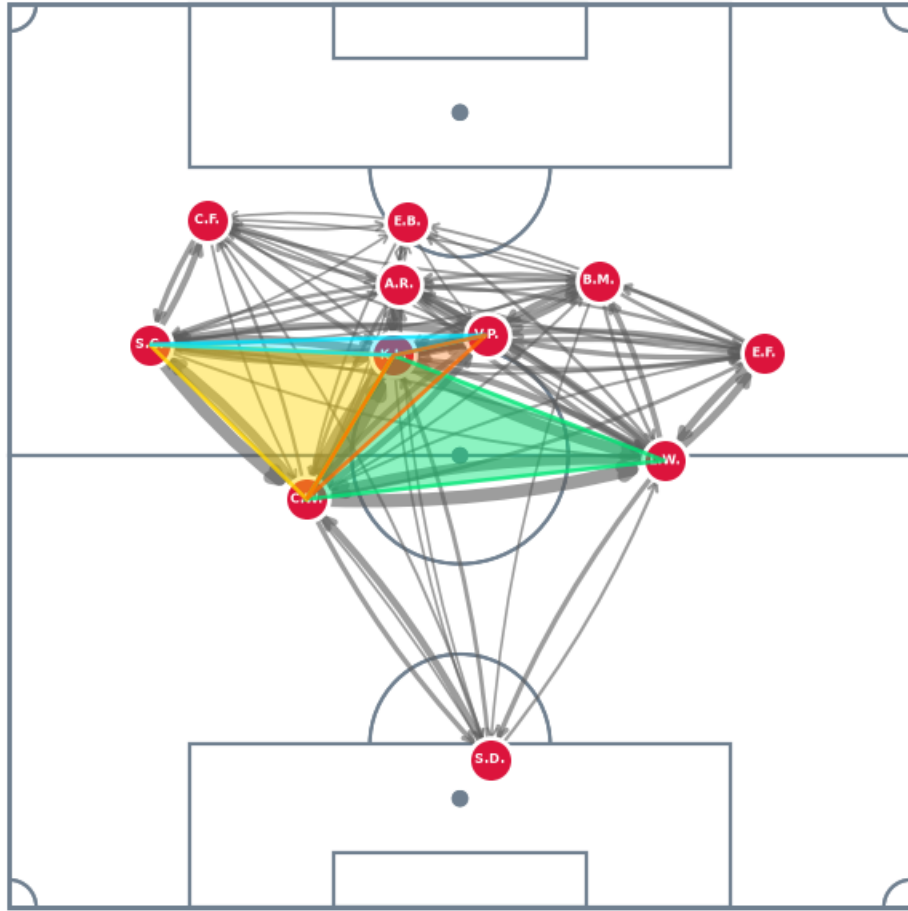


Figure 4: Top Transitive Triads Overlay.

5 Empirical Baseline Constraints

Tactical network analysis generally requires benchmarking against a league-wide baseline. Evaluating global average shortest path lengths (d) across all season matches places our sample network ($d = 0.1884$) in the top 3.41% of league efficiency, approaching the season minimum (0.1748) from a league mean (std) 0.3521 ± 0.1263 .

However, networks properties are heavily dictated by edge volume and spatial topology and this match was selected as it is the league’s peak pass volume outlier. Binning the pass data exposes severe data-sparsity constraints for empirical comparisons. Bins of 100-pass increments show that the 200–299 pass range holds 40.2% of league matches (94 of 234), whereas higher volume tiers drop off rapidly: 500–599: 14 matches, 600–699: 8, and 700–799: 1, exclusively our single sample match.

Benchmarking also requires controlling for tactical formation to normalize network topology. Segmenting even the largest pass-volume bin across the 11 recorded formations reduces the primary setup (4-2-3-1) to just 29 instances and 3 formation categories carry a single instance ([Appendix Table 13](#)). Dual filtering for pass volume and formation dilutes sample sizes to near zero. Despite using a comprehensive season-wide dataset that is large by literature standards [1], these sparsity constraints necessitate generating spatial null models to evaluate extreme networks.

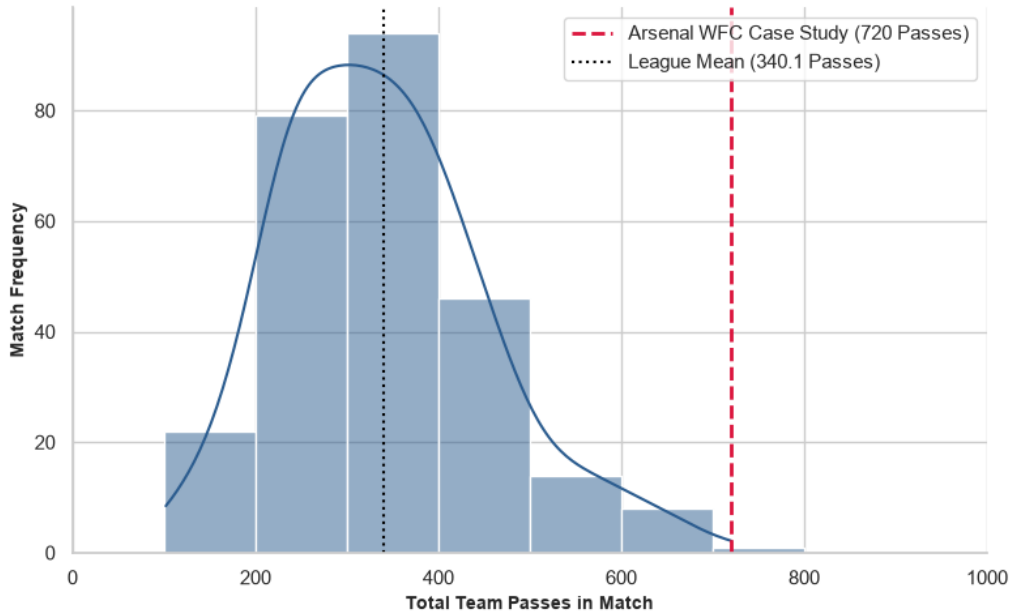


Figure 5: League Match-Team Pass Distribution Histogram (WSL 2023/2024).

6 Traditional Nulls

Traditional null models face severe domain-specific deficiencies when applied to football. Generating a network null model involves randomizing topological features while preserving select global properties, such as total edge weight or node degree. However, football passing networks are constrained by physical pitch dimensions, player positioning, and tactical behavior. Traditional null models ignore these spatial and structural realities, generating unrealistic networks characterized by unnatural cross-field connections and misplaced playmaking hubs.

6.1 Erdős–Rényi (ER) Random Model

The simplest benchmarking approach is the Erdős–Rényi random graph framework, specifically the $G(N, p)$ model [20, 21]. Under this formulation, N nodes are connected independently with uniform probability p . For weighted passing networks, total pass volume (720 passes across 11 nodes) is preserved, but topological structure is erased. Weights are distributed uniformly across all potential node pairs, treating all players as structural equals and discarding individual node degree constraints.

6.2 Null Network Validation

Evaluating macro-level properties confirms that random edge generation fundamentally destroys realistic football network topology (Table 3). In an Erdős–Rényi ($G(N, p)$) random model, uniform weight assignment erases operational workload inequality. Team Node Volume Variance collapses to $\text{Var}(s_{\text{tot}}) = 514.9917$ ($\sigma_{s_{\text{tot}}} \approx 22.69$ passes), homogeneously smoothing possession across all players and removing tactical playmaking hubs. Topologically, the PassMap degrades into an uninformative dense network where edge weights lack tactical variance and peripheral nodes erroneously appear as major distribution outlets.

This breakdown extends to downstream clustering. Global Mean Transitive Intensity artificially inflates ($\bar{I}_{\text{transitive}} = 708.54$), as uniform edge generation forces nearly every three-node combination into a dense cluster. Inspecting top active triads yields tactical impossibilities, such as high-capacity loops linking central forward Stina Blackstenius with defender Lotte Wubben-Moy (69.0 units) or goalkeeper Sabrina D’Angelo (51.0 units) (Appendix Table 14). Plotting these triads (Figure 6) produces non-local pitch-wide polygons, proving the spatial unviability of ER models for football networks.

Table 3: ER Null Macro-Level Network Metrics vs. Empirical Sample

Metric	Notation	ER Null	Empirical
Team Node Volume Variance	$\text{Var}(s_{\text{tot}})$	514.9917	5681.9008
Mean Unweighted Degree	$\langle k \rangle$	15.4545	16.1818
Degree Variance	$\text{Var}(k)$	4.0661	7.7851
Degree Standard Deviation	σ_k	2.0165	2.7902
Second Moment	$\langle k^2 \rangle$	242.9091	269.6364
Coefficient of Variation	CV_k	0.1305	0.1724
Normalized Second Moment	$\langle k^2 \rangle / \langle k \rangle$	15.7176	16.6629

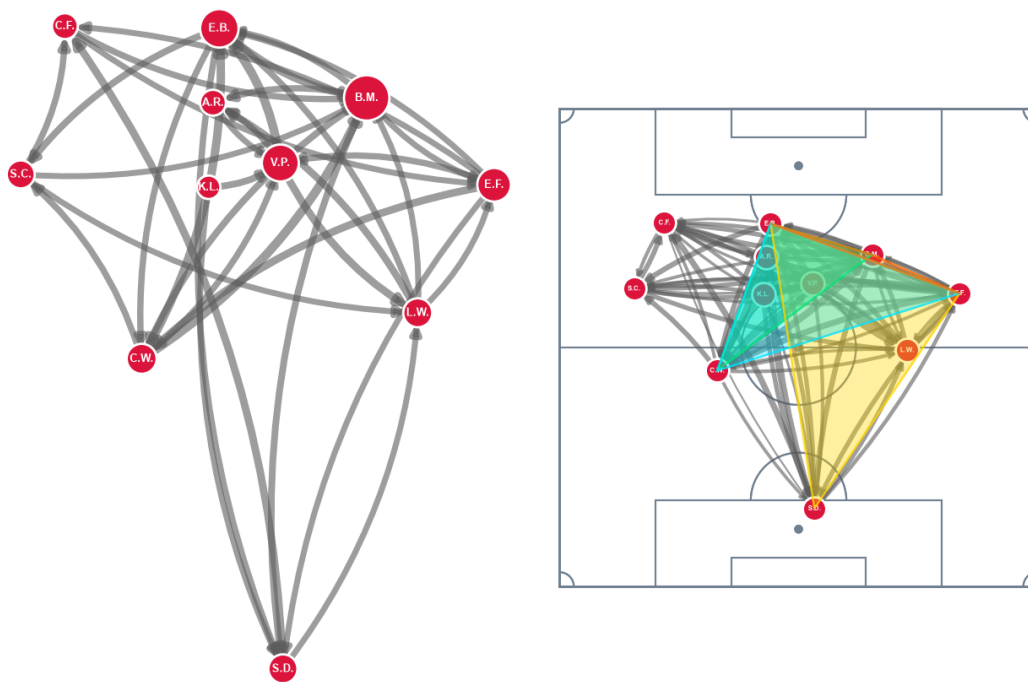


Figure 6: ER Null Network Visual (Left) and ER Triad Network Plot (Right).

7 Markovian Null Model

The failure of naive, traditional null models necessitates a fundamental conceptual shift. A valid null model for football passing networks cannot treat the pitch as an abstract, unconstrained graph topology, it must strictly respect the spatial, physical, and tactical realities of match play.

7.1 Markovian Processes and Stochastic Transformations

To construct a domain-aware generative baseline, we draw upon established football network literature modeling match dynamics using stochastic processes [1, 14] and repurpose the methodologies for null generation, shifting from modeling dynamics on a network to governing the dynamics of the network.

While existing literature predominantly applies Markov chains to fixed adjacency matrices to analyze possession diffusion, our generative task synthesizes entirely new reference network topologies ($\mathcal{G}_{\text{null}}$). We invert this paradigm by using learned spatial transition rules as a generative engine to resample synthetic pass events before aggregating the final null network.

This inversion addresses a critical research gap. Although stochastic flow models were originally used to bypass traditional nulls, evaluating whether observed flow metrics reflect genuine tactical organization ultimately requires benchmarking against a spatially constrained null ensemble [1].

7.1.1 Justifying First-Order Markovian Processes

A first-order Markov process assumes that state transition probabilities (X_{t+1}) depend strictly on the current state (X_t):

$$P(X_{t+1} = x \mid X_t = x_t, \dots, X_1 = x_1) = P(X_{t+1} = x \mid X_t = x_t) \quad (5)$$

While higher-order memory is necessary for tracking sequential possession dynamics, a first-order memoryless formulation provides a parsimonious, mathematically aligned baseline for synthesizing static PassMap topologies. Because standard 11×11 adjacency matrices aggregate matches statically—discarding temporal ordering—a first-order process matches the target format. Furthermore, Narizuka et al. [14] demonstrated that a first-order spatial Markov process parameterised by distance decay successfully reproduces macro-level Small-World properties and truncated degree distributions without higher-order memory overhead.

7.2 Domain Requirements & Spatial Resampling Design

Buldú et al. [12] emphasize that valid null models for football networks must maintain high domain realism by preserving physical game constraints, spatial player distributions, and pass length mechanics. To satisfy this, we propose a targeted spatial pass-recipient resampling model. Under this framework, each recorded pass’s origin location, passer identity, and pitch phase are held fixed, while the recipient is systematically resampled using a first-order Markov process.

This design choice explicitly balances tactical destruction with domain validity. Retaining empirical match coordinates means actual positional occupancy zones and realistic pass-distance decay mechanics are not lost. Simultaneously, decoupling the original recipient breaks existing tactical systems and specific player-to-player relationships.

Finally, resampling recipients using spatial transition probabilities re-establishes network edges under strict physical constraints. This prevents structural anomalies, such as long-range goalkeeper-to-striker loops, while allowing central hubs to form naturally through emergent spatial proximity.

7.3 Data Corpus Engineering

To distinguish genuine tactical adaptations from match-to-match noise, our generative resampling engine is parameterized across a large-scale league dataset comprising $N = 264$ match-team instances and 89,781 completed passes. Constructing the first-order Markovian model directly from raw event logs—rather than finalized network topologies—ensures the resampling process inherently preserves spatial coordinates and physical game constraints.

Raw StatsBomb pitch coordinates (120×80) are normalized to a standardized 100×100 scale and discretized into a 10×10 spatial grid of 100 uniform cells. Granular player positions are mapped into a condensed positional taxonomy ([Appendix Table 15](#)), eliminating team-specific lateral biases while retaining essential functional roles. This spatial and positional aggregation maximizes data density per pitch cell, enabling the Markovian transition model to learn robust, role-based spatial transition probabilities across the dataset.

7.4 Recipient Probability Distribution Training

Using the discretized spatial grid and condensed positional taxonomy, we compile the pass data into a 3D Spatial Probability Tensor $\mathcal{P}$ of shape $(10, 10, N_{\text{pos}})$, where $N_{\text{pos}} = 9$. Each tensor element $\mathcal{P}(r, c, p)$ records pass frequencies terminating in cell (r, c) received by position p . To prevent zero-probability artifacts in sparse pitch zones, we apply Laplace Additive Smoothing ($\alpha = 1.0$):

$$\text{Counts}_{\text{smoothed}}(r, c, p) = \text{RawCount}(r, c, p) + 1.0 \quad (6)$$

Normalizing these smoothed counts yields the conditional recipient probability distribution $P(\text{Position } p \mid \text{Pass Ends in Bin } (r, c))$:

$$P(p \mid r, c) = \frac{\text{Counts}_{\text{smoothed}}(r, c, p)}{\sum_{p'} \text{Counts}_{\text{smoothed}}(r, c, p')} \quad (7)$$

This partitions the pitch into discrete spatial sectors governing recipient likelihood. For instance, central cell $(5, 5)$ assigns highest reception probabilities to central midfielders (38.96%) and central defenders (30.58%), while goalkeeper receptions drop to 0.11% ([Table 4](#)). Sampling from these localized distributions ensures generated passes assign plausible recipients based on empirical spatial behavior.

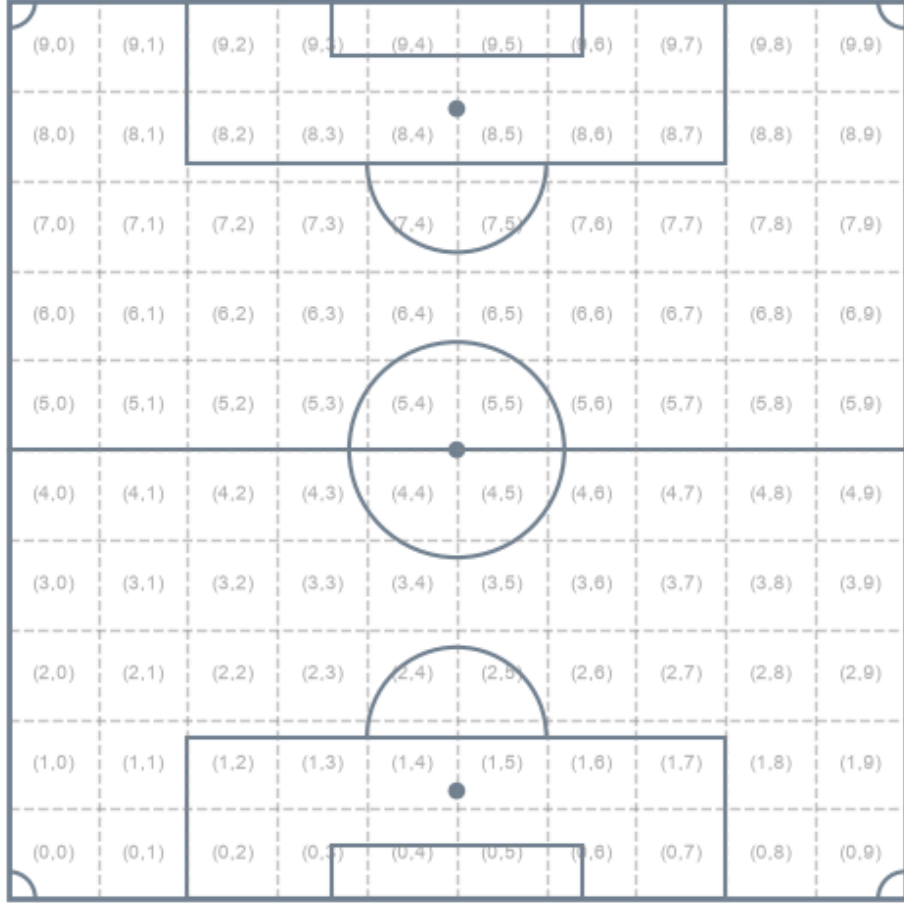


Figure 7: Pitch Plot Segmented into a 10×10 Spatial Grid.

Table 4: Spatial Recipient Probability Distribution for Pitch Bin (5, 5).

Rank	Position	Probability	Probability (%)
1	CM	0.3896	38.96
2	CB	0.3058	30.58
3	ST	0.1143	11.43
4	RB	0.0588	5.88
5	CAM	0.0468	4.68
6	RM	0.0305	3.05
7	LB	0.0272	2.72
8	LM	0.0261	2.61
9	GK	0.0011	0.11

7.5 Generative Markovian Recipient Resampling

For each empirical pass in the target match, the engine retains the origin, end location, and passer identity. The terminal coordinates query the learned probability tensor $P(p \mid r, c)$ to sample a recipient position, which is mapped to an active teammate. Self-passes ($A \rightarrow A$) are strictly prevented. Evaluating the resampled event stream prior to network aggregation confirms the engine successfully balances generative variance with domain realism. As detailed in [Appendix Table G](#), the spatial model avoids simply reproducing the input network while strictly enforcing defensive boundaries and realistically redistributing high-volume territorial possession.

Table 5: Sample Event Resampling and Player Mapping Stream.

Pass ID	Passer (Origin)	Bin	Drawn Pos.	Empirical	Resampled	Safeguard
101	Wubben-Moy	(2, 4)	CB	Williamson	Williamson	Valid ($A \neq B$)
102	Little	(5, 5)	CM	Pelova	Pelova	Valid ($A \neq B$)
103	Catley	(7, 2)	LM	Foord	Foord	Valid ($A \neq B$)
104	Pelova	(5, 8)	RB	Fox	Fox	Valid ($A \neq B$)
105	Wubben-Moy	(4, 5)	CM	Little	Pelova	Valid ($A \neq B$)
106	Little	(8, 5)	ST	Russo	Blackstenius	Valid ($A \neq B$)

7.6 Sample Null Passing Network

Visual comparison of the empirical network alongside a single spatial null realization demonstrates that spatial recipient resampling produces a natural, pitch-constrained topology. Unlike the Erdős–Rényi model, the rewired graph avoids pitch-wide “hairball” artifacts while maintaining realistic player positioning and passing channels.

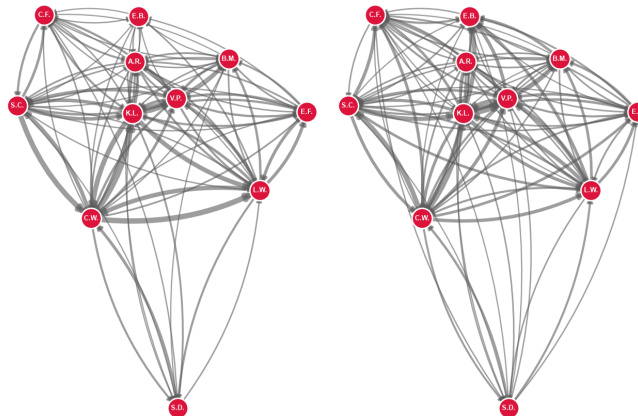


Figure 8: Empirical PassMap (Left) vs. Spatial Null Realization PassMap (Right).

7.6.1 Topological Degree Diagnostics

Evaluating macro-level degree properties across this single realization confirms the spatial engine synthesizes domain-valid reference networks (Table 6).

Holding passer volume (s_i^{out}) fixed recovers over half of empirical workload inequality ($\text{Var}(s_{\text{tot}}) = 2955.90$ vs. ER's 514.99). This reveals passer initiative accounts for roughly 52% of workload variance, while receiver choice drives 48%.

Replacing match-specific target preferences with league-average spatial probabilities increases active density ($\langle k \rangle = 17.64$) and flattens connection variance ($CV_k = 0.1115$). The Normalized Second Moment (17.86) closely tracks mean degree, proving empirical origin coordinates preserve structural density without creating scale-free hub anomalies.

Table 6: Sample Null Macro-Level Metrics vs. Empirical and ER Baselines.

Metric			Empirical	ER ($G(N, p)$)	Null
Mean Unweighted Degree ($\langle k \rangle$)			16.1818	15.4545	17.6364
Coefficient of Variation (CV_k)			0.1724	0.1305	0.1115
Normalized Second Moment ($\frac{\langle k^2 \rangle}{\langle k \rangle}$)			16.6629	15.7176	17.8557
Node	Volume	Variance	5681.90	514.99	2955.90
(Var(s_{tot}))					

8 Null Validation

While a single realization confirms local feasibility, formal validation requires a multi-run simulation to establish statistical stability and boundary constraints. Executing a 500-run Monte Carlo pipeline confirms that spatial recipient resampling reliably strips away match-specific tactical nuances across the entire null ensemble while strictly preserving domain-level topological invariants.

8.1 Macro-Level Heterogeneity and Structural Density

Across the 500-iteration ensemble, macro-level degree metrics confirm that spatial resampling maintains realistic structural density while suppressing extreme topological distortions (Table 7). The Mean Unweighted Degree averages $\langle k \rangle = 17.7411$ (95% CI: [16.9955, 18.3636]), representing an expected connection density ($\approx 88.7\%$) that populates peripheral channels without exceeding pitch boundaries.

The Coefficient of Variation ($CV_k = 0.1196$) remains well below scale-free thresholds ($CV_k \geq 1.0$), while the empirical value (0.1724) sits above the upper confidence bound (0.1615), confirming match-specific tactical heterogeneity. Additionally, the Normalized Second Moment (18.0011) closely tracks mean degree, proving the ensemble operates within logical domain boundaries without generating central super-hubs.

8.2 Workload Variance

Holding passer volume (s_i^{out}) fixed allows the spatial model to recover over half of empirical workload inequality. The ensemble Team Node Volume Variance ($\text{Var}(s_{\text{tot}})$) averages 3117.38 (95% CI: [2672.08, 3629.00]), capturing 55% of empirical variance (5681.90). This establishes that passer initiative accounts for roughly 55% of volume centralization, while targeted receiver selection drives 45%.

However, even the maximum simulated variance (4000.45) falls short of the empirical value. League-average spatial probabilities naturally smooth out extreme tactical dynamics—such as high team possession paired with an off-ball striker—highlighting the boundary where generic spatial occupancy rules meet highly stylized team play.

8.3 Role Realism

Functional role realism is similarly preserved across all iterations. Goalkeeper Sabrina D’Angelo’s total pass volume stays tightly bounded with an ensemble mean of 43.2300 passes (95% CI: [38.0000, 49.0000]) and a range of [35.0, 51.0]. Unlike Erdős–Rényi random graphs that erroneously transform the goalkeeper into an active playmaking hub, the spatial engine enforces defensive boundary constraints across every generated instance.

8.4 Generative Matrix Variance

Evaluating the correlation between empirical and resampled weighted adjacency matrices yields an ensemble mean of $\bar{r} = 0.6753$ (95% CI: [0.6026, 0.7468]). This moderate-to-high correlation verifies that while the model preserves fundamental spatial structure and high-volume passing channels, it introduces sufficient generative variance to shuffle tactical nuances without collapsing into uncorrelated random noise or duplicating the input matrix.

Table 7: Tier 1 Spatial Markovian Null Model Validation Summary ($N = 500$ Iterations).

Met- Empirical	Null Mean	Null Std	Min	Max	95% CI Low	95% CI High	
Mean Degree ($\langle k \rangle$)	16.1818	17.7411	0.3923	16.7273	18.7273	16.9955	18.3636
Variation Co-eff. (CV_k)	0.1724	0.1196	0.0209	0.0648	0.1755	0.0813	0.1615
Second Moment ($\frac{\langle k^2 \rangle}{\langle k \rangle}$)	16.6629	18.0011	0.3303	17.0978	18.8738	17.3529	18.5998
Node Var. ($\text{Var}(s_{\text{tot}})$)	5681.9008	3117.3808	246.0137	2382.2645	4000.4463	2672.0826	3629.0008
GK Volume (s_{tot})	38.0000	43.2300	2.9443	35.0000	51.0000	38.0000	49.0000
Adjacency Corr. (r)	0.0000	0.6753	0.0377	0.5544	0.7678	0.6026	0.7468

9 Null-Baselined Metric Evaluation

9.1 Experimental Setup & Simulation Scope

To evaluate empirical network properties against a spatially constrained baseline, we executed $N = 1000$ spatial Markovian resampling iterations over the target match event stream. Dedicated tracking structures logged multi-scale graph metrics across each Monte Carlo run, including global shortest paths (d), 3-player transitive triad bottleneck capacities ($W_{\min}$), and player-level betweenness centrality ($g(i)$).

9.2 Macro-Level Evaluation: Global Circulation Distance (d)

Evaluating global average shortest path ($d = 0.1884$) against the 1000-iteration spatial null ensemble reveals that Arsenal WFC’s circulation efficiency emerges primarily from spatial territory and pass volume rather than unique tactics or elite performance (Table 8).

The empirical path length sits slightly below the null mean ($\bar{d}_{\text{null}} = 0.1932$, $z = -0.43$), well within the 95% confidence interval ($[0.1732, 0.2120]$). Completing over 700 passes inherently dictates and bounds the global distance. One reason Arsenal’s path length remains above the theoretical minimum (0.1732) is because they forgo global efficiency in lieu of deliberate, localized tactical overloads.

Table 8: Null-Baselined Macro Evaluation Summary.

Scale	Metric	Empirical	Null Mean	Null 95% CI	Z-Score
Macro	Global Shortest Path (d)	0.1884	0.1932	$[0.1732, 0.2120]$	-0.43

9.3 Meso-Level Evaluation: Transitive Triad Dynamics ($I_{\text{transitive}}$)

Benchmarking the top 20 empirical transitive triads against the 1,000-iteration spatial null ensemble separates intentional tactical mechanics from simple spatial occupancy (Table 9).

Deep build-up triangles demonstrate extreme statistical significance. The rank 1 triad (Wubben-Moy-Little-Williamson; 116.00 units, $z = +3.83$) and rank 2 left-flank triangle (Wubben-Moy-Little-Catley; 111.00 units, $z = +5.67$) comfortably exceed null 95% upper bounds (98.00 and 78.00, respectively), confirming an intentional left-sided overloading mechanism for progressive build-up.

Conversely, central double-pivot recycling loops operate directly in line with spatial expectations. Triads like Wubben-Moy-Little-Pelova (69.00 units, $z = -0.28$) track null means ($\bar{W} = 71.53$) almost perfectly, proving their high volume reflects spatial density rather than specialized tactics.

Finally, Alessia Russo’s participation across progressive triads consistently surpasses null bounds (z -scores between $+1.84$ and $+2.78$), proving her deep-dropping movement represents deliberate tactical linkage rather than spatial chance.

Table 9: Null-Baselined Meso Evaluation Summary (Transitive Triads Top 20).

Rank	Targeted Triad ($A - B - C$)	Empirical	Null Mean	Null 95% CI	Z-Score
1	Wubben-Moy – Little – Williamson	116.00	79.23	[61.00, 98.00]	+3.83
2	Wubben-Moy – Little – Catley	111.00	61.11	[44.00, 78.00]	+5.67
3	Little – Catley – Pelova	76.00	56.74	[39.00, 74.00]	+2.11
4	Wubben-Moy – Little – Pelova	69.00	71.53	[54.98, 89.00]	−0.28
5	Little – Williamson – Pelova	67.00	66.89	[50.00, 85.00]	+0.01
6	Wubben-Moy – Catley – Pelova	65.00	49.48	[34.00, 65.00]	+1.97
7	Wubben-Moy – Williamson – Pelova	60.00	57.81	[42.00, 73.00]	+0.28
8	Fox – Williamson – Pelova	55.00	37.90	[24.00, 52.00]	+2.47
9	Russo – Little – Pelova	51.00	36.34	[21.00, 51.00]	+1.87
10	Fox – Little – Pelova	51.00	40.84	[25.00, 57.00]	+1.30
11	Fox – Little – Williamson	51.00	38.20	[23.00, 54.00]	+1.63
12	Russo – Little – Williamson	42.00	24.05	[10.00, 39.00]	+2.44
13	Mead – Williamson – Pelova	40.00	25.52	[15.00, 37.02]	+2.44
14	Russo – Wubben-Moy – Little	39.00	25.58	[12.00, 40.00]	+1.84
15	Russo – Williamson – Pelova	38.00	22.44	[9.00, 36.00]	+2.30
16	Russo – Wubben-Moy – Pelova	37.00	23.67	[11.00, 37.00]	+2.00
17	Russo – Wubben-Moy – Williamson	35.00	18.79	[7.00, 30.00]	+2.78
18	Foord – Little – Catley	33.00	37.36	[25.00, 50.00]	−0.67
19	Foord – Catley – Pelova	33.00	32.95	[21.00, 45.00]	+0.01
20	Wubben-Moy – Williamson – D’Angelo	33.00	32.70	[21.00, 44.02]	+0.05

9.4 Micro-Level Evaluation: Positional Betweenness Centrality ($g(i)$)

Evaluating empirical betweenness centrality ($g(i)$) against the 1,000-iteration spatial null baseline reveals how Arsenal WFC explicitly structures its build-up play (Table 10).

The central defensive core operates as a primary routing engine: both Left Center Back ($g = 0.3222, z = +2.73$) and Right Center Back ($g = 0.3000, z = +2.85$) exceed their upper 95% confidence bounds (0.2668 and 0.2556), proving their central conduit role is an explicit tactical instruction.

Controlling for empirical spatial volume highlights a distinct flank asymmetry. The Left Back baseline range ($[0.0000, 0.1556]$) reflects high local pass density; Steph Catley's score ($g = 0.1222, z = +1.73$) approaches this upper limit, whereas the Right Back registers $g = 0.0000$. Conversely, Left Defensive Midfield falls below its high spatial expectation ($\bar{g} = 0.2896$ vs. $g = 0.1778, z = -1.31$), demonstrating that Arsenal avoids over-funneling progression through a single central pivot. Finally, terminal attackers and the goalkeeper register $g = 0.0000$, preserving functional role boundaries.

Table 10: Null-Baselined Micro Evaluation Summary (Positional Betweenness Centrality).

Targeted Position	Empirical	Null Mean	Null 95% CI	Z-Score
Betweenness: Left Center Back	0.3222	0.1471	[0.0222, 0.2668]	+2.73
Betweenness: Right Center Back	0.3000	0.1149	[0.0111, 0.2556]	+2.85
Betweenness: Left Back	0.1222	0.0426	[0.0000, 0.1556]	+1.73
Betweenness: Right Defensive Midfield	0.1389	0.1367	[0.0111, 0.2778]	+0.03
Betweenness: Left Defensive Midfield	0.1778	0.2896	[0.1313, 0.4556]	-1.31
Betweenness: Right Back	0.0000	0.0071	[0.0000, 0.0667]	-0.38
Betweenness: Left Wing	0.0000	0.0058	[0.0000, 0.1000]	-0.27
Betweenness: Right Wing	0.0000	0.0054	[0.0000, 0.1000]	-0.27
Betweenness: Center Attacking Midfield	0.0000	0.0038	[0.0000, 0.0889]	-0.22
Betweenness: Goalkeeper	0.0000	0.0001	[0.0000, 0.0000]	-0.03
Betweenness: Center Forward	0.0000	0.0000	[0.0000, 0.0000]	0.00

10 Conclusion, Limitations, and Future Work

10.1 Conclusion

This project demonstrates the intersection of network science and sports analytics, exploring a spatially aware framework for evaluating collective tactical behavior in football. By leveraging open-source StatsBomb event data from the 2023/2024 FA Women’s Super League, the project converts raw spatiotemporal events into directed, weighted PassMaps while actively addressing the systemic underrepresentation of women’s football research.

The project deployed a comprehensive, multi-scale diagnostic suite across micro (betweenness centrality), meso (transitive triads), and macro (global shortest paths) graph dimensions, supported by custom spatial visualization tools.

This research responds to direct calls in literature [1] for robust null baselines. We validate that traditional randomizations, such as Erdős–Rényi, fail in this domain by destroying pitch geometry, flattening workload inequality, and generating structural role anomalies.

In response, we engineered a novel 1st-order Spatial Markovian generative null process. By inverting the paradigm to govern the dynamics of the network, the generative engine resamples pass recipients using league-average spatial probabilities while strictly preserving empirical origin coordinates, passer identities, and physical pitch boundaries.

Ultimately, executing this Monte Carlo null pipeline against an extreme high-volume match separated baseline geometric inevitabilities from deliberate tactical architecture, isolating true tactical signals like left-flank overloads and center-back re-distribution from baseline spatial noise.

10.2 Limitations

While effective for synthesizing static PassMaps, the first-order Markovian framework carries two primary structural limitations. First, its memoryless assumption evaluates passes in isolation based purely on terminal spatial coordinates. By ignoring sequential, multi-step player interactions, the model washes out localized “work group” dynamics and complex combinational routines, which restricts higher-order triad analysis. Second, the framework lacks temporal and game-state context. Aggregating pass totals across full 90-minute matches ignores time elapsed and scoreline dynamics, such as chasing a late deficit versus early-game consolidation. Consequently, resampled recipients reflect broad spatial averages rather than the specific tactical context of the original pass.

10.3 Future Work

Future research should expand the null validation framework by establishing algorithmic bounds that dynamically adjust for tactical formations, team quality, and game states. Expanding the generative engine requires integrating temporal context, higher-order sequence memory, and multi-step player interactions to better reflect localized combination play. Additionally, broadening the generative scope beyond pass recipient to resample pass destinations and origins based on role constraints would enable full synthetic event-stream generation. Ensembling these steps will allow analysts to systematically benchmark passer initiative, decision-making, and systemic ball progression across any tactical scenario.

References

- [1] Gama J, Dias G, Couceiro MS, Mendes R, Mendes RS, Vaz V. Linking network structures and stochastic flow properties: An exploratory Markov-spectral case study in professional football. *Proceedings of the Institution of Mechanical Engineers, Part P: Journal of Sports Engineering and Technology*. 2026;17543371261448957.
- [2] Wasserman S. *Advances in social network analysis: Research in the social and behavioral sciences*. vol. 171. Sage; 1994.
- [3] Newman ME. The structure of scientific collaboration networks. *Proceedings of the national academy of sciences*. 2001;98(2):404-9.
- [4] Fortunato S. Community detection in graphs. *Physics Reports*. 2010;486(3–5):75-174.
- [5] Pastor-Satorras R, Vespignani A. Epidemic spreading in scale-free networks. *Physical review letters*. 2001;86(14):3200.
- [6] Lusseau D. The emergent properties of a dolphin social network. *Proceedings of the Royal Society B: Biological Sciences*. 2003;270(Suppl 2):S186.
- [7] Newman ME. The structure and function of complex networks. *SIAM review*. 2003;45(2):167-256.
- [8] Araújo D, Davids K, Hristovski R. The ecological dynamics of decision making in sport. *Psychology of sport and exercise*. 2006;7(6):653-76.
- [9] Duch J, Waitzman JS, Amaral LAN. Quantifying the performance of individual players in a team activity. *PloS one*. 2010;5(6):e10937.
- [10] Pollard R, Reep C. Measuring the effectiveness of playing strategies at soccer. *Journal of the Royal Statistical Society Series D: The Statistician*. 1997;46(4):541-50.
- [11] Buldú JM, Busquets J, Echegoyen I, Seirul lo F. Defining a historic football team: Using Network Science to analyze Guardiola’s FC Barcelona. *Scientific reports*. 2019;9(1):13602.
- [12] Buldú JM, Busquets J, Martínez JH, Herrera-Diestra JL, Echegoyen I, Galeano J, et al. Using network science to analyse football passing networks: Dynamics, space, time, and the multilayer nature of the game. *Frontiers in psychology*. 2018;9:1900.
- [13] Alves R, Dias G, Nunes NA, Querido SM, Vaz V. Social network analysis in football: a systematic review of performance and tactical applications. *Frontiers in Psychology*. 2025;16:1659603.
- [14] Narizuka T, Yamamoto K, Yamazaki Y. Statistical properties of position-dependent ball-passing networks in football games. *Physica A: Statistical Mechanics and its Applications*. 2014;412:157-68.
- [15] Gama J, Dias G, Pereira M, Mendes R, Mendes RS, Sarmiento H, et al. Network analysis to understand variability and patterns of individual and collective behaviour in professional football: A systematic review. *International Journal of Performance Analysis in Sport*. 2026:1-62.

- [16] Arriaza-Ardiles E, Martín-González J, Zuniga M, Sánchez-Flores J, De Saa Y, García-Manso JM. Applying graphs and complex networks to football metric interpretation. *Human movement science*. 2018;57:236-43.
- [17] Pena JL, Touchette H. A network theory analysis of football strategies. *arXiv preprint arXiv:12066904*. 2012.
- [18] Watts DJ, Strogatz SH. Collective dynamics of ‘small-world’ networks. *nature*. 1998;393(6684):440-2.
- [19] Peña JL, Navarro RS. Who can replace Xavi? A passing motif analysis of football players. *arXiv preprint arXiv:150607768*. 2015.
- [20] Gilbert EN. Random Graphs. *The Annals of Mathematical Statistics*. 1959;30(4):1141-4.
- [21] Erdős P, Rényi A. On Random Graphs I. *Publicationes Mathematicae Debrecen*. 1959;6:290-7.

Appendices

A Football Network Metrics Taxonomy

Table 11: Micro-Scale Network Metrics and Football Interpretations [1].

Metric	Footballing Interpretation & Tactical Meaning
Degree Centrality	Volume of Direct Involvement: Quantifies how frequently a player acts as a passer/receiver, indicating workload in possession circulation and immediate availability as an outlet. High values suggest greater involvement in ball circulation.
Closeness Centrality	Distribution Speed: Assesses how quickly a player can reach (or be reached by) teammates. Lower values suggest the ability to receive and distribute under time pressure; higher values may indicate peripheral positioning.
Stress Centrality	Transitional Load: Identifies players who bear the highest volume of passing traffic between sectors, indicating responsibility in maintaining possession during phase transitions.
Betweenness Centrality	Connective Mediation: Identifies players who bridge different team sectors (defense–midfield–attack), enabling transitions and bypassing opposition pressure. High values indicate an essential role in team structural connectivity.
Degree Prestige	Solicited Player Target: Identifies players who are most sought out by teammates during the game, as measured by the number of passes received. High values indicate trusted targets in possession.
Eigenvector Centrality	Influence via Central Hubs: Measures player importance based on being connected to other highly active, central players rather than just raw volume. High values denote key links within primary tactical cores.
PageRank Centrality	Tactical Reference Point: Identifies players who receive passes due to their perceived importance and positional quality. High values suggest teammates actively seek them out as reliable options under pressure.
Clustering Coefficient	Local Combination Play: Identifies players who favor quick passing exchanges in tight spaces. High values indicate participation in short, repetitive passing patterns.
Node Transition Entropy	Individual Passing Variability: Measures how evenly a player distributes passes among teammates. Captures diversity of passing choices rather than volume. High values indicate unpredictable distribution; low values suggest predictable passing patterns.

Table 12: Macro-Scale Network Metrics and Football Interpretations [1].

Metric	Footballing Interpretation & Tactical Meaning
Total Links	Collective Involvement: Total number of connected player pairs. Reflects overall team participation in possession and interaction diversity.
Network Density	Interaction Fluidity: Proportion of possible connections realized. Higher density suggests quick passing options and supported play; lower density indicates spatial dispersion or structured width.
Average Distance	Structural Proximity: Average path length between players. Shorter distances indicate tight positioning and quick exchange potential; longer distances suggest tactical width or isolated sectors.
Network Diameter	Maximum Reorganization Length: Longest shortest path between any two players. Indicates how quickly the team can reorganize possession across extremes of the formation.
Network Heterogeneity	Interaction Concentration: Measures variance in overall player involvement. High values indicate heavy concentration around a few core players; low values suggest balanced team distribution.
Transitivity	Triangulation Tendency: Measures the proportion of triplet connections that form closed triangles. Reflects capacity for quick passing combinations and small-group play.
Reciprocity	Bidirectional Exchange: Shows balance in two-way passing between player pairs. High reciprocity suggests mutual trust and balanced distribution; low reciprocity indicates directed, progression-oriented play.
Global Centralization	Hub Dependence: Indicates whether the team relies heavily on one or a few key players to conduct play. Higher values suggest tactical vulnerability if central hubs are marked out.
Assortativity Coefficient	Role-Based Connectivity: Identifies whether players tend to connect with similar or different positional roles. Negative values suggest functional integration across lines; positive values indicate within-role clustering.
Network Transition Entropy	Team-Level Passing Unpredictability: Global measure of how evenly passes are distributed across all possible connections. Dense networks can still be predictable if passes concentrate on a few links; high entropy indicates overall tactical unpredictability for opponents.

B Dataset and Positional Taxonomy

Table 13: Distribution of Starting Formations Within the Modal Pass-Volume Tier (200–299 Passes, $n = 94$).

Starting Formation	Match Count (n)	Percentage (%)
4-2-3-1	29	30.85
3-5-2	14	14.89
4-3-3	12	12.77
4-1-4-1	11	11.70
3-4-3	11	11.70
4-4-2	6	6.38
4-4-1-1	5	5.32
3-4-1-2	3	3.19
3-4-2-1	1	1.06
4-1-2-1-2	1	1.06
4-5-1	1	1.06

C Null Model Triad Evaluation

Table 14: Top 10 Active Transitive Triads (Erdős–Rényi Null Model).

Rank	Origin / Target (A)	Intermediate (B)	Target / Origin (C)	Bottleneck Capacity ($W_{\min}$)
1	Blackstenius	Wubben-Moy	Mead	69.0
2	D’Angelo	Blackstenius	Fox	51.0
3	Blackstenius	Wubben-Moy	Fox	46.0
4	Blackstenius	Fox	Mead	44.0
5	Fox	Foord	Mead	44.0
6	Catley	Foord	Mead	43.0
7	Catley	Little	Mead	42.0
8	Catley	Fox	Foord	41.0
9	Wubben-Moy	Fox	Mead	40.0
10	Little	Pelova	Mead	39.0

D Condensed Positional Taxonomy and Mapping Logical

Table 15: Condensed Position Categories with Original Positions and Total Pass Volume.

Rank	Position	Original Position(s)	Pass Count
1	CB	Center Back, Left Center Back, Right Center Back	25,544
2	CM	Left Defensive Midfield, Center Defensive Midfield, Right Defensive Midfield, Left Center Midfield, Right Center Midfield	20,027
3	LB	Left Back, Left Wing Back	8,554
4	RB	Right Back, Right Wing Back	8,003
5	ST	Center Forward, Left Center Forward, Right Center Forward	7,066
6	GK	Goalkeeper	6,730
7	LM	Left Wing, Left Midfield	5,461
8	RM	Right Wing, Right Midfield	5,256
9	CAM	Center Attacking Midfield, Left Attacking Midfield, Right Attacking Midfield	3,140

E Original Position Counts

Table 16: Original Granular Position Counts Across Season Corpus.

Index	Original Recipient Position	Count
0	Left Center Back	11,956
1	Right Center Back	10,913
2	Goalkeeper	6,730
3	Left Back	6,283
4	Right Back	5,926
5	Left Defensive Midfield	5,446
6	Right Defensive Midfield	4,997
7	Center Forward	4,469
8	Left Wing	4,315
9	Right Wing	4,103
10	Center Defensive Midfield	3,532
11	Left Center Midfield	3,065
12	Right Center Midfield	2,987
13	Center Attacking Midfield	2,729
14	Center Back	2,675
15	Left Wing Back	2,271
16	Right Wing Back	2,077
17	Left Center Forward	1,349
18	Right Center Forward	1,248
19	Right Midfield	1,153
20	Left Midfield	1,146
21	Right Attacking Midfield	213
22	Left Attacking Midfield	198

F Resampled Player Pass Share

Table 17: Change in Pass Share: Empirical vs. Resampled Receptions.

Player	Count	Share (%)	Resampled Count	Resampled Share (%)
Moy	120	16.67	67	9.31
Little	117	16.25	106	14.72
Williamson	99	13.75	66	9.17
Pelova	92	12.78	108	15.00
Catley	79	10.97	70	9.72
Russo	60	8.33	25	3.47
Fox	48	6.67	48	6.67
Mead	42	5.83	55	7.64
Foord	33	4.58	65	9.03
D'Angelo	19	2.64	14	1.94
Blackstenius	11	1.53	96	13.33

G Sense Checking the Resampled Recipient Dataset

Evaluating the pre-aggregation resampled event stream confirms the engine balances generative variance with domain realism. Remapping 22.08% of passes to their exact empirical recipient shows the model preserves localized spatial dominance without simply reproducing the input network.

The framework enforces role boundaries—constraining goalkeeper Sabrina D’Angelo to 13 receptions (down from 19)—while highlighting structural trade-offs. Wingers Caitlin Foord and Beth Mead receive inflated pass shares because the model lacks temporal substitution weighting, treating their 63-minute appearances as full matches.

Striker Stina Blackstenius shows the largest shift, rising from 11 empirical receptions (1.53%) to 96 resampled receptions (13.33%). Because Arsenal dominated deep territory where tensor bins assign high baseline probabilities to central forwards, this spike reflects territorial volume replacing her specialized off-ball isolation, rather than a generative failure (Figure 9).

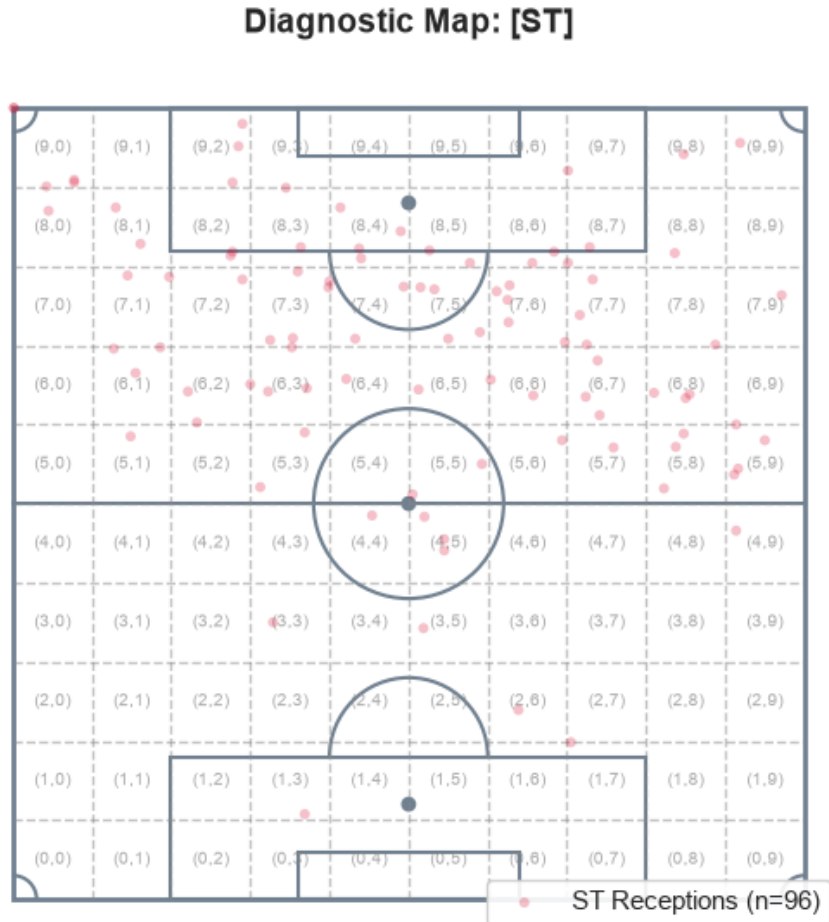


Figure 9: Pitch plot illustrating spatial reception areas for the resampled striker position.

Table 18: League-Wide Striker Pass Execution Summary.

Metric	Value
Total Completed Passes	89,781
Striker Completed Passes	4,433
Percentage Completed by Strikers	4.94%

H League Wide Striker Pass Summary

Table 19: League-Wide Striker Pass Execution Summary.

Metric	Value
Total Completed Passes	89,781
Striker Completed Passes	4,433
Percentage Completed by Strikers	4.94%