### Con console log

```
Summary report @ 21:29:59(-0300)
http.response time:
vusers.created_by_name.0: ..... 50
vusers.session_length:
```

#### Sin console log

```
_____
Summary report @ 21:32:05(-0300)
http.response time:
vusers.completed: 50
vusers.session_length:
```

### Con console log

```
[Summary]:
 ticks total nonlib
                       name
         1.0%
              96.0%
                      JavaScript
   24
    ø
         0.0%
                0.0% C++
   24
        1.0%
                96.0% GC
 2423
      99.0%
                       Shared libraries
         0.0%
                      Unaccounted
    1
```

## Sin console log

```
[Summary]:

ticks total nonlib name


23 1.4% 100.0% JavaScript

0 0.0% 0.0% C++


25 1.5% 108.7% GC

1632 98.6% Shared libraries
```


## Con console log

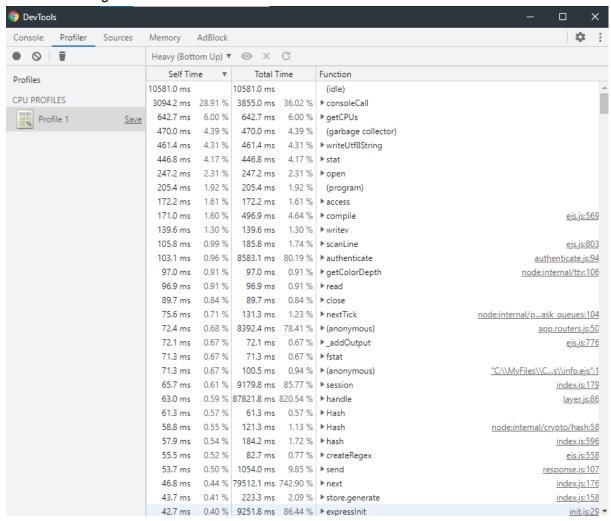


### Sin console log

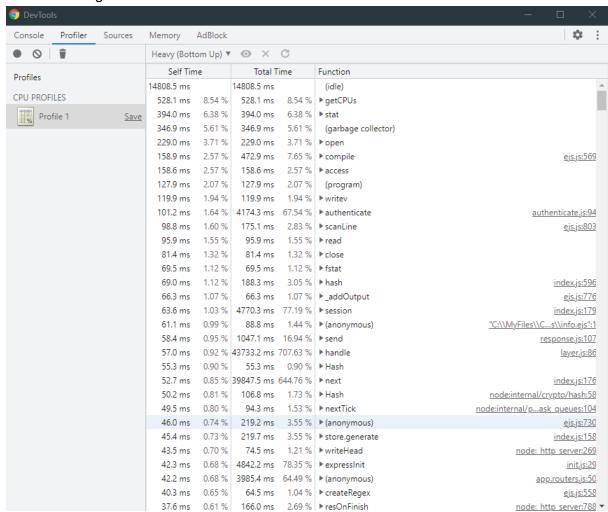

#### Con console log

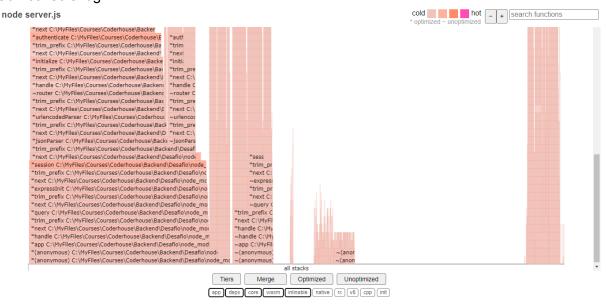

# Sin console log

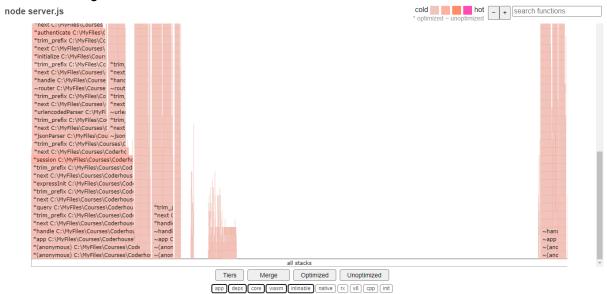

Al console log ser una función síncrona no es conveniente dejarla para producción ya que perjudica a la performance del servidor.