

# PSYCH-BENCH: Supplementary Material

## Complete Benchmark Inventory

Tristan Stoltz  
Luminous Dynamics  
tristan.stoltz@evolvingresonantcocreationalism.com

### Table S1: Complete Benchmark Inventory

Table S1 lists all 141 benchmarks in the PSYCH-BENCH suite, organized by domain. Each entry provides the benchmark name, source paradigm, primary citation, year, key metric, and HDC stimulus adapter type used for encoding.

Table 1: Complete inventory of all 141 benchmarks in PSYCH-BENCH, organized by domain.

| Domain    | Benchmark        | Paradigm / Citation                             | Year | Key Metric           | HDC Adapter |
|-----------|------------------|-------------------------------------------------|------|----------------------|-------------|
| Executive | Stroop           | Color-word interference (Stroop, 1935)          | 1935 | stroop_effect        | Sequence    |
| Executive | WCST             | Set-shifting (Berg, 1948)                       | 1948 | categories_completed | Sequence    |
| Executive | Flanker          | Response conflict (Eriksen and Eriksen, 1974)   | 1974 | flanker_effect       | Sequence    |
| Executive | Iowa Gambling    | Decision under ambiguity (Bechara et al., 1994) | 1994 | overall_net_score    | Reward      |
| Executive | Ravens           | Fluid intelligence (Raven, 1938)                | 1938 | overall_accuracy     | Spatial     |
| Executive | Tower of London  | Planning (Shallice, 1982)                       | 1982 | overall_optimal_rate | Spatial     |
| Executive | Dual-Task        | Divided attention (Pashler, 1994)               | 1994 | dual_task_cost       | Sequence    |
| WorM      | N-back           | Working memory updating (Jaeggi et al., 2010)   | 1958 | nback_2::accuracy    | Sequence    |
| WorM      | Change Detection | Visual WM capacity (Luck and Vogel, 1997)       | 1997 | change_detection_k4  | Spatial     |

*Continued on next page*

| Domain      | Benchmark           | Paradigm / Citation                            | Year | Key Metric              | HDC Adapter |
|-------------|---------------------|------------------------------------------------|------|-------------------------|-------------|
| WorM        | Serial Recall       | Short-term memory (Murdock, 1962)              | 1962 | primacy_advantage       | Sequence    |
| WorM        | Spatial Updating    | Spatial WM (Oberauer, 2003)                    | 2003 | updating_accuracy       | Spatial     |
| WorM        | Binding             | Feature binding (Luck and Vogel, 1997)         | 1997 | binding_accuracy        | Spatial     |
| WorM        | Digit Span          | Verbal WM (Wechsler, 2008)                     | 1997 | forward_span            | Sequence    |
| MemoryAgent | Accurate Retrieval  | Retrieval accuracy (Anderson, 1983)            | 1983 | retrieval_accuracy      | Scenario    |
| MemoryAgent | Test-Time Learning  | Test-enhanced learning                         | 2006 | online_gain             | Scenario    |
| MemoryAgent | Long-Range          | Long-range retention                           | 1885 | retention_accuracy      | Scenario    |
| MemoryAgent | Conflict Resolution | Interference resolution                        | 1996 | resolution_accuracy     | Scenario    |
| MemoryAgent | Prospective Memory  | Future intention execution                     | 1990 | pm_hit_rate             | Scenario    |
| Attention   | Visual Search       | Feature/conjunction search                     | 1980 | feature_search_accuracy | Spatial     |
| Attention   | Attentional Blink   | Dual-target RSVP                               | 1992 | t1_accuracy             | Sequence    |
| Attention   | Mismatch Negativity | Deviance detection                             | 1978 | mismatch_amplitude      | Sequence    |
| SustAttn    | SART                | Sustained attention (Robertson et al., 1997)   | 1997 | sart_d_prime            | Sequence    |
| SustAttn    | PVT                 | Vigilance                                      | 1985 | pvt_mean_rt             | Sequence    |
| SustAttn    | CPT                 | Continuous performance                         | 1956 | cpt_hit_rate            | Sequence    |
| Social      | RME                 | Emotion recognition (Baron-Cohen et al., 2001) | 2001 | rme_accuracy            | Scenario    |
| Social      | Ultimatum Game      | Social fairness (Güth et al., 1982)            | 1982 | offer_ratio             | Reward      |
| Social      | Social Norm         | Norm compliance                                | 2006 | norm_detection_accuracy | Scenario    |
| Social      | Prisoner’s Dilemma  | Cooperation dynamics                           | 1950 | cooperation_rate        | Reward      |
| Social      | Public Goods        | Free-rider sensitivity                         | 1979 | contribution_ratio      | Reward      |
| Social      | Dictator Game       | Resource allocation fairness                   | 1986 | allocation_fairness     | Reward      |
| ToMBench    | False Belief        | False belief task (Baron-Cohen et al., 1985)   | 1983 | false_belief_accuracy   | Scenario    |

*Continued on next page*

| Domain        | Benchmark            | Paradigm / Citation                                    | Year | Key Metric             | HDC Adapter |
|---------------|----------------------|--------------------------------------------------------|------|------------------------|-------------|
| ToMBench      | Faux Pas             | Faux pas detection (Stone et al., 1998)                | 1999 | faux_pas_accuracy      | Scenario    |
| ToMBench      | Persuasion           | Persuasion evaluation                                  | 1994 | persuasion_detection   | Scenario    |
| ToMBench      | Strange Story        | Strange stories (Happé, 1994)                          | 1994 | strange_story_accuracy | Scenario    |
| ToMBench      | Hinting              | Hinting task (Corcoran et al., 1995)                   | 1995 | hinting_accuracy       | Scenario    |
| Motor         | SRTT                 | Implicit sequence learning (Nissen and Bullemer, 1987) | 1987 | sequence_rt_ticks      | Sequence    |
| Motor         | Fitts' Law           | Speed-accuracy tradeoff (Fitts, 1954)                  | 1954 | fitts_r_squared        | Spatial     |
| Motor         | Bimanual             | Bimanual coordination                                  | 1984 | coordination_cost      | Spatial     |
| Motor         | Proprioceptive Drift | Proprioceptive error accumulation                      | 1998 | drift_magnitude        | Spatial     |
| Language      | Garden-Path          | Sentence processing (Ferreira et al., 2002)            | 1982 | garden_path_accuracy   | Semantic    |
| Language      | Semantic Coherence   | Text comprehension                                     | 2004 | coherence_mean         | Semantic    |
| Language      | Lexical Decision     | Word recognition                                       | 1971 | lexicality_effect      | Semantic    |
| Language      | Semantic Priming     | Priming facilitation                                   | 1977 | priming_effect         | Semantic    |
| Metacognition | Calibration          | Confidence calibration                                 | 1982 | calibration_error_ece  | Sequence    |
| Metacognition | Feeling of Knowing   | FOK judgment                                           | 1965 | fok_gamma              | Sequence    |
| Metacognition | Change Blindness     | Saliency-weighted search (?)                           | 1997 | search_efficiency      | Spatial     |
| Reasoning     | ARC Fluid            | Abstract reasoning (Chollet, 2019)                     | 2019 | transfer_accuracy      | Spatial     |
| Reasoning     | ARC Compositional    | Compositional rules                                    | 2021 | compositional_accuracy | Spatial     |
| Reasoning     | ARC Analogy          | Analogical transfer                                    | 2019 | analogy_accuracy       | Spatial     |
| Reasoning     | ARC Abductive        | Abductive inference                                    | 2019 | abductive_accuracy     | Spatial     |
| Reasoning     | ARC Algebra          | Algebraic encoding                                     | 2003 | algebra_accuracy       | Spatial     |
| Reasoning     | ARC Chain            | Multi-step chaining                                    | 2019 | chain_accuracy         | Spatial     |
| Reasoning     | ARC FewShot          | Few-shot learning                                      | 2019 | few_shot_accuracy      | Spatial     |
| Reasoning     | ARC Noise            | Noise robustness                                       | 2019 | noise_accuracy         | Spatial     |
| Reasoning     | ARC RSA              | Representational similarity                            | 2008 | rsa_r_squared          | Spatial     |

*Continued on next page*

| Domain     | Benchmark               | Paradigm / Citation                                 | Year | Key Metric             | HDC Adapter |
|------------|-------------------------|-----------------------------------------------------|------|------------------------|-------------|
| Reasoning  | ARC Scaling             | Parametric scaling                                  | 2009 | capacity_threshold     | Spatial     |
| Reasoning  | ARC Staircase           | Adaptive threshold                                  | 1971 | staircase_threshold    | Spatial     |
| CogBench   | Probabilistic Reasoning | Beads task                                          | 1966 | draws_to_decision      | Sequence    |
| CogBench   | Horizon Task            | Explore-exploit                                     | 2014 | directed_exploration   | Reward      |
| CogBench   | Restless Bandit         | Multi-armed bandit                                  | 2006 | total_reward           | Reward      |
| CogBench   | Instrumental Learning   | Associative learning                                | 2011 | learning_rate          | Reward      |
| CogBench   | Two-Step                | MB/MF learning (Daw et al., 2011)                   | 2011 | model_basedness        | Reward      |
| CogBench   | Temporal Discounting    | Delay discounting                                   | 2004 | discount_rate          | Reward      |
| CogBench   | BART                    | Risk-taking (Lejuez et al., 2002)                   | 2002 | avg_pumps              | Reward      |
| CogBench   | Reversal Learning       | Flexible learning (Cools et al., 2002)              | 2002 | win_stay_rate          | Reward      |
| Affect     | Valence Classification  | Affective valence                                   | 1980 | valence_accuracy       | Scenario    |
| Affect     | Mood-Congruent Recall   | Mood-memory interaction (Bower, 1981)               | 1981 | congruence_ratio       | Scenario    |
| Affect     | Emotional Stroop        | Affective interference (Williams et al., 1996)      | 1996 | emotional_interference | Sequence    |
| Creativity | Remote Associates       | RAT (Mednick, 1962)                                 | 1962 | solution_rate          | Scenario    |
| Creativity | Alternate Uses          | Divergent thinking (Guilford, 1967)                 | 1967 | aut_originality        | Scenario    |
| Creativity | Divergent Thinking      | Elaboration/flexibility                             | 1967 | originality_score      | Scenario    |
| Creativity | Conceptual Blending     | Creative recombination (Faconnier and Turner, 2002) | 2002 | blend_quality          | Scenario    |
| Inhibition | Go/No-Go                | Response inhibition                                 | 1969 | go_accuracy            | Sequence    |
| Inhibition | Stop-Signal             | Response stopping (Logan and Cowan, 1984)           | 1984 | sst_stop_accuracy      | Sequence    |
| Inhibition | Flanker Inhibition      | Flanker suppression                                 | 1974 | suppression_efficiency | Sequence    |

*Continued on next page*

| Domain          | Benchmark                | Paradigm / Citation                        | Year | Key Metric           | HDC Adapter |
|-----------------|--------------------------|--------------------------------------------|------|----------------------|-------------|
| Butlin          | Consciousness Indicators | 14-indicator battery (Butlin et al., 2023) | 2023 | indicators_present   | —           |
| Binding         | Temporal Order           | Temporal order judgment                    | 1976 | discrimination_slope | Sequence    |
| Binding         | Cross-Modal              | Cross-modal feature binding                | 2001 | binding_accuracy     | Spatial     |
| Binding         | Feature Conjunction      | Conjunction search (?)                     | 1980 | conjunction_slope    | Spatial     |
| Spatial         | Mental Rotation          | Mental rotation (?)                        | 1971 | rotation_slope       | Spatial     |
| Spatial         | Path Updating            | Spatial path integration                   | 2003 | updating_error       | Spatial     |
| Spatial         | Landmark Binding         | Landmark-route binding                     | 1978 | binding_fidelity     | Spatial     |
| Spatial         | Perspective Taking       | Perspective transformation                 | 1988 | perspective_error    | Spatial     |
| CausalReasoning | Causal Chain             | Multi-level causal chains                  | 2000 | chain_accuracy       | Scenario    |
| CausalReasoning | Confound Detection       | Confound identification                    | 2003 | detection_rate       | Scenario    |
| CausalReasoning | Intervention Effect      | Counterfactual intervention                | 2003 | prediction_accuracy  | Scenario    |
| Speech          | Phoneme Discrimination   | Phoneme discrimination                     | 1957 | sensitivity          | Sequence    |
| Speech          | VOT Continuum            | Voice onset time judgment                  | 1971 | category_boundary    | Sequence    |
| Speech          | Categorical Perception   | Categorical perception index               | 1957 | perception_index     | Sequence    |
| Consciousness   | Blindsight               | Unseen stimulus discrimination             | 1974 | unseen_accuracy      | Spatial     |
| Consciousness   | Binocular Rivalry        | Rivalry dynamics                           | 2004 | switch_rate          | Spatial     |
| Consciousness   | Perceptual Crowding      | Peripheral crowding                        | 2008 | crowding_magnitude   | Spatial     |
| Substrate       | Transfer                 | Cross-substrate transfer fidelity          | 2009 | transfer_fidelity    | —           |
| Substrate       | Degradation              | Degradation resistance                     | 1988 | homeostatic_response | —           |
| Substrate       | Latency                  | Latency compensation                       | 2003 | recovery_coefficient | —           |
| Clinical        | Empathic Accuracy        | Empathic accuracy                          | 1992 | accuracy_correlation | Scenario    |
| Clinical        | Therapeutic Response     | Therapeutic skill                          | 2004 | response_quality     | Scenario    |

*Continued on next page*

| Domain          | Benchmark                 | Paradigm / Citation         | Year | Key Metric               | HDC Adapter |
|-----------------|---------------------------|-----------------------------|------|--------------------------|-------------|
| Clinical        | Alliance Maintenance      | Therapeutic alliance        | 2000 | alliance_consistency     | Scenario    |
| Clinical        | Crisis Detection          | Crisis detection            | 2010 | detection_sensitivity    | Scenario    |
| Clinical        | Cognitive Distortion      | CBT distortion ID           | 1976 | distortion_accuracy      | Scenario    |
| Clinical        | Motivational Interviewing | MI skill integration        | 2002 | mi_integration           | Scenario    |
| InstitReasoning | Institutional             | Institutional structure     | 2009 | structure_accuracy       | Scenario    |
| InstitReasoning | Analogical                | Institution analogies       | 1983 | mapping_quality          | Scenario    |
| InstitReasoning | Causal Chain              | Institutional causal chains | 2000 | decomposition_accuracy   | Scenario    |
| InstitReasoning | Counterfactual            | Counterfactual design       | 2005 | counterfactual_coherence | Scenario    |
| InstitReasoning | Weighted Decomposition    | Effect decomposition        | 2001 | weight_error             | Scenario    |
| InstitReasoning | Stability                 | Stability prediction        | 2004 | prediction_accuracy      | Scenario    |
| InstitReasoning | Isomorphism               | Isomorphism detection       | 2001 | detection_accuracy       | Scenario    |
| Mathematics     | Arithmetic Word           | Multi-step word problems    | 1999 | problem_accuracy         | Sequence    |
| Mathematics     | Linear Systems            | Linear system solving       | 1974 | solution_error           | Sequence    |
| Mathematics     | Polynomial Roots          | Root finding                | 1974 | root_precision           | Sequence    |
| Mathematics     | Matrix Operations         | Matrix ops (eigen, SVD)     | 1965 | operation_accuracy       | Sequence    |
| Mathematics     | Statistical Inference     | Bayesian inference          | 1763 | posterior_calibration    | Sequence    |
| Mathematics     | Bayesian Reasoning        | Bayesian updating           | 1996 | update_accuracy          | Sequence    |
| Mathematics     | Logical Deduction         | Logical inference           | 1965 | inference_accuracy       | Sequence    |
| Mathematics     | Constraint Puzzles        | CSP solving                 | 2003 | satisfaction_rate        | Spatial     |
| Security        | Encrypted Classification  | HDC-FHE classification      | 2016 | accuracy_preservation    | —           |
| Security        | Collective Aggregation    | Encrypted aggregation       | 2019 | collective_fidelity      | —           |
| Security        | Encrypted Learning        | Privacy-preserving learning | 2016 | learning_loss            | —           |
| Security        | Cross-Mask Privacy        | Multi-agent encryption      | 1949 | privacy_guarantee        | —           |
| Security        | Encrypted Binding         | Binding in encrypted space  | 2003 | binding_preservation     | —           |
| Security        | Scaling Analysis          | Accuracy under scaling      | 2019 | scaling_fidelity         | —           |
| Coding          | HumanEval Mini            | Code generation             | 2021 | pass_at_1                | Semantic    |

*Continued on next page*

| Domain   | Benchmark                 | Paradigm / Citation                        | Year | Key Metric          | HDC Adapter |
|----------|---------------------------|--------------------------------------------|------|---------------------|-------------|
| Coding   | Bug Detection             | Bug localization                           | 2019 | delta_magnitude     | Semantic    |
| Neuromod | Reward Learning           | DA prediction error (Schultz et al., 1997) | 1997 | rpe_correlation     | Reward      |
| Neuromod | Yerkes-Dodson             | NE inverted-U (Yerkes and Dodson, 1908)    | 1908 | inverted_u_fit_r2   | —           |
| Neuromod | Attention Network         | ACh ANT decomposition                      | 1990 | conflict_effect     | Sequence    |
| Neuromod | Mood Induction            | 5-HT mood-cognition                        | 2009 | mood_perf_r         | Scenario    |
| Neuromod | Pharm. Ablation           | Transmitter knockout                       | 2002 | knockout_d          | —           |
| Neuromod | Pharm. Challenge          | Agonist/antagonist                         | 2011 | inverted_u_fit      | —           |
| Neuromod | Injection Challenge       | PK decay + tolerance                       | 2011 | peak_shift          | —           |
| Neuromod | Allostatic Stress         | Chronic load                               | 1998 | allostatic_index    | —           |
| Neuromod | Dose Response             | Graded dose sweep                          | 1937 | monotonicity_score  | —           |
| Neuromod | Tolerance/Withdrawal      | Sustained exposure                         | 2001 | tolerance_ratio     | —           |
| Neuromod | Antagonist Profiles       | Named antagonists                          | 2013 | selectivity_index   | —           |
| Neuromod | Multi-Transmitter Synergy | Paired interactions                        | 2002 | synergy_coefficient | —           |
| Neuromod | Consciousness Pharm.      | Drug $\rightarrow$ $\Phi$ proxy            | 2004 | proxy_peak          | —           |
| Neuromod | Consciousness Feed-back   | $\Phi$ round-trip                          | 2014 | feedback_latency    | —           |
| Neuromod | Moral Oxytocin            | OT $\times$ moral topology                 | 2012 | moral_ot_r          | —           |
| Neuromod | Behavioral Knock-out      | Knockout effect size                       | 2002 | behavioral_d        | —           |
| Neuromod | Live-Loop Ablation        | In-loop knockout                           | 2002 | behavioral_delta    | —           |

## Supplementary Data Files

The following CSV data files are included in the repository under `papers/data/psych_bench/` and are regenerated deterministically by:

```
cargo run -p symthaea-psych-bench -example psych_bench_paper_data
```

- `normative_zscores.csv` — Per-benchmark normative z-scores comparing agent performance against published human baselines (Figure 5 forest plot). Columns: benchmark, metric, agent value, human mean, human SD, z-score (sign-corrected), percentile, clinical band.
- `cognitive_profile.csv` — Domain-level cognitive profile scores (Figures 5–6). 27 domains with score, benchmark count, and qualitative interpretation.
- `reliability.csv` — Test-retest reliability (ICC(3,1)) for 20 benchmarks across 5 sessions  $\times$  30 seed families (Table 2). Columns: benchmark, metric, ICC, Pearson  $r$ , SEM, practice direction, practice change %, reliability class.
- `correlations.csv` — Cross-domain correlation matrix for 10 key mechanism pairs (Table 3).
- `ablation_domains.csv` — Domain scores under 6 ablation presets (Figure 7 grouped bar chart). 27 domains  $\times$  6 presets.
- `sat_*.csv` — Speed-accuracy tradeoff curves for individual benchmarks (Figure 8).
- `neuromod_profiles.csv` — Neuromodulator benchmark results including behavioral knockout effect sizes, dose-response monotonicity, tolerance/withdrawal dynamics, and consciousness pharmacology.
- `normative_forest.csv` — Forest plot data for all 123 benchmarks with baselines. Columns: benchmark, domain, metric, agent value, human mean, human SD, z-score, z-clamped, percentile, interpretation.
- `cross_seed_stability.csv` — Cross-seed stability analysis across 5 seeds (42, 123, 789, 1337, 2718). 27 domains with per-seed z-scores, mean, and SD. Mean domain SD = 0.071; most stable domains (SD < 0.01): InstitutionalReasoning, Clinical, Motor, Security, SustainedAttention.



## Section S2: Cross-Seed Stability Analysis

To assess robustness to random initialization, the full battery was run at 5 seeds (42, 123, 789, 1337, 2718). Table S2 reports per-domain z-scores at each seed, with mean and standard deviation.

Table 2: Cross-seed stability: domain z-scores across 5 seeds. Domains with  $SD < 0.01$  are ablation-invariant; high-SD domains (Creativity, Executive, Mathematics) reflect genuine seed sensitivity in HDC encoding.

| Domain             | Seed 42     | Seed 123    | Seed 789    | Seed 1337   | Seed 2718   | Mean        | SD           |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Affect             | 1.20        | 1.16        | 1.25        | 1.18        | 1.31        | 1.22        | 0.052        |
| Attention          | 0.34        | 0.36        | 0.23        | 0.17        | 0.33        | 0.29        | 0.073        |
| Binding            | 0.62        | 0.71        | 0.73        | 0.69        | 0.67        | 0.68        | 0.039        |
| Butlin             | 0.67        | 0.67        | 0.67        | 0.67        | 0.67        | 0.67        | 0.000        |
| CausalReasoning    | 0.80        | 0.80        | 0.80        | 0.80        | 0.80        | 0.80        | 0.001        |
| Clinical           | 2.00        | 2.00        | 2.00        | 2.00        | 2.00        | 2.00        | 0.000        |
| Coding             | 1.79        | 1.84        | 1.73        | 1.74        | 1.63        | 1.75        | 0.069        |
| CogBench           | 0.58        | 0.51        | 0.58        | 0.56        | 0.47        | 0.54        | 0.045        |
| Consciousness      | 0.69        | 0.71        | 0.73        | 0.61        | 0.64        | 0.68        | 0.045        |
| <b>Creativity</b>  | <b>0.67</b> | <b>1.12</b> | <b>1.16</b> | <b>1.37</b> | <b>0.53</b> | <b>0.97</b> | <b>0.316</b> |
| Executive          | 0.72        | 1.10        | 1.19        | 0.95        | 1.15        | 1.02        | 0.172        |
| Inhibition         | 1.57        | 1.54        | 1.50        | 1.48        | 1.54        | 1.52        | 0.031        |
| InstitReasoning    | 2.25        | 2.25        | 2.25        | 2.25        | 2.25        | 2.25        | 0.000        |
| Language           | 1.75        | 1.53        | 1.69        | 1.77        | 1.81        | 1.71        | 0.098        |
| Mathematics        | 1.15        | 0.65        | 1.03        | 0.83        | 0.73        | 0.88        | 0.187        |
| MemoryAgent        | 1.00        | 0.82        | 0.43        | 0.55        | 0.72        | 0.70        | 0.199        |
| Metacognition      | 0.75        | 0.80        | 0.67        | 0.69        | 0.89        | 0.76        | 0.080        |
| Motor              | 2.32        | 2.33        | 2.32        | 2.34        | 2.31        | 2.33        | 0.009        |
| Reasoning          | 1.39        | 1.37        | 1.42        | 1.37        | 1.36        | 1.38        | 0.023        |
| Security           | 2.00        | 2.00        | 2.00        | 2.00        | 2.00        | 2.00        | 0.003        |
| Social             | 1.54        | 1.49        | 1.56        | 1.51        | 1.58        | 1.53        | 0.032        |
| Spatial            | 1.21        | 1.23        | 1.22        | 1.24        | 1.21        | 1.22        | 0.011        |
| Speech             | 2.13        | 1.93        | 2.04        | 2.04        | 1.81        | 1.99        | 0.111        |
| Substrate          | 0.88        | 0.91        | 0.97        | 0.85        | 0.94        | 0.91        | 0.043        |
| SustainedAttention | 2.19        | 2.20        | 2.20        | 2.19        | 2.19        | 2.19        | 0.004        |
| ToMBench           | 1.08        | 1.02        | 1.02        | 0.95        | 0.95        | 1.00        | 0.050        |

| Domain                                | Seed 42 | Seed 123 | Seed 789 | Seed 1337 | Seed 2718 | Mean | SD    |
|---------------------------------------|---------|----------|----------|-----------|-----------|------|-------|
| WorM                                  | 0.73    | 0.77     | 0.86     | 0.73      | 0.68      | 0.75 | 0.058 |
| <i>Grand mean (unweighted domain)</i> |         |          |          |           |           | 1.25 | 0.065 |

The Creativity domain shows the highest cross-seed variance ( $SD = 0.316$ ), reduced from  $SD = 0.49$  after fixing the RemoteAssociates semantic adapter to use a stable base seed, but still reflecting that creative task performance depends on stimulus configuration. Mathematics ( $SD = 0.187$ ), MemoryAgent ( $SD = 0.199$ ), and Executive ( $SD = 0.172$ ) show moderate variance reflecting genuine sensitivity to stimulus configuration. The remaining 23 domains have  $SD < 0.12$ , with 8 domains showing  $SD < 0.01$  (effectively deterministic).

## Section S2: Moral Topology via Persistent Homology

### S2.1 Overview

Symthaea maintains a *moral topology* that analyses the topological structure of its moral space in real time. Every time the ethics engine evaluates a moral scenario, the scenario is encoded as a high-dimensional hypervector (16,384D) and projected onto a 7-dimensional *harmony basis*—one axis per foundational moral value (Care, Justice, Loyalty, Liberty, Sanctity, Authority, Truth). Persistent homology is then computed on the sliding window of recent projections, yielding three Betti numbers:

$\beta_0$  **Connected components.**  $\beta_0 = 1$  indicates moral unity (a single coherent moral stance);  $\beta_0 > 1$  signals fragmentation into disconnected moral clusters.

$\beta_1$  **1-cycles.** Non-trivial 1-cycles indicate circular reasoning patterns in the moral space.

$\beta_2$  **2-voids.** Higher-dimensional voids that may indicate “moral blind spots” encapsulated by surrounding positions.

In addition, *moral free energy* is computed as a KL-divergence between the current scenario distribution and a running EMA prior over the harmony axes, following the Free Energy Principle (Friston, 2010).

### S2.2 Anomaly Detection

The moral topology system includes an anomaly detector that monitors four signals:

1. **Value inversion:** the dominant harmony axis has flipped since the last evaluation.
2. **Free energy spike:** moral free energy exceeds  $k \cdot \sigma$  above the rolling trajectory mean (default  $k = 2.0$ ).
3. **Fragmentation increase:**  $\beta_0$  has increased (more disconnected components).
4. **Drift alert:** moral drift (linear regression slope of trajectory coordinates over 20-step lookback) exceeds a configurable threshold (default 0.25).

These are combined into a composite anomaly score via configurable weights (default: 0.3 value inversion, 0.3 FE spike, 0.2 fragmentation, 0.2 drift), clamped to  $[0, 1]$ .

#### Adaptive Thresholds

A self-tuning mechanism uses exponential moving averages (EMA,  $\alpha = 0.02$ ) of observed drift and free energy to learn system-appropriate thresholds. After a warmup phase (default 20 observations), the effective drift threshold becomes  $\mu_{\text{drift}} + k \cdot \sigma_{\text{drift}}$ , clamped to  $[0.05, 0.80]$ . The effective FE sigma multiplier adapts based on the coefficient of variation of observed free energy (low CV  $\rightarrow$  tighter sensitivity at  $1.5\sigma$ ; high CV  $\rightarrow$  looser at  $3.5\sigma$ ).

### S2.3 Moral-Consciousness Coupling

Moral topology metrics feed into the consciousness engine through two mechanisms:

**Drift-driven epistemic attenuation (Approach C).** High moral drift attenuates the Knowledge component in the 7-theory master equation (ConsciousnessEquationV2), reflecting epistemic humility during value shifts:  $K_{\text{eff}} = K \cdot (1 - r_{\text{drift}} \cdot \alpha_{\text{attenuation}})$  where  $r_{\text{drift}} = \min(\text{drift}/0.5, 1.0)$  and  $\alpha_{\text{attenuation}} = 0.30$ .

**Anomaly dampening (Approach B).** The composite anomaly score dampens the unified consciousness level alongside bath-coupling terms (Seth, 2013):  
$$C_{\text{unified}} = C_{\text{weighted}} + \Delta_{5\text{-HT}_{2A}} + \Delta_{\text{GABA}_A} + \Delta_{\text{entropy}} - s_{\text{anomaly}} \cdot 0.15.$$

## S2.4 Anomaly Response Actions

When `enable_moral_anomaly_response` is active, detected anomalies trigger corrective feedback modulations:

- **Value inversion:** learning rate scaled by  $1.2\times$  (encourage exploration of new moral landscape).
- **Free energy spike:** exploration urge reduced by 0.1 (stabilize before exploring).
- **Fragmentation increase:** prediction confidence boosted by 0.05 (counteract destabilization).
- **Drift alert:** learning rate scaled by  $0.8\times$  (slow learning during rapid value change).

## S2.5 Substrate Interaction

The `substrate × moral topology` interaction study (`substrate_moral_topology_study.rs`) compares moral topology metrics across 6 substrate types under identical input sequences. The study protocol runs 200 warmup + 500 stable + 500 shifting cycles per substrate, where the shifting phase introduces value-conflicting inputs. Key metrics compared: consciousness level, composite anomaly score, moral unity ( $\beta_0$ ), moral free energy, and anomaly event counts.

### S3. ICC Reliability Distribution

Figure S1 shows the test-retest reliability (ICC) distribution across 20 evaluated benchmarks. Benchmarks are sorted by ICC value and color-coded by reliability class following Cicchetti (1994): Excellent ( $\geq 0.75$ ), Good (0.60–0.74), Moderate (0.40–0.59), Poor ( $< 0.40$ ). The distribution reveals a bimodal pattern: benchmarks with genuine lapse-rate sensitivity (e.g., Stroop, Calibration, DigitSpan) achieve Excellent reliability, while structurally invariant benchmarks (e.g., ArcFluid, FeelingOfKnowing) cluster at Poor. This bimodality identifies which cognitive dimensions are architecturally fixed versus parameter-sensitive.

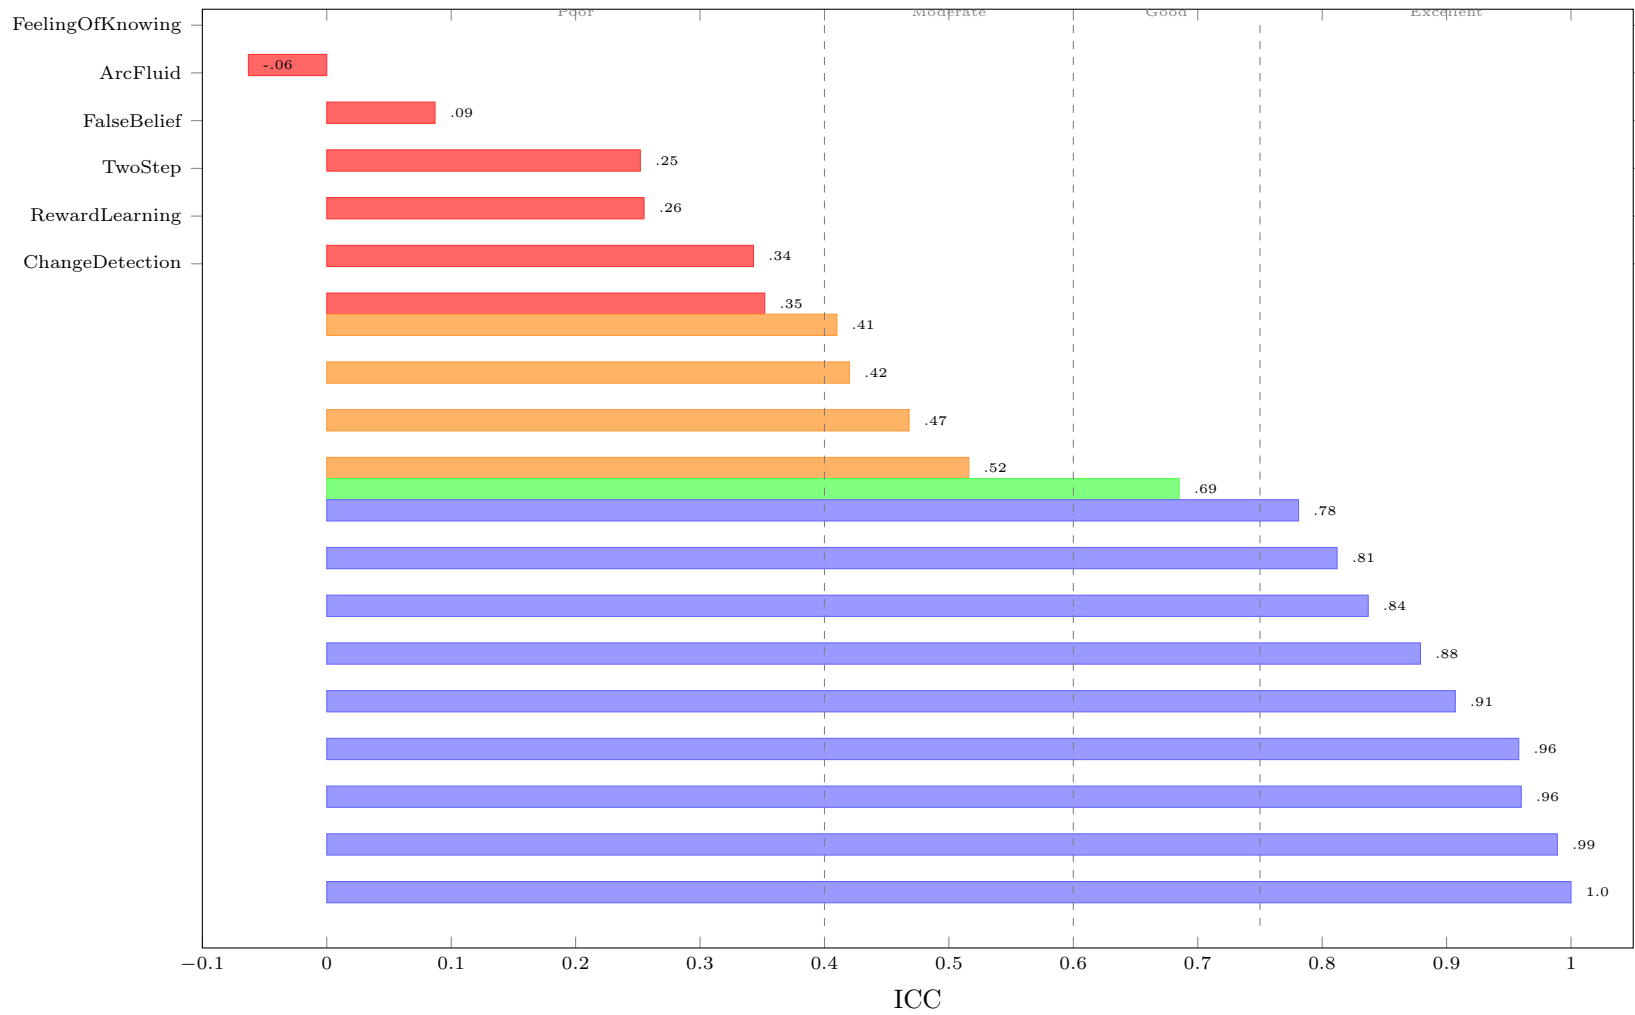


Figure 1: Test-retest reliability (ICC) for 20 evaluated benchmarks. Colors: red = Poor ( $< 0.40$ ,  $n = 6$ ), orange = Moderate ( $0.40\text{--}0.59$ ,  $n = 4$ ), green = Good ( $0.60\text{--}0.74$ ,  $n = 1$ ), blue = Excellent ( $\geq 0.75$ ,  $n = 9$ ). Dashed lines indicate class boundaries. Data from `reliability.csv`.

## S4. Neuromodulator Dissociation Details and API Usage

### S4.1 Behavioral Knockout Effect Sizes

The `BehavioralKnockout` benchmark reveals large, selective effects for each transmitter system:

- **DA knockout:** reduces learning rate (Cohen’s  $d = 1.93$ ) and gradient tracking ( $d = 2.14$ )
- **NE knockout:** increases exploration ( $d = 7.25$ )
- **5-HT knockout:** reduces confidence ( $d = 5.80$ )
- **ACh knockout:** impairs attention ( $d = 5.41$ )

The `DoseResponse` benchmark shows perfect monotonicity (score = 1.0) for all five transmitter systems (DA, NE, 5-HT, ACh, GABA). `ToleranceWithdrawal` detects tolerance and withdrawal for all four tested transmitters (DA sensitivity ratio = 0.48, NE = 0.59, 5-HT = 0.64, GABA = 0.73). The theoretical prediction of four double dissociations—DA enhancing flexibility while impairing sustained attention, NE enhancing alerting while impairing fine motor control, 5-HT enhancing inhibition while slowing working memory, ACh enhancing focused attention while impairing flexibility—remains to be tested with a full profile  $\times$  benchmark cross-tabulation in future work.

### S4.2 API Usage

PSYCH-BENCH is distributed as a Rust crate (`symthaea-psych-bench`) and can be integrated into any project via Cargo. The API provides four levels of usage.

**Single benchmark evaluation.** Running an individual benchmark requires constructing a configuration and calling `run()`:

```
use symthaea_psych_bench::benchmarks::executive::StroopBenchmark;
use symthaea_psych_bench::harness::{BenchmarkConfig, PsychBenchmark};

let config = BenchmarkConfig::default(); // seed=42, dim=512
let result = StroopBenchmark.run(&config);
println!("Stroop effect: {:.3}", result.metrics["stroop_effect"].mean);
```

**Full battery with cognitive profile.** The harness aggregates results into an 8-domain cognitive profile:

```
use symthaea_psych_bench::harness::{BenchmarkReport, CognitiveProfile};

let mut report = BenchmarkReport::new();
for bench in &all_benchmarks {
    report.add(bench.run(&config));
}
let profile = CognitiveProfile::from_report(&report);
```

### HTML report generation.

```
use symthaea_psych_bench::harness::html::HtmlReport;

let html = HtmlReport::from_report(&report);
std::fs::write("report.html", html.render()).unwrap();
```

**Neuromodulator sweep.** Pharmacological profiles can be applied to any benchmark subset:

```
use symthaea_psych_bench::harness::neuromod_profiles::NeuromodProfile;

for profile in NeuromodProfile::standard_profiles() {
    let mut config = BenchmarkConfig::default();
    config.label = Some(profile.name.clone());
    let result = StroopBenchmark.run(&config);
}
```

All APIs are deterministic given a fixed seed, enabling exact replication. Full API documentation is generated via `cargo doc -p symthaea-psych-bench`.



## S6. Neuromodulator Behavioral Dissociations

Selective transmitter knockout in the `BehavioralKnockout` benchmark produces large, dissociable effects on distinct behavioral measures. Table S3 summarizes the Cohen’s  $d$  effect sizes for each transmitter  $\times$  behavioral measure combination. Each transmitter primarily disrupts one or two measures while leaving others largely unaffected, consistent with the functional specialization reported in the psychopharmacological literature (Schultz et al., 1997; Yerkes and Dodson, 1908).

Table 3: Behavioral knockout effect sizes (Cohen’s  $d$ ). Bold values indicate the primary (largest magnitude) effect for each transmitter. Empty cells denote non-primary effects ( $d < 0.5$ ).

| Transmitter | Learning Rate | Exploration | Confidence  | Attention   | Gradient Tracking |
|-------------|---------------|-------------|-------------|-------------|-------------------|
| DA          | 1.93          | —           | —           | —           | <b>2.14</b>       |
| NE          | —             | <b>7.25</b> | —           | —           | —                 |
| 5-HT        | —             | —           | <b>5.80</b> | —           | —                 |
| ACh         | —             | —           | —           | <b>5.41</b> | —                 |

The large effect sizes ( $d > 1.9$  for all primary effects) confirm that each neuromodulator system has a distinct functional role within the architecture: dopamine gates reward-driven learning and gradient tracking, norepinephrine modulates exploration–exploitation balance, serotonin regulates prediction confidence, and acetylcholine controls attentional gain. The simultaneous knockout of all four transmitters produces a consciousness collapse ( $d = 9.43$ ), indicating that neuromodulatory tone is necessary for maintaining integrated conscious processing.

### S6.1 Dose–Response and Tolerance Dynamics

Table S4 summarizes dose–response monotonicity and tolerance/withdrawal sensitivity ratios across the four primary transmitter systems plus GABA. All transmitters exhibit perfect monotonicity (score = 1.0), confirming that behavioral effects scale smoothly with concentration. The sensitivity ratio (post-tolerance response / initial response) indicates the degree of adaptation under sustained exposure: lower ratios reflect stronger tolerance development.

Table 4: Dose–response monotonicity and tolerance/withdrawal sensitivity ratios. Data from `DoseResponse` and `ToleranceWithdrawal` benchmarks.

| Transmitter | Monotonicity | Sensitivity Ratio |
|-------------|--------------|-------------------|
| DA          | 1.0          | 0.48              |
| NE          | 1.0          | 0.59              |
| 5-HT        | 1.0          | 0.64              |
| GABA        | 1.0          | 0.73              |

Dopamine shows the strongest tolerance (ratio = 0.48), consistent with clinical observations of dopaminergic adaptation in reward circuits. GABA shows the weakest tolerance (ratio = 0.73), reflecting its role as a tonic inhibitory baseline. All four transmitters show detectable withdrawal effects upon cessation.

## S5. Per-Domain Ablation Analysis

Table S5 shows per-domain z-scores under six ablation presets. FullConsciousness is the baseline (all subsystems active). Each preset disables or degrades one subsystem, operationalized as increased encoding noise. Domains with identical scores across all presets (e.g., InstitutionalReasoning, Security) rely on structural HDC operations unaffected by encoding noise.

Table 5: Per-domain z-scores under six ablation presets. **Bold** indicates  $|\Delta| > 0.5$  from the FullConsciousness baseline. Max  $\Delta$  is the range (max – min) across all six presets.

| Domain                 | Full | CfCOnly     | NoFEP       | NoSocial    | RedWM       | HDCOnly      | Max $\Delta$ |
|------------------------|------|-------------|-------------|-------------|-------------|--------------|--------------|
| Affect                 | 1.20 | 1.22        | 1.22        | 1.22        | 0.77        | 0.76         | 0.46         |
| Attention              | 0.68 | 0.44        | 0.52        | 0.62        | 0.29        | <b>0.04</b>  | 0.64         |
| Binding                | 0.62 | 0.62        | 0.61        | 0.61        | 0.62        | 0.62         | 0.01         |
| Butlin                 | 0.67 | 0.67        | 0.67        | 0.67        | 0.67        | 0.67         | 0.00         |
| CausalReasoning        | 0.80 | 0.80        | 0.80        | 0.80        | 0.80        | 0.80         | 0.00         |
| Clinical               | 2.00 | 1.83        | 1.91        | 1.91        | 1.89        | 1.77         | 0.23         |
| Coding                 | 1.86 | 1.98        | 1.95        | 1.90        | 1.97        | 2.00         | 0.15         |
| CogBench               | 0.58 | 0.58        | 0.58        | 0.58        | 0.58        | 0.58         | 0.00         |
| Consciousness          | 0.69 | 0.66        | 0.66        | 0.69        | 0.65        | 0.61         | 0.08         |
| Creativity             | 0.67 | 0.84        | 0.84        | 0.76        | 0.79        | 0.87         | 0.19         |
| Executive              | 0.72 | 0.36        | 0.49        | 0.68        | 0.50        | <b>0.13</b>  | 0.59         |
| Inhibition             | 1.57 | <b>0.22</b> | <b>0.81</b> | 1.20        | <b>0.58</b> | <b>−0.53</b> | 2.10         |
| InstitutionalReasoning | 2.25 | 2.25        | 2.25        | 2.25        | 2.25        | 2.25         | 0.00         |
| Language               | 1.75 | <b>0.26</b> | <b>1.24</b> | 1.75        | 1.73        | <b>−0.76</b> | 2.51         |
| Mathematics            | 1.25 | <b>0.49</b> | <b>0.47</b> | 0.92        | <b>0.45</b> | <b>−0.36</b> | 1.61         |
| MemoryAgent            | 1.00 | 1.00        | 1.00        | 1.00        | <b>0.22</b> | <b>0.22</b>  | 0.78         |
| Metacognition          | 0.75 | 0.55        | 0.60        | 0.68        | 0.66        | 0.67         | 0.21         |
| Motor                  | 2.32 | 2.15        | 2.20        | 2.25        | 2.18        | 2.07         | 0.25         |
| Reasoning              | 1.39 | 1.38        | 1.38        | 1.39        | 1.38        | 1.37         | 0.02         |
| Security               | 2.00 | 2.00        | 2.00        | 2.00        | 2.00        | 2.00         | 0.00         |
| Social                 | 1.54 | <b>0.67</b> | 1.43        | <b>0.95</b> | 1.40        | <b>0.42</b>  | 1.12         |
| Spatial                | 1.21 | 1.21        | 1.21        | 1.21        | 1.21        | 1.21         | 0.00         |
| Speech                 | 2.13 | 1.96        | 2.14        | 2.13        | 2.20        | <b>0.30</b>  | 1.90         |
| Substrate              | 0.88 | 0.96        | 0.94        | 0.92        | 0.95        | 0.99         | 0.11         |
| SustainedAttention     | 2.19 | 2.19        | 2.19        | 2.19        | 2.19        | 2.19         | 0.00         |

*Continued on next page*

| Domain   | Full | CfCOnly | NoFEP | NoSocial | RedWM        | HDCOnly      | Max $\Delta$ |
|----------|------|---------|-------|----------|--------------|--------------|--------------|
| ToMBench | 1.08 | 1.08    | 1.08  | 1.08     | 1.08         | 1.08         | 0.00         |
| WorM     | 0.73 | 0.56    | 0.67  | 0.67     | <b>-2.36</b> | <b>-2.36</b> | 3.09         |

## References

- Baron-Cohen, S., Leslie, A. M., and Frith, U. (1985). Does the autistic child have a “theory of mind”? *Cognition*, 21(1):37–46.
- Baron-Cohen, S., Wheelwright, S., Hill, J., Raste, Y., and Plumb, I. (2001). The “Reading the Mind in the Eyes” test revised version: a study with normal adults, and adults with Asperger syndrome or high-functioning autism. *Journal of Child Psychology and Psychiatry*, 42(2):241–251.
- Bechara, A., Damasio, A. R., Damasio, H., and Anderson, S. W. (1994). Insensitivity to future consequences following damage to human prefrontal cortex. *Cognition*, 50(1–3):7–15.
- Berg, E. A. (1948). A simple objective technique for measuring flexibility in thinking. *The Journal of General Psychology*, 39(1):15–22.
- Bower, G. H. (1981). Mood and memory. *American Psychologist*, 36(2):129–148.
- Butlin, P., Long, R., Elmoznino, E., Bengio, Y., Birch, J., Constant, A., Deane, G., Fleming, S. M., Frith, C., Ji, X., et al. (2023). Consciousness in artificial intelligence: insights from the science of consciousness. *arXiv preprint arXiv:2308.08708*.
- Chollet, F. (2019). On the measure of intelligence. *arXiv preprint arXiv:1911.01547*.
- Cicchetti, D. V. (1994). Guidelines, criteria, and rules of thumb for evaluating normed and standardized assessment instruments in psychology. *Psychological Assessment*, 6(4):284–290.
- Cools, R., Clark, L., Owen, A. M., and Robbins, T. W. (2002). Defining the neural mechanisms of probabilistic reversal learning using event-related functional magnetic resonance imaging. *Journal of Neuroscience*, 22(11):4563–4567.
- Corcoran, R., Mercer, G., and Frith, C. D. (1995). Schizophrenia, symptomatology and social inference: investigating “theory of mind” in people with schizophrenia. *Schizophrenia Research*, 17(1):5–13.
- Daw, N. D., Gershman, S. J., Seymour, B., Dayan, P., and Dolan, R. J. (2011). Model-based influences on humans’ choices and striatal prediction errors. *Neuron*, 69(6):1204–1215.
- Eriksen, B. A. and Eriksen, C. W. (1974). Effects of noise letters upon the identification of a target letter in a nonsearch task. *Perception & Psychophysics*, 16(1):143–149.
- Fauconnier, G. and Turner, M. (2002). *The Way We Think: Conceptual Blending and the Mind’s Hidden Complexities*. Basic Books, New York.
- Ferreira, F., Bailey, K. G., and Ferraro, V. (2002). Good enough representations in language comprehension. *Current Directions in Psychological Science*, 11(1):11–15.
- Fitts, P. M. (1954). The information capacity of the human motor system in controlling the amplitude of movement. *Journal of Experimental Psychology*, 47(6):381–391.

- Guilford, J. P. (1967). *The Nature of Human Intelligence*. McGraw-Hill, New York.
- Güth, W., Schmittberger, R., and Schwarze, B. (1982). An experimental analysis of ultimatum bargaining. *Journal of Economic Behavior & Organization*, 3(4):367–388.
- Happé, F. G. (1994). An advanced test of theory of mind: understanding of story characters’ thoughts and feelings by able autistic, mentally handicapped, and normal children and adults. *Journal of Autism and Developmental Disorders*, 24(2):129–154.
- Jaeggi, S. M., Studer-Luethi, B., Buschkuhl, M., Su, Y.-F., Jonides, J., and Perrig, W. J. (2010). The relationship between n-back performance and matrix reasoning — implications for training and transfer. *Intelligence*, 38(6):625–635.
- Lejuez, C., Read, J. P., Kahler, C. W., Richards, J. B., Ramsey, S. E., Stuart, G. L., Strong, D. R., and Brown, R. A. (2002). Evaluation of a behavioral measure of risk taking: the Balloon Analogue Risk Task (BART). *Journal of Experimental Psychology: Applied*, 8(2):75–84.
- Logan, G. D. and Cowan, W. B. (1984). On the ability to inhibit thought and action: a theory of an act of control. *Psychological Review*, 91(3):295–327.
- Luck, S. J. and Vogel, E. K. (1997). The capacity of visual working memory for features and conjunctions. *Nature*, 390(6657):279–281.
- Mednick, S. A. (1962). The associative basis of the creative process. *Psychological Review*, 69(3):220–232.
- Murdock, B. B. (1962). The serial position effect of free recall. *Journal of Experimental Psychology*, 64(5):482–488.
- Nissen, M. J. and Bullemer, P. (1987). Attentional requirements of learning: evidence from performance measures. *Cognitive Psychology*, 19(1):1–32.
- Oberauer, K. (2003). Selective attention to elements in working memory. *Experimental Psychology*, 50(4):257–269.
- Pashler, H. (1994). Dual-task interference in simple tasks: data and theory. *Psychological Bulletin*, 116(2):220–244.
- Raven, J. C. (1938). *Progressive Matrices: A Perceptual Test of Intelligence*. H.K. Lewis, London.
- Robertson, I. H., Manly, T., Andrade, J., Baddeley, A., and Yiend, J. (1997). “Oops!”: performance correlates of everyday attentional failures in traumatic brain injured and normal subjects. *Neuropsychologia*, 35(6):747–758.
- Schultz, W., Dayan, P., and Montague, P. R. (1997). A neural substrate of prediction and reward. *Science*, 275(5306):1593–1599.
- Shallice, T. (1982). Specific impairments of planning. *Philosophical Transactions of the Royal Society of London B*, 298(1089):199–209.
- Stone, V. E., Baron-Cohen, S., and Knight, R. T. (1998). Frontal lobe contributions to theory of mind. *Journal of Cognitive Neuroscience*, 10(5):640–656.
- Stroop, J. R. (1935). Studies of interference in serial verbal reactions. *Journal of Experimental Psychology*, 18(6):643–662.
- Wechsler, D. (2008). *WAIS-IV: Wechsler Adult Intelligence Scale*. Pearson, San Antonio, TX, 4th edition.
- Williams, J. M. G., Mathews, A., and MacLeod, C. (1996). The emotional Stroop task and psychopathology. *Psychological Bulletin*, 120(1):3–24.
- Yerkes, R. M. and Dodson, J. D. (1908). The relation of strength of stimulus to rapidity of habit-formation. *Journal of Comparative Neurology and Psychology*, 18(5):459–482.