

GCLS²: Towards Efficient Community Detection Using Graph Contrastive Learning with Structure Semantics (Supplementary Material)

Anonymous Author(s)
Submission Id: 7978

ACM Reference Format:

Anonymous Author(s). 2018. GCLS²: Towards Efficient Community Detection Using Graph Contrastive Learning with Structure Semantics (Supplementary Material). In . ACM, New York, NY, USA, 2 pages. <https://doi.org/XXXXXXX.XXXXXXX>

A Model Training

The detailed GCLS² training process is shown in Algorithm 2. Specifically, we first obtain the high-level structure graph G^H and high-level adjacency matrix A^H from the original data graph G , and construct a dictionary $\mathcal{D}$ by counting the number of specified patterns for each edge of G , then extract the structure similarity matrix S from the $\mathcal{D}$ (lines 1-3). For each training iteration, we first use the SSS module to extract structure semantics representation S' and attribute semantics representation X' (lines 4-6). Next, we employ GCNs with weight shared to extract node features from both G and G^H , resulting in the node feature matrix Z and the high-level node feature matrix Z^H (lines 7-8). Then, we calculate the similarity between positive samples and the similarity between negative samples to obtain the structure contrastive loss ($\ell(z_i^1), \ell(z_i^2)$) for each vertex v_i (line 9). After that, we update the GCLS² network parameters by minimizing all structure contrastive loss $\mathcal{L}$ on Z and Z^H (lines 10-11). Finally, after ϵ training iterations, we return the node features Z obtained for subsequent community detection (line 12).

B Complexity Analysis

We analyze the time complexity and space complexity of the GCLS² model by the number of floating point operations (FLOPs) and space overhead required by the GCLS² model. Specifically, let the time required for each unit floating point operation be $O(1)$. For the *Structure Similarity Semantic Encoder* module, the time complexity of the SSS module is $O(Nd^2)$, and the time complexity of the node representation extractor is $O(|E|d)$. For the *Structure Contrastive Learning* module, the similarity of each pair of vertices can be realized by vector dot product, which would cost $O(d)$. Then, the time complexity of all structure contrastive loss is $O(Nd)$. Therefore, the time complexity of the training process of GCLS² is $O(Nd^2 + |E|d)$.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
Conference'17, Washington, DC, USA

© 2018 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM ISBN 978-1-4503-XXXX-X/2018/06
<https://doi.org/XXXXXXX.XXXXXXX>

For the *Structure Similarity Semantic Encoder* module, the space complexity is $O(N^2 + d^2)$, which contains the input graph size and the SSS parameter size. Similarly, the space complexity of the node representation extractor is $O(Nd + d^2)$. For the *Structure Contrastive Learning* module, the computation of the structure contrastive loss can be performed on the feature matrices Z and Z^H with a space complexity of $O(N^2)$. Since the individual training process is serial and d is significantly smaller than N , the space complexity of the training process of GCLS² is $O(N^2)$.

For the HGP algorithm, the time complexity of the partitioning is $O(pN + |E|)$. The space complexity of the partitioning is $O(N)$.

C Theoretical Analyses

First, we have:

LEMMA 1. Let $\mathbf{X}$ be a variable with random uniform distribution after GNN coding, where $\mathbf{X}_i$ is the output vector of the node within the domain indicated by the GNN architecture. Given two embedding representations $\mathbf{Z}^1, \mathbf{Z}^2 \in \mathbb{R}^L$ of view 1 and view 2 are two random variables, their joint distribution is denoted as $p(\mathbf{Z}^1, \mathbf{Z}^2)$. Our objective $\mathcal{L}$ is a lower bound on the mutual information of $\mathbf{X}$ and $(\mathbf{Z}^1, \mathbf{Z}^2)$ as follows,

$$-\mathcal{L} \leq I(\mathbf{X}; \mathbf{Z}^1, \mathbf{Z}^2). \quad (1)$$

PROOF. For a rigorous comparison, we compare our objective with the GRACE objective [1–3], which is defined under existing conditions as follows,

$$\Gamma(z_i^1) = \sum_{j=1}^N e^{\text{sim}(z_i^1, z_j^2)/\tau}, \quad (2)$$

$$\gamma(z_i^1) = \sum_{j=1, j \neq i}^N e^{\text{sim}(z_i^1, z_j^1)/\tau}, \quad (3)$$

$$I_{ACE}(\mathbf{Z}^1; \mathbf{Z}^2) \triangleq \mathbb{E}_{\prod_i p(z_i^1, z_i^2)} \left[\frac{1}{N} \sum_{i=1}^N \log \frac{e^{\text{sim}(z_i^1, z_i^2)/\tau}}{\Gamma(z_i^1) + \gamma(z_i^1)} \right], \quad (4)$$

where $\prod_i p(z_i^1, z_i^2)$ denotes the joint distribution. To facilitate with the notational representation, we define $\Gamma(z_i^1) = \sum_{j=1}^N e^{\text{sim}(z_i^1, z_j^2)/\tau}$, $\gamma(z_i^1) = \sum_{j=1, j \neq i}^N e^{\text{sim}(z_i^1, z_j^1)/\tau}$. Please note that $\Gamma(z_i^2)$ and $\gamma(z_i^2)$ are defined symmetrically with $\Gamma(z_i^1)$ and $\gamma(z_i^1)$ respectively. So that our objective $\mathcal{L}$ can be rewritten as

$$-\mathcal{L} = \mathbb{E}_{\prod_i p(z_i^1, z_i^2)} \left[\frac{1}{N} \sum_{i=1}^N \log \frac{\text{pos}(z_i^1) + e^{\text{sim}(z_i^1, z_i^2)/\tau}}{\sqrt{(\Gamma(z_i^1) + \gamma(z_i^1))(\Gamma(z_i^2) + \gamma(z_i^2))}} \right], \quad (5)$$

where the $\sqrt{(\Gamma(z_i^1) + \gamma(z_i^1))(\Gamma(z_i^2) + \gamma(z_i^2))}$ is to illustrate the symmetry of $\Gamma(z_i^1) + \gamma(z_i^1)$ and $\Gamma(z_i^2) + \gamma(z_i^2)$, which are equal in value. Therefore, we can use the Eq. 4 Eq. 5 to deduce that

$$\begin{aligned} -2\mathcal{L} &= I_{ACE}(Z^1; Z^2) - \mathbb{E}_{\Pi_i p(z_i^1, z_i^2)} \left[\frac{1}{N} \sum_{i=1}^N \log \left(1 + \frac{\text{pos}(z_i^1)}{e^{\text{sim}(z_i^1, z_i^2)/\tau}} \right) \right] \\ &\quad + I_{ACE}(Z^2; Z^1) - \mathbb{E}_{\Pi_i p(z_i^1, z_i^2)} \left[\frac{1}{N} \sum_{i=1}^N \log \left(1 + \frac{\text{pos}(z_i^2)}{e^{\text{sim}(z_i^2, z_i^1)/\tau}} \right) \right] \\ &\leq I_{ACE}(Z^1; Z^2) + I_{ACE}(Z^2; Z^1). \end{aligned} \quad (6)$$

And according to [2, 3], the GRACE objective is a lower bound of the true MI, i.e.,

$$I_{ACE}(Z^1; Z^2) \leq I(Z^1; Z^2). \quad (7)$$

Thus, we have the following inference

$$-2\mathcal{L} \leq I(Z^1; Z^2) + \leq I(Z^2; Z^1) \leq 2I(Z^1; Z^2). \quad (8)$$

This is equivalent to

$$-\mathcal{L} \leq I(Z^1; Z^2). \quad (9)$$

For three random variables X, Y, Z satisfying one Markov chain $X \rightarrow Y \rightarrow Z$, we have $I(X; Z) \leq I(X; Y)$ holds. We find that X, Z^1, Z^2 satisfy the chain relation $Z^1 \leftarrow X \rightarrow Z^2$. Actually, Z^1 and Z^2 are conditionally independent after considering X . This represents the existence of Markov chain $Z^1 \rightarrow X \rightarrow Z^2$, and we have $I(Z^1; Z^2) \leq I(Z^1; X)$. Since the chain relation $X \rightarrow (Z^1, Z^2) \rightarrow Z^1$ holds, it follows that $I(X; Z^1) \leq I(X; Z^1, Z^2)$. Combining the two inequalities above, we have the inequality

$$I(Z^1; Z^2) \leq I(X; Z^1, Z^2). \quad (10)$$

According to Eq. 9 and Eq. 10, we can derive the final inequality as follows and complete the proof,

$$-\mathcal{L} \leq I(X; Z^1, Z^2). \quad (11)$$

□

Analysis: The mutual information $I(X; Z^1, Z^2)$ measures the information content of the original data X retained in the learned representations Z^1 and Z^2 . From Lemma 1, the optimization of the contrastive loss $\mathcal{L}$ directly relates to the lower bound of this mutual information. Specifically, as $\mathcal{L}$ decreases (i.e., the model becomes better optimized), the lower bound of the mutual information $I(X; Z^1, Z^2)$ increases. This mechanism prevents excessive loss of original data information in representation Z , thereby enhancing the performance of downstream community detection tasks.

D Experimental Evaluation Supplement

HGP Performance Evaluation Figure 1 presents the performance evaluation of the HGP algorithm with different partition size p . From Figure 1, when the partition size $p = 32$, the HGP algorithm completes the partitioning of graphs with tens of millions of edges in just 155.91 seconds. Combining these findings with Table 4, it is clear that the GCLS²+HGP method performs well in terms of efficiency and accuracy of community detection in large-scale datasets.

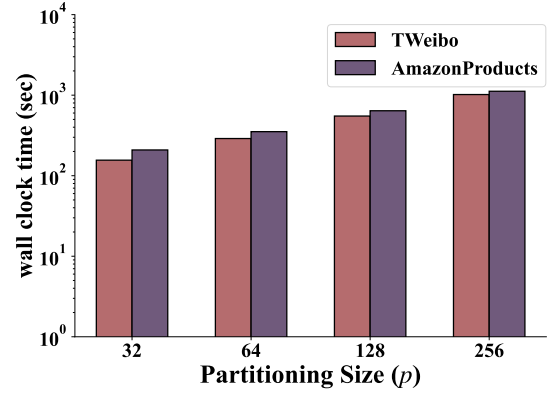


Figure 1: The partitioning cost time comparison of different methods on large-scale graph datasets.

References

- [1] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748* (2018).
- [2] Ben Poole, Sherjil Ozair, Aaron Van Den Oord, Alex Alemi, and George Tucker. 2019. On variational bounds of mutual information. In *International Conference on Machine Learning*. PMLR, 5171–5180.
- [3] Yanqiao Zhu, Yichen Xu, Feng Yu, Qiang Liu, Shu Wu, and Liang Wang. 2020. Deep Graph Contrastive Representation Learning. In *ICML Workshop on Graph Representation Learning and Beyond*.