



Disaster Recovery Run Book
Eisai, Inc. Andover MA

ChemCart

Document #: **RB-004**
Version: **1.0**



APPROVAL SIGNATORIES

Review and approval signatures indicate that this Disaster Recovery Run Book is accurate and complete as written.

Prepared by

Name / Position / Location	Signature	Date
Lachlan MacLearn <i>Technical Writer, Andover</i>		

Reviewed by:

Name / Position / Location	Signature	Date
Zeidan Ata <i>Sr. Network & System Administrator, IT Infrastructure, Andover</i>		

Reviewed by:

Name / Position / Location	Signature	Date
Tammy Griffin <i>Sr. IT Quality Manager, IT Quality, Andover</i>		

Approved by:

Name / Position / Location	Signature	Date
Kathy Stenson <i>Sr. IT Director, IT Lead, Andover</i>		



Table 1 - Revision History

Version	Description of changes	Author
1.0	Initial Document	LM

Table 2 - Disaster Recovery Team Contacts

Responsible Person	Role
	Senior Network & System Administrator
	Senior IT Quality Manager
	Senior IT Director



Contents

1. About this Document.....	5
2. ChemCart Description	5
3. Definitions	6
4. Referenced Documents.....	6
5. Run Book Instructions.....	7
6. Discrepancies.....	7
7. Failover / Failback – General	7
8. Assumptions	7
9. Performing ChemCart Failover	8
10. Performing ChemCart Failover Verification.....	12
11. Performing an ChemCart Failback.....	13
12. Performing ChemCart Failback Verification	18
13. Appendices	19
Appendix A - Screen capture attachments.....	20
Appendix B - Discrepancy Form	21
Appendix C - Updating ChemCart parameters in Pipeline Pilot.....	22

List of Figures

Figure 1 - ChemCart Disaster Recovery Topology	6
--	---

List of Tables

Table 1 - Revision History	3
Table 2 - Disaster Recovery Team Contacts.....	3
Table 3 – Production and DR System Host and Gateway information	5
Table 4 - Reference Documents.....	7
Table 5 - Failover Procedure for ChemCart	8
Table 6 - ChemCart Failover Verification Procedure.....	12
Table 7 - Required Hard Copy Documents.....	13
Table 8 - Failback Procedure for ChemCart	13
Table 9 - ChemCart Failback Verification Procedure	18



1. About this Document

This Runbook provides Failover and Failback procedures and definitions specific to ChemCart, in order to provide maximum availability of the system to all system users, stakeholders, in the event of a natural or man-made disaster that could place onsite personnel at risk, or threaten disruption of business.

2. ChemCart Description

ChemCart v5.2 is a platform used to provide focused database access to the Eisai community in the form of individual applications. There are two main classes of *ChemCart* applications; applications that serve as the user interface for Eisai-developed tools, and applications that serve to provide access to registries and assay data.

Applicable Hosts: Failover and failback of *ChemCart* affect the following hosts that currently support application availability (Table 3, below):

Table 3 – Production and DR System Host and Gateway information

Server Purpose	Host Name	IP Address	Location
Andover (Production)			
<i>ChemCart</i> Application	Erisdb02.eisai.local	10.101.33.124	Andover, MA
Oracle Database and Data Guard	Erisdb02.eisai.local	10.101.33.124	Andover, MA
Default DNS Server	Erisdc01.eri.us.eisai.local	10.101.33.9 10.101.33.10	Andover, MA
Default Gateway		10.101.33.254	Andover, MA
Totowa (Disaster Recovery)			
<i>ChemCart</i> Application	Erisdb02dr.eisai.local	10.101.93.59	Totowa, NJ
Oracle Database and Data Guard	Erisdb02dr.eisai.local	10.101.93.59	Totowa, NJ
Default DNS Server	Eridc01dr.eri.us.eisai.local	10.101.93.51	Totowa, NJ
Default Gateway		10.101.93.254	Totowa, NJ

Figure 1, below, provides a topology of the *ChemCart* Production and DR site resources.

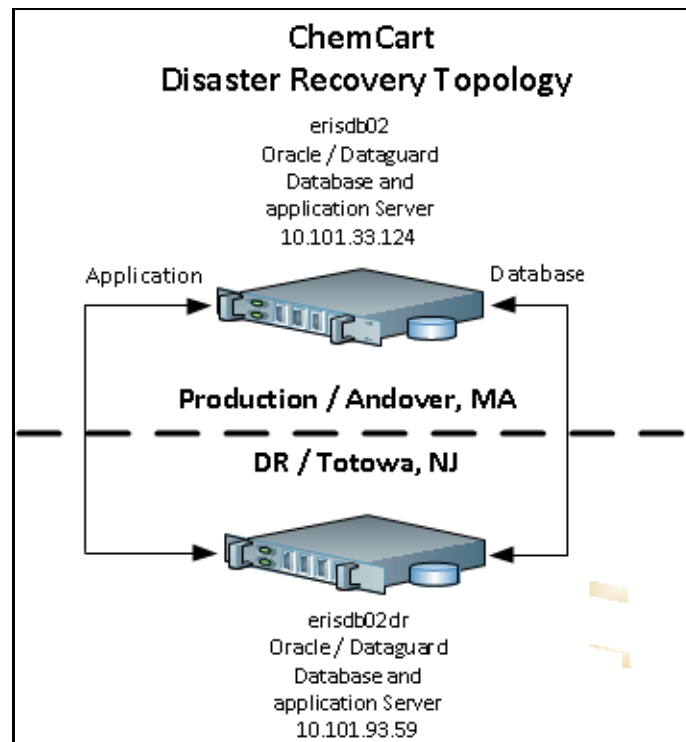


Figure 1 - ChemCart Disaster Recovery Topology

3. Definitions

Term	Definition
Discrepancy	A departure, deviation, or error within the procedure which may or may not impact the results and conclusion of performing the run book instructions.

4. Referenced Documents

All Disaster Recovery Run books, including the supplemental documents referenced in Table 4, below, will be available for use from the following locations:

- Paper/electronic versions distributed for remote usage.
- Electronic versions available in the Pilgrim Document Management System.
- Electronic versions at the following Andover Sharepoint DR Site:
<http://andoverit.eisai.local:82/GxP%20Systems/Disaster%20Recovery/Forms/AllItems.aspx>
- Totowa, NJ DR Site: *DR Documentation* Link (shared folder)



Table 4 - Reference Documents

Document Number	Document Title
01-0027-DR-01	<i>IT Disaster Recovery Plan</i>
DR-031	<i>Oracle Data Guard DR Supplement</i>

5. Run Book Instructions

One copy of verification documents is required for a failover/failback test. Each page must be dated and signed by the executing participant.

Also note that each participant in the failover / failback procedure and verification is responsible for providing a complete printed copy of this document. Steps that a participant is NOT responsible for should be identified by a large 'X' covering the Pass/Fail section of that step in that participant's document.

Be sure to list:

- Procedures in the order they are performed (i.e., failover, verify, failback, verify).
- Tools used.
- Discrepancies encountered during failover/failback procedures (see Appendix B).

6. Discrepancies

Discrepancies encountered during any of the following procedures must be fully documented, using the *Discrepancy Form*, provided and described in Appendix B of this document.

7. Failover / Failback – General

Failover / Failback of the *ChemCart* system specifically affect servers in Andover, MA and Totowa, NJ.

Failover / Failback Tools – *ChemCart* failover / failback procedures will be employed utilizing the following tools:

- *ChemCart* Oracle data - *Oracle Data Guard*

Note: The time required for failback is dependent upon the amount of data that needs to be transferred to the Production system from the NJ data center.

8. Assumptions

The failover/failback procedures, provided in this document, assume that the Pipeline Pilot and Tomcat Server are already running.



9. Performing ChemCart Failover

Important: Prior to executing the following procedure, ensure that the documents listed in Table 4 are readily available, prior to beginning the following failover procedure. These documents provide additional information needed to ensure a successful failover.

Note: If a password is required to complete the following procedure, the password can be retrieved via VPN, from the *KeePass* database, at the following location:

[\\erina01dr\it\\$\IT Share\Password\ERI Technical Info.kdbx](#)

Table 5 - Failover Procedure for ChemCart

Prod Application Database Server _____ Prod Database Name _____

Start Date: _____ Start Time: _____



Step	Failover Procedure	Pass/Fail	Initials
1.	Confirm that a Domain controller is running and available for authentication at failover location.	☐ Pass ☐ Fail	
2.	Confirm that the eriprd DB has been mirrored successfully and is available to the failover system.	☐ Pass ☐ Fail	
3.	Before FAILOVER, confirm that the /sci_apps volume has been mirrored successfully and is available to the failover system.	☐ Pass ☐ Fail	
4.	Refer to the <i>Data Guard Run book (RB-031)</i> for the steps required to failover the ChemCart database (eriprd) from erisdb02 to erisdb02dr.	☐ Pass ☐ Fail	
5.	To change the JDBC URLs from host <i>erisdb02</i> to <i>erisdb02dr</i>: - Open a terminal session, and log in to the DR host as <i>root</i>. - Using a text editor, navigate to, and open the file: <i>/usr/edex_chemcart/conf/datasources.xml</i> - Change the URL values from the Prod host to the DR host, as shown highlighted below. <pre><datasources> <datasource name="default" type="ORACLE" driver_class="oracle.jdbc.OracleDriver" jdbc_url="jdbc:oracle:thin:@erisdb02dr.eisai.local:1521:ERIPRD" schema="chemcart" password="kQ6E7TJUGOEASrFwH"> <jar name="ojdbc6.jar"/> </datasource> <datasource name="registry" type="ORACLE" driver_class="oracle.jdbc.OracleDriver"</pre>	☐ Pass ☐ Fail	

Performed By: _____ Date Performed: _____



Step	Failover Procedure	Pass/Fail	Initials
	<pre>jdbc_url="jdbc:oracle:thin:@erisdb02dr.eisai.local:1521:REG1R43P" useDefaultUser="true" schema="registry1r43" password="hQmEkTlUmOuA"> <jar name="ojdbc6.jar"/> </datasource> </datasources></pre> d. Save and close the file.		
6.	To re-sign relevant <i>ChemCart</i> jar files using <i>erisdb02dr</i>'s self-signed security certificate, at a terminal command prompt, execute each of the following commands, hitting <Enter> after each one: <pre>> cd /sci_apps/AKDR_files/PRD/chemcart/eisai_src/EV/ > /usr/1r43_java/bin/jarsigner -keystore /AK_dir/eisai_certs/.keystore_eisai -storepass eisai_cert - signedjar EVs.jar EV.jar eisai_cert > cp EVs.jar /usr/edex_chemcart/lib/ > /usr/1r43_java/bin/jarsigner -keystore /AK_dir/eisai_certs/.keystore_eisai -storepass eisai_cert - signedjar /usr/edex_chemcart/lib/ojdbc6s.jar /usr/edex_chemcart/lib/ojdbc6.jar eisai_cert</pre>	☐ Pass ☐ Fail	
7.	To revert ownership of modified files back to <i>ChemCart</i> user, at the prompt, enter the following command, and hit <Enter>. <pre>> chown -R chemcart:users /usr/edex_chemcart/</pre>	☐ Pass ☐ Fail	
8.	To Re-designate server IP in <i>ChemCart</i>'s db install: a. At the prompt, enter the following commands, and hit <Enter> after each. <pre>> source /sci_apps/.akprofile > sqlplus chemcart/{password}@ERIPRDdr</pre> b. At the SQL prompt, enter the following commands, and hit <Enter> after each. <pre>sql> update ds_server set name = 'CHEMCART', host='10.101.93.59', port=3466; sql> update edex_prod.server_meta set return_val = '10.101.93.59' where environ = 'PROD' and queryprop = 'EDEXDB_IP'; sql> update edex_prod.server_meta set return_val = 'erisdb02dr.eisai.local' where environ = 'PROD' and queryprop = 'EDEXDB_FQDN'; sql> commit; sql> quit</pre>	☐ Pass ☐ Fail	
9.	To start the <i>ChemCart</i> server, at the prompt, enter the following command, and hit <Enter>. <pre>> /etc/init.d/chemcart start</pre>	☐ Pass ☐ Fail	

Performed By: _____ Date Performed: _____

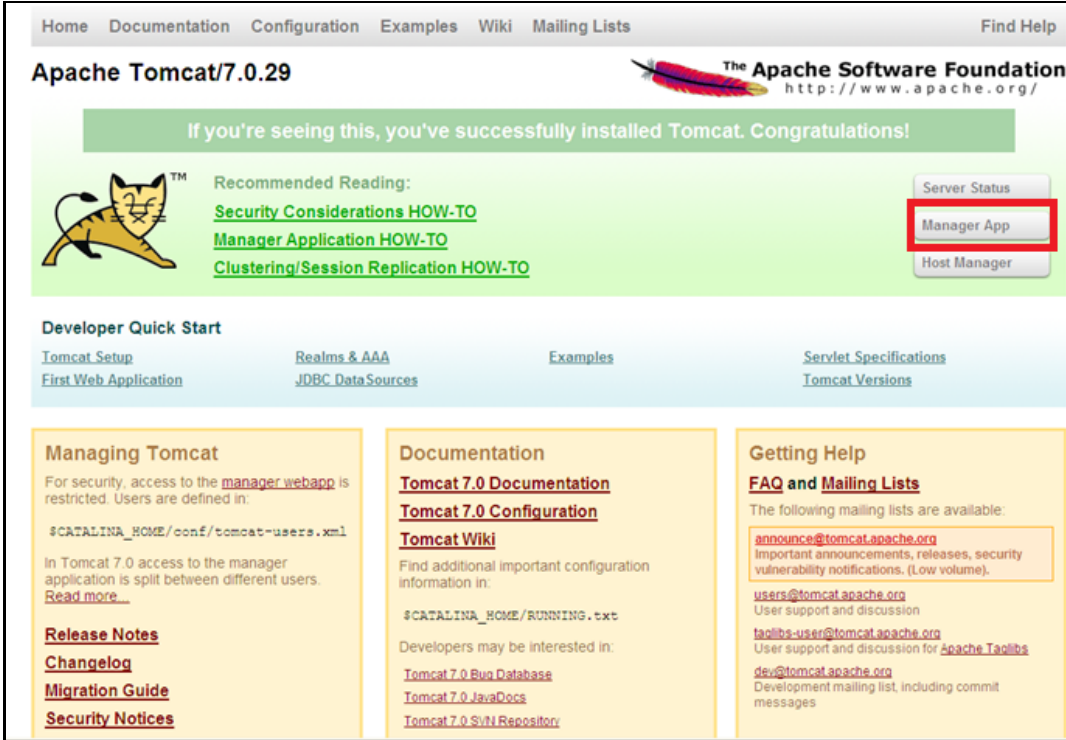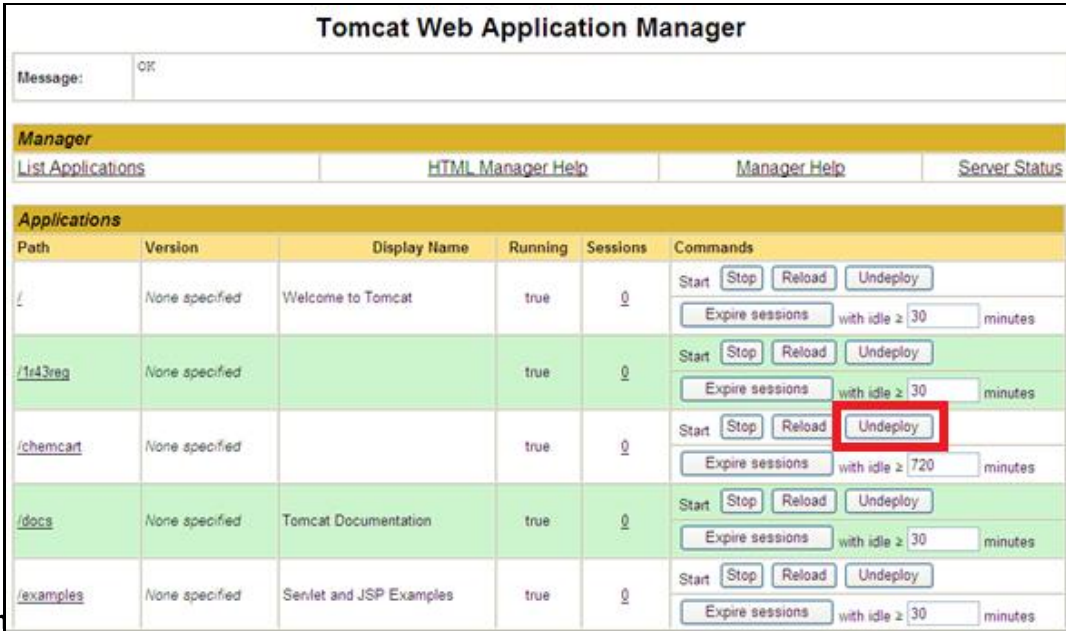Step	Failover Procedure	Pass/Fail	Initials
10.	To execute Tomcat deployment of the <i>ChemCart</i> application: - Open a browser and enter the following address in the URL window: http://10.101.93.59:8088/ - At the log in prompt, enter admin for both <i>Username</i> and <i>Password</i> - At the main <i>Tomcat</i> page, at the right, click the <i>Manager App</i> button.  - In the Application Manager page, check to see if <i>ChemCart</i> is listed as running. If it is, click the <i>Undeploy</i> button. 	☐ Pass ☐ Fail	

Perform



Step	Failover Procedure	Pass/Fail	Initials
11.	To modify the <i>ChemCart/Pipeline-Pilot</i> adapter servlet: a. Navigate to the location <code>cd /usr/lr43_tomcat/edex/reg/</code> b. Open the file <i>PilotResponseViewerConfig.xml</i> (shown following), and edit the values <i>servletAddress</i> and <i>tmpDataDirURL</i> so that they point to the DR environment host (<i>erisdb02dr</i>) IP address, as highlighted below: <pre><?xml version="1.0" encoding="UTF-8"?> <tns:document xmlns:tns="http://www.example.org/PilotResponseViwerConfigSche ma" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://www.example.org/PilotResponseViewer ConfigSchema PilotResponseViewerConfigSchema.xsd "> <tns:server name="prod" pilotServerURL="http://erisppprod01.eisai.local:9948" servletAddress="10.101.93.59:8088" tempSaveDirectory="/usr/edex_chemcart/eisai_tmp/" tempDataDirURL="http://10.101.93.59:8088/chemcart/eisai_tmp/" pilotServerPassword="prodpp"/> </tns:document></pre> c. Restart <i>tomcat</i> using the following commands, at the prompt, and hit <Enter> after each. <pre>> /etc/init.d/tomcat stop > /etc/init.d/tomcat start</pre>	☐ Pass ☐ Fail	
12.	Following failover, refer to Appendix C and follow the instructions on updating Pipeline Pilot with <i>ChemCart</i> configuration variables.	☐ Pass ☐ Fail	

End Date: _____ End Time: _____

Comments: _____

Performed By: _____ Date Performed: _____



10. Performing ChemCart Failover Verification

To verify that the *ChemCart* system failover procedure was correctly executed and completed, perform the following verification procedure (Table 6, below), indicating a pass or fail status for each step, along with the initials of the failback team member performing the step.

Important: Capture screen-capture images of verification step data, and after completing the procedure, print this document, attaching all screen captures to Appendix A.

Table 6 - ChemCart Failover Verification Procedure

Start Date: _____ Start Time: _____

Step	Failover Verification Procedure	Pass/Fail	Initials	
1.	Verify that Data Guard is responding and that a complete mirror has occurred. Verify the following items to complete failover on each system:	☐ Pass ☐ Fail		
	SYSTEM TO START UP			SYSTEM CHECK TO PERFORM
	ERISDB02DR			Verify that Erisdb02dr is responding. Verify that the database is up and running.
				Ping Erisdb02dr.eisai.local. Verify that the DR host displays the application when the URL http://10.101.93.59:8088/chemcart is executed within a browser.

End Date: _____ End Time: _____

Comments: _____

Performed By: _____ Date Performed: _____



11. Performing an ChemCart Failback

The following *ChemCart* failback and verification procedures return access to and resourcing of the *ChemCart* application, the associated Oracle database, and SRM resources to the Andover Production site. Prior to executing a *Failback*, be sure to review any special instructions in the ‘Special Instructions’ section.

Important: Prior to executing the following procedure, ensure that the documents listed in Table 7, below, are readily available. These documents provide additional information needed to ensure a successful failback. Refer to *Section 4 - Referenced Documents* for additional information.

Note: If a password is required to complete the following procedure, the password can be retrieved via VPN, from the *KeePass* database, at the following location:

[\\erina01dr\it\\$\IT Share\Password\ERI Technical Info.kdbx](#)

Table 7 - Required Hard Copy Documents

Document Number	Document Title
01-0027-DR-01	<i>IT Disaster Recovery Plan</i>
DR-031	<i>Oracle Data Guard DR Supplement</i>

Table 8 - Failback Procedure for ChemCart

Prod Application Database Server _____ Prod Database Name _____

Start Date: _____ Start Time: _____

Step	Failback Procedure	Pass/Fail	Initials
1.	Confirm that a Domain controller is running and available for authentication at failback location.	☐ Pass ☐ Fail	
2.	Confirm that the eriprd DB has been mirrored successfully and is available to the failback system.	☐ Pass ☐ Fail	
3.	Before failback, run the <i>scp</i> command to copy the entire <i>/sci_apps</i> volume from the DR environment back to Prod.	☐ Pass ☐ Fail	
4.	Refer to the <i>Data Guard Run book (RB-031)</i> for the steps required to failback the <i>ChemCart</i> database (<i>eriprd</i>) from <i>erisdb02dr</i> to <i>erisdb02</i> .	☐ Pass ☐ Fail	
5.	To change the JDBC URLs from host <i>erisdb02dr</i> to <i>erisdb02</i> : a. Open a terminal session, and log in to the Prod host as <i>root</i> . b. Using a text editor, navigate to, and open the file: <i>/usr/edex_chemcart/conf/datasources.xml</i> c. Change the URL values from the DR host to the Prod host, as shown highlighted below. <datasources>	☐ Pass ☐ Fail	

Performed By: _____ Date Performed: _____





Step	Failback Procedure	Pass/Fail	Initials
	<pre> <datasource name="default" type="ORACLE" driver_class="oracle.jdbc.OracleDriver" jdbc_url="jdbc:oracle:thin:@erisdb02.eisai.local:1521:ERIPRD" schema="chemcart" password="kQ6E7TJUGOEASrFwH"> <jar name="ojdbc6.jar"/> </datasource> <datasource name="registry" type="ORACLE" driver_class="oracle.jdbc.OracleDriver" jdbc_url="jdbc:oracle:thin:@erisdb02.eisai.local:1521:REG1R43P" useDefaultUser="true" schema="registrylr43" password="hQmEkTlUmOuA"> <jar name="ojdbc6.jar"/> </datasource> </datasources> d. Save and close the file. </pre>		
6.	To re-sign relevant <i>ChemCart</i> jar files using <i>erisdb02</i>'s self-signed security certificate, at a terminal command prompt, execute each of the following commands, hitting <Enter> after each one: <pre> > cd /sci_apps/AKDR_files/PRD/chemcart/eisai_src/EV/ > /usr/lr43_java/bin/jarsigner -keystore /AK_dir/eisai_certs/.keystore_eisai -storepass eisai_cert - signedjar EVs.jar EV.jar eisai_cert > cp EVs.jar /usr/edex_chemcart/lib/ > /usr/lr43_java/bin/jarsigner -keystore /AK_dir/eisai_certs/.keystore_eisai -storepass eisai_cert - signedjar /usr/edex_chemcart/lib/ojdbc6s.jar /usr/edex_chemcart/lib/ojdbc6.jar eisai_cert </pre>	☐ Pass ☐ Fail	
7.	To revert ownership of modified files back to <i>ChemCart</i> user, at the prompt, enter the following command, and hit <Enter>. <pre> > chown -R chemcart:users /usr/edex_chemcart/ </pre>	☐ Pass ☐ Fail	

Performed By: _____ Date Performed: _____




Step	Failback Procedure	Pass/Fail	Initials
8.	To Re-designate server IP in <i>ChemCart</i>'s db install: a. At the prompt, enter the following commands, and hit <Enter> after each. <pre>> source /sci_apps/.akprofile</pre> <pre>> sqlplus chemcart/{password}@ERIPRD</pre> b. At the SQL prompt, enter the following commands, and hit <Enter> after each. <pre>sql> update ds_server set name = 'CHEMCART', host='10.101.33.124', port=3466;</pre> <pre>sql> update edex_prod.server_meta set return_val = '10.101.33.124' where environ = 'PROD' and queryprop = 'EDEXDB_IP';</pre> <pre>sql> update edex_prod.server_meta set return_val = 'erisdb02.eisai.local' where environ = 'PROD' and queryprop = 'EDEXDB_FQDN';</pre> <pre>sql> commit;</pre> <pre>sql> quit</pre>	☐ Pass ☐ Fail	
9.	To start the <i>ChemCart</i> server, at the prompt, enter the following command, and hit <Enter>. <pre>> /etc/init.d/ChemCart start</pre>	☐ Pass ☐ Fail	
10.	To execute Tomcat deployment of the <i>ChemCart</i> application: a. Open a browser and enter the following address in the URL window: http://10.101.33.124:8088/ b. At the log in prompt, enter admin for both <i>Username</i> and <i>Password</i> c. At the main <i>Tomcat</i> page, at the right, click the <i>Manager App</i> button.	☐ Pass ☐ Fail	

Performed By: _____ Date Performed: _____

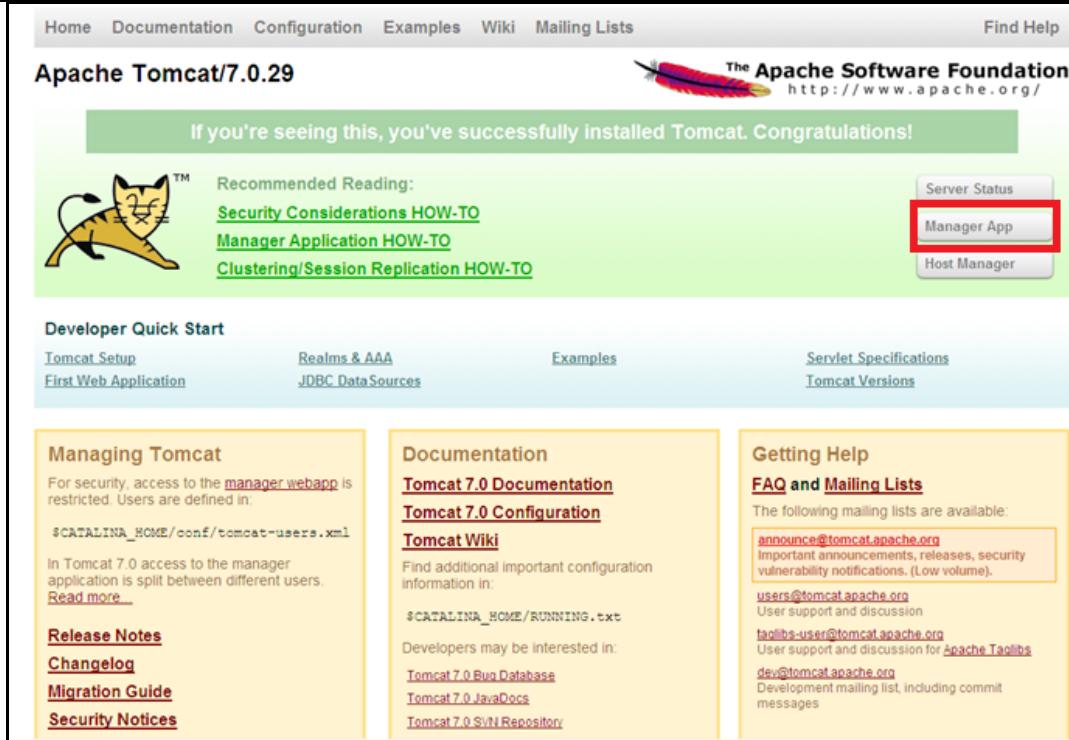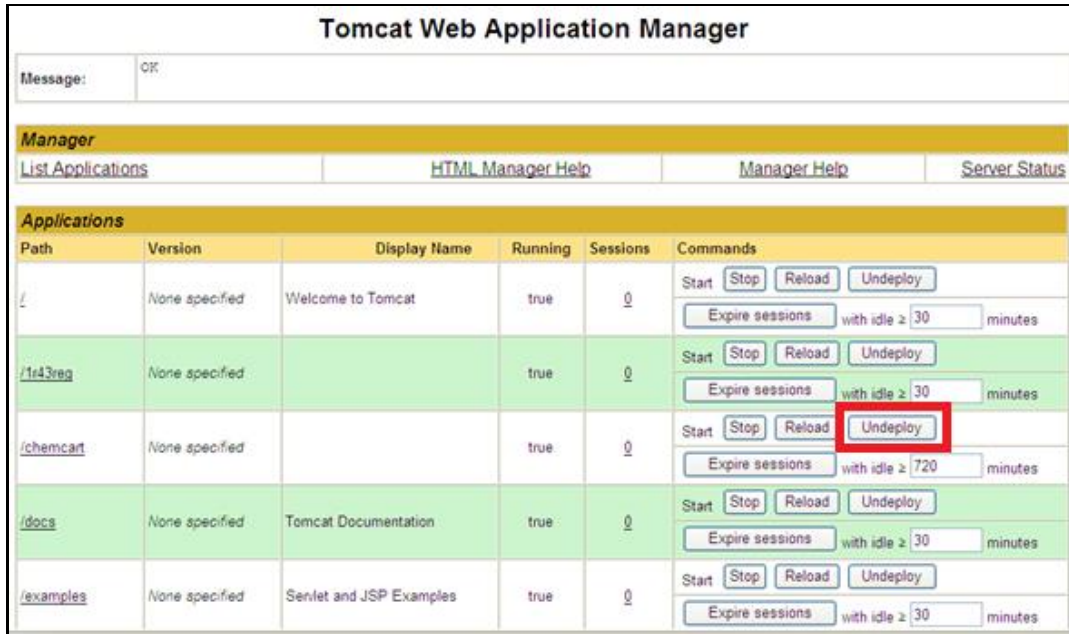Step	Failback Procedure	Pass/Fail	Initials
	 d. In the Application Manager page, check to see if <i>ChemCart</i> is listed as running. If it is, click the <i>Undeploy</i> button.  To redeploy <i>ChemCart</i> in the DR environment, at the bottom of the <i>Application Manager</i> page, enter the following information: e. In the <i>Context Path</i> field, enter <i>/chemcart</i>		

Performed By: _____ Date Performed: _____

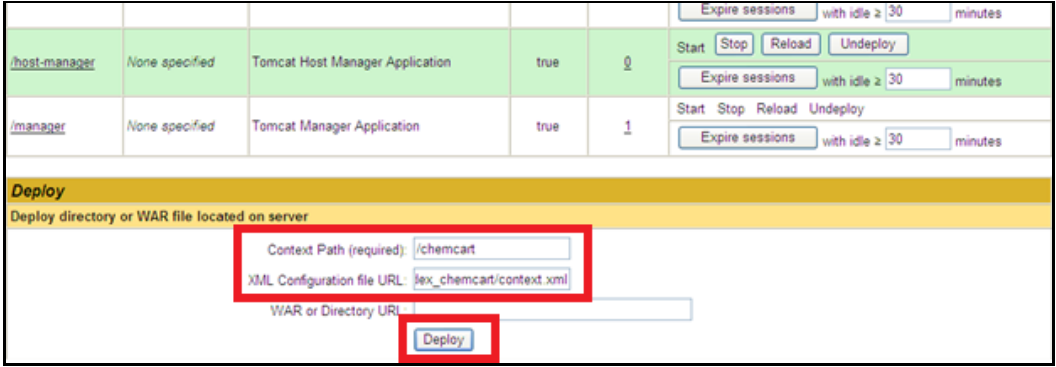

Step	Failback Procedure	Pass/Fail	Initials
	f. In the XML Configuration file URL field, enter <code>lex_chemcart/context.xml</code>  g. At the bottom of the page, click the <i>Deploy</i> button to redeploy <i>ChemCart</i> in the DR environment.		
11.	To modify the <i>ChemCart/Pipeline-Pilot</i> adapter servlet: - Navigate to the location <code>cd /usr/lr43_tomcat/edex/reg/</code> - Open the file <code>PilotResponseViewerConfig.xml</code> (shown following), and edit the values <code>servletAddress</code> and <code>tmpDataDirURL</code> so that they point to the Prod environment host (<i>erisdb02</i>) IP address, as highlighted below: <pre><?xml version="1.0" encoding="UTF-8"?> <tns:document xmlns:tns="http://www.example.org/PilotResponseViwerConfigSchem a" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://www.example.org/PilotResponseViewerC onfigSchema PilotResponseViewerConfigSchema.xsd "> <tns:server name="prod" pilotServerURL="http://erisppprod01.eisai.local:9948" servletAddress="10.101.33.124:8088" tempSaveDirectory="/usr/edex_chemcart/eisai_tmp/" tempDataDirURL="http://10.101.33.124:8088/chemcart/eisai_tmp/" pilotServerPassword="prodpp"/> </tns:document></pre> - Restart <i>tomcat</i> using the following commands, at the prompt, and hit <Enter> after each. <pre>> /etc/init.d/tomcat stop > /etc/init.d/tomcat start</pre>	☐ Pass ☐ Fail	
12.	Following failback, refer to Appendix C and follow the instructions on updating Pipeline Pilot with <i>ChemCart</i> configuration variables.	☐ Pass ☐ Fail	

End Date: _____ End Time: _____

Comments: _____

Performed By: _____ Date Performed: _____



12. Performing ChemCart Failback Verification

To verify that the *ChemCart* system failback procedure was correctly executed and completed, perform the following verification procedure (Table 9, below), indicating a pass or fail status for each step, along with the initials of the failback team member performing the step.

Important: Capture screen-capture images of verification step data, and after completing the procedure, print this document, attaching all screen captures to Appendix A.

Table 9 - ChemCart Failback Verification Procedure

Start Date: _____ Start Time: _____

Step	Failover Verification Procedure	Pass/Fail	Initials	
1.	Verify that Data Guard is responding and that a complete mirror has occurred. Verify the following items to complete failover on each system:	☐ Pass ☐ Fail		
	SYSTEM TO START UP			SYSTEM CHECK TO PERFORM
	ERISDB02			Verify that Erisdb02 is responding. Verify that the database <i>eriprd</i> is up and running.
				Ping Erisdb02.eisai.local. Verify that the DR host displays the application when the URL http://10.101.33.124:8088/chemcart is executed within a browser.

End Date: _____ End Time: _____

Comments:

Performed By: _____ Date Performed: _____



13. Appendices

Appendices A and B are utilized to capture additional information and supporting evidence associated with the execution of this document.

Appendix C provides a procedure required to update Pipeline Pilot with configuration values used by *ChemCart*.



Appendix A - Screen capture attachments

This page is considered a *place holder* to identify where documentation associated with test procedure will be located once executed.

Attach all attachments/evidence to this page.



Appendix B - Discrepancy Form

Make a copy of this form for each discrepancy encountered, and provide:

- The step # associated with the Discrepancy
- The Discrepancy Number (format: *Dis-###*)
- A detailed description of the Discrepancy
- Your name in the Discrepancy *Recorded By* field
- The date in the *Date* field
- A detailed description of the Resolution
- Your name in the Solution *Recorded By* field
- The solution date in the *Date* field


<u>Associated Step #:</u>	<u>Discrepancy #:</u>
<u>Detailed Description of Discrepancy:</u>	
Recorded By:	Date: ____/____/____
<u>Description of Resolution:</u>	
Recorded by:	Date: ____/____/____

Appendix C - Updating ChemCart parameters in Pipeline Pilot


ChemCart contains several functions that are parametrized based on values stored on the *Pipeline Pilot* server. In order for these actions to function properly within *ChemCart*, the following actions need to be taken after a *ChemCart* failover.

1. Open the Pipeline Pilot administration portal on the current Pipeline Pilot main production server (prior to failover, this server would be `erisppprod01.eisai.local`, substitute the current FQDN as appropriate below).

`http://erisppprod01.eisai.local:9947`

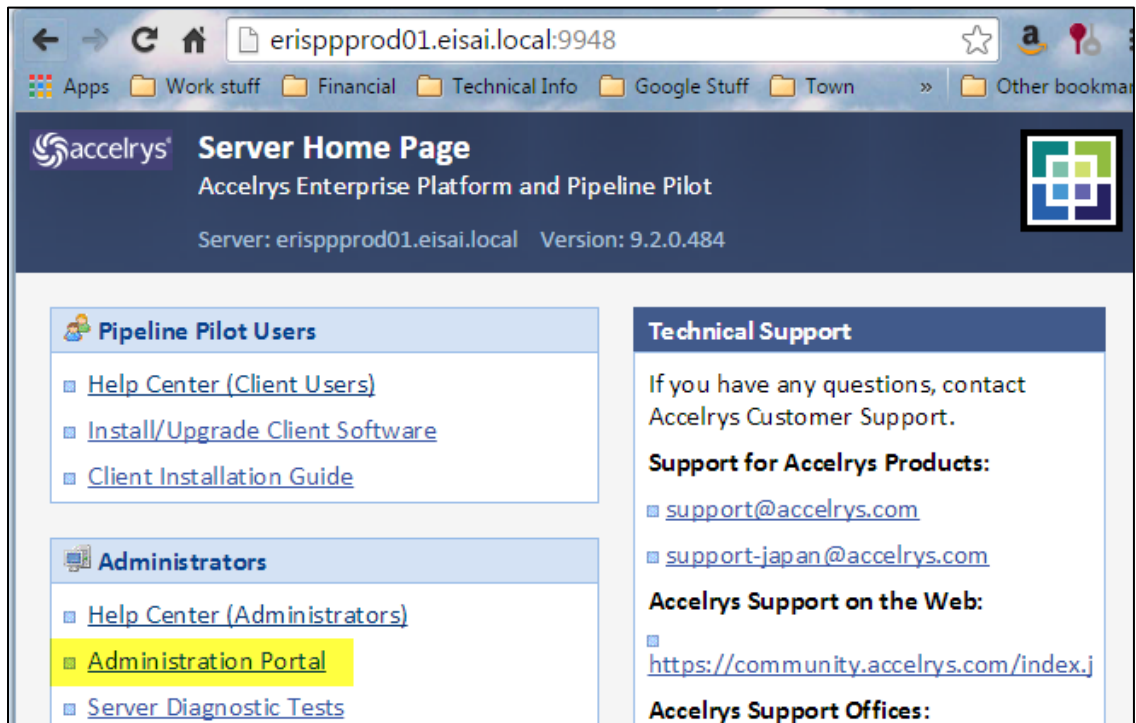

2. Login with the credentials found in *KeePass* for ARC/Pipeline Pilot /Administration Portal. The username will be `scitegicadmin`.
3. At the Administration page (following), select the *Setup* folder, and click the *Global Properties* icon, as shown, to display the properties table.

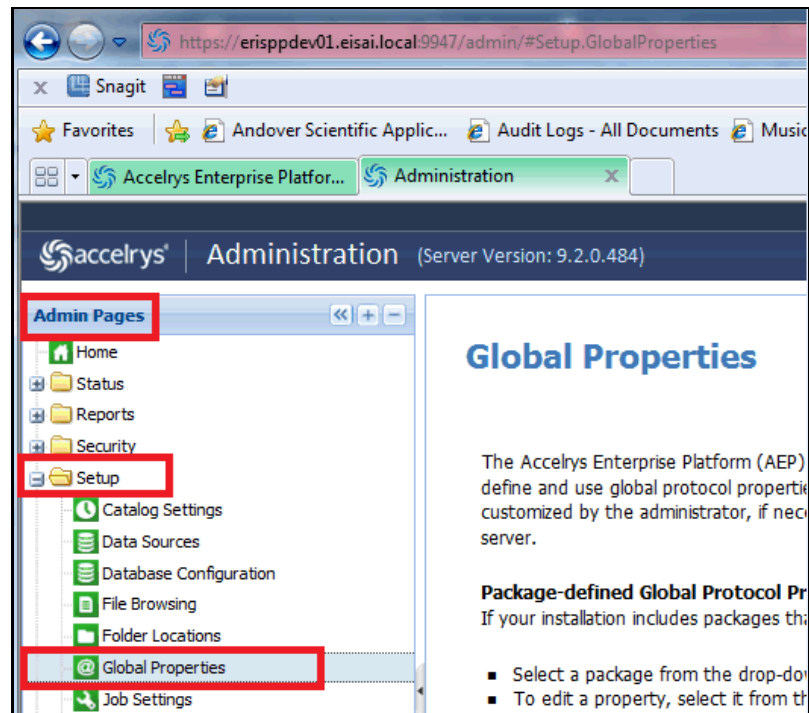

Property	Value
R_exe	C:\Program Files\R\R-2.15.3\bin\x64\Rterm.exe
anon_auth_link	http://10.101.32.52:9948/auth/anon/launchjob?_compat=1&_protocol=
edexservlet	http://10.101.33.19:8088/reg/servlet/EdexServlet?protocol=
SID_10_101_33_237	ERITEST
SID_10_101_33_109	ERIDEV
smtp_ip	10.101.33.225
serverenv	prod
serverip	10.101.32.52
SID_10_101_33_19	ERIPRD
lta_path	\\eri1nwebprod01.eri.us.eisai.local
Add	Update
Remove	

- Remove the highlighted entry above with the value *ERIPRD*.
- At the bottom-left, click the *Add* button to create a new property with the value *ERIPRD* and the name of the property, using the same format.
SID_{new underscore-separated IP address}
- Click the *Update* button to apply the new values, and close the Pipeline Pilot web page.