



# Diplomarbeit

## Artificial Intelligence in the Industry and Education Environment

SUBTITLE

Eingereicht von

**Florian Prandstetter  
Luna Schätzle**

Eingereicht bei

**Höhere Technische Bundeslehr- und Versuchsanstalt  
Anichstraße**

Abteilung für Wirtschaftsingenieure/Betriebsinformatik

Betreuer

Mag. Dr. Dipl. -Ing. Albert Greinöcker  
MMag.<sup>a</sup> Eva-Maria Egger, MA

Projektpartner

HTL Anichstraße

Innsbruck, April 2025

---

---

Abgabevermerk:

Betreuer/in:

Datum:

Florian Prandstetter  
Luna Schätzle

## Kurzfassung /Abstract

Eine Kurzfassung ist in deutscher sowie ein Abstract in englischer Sprache mit je maximal einer A4-Seite zu erstellen. Die Beschreibung sollte wesentliche Aspekte des Projektes in technischer Hinsicht beschreiben. Die Zielgruppe der Kurzbeschreibung sind auch Nicht-Techniker! Viele Leser lesen oft nur diese Seite.

### Beispiel für ein Abstract (DE und EN)

Die vorliegende Diplomarbeit beschäftigt sich mit verschiedenen Fragen des Lernens Erwachsener – mit dem Ziel, Lernkulturen zu beschreiben, die die Umsetzung des Konzeptes des Lebensbegleitenden Lernens (LBL) unterstützen. Die Lernfähigkeit Erwachsener und die unterschiedlichen Motive, die Erwachsene zum Lernen veranlassen, bilden den Ausgangspunkt dieser Arbeit. Die anschließende Auseinandersetzung mit Selbstgesteuertem Lernen, sowie den daraus resultierenden neuen Rollenzuschreibungen und Aufgaben, die sich bei dieser Form des Lernens für Lernende, Lehrende und Institutionen der Erwachsenenbildung ergeben, soll eine erste Möglichkeit aufzeigen, die zur Umsetzung dieses Konzeptes des LBL beiträgt. Darüber hinaus wird im Zusammenhang mit selbstgesteuerten Lernprozessen Erwachsener die Rolle der Informations- und Kommunikationstechnologien im Rahmen des LBL näher erläutert, denn die Eröffnung neuer Wege zur ort- und zeitunabhängiger Kommunikation und Kooperation der Lernenden untereinander sowie zwischen Lernenden und Lernberatern gewinnt immer mehr an Bedeutung. Abschließend wird das Thema der Sichtbarmachung, Bewertung und Anerkennung des informellen und nicht-formalen Lernens aufgegriffen und deren Beitrag zum LBL erörtert. Diese Arbeit soll einerseits einen Beitrag zur besseren Verbreitung der verschiedenen Lernkulturen

---

leisten und andererseits einen Reflexionsprozess bei Erwachsenen, die sich lebensbegleitend weiterbilden, in Gang setzen und sie somit dabei unterstützen, eine für sie geeignete Lernkultur zu finden.

This thesis deals with the various questions concerning learning for adults – with the aim to describe learning cultures which support the concept of live-long learning (LLL). The learning ability of adults and the various motives which lead to adults learning are the starting point of this thesis. The following analysis on self-directed learning as well as the resulting new attribution of roles and tasks which arise for learners, trainers and institutions in adult education, shall demonstrate first possibilities to contribute to the implementation of the concept of LLL. In addition, the role of information and communication technologies in the framework of LLL will be closer described in context of self-directed learning processes of adults as the opening of new forms of communication and co-operation independent of location and time between learners as well as between learners and tutors gains more importance. Finally the topic of visualisation, validation and recognition of informal and non-formal learning and their contribution to LLL is discussed.

Gliederung des Abstract in **Thema, Ausgangspunkt, Kurzbeschreibung, Zielsetzung**.

**Projektergebnis** Allgemeine Beschreibung, was vom Projektziel umgesetzt wurde, in einigen kurzen Sätzen. Optional Hinweise auf Erweiterungen. Gut machen sich in diesem Kapitel auch Bilder vom Gerät (HW) bzw. Screenshots (SW). Liste aller im Pflichtenheft aufgeführten Anforderungen, die nur teilweise oder gar nicht umgesetzt wurden (mit Begründungen).

# Erklärung der Eigenständigkeit der Arbeit

## EIDESSTATTLICHE ERKLÄRUNG

Ich erkläre an Eides statt, dass ich die vorliegende Arbeit selbstständig und ohne fremde Hilfe verfasst, andere als die angegebenen Quellen und Hilfsmittel nicht benutzt und die den benutzten Quellen wörtlich und inhaltlich entnommenen Stellen als solche erkenntlich gemacht habe. Meine Arbeit darf öffentlich zugänglich gemacht werden, wenn kein Sperrvermerk vorliegt.

Ort, Datum

Verfasser 1

Ort, Datum

Verfasser 1



# Danksagung / Acknowledgements

## Deutsch

An dieser Stelle möchten wir unseren tief empfundenen Dank all jenen aussprechen, die uns während der Konzeption, Durchführung und Fertigstellung dieser Diplomarbeit tatkräftig unterstützt und begleitet haben. Ohne ihre unermüdliche Hilfe und die wertvollen Beiträge wäre die Realisierung dieser Arbeit in der vorliegenden Form nicht möglich gewesen.

Zunächst gilt unser besonderer Dank den betreuenden Professoren, die uns mit ihrer fachlichen Expertise, konstruktiven Kritik und kontinuierlichen Ermutigung zur Seite standen. Ihre fundierten Impulse haben maßgeblich dazu beigetragen, das Projekt methodisch zu schärfen und inhaltlich weiterzuentwickeln. Ebenso möchten wir unseren Familien und Freunden danken, die uns in allen Phasen – sowohl in akademischen als auch in persönlichen Herausforderungen – stets unterstützend begleitet haben.

Unser Dank richtet sich ferner an die HTL Anichstraße, die uns nicht nur den notwendigen Rahmen zur Durchführung dieses Projekts zur Verfügung gestellt, sondern uns auch mit den erforderlichen Ressourcen und einem inspirierenden Lernumfeld ausgestattet hat. Die hier gewonnenen Erfahrungen und Einblicke werden uns auf unserem weiteren beruflichen Weg nachhaltig begleiten und prägen.

Besonders hervorheben möchten wir folgende Personen, deren engagierte Unterstützung und wertvolle Hinweise einen entscheidenden Beitrag zum Erfolg dieser Arbeit geleistet haben:

- **Mag. Dr. Dipl. -Ing. Greinöcker Albert:** Für die fachliche Betreuung, die inhaltlichen Anregungen und die stetige Motivation, die maßgeblich zur kontinuierlichen Verbesserung dieser Arbeit beigetragen haben.
- **MMag.<sup>a</sup> Eva-Maria Egger, MA:** For her economic supervision and comprehensive support during the development of the thesis, which propelled us forward during critical moments. MA Egger Eva-Maria: Für die wirtschaftliche Betreuung und die umfassende Unterstützung bei der Erstellung der Arbeit, die uns in entscheidenden Momenten vorangebracht hat.
- **Dr. Schätzle Manuela:** Für die konstruktiven Rückmeldungen, die sorgfältige Korrektur und die methodische Unterstützung, die wesentlich zur inhaltlichen und sprachlichen Qualität der Arbeit beigetragen haben.
- **Sachse Niclas:** Für die kontinuierliche Unterstützung, die wertvollen Hinweise zur Verbesserung des Inhalts sowie die emotionale Rückendeckung in herausfordernden Phasen.

Unser Dank gilt all jenen, die auf unterschiedliche Weise zum Gelingen dieser Arbeit beigetragen haben. Wir schätzen die Unterstützung sehr und sind dankbar für das entgegengebrachte Vertrauen und die wertvollen Erfahrungen, die uns auf unserem weiteren Lebens- und Berufsweg begleiten werden.

## English

We would like to express our heartfelt gratitude to everyone who supported and accompanied us throughout the conception, execution, and completion of this diploma thesis. Without their tireless assistance and invaluable contributions, the successful realization of this work would not have been possible.

First and foremost, our sincere thanks go to our supervising professors, whose expert guidance, constructive criticism, and constant encouragement played a pivotal role in refining the methodology and enhancing the overall content of the project. We are equally grateful to our families and friends,

who have supported us through all academic and personal challenges, providing unwavering encouragement and assistance.

Our appreciation also extends to HTL Anichstraße, which not only provided us with the essential framework and resources to carry out this project but also fostered an inspiring learning environment that significantly contributed to the success of this work. The experiences and insights gained here will undoubtedly influence and support our future professional endeavors.

We would like to especially acknowledge the following individuals, whose dedicated support and valuable advice have been instrumental to the success of this thesis:

- **Mag. Dr. Dipl. -Ing. Greinöcker Albert:** For his academic supervision, insightful suggestions, and continuous motivation, which have been crucial in the ongoing improvement of this work.
- **MMag.<sup>a</sup> Eva-Maria Egger, MA:** For her economic supervision and comprehensive support during the development of the thesis, which propelled us forward during critical moments.
- **Dr. Schätzle Manuela:** For her constructive feedback, meticulous review, and methodological support, which significantly enhanced the content quality and linguistic precision of the work.
- **Sachse Niclas:** For his consistent support, valuable input for content enhancement, and emotional backing during challenging phases.

We extend our heartfelt thanks to all those who contributed in various ways to the success of this work. We deeply appreciate their support, the trust placed in us, and the invaluable experiences that will continue to guide us on our future academic and professional paths.



# Information zur Verwendung von Künstlicher Intelligenz in dieser Arbeit / Information on the Use of Artificial Intelligence in this Work

## Deutsch

Die vorliegende Diplomarbeit nutzt Künstliche Intelligenz (KI) als integralen Bestandteil des Forschungs- und Schreibprozesses. Ziel war es, die wissenschaftliche Arbeit durch den Einsatz moderner Technologien zu unterstützen, ohne die intellektuelle Eigenleistung und kritische Bewertung der Autorin bzw. des Autors zu ersetzen. Dabei wurde großer Wert darauf gelegt, sämtliche rechtliche, ethische und methodische Aspekte vollumfänglich zu berücksichtigen.

## Anwendungsbereiche und Einsatz der KI

Im Rahmen dieser Arbeit kamen verschiedene KI-basierte Tools zum Einsatz, um:

- **Textgenerierung und Sprachliche Optimierung:** Unterstützung bei der Formulierung, Strukturierung und stilistischen Verfeinerung wissenschaftlicher Inhalte.
- **Datenanalyse:** Verarbeitung und Analyse großer Datenmengen zur Identifikation relevanter Muster und Erkenntnisse.

- **Feedback und Verbesserungsvorschläge:** Generierung konstruktiver Hinweise zur inhaltlichen und methodischen Optimierung.

Zu den in diesem Projekt verwendeten KI-Tools zählen unter anderem:

- ChatGPT
- GitHub Copilot
- Deepseek
- Ollama Modells
- Mistral le Chat

## Wissenschaftliche Methodik und Validierung

Alle durch KI generierten Inhalte und Vorschläge wurden einer sorgfältigen wissenschaftlichen Überprüfung unterzogen. Die methodische Vorgehensweise umfasste:

- Eine manuelle Prüfung aller KI-Ergebnisse hinsichtlich inhaltlicher Richtigkeit und Relevanz.
- Die Integration der KI-bezogenen Ergebnisse in den Gesamtzusammenhang der Arbeit unter strenger Beachtung der etablierten wissenschaftlichen Qualitätsstandards.
- Eine kritische Reflexion der Limitationen der verwendeten KI-Methoden, um Verzerrungen und fehlerhafte Interpretationen zu vermeiden.

So wurde sichergestellt, dass die KI-gestützten Beiträge ausschließlich als ergänzende Hilfsmittel zur Steigerung der Effizienz und Qualität der Arbeit verwendet wurden.

## Rechtliche Absicherung und Haftungsausschluss

Die Nutzung der genannten KI-Tools erfolgte unter strikter Einhaltung aller geltenden gesetzlichen Bestimmungen. Hierzu zählen insbesondere:

- Die Einhaltung der Datenschutzbestimmungen, insbesondere im Hinblick auf die Verarbeitung personenbezogener Daten.

- Die Berücksichtigung der spezifischen Nutzungsbedingungen und vertraglichen Vereinbarungen der jeweiligen Anbieter.

Es wird ausdrücklich darauf hingewiesen, dass die alleinige Verantwortung für die wissenschaftliche Integrität und die inhaltliche Richtigkeit dieser Arbeit bei der Autorin bzw. dem Autor liegt. Die von den KI-Tools generierten Ergebnisse sind als unterstützende Instrumente zu verstehen und stellen keine eigenständigen wissenschaftlichen Erkenntnisse dar. Alle automatisiert erzeugten Inhalte wurden manuell überprüft und bei Bedarf korrigiert. Mit der Einreichung dieser Arbeit bestätigt die Autorin bzw. der Autor, dass sämtliche rechtlichen, ethischen und methodischen Rahmenbedingungen eingehalten wurden.

## Ethische Überlegungen und Transparenz

Neben der Einhaltung rechtlicher Vorgaben wurde auch auf die ethische Dimension des KI-Einsatzes geachtet. Transparenz im Umgang mit den eingesetzten Technologien war ein zentraler Aspekt dieser Arbeit:

- Es wurde offen gelegt, welche KI-Tools zum Einsatz kamen und in welchen Bereichen sie genutzt wurden.
- Die Limitationen der KI-gestützten Verfahren wurden kritisch reflektiert, um eine einseitige Darstellung der wissenschaftlichen Ergebnisse zu vermeiden.
- Der Einsatz der KI diente ausschließlich der Unterstützung und nicht der Substitution der eigenständigen wissenschaftlichen Arbeit.

## English

This diploma thesis integrates artificial intelligence (AI) as a fundamental component of the research and writing process. The primary objective was to enhance the quality and efficiency of the academic work through modern technological support, while ensuring that the intellectual contribution and critical oversight of the author remain paramount. Special care was

taken to fully comply with all relevant legal, ethical, and methodological requirements.

## Application Areas and Use of AI

In this work, various AI-based tools were employed to:

- **Text Generation and Linguistic Optimization:** Assist in formulating, structuring, and refining the stylistic aspects of academic content.
- **Data Analysis:** Process and analyze large datasets to identify significant patterns and insights.
- **Feedback and Improvement Suggestions:** Generate constructive recommendations for content and methodological enhancements.

The AI tools used in this project include, but are not limited to:

- ChatGPT
- GitHub Copilot
- Deepseek
- Ollama Modells
- Mistral le Chat

## Scientific Methodology and Validation

All outputs and suggestions generated by AI were subjected to rigorous scientific review. The methodological approach included:

- A thorough manual review of all AI-generated content to ensure its accuracy and relevance.
- Integrating the AI-assisted results within the broader context of the thesis while strictly adhering to established scientific quality standards.
- Critically reflecting on the limitations of the AI methods employed to avoid biases and erroneous interpretations.

This process ensured that AI-based contributions were used solely as auxiliary tools to enhance the efficiency and quality of the work.

## Legal Safeguards and Disclaimer

The use of the aforementioned AI tools was carried out in strict accordance with all applicable legal requirements. In particular, the following measures were observed:

- Adherence to data protection laws, especially regarding the processing of personal data.
- Consideration of the specific terms of service and contractual agreements of the respective providers.

It is expressly stated that the sole responsibility for the scientific integrity and accuracy of this work rests with the author. The outputs generated by the AI tools are to be regarded as supplementary aids and do not constitute independent scientific findings. All automated outputs were manually verified and corrected if necessary. By submitting this work, the author confirms that all legal, ethical, and methodological frameworks have been fully observed.

## Ethical Considerations and Transparency

In addition to legal compliance, significant emphasis was placed on the ethical aspects of using artificial intelligence. Transparency regarding the employed technologies was a key element of this work:

- Full disclosure of the AI tools used and the areas in which they were applied.
- A critical reflection on the limitations of the AI-assisted methods to prevent biased or incomplete representation of the scientific results.
- Ensuring that the use of AI served solely as a supportive tool and did not replace the author's independent scholarly work.



# Contents

<b>Abstract</b>	iii
<b>Danksagung / Acknowledgements</b>	vii
<b>Information zur Verwendung von Künstlicher Intelligenz in dieser Arbeit / Information on the Use of Artificial Intelligence in this Work</b>	xi
<b>I. Introduction</b>	1
<b>1. Introduction: AI in the Industry and Education Environment</b>	3
1.1. Objectives and Scope . . . . .	3
1.2. Technical and Economic Context . . . . .	4
1.3. Team Composition . . . . .	4
1.4. Detailed Task Description . . . . .	5
1.4.1. Luna Schaetze . . . . .	5
1.4.2. Florian Prandstetter . . . . .	5
1.4.3. Gabriel Mrkonja . . . . .	6
1.5. Structure of the Diploma Thesis . . . . .	6
<b>2. Conceptual Evolution and Rationale</b>	9
2.1. Introduction . . . . .	9
2.2. Timeline and Milestones . . . . .	9
2.3. Initial Concept . . . . .	10
2.4. The Self-Sufficiency Project . . . . .	11
2.5. Challenges and Limitations of the Self-Sufficiency Project . . . . .	12
2.6. Transition to the Current Project Concept . . . . .	13
2.6.1. AI for Education . . . . .	13

2.6.2. AI Integration in Software Development . . . . .	14
2.6.3. AI on Edge Devices . . . . .	14
2.7. Overcoming Challenges in the Current Project Concept . . . . .	14
2.7.1. Challenges . . . . .	15
2.7.2. Solutions . . . . .	15
2.8. Insights and Lessons Learned . . . . .	16
2.9. Conclusion . . . . .	17
<b>II. Server</b>	<b>19</b>
<b>3. Server Hardware</b>	<b>21</b>
3.1. Introduction . . . . .	21
3.2. Server Components . . . . .	21
3.2.1. Processor . . . . .	21
3.2.2. Graphics Processing Unit . . . . .	22
3.2.3. Random Access Memory . . . . .	22
3.2.4. Motherboard . . . . .	23
3.2.5. Power Supply . . . . .	23
3.2.6. Storage . . . . .	23
3.3. Conclusion . . . . .	24
<b>4. Server Infrastructure</b>	<b>25</b>
4.1. Introduction . . . . .	25
4.2. Server Infrastructure Components . . . . .	25
4.2.1. Server Hardware . . . . .	25
4.2.2. Networking . . . . .	26
4.2.3. Remote Management . . . . .	26
4.2.4. Backup and Recovery . . . . .	27
4.2.5. Containerization . . . . .	27
4.3. Conclusion . . . . .	27
<b>III. Theoretical foundations</b>	<b>29</b>
<b>5. Operating System</b>	<b>31</b>
5.1. Introduction . . . . .	31

5.2.	What is an Operating System? . . . . .	31
5.2.1.	Types of Operating Systems . . . . .	32
5.3.	Kernel . . . . .	33
5.4.	Operating Systems used on the server . . . . .	33
5.4.1.	Evaluating different Operating Systems . . . . .	33
5.4.2.	Outcome of the Evaluation . . . . .	35
<b>6.</b>	<b>Used Programming Languages</b>	<b>37</b>
6.1.	Python . . . . .	37
6.1.1.	MediaPipe . . . . .	37
6.1.2.	Transformers . . . . .	37
6.1.3.	JSON . . . . .	37
6.2.	HTML, CSS, and JavaScript in Combination with Vue.js . . . . .	38
6.2.1.	HyperText Markup Language (HTML) . . . . .	38
6.2.2.	Cascading Style Sheets (CSS) . . . . .	39
6.2.3.	JavaScript . . . . .	39
6.2.4.	Vue.js . . . . .	40
6.3.	Type Script . . . . .	41
6.3.1.	Axios . . . . .	41
<b>IV.</b>	<b>Implementation of Large Language Models</b>	<b>43</b>
<b>7.</b>	<b>Overview and Integration of Large Language Models</b>	<b>45</b>
7.1.	Large Language Models (LLMs) . . . . .	45
7.2.	Utilized Large Language Models . . . . .	47
7.3.	Ollama Application Overview . . . . .	48
7.3.1.	Ollama Features . . . . .	48
7.3.2.	Ollama Architecture . . . . .	48
7.3.3.	Ollama Models . . . . .	49
7.3.4.	Ollama API . . . . .	49
7.3.5.	Ollama Integration . . . . .	50
7.3.6.	Benefits and Challenges of Ollama . . . . .	50
7.4.	Evaluation of Models via the Ollama Platform . . . . .	51
7.4.1.	Model Selection Criteria . . . . .	51
7.4.2.	Challenges in Model Testing and Updates . . . . .	52
7.4.3.	Model Selection for the Final Application . . . . .	53

7.5.	Ollama Model Testing and Evaluation . . . . .	53
7.5.1.	Quantitative Evaluation Methods . . . . .	53
7.5.2.	Qualitative Evaluation Methods . . . . .	54
7.5.3.	Models Evaluated During Testing . . . . .	55
7.5.4.	Data Collection . . . . .	56
7.5.5.	Data Preparation . . . . .	58
7.5.6.	Data Processing . . . . .	62
7.5.7.	Test Results and Analysis . . . . .	69
7.5.8.	Qualitative Data Analysis . . . . .	72
7.5.9.	Model Comparison for Different Use Cases and Scenarios . . . . .	77
7.5.10.	Model Selected for the Final Application . . . . .	80
7.5.11.	Model Integration and Deployment . . . . .	80
7.6.	Integration of OpenAI's API . . . . .	81
7.6.1.	Overview of the OpenAI API . . . . .	81
7.6.2.	Data Security and Privacy in Compliance with Austrian and EU Regulations . . . . .	83
7.6.3.	OpenAI API Implementation in Vue.js . . . . .	84
7.7.	Conclusion . . . . .	88
<b>8.</b>	<b>Self-hosted Flask Service</b>	<b>91</b>
8.1.	Advantages of a Self-hosted Service . . . . .	91
8.2.	Flask as a Web Framework . . . . .	92
8.2.1.	Core Functionalities of Flask . . . . .	92
8.2.2.	Rationale for Selecting Flask . . . . .	93
8.3.	Architecture and Service Structure . . . . .	94
8.3.1.	System Architecture . . . . .	94
8.3.2.	Expandability and Modularity . . . . .	95
8.4.	RESTful Endpoints and Functionalities . . . . .	96
8.4.1.	Chatbot Endpoints . . . . .	96
8.4.2.	OCR Endpoints . . . . .	100
8.4.3.	Programming Bot Endpoints . . . . .	104
8.5.	Utility Functions . . . . .	106
8.5.1.	Text Processing Utilities . . . . .	106
8.5.2.	OCR (Optical Character Recognition) Utilities . . . . .	111
8.6.	Deployment . . . . .	112

8.7.	Docker . . . . .	113
8.7.1.	Used Docker Images . . . . .	113
8.7.2.	Docker Compose . . . . .	114
8.8.	Scalability and Performance Concerns . . . . .	114
8.9.	Conclusion and Future Work . . . . .	114
<b>9.</b>	<b>Intelligent Student AI Hub: An Integrated Learning Platform</b>	<b>117</b>
9.1.	Introduction . . . . .	117
9.2.	System Architecture and Technologies . . . . .	117
9.2.1.	Vue.js . . . . .	118
9.2.2.	Flask API . . . . .	118
9.2.3.	ChatGPT API . . . . .	118
9.2.4.	Firebase for Authentication and Data Storage . . . . .	119
9.3.	Core Functionalities . . . . .	119
9.4.	Authentication and User Profiles . . . . .	120
9.4.1.	Why Firebase? . . . . .	120
9.4.2.	Firebase Authentication Factors . . . . .	120
9.4.3.	Firebase Integration with Vue.js . . . . .	121
9.4.4.	Implementation of Firebase Authentication . . . . .	122
9.4.5.	User Overview and Personalization . . . . .	127
9.4.6.	Outlook for Account Management . . . . .	128
9.4.7.	TSN Integration . . . . .	128
9.5.	Interactive Chatbot for Day-to-Day AI Questions . . . . .	129
9.6.	OpenAI Integration . . . . .	131
9.6.1.	ChatGPT API and Its Limitations . . . . .	132
9.6.2.	User Access to Paid Services . . . . .	133
9.6.3.	Integration of OpenAI's API . . . . .	133
9.7.	Programming Bot for Different Programming Languages . . . . .	133
9.8.	Image Recognition Tool . . . . .	136
9.8.1.	Implementation of the Image Recognition Tool . . . . .	136
9.9.	Image to Text Tool . . . . .	138
9.10.	Saved Chats . . . . .	141
9.10.1.	Implementation of the Saved Chats Feature . . . . .	141
9.11.	Structured and Intuitive Navigation . . . . .	143
9.12.	Styling and Theming . . . . .	144
9.13.	Features Excluded from the Final Version . . . . .	144
9.14.	Conclusion . . . . .	145

<b>10. Visual Studio code extension</b>	<b>147</b>
10.1. Introduction . . . . .	147
10.2. what is Visual Studio Code . . . . .	147
10.3. Development . . . . .	148
10.3.1. Technologys used . . . . .	148
10.4. Core Functionality . . . . .	148
10.4.1. Chat . . . . .	148
10.4.2. Server Request . . . . .	152
10.4.3. Status Bar Item . . . . .	153
10.4.4. Deploying the Extension . . . . .	154
10.5. Conclusion . . . . .	155
<b>V. Economic analysis of the AI market and related fields</b>	<b>157</b>
<b>11. Artificial Intelligence in Economics</b>	<b>159</b>
11.1. Introduction . . . . .	159
11.2. The Role of AI in Economics . . . . .	159
11.3. Risks of AI . . . . .	160
11.4. Benefits of AI use . . . . .	160
11.4.1. Data Analysis . . . . .	160
11.4.2. Automation . . . . .	161
11.4.3. Ressource allocation . . . . .	161
11.5. Applications of AI . . . . .	161
11.5.1. Customer Service . . . . .	161
11.5.2. Supply Chain Management . . . . .	161
11.5.3. Predictive Analytics . . . . .	161
11.6. Conclusion . . . . .	161
<b>12. Open source evaluation on Economics</b>	<b>163</b>
12.1. Introduction . . . . .	163
12.1.1. What is open source? . . . . .	163
12.1.2. Advantages of open source . . . . .	164
12.1.3. Why Do People Use open source? . . . . .	165
12.2. What is and isn't open source? . . . . .	165
12.2.1. Definition and Guiding Principles . . . . .	165
12.2.2. Misconceptions About open source . . . . .	166

<b>12.3. Challenges and Disadvantages of open source Software . . . . .</b>	<b>167</b>
12.3.1. Disadvantages of open source Software . . . . .	167
12.3.2. Technical Challenges . . . . .	168
12.3.3. Economic Challenges . . . . .	168
12.3.4. Social Challenges . . . . .	169
12.3.5. Legal Challenges . . . . .	169
<b>12.4. Potential Risks and Security Concerns . . . . .</b>	<b>170</b>
12.4.1. Common Risks Associated with Open Source Software	170
12.4.2. Specific Security Concerns in open source Environments	171
<b>12.5. The Role of open source in Economics . . . . .</b>	<b>172</b>
12.5.1. Driving Innovation and Shaping Market Dynamics . .	172
12.5.2. Supporting Startups and small Enterprises . . . . .	173
12.5.3. Facilitating cross-industry collaboration and open In- novation . . . . .	173
<b>12.6. Open source in Key Industries . . . . .</b>	<b>174</b>
12.6.1. Examples of Open Source Success Stories . . . . .	175
<b>12.7. Revenue models in Open source . . . . .</b>	<b>176</b>
12.7.1. Common Business Models . . . . .	176
<b>12.8. Open Source Support in Austria . . . . .</b>	<b>177</b>
<b>12.9. Open source in Practice: A Personal Experience . . . . .</b>	<b>177</b>
<b>12.10. Licence Model of the Diploma Thesis . . . . .</b>	<b>178</b>
12.10.1. GNU General Public License (GPL) Version 3 . . . . .	178
<b>12.11. Conclusion . . . . .</b>	<b>179</b>
<b>13. Economic Aspect of Operating Systems (Florian Prandstetter) . . . . .</b>	<b>181</b>
13.1. Introduction . . . . .	181
13.2. Operating System Market Share . . . . .	181
13.2.1. Operating Systems for Servers . . . . .	182
13.2.2. Operating Systems for Embedded Systems . . . . .	184
13.3. Important Players . . . . .	184
13.3.1. Microsoft . . . . .	185
13.3.2. Apple . . . . .	185
13.3.3. Red Hat . . . . .	185
13.3.4. Wind River Systems . . . . .	186
13.4. Conclusion . . . . .	186

<b>VI. Conclusion</b>	<b>189</b>
<b>14. Conclusion</b>	<b>191</b>
14.1. Key Findings . . . . .	192
14.2. Working in a Team . . . . .	194
14.3. Lessons Learned . . . . .	196
14.4. Future Directions . . . . .	197
<b>15. Outlook</b>	<b>199</b>
15.1. Future Trends in AI . . . . .	199
15.1.1. AI in Industry . . . . .	200
15.1.2. AI in Education . . . . .	200
15.1.3. Challenges and Opportunities . . . . .	200
15.2. Further Development of the Flask Server . . . . .	201
15.3. Further Development of the Student AI Hub . . . . .	202
15.4. Open Source in Future Projects . . . . .	202
15.5. Further development of the VS Code extension . . . . .	203
15.6. Further Optimization of the Server . . . . .	203
15.7. Challenges and Opportunities . . . . .	204
15.8. Recommendations for Further Research . . . . .	204
15.9. Conclusding Remarks . . . . .	204
<b>A. Glossary</b>	<b>i</b>
<b>Glossary</b>	<b>i</b>
<b>B. Time Protocol</b>	<b>iii</b>
B.1. Luna P. I. Schätzle . . . . .	iii
B.2. Florian Prandstetter . . . . .	xii
<b>Bibliography</b>	<b>xxi</b>

# **Part I.**

## **Introduction**



# 1. Introduction: AI in the Industry and Education Environment

**Author:** Luna P. I. Schätzle, Florian Prandstetter, Gabriel Mrkonja

In the context of ongoing digital transformation, the use of artificial intelligence (AI) is becoming increasingly critical across various industries. AI technologies are employed to automate processes, optimize production, and enhance quality, while in the education sector, they support learning processes, personalize educational content, and provide targeted feedback to students. Nonetheless, the implementation of AI solutions in both industry and education remains challenging due to the inherent complexity of these technologies, a shortage of specialized expertise, and the high costs associated with their development and deployment.

## 1.1. Objectives and Scope

The primary objective of this diploma thesis is to develop AI-driven solutions that address specific challenges in both industrial and educational settings.

The scope of the project encompasses the following tasks:

- **Task 1:** Establish a server (API) to host and run AI models.
- **Task 2:** Develop a robust backend for the AI Hub and the Code Extension.
- **Task 3:** Research and identify the most suitable AI models for various tasks, and integrate them into the backend of the AI Hub and the Code Extension.

- **Task 4:** Create an AI Hub for students to access a variety of AI tools and resources, including chatbots, image recognition, and natural language processing (NLP) models.
- **Task 5:** Implement an AI solution for coding assistance, available as an extension within a code editor.
- **Task 6:** Develop an AI-driven service on an edge device (e.g., Raspberry Pi) to explore the potential of AI in industrial applications with minimal resources.
- **Task 7:** Compile comprehensive documentation of the project outcomes, covering the conceptual framework, theoretical foundations, practical implementation, primary and alternative solution approaches, results, and their interpretation.

## 1.2. Technical and Economic Context

The project is embedded within the current wave of digital transformation, which has significantly increased the importance of AI technologies in both industrial and educational environments. By leveraging state-of-the-art AI models and tools—such as chatbots, image recognition, and natural language processing—the project aims to develop innovative solutions tailored to specific challenges in these fields.

Furthermore, the project will investigate the feasibility of deploying AI-driven services on edge devices, like Raspberry Pi, to explore cost-effective and resource-efficient industrial applications. The successful execution of the project relies on the team's combined expertise in software development, AI technologies, and project management.

## 1.3. Team Composition

The project team consists of three members:

- Luna Schaetzle (Project lead)
- Florian Prandstetter

- Gabriel Mrkonja

Each team member is assigned specific roles and responsibilities, which are detailed in the following sections.

## 1.4. Detailed Task Description

### 1.4.1. Luna Schaetzle

Luna Schaetzle is responsible for a wide range of tasks and duties, including:

- **Team Leadership and Project Management:** Serving as the team leader, project manager, and project lead, she oversees the planning, coordination, and monitoring of all project activities.
- **Documentation and Repository Management:** Ensuring comprehensive documentation of project outcomes and managing the GitHub repository.
- **Backend Development:** Leading the development of the backend for both the AI Hub and the Code Extension.
- **Website Development:** Directing the design and implementation of the AI Hub's website.
- **Open Source Evaluation:** Assessing the economic implications and potential of open-source technologies.

### 1.4.2. Florian Prandstetter

Florian Prandstetter is in charge of some key tasks to ensure the projects success. These tasks are:

- **Setting up a server:** Building and maintaining a server to host the AI models.
- **Managing the Servers Operating System:** Installing and managing the operating system of the server.

- **Managing a Docker Service:** Configuring and managing a Docker service on the server.
- **Developing an VS Code extension:** Developing an extension for the Visual Studio Code editor.
- **Analyzing the OS Market:** Analyzing the Operating System market and its different competitors.

#### 1.4.3. Gabriel Mrkonja

### 1.5. Structure of the Diploma Thesis

To enhance readability and clarity, the diploma thesis is organized into distinct parts that mirror the various objectives of the project:

- **Part 1: Introduction and Project Overview** — Provides an introduction to the project, outlining its objectives, scope, and technical as well as economic context.
- **Part 2: Hardware Components** — Describes the hardware utilized in the project, including the Raspberry Pi and the server.
- **Part 3: Theoretical Foundations** — Covers the theoretical background, detailing the operating systems and programming languages employed.
- **Part 4: Implementation of Large Language Models** — Details the integration of large language models, encompassing the hosted Flask service, the Student AI Hub, and the VS Code extension.
- **Part 5: Implementation of Object Detection** — Focuses on object detection techniques, presenting both an introduction and a step-by-step account of the implementation process.
- **Part 6: Economic Evaluations** — Examines the economic aspects of AI in education and industry, including evaluations of open-source approaches and their financial implications.
- **Part 7: Conclusion and Proof of Work** — Summarizes the key findings and outcomes of the project while providing an outlook on future developments.

Each part is further divided into chapters, sections, and subsections, ensuring a structured and comprehensive overview of the project.<sup>1</sup>

---

<sup>1</sup>Under every chapter, the author of the chapter is listed.



## 2. Conceptual Evolution and Rationale

**Authors:** Luna P. I. Schaetzle

This chapter provides a comprehensive analysis of the project's evolution. It delineates the progression from an initial theoretical proposal, through the Self-Sufficiency Raspberry Pi Project, to the final project concept. The discussion elucidates the key motivations, challenges, and pivotal decisions that have ultimately shaped the design.

### 2.1. Introduction

In the context of this Diploma Thesis, the project has undergone several conceptual transformations aimed at refining its scope, objectives, and implementation strategy. Documenting this evolution is essential for a holistic understanding of the development process, as it highlights the iterative nature of design and the interplay between feasibility, scalability, and the initial research goals. Key considerations included evaluating the project's feasibility, ensuring scalability, and aligning with the overarching research objectives. Additionally, a critical examination of technical challenges encountered during implementation informed subsequent refinements.

### 2.2. Timeline and Milestones

To provide a clear overview of the project's evolution, a timeline outlining the major milestones, decision points, and revisions is presented in the

following chart.

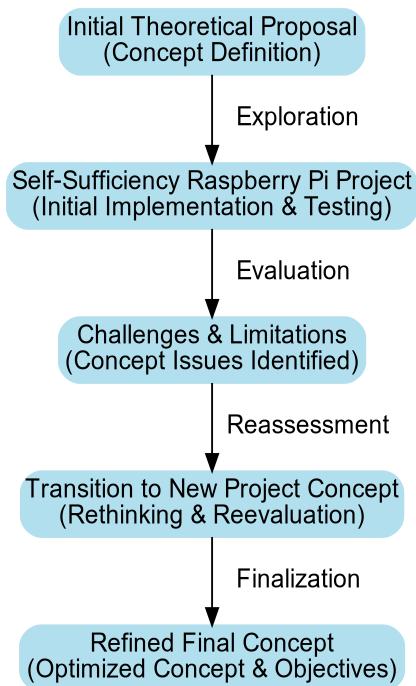


Figure 2.1.: Gantt Chart of the Project Evolution

This timeline visually summarizes the progression of ideas and the key changes made over time, offering a concise reference to the project's developmental history.

### 2.3. Initial Concept

The initial concept for this Diploma Thesis was to explore various methodologies for leveraging artificial intelligence (AI) across diverse application domains. The primary objective was to develop a comprehensive framework for evaluating the performance of AI models in a range of tasks and use cases. This framework was intended to include both quantitative metrics

and qualitative assessments, facilitated in part by the use of structured questionnaires to capture user experiences and application-specific requirements. However, early analysis revealed that the scope of this concept was overly broad. The project team quickly recognized that the lack of a focused research question, as well as the ambiguous integration of the various components, would make it challenging to implement the project within the available time and resources.

## 2.4. The Self-Sufficiency Project

In response to these challenges, the project team refined its approach by narrowing the scope to a more tangible and achievable idea—the Self-Sufficiency Project. This project was designed around the development of a self-contained system based on a Raspberry Pi, capable of autonomously executing a variety of tasks. The core idea was to demonstrate a practical application of AI by minimizing reliance on external APIs and services, thereby increasing system robustness and independence. Additionally, the design emphasized portability, with the entire system housed in a compact enclosure to facilitate deployment in diverse environments. Figure 2.2 illustrates the conceptual framework of the Self-Sufficiency Raspberry Pi Project.



Figure 2.2.: Conceptual Illustration of the Self-Sufficiency Raspberry Pi Project

DTeK (2023)

## 2.5. Challenges and Limitations of the Self-Sufficiency Project

During the development of the Self-Sufficiency Project, several significant challenges and limitations emerged that prompted a critical reassessment of the project's direction. These challenges included:

- **Complexity of Implementation:** The integration of heterogeneous AI models with multiple hardware components introduced considerable technical difficulties, necessitating extensive iterative development and rigorous testing.
- **Scalability Constraints:** The self-sufficiency paradigm, while beneficial for system independence, inherently restricted scalability and interoperability with external systems, thereby limiting future expansion.

- **Resource Limitations:** The ambitious scope of the project, combined with constrained time and technical expertise, rendered the initial plan impractical.
- **Ambiguity in Objectives:** The absence of clearly defined, measurable goals complicated the assessment of progress and the determination of success criteria.
- **Integration Challenges:** The complexity of harmonizing various AI models, hardware interfaces, and supporting software systems proved to be more formidable than initially anticipated.
- **Time Constraints:** Preliminary evaluations indicated that the project's timeline was insufficient to address the technical and logistical challenges identified.

In light of these challenges, the project team concluded that a more narrowly defined and feasible approach was necessary. Consequently, the focus shifted towards a new concept that emphasizes AI applications and their specific use cases.

## 2.6. Transition to the Current Project Concept

After reevaluating the limitations of the initial approaches, the project team restructured the initiative into a more focused framework, subdividing it into three distinct components. This revised approach not only addresses the previously identified constraints but also aligns more closely with the overarching research objectives. The current project concept is organized into the following three components:

### 2.6.1. AI for Education

This component explores the integration of AI technologies within educational settings. The primary goal is to develop an AI-powered web application that facilitates interactive and personalized learning experiences, particularly for IT students. By leveraging adaptive learning algorithms, the

system aims to enhance comprehension and engagement, thereby contributing to more effective educational practices.

### 2.6.2. AI Integration in Software Development

Focusing on the software development domain, this component investigates how AI can assist developers in writing and debugging code. The objective is to develop an AI model that integrates seamlessly into the development workflow, for example, via a Visual Studio Code extension. This extension is designed to provide real-time code analysis, suggestions, and bug detection, ultimately improving code quality and development efficiency.

### 2.6.3. AI on Edge Devices

The third component examines the deployment of AI models on resource-constrained edge devices, using the Raspberry Pi as a primary test platform. The goal is to implement and optimize real-time object detection and other AI-driven tasks on the Raspberry Pi, thereby demonstrating the feasibility of running sophisticated AI applications on low-power hardware. This component is crucial for understanding the limitations and opportunities associated with edge computing in AI applications.

## 2.7. Overcoming Challenges in the Current Project Concept

The evolution of any project is accompanied by a series of challenges. In transitioning to the current project concept, the team identified and addressed several critical obstacles to ensure a robust and effective implementation of the new framework.

## 2.7.1. Challenges

The primary challenges encountered during this transition included:

- **Technical Complexity:** Integrating advanced AI models with diverse platforms—such as web applications, code editors, and edge devices—required a deep understanding of multiple technologies and frameworks.
- **Resource Limitations:** The expansive scope of the project necessitated a judicious allocation of time, technical expertise, and hardware resources.
- **Scalability Issues:** Balancing the goal of system independence with the need for scalability and interoperability posed a significant challenge, particularly when deploying on resource-constrained edge devices.
- **Temporal Constraints:** The limited project timeline imposed restrictions on the depth and breadth of research and development activities.
- **Integration Complexity:** Harmonizing the heterogeneous components of the project—including AI models, hardware interfaces, and software systems—proved more intricate than initially anticipated.
- **Ambiguity in Evaluation Criteria:** The absence of clearly defined, quantifiable success metrics complicated the objective assessment of project progress and outcomes.
- **Server Resource Limitations:** Particularly within the AI for Education component, limitations in server capacity emerged as a significant impediment to achieving desired scalability.

## 2.7.2. Solutions

In response to these challenges, the project team adopted a series of strategic measures:

- **Modularization:** Dividing the project into three distinct components allowed for a more focused development approach, effectively managing complexity and scalability concerns.

- **Scope Refinement:** By narrowing the project's scope, the team could allocate resources more efficiently, thereby establishing a realistic timeline and achievable milestones.
- **Iterative Development:** Implementing an iterative development methodology enabled the incremental resolution of technical challenges, leading to a more robust and scalable final implementation.
- **Optimization of Server Resources:** Specific efforts were made to streamline the AI for Education component, thereby reducing server resource consumption and mitigating scalability issues.
- **Establishment of Clear Evaluation Metrics:** The development and adoption of explicit, measurable evaluation criteria for each project component facilitated systematic progress tracking and performance assessment.
- **Utilization of AI for Process Optimization:** Leveraging AI technologies to automate routine tasks and optimize overall system performance further enhanced efficiency and scalability.

## 2.8. Insights and Lessons Learned

Throughout the project's evolution, several key insights were gained, which have significantly informed the current project concept and its implementation strategy. These insights include:

- **Adaptive Planning:** The capacity to adapt and refine project parameters in response to emerging challenges is critical for successful project execution.
- **Incremental Development:** An iterative development approach facilitates steady progress and enables the timely resolution of technical issues, contributing to continuous improvement of the project design.
- **Strategic Resource Allocation:** Effective management of available resources—time, expertise, and hardware—is essential for mitigating complexity and ensuring the project's successful completion.
- **Balancing Independence and Scalability:** Striking the right balance between system autonomy and scalability is paramount for ensuring long-term viability and facilitating future integrations.

- **Clear Metrics for Evaluation:** Establishing definitive, quantifiable success metrics is vital for tracking progress, objectively assessing outcomes, and guiding subsequent development efforts.
- **Leveraging AI for Optimization:** The strategic use of AI to automate processes and optimize system performance can markedly enhance overall efficiency and scalability.
- **Importance of Targeted Optimization Strategies:** Focused measures—such as reducing server resource usage and refining AI model implementations—are crucial for addressing scalability concerns and boosting system performance.

## 2.9. Conclusion

The transition to the current project concept was driven by a deliberate process of modularization, scope refinement, and iterative development. By segmenting the initiative into three distinct components AI for Education, AI Integration in Software Development, and AI on Edge Devices the project team was able to align the research objectives with practical constraints and emerging technological opportunities. The strategic measures implemented to overcome obstacles, along with the insights and lessons learned throughout this evolution, have established a robust foundation for future development.

Overall, the iterative nature of this process underscores the importance of adaptive planning, rigorous evaluation, and targeted optimization strategies in the successful execution of complex projects. The refined concept not only addresses the initial challenges but also sets a clear pathway for the subsequent phases of the Diploma Thesis, paving the way for a detailed exploration of each component in the chapters that follow.



## **Part II.**

# **Server**



## 3. Server Hardware

**Author:** Florian Prandstetter

### 3.1. Introduction

The foundation of every server is its hardware. The hardware consists of the physical components that make up the server. It is responsible for the performance, reliability, and scalability of the server.

In this chapter, the different components of a server will be discussed, and the importance of each component will be explained.

### 3.2. Server Components

The main components of a server are the following:

#### 3.2.1. Processor

The Central Processing Unit (CPU) is the brain of the server. It is responsible for executing the instructions of the software.

If the CPU is too slow, the server will not be able to handle the workload, creating a significant bottleneck. However, high-performance CPUs are expensive, so it is important to find the right balance between performance and cost.

In this project, an Intel Core i5-8600K was used. This CPU has 6 cores and a base clock speed of 3.6 GHz, which is sufficient to handle the server's workload.

[tanujasm24 \(2024\) Intel \(n.d.\)](#)

#### 3.2.2. Graphics Processing Unit

The Graphics Processing Unit (GPU) is responsible for rendering images and videos. It is usually used to process images, videos, and other graphical tasks, but it can also be used for AI tasks.

The GPU is much faster than the CPU when it comes to parallel processing. This makes it ideal for AI tasks, which typically involve parallel computations.

In this project, an NVIDIA GeForce RTX 2060 was used. This GPU has 1920 CUDA cores and 6GB of GDDR6 memory, which is sufficient for handling the AI tasks of the server.

[Contributors \(n.d.a\) NVIDIA \(n.d.\)](#)

#### 3.2.3. Random Access Memory

Random Access Memory (RAM) is a type of memory that stores data currently in use. It is much faster than storage memory, but it is also more expensive. The more RAM a server has, the more data it can store and access quickly.

For servers, it is important to have enough RAM to handle the workload. If the server runs out of RAM, it will start using storage memory, which is significantly slower.

For the AI server in this project, 16GB of DDR4 RAM was used. This is sufficient to handle the workload while keeping costs low.

[Contributors \(n.d.c\)](#)

### 3.2.4. Motherboard

The motherboard is the main circuit board of the server. It connects all the components and allows them to communicate with each other.

An important factor when choosing a motherboard is its compatibility with other components. If the motherboard is not compatible with the CPU, GPU, or RAM, the server will not function properly.

To avoid compatibility issues, an H370 motherboard with an Intel socket was used. This motherboard is compatible with the CPU, GPU, and RAM selected for this project.

[Kirvan \(n.d.\)](#)

### 3.2.5. Power Supply

The power supply is responsible for providing power to the server. It converts electricity into the appropriate voltage for the server components.

It is crucial to select a power supply that can handle the server's power requirements. If the power supply is too weak, the server will not function. If it is too strong, it will waste energy.

In this project, a 500W power supply was used. This is sufficient to power the CPU, GPU, and RAM of the server.

[Contributors \(n.d.b\)](#)

### 3.2.6. Storage

To store AI models and data, storage memory is required. Storage memory is much slower than RAM, but it is also much more affordable.

There are different types of storage memory, such as Hard Disk Drives (HDDs) and Solid State Drives (SSDs). SSDs are much faster than HDDs, but they are also more expensive.

In this project, a 512GB NVMe SSD was used. This provides enough storage capacity for AI models.

[IBM \(2024c\)](#)

## 3.3. Conclusion

The hardware of a server is the foundation of its performance, reliability, and scalability. Selecting the right components is essential to building a server that can handle its workload while keeping costs manageable.

The components used in this project are mostly consumer-grade. This keeps costs low while providing adequate performance for the server.

For a production server, it is recommended to use server-grade components. These components are more expensive but offer greater reliability and better performance.

## 4. Server Infrastructure

**Author:** Florian Prandstetter

### 4.1. Introduction

The server infrastructure is the backbone of every IT system. It is responsible for hosting the applications and services that are used by the clients. A well-designed server infrastructure can significantly improve a server's performance. It also ensures that the server is reliable and scalable.

In this chapter, the different components of a server infrastructure will be discussed. The importance of each component will be explained.

### 4.2. Server Infrastructure Components

The main components of the project's server infrastructure are the following:

#### 4.2.1. Server Hardware

The server's hardware consists of the physical components that make up the server. It is explained in more detail in Chapter [3](#).

### 4.2.2. Networking

The networking components of a server infrastructure are responsible for connecting the server to the internet and other devices. This includes routers, switches, and firewalls.

While networking is a broad topic, it is essential to have a basic understanding of how it works to build a server infrastructure. Security is also an important aspect of networking. Firewalls and other security measures are used to protect the server from cyber attacks.

To ensure security and reliability, the server in this project is connected to a secure network. The network is protected by a firewall and other security measures to prevent unauthorized access.

[IBM \(2024a\)](#)

### 4.2.3. Remote Management

Remote management tools are used to monitor and manage the server from a remote location. This is essential for maintaining the server and ensuring that it is running smoothly.

There are different remote management tools available, such as SSH, RDP, and VNC.

The server in this project is managed using SSH. This allows the server administrator to access the server remotely and perform maintenance tasks. To access the server from a different network, a VPN connection is used. This ensures that the connection is secure and encrypted. The tool used for the VPN connection is Tailscale.

[Joos \(2023\) Tailscale \(n.d.\)](#)

#### 4.2.4. Backup and Recovery

Regular backups are essential to ensure that data is not lost in case of a hardware failure or other disaster. There are different backup methods, such as full backups, incremental backups, and differential backups. It is important to have a backup strategy in place to ensure that data can be recovered quickly and efficiently.

The backups for the server in this project are stored on an external hard drive. This hard drive is connected to the server and automatically backs up the data at regular intervals.

#### 4.2.5. Containerization

Containerization is a method of packaging and deploying applications in a lightweight, isolated environment called a container. Containers are portable and can run on any system that supports containerization. This makes it easy to deploy applications and services across different environments.

The server in this project uses Docker for containerization. Docker allows the server administrator to package applications and services in containers and deploy them on the server. This makes it easy to manage and scale the server infrastructure. For a more detailed explanation of Docker, refer to Chapter 8.7.

[IBM \(2024b\)](#)

### 4.3. Conclusion

The server infrastructure is a critical component of any IT system. It is responsible for hosting the applications and services that are used by the clients.

By understanding the different components of a server infrastructure, server administrators can design and implement a robust and reliable server infrastructure that meets the needs of the organization.

In this project, the server infrastructure is designed to be secure and reliable. By using the right hardware, networking components, etc., the server infrastructure can provide the necessary resources and services to support the AI Hub and other applications.

## Part III.

# Theoretical foundations



# 5. Operating System

**Author:** Florian Prandstetter

## 5.1. Introduction

An important part of building an AI Service is to host an API endpoint for all applications to use. To improve the quality of the service, having a flawless and seamless connection with a fast response time is necessary. Having a good foundation to build upon is thus unavoidable to build a strong and secure API endpoint.

This chapter is going to briefly explain what an Operating System (OS) is and its importance. It will also evaluate different options suitable for hosting the AI Server.

## 5.2. What is an Operating System?

An Operating System (OS) acts as an intermediary between the user and the computer hardware, ensuring smooth and efficient operation of the system. It is responsible for managing hardware components such as the CPU, memory, storage devices, and input/output peripherals, allowing users and applications to interact with them seamlessly.

The OS provides essential functions like process management, ensuring that multiple applications can run without conflicts. It also handles memory management by allocating and deallocating memory to different processes. It also prevents unauthorized access to the storage. Additionally, the OS

handles file system management, enabling organized and efficient data storage.

Another key role of the OS is device management, where it communicates with hardware components using device drivers.

Furthermore, Operating Systems provide networking capabilities, enabling connection to local and global networks. They try to ensure a stable and secure connection between devices.

[manjeetks007 \(2024\)](#)

### 5.2.1. Types of Operating Systems

The type of Operating System used is determined by the needs of the user. Different types of Operating Systems use different system architectures to provide varying benefits. Factors like scalability, performance, and reliability have to be considered in choosing a suitable OS.

- **Batch Operating Systems** are designed to handle a large number of processes. They are used to process large amounts of data and to run complex calculations.
  - **Advantages** Multiple users can share the batch system, and it is easy to manage large amounts of traffic.
  - **Disadvantages** The CPU isn't used efficiently. Also, the response time can be slow due to processes being processed one by one.
- **Multi Programming/Time Sharing Operating System** is used to utilize the available resources as efficiently as possible. They allow using multiple programs at the same time, which allows multiple users to share the system. They are often used for servers and also have been used by the development team in the project.
  - **Advantages** Allows multiple users to share the resources. Also, it helps avoid duplicated software.
  - **Disadvantages** There can be problems with reliable data communication.

- **Real-Time Operating System** is used when a very short response time is needed. They are often used on microcontrollers like the ESP32.
  - **Advantages** They utilize the device to its maximum. Fast and reliable memory allocation. They usually are error-free.
  - **Disadvantages** There can only be a limited number of tasks. They also require complex algorithms that can be resource-heavy.

akash1295 (2025)

## 5.3. Kernel

The Kernel is the core of the Operating System. It is responsible for managing the system's resources and providing a bridge between the hardware and software components. The Kernel is responsible for managing the CPU, memory, and input/output devices. It also provides essential services like process management, memory management, and device management. When building an AI Service, the Kernel plays a crucial role in ensuring the system's stability and performance.

ppankaj (2025)

## 5.4. Operating Systems used on the server

To host the required AI service, choosing a suitable Operating System is a crucial part to guarantee a satisfying performance. For the project, multiple users need to access the server simultaneously, so the development team decided to use a Multi Programming OS.

### 5.4.1. Evaluating different Operating Systems

The preferred OS for an AI Server is Linux distributions like Ubuntu or Red Hat. Their open-source nature makes it very easy to customize and integrate AI frameworks.

The Operating Systems that were taken into consideration are Ubuntu Server, Debian, and Red Hat Enterprise.

[Rotich \(2024\)](#)

### Debian

Debian is a good choice for servers due to its stability and security. It is widely used since it has a large package repository and offers long-term support. It also has a large community that provides good documentation and resources. The distribution is well-suited for hosting AI services and provides a good foundation for building and deploying applications.

[Pontikis \(2013\)](#)

### Red Hat Enterprise

Red Hat Enterprise is a commercial Linux distribution. It is the most popular distribution for servers. It comes with a lot of features that are useful for hosting AI services. It is a good choice for companies that need a stable and secure server. It also provides long-term support and has good documentation. The main downside is that it is a commercial distribution and requires a subscription.

[Head \(2024\)](#)

### Ubuntu Server

Ubuntu Server is a popular choice for hosting AI services. It is based on Debian and has a large package repository. It is easy to use and has a large community that provides good documentation and support. It also provides NVIDIA drivers and CUDA support, which is useful for running AI applications that require GPU acceleration.

?

## 5.4.2. Outcome of the Evaluation

After evaluating the different Operating Systems, the development team decided to use Ubuntu Server for hosting the AI Service. The main reason for the decision was the experience of the team with Ubuntu and the easy integration of AI frameworks like TensorFlow and PyTorch. Also, the large community and the good documentation were important factors in the decision. The NVIDIA drivers were also an important factor that played a role in the decision.



# 6. Used Programming Languages

## 6.1. Python

To enhance readability and comprehension, the most widely used libraries are explained in the following sections.

### 6.1.1. MediaPipe

### 6.1.2. Transformers

The Transformers library, developed by Hugging Face, is an open-source Python package that provides implementations of state-of-the-art transformer models. It supports multiple deep learning frameworks, including PyTorch, TensorFlow, and JAX, facilitating seamless integration across various platforms. The library offers access to a vast array of pre-trained models tailored for tasks such as natural language processing, computer vision, and audio analysis. Utilizing these pre-trained models enables researchers and practitioners to achieve high performance in tasks like text classification, named entity recognition, and question answering without the necessity of training models from scratch, thereby conserving computational resources and time ?.

### 6.1.3. JSON

JavaScript Object Notation (JSON) is a lightweight, text-based data interchange format that is easy for humans to read and write, and straightfor-

ward for machines to parse and generate. In Python, the built-in `json` module provides functionalities to serialize Python objects into JSON-formatted strings and deserialize JSON strings back into Python objects. This module supports the conversion of fundamental Python data types, such as dictionaries, lists, strings, integers, and floats, into their corresponding JSON representations. The `json` module is indispensable for tasks involving data exchange between Python applications and external systems, particularly in web development contexts where JSON is a prevalent format for client-server communication [Foundation \(2025\)](#).

### Gabriels Part

## 6.2. HTML, CSS, and JavaScript in Combination with Vue.js

In this project, the languages HTML, CSS, and JavaScript were used in conjunction with Vue.js to create an interactive and dynamic user experience. For more information about Vue.js, see Chapter ??, Section "Vue.js."

### 6.2.1. HyperText Markup Language (HTML)

HyperText Markup Language (HTML) is the standard markup language for creating and structuring content on the web. It serves as the backbone of web pages by organizing content through elements represented by tags. Key features of HTML include:

- **Structure Definition:** Tags such as `<html>`, `<head>`, and `<body>` define the structural hierarchy of a web page.
- **Content Organization:** Elements like headings, paragraphs, links, images, and tables provide a clear and user-friendly layout.
- **Web Compatibility:** HTML is universally supported, ensuring seamless integration across browsers and devices.

As one of the core technologies of the World Wide Web, alongside CSS and JavaScript, HTML enables the creation of interactive and visually appealing websites. Its simplicity and adaptability make it an essential tool for web development.

[HTML - Wikipedia \(2001\)](#)

### 6.2.2. Cascading Style Sheets (CSS)

Cascading Style Sheets (CSS) is a style sheet language designed to control the visual presentation of web pages. CSS enhances the user experience by allowing developers to define the look and feel of a website. Key functionalities of CSS include:

- **Design Customization:** Control over layout, colors, fonts, and spacing for a cohesive visual identity.
- **Responsive Design:** Ensures consistent and optimized appearance across different devices and screen sizes.
- **Cascading Rules:** Allows styles to be applied at element, class, or global levels, offering flexibility in design.

As a foundational technology of the web, CSS plays a vital role in creating modern, responsive, and aesthetically pleasing websites.

[to Wikimedia projects \(2001a\)](#)

### 6.2.3. JavaScript

JavaScript is a high-level programming language used to add interactivity and dynamic content to web pages. It works seamlessly alongside HTML and CSS to create rich and engaging user experiences. Key features of JavaScript include:

- **Dynamic Content:** Enables animations, form validation, and real-time updates.

- **Client and Server-Side Usage:** Runs in web browsers via JavaScript engines and supports server-side applications through platforms like Node.js.
- **Extensive Ecosystem:** Offers libraries, frameworks, and tools for building feature-rich web applications.

JavaScript's flexibility and versatility have established it as a cornerstone of web development, making it essential for developing interactive and responsive applications.

[to Wikimedia projects \(2001b\)](#)

### 6.2.4. Vue.js

Vue.js is a progressive, open-source JavaScript framework that provides a robust foundation for the development of sophisticated user interfaces and single-page applications. By leveraging standard web technologies—namely HTML, CSS, and JavaScript—Vue.js streamlines the development process through its intuitive and adaptable architecture. Its key attributes include:

- **Component-Based Architecture:** Facilitates modular development by enabling the creation of reusable components that encapsulate both data and functionality.
- **Reactivity System:** Automatically synchronizes the Document Object Model (DOM) with underlying data changes, ensuring a dynamic and responsive user interface.
- **Directives and Template Syntax:** Employs a declarative approach to simplify data binding and event handling.
- **Vue CLI:** Offers a comprehensive command-line interface for project scaffolding, build configuration, and plugin management.
- **Vue Router and Vuex:** Integrates official libraries for client-side routing and state management, thereby enhancing scalability and maintainability.
- **Vibrant Community Support:** Benefits from an active ecosystem that provides extensive documentation, tutorials, and a wide range of third-party plugins.

- **Performance Optimization:** Utilizes a Virtual DOM and efficient rendering algorithms to optimize performance, even in complex applications.
- **Enhanced Developer Experience:** Incorporates developer-centric tools such as Vue Devtools and an intuitive CLI to boost productivity and simplify debugging.

In summary, Vue.js equips developers with the necessary tools to efficiently construct interactive and feature-rich web applications, making it a widely adopted framework in contemporary web development ?.

## 6.3. Type Script

TypeScript is a superset of JavaScript that adds static type definitions to the language. It is designed for the development of large-scale applications and transcompiles to JavaScript. JavaScript is not very strict when it comes to types. This can lead to issues during development. Typescript adds a type system to JavaScript, which can help to catch errors early in the development process.

?

### 6.3.1. Axios

Axios is the key library used to make HTTP request from the frontend to the backend. It is a promise-based HTTP client for the browser and Node.js. It is used to make asynchronous requests to a server, and it returns a promise that resolves with the response data.

[Axios Docs \(2025\)](#)

Flos Part



## Part IV.

# Implementation of Large Language Models



## 7. Overview and Integration of Large Language Models

**Author:** Luna P. I. Schätzle

For the Diploma thesis, there are many different AI models that are in use, such as:

- LLMs (Large Language Models)
- Diffusion Models (Models that are used to create images)
- Object Detection Models (Models that are used to detect objects in images)
- Face Recognition Models (Models that are used to recognize and identify faces in images or videos)
- Speech Recognition Models (Models that are used to recognize and transcribe speech)
- Speech Synthesis Models (Models that are used to generate human-like speech)
- Translation Models (Models that are used to translate text from one language to another)

In the following chapters, the different Types and the used models will be explained in more detail.

### 7.1. Large Language Models (LLMs)

Large Language Models (LLMs) represent a significant advancement in artificial intelligence, enabling machines to process and generate natural language. LLMs are built on the concept of deep learning, utilizing neural

networks with billions of parameters to understand and generate text in a contextually accurate and coherent manner. These models are trained on vast datasets encompassing diverse topics, allowing them to handle a wide range of tasks, such as translation, summarization, content generation, and conversational AI.

### Key Characteristics of LLMs

- **Scale and Complexity:** LLMs are distinguished by their immense size, often containing billions of parameters, enabling them to capture intricate patterns in language.
- **Transfer Learning:** These models benefit from pretraining on large datasets, followed by fine-tuning for specific tasks, making them highly versatile.
- **Contextual Understanding:** LLMs excel at understanding context, which allows them to generate coherent and contextually appropriate responses.
- **Multilingual Capabilities:** Many LLMs are trained on datasets in multiple languages, enabling them to process and generate text in various languages.

### Applications of LLMs

- Text summarization and paraphrasing.
- Question answering and information retrieval.
- Conversational agents and chatbots.
- Code generation and debugging assistance.
- Creative writing, including story and poetry generation.

### Examples of Popular LLMs

- **GPT Models:** Developed by OpenAI, these models include GPT-3, GPT-4, and ChatGPT, known for their state-of-the-art performance in text generation and comprehension.

- **BERT (Bidirectional Encoder Representations from Transformers):** Developed by Google, BERT focuses on understanding context by analyzing text bidirectionally.
- **LLama Models:** Created by Meta, these models are designed for efficient natural language understanding and generation.
- **Mistral Models:** Aimed at specialized tasks with high precision and multilingual capabilities.

#### Advantages and Challenges of LLMs    Advantages:

- High accuracy in generating and understanding text.
- Adaptability to a variety of domains and languages.
- Ability to process complex and context-rich queries.

#### Challenges:

- High computational and memory requirements.
- Potential biases due to the training data.
- Difficulty in maintaining factual accuracy in generated content.

IBM (n.d.)

## 7.2. Utilized Large Language Models

In the context of this diploma thesis, various free and commercial large language models (LLMs) were evaluated to determine their suitability for integration. Leveraging the Ollama application, we were able to test and compare several LLMs. Additionally, we explored different ChatGPT models available through the OpenAI API. OpenAI offers a range of models that vary in terms of size and complexity, with more advanced models incurring higher usage costs. *Overview - OpenAI API (n.d.a)*

## 7.3. Ollama Application Overview

The Ollama application is an advanced, locally hosted platform designed to provide a versatile environment for deploying and interacting with a wide array of artificial intelligence models. It offers a comprehensive solution for both text and image processing tasks, facilitating the integration, fine-tuning, and management of models in a secure and scalable manner. [Ankush \(2024\)](#)

### 7.3.1. Ollama Features

Ollama is distinguished by several key features that enhance its functionality and usability:

- **Multi-Model Support:** The platform supports a variety of AI models, each optimized for specific tasks such as natural language processing and image analysis.
- **Local API Hosting:** The API is hosted on a local server, ensuring rapid and secure processing of requests while maintaining full control over data.
- **Image Processing Capabilities:** In addition to textual data, certain models within Ollama are capable of processing images. These models can analyze visual content, thereby extending the application's utility.
- **Model Customization and Fine-Tuning:** Users can fine-tune existing models to suit their specific needs. Once customized, these models can be re-uploaded to the Ollama server, allowing for continuous improvement and adaptation.

### 7.3.2. Ollama Architecture

The architecture of Ollama is modular and designed to support high performance and scalability:

1. **Model Management Layer:** This layer is responsible for deploying, fine-tuning, and updating the various AI models. It provides a structured approach to manage model versions and customizations.
2. **API Service Layer:** Hosted locally, this layer facilitates communication between client applications and the AI models. It exposes endpoints for both text and image processing, ensuring secure and efficient data exchange.
3. **Integration Interfaces:** These interfaces enable seamless connectivity with external services and applications, promoting interoperability and flexibility in diverse operational environments.

This layered design supports efficient resource management while enabling rapid response times and scalability to handle increasing user demands.

### 7.3.3. Ollama Models

Ollama provides a diverse selection of models, each tailored to specific application domains:

- **Text Generation Models:** Optimized for tasks such as dialogue generation, summarization, and other natural language processing applications.
- **Image Analysis Models:** Developed for image recognition, generation, and related tasks.

Furthermore, the platform allows users to fine-tune these models based on their particular requirements. Customized models can be re-uploaded to the server, enabling a continuous cycle of refinement and performance enhancement.

### 7.3.4. Ollama API

The Ollama API is the primary interface through which client applications interact with the hosted models. It provides robust and secure endpoints for processing both textual and visual data:

- **Data Exchange:** The API facilitates structured data exchange between client applications and the backend, ensuring that requests and responses are handled efficiently.
- **Security and Performance:** Designed with stringent security protocols, the API ensures that all interactions are encrypted and managed in a way that maximizes performance while minimizing latency.
- **Extensibility:** The API's modular design allows for the easy addition of new endpoints and functionalities as the platform evolves.

### 7.3.5. Ollama Integration

Integrating the Ollama API into external applications is straightforward. For instance, a Python-based client can send HTTP requests to the API to perform tasks such as generating text or processing images. This section is further elaborated in the chapter dedicated to the hosted Flask Service, where detailed examples and implementation guidelines are provided. In brief, the integration involves:

- Establishing a connection to the local API endpoint.
- Sending appropriately formatted requests (e.g., JSON payloads) that include user inputs.
- Handling responses from the API, which may include generated text or URLs to processed images.

### 7.3.6. Benefits and Challenges of Ollama

Ollama presents several benefits:

- **Ease of Use:** The platform is user-friendly, with intuitive APIs that simplify deployment and integration.
- **Versatility:** A wide array of models enables the application of Ollama to diverse tasks, from natural language processing to image analysis.
- **Multilingual Support:** The models are capable of processing multiple languages, thereby broadening the scope of potential applications.

- **Customization:** Users can fine-tune models to meet specific needs and update them on the server, ensuring tailored performance.

However, several challenges must be addressed:

- **Performance Limitations:** Larger models may experience slower response times due to higher computational demands.
- **API Request Management:** Ensuring that the API can handle a high volume of requests efficiently requires robust load balancing and error handling mechanisms.
- **Model Management Complexity:** Coordinating updates, fine-tuning, and deployment of multiple models demands an effective management strategy.
- **Concurrency:** Managing simultaneous user requests, as discussed in the chapter on the hosted Flask Service, is critical to maintaining system performance under high load.

In summary, while Ollama offers a flexible and powerful platform for AI model deployment and interaction, addressing its inherent challenges is crucial for optimizing performance and ensuring long-term scalability in practical applications.

*A Comprehensive Guide to Ollama - Cohorte Projects (n.d.)*

## 7.4. Evaluation of Models via the Ollama Platform

In this project, we conducted an evaluation of various models accessible through the Ollama application, which are available for download from the Ollama server.

Given that Ollama operates locally, it was imperative to select models that align with specific criteria to ensure optimal performance. Consequently, we assessed models of diverse sizes and complexities to determine their suitability for local deployment. This evaluation encompassed both the efficacy and efficiency of the models within a local environment.

*Ollama (n.d.a)*

### 7.4.1. Model Selection Criteria

The selection of models was guided by the following criteria:

- **Model Size:** The model must be capable of running on the server without exceeding available memory capacity.
- **Performance Speed:** The response time of the model, i.e., how quickly it can generate output.
- **Complexity:** The model's ability to handle complex prompts and generate coherent, contextually accurate text.
- **Accuracy:** The overall precision of the model's responses, particularly in terms of factual correctness and linguistic quality.
- **Language Support:** The model's proficiency in understanding and generating text in multiple languages, particularly English and German.
- **User Experience:** The model's overall usability and user-friendliness, including ease of integration and customization.

There is often a trade-off between these criteria. Larger models tend to exhibit higher accuracy and greater contextual understanding but are generally slower and require more computational resources.

### 7.4.2. Challenges in Model Testing and Updates

One significant challenge lies in the rapid development and frequent release of new models, which complicates the process of continuous integration and comprehensive evaluation of recent advancements. Regular testing and updates are imperative to ensure the incorporation of state-of-the-art models while maintaining system reliability and relevance.

Another challenge involves achieving an optimal balance between performance, accuracy, and resource efficiency, ensuring that the chosen model meets the application's functional requirements without compromising the overall user experience.

During the evaluation process, we encountered several obstacles. For instance, identifying standardized questions that could be uniformly answered

by all models proved challenging. Some smaller models demonstrated limitations in addressing certain questions comprehensively. Additionally, specialized models, while excelling in niche areas, often lacked the ability to provide detailed answers across a broader range of topics.

For the final evaluation phase, we employed a diverse question set consisting of self-crafted questions, publicly available questions from online sources, and queries generated by ChatGPT-4 to ensure a comprehensive assessment covering a wide spectrum of queries.

### 7.4.3. Model Selection for the Final Application

In the final implementation, users are provided with a curated list of recommended models from which they can select their preferred option. This list was carefully compiled based on our comprehensive testing and reflects the models that demonstrated the best balance between performance, accuracy, and resource efficiency.

For the production version of the application, this list must be updated periodically to include newly released models and maintain optimal performance.

## 7.5. Ollama Model Testing and Evaluation

Based on the following criteria, we conducted an extensive evaluation of the upcoming models:

### 7.5.1. Quantitative Evaluation Methods

For the quantitative evaluation, we focused on key performance metrics to assess the efficiency and reliability of each model:

- **Response Time:** The time taken by the model to generate a response after receiving input.

- **CPU Usage:** The percentage of CPU resources utilized during model execution.
- **GPU Usage:** The extent to which GPU resources were leveraged to enhance performance.
- **Memory Usage:** The amount of RAM consumed while the model was running.
- **Multiple Choice Question Answering:** The accuracy of the model when answering structured multiple-choice questions.

### 7.5.2. Qualitative Evaluation Methods

While qualitative evaluation is inherently resource-intensive due to its reliance on human judgment, it remains essential for assessing aspects that cannot be fully captured through quantitative metrics. Consequently, although our primary focus was on quantitative evaluation, we conducted qualitative assessments for key criteria where human input was indispensable:

- **Translation Quality:** Evaluated using the BLEU (Bilingual Evaluation Understudy) score, which measures the similarity between the model-generated translation and a human reference translation. [to Wikimedia projects \(2006\)](#)
- **Text Generation Quality:** Assessed through the ROUGE (Recall-Oriented Understudy for Gisting Evaluation) score, which quantifies the lexical overlap between generated text and reference texts.
- **Grammatical Accuracy:** Manually reviewed by human evaluators to identify grammatical errors and assess syntactic correctness.
- **Readability:** Measured using the Flesch Reading Ease score, which indicates the complexity and accessibility of the generated text.
- **Sentiment Polarity:** Analyzed to determine whether the generated text conveys a positive, negative, or neutral sentiment.

[Santhosh \(2023\)](#)

By integrating both quantitative and qualitative evaluation methods, we achieved a more comprehensive understanding of each model's strengths

and weaknesses, allowing for a well-rounded assessment of their performance.

### 7.5.3. Models Evaluated During Testing

For the evaluation process, we selected some of the most popular models available in the Ollama application and conducted extensive testing on each. The models vary in size, specialization, and intended use cases, covering general-purpose, coding, mathematical, reasoning, and image-processing tasks.

- **qwen2.5-coder:0.5b** – A compact model with 0.5 billion parameters, specifically designed for coding-related tasks.
- **qwen2.5-coder:7b** – A small-scale model with 7 billion parameters, optimized for software development and code generation.
- **qwen2.5-coder:14b** – A mid-sized model with 14 billion parameters, tailored for complex coding tasks.<sup>7</sup>
- **qwen2-math** – A specialized model with 1 billion parameters, fine-tuned for mathematical computations.
- **llama3.2:1b** – A lightweight model with 1 billion parameters, designed by Meta for general-purpose applications.
- **llama3.2:2b** – A medium-sized model with 2 billion parameters, developed by Meta for a broader range of general-purpose tasks.
- **mistral:7b** – A versatile 7-billion-parameter model created by Mistral AI, a European AI company, for general applications.
- **mathstral** – A specialized model optimized for mathematical problem-solving, developed by Mistral AI.
- **phi4:14b** – A mid-sized model with 14 billion parameters, designed by Microsoft for general-purpose reasoning tasks.
- **deepseek-r1:1.5b** – A small-scale model with 1.5 billion parameters, featuring enhanced reasoning capabilities.
- **deepseek-r1:7b** – A 7-billion-parameter model optimized for reasoning tasks, offering a balance between performance and hardware compatibility.
- **deepseek-r1:14b** – A more powerful variant with 14 billion parameters, fine-tuned for complex reasoning tasks.

- **gemma2** – A lightweight model with 1 billion parameters, designed by Google for general-purpose applications.
- **llava:13b** – A large-scale model with 13 billion parameters, developed for image processing tasks by a dedicated research team. [Liu et al. \(2023\)](#)

*Ollama (n.d.b)*

#### 7.5.4. Data Collection

For the Data collection we used the School AI Server which was provided by the HTL Anichstraße, to run the different models in the Evaluation phase. For the later Data collection we used our own Server to run the different models.

To collect the data we used different python scripts. For the quantitative data we used the following python script:

```

1 import time
2 import json
3 import psutil # For CPU, memory usage
4 from ollama import chat
5
6 # Prompts for testing
7 prompts = [
8     "Explain the theory of relativity in simple terms.",
9     "Create a short story about a knight.",
10    "What are the advantages of open-source projects?",
11    "Write a Python function that outputs prime numbers up to 100.",
12    "# ..."
13]
14
15 # Model name
16 model_name = "qwen2-math"
17
18 # Store results
19 results = []
20
21 # Function to get GPU usage if available
22 def get_gpu_usage():
23     try:
24         import torch
25         if torch.cuda.is_available():
26             gpu_memory = torch.cuda.memory_allocated() / (1024 ** 2) # Convert to MB
27             gpu_utilization = torch.cuda.utilization(0) if hasattr(torch.cuda, 'utilization') else
28                 "N/A"
29             return gpu_memory, gpu_utilization
30         else:
31             return 0, "No GPU detected"
32     except ImportError:
33         return 0, "torch not installed"
34
35 # Loop through prompts
36 for prompt in prompts:
37     try:
38         # Measure system usage before model execution
39         cpu_before = psutil.cpu_percent(interval=None)

```

```

39     memory_before = psutil.virtual_memory().used / (1024 ** 2) # Convert to MB
40
41     start_time = time.time()
42     # Ollama chat request
43     response = chat(model=model_name, messages=[{'role': 'user', 'content': prompt}])
44     end_time = time.time()
45
46     latency = end_time - start_time
47
48     # Measure system usage after model execution
49     cpu_after = psutil.cpu_percent(interval=None)
50     memory_after = psutil.virtual_memory().used / (1024 ** 2) # Convert to MB
51
52     cpu_usage = cpu_after - cpu_before
53     memory_usage = memory_after - memory_before
54     gpu_memory_usage, gpu_utilization = get_gpu_usage()
55
56     # Extract content from the Message object
57     if response and hasattr(response["message"], "content"):
58         response_text = response["message"].content # Accessing the attribute of the Message
59         object
60     else:
61         response_text = "No content returned or unexpected format"
62
63     print(f"Prompt: {prompt}\nResponse Time: {latency:.2f} seconds\n")
64
65     # Save the result
66     results.append({
67         "Prompt": prompt,
68         "Response Time (seconds)": latency,
69         "Response": response_text,
70         "CPU Usage (%)": cpu_usage,
71         "Memory Usage (MB)": memory_usage,
72         "GPU Memory Usage (MB)": gpu_memory_usage,
73         "GPU Utilization (%)": gpu_utilization
74     })
75 except Exception as e:
76     print(f"Error with prompt '{prompt}': {e}")
77     results.append({
78         "Prompt": prompt,
79         "Response Time (seconds)": "Error",
80         "Response": f"Error: {str(e)}",
81         "CPU Usage (%)": "N/A",
82         "Memory Usage (MB)": "N/A",
83         "GPU Memory Usage (MB)": "N/A",
84         "GPU Utilization (%)": "N/A"
85     })
86
87     # Save to JSON file
88     json_file_name = model_name + "_response_time_results_ressours_usage.json"
89     with open(json_file_name, "w") as file:
90         json.dump(results, file, indent=4)
91
92     print(f"The results have been saved in {json_file_name}.")

```

Listing 7.1: Python-quantitative-data-collection

In this Python script, ChatGPT was employed as an auxiliary tool to facilitate the integration of the psutil library for monitoring CPU and memory usage. Additionally, ChatGPT assisted in generating supplementary questions to enhance the data collection process. The resulting data were subsequently stored in JSON format for later analysis. However, a significant challenge was encountered: the Torch libraries did not function properly on the school AI server, which prevented the collection of GPU usage data for the models.

## Used python libraries

### psutil libarie

The psutil library is a Python module that provides an interface for retrieving information on system utilization, including CPU, memory, disk, network, and processes. It is commonly used for monitoring and managing system performance and is highly efficient due to its low overhead. psutil is cross-platform, supporting major operating systems like Windows, Linux, and MacOS. It enables developers to create scripts for system diagnostics, process control, and resource management, making it an essential tool for performance optimization and system administration in Python-based projects.

[psutil · PyPI \(2024\)](#)

### Ollama

The ollama library is a Python package designed to provide a seamless interface for interacting with the Ollama application. It allows users to easily access and leverage various AI models for natural language processing tasks. By simplifying the integration of AI models into Python applications, the library supports a wide range of functionalities, making it an efficient tool for developing AI-powered solutions.

[ollama/ollama-python: Ollama Python library \(n.d.\)](#)

### 7.5.5. Data Preparation

To get more information about the collected data, we used the following Python script to collect more data:

```

1 import json
2 import os
3 from nltk.translate.bleu_score import sentence_bleu, SmoothingFunction
4 from rouge_score import rouge_scorer
5 import language_tool_python
6 import textstat
7 from transformers import pipeline, logging
8
9 # Suppress warning messages from the Transformer library for a cleaner output.
10 logging.set_verbosity_error()
11
12 def load_json(file_path):
13     """
14         Load and parse JSON data from a file.

```

```

15 Parameters:
16     file_path (str): The file system path to the JSON file.
17
18 Returns:
19     dict or list: The JSON data parsed from the file.
20 """
21
22 with open(file_path, 'r') as file:
23     return json.load(file)
24
25 def calculate_metrics(data):
26 """
27 Compute multiple evaluation metrics for generated text responses.
28
29 For each data item, the function calculates:
30 - BLEU Score: Quantifies the similarity between the generated response and the reference text.
31 - ROUGE Scores: Evaluates the n-gram overlap between the reference and the generated text,
32     using ROUGE-1, ROUGE-2, and ROUGE-L.
33 - Grammar Check: Determines the number of grammatical errors present in the response.
34 - Readability Score: Computes the Flesch Reading Ease score to assess the text's readability.
35 - Sentiment Analysis: Infers the sentiment polarity (e.g., positive or negative) of the
36     response text.
37
38 Parameters:
39     data (list): A list of dictionaries, each containing 'Prompt', 'Response', and 'Reference'
40         keys.
41
42 Returns:
43     list: A list of dictionaries that include the original text elements along with the
44         computed metrics.
45 """
46 results = []
47 rouge = rouge_scorer.RougeScorer(['rouge1', 'rouge2', 'rougeL'], use_stemmer=True)
48 grammar_tool = language_tool_python.LanguageTool('en-US')
49 sentiment_analyzer = pipeline(
50     'sentiment-analysis',
51     model="distilbert-base-uncased-finetuned-sst-2-english",
52     truncation=True,
53     max_length=512
54 )
55
56 for item in data:
57     prompt = item['Prompt']
58     response = item['Response']
59     reference = item['Reference']
60
61     try:
62         # Calculate the BLEU Score with smoothing to address potential issues with short
63         # sequences.
64         bleu_score = sentence_bleu(
65             [reference.split()], response.split(),
66             smoothing_function=SmoothingFunction().method4
67         )
68
69         # Calculate ROUGE Scores for comprehensive n-gram overlap assessment.
70         rouge_scores = rouge.score(reference, response)
71
72         # Perform grammatical analysis by counting detected errors in the response.
73         grammar_errors = len(grammar_tool.check(response))
74
75         # Determine the readability score using the Flesch Reading Ease metric.
76         readability_score = textstat.flesch_reading_ease(response)
77
78         # Analyze the sentiment of the response text, with error handling to capture any
79         # exceptions.
80         try:
81             sentiment_result = sentiment_analyzer(response)[0]
82             sentiment = sentiment_result['label']
83         except Exception as e:
84             print(f"Sentiment error for prompt '{prompt}': {e}")
85             sentiment = "Error"
86
87         results.append({
88             "Prompt": prompt,
89             "Response": response,
90             "Reference": reference,
91             "BLEU": bleu_score,
92             "ROUGE": rouge_scores,
93             "Grammar Errors": grammar_errors,
94             "Readability": readability_score,
95             "Sentiment": sentiment
96         })
97
98     except Exception as e:
99         print(f"Error processing item {item}: {e}")
100
101 return results

```

```

84         "Reference": reference,
85         "BLEU": bleu_score,
86         "ROUGE-1": rouge_scores['rouge1'].fmeasure,
87         "ROUGE-2": rouge_scores['rouge2'].fmeasure,
88         "ROUGE-L": rouge_scores['rougeL'].fmeasure,
89         "Grammar Errors": grammar_errors,
90         "Readability Score": readability_score,
91         "Sentiment": sentiment
92     })
93 except Exception as e:
94     print(f"Error processing prompt '{prompt}': {e}")
95     results.append({
96         "Prompt": prompt,
97         "Response": response,
98         "Reference": reference,
99         "Error": str(e)
100    })
101
102 return results
103
104 def save_results(results, output_path):
105     """
106     Persist the computed metrics to a JSON file.
107
108     Parameters:
109         results (list): A list of dictionaries containing evaluation metrics and corresponding
109                         texts.
110         output_path (str): The file system path where the output JSON should be saved.
111     """
112     with open(output_path, 'w') as file:
113         json.dump(results, file, indent=4)
114
115 def main():
116     """
117     Execute the main workflow of the script.
118
119     This function prompts the user to specify a directory containing preprocessed JSON files.
120     It then iterates through each file that matches the pattern 'processed_*.json',
121     computes the evaluation metrics for the contained data,
122     and saves the results in a new JSON file prefixed with 'scored_'.
123
124     directory = input("Enter the directory containing the processed JSON files: ")
125
126     try:
127         for file_name in os.listdir(directory):
128             if file_name.startswith("processed_") and file_name.endswith(".json"):
129                 input_file = os.path.join(directory, file_name)
130                 model_name = file_name.split("processed_")[1].split(".json")[0]
131                 output_file = os.path.join(directory, f"scored_{model_name}.json")
132
133                 print(f"Processing file: {input_file}")
134                 data = load_json(input_file)
135                 metrics = calculate_metrics(data)
136                 save_results(metrics, output_file)
137                 print(f"Metrics saved to: {output_file}")
138
139     except FileNotFoundError:
140         print(f"Error: The directory {directory} was not found.")
141     except Exception as e:
142         print(f"An error occurred: {e}")
143
144 if __name__ == "__main__":
145     main()

```

Listing 7.2: Python-data-preperation-for-analysis

This Python script implements a comprehensive evaluation framework for assessing the quality of generated textual responses. It systematically processes JSON files containing a prompt, a generated response, and a reference text, computing several quantitative metrics: the BLEU score for

assessing n-gram overlap, ROUGE metrics for evaluating text similarity, a grammatical error count via LanguageTool, the Flesch Reading Ease score for readability, and sentiment analysis using a Transformer-based model. By integrating these diverse analytical techniques from state-of-the-art natural language processing libraries, the script facilitates a rigorous and multifaceted scientific evaluation of text generation performance.

### Utilized Python Libraries

For Collecting those data we used the following Python Libraries:

**Natural Language Toolkit (NLTK)** The Natural Language Toolkit (NLTK) is a comprehensive library for natural language processing in Python. It provides easy-to-use interfaces to over 50 corpora and lexical resources, along with a suite of text processing libraries for classification, tokenization, stemming, tagging, parsing, and semantic reasoning. NLTK is widely used for building Python programs that work with human language data and is a leading platform in both research and education [Bird et al. \(2025\)](#).

**ROUGE Score** The `rouge-score` library is a native Python implementation of the ROUGE metric, which is commonly used for evaluating automatic summarization and machine translation. It replicates the results of the original Perl package and supports the computation of ROUGE-N (N-gram) and ROUGE-L (Longest Common Subsequence) scores. The library also offers functionalities such as text normalization and the use of stemming to enhance evaluation accuracy [Research \(2025\)](#).

**LanguageTool Python** `language-tool-python` is a wrapper for LanguageTool, an open-source grammar, style, and spell checker. This library enables the integration of LanguageTool's proofreading capabilities into Python applications, supporting the detection and correction of grammatical errors, stylistic issues, and spelling mistakes across multiple languages.

**Textstat** The textstat library provides simple methods for calculating readability statistics from text. It helps determine the readability, complexity, and grade level of textual content by computing various metrics such as the Flesch Reading Ease, SMOG Index, and Gunning Fog Index. These metrics are valuable for assessing and ensuring the comprehensibility of text, particularly in educational and professional settings [Bansal & Aggarwal \(2025\)](#).

### 7.5.6. Data Processing

To gain a better understanding of the collected data, we utilized Python scripts to generate visualizations, providing a clearer representation of the results. Additionally, the processed data was formatted into a LaTeX table to facilitate structured analysis and comparison.

#### Quantitative Data Analysis

To visualize the quantitative data, we employed the following Python script:

```

1 import pandas as pd
2 import matplotlib.pyplot as plt
3 import seaborn as sns
4 import glob
5 import numpy as np
6 import os
7 import logging
8
9 # Set up logging for consistent error and information messages.
10 logging.basicConfig(level=logging.INFO, format='%(levelname)s: %(message)s')
11
12 # Set scientific plotting style with an increased default figure height.
13 plt.style.use('default')
14 sns.set_theme(style="whitegrid", context="paper")
15 plt.rcParams.update({
16     # Here are all the params for the settings for matplotlib
17 })
18
19 def load_and_process_data() -> pd.DataFrame:
20     """
21     Loads and processes all JSON files in the current directory.
22
23     This function searches for all files matching "*.json", reads them into pandas DataFrames,
24     assigns a 'Model' column based on the file name (without extension), converts specified
25     numeric columns to numeric type, and removes rows with missing values in those columns.
26
27     Returns:
28         pd.DataFrame: A concatenated and cleaned DataFrame containing all data.
29     """
30     json_files = glob.glob("*.json")
31     if not json_files:
32         logging.warning("No JSON files found in the current directory.")

```

```

33         return pd.DataFrame()
34
35     dfs = []
36     for file in json_files:
37         try:
38             model_name = os.path.splitext(file)[0]
39             df = pd.read_json(file)
40             df['Model'] = model_name
41             dfs.append(df)
42         except Exception as e:
43             logging.error(f"Error loading {file}: {e}")
44
45     if not dfs:
46         logging.error("No data could be loaded from the JSON files.")
47     return pd.DataFrame()
48
49     combined_df = pd.concat(dfs, ignore_index=True)
50
51     # Convert selected columns to numeric and drop rows with missing values in these columns.
52     numeric_cols = ['Response Time (seconds)', 'CPU Usage (%)', 'Memory Usage (MB)']
53     combined_df[numeric_cols] = combined_df[numeric_cols].apply(pd.to_numeric, errors='coerce')
54     combined_df = combined_df.dropna(subset=numeric_cols)
55
56     return combined_df
57
58 def create_resource_plot(df: pd.DataFrame, metric: str, title: str, ylabel: str, filename: str)
59     """"
60     Creates a resource usage plot with violin and strip plots, annotated with statistical
61     measures.
62
63     The function generates a violin plot for the given metric across different AI models,
64     overlays a strip plot
65     to display individual data points, and annotates each model with its median and mean absolute
66     deviation (MAD).
67     The resulting plot is saved in both PDF and PNG formats.
68
69     Parameters:
70         df (pd.DataFrame): DataFrame containing the metric and 'Model' columns.
71         metric (str): The column name representing the metric to be visualized.
72         title (str): The title of the plot.
73         ylabel (str): The label for the y-axis.
74         filename (str): Base filename used for saving the plot.
75     """
76     plt.figure(figsize=(10, 10))
77
78     ax = sns.violinplot(
79         x='Model',
80         y=metric,
81         data=df,
82         inner='quartile',
83         palette='muted',
84         cut=0
85     )
86
87     sns.stripplot(
88         x='Model',
89         y=metric,
90         data=df,
91         color="#303030",
92         size=2.5,
93         alpha=0.7
94     )
95
96     # Calculate median and mean absolute deviation (MAD) for each model.
97     stats = df.groupby('Model')[metric].agg(median='median', mad=lambda x: np.mean(np.abs(x -
98         x.median())))
99
100    # Annotate each model with the calculated median and MAD.
101    for tick, model in enumerate(stats.index):
102        model_stats = stats.loc[model]
103        annotation = f"Med: {model_stats['median']:.1f}\nMAD: {model_stats['mad']:.1f}"
104        # Position annotation at 5% above the minimum value.
105        y_pos = df[metric].min() + (df[metric].max() - df[metric].min()) * 0.05
106        ax.text(

```

```

103         xtick,
104         y_pos,
105         annotation,
106         ha='center',
107         va='bottom',
108         fontsize=8,
109         color='#404040'
110     )
111
112     plt.title(title, pad=15)
113     plt.xlabel('AI Model', labelpad=12)
114     plt.ylabel(ylabel, labelpad=12)
115     plt.xticks(rotation=45, ha='right')
116     plt.ylim(bottom=0)
117     plt.tight_layout()
118
119     # Save the plot in both vector (PDF) and raster (PNG) formats.
120     plt.savefig(f'{filename}.pdf', bbox_inches='tight')
121     plt.savefig(f'{filename}.png', bbox_inches='tight')
122     plt.close()
123
124 def plot_cpu_memory_comparison(df: pd.DataFrame) -> None:
125     """
126         Generates comparative plots for CPU usage and memory consumption across AI models.
127
128         This function calls 'create_resource_plot' for both CPU and Memory metrics.
129
130         Parameters:
131             df (pd.DataFrame): DataFrame containing performance metrics.
132
133         create_resource_plot(
134             df=df,
135             metric='CPU Usage (%)',
136             title='Comparative Analysis of CPU Utilization Across AI Models',
137             ylabel='CPU Usage (%)',
138             filename='model_cpu_usage_comparison'
139         )
140
141         create_resource_plot(
142             df=df,
143             metric='Memory Usage (MB)',
144             title='Comparative Analysis of Memory Consumption Across AI Models',
145             ylabel='Memory Usage (MB)',
146             filename='model_memory_usage_comparison'
147         )
148
149 def generate_advanced_statistics(df: pd.DataFrame) -> None:
150     """
151     Generates advanced performance statistics for AI models and outputs the results both in the
152     console and as a LaTeX table.
153
154     The statistics include mean, standard deviation, and maximum values for CPU and memory usage,
155     as well as mean and standard deviation for response times.
156
157     Parameters:
158         df (pd.DataFrame): DataFrame containing performance metrics.
159
160         stats = df.groupby('Model').agg({
161             'CPU Usage (%)': ['mean', 'std', 'max'],
162             'Memory Usage (MB)': ['mean', 'std', 'max'],
163             'Response Time (seconds)': ['mean', 'std']
164         })
165
166         print("\nAdvanced Performance Statistics:")
167         print(stats.round(2).to_string())
168
169         # Export the statistics as a formatted LaTeX table.
170         try:
171             latex_str = stats.style.format({
172                 ('CPU Usage (%)', 'mean'): "{:.1f}",
173                 ('Memory Usage (MB)', 'mean'): "{:.1f}"
174             }).to_latex(
175                 hrules=True,
176                 caption="Model Performance Statistics",
177                 label="tab:model_stats"
178

```

```

177         )
178         with open('resource_stats.tex', 'w') as f:
179             f.write(latex_str)
180     except Exception as e:
181         logging.error(f"Error generating LaTeX table: {e}")
182
183 def plot_response_times(df: pd.DataFrame) -> None:
184     """
185         Creates a comparative boxplot for model response times overlaid with a swarm plot for
186         individual data points.
187
188         The function annotates each AI model with its median response time and saves the plot in both
189         PDF and PNG formats.
190
191         Parameters:
192             df (pd.DataFrame): DataFrame containing the 'Response Time (seconds)' and 'Model' columns.
193
194         plt.figure(figsize=(8, 10))
195
196         ax = sns.boxplot(
197             x='Model',
198             y='Response Time (seconds)',
199             data=df,
200             width=0.6,
201             showfliers=False,
202             palette='muted'
203         )
204
205         sns.swarmplot(
206             x='Model',
207             y='Response Time (seconds)',
208             data=df,
209             color="#404040",
210             size=3,
211             alpha=0.6
212         )
213
214         # Annotate the median response time for each model.
215         medians = df.groupby('Model')['Response Time (seconds)'].median()
216         for xtick, model in enumerate(medians.index):
217             median_val = medians.loc[model]
218             ax.text(
219                 xtick,
220                 median_val + 0.05,
221                 f'{median_val:.2f}s',
222                 ha='center',
223                 va='bottom',
224                 fontsize=8,
225                 color='#2f2f2f'
226             )
227
228         plt.title('Comparative Analysis of Model Response Times', pad=15)
229         plt.xlabel('AI Model', labelpad=10)
230         plt.ylabel('Response Time (seconds)', labelpad=10)
231         plt.xticks(rotation=45, ha='right')
232         plt.tight_layout()
233
234         plt.savefig('model_response_times_comparison.pdf', bbox_inches='tight')
235         plt.savefig('model_response_times_comparison.png', bbox_inches='tight')
236         plt.close()
237
238 def generate_statistics(df: pd.DataFrame) -> None:
239     """
240         Generates a statistical summary of response times for each AI model and exports the results.
241
242         The summary includes the mean, standard deviation, minimum, median, and maximum values.
243         The results are printed to the console and saved as a LaTeX table.
244
245         Parameters:
246             df (pd.DataFrame): DataFrame containing the 'Response Time (seconds)' and 'Model' columns.
247
248         stats = df.groupby('Model')['Response Time (seconds)'].describe()
249         print("\nResponse Time Statistics:")
250         print(stats[['mean', 'std', 'min', '50%', 'max']].round(3).to_string())

```

```

250
251     try:
252         with open('response_stats.tex', 'w') as f:
253             f.write(
254                 stats[['mean', 'std', 'min', '50%', 'max']]
255                 .round(3)
256                 .style.to_latex(hrules=True)
257             )
258     except Exception as e:
259         logging.error(f"Error generating LaTeX response stats: {e}")
260
261     def main() -> None:
262         """
263             Main execution function.
264
265             Loads and processes data from JSON files, generates various comparative plots (response
266             times, CPU, and memory usage),
267             and outputs advanced performance statistics along with their LaTeX representations.
268             """
269         df = load_and_process_data()
270         if df.empty:
271             logging.error("No data available for plotting and analysis.")
272             return
273
274         plot_response_times(df)
275         plot_cpu_memory_comparison(df)
276         generate_advanced_statistics(df)
277         generate_statistics(df)
278
279     if __name__ == "__main__":
280         main()

```

Listing 7.3: Python-quantitative-data-analysis

This script performs a comprehensive performance evaluation of various AI models by loading JSON files from the working directory, extracting key metrics such as response time, CPU usage, and memory consumption, and preprocessing the data for analysis.

It generates high-resolution visualizations—including violin, strip, box, and swarm plots—to effectively illustrate the distributions and central tendencies of these metrics. Additionally, it computes descriptive statistics and presents the results both in the console and as LaTeX-formatted tables, ensuring structured and reproducible scientific reporting.

## Qualitative Data Analysis

To visualize the qualitative data, we utilized the following Python script:

```

1  import pandas as pd
2  import matplotlib.pyplot as plt
3  import seaborn as sns
4  import os
5
6  # =====#
7  # Data Aggregation and Visualization for Model Performance Metrics
8  # =====#
9  # This script aggregates experimental results from JSON files, each containing
10 # performance metrics (e.g., BLEU, ROUGE, grammatical errors, readability, sentiment)

```

```

11  # for various AI models. The data are visualized using high-quality plots for scientific
12  # analysis, and descriptive statistics are exported in LaTeX format.
13
14  # -----
15  # Data Aggregation
16  # -----
17  directory = "./"
18  aggregated_data = []
19  for file in os.listdir(directory):
20      # Process files that follow the naming convention "scored_<model>.json"
21      if file.startswith("scored_") and file.endswith(".json"):
22          model = file.replace("scored_", "").replace(".json", "")
23          df_temp = pd.read_json(os.path.join(directory, file))
24          df_temp["Model"] = model
25          aggregated_data.append(df_temp)
26  df = pd.concat(aggregated_data, ignore_index=True)
27
28  # -----
29  # Global Plotting Style Settings
30  # -----
31  sns.set_theme(style="whitegrid", font_scale=0.9)
32  plt.rcParams['axes.titlepad'] = 15
33  plt.rcParams['axes.labelpad'] = 10
34
35  def rotate_labels(ax, rotation: int = 45, ha: str = 'right') -> None:
36      """
37          Rotate the x-axis labels for improved readability.
38
39          Parameters:
40              ax (matplotlib.axes.Axes): The axes on which to rotate the labels.
41              rotation (int): Angle in degrees to rotate the labels.
42              ha (str): Horizontal alignment of the labels.
43
44          ax.set_xticklabels(ax.get_xticklabels(), rotation=rotation, ha=ha, fontsize=9)
45  plt.tight_layout()
46
47  # -----
48  # Visualization of Performance Metrics
49  # -----
50
51  # --- 1. BLEU and ROUGE Scores ---
52  plt.figure(figsize=(14, 7))
53  # Reshape data for plotting multiple text quality metrics
54  df_melt = df.melt(id_vars=["Model"], value_vars=["BLEU", "ROUGE-1", "ROUGE-2", "ROUGE-L"],
55  var_name="Metric", value_name="Score")
56  ax = sns.barplot(x="Model", y="Score", hue="Metric", data=df_melt, palette="viridis")
57  plt.title("Comparison of BLEU and ROUGE Scores", fontweight='bold')
58  plt.ylim(0, 0.05)
59  plt.legend(loc="upper right", frameon=True)
60  rotate_labels(ax)
61  plt.savefig("bleu_rouge.png", dpi=300, bbox_inches="tight")
62
63  # ##### Other plots are similar to the first one, but with different kinds of plots
64  # The plots are for:
65  # --- 2. Grammatical Errors ---
66  # --- 3. Readability (Flesch Score) ---
67  # --- 4. Sentiment Analysis ---
68  # --- 5. Combined Metrics Overview with Subplots ---
69  # #####
70
71  # -----
72  # Descriptive Statistics Export
73  # -----
74  # Compute summary statistics for selected metrics by model
75  summary = df.groupby("Model")[["BLEU", "ROUGE-L", "Grammar Errors"]].agg(["mean", "std",
76  "median", "min", "max"])
77  summary.to_latex("summary.tex", float_format=".3f")

```

Listing 7.4: Python-qualitative-data-analysis

This script aggregates performance metrics from multiple JSON files—each

corresponding to an AI model evaluation—into a unified dataset. It then generates high-resolution visualizations, including bar, box, and point plots, to illustrate text quality (BLEU/ROUGE scores), grammatical accuracy, readability, and sentiment distribution. Finally, it computes descriptive statistics for these metrics and exports a summary table in LaTeX format for rigorous scientific reporting.

### Utilized Python Libraries

In this project, several Python libraries were employed to facilitate data manipulation, analysis, and visualization:

**Pandas** Pandas is an open-source data analysis and manipulation library for Python. It provides data structures such as Series and DataFrames, which allow for efficient handling of structured data. Pandas supports operations like data alignment, merging, and reshaping, making it indispensable for data preprocessing and analysis tasks.

[McKinney & the Pandas Development Team \(2025\)](#)

**Matplotlib** Matplotlib is a comprehensive library for creating static, animated, and interactive visualizations in Python. It offers an object-oriented API for embedding plots into applications and supports various plot types, including line, bar, scatter, and 3D plots. Matplotlib's flexibility and extensive customization options make it a fundamental tool for data visualization.

[Hunter & the Matplotlib Development Team \(2025\)](#)

**Seaborn** Seaborn is a statistical data visualization library built on top of Matplotlib. It provides a high-level interface for drawing attractive and informative statistical graphics, including functions for visualizing univariate and bivariate distributions, categorical data, and linear regression models. Seaborn integrates closely with Pandas data structures, enhancing the aesthetic appeal and interpretability of visualizations.

?

**NumPy** NumPy is a foundational library for numerical computing in Python. It introduces support for large, multi-dimensional arrays and matrices, along with a collection of mathematical functions to operate on these arrays. NumPy serves as the backbone for many other libraries, including Pandas and Matplotlib, by providing efficient array operations and numerical computations.

Oliphant & the NumPy Development Team (2025)

### 7.5.7. Test Results and Analysis

After data collection and processing, the following visualizations were obtained:

#### Quantitative Data Analysis

The visualizations below offer insights into the performance metrics of various AI models, focusing on response times, CPU usage, and memory consumption.

**CPU Usage** The violin plot below illustrates the distribution of CPU usage across different AI models.

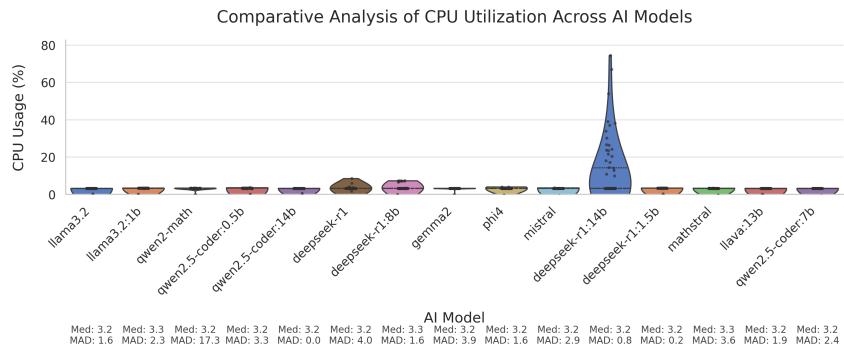


Figure 7.1.: Comparative Analysis of CPU Utilization Across AI Models

This plot highlights the variability and central tendencies in CPU usage among the evaluated models.

### Observations:

CPU usage is relatively consistent across the models; however, the Deepseek (reasoning) models exhibit higher CPU usage, with the largest Deepseek model (14 billion parameters) showing the highest utilization.

**Memory Usage** The following violin plot visualizes the memory consumption of various AI models.

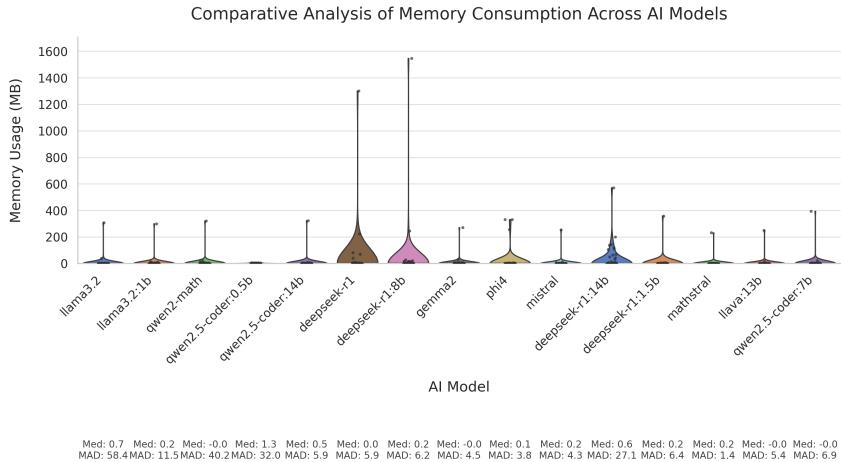


Figure 7.2.: Comparative Analysis of Memory Consumption Across AI Models

This visualization reveals the memory usage patterns and distributions, providing valuable insights into resource allocation.

### Observations:

Memory usage is generally comparable across the models. Nevertheless, the Deepseek (reasoning) models demonstrate higher memory consumption with a wider spread, particularly in the 8 and 7 billion parameter variants.

**Response Times** A box plot was generated to depict the distribution of response times across the different models.

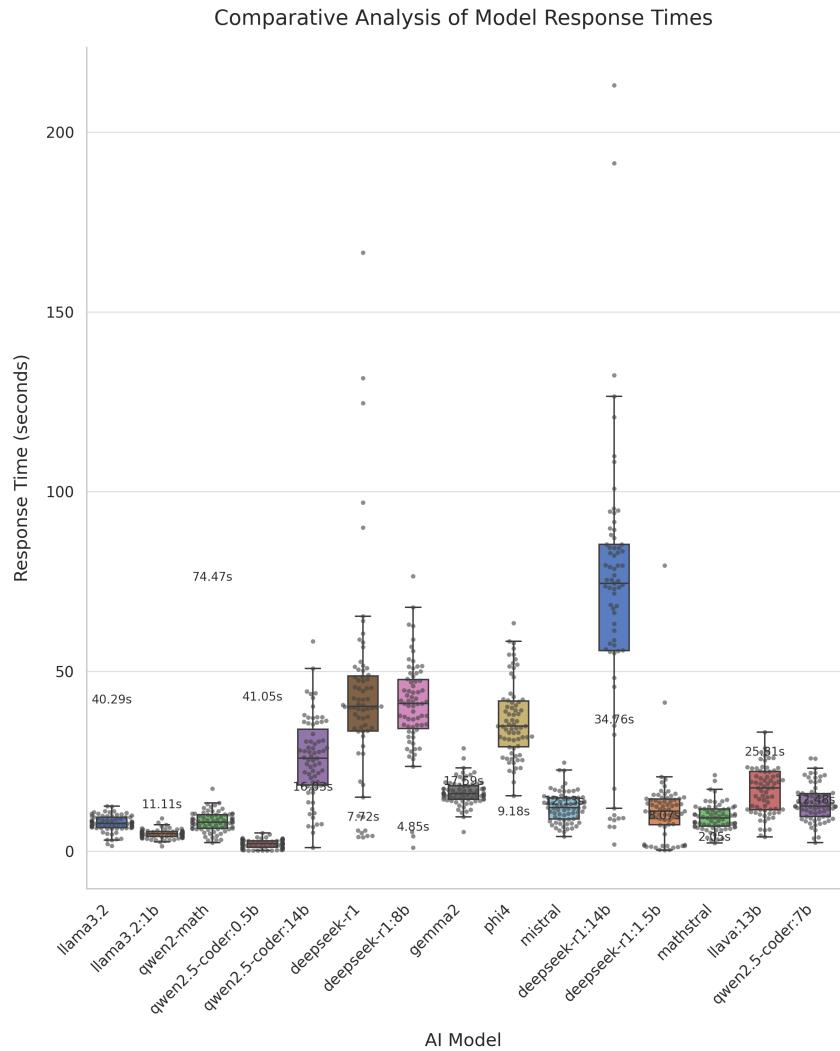


Figure 7.3.: Comparative Analysis of Model Response Times

This box plot provides a clear overview of the central tendencies and variability in response times.

### Observations:

Response times vary significantly among the models. The Llama models display very low and consistent response times, which is advantageous

for the intended use case of the School AI Server. In contrast, the Gemma, Mistral, Mathstral, and two Qwen-coder models exhibit higher response times with a noticeable spread. Larger models, such as the Qwen-coder 14 billion parameter model and the Phi4 model, also show increased response times and variability. Notably, the Deepseek models, particularly the 14 billion parameter variant, record the highest response times and spread, likely due to the additional computational demands required for their reasoning processes.

### 7.5.8. Qualitative Data Analysis

The visualizations presented in this section provide insights into various text quality metrics of different AI models, including BLEU and ROUGE scores, grammatical error counts, readability, and sentiment analysis.

**BLEU and ROUGE Scores** The bar plot below compares the BLEU and ROUGE scores across multiple AI models.

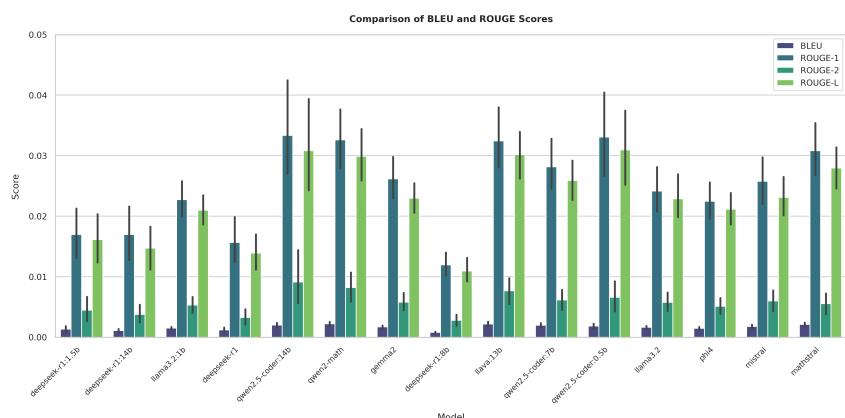


Figure 7.4.: Comparison of BLEU and ROUGE Scores

This visualization offers a comprehensive overview of text quality metrics. The BLEU score quantifies the similarity between generated text and a

reference text, while the ROUGE scores (including ROUGE-1, ROUGE-2, and ROUGE-L) measure the n-gram overlap between them.

### Observations:

BLEU and ROUGE scores vary significantly among the models, reflecting differences in text generation quality. Specialized models for mathematics and coding (e.g., Mathstral and Qwen-coder models) achieve the highest scores due to their technical focus. In contrast, general-purpose models such as Llama and Gemma exhibit lower scores, likely as a consequence of their broader but less specialized capabilities. An exception is the Llava model, which—despite being a general-purpose model with vision capabilities—demonstrates a relatively high BLEU score, possibly due to its unique text generation approach based on images. Additionally, the Mistral and Gemma2 models display higher scores among general-purpose models, whereas reasoning models like Deepseek yield the lowest BLEU and ROUGE scores, prioritizing complex logical reasoning over text quality.

**Grammatical Errors** The box plot below illustrates the distribution of grammatical errors detected across different AI models. Grammatical error count serves as an important metric for assessing the linguistic accuracy of generated text. The Language Tool library was used to detect and count errors, with English specified as the target language for consistent and reliable results.<sup>1</sup>

---

<sup>1</sup>Note that some errors detected in code snippets were manually corrected to preserve the intended meaning of the visualization.

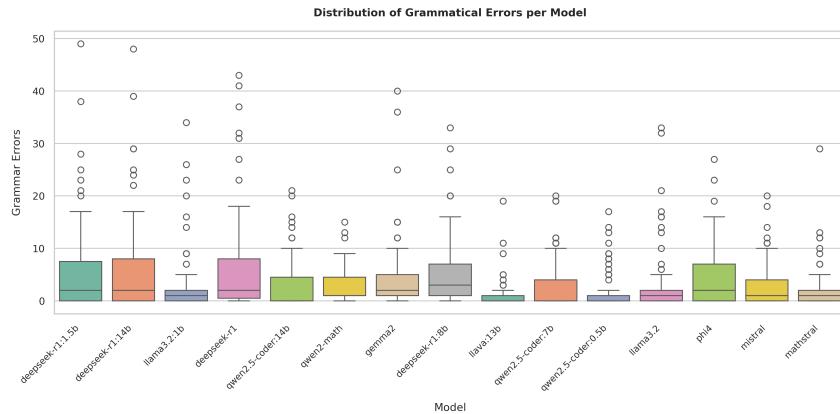


Figure 7.5.: Comparison of Grammatical Errors Across AI Models

### Observations:

The number of grammatical errors varies considerably between models. The Mathstral, Llava, and Llama models exhibit the fewest errors, with the Qwen-coder models also performing well despite their focus on code generation. In contrast, reasoning models such as Deepseek produce a higher number of errors, which may be attributable to their emphasis on complex logical reasoning rather than linguistic precision. Additionally, some models might generate more errors due to non-native English influences. Notably, the Phi4 model, a general-purpose model developed in the United States, also shows a higher error count.

**Readability (Flesch Score)** The Flesch Reading Ease score quantifies text readability based on the average number of syllables per word and words per sentence. Higher scores indicate more accessible text, while lower scores suggest increased complexity.

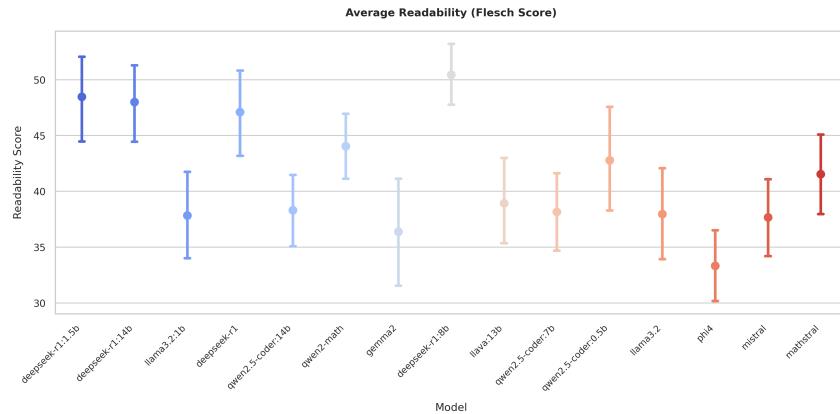


Figure 7.6.: Comparison of Readability Scores Across AI Models

### Observations:

Readability scores differ markedly among the models. Interestingly, the Deepseek models achieve the highest readability scores despite their lower BLEU, ROUGE, and grammatical accuracy metrics, possibly due to the nature of their reasoning-focused design. On the other hand, the Gemma2, Phi4, and Llama models score lowest in readability, which is unexpected for general-purpose models that typically aim for accessible language. Specialized models generally fall within the mid-range of readability scores.

**Sentiment Analysis** Sentiment analysis evaluates the emotional tone and polarity of the generated text. A Transformer-based model was employed to classify text as positive or negative.

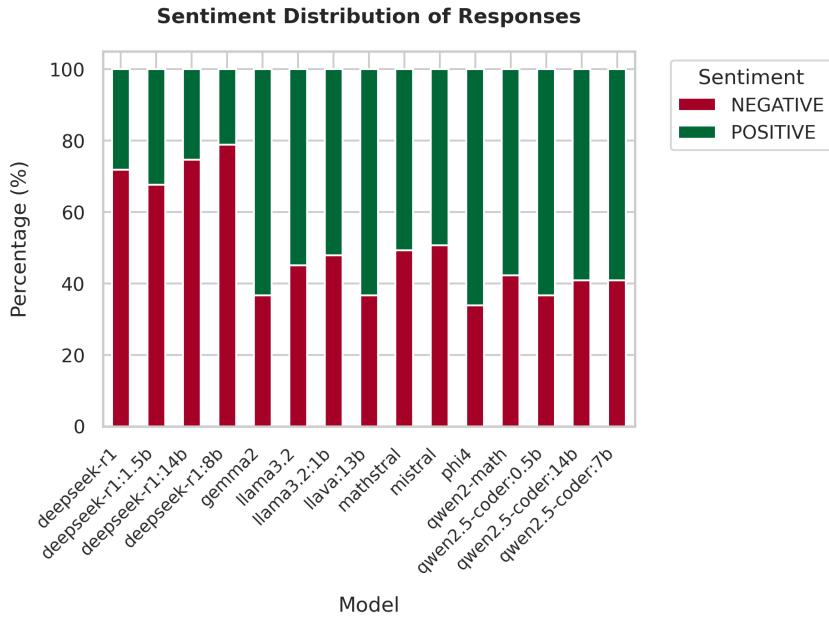


Figure 7.7.: Comparison of Sentiment Analysis Across AI Models

### Observations:

Most models exhibit similar sentiment distributions, with approximately 50–60% of the text classified as positive and 40–50% as negative. However, the Deepseek models deviate from this pattern, showing a notably higher negative sentiment score (around 70–80%), which is intriguing given their high readability scores.

**Combined Metrics Overview** The subplots below provide a holistic overview of the combined text quality metrics, including BLEU and ROUGE scores, grammatical errors, readability, and sentiment analysis.

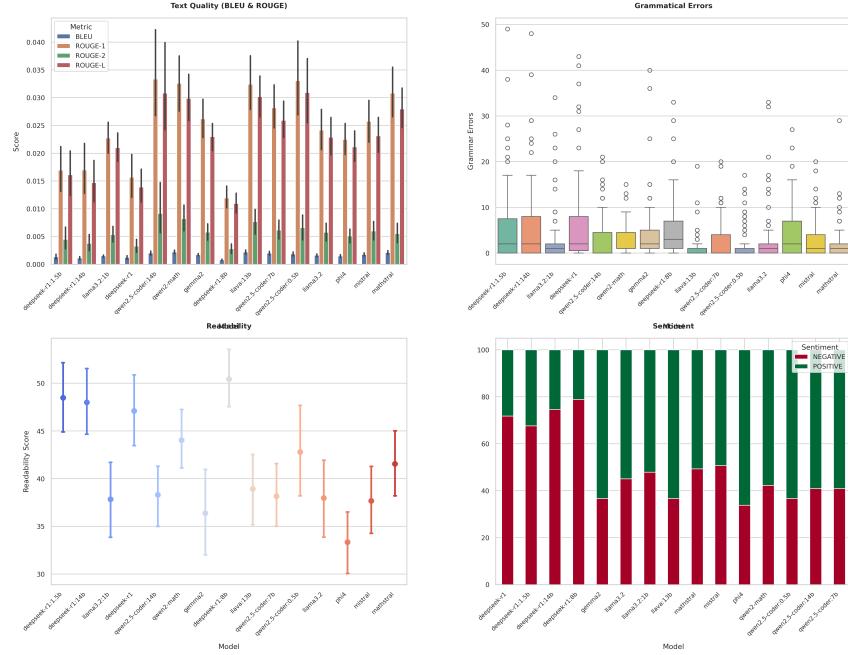


Figure 7.8.: Combined Metrics Overview for AI Models

These subplots facilitate a comprehensive comparative analysis of the performance of different AI models with respect to text quality.

### 7.5.9. Model Comparison for Different Use Cases and Scenarios

This section presents a comparative analysis of various AI models based on both quantitative and qualitative performance metrics. The evaluation focuses on aspects such as computational efficiency, text generation quality, and overall suitability for specific application scenarios.

## Performance Metrics Overview

The quantitative analysis reveals significant differences in resource utilization and response times across the models:

- **CPU and Memory Usage:** The Deepseek (reasoning) models tend to exhibit higher CPU and memory consumption compared to others. This is indicative of the increased computational demand required for complex logical processing.
- **Response Times:** Models such as Llama demonstrate very low and consistent response times, making them particularly well-suited for interactive applications. In contrast, larger models (e.g., Qwen-coder 14 billion and Phi4) and the Deepseek models show increased response times and higher variability.

## Text Quality and Accuracy

The qualitative analysis, based on BLEU and ROUGE scores, grammatical error counts, readability, and sentiment analysis, provides further insights into each model's text generation capabilities:

- **BLEU and ROUGE Scores:** Specialized models (e.g., Mathstral and Qwen-coder) achieve the highest scores, reflecting superior performance in generating technical content. General-purpose models like Llama and Gemma tend to score lower due to their broader, less specialized focus.
- **Grammatical Accuracy:** Models such as Mathstral, Llava, and Llama exhibit fewer grammatical errors, while reasoning models like Deepseek show a higher error count, potentially due to their prioritization of logical reasoning over linguistic precision.
- **Readability:** Interestingly, the Deepseek models score highest on the Flesch Reading Ease metric, despite other text quality metrics indicating lower overall quality. In contrast, some general-purpose models such as Gemma2 and Phi4 show lower readability scores.
- **Sentiment Analysis:** Most models present a balanced sentiment distribution. However, the Deepseek models are characterized by a higher

proportion of negative sentiment, which may be attributed to the inherent complexity of their reasoning processes.

### Use Case Recommendations

Based on the integrated analysis of both performance and text quality, the following recommendations can be made for various use cases:

**Interactive and Real-Time Applications** For scenarios requiring rapid response and minimal latency—such as the School AI Server—models like Llama are highly advantageous due to their consistently low response times.

**Technical and Domain-Specific Content Generation** Applications demanding high accuracy in technical content, particularly in mathematics and coding, are best served by specialized models like Mathstral and Qwen-coder. These models not only achieve superior BLEU and ROUGE scores but also exhibit fewer grammatical errors.

**Complex Reasoning Tasks** For tasks that necessitate advanced logical reasoning, the Deepseek models are appropriate despite their higher computational resource demands and slower response times. However, users should be aware of the trade-offs, including higher negative sentiment and a greater number of grammatical errors.

**General-Purpose Applications** For broader applications where versatility is key, general-purpose models such as Gemma, Gemma2, and Phi4 offer a balanced performance. Although they may not excel in any single metric, they provide reliable performance across a range of tasks.

## Overall Evaluation

The comparative analysis underscores that no single model excels universally across all metrics. Instead, the choice of an AI model should be closely aligned with the specific requirements and constraints of the intended application. Developers must weigh the trade-offs between computational efficiency, text quality, and domain-specific accuracy when selecting the most appropriate model for a given scenario.

### 7.5.10. Model Selected for the Final Application

For the initial version of the Student AI Hub application, the decision was made to allow users to choose between the models. This approach enables users to select the model that best meets their specific use cases and requirements, while also effectively demonstrating the distinct capabilities of each model.

Specialized models, such as Qwen-coder and LLava, are accessible through dedicated application tabs within the Student AI Hub. In contrast, general-purpose models, including Gemma 2, Phi4, and Llama, are available under the General AI tab.

While reasoning models are available, they have not been fully integrated into the application. Their unique reasoning processes require specialized formatting to ensure that the output is comprehensible to the user. As a result, this formatting was not completely finalized at the time of the initial release of the Student AI Hub.

### 7.5.11. Model Integration and Deployment

Following the evaluation process, the selected models were systematically integrated into the School AI Server and the Visual Studio Code extension.

Leveraging the user-friendly API provided by the Ollama application, we facilitated a seamless integration of the models into the School AI Server,

ensuring efficient accessibility and deployment. To enhance request management and optimize communication between different components, we developed a Python-based Flask server that hosts a dedicated API. This API serves as an intermediary layer, enabling structured and scalable interactions between the School AI Server and the Visual Studio Code extension.

A comprehensive discussion of the hosted Flask service, including its architecture and functionality, is presented in Chapter 9: *Hosted Flask Service*.

## 7.6. Integration of OpenAI's API

In this work, we integrated the OpenAI API to leverage proprietary, high-performance AI models that are hosted on dedicated servers with advanced hardware capabilities. The utilization of external computing power allows for the concurrent execution of multiple models, thereby enhancing both scalability and efficiency in our application.

The decision to adopt the OpenAI API was influenced by its widespread adoption, robust performance, and extensive documentation. Numerous examples, tutorials, and community resources are available, which greatly facilitate the integration process and ensure that best practices are followed in scientific and industrial applications.

### 7.6.1. Overview of the OpenAI API

The OpenAI API provides access to state-of-the-art AI models developed by OpenAI, including various iterations of the ChatGPT model. These models are capable of generating human-like text, answering queries, and engaging in complex conversations. The API supports a range of models with different sizes and capabilities, allowing users to select the model that best fits the requirements of their specific use cases.

Designed with user accessibility in mind, the API comes with comprehensive documentation and a wealth of code samples, which significantly streamline the process of embedding advanced AI functionalities into diverse

applications and platforms. Furthermore, the API utilizes a token-based pricing model, which charges users according to the number of tokens processed during interactions. This pricing structure is not only transparent but also aligns closely with the computational effort required to generate responses.

Before accessing the API's full functionality, users must pre-fund their accounts by depositing a specified amount of money. This account-based billing system enables users to manage their expenditures effectively, including the option to set monthly spending limits. In addition to text generation, the OpenAI ecosystem also includes DAL-E, an image-generation model that creates visuals based on textual input, thus broadening the spectrum of applications available through the API.

*Overview - OpenAI API (n.d.b)*

### Tokens in Large Language Models

Tokens are the fundamental units of text that large language models (LLMs) process and generate. In this context, a token represents the smallest segment of text that a model can understand, which may correspond to an entire word, a fragment of a word, or even an individual character or punctuation mark.

The process of tokenization involves converting raw text into these discrete units. This approach enables LLMs to efficiently capture complex patterns in both syntax and semantics, even when encountering new or out-of-vocabulary terms. Techniques such as subword tokenization are particularly valuable, as they break down words into meaningful components, thereby reducing the overall vocabulary size and enhancing the model's ability to manage linguistic variability.

Moreover, tokens are closely related to the concept of a context window, which defines the span of tokens a model can consider during text generation or prediction. Typically, one token is estimated to average around four characters in English or roughly three-quarters of a word. This estimation is crucial for determining computational requirements and understanding the limitations imposed by the model's finite context window.

In summary, tokens are indispensable for the operation of LLMs, providing a structured means to process language. Their effective management through advanced tokenization strategies is essential for optimizing both the computational efficiency and the overall performance of these models.

Foy (2024)

### 7.6.2. Data Security and Privacy in Compliance with Austrian and EU Regulations

The integration of OpenAI's API into our systems necessitates a comprehensive examination of data security and privacy, particularly with regard to compliance with both Austrian and European Union regulatory frameworks. In this context, our approach adheres to the stringent requirements set forth in Regulation (EU) 2016/679 (General Data Protection Regulation, GDPR) *Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 on the protection of natural persons with regard to the processing of personal data and on the free movement of such data (2016)*, which forms the cornerstone of data protection within the EU. Additionally, the relevant provisions of the Austrian Data Protection Act (Datenschutzgesetz DSG) *Datenschutzgesetz (DSG) (1999)* have been carefully followed to ensure that personal data is handled in accordance with national standards.

OpenAI has implemented several measures to safeguard user data and align with GDPR mandates. Notably, they support compliance with privacy laws such as the GDPR and the California Consumer Privacy Act (CCPA), offering a Data Processing Addendum to customers. Their API and related products have undergone evaluation by an independent third-party auditor, confirming alignment with industry standards for security and confidentiality.

*Introducing data residency in Europe | OpenAI (n.d.)*

Despite these measures, concerns have been raised regarding data handling practices. For instance, data transmitted through the OpenAI API could potentially be exposed, and compliance with GDPR remains a complex

issue. Additionally, data may be accessible to third-party subprocessors, introducing further privacy considerations.

#### Fortis (2024)

To address these concerns, we have proactively informed our user community through a notice on the school website. This notice outlines the data handling practices associated with the OpenAI API and provides guidance on how users can manage their data when interacting with our systems. By maintaining transparency and offering clear instructions, we aim to uphold the highest standards of data security and privacy in our school environment.

In light of the evolving regulatory landscape, it is important to remain vigilant and responsive to any changes in data protection laws within Austria and the broader EU. Continuous monitoring and adaptation of our data handling practices will ensure ongoing compliance and the safeguarding of user privacy.

### 7.6.3. OpenAI API Implementation in Vue.js

This section details the integration of the OpenAI API within a Vue.js application framework, with a focus on both text and image generation capabilities. The implementation not only illustrates the interaction between the Vue.js frontend and the OpenAI API but also demonstrates adherence to security best practices and modular code design. The following discussion is supported by annotated code examples and an explanation of the libraries used.

#### Overview of the Implementation

The implementation is structured as a Vue.js component that facilitates the following functionalities:

- Accepting user input via a text area.
- Initiating API calls for generating text responses (using ChatGPT models) and creating images (via the DALL-E endpoint).

- Displaying the results (generated text and images) dynamically within the user interface.

The component is designed with a clear separation between presentation and business logic, ensuring that the code remains both maintainable and scalable.

### Explanation of the Used Libraries

**OpenAI Library** The library is employed as the primary interface to interact with OpenAI's API endpoints. This library abstracts the complexities of HTTP communication and provides a user-friendly API to access advanced AI functionalities such as natural language generation and image synthesis. Its integration simplifies the process of constructing API requests and handling responses, which is critical for developing robust AI-driven applications.

**API Key Management** To ensure secure handling of sensitive credentials, the OpenAI API key is imported from an external module (i.e., OPENAI\_API\_KEY from the secrets file). This approach adheres to security best practices by preventing the direct embedding of API keys within the source code, thereby mitigating the risk of unauthorized exposure.

### Code Example: Vue.js Component for OpenAI API Integration

Below is an illustrative example of a Vue.js component that integrates the OpenAI API for both text and image generation. The code is presented in two parts: the HTML template and the JavaScript logic.

#### HTML Template

```
1 <template>
2   <div class="openai-container">
3     <h1>OpenAI API Integration in Vue.js</h1>
4     <textarea
5       v-model="userInput"
6       placeholder="Enter your prompt here...">
```

```

7      rows="4"
8      cols="50">
9    </textarea>
10   <div class="action-buttons">
11     <button @click="generateText">Generate Text</button>
12     <button @click="generateImage">Generate
13       Image</button>
14   </div>
15   <div v-if="generatedText" class="output-section">
16     <h2>Generated Text</h2>
17     <p>{{ generatedText }}</p>
18   </div>
19   <div v-if="generatedImage" class="output-section">
20     <h2>Generated Image</h2>
21     
23   </div>
24 </template>

```

Listing 7.5: Vue.js Template for OpenAI API Integration

### JavaScript Logic

```

1 <script>
2 import OpenAI from "openai";
3 import { OPENAI_API_KEY } from "../secrets";
4
5 export default {
6   name: "OpenAIComponent",
7   data() {
8     return {
9       userInput: "",
10      generatedText: "",
11      generatedImage: ""
12    };
13  },
14  methods: {
15    async generateText() {
16      // Initialize OpenAI client with API key
17      const openai = new OpenAI({ apiKey: OPENAI_API_KEY
18      });
19      try {
20        const response = await
21          openai.chat.completions.create({
22            prompt: "Tell me about the capital of France."
23          });
24        this.generatedText = response.data.choices[0].text;
25      } catch (error) {
26        console.error("Error generating text:", error);
27      }
28    }
29  }
30}

```

```

20      model: "gpt-3.5-turbo",
21      messages: [{ role: "user", content:
22          this.userInput }]
23      );
24      // Extract and assign the generated text
25      this.generatedText =
26          response.choices[0].message.content;
27  } catch (error) {
28      console.error("Error during text generation:",
29          error);
30  },
31  async generateImage() {
32      // Initialize OpenAI client for image generation
33      const openai = new OpenAI({ apiKey: OPENAI_API_KEY
34          });
35      try {
36          const response = await openai.images.generate({
37              prompt: this.userInput,
38              n: 1,
39              size: "512x512"
40          });
41          // Extract and assign the URL of the generated
42          // image
43          this.generatedImage = response.data[0].url;
44      } catch (error) {
45          console.error("Error during image generation:",
46          error);
47      }
48  }
49 };
50 </script>

```

Listing 7.6: Vue.js Script for OpenAI API Integration

## Discussion

The presented component exemplifies how modern web applications can seamlessly integrate AI capabilities while maintaining a secure and modular architecture. Key points of consideration include:

- **Modularity:** The separation of the UI (HTML template) and the business logic (JavaScript methods) facilitates easier maintenance and potential scalability.
- **Security:** By importing the API key from an external secrets module, the risk of credential leakage is minimized. This practice is crucial in academic and production environments where data security is paramount.
- **Extensibility:** The design allows for further expansion, such as additional error handling mechanisms or the integration of more advanced functionalities provided by the OpenAI API.

In conclusion, this integration not only demonstrates the practical application of AI APIs in modern web development but also reflects best practices in secure and maintainable code design. Such an approach is essential for building reliable applications in both academic research and industrial contexts.

## 7.7. Conclusion

The comprehensive evaluation of AI models for the Student AI Hub application has yielded valuable insights into their performance across various metrics, including response times, resource utilization, text quality, and overall suitability for diverse use cases. By integrating both quantitative and qualitative analyses, we have identified the strengths and weaknesses of each model, enabling us to formulate informed recommendations tailored to specific application scenarios.

Furthermore, the integration of the OpenAI API into the School AI Server and the Visual Studio Code extension has significantly enhanced the application's capabilities, providing users with seamless access to advanced AI functionalities. Adherence to best practices in data security and privacy has ensured full compliance with Austrian and EU regulations, thereby safeguarding user data.

In the following three chapters, we will discuss the technical implementation aspects of the project, including the integration of AI into the Flask server,

the development of the Student AI Hub application, and the incorporation of AI functionalities into the Visual Studio Code extension. These chapters will provide a detailed exploration of the project's technical architecture, complete with code examples, architectural diagrams, and deployment strategies.

# 8. Self-hosted Flask Service

**Author:** Luna Schätzle

**Author:** Florian Prandstetter (docker section [8.7](#))

This chapter details the implementation, architecture, and deployment of a self-hosted Flask service that serves as a critical interface linking the front-end and back-end components of the system. It outlines the technical design and deployment strategies while critically evaluating the benefits of a self-hosted solution and the rationale behind key architectural decisions. The service, which underpins both the Student AI Hub and the code extension's backend, was developed to address specific operational requirements. This section provides a comprehensive overview of the motivations for its development, elaborates on its core functionalities, and situates its role within the broader system architecture—thus laying the groundwork for the ensuing technical discussion.

## 8.1. Advantages of a Self-hosted Service

A self-hosted service confers a multitude of benefits relative to externally managed or third-party solutions. This section examines these advantages in depth:

- **Enhanced Customization and Environmental Control:** By hosting the service internally, developers gain complete authority over the configuration and optimization of the operating environment. This control facilitates the implementation of domain-specific modifications and enables precise tuning to meet the unique needs of the project.

- **Rapid Prototyping and Agile Deployment:** The self-hosted nature of the service supports agile development practices. New features and bespoke functionalities can be rapidly prototyped, iteratively tested, and deployed, thereby significantly reducing development cycles and accelerating time-to-market.
- **Improved Data Security and Regulatory Compliance:** Hosting the service in-house allows for stringent oversight of data management practices. This approach is particularly advantageous in contexts governed by strict data protection regulations and institutional policies, as it enables the implementation of tailored security measures and enhances overall control over sensitive information.

Collectively, these factors validate the strategic decision to pursue a self-hosted approach, underscoring its technical, operational, and regulatory merits.

## 8.2. Flask as a Web Framework

Flask is a lightweight, yet versatile web Python framework that plays a central role in the development of our Student AI Hub. Its minimalist design and powerful capabilities make it an excellent choice for both rapid prototyping and scalable application development.

### 8.2.1. Core Functionalities of Flask

Flask's architecture is built around several core functionalities that streamline web application development:

- **Request Routing:** Flask's routing system allows for the efficient mapping of URLs to Python functions. This ensures that incoming web requests are correctly handled and directed to the appropriate endpoints, which is crucial for managing user interactions.

- **Middleware Support:** Flask supports middleware, facilitating the insertion of additional processing layers before or after a request is handled. This capability is essential for tasks such as authentication, logging, and error handling.
- **Extensibility:** Its modular design allows developers to integrate third-party extensions or develop custom modules, thereby expanding Flask's functionalities to meet the evolving demands of the project.
- **Simplicity and Clarity:** Flask's clear and concise API encourages clean, maintainable code. This simplicity does not come at the expense of power; rather, it provides a robust foundation upon which complex systems can be built.

These features collectively contribute to an efficient workflow, ensuring that web requests and responses are managed in a structured and scalable manner.

### 8.2.2. Rationale for Selecting Flask

The decision to adopt Flask as the backbone of our web service was influenced by several key considerations:

- **Simplicity and Flexibility:** Flask's minimalistic core allows for rapid development and iterative prototyping without the overhead of a full-stack framework. This flexibility is invaluable during the early stages of project development and testing.
- **Extensive Documentation and Community Support:** With comprehensive documentation and a vibrant community, Flask offers abundant resources for troubleshooting and extending functionality. This support network accelerates development and helps resolve challenges efficiently.
- **Scalability:** Despite its simplicity, Flask is designed to scale. Its modular nature means that as the project grows, new features can be seamlessly integrated, ensuring that the framework remains robust even under increased demand.
- **Integration Capabilities:** Flask can be easily combined with various libraries and APIs. This makes it particularly well-suited for integrating

AI models, data processing tools, and other external services—core requirements of the Student AI Hub.

In summary, Flask's combination of ease-of-use, extensibility, and strong community support provides a solid and adaptable framework for developing a dynamic web service. Its ability to handle everything from simple routing to complex middleware interactions makes it the ideal choice for building a robust backend that meets the diverse needs of our project.

## 8.3. Architecture and Service Structure

The Flask service functions as a robust and flexible backend for the Student AI Hub and the code extension. Its modular and extensible design facilitates the seamless integration of additional functionalities and services.

### 8.3.1. System Architecture

The figure below illustrates the key architectural components of the Flask service and their interactions.

The system is organized around a central Python script, `app.py`, which handles incoming requests, registers endpoints, initiates the server, and manages logging. Server configuration is maintained in `config.py`, where settings such as the language model, image processing rules, upload folder, and conversion language are defined.

Endpoints are organized within the `routes` subfolder, with similar endpoints grouped together. They are divided into the following files:

- **`chatbot_route.py`:** Contains endpoints related to chatbot functionality.
- **`OCR_route.py`:** Manages endpoints for image to Text conversion.
- **`Programming_bot_route.py`:** Houses endpoints for the programming bot.

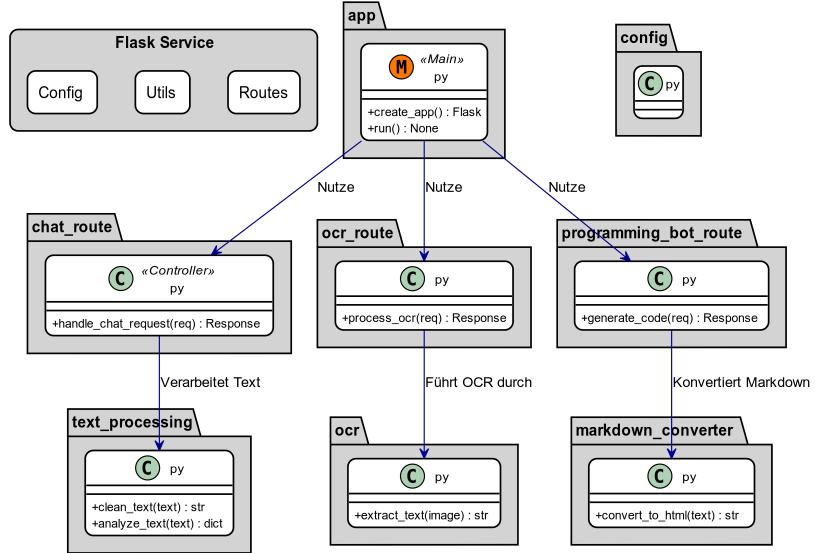


Figure 8.1.: Flask Service Architecture

Within these files, endpoints process user requests and return responses, and are designed for easy extension. They also handle error management and user feedback by converting data from the user and the Ollama API into the appropriate format when necessary. Connections to the Ollama API and the OCR (Optical Character Recognition) system are managed within the `Utils` folder, which contains all utility functions used by the endpoints, including those for sending requests, performing OCR, and converting Markdown to HTML.

### 8.3.2. Expandability and Modularity

The server is designed for easy expandability and modularity. Endpoints are stored in separate files, which allows for the straightforward addition of new functionality. Similarly, utility functions can be updated or replaced with minimal effort, and the server configuration is flexible enough to accommodate new parameters.

This modular and extensible architecture ensures that the Flask service can readily adapt to future enhancements and integrations. These design principles contribute to a flexible, maintainable server that can be effortlessly updated with new features and functionalities.

## 8.4. RESTful Endpoints and Functionalities

This section provides a comprehensive overview of the RESTful endpoints implemented in the Flask service. Each endpoint is detailed in terms of its input parameters, expected output, and the underlying logic that processes incoming requests.

### 8.4.1. Chatbot Endpoints

The Chatbot endpoints are responsible for handling all server requests associated with both the general chatbot and the image recognition chatbot.

**Chatbot Endpoint** The following code snippet illustrates the endpoint for the general chatbot:

```
1 @chat_bp.route('/ask_ollama', methods=['POST']) # Defines
2     the endpoint
3 def ask_ollama_endpoint():
4     """
5         Chat endpoint: Receives a user query and a model,
6             communicates with Ollama, and returns the response.
7     """
8     data = request.get_json()
9
10    if not data:
11        logger.warning('No JSON data provided')
12        return jsonify({'error': 'No JSON data
13                         provided'}), 400
14
15    prompt = data.get('prompt')
```

```

13     model = data.get('model', Config.OLLAMA_MODEL_DEFAULT)
14         # Default model
15
16     if not prompt:
17         logger.warning('Prompt missing')
18         return jsonify({'error': 'Prompt missing'}), 400
19
20     try:
21         response = ask_ollama(prompt, model=model)
22
23         if 'choices' in response:
24             return jsonify(response), 200
25         else:
26             return jsonify(response), 500
27
28     except Exception as e:
29         logger.error(f'Error communicating with Ollama:
30             {str(e)}')
31         return jsonify({'error': 'Error communicating with
32             Ollama'}), 500

```

Listing 8.1: Chatbot Endpoint

This endpoint extracts the necessary data from the API request and passes it to the `ask_ollama` utility function, which communicates with the Ollama API and returns the corresponding response. If any required data is missing or if the Ollama API is unreachable, the endpoint returns an appropriate error message.

**Image Recognition Endpoint** The following code snippet demonstrates the endpoint for the Image Recognition Chatbot:

```

1 @chat_bp.route('/ask_ollama_vision', methods=['POST']) #
2     Defines the endpoint using POST method
3 def ask_ollama_vision_endpoint():
4     """
5         Vision Chat endpoint: Receives a user query with
6             images and a model, communicates with Ollama
7                 Vision, and returns the response.
8     """
9     data = request.get_json()

```

```

8     if not data:
9         logger.warning('No JSON data provided')
10        return jsonify({'error': 'No JSON data
11                      provided'}), 400
12
13    prompt = data.get('prompt')
14    model = data.get('model', 'llama3.2-vision')  #
15                      Default model for vision tasks
16    images = data.get('images', [])
17
18    if not prompt and not images:
19        logger.warning('Neither prompt nor images
20                      provided')
21        return jsonify({'error': 'Neither prompt nor
22                      images provided'}), 400
23
24    # Process the images
25    image_paths = []
26    try:
27        for idx, img_str in enumerate(images):
28            # Extract image data from base64 string
29            if ',' in img_str:
30                header, encoded = img_str.split(',', 1)
31            else:
32                header, encoded = '', img_str
33            img_data = base64.b64decode(encoded)
34            img = Image.open(BytesIO(img_data))
35
36            # Validate the image format
37            if img.format.lower() not in
38                Config.ALLOWED_EXTENSIONS:
39                logger.warning(f'Invalid image format:
40                                {img.format}')
41                return jsonify({'error': f'Invalid image
42                                format: {img.format}'}), 400
43
44            # Optionally reduce or compress image size
45            img.thumbnail((1024, 1024))  # Example:
46                        maximum size 1024x1024
47
48            # Save the image temporarily
49            img_filename =
50                f"temp_{idx}.{img.format.lower()}"
51            img_path = os.path.join(Config.UPLOAD_FOLDER,

```

```

        img_filename)
43     img.save(img_path)
44     image_paths.append(img_path)

45
46     except Exception as e:
47         logger.error(f'Error processing images: {str(e)}')
48         return jsonify({'error': f'Error processing
49                         images: {str(e)}'}), 400

50     try:
51         response = ask_ollama_vision(prompt, model=model,
52                                     image_paths=image_paths)

53         if 'choices' in response:
54             return jsonify(response), 200
55         else:
56             return jsonify(response), 500

57
58     except Exception as e:
59         logger.error(f'Error communicating with Ollama
60                         Vision: {str(e)}')
61         return jsonify({'error': 'Error communicating with
62                         Ollama Vision'}), 500

63     finally:
64         # Delete temporary images
65         for img_path in image_paths:
66             if os.path.exists(img_path):
67                 os.remove(img_path)

```

Listing 8.2: Image Recognition Endpoint

The Image Recognition endpoint functions similarly to the general chatbot endpoint, with the added capability of processing image data. It decodes the base64-encoded images, saves them temporarily, validates their format, and resizes them if necessary to optimize processing speed and reduce server load. Once processed, the images are passed to the `ask_ollama_vision` utility function. After the request is handled, the endpoint ensures that all temporary images are deleted.

Overall, these endpoints are designed for scalability and robustness, efficiently managing both text and image inputs while providing meaningful feedback to the user in case of errors.

### 8.4.2. OCR Endpoints

This file contains all the OCR endpoints. Currently, there is a single endpoint that handles input for optical character recognition.

The following code snippet illustrates the OCR endpoint:

```

1 def allowed_file(filename):
2     """
3     Checks if the file has an allowed extension.
4     """
5     return '.' in filename and filename.rsplit('.', 1)[1].lower() in Config.ALLOWED_EXTENSIONS
6
7 @ocr_bp.route('/ocr', methods=['POST'])
8 def process_ocr():
9     """
10    OCR endpoint: Accepts an image (either as a Base64
11    string or as a file), extracts text using OCR,
12    enhances the extracted text via the Ollama API, and
13    returns both the raw and improved text.
14    Supports both JSON and multipart/form-data requests.
15    """
16    img_path = None # Initialize img_path for cleanup
17    try:
18        # Check if the request contains JSON data
19        if request.is_json:
20            data = request.get_json()
21            image_str = data.get('image')
22            if not image_str:
23                logger.warning('Image data missing in JSON
24                request')
25            return jsonify({'error': 'Image data
26                missing'}), 400
27
28        # Decode the Base64 image
29        if ',' in image_str:
30            header, encoded = image_str.split(',', 1)
31        else:
32            header, encoded = '', image_str
33        try:
34            img_data = base64.b64decode(encoded)
35            img = Image.open(BytesIO(img_data))
36        except Exception as e:

```

```

33         logger.error(f'Error decoding Base64
34             image: {str(e)})')
35     return jsonify({'error': 'Invalid Base64
36                 image data'}), 400
37
38     else:
39         # Handle multipart/form-data request
40         if 'image' not in request.files:
41             logger.warning('No image file provided in
42                             multipart/form-data request')
43             return jsonify({'error': 'No image file
44                             provided'}), 400
45
46         file = request.files['image']
47         if file.filename == '':
48             logger.warning('Empty filename in
49                             multipart/form-data request')
50             return jsonify({'error': 'Empty
51                             filename'}), 400
52
53         if file and allowed_file(file.filename):
54             try:
55                 img = Image.open(file.stream)
56             except Exception as e:
57                 logger.error(f'Error opening uploaded
58                     image file: {str(e)})')
59                 return jsonify({'error': 'Invalid
60                     image file'}), 400
61
62         else:
63             logger.warning(f'Invalid image format:
64                 {file.filename}')
65             return jsonify({'error': f'Invalid image
66                 format. Allowed: {"',
67                 ".join(Config.ALLOWED_EXTENSIONS)}"}),
68                 400
69
70         # Validate the image format
71         if img.format.lower() not in
72             Config.ALLOWED_EXTENSIONS:
73             logger.warning(f'Invalid image format:
74                 {img.format}')
75             return jsonify({'error': f'Invalid image
76                 format: {img.format}'}), 400
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
589
590
591
592
593
594
595
596
597
598
599
599
600
601
602
603
604
605
606
607
608
609
609
610
611
612
613
614
615
616
617
618
619
619
620
621
622
623
624
625
626
627
628
629
629
630
631
632
633
634
635
636
637
638
639
639
640
641
642
643
644
645
646
647
648
649
649
650
651
652
653
654
655
656
657
658
659
659
660
661
662
663
664
665
666
667
668
669
669
670
671
672
673
674
675
676
677
678
679
679
680
681
682
683
684
685
686
687
688
689
689
690
691
692
693
694
695
696
697
698
699
699
700
701
702
703
704
705
706
707
708
709
709
710
711
712
713
714
715
716
717
718
719
719
720
721
722
723
724
725
726
727
728
729
729
730
731
732
733
734
735
736
737
738
739
739
740
741
742
743
744
745
746
747
748
749
749
750
751
752
753
754
755
756
757
758
759
759
760
761
762
763
764
765
766
767
768
769
769
770
771
772
773
774
775
776
777
778
779
779
780
781
782
783
784
785
786
787
788
789
789
790
791
792
793
794
795
796
797
798
799
799
800
801
802
803
804
805
806
807
808
809
809
810
811
812
813
814
815
816
817
818
819
819
820
821
822
823
824
825
826
827
828
829
829
830
831
832
833
834
835
836
837
838
839
839
840
841
842
843
844
845
846
847
848
849
849
850
851
852
853
854
855
856
857
858
859
859
860
861
862
863
864
865
866
867
868
869
869
870
871
872
873
874
875
876
877
878
879
879
880
881
882
883
884
885
886
887
888
889
889
890
891
892
893
894
895
896
897
898
899
899
900
901
902
903
904
905
906
907
908
909
909
910
911
912
913
914
915
916
917
918
919
919
920
921
922
923
924
925
926
927
928
929
929
930
931
932
933
934
935
936
937
938
939
939
940
941
942
943
944
945
946
947
948
949
949
950
951
952
953
954
955
956
957
958
959
959
960
961
962
963
964
965
966
967
968
969
969
970
971
972
973
974
975
976
977
978
979
979
980
981
982
983
984
985
986
987
988
989
989
990
991
992
993
994
995
996
997
998
999
999
1000
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1088
1089
1090
1091
1092
1093
1094
1095
1096
1096
1097
1098
1099
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1187
1188
1189
1190
1191
1192
1193
1194
1195
1195
1196
1197
1198
1199
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1287
1288
1289
1290
1291
1292
1293
1294
1295
1295
1296
1297
1298
1299
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1387
1388
1389
1390
1391
1392
1393
1394
1394
1395
1396
1397
1398
1399
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1488
1489
1490
1491
1492
1493
1494
1495
1495
1496
1497
1498
1499
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1588
1589
1590
1591
1592
1593
1594
1595
1595
1596
1597
1598
1599
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1688
1689
1690
1691
1692
1693
1694
1695
1695
1696
1697
1698
1699
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1788
1789
1790
1791
1792
1793
1794
1795
1795
1796
1797
1798
1799
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1888
1889
1890
1891
1892
1893
1894
1895
1895
1896
1897
1898
1899
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1988
1989
1990
1991
1992
1993
1994
1995
1995
1996
1997
1998
1999
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2088
2089
2090
2091
2092
2093
2094
2095
2095
2096
2097
2098
2099
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2188
2189
2190
2191
2192
2193
2194
2195
2195
2196
2197
2198
2199
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2218
2219

```

```
62     # Optionally resize the image to reduce processing
       time
63     img.thumbnail((1024, 1024)) # Example: maximum
       size 1024x1024
64
65     # Save the image temporarily if required by the
       OCR tool
66     img_filename = "temp_ocr.png"
67     img_path = os.path.join(Config.UPLOAD_FOLDER,
       img_filename)
68     try:
69         img.save(img_path)
70     except Exception as e:
71         logger.error(f'Error saving temporary image:
           {str(e)}')
72     return jsonify({'error': 'Error saving
       image'}), 500
73
74     # Perform OCR using Tesseract
75     try:
76         extracted_text =
77             pytesseract.image_to_string(img,
       lang=Config.TESSERACT_LANG)
78         if not extracted_text.strip():
79             logger.warning('OCR could not extract any
               text')
80         return jsonify({'error': 'OCR could not
           extract any text'}), 400
81     except Exception as e:
82         logger.error(f'OCR processing error: {str(e)}')
83     return jsonify({'error': 'OCR processing
       error'}), 500
84
85     # Enhance the extracted text using the Ollama API
86     try:
87         improved_text =
88             improve_text_with_ollama(extracted_text,
       model='llama3.2')
89     except Exception as e:
90         logger.error(f'Error improving text with
           Ollama: {str(e)}')
91     return jsonify({'error': 'Error improving
       text'}), 500
92
```

```

91         return jsonify({
92             'raw_text': extracted_text,
93             'improved_text': improved_text
94         }), 200
95
96     except Exception as e:
97         logger.error(f'General error in OCR endpoint:
98             {str(e)}')
99
100    finally:
101        # Clean up the temporary image
102        if img_path and os.path.exists(img_path):
103            try:
104                os.remove(img_path)
105            except Exception as e:
106                logger.error(f'Error removing temporary
image: {str(e)}')

```

*Listing 8.3: OCR Endpoint*

This endpoint accepts image data in both JSON and multipart/form-data formats. It decodes the image, validates its format, and processes it using Optical Character Recognition (OCR). The raw text extracted from the image is then enhanced through the Ollama API, and both the original and improved texts are returned as part of the response. Additionally, the endpoint manages errors effectively and ensures that temporary image files are cleaned up after processing.

The following utility functions play a crucial role in the OCR process:

- `allowed_file`: Verifies whether the uploaded file has an allowed extension.
- `improve_text_with_ollama`: Sends the extracted text to the Ollama API for enhancement.
- `pytesseract.image_to_string`: Extracts text from images using the Tesseract OCR engine.

These functions are essential for processing image data, interfacing with external APIs, and ensuring the accuracy and reliability of the OCR workflow.

### 8.4.3. Programming Bot Endpoints

The Programming Bot endpoints manage all requests related to the Programming Bot functionality within the Student AI Hub and the Code Extension. These endpoints route user queries to the Ollama API and return code-based responses, tailored specifically for programming inquiries.

The following code snippet illustrates the endpoint for the Programming Bot:

```

1  @chat_bp.route('/ask_programming_bot', methods=['POST'])
2  def ask_programming_bot_endpoint():
3      """
4          Programming Bot Endpoint: Receives a user query,
5              communicates with Ollama, and returns the response.
6      """
7      data = request.get_json()
8
9      if not data:
10          logger.warning('No JSON data provided')
11          return jsonify({'error': 'No JSON data provided'}), 400
12
13      prompt = data.get('prompt')
14      model = data.get('model', 'qwen2.5-coder:0.5b')
15
16      if not prompt:
17          logger.warning('Prompt missing')
18          return jsonify({'error': 'Prompt missing'}), 400
19
20      try:
21          # Define a specialized system message for the
22          # programming bot
23          messages = [
24              {
25                  'role': 'system',
26                  'content': (

```

"You are an experienced programmer and technical advisor named Luminara. "  
           "Answer programming questions precisely and provide clear code examples in the requested programming language."

```

27             )
28         },
29     {
30         'role': 'user',
31         'content': prompt
32     }
33 ]
34
35 # Send the request to Ollama
36 response = chat(
37     model=model,
38     messages=messages,
39     stream=False
40 )
41
42 # Extract and clean the response
43 bot_response = response.message.content.strip()
44
45 if not bot_response:
46     logger.error('Ollama did not return a
47                 response.')
48     raise Exception('Ollama could not generate a
49                 response.')
50
51     return {'choices': [{'text': bot_response}]}
52
53 except ResponseError as e:
54     logger.error(f'Ollama ResponseError: {e.error}')
55     return jsonify({'error': f'Ollama API error:
56                 {e.error}'}), 500
57 except Exception as e:
58     logger.error(f'Ollama error: {str(e)}')
59     return jsonify({'error': str(e)}), 500

```

**Listing 8.4:** Programming Bot Endpoint

This endpoint follows a structure similar to other endpoints but includes modifications to the prompt to enhance the quality of the AI's response. A system message informs the AI that it is interacting with an experienced programmer and technical advisor named Luminara, which guides it to provide more accurate and context-specific answers. The endpoint handles the connection to the Ollama API, processes the response, and ensures that errors are logged and appropriately returned to the user.

## 8.5. Utility Functions

The utility functions presented in this section are fundamental to the operation of the Flask service. They execute critical tasks—such as interfacing with external APIs, processing data, and managing server resources—in a modular, reusable, and efficient manner. This design ensures that the service operates reliably and seamlessly.

### 8.5.1. Text Processing Utilities

The text processing utilities are used to enhance the quality and readability of text extracted from images or user queries. They leverage the Ollama API to refine the text, correct errors, and improve coherence, thereby enhancing the overall user experience.

**ask\_ollama** The `ask_ollama` function facilitates communication with the Ollama API to generate responses for user queries. It accepts a prompt along with an optional model parameter, dispatches the request to the Ollama API, and returns the resulting response.

The code snippet below demonstrates the implementation of the `ask_ollama` utility function:

```
1 def ask_ollama(prompt, model='llama3.2:1b'):
2     """
3         Sends the user prompt to the selected Ollama model and
4             returns the response.
5     """
6     try:
7         # Define the message structure
8         messages = [
9             {
10                 'role': 'system',
11                 'content': 'You are a helpful assistant.
12                     Please answer the following user query:'
13             },
14             {
15                 'role': 'user',
```

```

14             'content': prompt
15         }
16     ]
17
18     # Send the request to Ollama
19     response = chat(
20         model=model,
21         messages=messages,
22         stream=False
23     )
24
25     # Extract the response content
26     bot_response = response.message.content.strip()
27
28     if not bot_response:
29         logger.error('Ollama did not return any
30                     response.')
31         raise Exception('Ollama was unable to generate
32                     a response.')
33
34     return {'choices': [{'text': bot_response}]}
35
36 except ResponseError as e:
37     logger.error(f'Ollama ResponseError: {e.error}')
38     return {'error': f'Ollama API error: {e.error}'}
39 except Exception as e:
40     logger.error(f'Ollama error: {str(e)}')
41     return {'error': str(e)}

```

Listing 8.5: ask\_ollama Utility Function

This function encapsulates the logic necessary for transmitting user prompts to the Ollama API and processing the responses. It is engineered to handle diverse user queries, thereby generating accurate and contextually relevant answers. Consequently, it serves as a critical component underpinning the chatbot functionality of the Flask service.

**ask\_ollama\_vision** The `ask_ollama_vision` function augments the capabilities of the standard `ask_ollama` utility by incorporating support for image-based queries. It processes image data, integrates it with textual prompts, and dispatches the combined input to the Ollama Vision API for

response generation. This extension enables the Flask service to handle multimodal inputs, thereby broadening its applicability and enhancing user interaction.

The following code snippet demonstrates the implementation of the `ask_ollama_vision` function:

```
1 def ask_ollama_vision(prompt, model='llama3.2-vision',
2     image_paths=[]):
3     """
4         Dispatches the user's prompt along with associated
5             images to the selected Ollama Vision model,
6             and returns the generated response.
7     """
8     try:
9         # Define the message structure with associated
10            image paths
11         messages = [
12             {
13                 'role': 'user',
14                 'content': prompt,
15                 'images': image_paths # Attach image
16                     paths to the user message
17             }
18         ]
19
20         # Send the request to Ollama Vision
21         response = chat(
22             model=model,
23             messages=messages,
24             stream=False
25         )
26
27         # Extract the response content
28         bot_response = response.message.content.strip()
29
30         if not bot_response:
31             logger.error('Ollama did not return any
32                         response.')
33             raise Exception('Ollama was unable to generate
34                             a response.')
35
36         return {'choices': [{'text': bot_response}]}  
37
```

```

32     except ResponseError as e:
33         logger.error(f'Ollama ResponseError: {e.error}')
34         return {'error': f'Ollama API error: {e.error}'}
35     except Exception as e:
36         logger.error(f'Ollama error: {str(e)}')
37         return {'error': str(e)}

```

Listing 8.6: ask\_ollama\_vision Utility Function

This function is instrumental in enabling the Flask service to process and interpret image data in conjunction with textual prompts. By integrating image recognition capabilities, it enhances the service's versatility and responsiveness, thereby significantly enriching the overall user experience.

**improve\_text\_with\_ollama** The `improve_text_with_ollama` function is designed to refine text extracted through the OCR process by leveraging the Ollama API. It improves readability, grammar, and coherence, converting raw text into a well-structured Markdown format that is both clear and professionally formatted.

The code snippet below illustrates the implementation of the `improve_text_with_ollama` function:

```

1 def improve_text_with_ollama(text, model='llama3.2'):
2     """
3         Enhances the provided text using the Ollama API and
4             returns the refined Markdown text.
5     """
6     try:
7         # Define the message structure with system and
8             user roles to improve the text
9         messages = [
10             {
11                 'role': 'system',
12                 'content': (
13                     "You are a highly proficient text
14                         processor and Markdown expert. "
15                     "Your task is to enhance the following
16                         text, which has been extracted via
17                         OCR from an image, "
18                     "and convert it into a well-structured
19                         Markdown format. "

```

```
14             "Ensure correct spelling, grammar, and
15             syntax, and format the text using
16             appropriate Markdown elements "
17             "such as headings, lists, code blocks,
18             and emphasis. "
19             "Provide only the enhanced Markdown
20             text without any additional
21             commentary or explanations."
22         )
23     },
24     {
25         'role': 'user',
26         'content': (
27             "Here is the text to be processed:\n\n"
28             f"```\n{text}\n```"
29         )
30     }
31 ]
32
33 # Send the request to Ollama
34 response = chat(
35     model=model,
36     messages=messages,
37     stream=False
38 )
39
40 # Retrieve the improved text from the response
41 markdown_text = response.message.content.strip()
42
43 if not markdown_text:
44     logger.error('Ollama did not return any text.')
45     raise Exception('Ollama was unable to improve
46                     the text.')
47
48 return markdown_text
49
50 except ResponseError as e:
51     logger.error(f'Ollama ResponseError: {e.error}')
52     raise e
53 except Exception as e:
54     logger.error(f'Ollama error: {str(e)}')
55     raise e
```

**Listing 8.7:** `improve_text_with_ollama` Utility Function

This utility function plays a pivotal role in enhancing the quality and coherence of OCR-extracted content. By refining the raw text into a structured Markdown format, it ensures that the final output is both accurate and user-friendly, thereby improving the overall efficacy of the OCR workflow.

### 8.5.2. OCR (Optical Character Recognition) Utilities

This section details the OCR utilities integrated within the Flask service, which are responsible for processing images and extracting textual content. Currently, the primary function implemented is `perform_ocr`, which utilizes the `pytesseract` library to perform OCR operations.

**perform\_ocr** The `perform_ocr` function harnesses the Tesseract OCR engine to extract text from an image file. It accepts an image file path and an optional language parameter, processes the image, and returns the extracted text. The function is designed to handle a variety of image formats and ensures accurate text retrieval, thus streamlining the OCR workflow within the Flask service.

The code snippet below demonstrates the implementation of the `perform_ocr` function:

```
1 import pytesseract
2 from PIL import Image
3
4 def perform_ocr(image_path, lang='deu'):
5     """
6         Performs OCR on the specified image file and returns
7         the extracted text.
8     """
9     try:
10         # Load the image and convert it to grayscale
11         image = Image.open(image_path).convert('L')    #
12             Convert to grayscale
13
14         # Optional: Apply image preprocessing techniques
15             (e.g., denoising, thresholding, etc.)
16         custom_config = r'--oem 3 --psm 6'
```

```
14     text = pytesseract.image_to_string(image,
15         lang=lang, config=custom_config)
16     return text
17 except Exception as e:
18     logger.error(f'OCR error: {str(e)}')
19     raise e
```

Listing 8.8: perform\_ocr Utility Function

This function encapsulates the essential logic for image processing and text extraction using the Tesseract OCR engine. By leveraging robust libraries, it ensures that the Flask service can efficiently convert image-based data into readable text.

The key libraries utilized are:

**pytesseract:** A Python wrapper for Google's Tesseract-OCR Engine, used for extracting text from images via optical character recognition (OCR).

**PIL (Python Imaging Library):** An image processing library that enables the opening, manipulation, and saving of various image file formats, thereby enhancing Python's capabilities in handling visual data.

## 8.6. Deployment

The Flask service was deployed across multiple platforms to support comprehensive testing, evaluation, and integration with other system components. The deployment process involved configuring the server environment, establishing required dependencies, and ensuring seamless operation across various hosting infrastructures.

For development and testing, the Flask service is deployed locally on a laptop or desktop machine. This setup enables rapid iteration, feature testing, and effective troubleshooting in a controlled environment. Local deployment requires installing Python, setting up a virtual environment, and running the Flask server on the local system.

In production environments, the Flask service is hosted on dedicated servers or cloud platforms to ensure high availability, scalability, and reliability. This

approach enables the service to handle a high volume of requests and users efficiently. Production deployment typically involves meticulous server configuration, dependency management, and the implementation of robust security measures to mitigate potential threats.

To further streamline production deployment, a Docker container was developed. More information on the Docker-based deployment approach is provided in Section 8.7.

## 8.7. Docker

Docker is a platform that allows you to run applications in containers. A container is like a small, isolated environment where software runs with everything it needs – including the operating system, libraries, and dependencies.

No matter which computer or server the container runs on, it always works the same way. This means you don't have to worry about an application suddenly throwing errors on a different system just because a different software version is installed there.

Docker is often used in software development and cloud applications because it simplifies testing, deployment, and scaling of apps. Developers can store their software as images and share them with others without requiring complicated installations.

### 8.7.1. Used Docker Images

A docker image is a blueprint that specifies how to run the application. The instructions for the build are stored in the Dockerfile. *Dockerflask* (n.d.)

- **flask\_app** The Flask image is used to easily implement the Flask application in a Docker container.
- **ollama** The Ollama image is used to avoid running LLMs globally and use them in a secluded environment.

### 8.7.2. Docker Compose

Docker Compose is used for running multiple containers at the same time. It simplifies your application and makes it easier to manage. The Configuration is stored in a single YAML file. All the services can be started with a simple command. It is a very compact way to manage Docker application.

*Docker Compose (n.d.)*

## 8.8. Scalability and Performance Concerns

One notable limitation of the Flask server is its inherent lack of scalability. Flask, being primarily designed for lightweight applications, is not optimized for handling high volumes of concurrent requests. In our implementation, the server was deployed on a modest PC with limited computational resources. Consequently, if the service were to be deployed in a production environment, it would be imperative to migrate to more robust hardware or consider a distributed, multi-server architecture to effectively manage the anticipated load. Given the constraints of the project timeline and the prototype nature of this work, scalability was not prioritized during development.

## 8.9. Conclusion and Future Work

In summary, this chapter has detailed the architecture, functionality, and deployment strategy of the self-hosted Flask service. The design emphasizes modularity and expandability, allowing for rapid prototyping, tailored configurations, and seamless integration with external APIs. The clear separation of concerns across endpoints and utility functions ensures both maintainability and flexibility, which are essential for evolving project requirements.

However, practical limitations regarding scalability and performance on modest hardware were also noted. Addressing these challenges through

distributed architectures and enhanced concurrency mechanisms will be crucial for future deployments. As a result, future work should focus on optimizing resource management, scaling the service to meet higher demand, and further refining API integrations for improved robustness and security.

The next two chapters will delve into the front-end components of the Student AI Hub and the code extension, providing a comprehensive overview of their design, functionalities, and integration with the Flask service.



# 9. Intelligent Student AI Hub: An Integrated Learning Platform

**Authors:** Luna P. I. Schaetzle

This chapter presents an in-depth overview of the Intelligent Student AI Hub, a comprehensive web platform designed to empower students in exploring artificial intelligence (AI) concepts. The platform integrates state-of-the-art technologies and innovative features to facilitate both learning and practical experimentation in AI. The following sections detail the system architecture, core functionalities, and future directions for this educational tool.

## 9.1. Introduction

The Intelligent Student AI Hub provides a robust environment for students to learn about AI and its real-world applications. It offers a diverse range of educational resources—including articles, tutorials, and interactive tools—to foster a deep understanding of AI concepts. By combining engaging content with advanced technological integration, the platform aims to make AI accessible, dynamic, and relevant to learners at all levels.

## 9.2. System Architecture and Technologies

This section outlines the principal technologies that form the backbone of the Intelligent Student AI Hub. By employing a combination of modern

web frameworks and cloud-based services, the platform achieves a secure, scalable, and high-performance architecture.

### 9.2.1. Vue.js

The frontend of the platform is primarily developed using Vue.js—a progressive JavaScript framework renowned for its component-based structure and reactive data binding. Utilizing standard web technologies such as HTML, CSS, and JavaScript, Vue.js enables the creation of dynamic, single-page applications that are both modular and easy to maintain. For additional details on the implementation of Vue.js, please refer to Chapter 6, subsection "Vue.js."

### 9.2.2. Flask API

The backend infrastructure is powered by a custom-developed Flask API. This API manages client requests and facilitates communication with a suite of self-hosted AI models and tools. Through efficient data handling and secure request management, the Flask API forms a critical link between the frontend interface and the underlying AI services. More comprehensive insights into the backend architecture are available in Chapter 8.

### 9.2.3. ChatGPT API

To augment the platform's interactive capabilities, the Intelligent Student AI Hub integrates the ChatGPT API via the OpenAI library. This integration supports a sophisticated chatbot feature that enables students to ask questions and receive detailed, context-aware responses on a variety of AI-related topics. Further information on this integration can be found in Chapter 7, subsection "Integration of OpenAI's API."

## 9.2.4. Firebase for Authentication and Data Storage

For secure user management and efficient data handling, the platform employs Firebase services. Firebase Authentication provides a flexible and robust solution for verifying user identities through multiple sign-in methods—including email/password, third-party providers, and anonymous authentication. Additionally, Firebase's real-time database and Cloud Firestore facilitate scalable and responsive data storage, synchronization, and retrieval. The seamless integration of Firebase with Vue.js components ensures that user data and authentication states are managed in real time, enhancing both security and user experience.

*Firebase Features Explained in Detail (2025 Update)* (n.d.)

## 9.3. Core Functionalities

To get a comprehensive understanding of the Intelligent Student AI Hub, this section delves into its core functionalities and interactive features of the end product. Some of the key features of the platform include:

- **Interactive Chatbot for AI Questions:** The platform hosts an AI-powered chatbot that can answer a wide range of AI-related queries, providing students with instant access to information and explanations.
- **OpenAI Integration:** By integrating OpenAI's cutting-edge models, such as ChatGPT and DALL-E, the platform offers advanced AI capabilities for generating text and images, enhancing the learning experience.
- **Programming Bot for Different Languages:** A specialized bot is available to assist students in learning and practicing various programming languages, offering code snippets, explanations, and interactive coding exercises.
- **Image Recognition Tool:** The platform includes an image recognition tool that leverages AI algorithms to identify objects, scenes, and patterns within uploaded images, enabling students to explore computer vision concepts.

- **Image-to-Text Tool:** Students can utilize an image-to-text tool that converts text embedded within images into editable and searchable content, facilitating the extraction of information from visual data.
- **Saved Chats:** The platform allows users to save and revisit previous chat interactions with the AI chatbot, enabling seamless continuity in learning and knowledge retention.
- **User Profiles and Authentication:** Each user can create a personalized profile, manage their learning progress, and access customized content based on their preferences and history.

## 9.4. Authentication and User Profiles

For the Intelligent Student AI Hub, Firebase is a cornerstone technology for managing user authentication and profile creation, ensuring both secure access and a personalized user experience.

### 9.4.1. Why Firebase?

Although numerous alternatives exist for user authentication and data management, Firebase distinguishes itself through its comprehensive feature set, seamless integration, and robust security measures. Additionally, the abundance of tutorials and detailed documentation facilitates a swift onboarding process for the development team.

### 9.4.2. Firebase Authentication Factors

Implementing robust authentication and user profile management involves several critical aspects:

- **Firebase Authentication:** The platform leverages Firebase Authentication to facilitate secure user sign-in and verification. By supporting multiple authentication methods—including email/password,

social logins (e.g., Google, Facebook), and anonymous authentication—Firebase offers a versatile solution that adapts to diverse user needs while ensuring a seamless and reliable experience.

- **Real-time Data Synchronization:** Utilizing Firebase's Realtime Database and Cloud Firestore, the platform ensures that user data is consistently synchronized across all devices. This real-time updating mechanism provides immediate access to personalized content, settings, and user profiles, thus significantly enhancing user engagement.
- **Secure Data Handling:** Firebase incorporates robust security measures, including data encryption, secure authentication tokens, and finely tuned access control rules. These features work together to protect user data from unauthorized access, maintaining both data integrity and user privacy in accordance with best practices and regulatory requirements.
- **Integration with Vue.js Components:** The tight integration between Firebase and Vue.js enables dynamic data binding and responsive user interfaces. Leveraging Vue.js reactivity in combination with Firebase's real-time updates results in a fluid user experience, where UI elements automatically refresh to reflect the most current state of user data.
- **Future Enhancements:** As the platform evolves, additional features such as recommendation engines, learning analytics, and collaborative learning tools could be integrated. These enhancements would further tailor content to individual user needs and foster a more engaging and personalized educational environment.

#### 9.4.3. Firebase Integration with Vue.js

The integration of Firebase services within Vue.js is essential to achieving a seamless, interactive user experience on the Intelligent Student AI Hub. The process involves several key steps:

- **Installing the Firebase SDK:** The Firebase JavaScript SDK is added to the Vue.js project via package managers like npm or yarn, providing access to Firebase's suite of services directly within the application.
- **Initializing Firebase:** The SDK is initialized using project-specific configuration settings, including API keys, authentication methods,

and database URLs. This step establishes a secure connection between the Vue.js application and Firebase services.

- **Implementing Authentication:** Vue.js components integrate Firebase Authentication methods to handle various sign-in options. These components are responsible for managing user sessions and ensuring secure access to personalized content and features.
- **Managing User Profiles:** User-specific data—such as preferences, settings, and learning progress—is stored in Firebase databases. Vue.js components interact with these services to create, update, and retrieve profiles, with real-time synchronization ensuring that updates are reflected immediately across all user devices.
- **Handling Real-time Updates:** Vue.js reactivity is combined with Firebase's real-time data listeners. This ensures that any changes in user data trigger immediate UI updates, thereby providing a consistently accurate and current view of the user's profile and settings.
- **Implementing Security Rules:** Firebase security rules are configured to enforce strict access control policies. By restricting read and write permissions to authenticated users only, these rules help maintain data integrity and protect user privacy.

For the integration process, the VueJS Firebase library is utilized, streamlining the connection between Vue.js projects and Firebase. This library simplifies access to numerous Firebase features—including Authentication, Realtime Database, Firestore, Storage, and restricted pages for non-authenticated users—making it easier to implement a secure and efficient system.

#### 9.4.4. Implementation of Firebase Authentication

A robust implementation of Firebase Authentication within Vue.js involves both proper configuration and thoughtful component design. The following code snippets illustrate key aspects of this integration.

##### **Firebase Initialization and Authentication Setup:**

```

1 import firebase from 'firebase/app';
2 import 'firebase/auth';
3
4 // Firebase configuration object containing keys and
5 // identifiers
6 const firebaseConfig = {
7   apiKey: "YOUR_API_KEY",
8   authDomain: "YOUR_PROJECT_ID.firebaseio.com",
9   databaseURL: "https://YOUR_PROJECT_ID.firebaseio.com",
10  projectId: "YOUR_PROJECT_ID",
11  storageBucket: "YOUR_PROJECT_ID.appspot.com",
12  messagingSenderId: "YOUR_SENDER_ID",
13  appId: "YOUR_APP_ID"
14};
15
16 // Initialize Firebase with the configuration
17 firebase.initializeApp(firebaseConfig);
18
19 // Export the authentication module for use in Vue
20 // components
21 export const auth = firebase.auth();
22
23 // Monitor authentication state changes
24 auth.onAuthStateChanged(user => {
25   if (user) {
26     // User is signed in; update application state
27     // accordingly
28     console.log('User signed in:', user);
29   } else {
30     // User is signed out; update the UI to reflect
31     // sign-out state
32     console.log('No user is signed in.');
33   }
34 });

```

Listing 9.1: Initializing Firebase and setting up authentication

### Explanation:

- **Firebase Import and Configuration:** The Firebase modules are imported, and the application is initialized using a configuration object

that contains the necessary API keys and identifiers. This setup establishes the connection to Firebase services.

- **Authentication Monitoring:** The `onAuthStateChanged` listener is used to monitor changes in the user's authentication state. This enables the application to dynamically update its interface in response to sign-in or sign-out events.

### Vue.js Component Example with Authentication:

```

1 <template>
2   <div>
3     <!-- Display a welcome message if the user is
4       signed in -->
5     <h2 v-if="user">Welcome, {{ user.email }}</h2>
6     <!-- Otherwise, show the sign-in form -->
7     <div v-else>
8       <input v-model="email" placeholder="Email" />
9       <input v-model="password" type="password"
10         placeholder="Password" />
11       <button @click="signIn">Sign In</button>
12       <button @click="signInWithGoogle">Sign In with
13         Google</button>
14       <p v-if="errorMessage" class="error">{{
15         errorMessage }}</p>
16     </div>
17   </div>
18 </template>
19
20 <script>
21 import { auth } from '@firebase'; // Adjust the path
22   according to your project structure
23 import firebase from 'firebase/app';
24 import 'firebase/auth';
25
26 export default {
27   data() {
28     return {
29       email: '',
30       password: '',
31       user: null,
32       errorMessage: ''
33     };
34   },
35 }

```

```

30     created() {
31         // Listen for authentication state changes and
32         // update the component state
33         auth.onAuthStateChanged(user => {
34             this.user = user;
35         });
36     },
37     methods: {
38         signIn() {
39             // Attempt to sign in using the provided email
40             // and password
41             auth.signInWithEmailAndPassword(this.email,
42                 this.password)
43                 .then(credential => {
44                     this.user = credential.user;
45                     this.errorMessage = '';
46                 })
47                 .catch(error => {
48                     // Handle authentication errors by
49                     // updating the errorMessage state
50                     this.errorMessage = error.message;
51                     console.error("Authentication error:", error);
52                 });
53         },
54         signInWithGoogle() {
55             const provider = new
56                 firebase.auth.GoogleAuthProvider();
57             auth.signInWithPopup(provider)
58                 .then(result => {
59                     this.user = result.user;
60                     this.errorMessage = '';
61                 })
62                 .catch(error => {
63                     this.errorMessage = error.message;
64                     console.error("Google sign-in error:", error);
65                 });
66     }
67 };
68 </script>
69 <style scoped>

```

```

67 | .error {
68 |   color: red;
69 |   font-size: 0.9em;
70 |
71 |</style>
```

Listing 9.2: Vue.js component for user sign-in

### Explanation:

- **Conditional Rendering:** The template uses Vue.js directives (`v-if` and `v-else`) to conditionally display content based on whether a user is authenticated. A personalized welcome message is shown when the user is signed in, while a sign-in form is presented otherwise.
- **Data Binding and State Management:** The component's data properties (`email`, `password`, `user`, and `error` messages) are used to manage form inputs, the authenticated user state, and error messages.
- **Sign-In Method:** The `SignIn` method invokes Firebase Authentication's `signInWithEmailAndPassword` function. Proper error handling is implemented to provide feedback to the user in case of sign-in failures.
- **Real-time Authentication Updates:** The `onAuthStateChanged` listener, set up in the `created` hook, ensures that the component's state is kept in sync with the authentication status, thereby reflecting any changes immediately in the UI.
- **Google Sign-In:** The `signInWithGoogle` method demonstrates how to enable Google sign-in using Firebase's `GoogleAuthProvider`. This method follows a similar pattern to the email/password sign-in process.
- **Styling and Error Handling:** The component includes scoped styles for error messages and provides visual feedback to users when authentication errors occur.

### Best Practices and Future Considerations:

- **Error Handling and User Feedback:** Robust error handling is essential for providing clear user feedback and maintaining a secure application environment.

- **Scalability and Maintainability:** Modularizing the Firebase configuration and authentication logic allows for easier maintenance and future feature integrations, such as multi-factor authentication.
- **Security Enhancements:** Implementing advanced security measures, such as multi-factor authentication and periodic token refresh, can further enhance the platform's security posture.

Through these implementations, the Intelligent Student AI Hub not only provides secure authentication and personalized user experiences but also lays the groundwork for future enhancements in user engagement and data security.

#### 9.4.5. User Overview and Personalization

To enhance user engagement, the Intelligent Student AI Hub provides a personalized overview of each user's profile. This dedicated account management page consolidates essential information—including profile details, learning progress, and tailored recommendations—into a central hub that facilitates the management of user settings, preferences, and overall platform interactions.

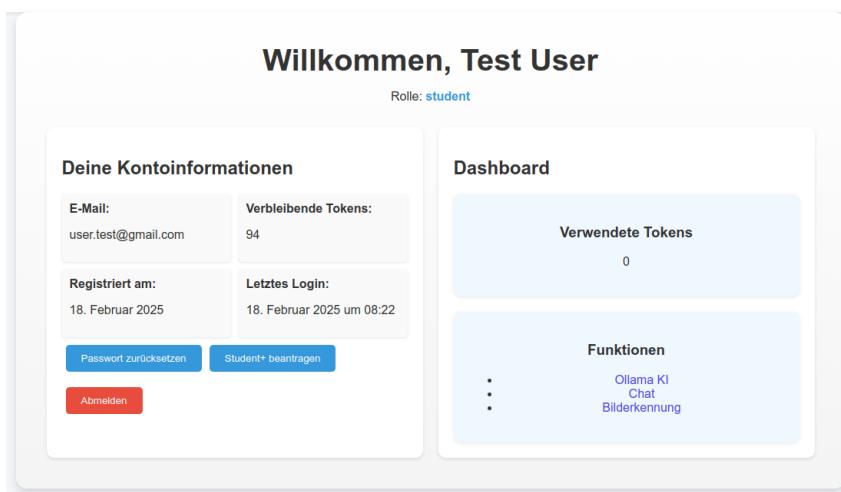


Figure 9.1.: User Account Management and Overview

#### 9.4.6. Outlook for Account Management

Looking forward, there is considerable potential to expand the account management functionality with advanced features, such as:

- **Enhanced Personalization:** Integration of sophisticated personalization tools, including dynamic content recommendations, curated learning paths, and detailed progress tracking, to provide a more tailored and effective learning experience.
- **Premium Account Options:** Introduction of premium account tiers that unlock advanced features and increase the allocation of request tokens for the ChatGPT API.
- **Social Integration:** Implementation of social login options, content sharing functionalities, and collaborative learning tools to foster a more interactive and community-driven environment.
- **Teacher Functionality:** Development of specialized tools for educators, enabling them to better manage classroom interactions and support student learning.
- **Administrator Dashboard:** Creation of a comprehensive administrative interface for efficient management of user accounts, content moderation, and platform analytics, thereby streamlining oversight and enhancing operational efficiency.

#### 9.4.7. TSN Integration

Every student at HTL is provided with a TSN email account, which serves as the primary communication channel within the institution. During the development of the Student AI Hub, integrating the TSN email account was considered as a potential feature. However, after careful evaluation, we decided against this integration for several critical reasons:

- **Security Concerns:** Incorporating the TSN email account would necessitate accessing sensitive user data. Without robust safeguards, this could significantly increase the risk of security breaches and data leakage.

- **Technical Complexity:** The integration would require the implementation of more sophisticated authentication mechanisms than those offered by Firebase. This added complexity could result in compatibility issues and pose significant challenges in terms of ongoing maintenance and support.
- **Impact on User Experience:** Requiring users to navigate additional authentication steps to access the platform could negatively affect the overall user experience. A more complicated login process may lead to reduced adoption rates and lower user satisfaction.
- **Regulatory and Compliance Challenges:** Ensuring compliance with data protection regulations and institutional policies would be more demanding with the TSN email integration. This approach would require addressing additional legal and technical considerations to maintain adherence to relevant standards.

## 9.5. Interactive Chatbot for Day-to-Day AI Questions

The objective of this feature is to provide students with immediate, context-aware responses to a broad spectrum of AI-related inquiries. To achieve this, the Intelligent Student AI Hub integrates multiple advanced Ollama AI models (e.g., LLaMA 3.2 and Mistral), enabling users to select the model that best fits the complexity and responsiveness required by their query. This modular approach ensures that students receive the most effective and contextually relevant answers, thereby enhancing their learning experience.

A self-hosted Flask API serves as the intermediary between the user interface and the Ollama API. This architecture allows the system to capture user input, forward the request to the selected AI model via the Flask API, and then relay the model's response back to the user in real time. The following abbreviated code listing illustrates the core implementation within a Vue.js component, demonstrating how the integration is achieved:

```
1 <template>
2   <div>
```

```

3      <!-- AI Model Selection -->
4      <select v-model="selectedModel">
5          <option value="llama3.2:1b">LLaMA 3.2 - 1B
6              (Fast)</option>
7          <option value="llama3.2">LLaMA 3.2 - 2B
8              (Latest)</option>
9          <!-- more Models -->
10     </select>
11     <!-- Chat Display -->
12     <div v-for="msg in currentChat.messages" :key="msg.id">
13         <p v-if="msg.type==='user'>{{ msg.text }}</p>
14         <p v-else>{{ msg.text }}</p>
15     </div>
16     <!-- User Input and Submission -->
17     <input v-model="userInput"
18             @keydown.enter="sendMessage" placeholder="Ask the
19             AI question..." />
20     <button @click="sendMessage">Send</button>
21 </div>
22 </template>
23
24 <script>
25 import axios from 'axios';
26 export default {
27     data() {
28         return {
29             userInput: '',
30             selectedModel: 'llama3.2:1b',
31             currentChat: { messages: [] },
32         };
33     },
34     methods: {
35         async sendMessage() {
36             if (!this.userInput.trim()) return;
37             // Append user message to chat
38             this.currentChat.messages.push({ id: Date.now(),
39                 type: 'user', text: this.userInput });
40             // Send the query to the Flask API
41             const response = await
42                 axios.post('http://server-address/ask_ollama', {
43                     prompt: this.userInput,
44                     model: this.selectedModel,
45                 });
46             // Append AI response to chat

```

```

41      this.currentChat.messages.push({ id: Date.now() ,
42          type: 'ollama', text:
43              response.data.choices[0].text });
44      this.userInput = '';
45  },
46 }
</script>

```

**Listing 9.3:** Abbreviated Vue.js Integration Example

This example demonstrates the fundamental components of the integration:

- **Model Selection:** A dropdown menu allows users to choose from various AI models, balancing speed and sophistication.
- **Real-Time Communication:** User inputs are captured and transmitted asynchronously to the Flask API, which then retrieves responses from the selected Ollama AI model.
- **Dynamic Chat Interface:** The chat interface updates dynamically with both user queries and AI responses, ensuring an engaging, real-time interaction.

By decoupling the frontend from the backend AI processing via a RESTful API, this design not only simplifies maintenance but also facilitates future scalability. New models or enhanced features can be integrated with minimal changes to the existing codebase, ensuring the platform remains adaptable to evolving educational needs.

## 9.6. OpenAI Integration

Given that locally hosted Ollama AI models may not achieve the same performance level as commercially available state-of-the-art solutions, the Intelligent Student AI Hub integrates advanced OpenAI models—such as ChatGPT and DALL-E—to deliver superior capabilities in text generation and image synthesis. This integration not only augments the quality of responses but also significantly enhances platform scalability. With the OpenAI API, scalability is effectively decoupled from hardware limitations,

unlike the self-hosted Ollama API, which is inherently constrained by the available computational resources.

### 9.6.1. ChatGPT API and Its Limitations

A primary limitation of the ChatGPT API is the cost associated with each API request. Every query incurs a fee that can rapidly accumulate with high usage volumes.

<b>GPT-4o</b> High-intelligence model for complex tasks   128k context length	<b>GPT-4o mini</b> Affordable small model for fast, everyday tasks   128k context length
<b>Price</b>	<b>Price</b>
Input: \$2.50 / 1M tokens	Input: \$0.150 / 1M tokens
Cached input: \$1.25 / 1M tokens	Cached input: \$0.075 / 1M tokens
Output: \$10.00 / 1M tokens	Output: \$0.600 / 1M tokens

Figure 9.2.: ChatGP API Pricing

#### Pricing | OpenAI (n.d.)

For instance, utilizing ChatGPT-4o Mini costs \$0.30 per million input tokens, whereas the full ChatGPT-4o model incurs a cost of \$3.75 per million input tokens equating to a 12.5-fold increase in expense (see Figure 9.2). <sup>1</sup>

Consequently, the development team has opted to restrict the use of the ChatGPT API. This measured approach enables students to benefit from ChatGPT's advanced functionalities while effectively managing costs. Moreover, it is more economical for the institution to subsidize access to the API than to provide every student with an individual premium account.

<sup>1</sup>Pricing data is current as of 17.02.2025 and may be subject to change.

## 9.6.2. User Access to Paid Services

Standard users are allocated a finite number of ChatGPT API requests per month, with these request tokens being replenished on a monthly basis. The number of tokens consumed per query is contingent upon the chosen model.

<sup>2</sup> Should a user exhaust their monthly token quota, they may alternatively direct their queries to the Ollama API. In addition to standard user access, premium, teacher, and administrator accounts are available, each benefiting from a higher monthly token allocation. Initially, all users are granted standard access; any desired upgrade to premium, teacher, or administrator status requires a formal request to the platform administration.

## 9.6.3. Integration of OpenAI's API

For a comprehensive guide on integrating OpenAI's API into a Vue.js project, please refer to Chapter 7, Section 7.6.3.

# 9.7. Programming Bot for Different Programming Languages

The Intelligent Student AI Hub incorporates a dedicated programming bot designed to facilitate the learning and practice of various programming languages. Building upon the foundational architecture of the general chatbot, this bot leverages code-centric large language models (LLMs) that have been specifically trained on source code. As with the standard chatbot, users can select from different models that are optimized for programming-related tasks.

## Programming Bot Features

Several enhancements have been integrated into the programming bot to improve its functionality and user experience:

---

<sup>2</sup>Token allocations and model thresholds are periodically adjusted in response to current pricing structures and monthly usage limits.

- **Programming Language Selection:** A dropdown menu enables users to specify the programming language for which they require assistance. The selected language is incorporated into the user's query—modifying the prompt sent to the LLM—to ensure that responses are tailored appropriately. This modification is handled on the backend via a dedicated Flask API endpoint.
- **Prompt Refinement:** An integrated "refine" option allows users to modify their initial query. By clicking the refine button, users can adjust their question, prompting the LLM to generate a more precise response.
- **Code Rendering and Clipboard Functionality:** The frontend renders responses in Markdown, which facilitates automatic syntax highlighting of code blocks. Additionally, a "copy to clipboard" feature is provided, enabling users to easily extract and reuse the code samples.

Further details regarding the backend implementation are provided in Chapter 8.

### Markdown for Code Formatting

Markdown is a lightweight markup language that supports plain-text formatting and can be easily converted into various output formats. Given that most LLM responses are delivered in Markdown, this feature simplifies the rendering of code with syntax highlighting. This approach is particularly useful for displaying well-formatted code snippets alongside explanatory text [Introduction to Markdown — Write the Docs \(n.d.\)](#).

**Illustrative Implementation Example:** The following abbreviated Vue.js component demonstrates the key aspects of the programming bot integration. This example illustrates how the user can select a programming language, refine their input, and receive formatted code output:

```
1 <template>
2   <div class="programming-bot">
3     <!-- Selection Area for Model and Programming Language
        -->
4     <div class="selection-area">
```

```

5   <select v-model="selectedModel">
6     <option value="modelA">Model A</option>
7     <option value="modelB">Model B</option>
8   </select>
9   <select v-model="selectedLanguage">
10    <option value="python">Python</option>
11    <option value="java">Java</option>
12  </select>
13 </div>
14 <!-- Chat Interface -->
15 <div class="chat-box">
16   <div v-for="msg in messages" :class="msg.type">{{ msg.text }}</div>
17 </div>
18 <!-- Input Area with Refine Option -->
19 <textarea v-model="userInput" placeholder="Enter your
20   programming question..."></textarea>
21 <button @click="sendMessage">Send</button>
22 <button v-if="isLastUserMessage"
23   @click="prepareRefine">Refine</button>
24 </div>
25 </template>
26
27 <script>
28 export default {
29   data() {
30     return {
31       userInput: '',
32       selectedModel: 'modelA',
33       selectedLanguage: 'python',
34       messages: [],
35     };
36   },
37   methods: {
38     async sendMessage() {
39       // Append the selected programming language to the
40       // user prompt
41       const prompt = `Language:
42         ${this.selectedLanguage}\n${this.userInput}`;
43       // Send the prompt to the Flask API and process the
44       // response...
45     },
46     prepareRefine() {
47       // Open a modal to refine the user prompt for

```

```

43         improved accuracy
44     }
45   };
46 </script>

```

Listing 9.4: Abbreviated Vue.js Component for the Programming Bot

This concise example encapsulates the core integration features: selecting a programming model and language, refining user input, and rendering code responses with Markdown-enhanced formatting.

## 9.8. Image Recognition Tool

The Intelligent Student AI Hub incorporates an image recognition feature by leveraging the Ollama API. This functionality allows users to upload images that are subsequently processed by a dedicated endpoint on the Flask API. Detailed information on the backend implementation is provided in Chapter 8. On the front end, a Vue.js component has been developed to facilitate image uploads and transmit them, along with user-provided prompts, to the Flask API for analysis.

### 9.8.1. Implementation of the Image Recognition Tool

The following abbreviated code listing illustrates the key elements of the Vue.js component responsible for handling image uploads and processing the API responses. This example provides an overview of how the component captures a text prompt, manages image upload (by converting the image to a Base64 string), and displays the response from the Flask backend.

```

1 <template>
2   <div class="image-recognition">
3     <h1>Upload Image and Send to Ollama</h1>
4     <!-- Text prompt input -->
5     <input v-model="userPrompt" placeholder="Enter a
        prompt..." @keydown.enter="sendRequest" />

```

```

6      <!-- File input for image upload -->
7      <input type="file" @change="handleImageUpload" />
8      <!-- Submission button -->
9      <button @click="sendRequest">Submit</button>
10     <!-- Status and response display -->
11     <div v-if="loading">Sending request...</div>
12     <div v-if="error">{{ error }}</div>
13     <div v-if="response">
14       <h3>Ollama Response:</h3>
15       <p>{{ response }}</p>
16     </div>
17   </div>
18 </template>
19
20 <script>
21 export default {
22   data() {
23     return {
24       userPrompt: "",
25       imageData: "",
26       loading: false,
27       error: "",
28       response: null
29     };
30   },
31   methods: {
32     handleImageUpload(event) {
33       const file = event.target.files[0];
34       const reader = new FileReader();
35       reader.onload = () => {
36         // Extract the Base64-encoded string from the data
37         // URL
38         this.imageData = reader.result.split(",")[1];
39       };
40       if (file) reader.readAsDataURL(file);
41     },
42     async sendRequest() {
43       if (!this.userPrompt || !this.imageData) {
44         this.error = "Both prompt and image are required!";
45         return;
46       }
47       this.loading = true;
48       // Send the prompt and image data to the Flask API
49       // (request details omitted)

```

```

48      // e.g., using axios.post(url, { prompt:
49          // this.userPrompt, image: this.imageData })
50          // Process the response and update this.response
51          // accordingly.
52          this.loading = false;
53      }
54  };
55  </script>

```

Listing 9.5: Abbreviated Vue.js Component for Image Recognition

In this implementation, the component first captures a user-defined text prompt and an image file. The image is converted into a Base64 string to facilitate secure and efficient data transmission. Once both inputs are validated, the component sends an HTTP request to the Flask API. The response from the backend typically a textual analysis or description generated by the Ollama API is then displayed to the user. This approach ensures a seamless and interactive experience for users engaging with the image recognition functionality.

## 9.9. Image to Text Tool

The Intelligent Student AI Hub incorporates a dedicated image-to-text tool designed to extract textual information from images. This feature first utilizes a text-to-image model to perform optical character recognition (OCR) on uploaded images. Once the raw text is extracted, a large language model (LLM) optimizes the content to enhance readability and clarity. The refined text is then presented in a clean, easily accessible format, and users have the option to copy the text to their clipboard for further use.

Figure 9.3<sup>3</sup> illustrates the user interface of the image-to-text tool, highlighting both the image upload mechanism and the display of the extracted text.

---

<sup>3</sup>The image-to-text tool is in German because the platform is designed for students at HTL in Austria.

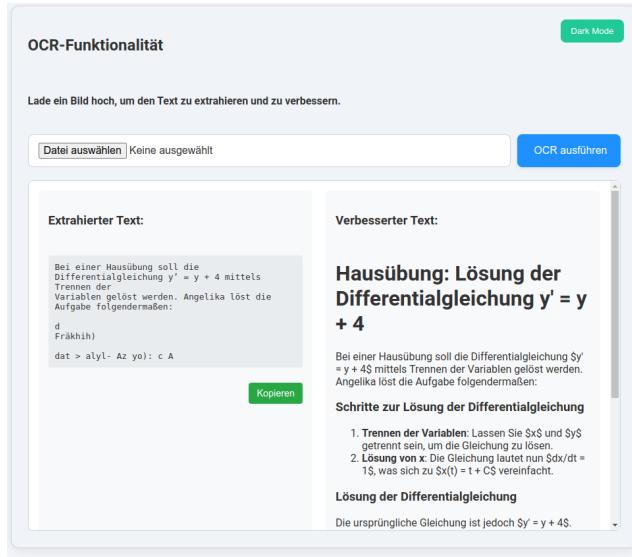


Figure 9.3.: Image to Text Tool

The following abbreviated code listing provides a high-level overview of the Vue.js component responsible for handling image uploads, invoking the OCR process via a Flask API, and displaying the processed text:

```

1 <template>
2   <div class="ocr-component">
3     <h2>OCR Functionality</h2>
4     <!-- Prompt Input & Image Upload -->
5     <input v-model="prompt" placeholder="Enter a
       prompt..." @keydown.enter="sendRequest" />
6     <input type="file" @change="handleImageUpload"
       accept="image/*" />
7     <button @click="sendRequest" :disabled="!selectedImage
       || loading">
8       Submit
9     </button>
10    <!-- Status and Result Display -->
11    <div v-if="loading">Processing image...</div>
12    <div v-if="error">{{ error }}</div>
13    <div v-if="rawText">
14      <h3>Extracted Text:</h3>
15      <pre>{{ rawText }}</pre>
16      <button @click="copyText(rawText)">Copy</button>

```

```

17      </div>
18      </div>
19  </template>
20
21  <script>
22  export default {
23    data() {
24      return {
25        prompt: "",
26        selectedImage: null,
27        rawText: "",
28        loading: false,
29        error: ""
30      };
31    },
32    methods: {
33      handleImageUpload(event) {
34        const file = event.target.files[0];
35        if (file) this.selectedImage = file;
36      },
37      async sendRequest() {
38        if (!this.prompt || !this.selectedImage) {
39          this.error = "Both prompt and image are required.";
40          return;
41        }
42        this.loading = true;
43        // Create FormData and send request to the Flask API
44        // Response processing updates rawText with
45        // extracted and optimized text
46        this.loading = false;
47      },
48      copyText(text) {
49        navigator.clipboard.writeText(text);
50      }
51    }
52  };
</script>

```

Listing 9.6: Abbreviated Vue.js Component for Image-to-Text Conversion

This Vue.js component encapsulates the core functionality of the image-to-text tool, enabling users to upload images, extract text content, and copy the processed text for further use. By combining OCR capabilities with large

language models, the platform delivers a powerful and user-friendly tool for extracting textual information from images.

For detailed backend implementation of this tool, please refer to Chapter 8, Section 8.4.

## 9.10. Saved Chats

To enhance user experience, the Intelligent Student AI Hub includes a feature that enables users to save their chat interactions with the AI chatbot. This functionality allows users to revisit previous conversations, review the information provided by the AI, and continue their learning journey from where they left off. To achieve this, chat data is stored in Firebase's Firestore database, ensuring scalable and secure management of user interactions.

### 9.10.1. Implementation of the Saved Chats Feature

The following abbreviated code snippet provides an overview of how chat messages are stored and retrieved from Firestore. This example demonstrates the core functionality, including loading the list of saved chats, displaying the current chat, and saving updates to Firestore.

```
1 <template>
2   <div class="chat-container">
3     <!-- Chat Window -->
4     <div class="chat-window" v-if="currentChat">
5       <div v-for="msg in currentChat.messages"
6         :key="msg.id" :class="msg.type">
7         <p v-if="msg.type === 'user'">{{ msg.text }}</p>
8         <div v-else
9           v-html="renderMarkdown(msg.text)"></div>
10      </div>
11    </div>
12    <!-- Sidebar for Saved Chats -->
13    <aside class="chat-sidebar">
14      <ul>
15        <li v-for="chat in chats" :key="chat.id"
16          @click="loadChat(chat.id)">
```

```

14         {{ chat.name }}}
15     </li>
16   </ul>
17   <button @click="startNewChat">+ New Chat</button>
18 </aside>
19 </div>
20 </template>
21
22 <script>
23 import firebase from 'firebase/app';
24 import 'firebase/firestore';
25
26 export default {
27   data() {
28     return {
29       chats: [],
30       currentChat: null
31     };
32   },
33   methods: {
34     async loadChatList() {
35       const snapshot = await
36         firebase.firestore().collection('chats').get();
37       this.chats = snapshot.docs.map(doc => ({ id: doc.id,
38         ...doc.data() }));
39     },
40     async loadChat(chatId) {
41       const doc = await
42         firebase.firestore().collection('chats').doc(chatId).get();
43       this.currentChat = { id: doc.id, ...doc.data() };
44     },
45     async saveChat() {
46       if (this.currentChat) {
47         await
48           firebase.firestore().collection('chats').doc(this.currentChat.id)
49             .set(this.currentChat);
50       }
51     },
52     startNewChat() {
53       // Create a new chat session and persist it to
54       // Firestore.
55     },
56     renderMarkdown(text) {
57       // Convert Markdown text to HTML.
58     }
59   }
60 }

```

```

53      }
54    },
55    mounted() {
56      this.loadChatList();
57    }
58  };
59 </script>

```

**Listing 9.7: Abbreviated Implementation of the Saved Chats Feature**

This concise implementation outlines how the platform leverages Firestore to manage and persist chat sessions, providing users with a seamless and consistent learning experience.

## 9.11. Structured and Intuitive Navigation

The platform's navigation is designed to ensure that users can efficiently access desired content and features. To achieve this, the primary components of the platform are placed in the main navigation bar at the top of the page. These key elements include:

- Home: Overview of the platform
- Account: User Profile
- Chat Bots: Selection of available chat bots
- OCR: Image-to-Text Conversion
- OpenAI Image: Image Generation with OpenAI
- Logout



**Figure 9.4.: Main Navigation Bar**

To enhance usability when interacting with chat bots, the platform provides a dedicated Chat Bot Section. Within this section, users can select from different chat bots via a navigation bar located on the left side of the page, ensuring an intuitive and structured browsing experience.

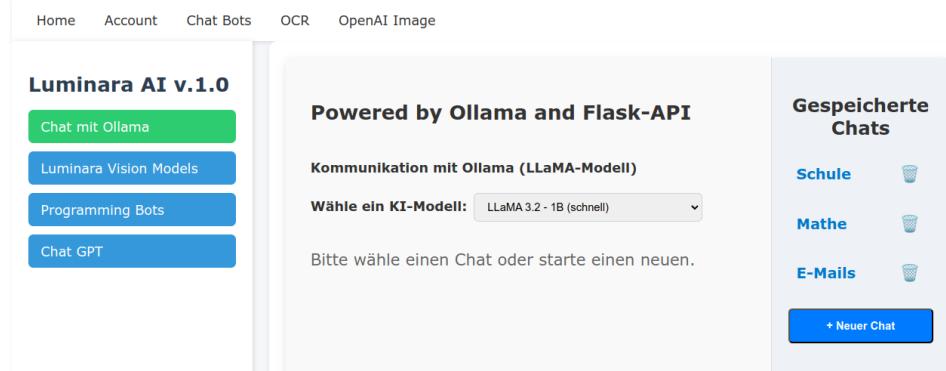


Figure 9.5.: Chat Bot Navigation

## 9.12. Styling and Theming

The platform's design follows a clean and modern aesthetic. To achieve this, a light and contemporary color scheme has been implemented. The background is predominantly white, with blue serving as the primary accent color and green used for highlights. For instance, buttons are styled in blue, while the currently selected chat bot is indicated in green. As seen in Figure 9.4 and Figure 9.5.

Most of the styling was implemented using a CSS framework, with initial specifications defined by the development team. These were later refined with the assistance of AI tools, including ChatGPT (versions 3.5, 4, 40, and 01) as well as GitHub Copilot.

## 9.13. Features Excluded from the Final Version

Due to the limited development time and the emphasis on core functionalities, several planned features were not incorporated into the final version of the Student AI Hub. These include:

- **Multilingual Website:** While the platform currently supports multiple languages for the chatbot, the website itself is only available in German.
- **Chat Transcripts:** A feature designed to convert a user's chat history into a downloadable transcript for review and reference.
- **Test Preparation:** A module intended to generate practice tests and quizzes based on user preferences and learning progress.
- **Learning Analytics:** Tools for tracking and analyzing user learning patterns, progress, and areas for improvement.
- **Collaborative Learning:** Features enabling users to collaborate on projects, share knowledge, and engage in group learning activities.
- **Enhanced User Profiles:** Additional profile customization options, learning preferences, and progress tracking capabilities.
- **Dark Mode:** An alternative color scheme for the platform to reduce eye strain and improve readability in low-light environments.

The majority of these planned features were not implemented due to their time-intensive nature. For instance, the development of a multilingual website would have required extensive effort to translate and maintain all website content.

## 9.14. Conclusion

The Intelligent Student AI Hub represents a significant advancement in educational technology, providing students with a comprehensive and interactive platform to explore and learn about artificial intelligence. By integrating state-of-the-art technologies such as Vue.js, Flask, Firebase, and advanced AI models from OpenAI and Ollama, the platform offers a robust and scalable solution for AI education.

The core functionalities—including interactive chatbots, programming assistance, image recognition, and image-to-text conversion are designed to enhance the learning experience by making complex AI concepts accessible and engaging. The secure and personalized user management system, powered by Firebase, ensures that users can safely interact with the platform while enjoying a tailored educational journey.

While some planned features were not included in the final version due to time constraints, the platform's modular architecture allows for future enhancements and scalability. Potential future developments include multilingual support, collaborative learning tools, and advanced learning analytics, which will further enrich the educational experience.

In summary, the Intelligent Student AI Hub exemplifies the transformative potential of integrating contemporary web technologies with artificial intelligence to cultivate a dynamic and effective learning environment. This platform not only enables students to explore the realm of AI but also establishes a foundation for ongoing enhancement and innovation in educational tools.

# 10. Visual Studio code extension

**Author:** Florian Prandstetter

## 10.1. Introduction

This chapter provides an overview of the Visual Studio Code extension developed for the project. It describes its core functionality, and explains how it integrates with the broader system architecture.

## 10.2. what is Visual Studio Code

Visual Studio Code is a free code editor from Microsoft. It supports many programming languages such as Python, JavaScript, and C++.

A major advantage of VS Code is its extensibility. With extensions, you can customize the editor, for example, with debugging tools, themes, or special functions for specific programming languages. It also offers features like auto-completion, integrated Git support, and a built-in terminal function.

VS Code is lightweight and runs on Windows, macOS, and Linux. Despite this, it provides many features that are also found in a full-fledged integrated development environment. This makes it perfect for both beginners and professionals.

## 10.3. Development

### 10.3.1. Technologies used

- TypeScript: The Visual Studio Code extension was developed using TypeScript. TypeScript is well-suited for developing VS Code extensions, as it provides type checking and code completion, making it easier to work with the VS Code API.
- Axios: Axios is used to make HTTP requests from the extension to the Flask Service. It provides an easy implementation of asynchronous requests and simplifies handling responses.
- Visual Studio Code API: The extension interacts with the Visual Studio Code API. The API allows the extension to access and modify the editor's functionality, enabling it to provide a seamless development experience.

## 10.4. Core Functionality

The planned core functionality of the extension is an integrated chatbot, that can answer questions without leaving the IDE. The chatbot should send the request to the server where the prompt is executed. Then the response is directly sent to the chat in the IDE.

### 10.4.1. Chat

The chat is integrated into the IDE with a webview. Webviews are a tool provided by the VS Code API. They can be used to implement various GUIs into the IDE.

The following code, defines the properties of the Webview and initiates the GUI.

```
1 // defining the properties of the webview
2 const panel = vscode.window.createWebviewPanel(
```

```

4   'inlineChat', // Identifier
5   'Inline Chat', // Title
6   vscode.ViewColumn.Beside, // Position
7   {
8     enableScripts: true, // Allow JavaScript
9     retainContextWhenHidden: true, // Keep the webview
10    state
11  }
12
13 //executing the getWebviewContent function to implemnt
14 // the GUI
14 panel.webview.html = getWebviewContent();

```

Listing 10.1: Create webview

The `getWebviewContent` function defines the HTML and CSS elements of the Webview. It also defines the interactions fo the GUI with the TypeScript code.

```

1
2   function getWebviewContent(): string {
3     return `
4       <!DOCTYPE html>
5       <html lang="en">
6         <head>
7           <meta charset="UTF-8">
8           <meta name="viewport"
9             content="width=device-width,
10               initial-scale=1.0">
11           <title>Inline Chat</title>
12
13           <style>
14             <!--Style for the Chatbot -->
15           </style>
16
17         </head>
18         <body>
19           <!--Button to switch between dark and light
20             mode -->
21           <button class="mode-switch"
22             id="modeSwitch">Switch to Dark Mode</button>

```

```
21      <!--Container for the message -->
22      <div class="chat-container">
23          <div class="messages" id="messages"></div>
24          <div class="input-box">
25              <input type="text" id="input"
26                  placeholder="Type your message..." />
27              <button id="send">Send</button>
28          </div>
29      </div>
30
31      <!--Backend logic for the chat -->
32      <script>
33          const vscode = acquireVsCodeApi();
34
35          <!--Sends the message and updates the GUI -->
36          document.getElementById('send').addEventListener('click',
37              () => {
38                  const input =
39                      document.getElementById('input');
40                  const message = input.value.trim();
41                  if (message) {
42                      vscode.postMessage({ command:
43                          'sendMessage', text: message });
44
45                  <!--Add user message to chat display -->
46
47                  const messagesDiv =
48                      document.getElementById('messages');
49                  const newMessage =
50                      document.createElement('div');
51                  newMessage.className = 'message';
52                  newMessage.textContent = message;
53                  messagesDiv.appendChild(newMessage);
54
55                  <!--Scroll to the latest message -->
56                  messagesDiv.scrollTop =
57                      messagesDiv.scrollHeight;
58
59                  input.value = '';
60              }
61          });
62
63          <!--Logic for dark and lightmode switch -->
64          document.getElementById('modeSwitch').addEventListener('c
```

```

58      () => {
59        const body = document.body;
60        const modeSwitch =
61          document.getElementById('modeSwitch');
62
63        if (body.classList.contains('dark-mode')) {
64          body.classList.remove('dark-mode');
65          modeSwitch.textContent = 'Switch to Dark
66            Mode';
67        } else {
68          body.classList.add('dark-mode');
69          modeSwitch.textContent = 'Switch to
70            Light Mode';
71        }
72      );
73
74      <!--Handles the display of the reply message
75      -->
76      window.addEventListener('message', (event)
77        => {
78        const message = event.data;
79        if (message.command === 'displayReply') {
80          const messagesDiv =
81            document.getElementById('messages');
82          const newReply =
83            document.createElement('div');
84          newReply.className = 'bot-reply';
85          newReply.textContent = message.text;
86          messagesDiv.appendChild(newReply);
87
88          <!--Scroll to the latest message -->
89          messagesDiv.scrollTop =
90            messagesDiv.scrollHeight;
91        }
92      });
93    
```

Listing 10.2: IDE Chat GUI

## 10.4.2. Server Request

After the user clicks send in the chats GUI, the `onDidReceiveMessage` command is executed. This command initiates the server request. It also defines the payload that the server receives. The payload contains the question asked, as well as the `baseprompt` defined by the developers.

The request to the server is handled with Axios. Axios sends the respond to one of the flask service endpoints that are hosted on the server.<sup>8</sup>

After the response reaches the client, the responses text is displayed in the chat GUI. On a failed request an error message is displayed.

```
1 // executes when the "send" button is clicked in the
2 // GUI
3 panel.webview.onDidReceiveMessage(
4     async (message) => {
5         if (message.command === 'sendMessage') {
6             //defines the payload that is sent
7             const payload = {
8                 model: 'qwen2.5-coder:0.5b',
9                 prompt: message.text
10            };
11
12        try {
13            const response = await
14                axios.post('http://10.10.11.11:5001/ask_programming_bot',
15                payload); //Selecting the endpoint for the
16                request and sending the payload.
17            const reply = await response.data.choices[0].text;
18                //the response is then stored in the "reply"
19                variable
20
21            //formating the reply and showing it in the editor
22            editor.edit((editBuilder) => {
23                reply.split('`').forEach((reply: string) => {
24                    editBuilder.insert(position, `\\n # ${reply}
25                    \\n`);
26                });
27            });
28
29            // Send the reply to the webview to display it
30            panel.webview.postMessage({
```

```

24         command: 'displayReply',
25         text: reply.split('`').map((reply: string) =>
26             reply)
27     );
28
29     //Display and error message on failed request
30     } catch (error) {
31         vscode.window.showErrorMessage('Failed to get
            response from the server.');
31

```

Listing 10.3: Axios request

### 10.4.3. Status Bar Item

The extension also provides a status bar button that can be used to open the chat.

In the following code the Status Bar Item is created and the commands are registered.

```

1 //Creates a status bar item
2 const commandId = 'luminara-coworker.statusBarClicked';
3
4 //Registers the command
5 context.subscriptions.push(vscode.commands.registerCommand(commandId,
6     async () => {
7         // Defines the options of the Quick Pick menu
8         const pageType = await vscode.window.showQuickPick(
9             ['Message', 'Chat GPT-04', 'Chat Ollama', 'Inline
                chat'],
10            { placeHolder: 'select a function' });
11

```

Listing 10.4: Status Bar

To assign a command it first has to be registered into the extension. This is done at the start of every TypeScript file that defines a command.

```

1
2 export async function createInlineChat(context:
    vscode.ExtensionContext) {
3

```

```

4   const disposable =
5     vscode.commands.registerCommand('luminara_coworker.startInlineChat',
6       () => {
7         // Code for the Command
8       }

```

Listing 10.5: registering Command

After registering a command it can be assigned to the status bar. After selecting the command the defined code will be executed.

```

1 if (pageType === 'Inline chat') {
2
3   vscode.commands.executeCommand("luminara_coworker.startInlineChat")
4 }

```

Listing 10.6: assigning Command

#### 10.4.4. Deploying the Extension

After programming all the necessary components for the extension, they have to be registered into the extension.ts file. There they can be assigned to a specific extenstion context. Only files that are registered in the activate function are deployed when the extension is started.

```

1
2   export function activate(context:
3     vscode.ExtensionContext) {
4
5     console.log('Congratulations, your extension
6       "luminara-coworker" is now active!');
7
8     const disposable =
9       vscode.commands.registerCommand('luminara-coworker.helloWorld',
10         () => {
11           vscode.window.showInformationMessage('Hello World from
12             luminara_coworker!');
13         });
14
15     createStatusBarItem(context);
16     luminaraChat(context);
17     luminaraChatOllama(context);

```

```
13     createInlineChat(context);  
14  
15  
16  
17     context.subscriptions.push(disposable);  
18 }
```

Listing 10.7: Deploying the Extension

## 10.5. Conclusion

The Visual Studio Code extension provides a seamless integration of the chatbot functionality into the IDE. By leveraging the VS Code API and Axios, the extension enables users to interact with the chatbot directly within the editor, enhancing the development experience. The extension's core features, such as the chat interface and server request handling, are designed to streamline the user's workflow and provide quick access to AI-powered assistance.



## Part V.

# Economic analysis of the AI market and related fields



# 11. Artificial Intelligence in Economics

**Author:** Florian Prandstetter **Author:** Luna Schaetzle

## 11.1. Introduction

In this chapter, we explore the role of artificial intelligence in economics and its impact on various sectors of the economy. We discuss the potential benefits and challenges of integrating AI technologies into economic processes, as well as the implications for businesses, consumers, and policymakers. Furthermore, we examine the current applications of AI in economics and highlight key trends that are shaping the future of this field.

## 11.2. The Role of AI in Economics

AI has revolutionized many fields of Economics. It offers a wide range of tools that can be implemented into a company's workflow. AI can be used to optimize production processes, improve supply chain management, and enhance customer service. It can also help businesses make more informed decisions by analyzing large amounts of data and identifying patterns and trends that would be difficult for humans to detect. In addition, AI can be used to automate repetitive tasks, freeing up employees to focus on more strategic activities.

## 11.3. Risks of AI

While the various benefits of AI seem promising, there are also risks associated with its implementation in economics.

One of the main concerns is the potential for job displacement, as AI technologies have the potential to automate many tasks that are currently performed by humans. This could lead to widespread unemployment and economic instability if not managed properly.

Additionally, there are ethical concerns related to the use of AI in economics, such as bias in algorithms and the potential for misuse of personal data.

It is essential for businesses and policymakers to address these risks and develop strategies to mitigate them effectively.

[Dizikes \(2024\)](#)

## 11.4. Benefits of AI use

But despite the risks, the benefits of AI are numerous. It can help businesses increase their efficiency and productivity.

[Office \(2024\)](#) [DigitalDefynd \(2024\)](#)

### 11.4.1. Data Analysis

One of the most significant benefits of AI in economics is its ability to analyze large amounts of data quickly and accurately. This can help businesses identify trends and patterns that would be difficult for humans to detect, allowing them to make more informed decisions.

[Houbrechts \(2024\)](#)

### 11.4.2. Automation

AI can also be used to automate repetitive tasks, thus freeing up employees to focus on more important activities. This can help businesses increase their productivity and reduce costs.

[IBM \(2021\)](#)

### 11.4.3. Ressource allocation

In sectors like manufacturing and agriculture, AI can assist in an optimal distribution of the resources. The amount of waste reduced and the cost efficiency could be increased significantly.

## 11.5. Applications of AI

### 11.5.1. Customer Service

### 11.5.2. Supply Chain Management

### 11.5.3. Predictive Analytics

## 11.6. Conclusion



# 12. Open source evaluation on Economics

**Author:** Luna Schätzle

## 12.1. Introduction

This chapter introduces the concept of open source and highlights its significance in the modern economy. Key aspects such as the advantages and disadvantages of open source, as well as the challenges associated with its adoption and creation, are discussed. Additionally, the chapter explores revenue models within the open source ecosystem and its role in economic systems. Finally, the chapter concludes by presenting the open source tools utilized in this project, alongside a reflection on the experiences gained through their application.

### 12.1.1. What is open source?

Open source represents a collaborative and transparent approach to software development and distribution, where the source code is made publicly accessible. This philosophy empowers users not only to utilize the software but also to modify, improve, and redistribute it freely. By fostering an environment of openness and collaboration, open source drives innovation and democratizes access to technology.

Linus Torvalds, the creator of the Linux operating system, encapsulated this spirit of freedom and collaboration with his famous remark:

*“Software is like sex: it’s better when it’s free.”*

?

This statement highlights the fundamental ethos of open source the belief that open access and shared knowledge result in better, more impactful solutions.

The development process for open source software is often a collective effort, with contributions from diverse communities of developers, users, and organizations. These collaborative efforts enhance the software's functionality, security, and usability, resulting in products that are robust and adaptable. Prominent examples include the Linux operating system, the Apache web server, and the Firefox web browser, all of which have significantly influenced technological innovation and market dynamics.

[OpenSource.com \(2024\)](#)

### 12.1.2. Advantages of open source

Open source software offers a wide range of benefits, making it a cornerstone of modern technology:

- **Cost Efficiency:** Open source software is typically free of charge, helping organizations and individuals save on licensing and maintenance costs.
- **Flexibility:** Users can access the source code, enabling them to tailor the software to their specific needs and requirements.
- **Security:** The open nature of the source code allows for peer review, ensuring vulnerabilities are identified and addressed promptly.
- **Community Support:** Open source projects often benefit from vibrant developer communities, providing updates, patches, and user assistance.
- **Innovation:** The collaborative ecosystem of open source encourages creativity, leading to groundbreaking solutions and advancements.
- **Compatibility:** Many open source projects are designed to integrate seamlessly with existing systems, reducing technical barriers.

- **Transparency:** Open access to the source code ensures that users can understand and verify how the software operates.
- **Freedom:** Users are granted the liberty to use, modify, and share the software without restrictive licensing agreements.

*10 biggest advantages of open-source software (2022) The Pros and Cons of Open-Source Software: A Guide for Developers and Executives (2023)*

### 12.1.3. Why Do People Use open source?

The adoption of open source software is motivated by several compelling factors:

- **Control:** Users gain full control over the software, enabling customization and optimization for specific use cases.
- **Cost Savings:** The absence of licensing fees significantly reduces expenses, making open source particularly attractive for startups and educational institutions.
- **Security:** Transparency in the source code allows for thorough auditing, enhancing trust and reliability.
- **Community:** The collaborative spirit of open source connects users with knowledgeable communities that share resources and support.
- **Stability:** Many open source projects offer long-term support and regular updates, ensuring reliability over time.
- **Skill Development:** Learning and using open source tools are valuable in educational and professional contexts, equipping individuals with in-demand skills.

## 12.2. What is and isn't open source?

### 12.2.1. Definition and Guiding Principles

Open source, as defined by the open source Initiative (OSI), is a development approach that prioritizes accessibility and transparency of software source

code. It allows users to view, modify, and distribute the code freely, fostering collaboration and innovation.

The OSI outlines several key principles that define open source software:

- **Free Redistribution:** The software can be freely shared and distributed without restrictions.
- **Source Code Access:** Users must have access to the source code to study, modify, and improve the software.
- **Modification and Sharing:** Users are allowed to create and share modified versions, as long as they follow the license terms.
- **No Discrimination:** The software must be available for everyone, regardless of individual characteristics or professional field.
- **Neutrality and Compatibility:** The license must not favor specific technologies or restrict the use of other software.

These principles ensure that open source remains a transparent, inclusive, and adaptable approach to software development, enabling innovation and collaboration across industries and communities.

[Initiative \(2007\)](#)

### 12.2.2. Misconceptions About open source

Open source is often misunderstood and confused with other software distribution models, which can lead to misconceptions about its nature, functionality, and benefits. It is crucial to distinguish open source from other types of software:

- **Open source:** Software that is freely accessible, modifiable, and redistributable under an open source license, adhering to principles such as transparency and collaboration.
- **Freeware:** Software available at no cost but typically without access to the source code, meaning users cannot modify or redistribute it.
- **Proprietary Software:** Software owned and controlled by a single entity, restricting access to the source code and preventing users from making modifications or redistributions.

- **Commercial Software:** Software sold for profit, which may be either open source or proprietary, depending on the licensing terms.

Understanding these distinctions helps users make informed choices about software selection and ensures their expectations align with the capabilities and freedoms provided by the chosen software.

To verify whether a software is truly open source, it is essential to examine the license agreement and confirm the availability of the source code. Software with an OSI-approved license is a reliable indicator that it adheres to open source principles, providing transparency, freedom, and collaboration opportunities.

One common misconception about open source software arises from the phrase "free as in freedom" versus "free as in free beer." While "free as in freedom" emphasizes the liberty to access, modify, and share the software, "free as in free beer" simply denotes that the software is free of cost. Although open source software is often available without charge, its true value lies in the freedom it grants to users, developers, and organizations. This distinction highlights the broader significance of open source as a philosophy, not just a pricing model.

Forbes Technology Council (2024)

## 12.3. Challenges and Disadvantages of open source Software

Although open source software provides numerous advantages, it also presents several challenges that can affect its adoption, development, and sustainability. The following sections outline the primary disadvantages and challenges encountered in open source environments.

### 12.3.1. Disadvantages of open source Software

Key drawbacks associated with open source software include:

- **Limited Support:** Many open source projects lack dedicated support teams, often resulting in slower response times for bug fixes and technical issues.
- **Reliance on Hobby Developers:** Projects maintained by volunteers or hobbyists may experience irregular updates and inconsistent maintenance.
- **Fragmentation:** The decentralized development model can lead to fragmentation, with multiple versions and distributions causing compatibility challenges.
- **Reduced Feature Set:** Certain open source applications might not offer the advanced features or functionalities that are common in commercial alternatives.

[Mathpati \(2023\)](#)

### 12.3.2. Technical Challenges

Integrating open source software into a project requires adequate technical expertise to understand, modify, and deploy the software effectively. When in-house expertise is insufficient, organizations may need to hire external developers or consultants. Although this can help prevent technical issues and ensure successful integration, it may increase overall costs. In some cases, proprietary software—despite being more expensive—offers easier integration due to dedicated support and streamlined installation processes.

### 12.3.3. Economic Challenges

While open source software is generally free to use, significant costs may arise from its implementation, customization, maintenance, and support. These expenses can accumulate over time, especially when frequent updates or extensive customization are required. Outsourcing technical support can help mitigate these economic challenges, but it may not be a viable solution for every organization.

### 12.3.4. Social Challenges

The collaborative nature of open source development, which depends on contributions from a diverse community of developers and organizations, can lead to an ambiguous support structure. This lack of clarity often makes it difficult for companies to identify the appropriate contact for assistance, potentially causing delays in addressing technical issues and adversely affecting project outcomes.

### 12.3.5. Legal Challenges

Navigating the legal landscape of open source software can be complex, largely due to the variety of licensing models (e.g., GPL, MIT, Apache) that impose different obligations and restrictions. Ensuring compliance with these licenses demands a thorough understanding of their terms, which can be both time-consuming and legally challenging. Failure to adhere to license conditions may result in legal disputes, costly litigation, and damage to an organization's reputation. It is therefore crucial to educate team members on compliance requirements and establish robust processes for managing open source software usage.

*The Legal Side of Open Source | Open Source Guides (2025)*

#### Overview of License Models

A license is a legal instrument that defines the conditions under which a work may be used, modified, and distributed, thereby outlining the rights and obligations of both the licensor and the licensee.

#### Open-Source Licenses

Open source licenses are a specific type of software license that promotes collaborative development by allowing unrestricted use, modification, and sharing of the software. Their main features include:

- **Unrestricted Use:** The software may be used for any purpose without limitations.
- **Source Code Access:** Availability of the source code enables users to inspect, modify, and enhance the software.
- **Redistribution Rights:** Users can distribute the original or modified versions of the software, thereby fostering community-driven development.

Notable examples include the GNU General Public License (GPL), which mandates that all modifications remain open source; the permissive MIT License, which imposes minimal restrictions; and the Apache License, which provides a balance between flexibility and patent protection. The choice of license is critical, as it can profoundly influence the software's development trajectory, market adoption, and the engagement of its community.

Rahmatallah (n.d.)

## 12.4. Potential Risks and Security Concerns

Before integrating open source software into its operations, a company must conduct a comprehensive risk assessment to identify potential security concerns and other associated liabilities. Although open source solutions can offer cost savings, flexibility, and rapid innovation, they may also expose organizations to vulnerabilities that compromise data security, expose sensitive information, or disrupt business operations.

### 12.4.1. Common Risks Associated with Open Source Software

Several risks are inherently linked to the use of open source software, including:

- **Security Vulnerabilities:** Open source projects may contain inherent security flaws that, if left unpatched, can be exploited by malicious actors to gain unauthorized access to systems and data.

- **Compliance and Licensing Issues:** The complex landscape of open source licenses requires strict adherence; non-compliance can lead to legal disputes, financial penalties, and reputational damage.
- **Dependency and Supply Chain Risks:** Open source applications often rely on third-party libraries and components, each introducing additional vulnerabilities and potential compatibility issues across the software supply chain.
- **Limited Support and Maintenance:** Many projects are maintained by volunteer communities rather than dedicated support teams, which can result in delayed updates and prolonged exposure to unresolved security issues.
- **Quality and Code Integrity Concerns:** Variability in coding practices, insufficient testing, and poor documentation can lead to inconsistent software quality, increasing the likelihood of bugs and security weaknesses.

Mathpati (2023)

#### 12.4.2. Specific Security Concerns in open source Environments

Security risks in open source software manifest in various ways, including:

- **Malware and Backdoors:** The public availability of source code can allow malicious actors to inject harmful code or create backdoors if rigorous code reviews and continuous monitoring are not in place.
- **Supply Chain Attacks:** As organizations integrate multiple open source components, attackers may target less secure dependencies, thereby compromising the broader software ecosystem.
- **Delayed Patch Management:** Open source projects may experience delays in vulnerability identification and patch deployment, leaving systems exposed to potential exploitation.
- **Suboptimal Developer Practices:** Inadequate testing, inconsistent coding standards, and poor documentation can exacerbate security issues, as these practices increase the risk of undetected errors.

- **Compliance Risks Impacting Security:** Non-compliance with licensing terms not only poses legal risks but may also force disruptive changes to the software stack, potentially introducing new vulnerabilities during transitions.

Helms (2023)

In summary, while open source software can serve as a powerful and cost-effective tool for innovation, its adoption demands vigilant risk management. Organizations should implement robust security protocols, perform regular audits of open source components, and ensure strict compliance with licensing requirements to mitigate these risks effectively.

## 12.5. The Role of open source in Economics

Cost efficiency, innovation, and collaboration are key factors that have positioned open source as a cornerstone of modern economic systems. Many industries and organizations utilize Open Source software to reduce costs, increase flexibility, and promote creativity, thereby driving economic growth and sustainability.

### 12.5.1. Driving Innovation and Shaping Market Dynamics

Open source software fosters a culture of experimentation, creativity, and knowledge sharing, leading to the rapid development of new technologies and solutions. By granting users access to modify and redistribute the source code, open source encourages collaboration and innovation, enabling individuals and organizations to build upon existing software to create new products and services.

A distinctive strength of open source is its inclusivity—anyone, regardless of their affiliation with a company, can contribute to its development. This openness lowers barriers to entry for innovation and allows passionate individuals to make meaningful contributions.

Companies also play a significant role in advancing open source projects. With greater resources and structured teams, organizations can contribute in a more organized and impactful manner, accelerating development and enhancing software quality.

The collaborative nature of open source facilitates cross-industry partnerships, allowing organizations from diverse sectors to share knowledge, resources, and best practices. This cross-pollination of ideas not only enhances software development but also fosters innovation across industries, ultimately shaping market dynamics and driving economic progress.

The study [Hendrickson et al. \(2012\)](#) by Mike Hendrickson, Roger Magoulas, and Tim O'Reilly underscores that open source is not only a catalyst for small business growth but also a driver of future success for many startups today. By providing cost-effective and flexible solutions, open source enables small and medium-sized enterprises to strengthen their online presence and enhance their economic performance.

### 12.5.2. Supporting Startups and small Enterprises

The impact of open source on startups and small enterprises is both profound and transformative. For these businesses, open source software provides a highly cost-effective alternative to proprietary solutions, granting access to advanced tools and technologies without the financial burden of high licensing fees typically associated with commercial software. This affordability allows startups and small enterprises to allocate their limited resources more strategically, fostering innovation and growth while maintaining financial flexibility.

[StudioLabs \(2024\)](#)

### 12.5.3. Facilitating cross-industry collaboration and open Innovation

Leveraging the intrinsic collaborative nature of open source platforms, organizations are empowered to forge cross-industry alliances and pursue

open innovation strategies. By pooling shared resources, expertise, and technologies, these collaborations accelerate progress and address multi-faceted challenges. This integrative approach transcends traditional industry boundaries, fostering cooperation among diverse sectors in the pursuit of common objectives and mutually beneficial solutions.

## 12.6. Open source in Key Industries

Across numerous industries, open source software has exerted a profound influence on organizational operations, catalyzing innovation and facilitating collaborative practices. The adoption of open-source solutions is pervasive across various sectors, including:

- **Information Technology:** open source software underpins a wide array of critical IT infrastructures, ranging from operating systems and databases to web servers, thereby enhancing system reliability and flexibility.
- **Artificial Intelligence:** Frameworks such as TensorFlow and PyTorch have democratized access to artificial intelligence technologies, promoting extensive research and innovative development.
- **Education:** Platforms like Moodle and Jupyter Notebooks have transformed the landscape of online education by making learning more accessible and interactive, which in turn fosters broader pedagogical engagement.
- **Healthcare:** Increasingly, open source solutions are being integrated into healthcare systems to manage electronic health records, medical imaging, and telemedicine applications, thereby improving patient care and system interoperability.
- **Finance:** In the financial sector, open source software is instrumental in operating trading platforms, risk management systems, and blockchain technologies, which contributes to enhanced transparency and operational efficiency.

### 12.6.1. Examples of Open Source Success Stories

The following examples illustrate the transformative impact of open source software across key industries:

**GNU/Linux in Information Technology:** The GNU/Linux operating system, initiated by Linus Torvalds, has evolved into a cornerstone of modern IT infrastructure. Its adoption extends beyond the personal computing domain to include servers, supercomputers, and embedded systems. The system's inherent stability, robust security features, and considerable flexibility have been critical to its widespread acceptance.

**Mozilla:** Mozilla Firefox is a widely used web browser developed by the Mozilla Foundation—an open source community dedicated to promoting an open and accessible internet. Its strong commitment to privacy, security, and user empowerment has established it as a favored alternative to proprietary browsers. Additionally, the Mozilla ecosystem encompasses projects such as Thunderbird, a free and open-source email client, and the Mozilla Developer Network (MDN), a comprehensive resource that supports web developers worldwide.

**LibreOffice:** LibreOffice is a comprehensive, free, and open source office suite that offers a robust alternative to proprietary software such as Microsoft Office. It encompasses applications for word processing, spreadsheets, presentations, and more, thereby providing a versatile and cost-effective solution for both individuals and organizations. Its compatibility with multiple operating systems—including Windows, macOS, and Linux—ensures broad accessibility, making it suitable for a diverse range of sectors from education and non-profit organizations to small enterprises and governmental agencies.

**OpenEMR:** OpenEMR is an open source practice management software solution that has been widely adopted in the healthcare industry. It is estimated that OpenEMR currently manages the records of over 90 million patients in the United States. Utilized by a diverse spectrum of healthcare providers—from small practices to large hospitals—OpenEMR facilitates the management of patient records, appointment scheduling, billing, and other critical functions. This example underscores the potential of open-source software to revolutionize healthcare delivery by offering customizable and cost-effective solutions.

[to Wikimedia projects \(2005\)](#)

## 12.7. Revenue models in Open source

For an open source project to develop effectively and remain sustainable, it is crucial to establish a revenue model that aligns with its goals and objectives. The open-source ecosystem offers a variety of revenue models, each with its own advantages and challenges. By selecting the most suitable model, project maintainers can secure the necessary funding, support ongoing development, and ensure long-term viability.

### 12.7.1. Common Business Models

Several business models have proven successful in the open source landscape, including:

- **Open Core:** In this model, the core software is open source and freely available, while additional features and functionalities are provided under a commercial license. Examples include MongoDB and GitLab.
- **Hosting and Cloud Solutions:** Companies offer hosting services or cloud-based solutions for their open source software, charging users for the enhanced services. Examples include WordPress and Databricks.

- **Support and Maintenance Services:** Revenue is generated by offering support, maintenance, and consulting services to users of the open-source software. Notable examples are Red Hat and Canonical (Ubuntu).

Other revenue streams—such as donations, dual licensing, and strategic partnerships—also play a role in sustaining open source projects.

## 12.8. Open Source Support in Austria

In Austria, numerous organizations are dedicated to supporting and promoting open source software. Some groups focus on networking and knowledge exchange, while others offer direct services and support for open source initiatives. Additionally, the Wirtschaftskammer Österreich (WKO) provides assistance to companies that wish to adopt or develop open source solutions.

To further promote open source software in Austria, it is essential to raise awareness of its benefits and encourage collaboration among organizations, developers, and users. By nurturing a vibrant open source community, Austria can leverage collaborative innovation to drive both economic growth and technological advancement.

*Open Source Guide für Österreich | netidee (n.d.)*

## 12.9. Open source in Practice: A Personal Experience

For the Diploma Thesis, our project team leveraged a diverse range of open source technologies. The project made use of Python, Flask, Vue.js, Linux, Ollama, Visual Studio Code, and many other open source tools to develop robust applications.

Our decision to adopt open source technologies was driven by several factors, including cost efficiency, flexibility, and strong community support.

Access to the source code enabled us to customize and extend the software to meet specific project requirements, while vibrant developer communities offered valuable resources and guidance throughout the development process.

Although open source software presents numerous advantages, it also comes with challenges such as limited official support, potential security vulnerabilities, and licensing complexities. Successfully navigating these issues required careful planning, continuous monitoring, and adherence to best practices to ensure the project's success.

## 12.10. Licence Model of the Diploma Thesis

The source code for this Diploma Thesis is publicly available under the GNU General Public License (GPL) version 3. This license ensures that the software remains open source and freely accessible to all users, reflecting the project's commitment to transparency, collaboration, and innovation. By adopting this license, we empower others to build upon our work and contribute to its ongoing development.

The source code is hosted on GitHub, which serves as a platform for collaboration, feedback, and community engagement. The repository can be accessed at <https://github.com/Luna-Schaetzle/Diploma-thesis-website>.

### 12.10.1. GNU General Public License (GPL) Version 3

Published by the Free Software Foundation in 2007, the GNU General Public License Version 3 (GPLv3) is a widely adopted open-source license designed to safeguard software freedom. It grants users the rights to use, study, modify, and distribute software while its *copyleft* clause ensures that any derivative works are also licensed under GPLv3, preventing proprietary exploitation. GPLv3 addresses modern challenges such as patent threats and digital rights management (DRM) restrictions by offering robust patent protection, prohibiting DRM technologies, and enhancing compatibility with other licenses. Employed by projects like GNU tools and Bash, GPLv3

remains a cornerstone of the open-source movement, ensuring that software stays free and accessible.

## 12.11. Conclusion

Open source software has become an integral part of the modern economy, driving innovation, fostering collaboration, and promoting economic growth. By providing cost-effective, flexible, and transparent solutions, open source empowers individuals, organizations, and entire industries to achieve their objectives more efficiently and sustainably. Moreover, a variety of viable business models support the monetization and continued development of open source projects.

Our experience with open source technologies underscores the immense value of community-driven development, customization, and collaboration. By leveraging these tools, our team was able to devise innovative solutions, overcome complex challenges, and contribute meaningfully to the broader open source ecosystem.



# 13. Economic Aspect of Operating Systems (Florian Prandstetter)

**Author:** Florian Prandstetter

## 13.1. Introduction

In this section, the relevance of Operating Systems in our economy will be discussed. The importance of OS in our daily life is not always obvious. The OS is the most important software on a computer. It manages the computer's memory, processes, and all of its software and hardware. With the rising amount of digitalization, the OS is also becoming more important than ever.

To get an overview of what an OS is, please refer to Chapter [5.2](#).

## 13.2. Operating System Market Share

The OS market is dominated by four major players: Android, Microsoft Windows, Linux, and macOS. The market share of the Operating Systems is shown in Figure [13.1](#).

In recent years, the market share of Android has been increasing. This is due to the rising number of smartphones and tablets. Microsoft Windows is still the most used OS on desktops and laptops.

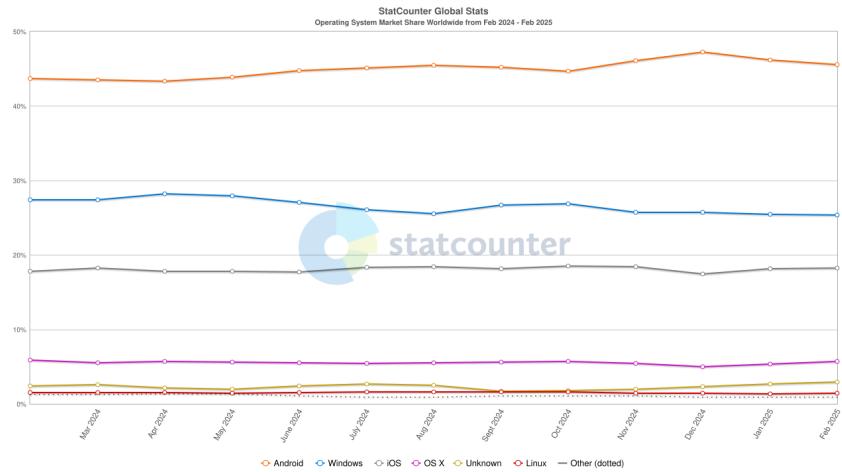


Figure 13.1.: Operating Systems Market Share

statcounter (2025b)

The global market of Operating Systems is expected to reach \$48.18 billion at a CAGR of 1.9% in 2026. [businesswire \(2022\)](#)

Singla (2022) ?

### 13.2.1. Operating Systems for Servers

When looking at the Operating Systems used for web servers, the market share looks very different. The two main competitors are Microsoft and Red Hat.

Worldwide Server Operating Environments 2018 Share Snapshot

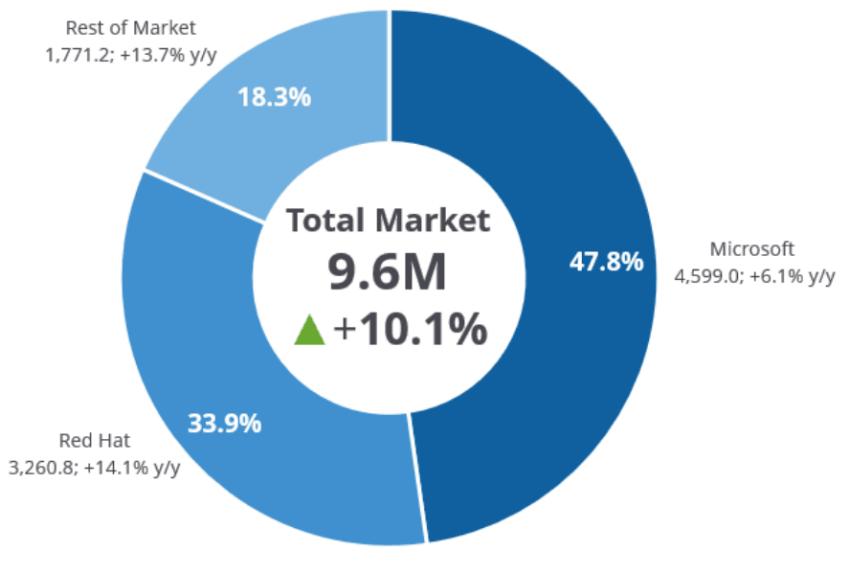


Figure 13.2.: Operating Systems for Servers Market Share

As of 2018, Microsoft held 47.8% of the market, while Red Hat held 33.9%. The remaining 18.3% of the market is shared by different competitors.

T4 (2022)

### Market Volume

Due to the rapid growth of the internet and related services, the market for servers and Operating Systems grew alongside it. It's expected to grow to double its current volume by 2032.

Americas Server Operating System Market Volume, 2019-2032 (K Units)

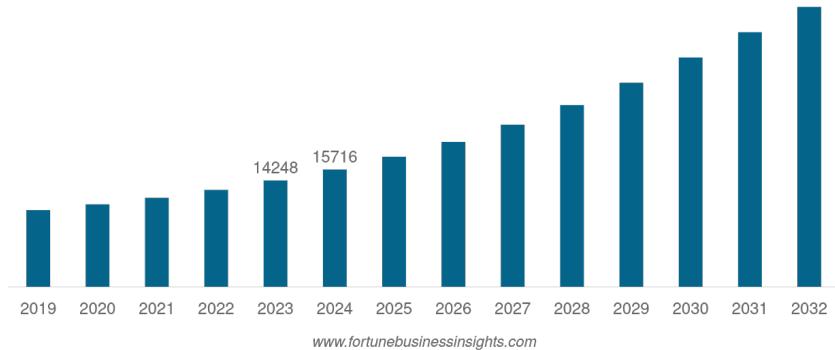


Figure 13.3.: Operating Systems Market Volume

fortune business insights (2025)

### 13.2.2. Operating Systems for Embedded Systems

Embedded Systems are also a big market for Operating Systems. These are compact systems that are used in many different devices. The CAGR for the Embedded Systems Market is expected to be 6.65% from 2023 to 2030. Thus, the market volume is expected to grow to \$9,519.09 million by 2028. One of the largest markets for Embedded Systems is the automotive industry.

Dharmadhikari (2025)

## 13.3. Important Players

There are many different companies that develop Operating Systems. In this section, some of the most important ones will be discussed.

### 13.3.1. Microsoft

Microsoft is one of the biggest players in the OS market. They are most widely known for their Windows OS. The company was founded by Bill Gates and Paul Allen in 1975. The company is headquartered in Redmond, Washington.

The company has a market capitalization of 2.5 trillion dollars.

They currently hold 47.8% of the Server OS Market and 70.62% of the Desktop OS Market. They are also active in the Server OS Market with Windows Server and the Embedded Systems Market with their Windows Embedded OS.

? [statcounter \(2025a\)](#)

### 13.3.2. Apple

Apple is another big player in the OS market. They are known for their macOS for desktop computers and iOS for their phones and tablets. The company was founded by Steve Jobs, Steve Wozniak, and Ronald Wayne in 1976. The company is headquartered in Cupertino, California.

The company has a market capitalization of 2.5 trillion dollars. They currently hold 15.74% of the Desktop OS Market and 27.78% of the Mobile OS Market.

?

### 13.3.3. Red Hat

Red Hat specializes in Linux-based Operating Systems. The company was founded in 1993 and is headquartered in Raleigh, North Carolina. The company was acquired by IBM in 2019 for 34 billion dollars.

They are the second biggest player in the Server OS Market with a market share of 33.9%. Due to its open-source nature, Red Hat has a large community of developers contributing to the OS growth.

[to Wikimedia projects \(2024\)](#)

#### 13.3.4. Wind River Systems

Wind River Systems is a company that specializes in Embedded Systems. The company is known for its VxWorks OS. The system is used in many different industries like automotive, aerospace, defense, and industrial. The company was founded in 1981 and is headquartered in Alameda, California.

They used to be a subsidiary of TPG Capital but were sold to Aptiv in 2022 for \$3.5 billion dollars.

[Aptiv \(2022\) \(n.d.a\)](#)

### 13.4. Conclusion

The Market for Operating Systems in all relevant branches of the Industry has been steadily growing over the last decade. Due to the high amount of competition there has been constant development of the technology. This trend is expected to persist as digitalization becomes more integrated into everyday life and industries continue to demand more sophisticated and specialized Operating Systems. With emerging technologies like cloud computing, artificial intelligence, and the Internet of Things (IoT), new opportunities for OS development and market expansion are constantly arising.

Moreover, the competition between major OS developers ensures continuous innovation and improvement in performance, security, and user experience. Companies are investing heavily in research and development to maintain their market positions and adapt to evolving consumer and enterprise needs.

In conclusion, the Operating System market remains a vital and dynamic sector in the global economy. Its influence extends beyond traditional computing devices, shaping the future of technological progress across various industries.



## **Part VI.**

# **Conclusion**



# 14. Conclusion

**Author:** *Luna Schätzle*

In this thesis, a comprehensive investigation into [*Artificial Intelligence in the Industry and Education Environment*] was undertaken. The primary aim was to explore the potential applications of AI within both industrial and educational contexts and to develop innovative solutions to address the challenges inherent in these domains. The research objectives were defined as follows:

- **Task 1:** Establish an API server for hosting and executing AI models.
- **Task 2:** Develop a robust backend architecture for both the AI Hub and the Code Extension.
- **Task 3:** Identify and integrate optimal AI models for a range of tasks into the backend systems of the AI Hub and the Code Extension.
- **Task 4:** Develop an AI Hub that provides students with access to a diverse array of AI tools and resources, including chatbots, image recognition, and natural language processing (NLP) models.
- **Task 5:** Implement an AI-driven coding assistance solution, available as an integrated extension within a code editor.
- **Task 6:** Develop an AI-driven service on an edge device (e.g., Raspberry Pi) to investigate the potential of AI in resource-constrained industrial environments.
- **Task 7:** Compile comprehensive documentation detailing the conceptual framework, theoretical foundations, practical implementation, primary and alternative solution approaches, as well as the results and their interpretation.

## 14.1. Key Findings

The research indicates that AI technologies possess the potential to fundamentally transform both industrial and educational settings by providing innovative solutions to complex challenges. The following section summarizes the principal findings of this study:

**AI in Education** In academic institutions such as schools and universities, AI can significantly enhance the learning experience by offering personalized educational resources, automating grading processes, and supporting intelligent tutoring systems. However, the implementation of AI in educational settings is often challenged by a shortage of specialized expertise, high implementation costs, and ethical concerns regarding data privacy and security. Nonetheless, the substantial benefits offered by AI necessitate that educational institutions actively explore and adopt these technologies to improve learning outcomes and better prepare students for future challenges. Moreover, given the wide range of available AI applications—ranging from chatbots and image recognition to natural language processing (NLP) models—it is imperative to select and integrate the most appropriate models for specific educational tasks.

**AI in Development** FLo

**AI in Industry** Gabriel (Flo + Luna falls mrko nd schafft)

**Server and operating systems** Building and Maintaining the Server Environment turned out to be more challenging than originally anticipated. The team had to deal with various issues, such as compatibility problems and performance bottlenecks. After hard work the Team was able to establish a stable and efficient server environment, which was crucial for the successful deployment of the AI models and the overall functionality of the AI Hub and the Code Extension.

**Different LLM Models for Different Purposes** For the AI Hub and the Code Extension, the research team conducted an extensive evaluation of available AI models to identify the most appropriate options for various tasks, including chatbots, image recognition, and natural language processing (NLP). The challenges associated with implementing the optimal AI models for specific tasks are substantial, due to the inherent complexity of these technologies, the limited availability of specialized expertise, and the considerable costs related to their development and deployment. Consequently, identifying suitable AI models necessitates thorough research and systematic evaluation to select those that best meet the project's requirements. Although this process is both time- and resource-intensive, it is essential for ensuring the project's overall success.

**Flask Server for API** The research team established an API server to host and execute the AI models, leveraging the Flask framework a lightweight and efficient web framework for Python. This Flask server provides a RESTful API that facilitates client interaction with the hosted AI models by handling model loading, input data processing, and the delivery of output predictions. As a critical component of both the AI Hub and the Code Extension, the server enables the seamless integration of AI functionalities into these applications. By centralizing the hosting of the models, the team ensures that they remain easily accessible, as well as readily updatable and maintainable. Flask's versatility and extensive feature set further underscore its suitability for developing robust APIs, offering straightforward route definition, request handling, and response generation.

**Web Application for User Interface** The frontend of the AI Hub and the Code Extension was developed using the Vue framework, a progressive JavaScript framework recognized for its ease of use and flexibility. The development team's prior experience with Vue enabled the rapid creation of frontend components, which are essential for building interactive and responsive user interfaces. Vue's comprehensive suite of features and tools facilitated the integration of various components—including chatbots, image recognition tools, and NLP models—into the applications. This robust and versatile framework is particularly well-suited for modern web application

development, as it supports the creation of engaging, intuitive, and dynamic user interfaces.

**Working with Visual Studio Code** The main IDE used by the team to develop the application was Visual Studio Code. This IDE offers a wide range of features and extensions that enhance the development process, including code completion, debugging tools, and version control integration. Working with VS Code can sometimes be challenging due to its complexity and the need to configure various settings and extensions. However, the benefits of using this powerful IDE—such as its extensive customization options, rich ecosystem of extensions, and seamless integration with other tools—far outweigh the challenges.

## 14.2. Working in a Team

The project team comprised three members, each assigned distinct roles and responsibilities to ensure the successful execution of the project. Collaborative work in a team setting is both challenging and rewarding, demanding effective communication, coordination, and mutual support. The following sections delineate the critical aspects of teamwork that significantly contributed to the project's success:

- **Constant and Open Communication** Due to the direct and clear communication between team members, the project was able to progress smoothly and efficiently. Regular meetings, updates, and feedback sessions were instrumental in fostering a collaborative work environment and ensuring that all team members were aligned with the project's objectives and timelines.
- **Distinction of Tasks and Responsibilities** With a clear division of the tasks, the team was able to work efficiently in their areas of expertise. There were rarely any overlaps or conflicts.
- **Documentation and Repository Management** The team maintained a structured and detailed documentation of the current status. This allowed a quick overview of the project and the progress made.

- **Flexibility and Adaptability** Due to the constant communication, the team was able to adapt to any changes and challenges that arose during the project.
- **Accessibility** The team members were always available for questions and feedback. This allowed for quick problem solving and a smooth workflow.

**Team Leadership and Project Management** Luna Schaetzle assumed the roles of team leader, project manager, and project lead, overseeing the planning, coordination, and monitoring of all project activities. Her leadership acumen, organizational skills, and strategic vision were pivotal in guiding the team through each project phase, ensuring that tasks were completed within the stipulated timeframes and budgets. Her proactive approach to problem-solving, clear communication, and commitment to fostering team cohesion were essential in cultivating a positive and collaborative work environment.

**Documentation and Repository Management** In addition to her leadership responsibilities, Luna was charged with maintaining comprehensive project documentation and managing the GitHub repository. Her meticulous attention to detail and structured approach to documentation, coupled with her proficiency in version control systems, were instrumental in preserving accurate records of the project's progress, results, and deliverables. This rigorous documentation process not only facilitated effective knowledge sharing but also promoted transparency and ensured that all project-related information was readily accessible to team members.

**Backend Development** Florian Prandstetter led the development of the server and backend infrastructure for both the AI Hub and the Code Extension. His technical expertise, problem-solving skills, and extensive software development experience were crucial in designing and implementing a robust backend architecture. This included the integration of AI models and the optimization of server performance. Florian's ability to work independently, his commitment to quality assurance, and his dedication to

continuous improvement were key to delivering a backend system that met the rigorous requirements of the project.

**Website Development** Luna also directed the design and implementation of the AI Hub's website. Her creative vision, user-centric design approach, and proficiency in web development technologies were vital in creating an engaging and intuitive user interface. Her emphasis on user experience, coupled with a strong commitment to accessibility and usability standards, ensured that the website effectively addressed the needs of its target audience.

**Raspberry Pi Development** Gabriel Mrkonja spearheaded the development of an AI-driven service on an edge device (Raspberry Pi) to explore the potential of AI in resource-constrained industrial environments. His expertise in embedded systems, hardware programming, and edge computing was critical in devising a cost-effective and resource-efficient AI solution. Gabriel's practical experience, innovative thinking, and problem-solving abilities were essential in demonstrating the feasibility of deploying AI-driven services on edge devices in industrial settings.

**Working with GitHub** The team utilized GitHub as the version control system to manage the project's source code, documentation, and related artifacts. GitHub's collaborative features—such as branching, merging, and pull requests enabled effective code management, review, and integration among team members. By leveraging GitHub's distributed version control capabilities, the team ensured that all modifications to the codebase were systematically tracked, documented, and synchronized, thereby facilitating seamless collaboration and efficient project development.

## 14.3. Lessons Learned

Throughout the course of the project, the research team encountered various challenges and obstacles that provided valuable learning opportunities. The

following section outlines the key lessons learned from the project:

- **Effective Communication** Clear and open communication is essential for successful teamwork. Regular updates, feedback sessions, and discussions help align team members, foster collaboration, and ensure that everyone is on the same page.
- **Time Management** Efficient time management is crucial for meeting project deadlines and milestones. Prioritizing tasks, setting realistic timelines, and monitoring progress are essential for effective project planning and execution.
- **Adaptability and Flexibility** Flexibility and adaptability are essential qualities for navigating unforeseen challenges and changes. Being open to new ideas, approaches, and solutions enables teams to respond effectively to evolving project requirements and constraints.
- **Continuous Learning** Embracing a growth mindset and a commitment to continuous learning are key to personal and professional development. Seeking feedback, acquiring new skills, and expanding one's knowledge base are essential for overcoming obstacles and achieving success in complex projects.

#### **Effective Communication**

#### **Time Management**

#### **Adaptability and Flexibility**

#### **Continuous Learning**

## **14.4. Future Directions**



# 15. Outlook

**Author:** Luna P. I. Schätzle, Florian Prandstetter and Gabriel Mrkonja

In this chapter, we provide an outlook on the future of AI in the industry and education environment. We discuss potential trends, challenges, and opportunities that may arise in the coming years and offer recommendations for further research and development in this field.

## 15.1. Future Trends in AI

The AI landscape is constantly evolving, driven by the rapid emergence of new technologies and applications. While it remains challenging to predict the exact trajectory of AI, several discernible trends are already shaping its future. One of the most significant developments is the increasing integration of AI into everyday devices and services. As AI becomes more ubiquitous, it is poised to play an even greater role in influencing our daily lives and interactions with the world.

Another key trend is the evolution of AI models toward more human-like behavior, with advanced reasoning capabilities becoming increasingly sophisticated. This progress is further supported by enhancements in memory capacity and computational power, which contribute to higher accuracy and faster performance.

A further emerging trend is the development of autonomous AI agents capable of interacting with their environment and making decisions independently. For instance, systems like the Claude Computer Use demonstrate how AI can engage with the entire user operating system and interface autonomously.[Computer use \(beta\) - Anthropic \(n.d.\)](#)

### 15.1.1. AI in Industry

In industry, AI is anticipated to revolutionize manufacturing processes, supply chain management, and quality control. AI-powered robots and autonomous systems are expected to play a critical role in streamlining operations and enhancing efficiency. Additionally, predictive maintenance and asset management will benefit from AI technologies, enabling companies to minimize downtime and optimize resource allocation.

### 15.1.2. AI in Education

Within the education sector, AI is set to transform both teaching and learning methodologies. Personalized learning platforms, intelligent tutoring systems, and automated grading tools promise to enhance the educational experience for students and educators alike. Moreover, AI will facilitate the creation of adaptive learning environments tailored to individual learning styles and preferences.

### 15.1.3. Challenges and Opportunities

Despite its considerable potential, artificial intelligence presents a range of formidable challenges. Ethical considerations—including bias, privacy, and accountability—must be rigorously addressed to ensure that AI technologies are developed and deployed responsibly. Furthermore, there is an urgent demand for enhanced transparency and explainability in AI systems, particularly in high-stakes domains such as healthcare and finance.

Another critical issue pertains to copyright and data ownership. AI systems frequently leverage extensive online datasets to generate new content, which may not be subject to the ownership rights of the original creators. This practice raises intricate questions regarding intellectual property rights and the ethical utilization of data.

Numerous experts and investors in the AI field have expressed substantial concern over the current absence of comprehensive legislative regulation.

This regulatory gap could lead to the deployment of AI in ways that are not aligned with societal benefits. Some advocates propose the establishment of a global regulatory framework, comparable to international treaties governing nuclear weapons, to ensure that AI is employed in a manner that serves the public interest and is strictly confined to approved domains. *Statement on AI Risk | CAIS* (n.d.)

## 15.2. Further Development of the Flask Server

The Flask server is a cornerstone of the AI Hub, providing the essential infrastructure for hosting AI models and enabling students to access a broad spectrum of AI tools and resources. To elevate the server's functionality and performance, several key enhancements should be prioritized:

- **Optimized Architecture:** Refine the server architecture to efficiently manage high volumes of concurrent requests.
- **Robust Security Measures:** Implement comprehensive security protocols—including encryption, authentication, and access control—to safeguard user data and protect against unauthorized access.
- **Expanded Integration:** Integrate additional AI models and services to further broaden the platform's capabilities.

Furthermore, regular updates and maintenance of both the server and the Ollama API are imperative to ensure compatibility with the latest AI models and technologies. Consistent maintenance guarantees the reliability and security of the platform, while also providing students with uninterrupted access to cutting-edge AI tools and resources.

Enhanced error handling and resource management are also crucial to maintain continuous server operation and optimize resource utilization. Overall, prioritizing these improvements will ensure that the Flask server remains robust, secure, and scalable, meeting the evolving demands of the AI Hub.

## 15.3. Further Development of the Student AI Hub

The Student AI Hub represents a promising initiative with the potential to transform how students interact with AI technologies. By providing a dedicated platform where students can both learn about AI and utilize a variety of AI tools to enhance their educational experience, the Student AI Hub seeks to democratize access to AI education and empower learners to expand their skills and knowledge in this rapidly evolving field.

To advance the development of the Student AI Hub, several key areas should be prioritized. These include expanding the range of available AI tools and resources, fostering collaboration and knowledge-sharing among students, and establishing strategic partnerships with industry and academic institutions to enrich the platform's offerings.

Additionally, it is crucial for the Student AI Hub to promote diversity and inclusion in AI education. This can be achieved by offering tailored resources and dedicated support to underrepresented groups, thereby ensuring that a broader spectrum of students can benefit from and contribute to advancements in AI.

## 15.4. Open Source in Future Projects

Open-source software has become increasingly integral to the AI community, empowering developers to collaborate, share resources, and drive innovation at an accelerated pace. By embracing open-source principles in future projects, we can harness the collective expertise of the global AI community to develop state-of-the-art solutions and tackle complex challenges in both industry and education.

Adopting open-source methodologies not only facilitates the widespread dissemination of knowledge and best practices, but it also enables students and professionals to access valuable resources and actively contribute to the advancement of AI technologies. Moreover, open-source initiatives promote transparency, accountability, and inclusivity, thereby fostering a collaborative culture of knowledge exchange within the AI ecosystem.

In key industries, open source is already a fundamental component of the development process. Observing the evolution of the open-source community will be pivotal in understanding its future impact on the development and integration of AI within both industrial and educational environments.

## 15.5. Further development of the VS Code extension

The VS Code Extension still has room for improvement in terms of functionality and performance. Also the user interface could be more user-friendly and intuitive. To further develop the extension, the following aspects should be considered:

- **Enhanced AI Capabilities:** Integrate additional AI models and services to provide users with a wider range of tools and resources.
- **Code completion:** Implement code completion functionality to assist users in writing code more efficiently.
- **Improved User Experience:** Enhance the user interface and user experience to make the extension more intuitive and user-friendly.
- **Optimized Performance:** Optimize the extension's performance to ensure fast response times and seamless integration with VS Code.
- **Enhanced Error Handling:** Implement robust error handling mechanisms to provide users with clear feedback and guidance in case of errors.

## 15.6. Further Optimization of the Server

To further optimize the server, there are a few things that need to be addressed.

- **Scalability:** The server should be able to handle a large number of concurrent requests without compromising performance.

- **Security:** Implement robust security measures to protect user data and prevent unauthorized access.
- **Reliability:** Ensure that the server is reliable and stable, with minimal downtime and disruptions.
- **Hardware:** The server is currently hosted on dated hardware, which is a potential bottleneck. Upgrading the hardware could significantly improve performance.

These changes would drastically improve the performance and security of the server, so it could be easily implemented in larger scale projects.

### 15.7. Challenges and Opportunities

### 15.8. Recommendations for Further Research

### 15.9. Concluding Remarks

# Appendix



## Appendix A.

### Glossary

This section provides definitions and explanations for all the terms used throughout this document.

**API (Application Programming Interface)** A set of protocols, tools, and definitions that allow different software applications to communicate with each other.

**AI (Artificial Intelligence)** A branch of computer science focused on building systems that can perform tasks requiring human intelligence, such as learning, reasoning, and problem-solving.

**IDE (Integrated Development Environment)** A software application that provides comprehensive facilities for software development, including a code editor, compiler, debugger, and automation tools.

**OS (Operating System)** A system software that manages computer hardware, software resources, and provides services for computer programs.

**VS Code (Visual Studio Code)** A lightweight yet powerful source code editor developed by Microsoft, supporting multiple programming languages and extensions.

**REST (Representational State Transfer)** An architectural style for designing networked applications, which relies on stateless communication and standard HTTP methods.

**HTTP (Hypertext Transfer Protocol)** A protocol used for communication between web browsers and servers, enabling the retrieval of hypertext documents on the internet.

**JSON (JavaScript Object Notation)** A lightweight data interchange format that is easy for humans to read and write and easy for machines to parse and generate.

**XML (Extensible Markup Language)** A flexible text format used to store and transport data, often used in web services and configuration files.

**HTML (Hypertext Markup Language)** The standard markup language used for creating web pages and web applications.

**CSS (Cascading Style Sheets)** A stylesheet language used to control the presentation and layout of web documents.

**JS (JavaScript)** A programming language commonly used in web development to create interactive and dynamic web pages.

**TS (TypeScript)** A strongly typed programming language that builds on JavaScript, adding static typing for improved maintainability.

**SQL (Structured Query Language)** A domain-specific language used for managing and manipulating relational databases.

## Appendix B.

### Time Protocol

#### B.1. Luna P. I. Schätzle

Date	Start	End	Hours	Tasks	Details	Persons
08.09.2024	10:00:00	12:30:00	02:30:00	Planning; Research	Research and definition of the SAIPiA concept	Luna
13.09.2024	08:50:00	09:20:00	00:30:00	Planning	Discussed and assigned the new idea	All
15.09.2024	11:30:00	12:30:00	01:00:00	Planning; Research	Definition for the thesis database   which models can be used	Luna
15.09.2024	14:00:00	15:00:00	01:00:00	Meeting		All
16.09.2024	06:40:00	07:00:00	00:20:00	Research	Elaboration of the project definition	Luna
17.09.2024	08:00:00	08:40:00	00:40:00	Research	Improving entries in the thesis databases	Luna
23.09.2024	09:35:00	10:15:00	00:40:00	Software Test	Testing the LLama model 8b	Luna
23.09.2024	14:00:00	15:30:00	01:30:00	Planning; Research	Addressing Ollama from Python   GitHub repository created	Luna
23.09.2024	16:00:00	16:40:00	00:40:00	Software Development	Testing various Python scripts	Luna

*Continued on next page*

## Appendix B. Time Protocol

Date	Start	End	Hours	Tasks	Details	Persons
24.09.2024	07:30:00	08:00:00	00:30:00	Planning	Git README update and Aba portal	Luna
24.09.2024	12:30:00	13:20:00	00:50:00	Software Development	Fetching news via News API and storing in a database	Luna
24.09.2024	15:30:00	16:20:00	00:50:00	Software Development	Time and news integrated into the Ollama Python script	Luna
24.09.2024	17:20:00	18:00:00	00:40:00	Software Development	Python sound test	Luna
26.09.2024	07:30:00	08:00:00	00:30:00	Planning	Improving entries in the thesis databases	Luna
26.09.2024	17:30:00	18:30:00	01:00:00	Software Development	Python TTS test various libraries   Java version of AI addressing (via API)	Luna
30.09.2024	10:00:00	10:50:00	00:50:00	Planning	Resubmission of the thesis   Development of the thesis red thread	Luna
30.09.2024	11:10:00	11:40:00	00:30:00	Software Development	Testing a simple graphical interface for the open day	Luna
30.09.2024	20:40:00	21:00:00	00:20:00	Software Development	Sound input and output via Python test qtts including trigger word	Luna
01.10.2024	14:30:00	15:00:00	00:30:00	Software Test	Testing various LLM models	Luna
03.10.2024	18:55:00	19:25:00	00:30:00	Research	Looked at LaTeX template and various LaTeX programs	Luna
03.10.2024	22:20:00	23:10:00	00:50:00	Research	Using LaTeX template, adding own part   Looked at other theses + wrote down own ideas	Luna
04.10.2024	07:50:00	08:00:00	00:10:00	Meeting	Discussion of orders   Definition of the parts list   Cost allocation defined	All
04.10.2024	13:20:00	14:00:00	00:40:00	Research	Skimming through other theses   Thinking about additions for the structure	Luna

Continued on next page

## B.1. Luna P. I. Schätzle

Date	Start	End	Hours	Tasks	Details	Persons
08.10.2024	14:20:00	14:50:00	00:30:00	Writing	Testing the LaTeX template + fixing the library   Dealing with the different parts	Luna
10.10.2024	11:30:00	13:00:00	01:30:00	Software Development	Tried to run Flux[DEV] on the PC, didn't work :( SWAP memory too low and CPU fully utilized	Luna
10.10.2024	14:30:00	18:00:00	03:30:00	Hardware Test	HAILO on Raspberry test and hardware test	All (oL)
11.10.2024	10:50:00	11:30:00	00:40:00	Software Development	Webuntis API fetch via the Webuntis Python library test of the outputs	Luna
15.10.2024	16:30:00	16:50:00	00:20:00	Research	Organization of notes, overcoming "project crisis"	Luna
17.10.2024	10:00:00	11:30:00	01:30:00	Planning; Research	Test of the AI school server	Luna
17.10.2024	12:30:00	12:50:00	00:20:00	Meeting	Further discussion with Greinöcker regarding the thesis	Flo, Luna
17.10.2024	17:20:00	18:20:00	01:00:00	Research; Software Development	Searching how to fine-tune   Searching for datasets   Download LLAMA3.2:1b	Luna
17.10.2024	20:20:00	22:20:00	02:00:00	Research; Software Development	Trying the llama3 weight download and operation   Searching for alternatives   How to fine-tune   Research documents as context (art fine-tuning)   Trying various applications	Luna
18.10.2024	00:30:00	01:00:00	00:30:00	Software Development	Programming the Vue.js app (just the connection to Ol-lama)	Luna
18.10.2024	08:00:00	08:30:00	00:30:00	Software Test	Test of downloading the llama3.2:1b weights on the school server	Luna

*Continued on next page*

## Appendix B. Time Protocol

Date	Start	End	Hours	Tasks	Details	Persons
18.10.2024	08:50:00	09:40:00	00:50:00	Software Test	Test of datasets and training	Luna
18.10.2024	10:20:00	12:50:00	02:30:00	Software Test	Test training   Also on the school server + bugfix   Training a model	Luna
18.10.2024	17:50:00	18:10:00	00:20:00	Software Test	Test local training minimizing the training data -> less time	Luna
21.10.2024	07:40:00	08:00:00	00:20:00	Software Test	Start of the test training of the llama3.2:1b model	Luna
21.10.2024	14:25:00	15:05:00	00:40:00	Software Test	Test of the fine-tuned model   Test image generation on the server	Luna
21.10.2024	15:45:00	16:45:00	01:00:00	Software Test	Test of image and video generation on the server	Luna
22.10.2024	07:40:00	09:00:00	01:20:00	Software Test	Further models tested on the server	Luna
22.10.2024	13:00:00	15:00:00	02:00:00	Software Test	Further testing of the server   Vue.js add image port   Flask img	Luna
21.10.2024	17:00:00	17:30:00	00:30:00	Software Development	Porting the image generation to Vue.Js using Flask as backend	Luna
24.10.2024	10:00:00	11:30:00	01:30:00	Software Development	Vue port of the image generation with Flask in the background	Luna
24.10.2024	12:00:00	14:40:00	02:40:00	Software Development	Vue port bugfix + Upload to the server	Luna
24.10.2024	15:40:00	16:10:00	00:30:00	Software Test	Test of Vue + Further deployment   VPN research	Luna
24.10.2024	16:40:00	16:50:00	00:10:00	Planning	Working hours extraction	Luna
24.10.2024	17:30:00	18:30:00	01:00:00	Software Development	AI vision LLAVA test with API   Vue adaptation	Luna
24.10.2024	19:20:00	20:10:00	00:50:00	Software Development	AI vision LLAVA test with API   Vue adaptation fix	Luna

Continued on next page

Date	Start	End	Hours	Tasks	Details	Persons
28.10.2024	11:15:00	12:00:00	00:45:00	Software Development	Test of voice input and output   researched things	Luna
29.10.2024	13:55:00	14:55:00	01:00:00	Writing	Economic part   Open source and AI and its impact	Luna
01.11.2024	14:30:00	14:40:00	00:10:00	Research	Benchmarking Ollama models with numbers	Luna
12.11.2024	15:00:00	15:20:00	00:20:00	Planning	New division of the thesis	Luna
12.11.2024	16:30:00	18:00:00	01:30:00	Software Development	Testing the VueJS framework for the chatbot	Luna
14.11.2024	10:55:00	11:15:00	00:20:00	Software Development	Testing Supabase	Luna
15.11.2024	11:45:00	12:05:00	00:20:00	Meeting	Division and discussion	All (oL)
18.11.2024	16:40:00	16:50:00	00:10:00	Research	Open AI API key research	Luna
19.11.2024	17:40:00	17:50:00	00:10:00	Research	Searching for suitable models for our applications	Luna
21.11.2024	10:30:00	10:40:00	00:10:00	Research	How to build the backend of the server	Luna
21.11.2024	10:50:00	11:50:00	01:00:00	Software Development	Development of the VueJS website	Luna
22.11.2024	12:30:00	13:20:00	00:50:00	Software Development	Vue login with Firebase	Luna
22.11.2024	17:40:00	18:20:00	00:40:00	Software Development	Vue login and optimization of user management	Luna
23.11.2024	15:30:00	16:20:00	00:50:00	Software Development	Website development improvement of the login	Luna
25.11.2024	09:10:00	09:40:00	00:30:00	Software Development	Development of the OCR application	Luna
25.11.2024	10:00:00	11:45:00	01:45:00	Software Development	Further development of the OCR application using Flask server	Luna
26.11.2024	10:15:00	11:10:00	00:55:00	Software Development	Programming the chat with LLAMA	Luna
26.11.2024	14:10:00	16:30:00	02:20:00	Software Development	Fix OCR, implementation of programming chats	Luna

*Continued on next page*

## Appendix B. Time Protocol

Date	Start	End	Hours	Tasks	Details	Persons
26.11.2024	18:20:00	18:35:00	00:15:00	Software Development	Tried to implement admin features	Luna
28.11.2024	09:00:00	09:30:00	00:30:00	Software Test	Test of a local RAG with Ol-lama	Luna
28.11.2024	10:10:00	10:30:00	00:20:00	Software Test	OpenAI API initialization and test	Luna
28.11.2024	10:50:00	11:40:00	00:50:00	Software Test	Test of the OpenAI API + Image generation	Luna
28.11.2024	13:00:00	13:40:00	00:40:00	Software Test	RAG test and co	Luna
29.11.2024	09:50:00	10:00:00	00:10:00	Writing	Discussion with Egger regarding the economic part (Open Source)	Luna
30.11.2024	13:40:00	16:25:00	02:45:00	Research; Software Development	Research on object recognition, program start of finger recognition for a user interface	Gabriel
01.12.2024	12:53:00	13:53:00	01:00:00	Software Development	Further programming of the object recognition	Gabriel
02.12.2024	10:50:00	11:30:00	00:40:00	Writing	Writing Open Source and impact on economy	Luna
04.12.2024	08:00:00	12:28:00	04:28:00	Writing	Writing Open Source and impact on economy	Luna
12.12.2024	13:30:00	15:15:00	01:45:00	Software Test	Extension of functionality and setting of a new base prompt	Luna
01.01.2025	19:45:00	21:15:00	01:30:00	Writing	Organizing the structure, writing some sections	Luna
07.01.2025	08:00:00	09:40:00	01:40:00	Writing	Further structuring and improving chapters; Searching for Bibtex converter	Luna
08.01.2025	11:30:00	12:32:00	01:02:00	Software Test	Website backend config and model testing	Flo, Luna

*Continued on next page*

Date	Start	End	Hours	Tasks	Details	Persons
09.01.2025	10:45:00	11:30:00	00:45:00	Software Development	Fixing Firebase database issues; Extension of chat function (Saving chats)	Luna
09.01.2025	13:50:00	14:40:00	00:50:00	Software Development	Extension of chat functions   Imprint and privacy policy	Luna
13.01.2025	15:30:00	17:00:00	01:30:00	Writing	Used AI models   Testing of the models	Luna
14.01.2025	08:10:00	08:50:00	00:40:00	Software Development	Evaluation of AI models	Luna
14.01.2025	14:45:00	15:00:00	00:15:00	Software Test	Further testing of evaluation attempts	Luna
14.01.2025	16:15:00	16:55:00	00:40:00	Writing	Explanation of the testing of evaluation models	Luna
14.01.2025	21:10:00	21:40:00	00:30:00	Writing	Model evaluation	Luna
20.01.2025	11:45:00	12:00:00	00:15:00	Software Test	Further data collection on the server	Luna
20.01.2025	13:20:00	13:50:00	00:30:00	Writing	Sage	Luna
21.01.2025	11:30:00	11:40:00	00:10:00	Software Test	Data collection for model evaluation	Luna
21.01.2025	13:00:00	13:15:00	00:15:00	Writing	OpenAI API description	Luna
21.01.2025	14:30:00	15:00:00	00:30:00	Writing	LLMs explanations   Code listing improvement	Luna
23.01.2025	12:50:00	13:20:00	00:30:00	Writing	Organizing the structure	Luna
23.01.2025	21:10:00	22:00:00	00:50:00	Writing	Used programming languages	Luna
28.01.2025	14:00:00	14:50:00	00:50:00	Software Test	Evaluation of AI models	Luna
28.01.2025	15:50:00	17:10:00	01:20:00	Software Test	Further score collection	Luna
29.01.2025	08:00:00	11:00:00	03:00:00	Writing	Writing the first part	Flo
08.02.2025	14:00:00	16:00:00	02:00:00	Writing	Ollama explained   Chat GPT API explanation	Luna

*Continued on next page*

## Appendix B. Time Protocol

Date	Start	End	Hours	Tasks	Details	Persons
10.02.2025	10:00:00	12:30:00	02:30:00	Writing	Discussion, structure of the thesis, division, general writing	All (oL)
13.02.2025	14:45:00	15:25:00	00:40:00	Writing	Optimizing the model testing part	Luna
13.02.2025	09:30:00	10:30:00	01:00:00	Writing	Improvement of chapter structure (Introduction to LLM) Language improvement	Luna
13.02.2025	15:50:00	16:15:00	00:25:00	Writing	Data processing implementation of images and more Python scripts	Luna
14.02.2025	08:30:00	09:30:00	01:00:00	Writing	Hosted Flask service   Used LLMs	Luna
14.02.2025	12:20:00	13:20:00	01:00:00	Writing	Build.sh for easier build via Linux only   Original idea optimization	Luna
14.02.2025	14:50:00	16:20:00	01:30:00	Writing	Hello Luna / Original idea overworked / Timeline created v1 / Project timeline	Luna
14.02.2025	17:30:00	18:00:00	00:30:00	Writing	Different project evolutions	Luna
15.02.2025	22:15:00	22:40:00	00:25:00	Writing	Conceptual evolution and rationale finished	Luna
15.02.2025	22:40:00	00:00:00	01:20:00	Writing	Headlines improvement   Structure   Beginning and ending	Luna
16.02.2025	00:00:00	01:10:00	01:10:00	Writing	Core functionalities Student AI hub   Hosted Flask service	Luna
16.02.2025	10:30:00	12:00:00	01:30:00	Writing	Firebase integration   TSN integration issues	Luna
17.02.2025	08:50:00	09:30:00	00:40:00	Meeting	Discussion with Prof. Greinöcker	Luna

Continued on next page

Date	Start	End	Hours	Tasks	Details	Persons
17.02.2025	10:40:00	12:10:00	01:30:00	Writing	Student AI hub   Settings for listing   Open AI integration   Programming bot	Luna
17.02.2025	16:00:00	16:30:00	00:30:00	Writing	Image recognition   Flask server	Luna
18.02.2025	08:00:00	09:00:00	01:00:00	Writing	Account management   Image to text   Saved chats	Luna
18.02.2025	10:00:00	11:00:00	01:00:00	Writing	Open source challenges and disadvantages	Luna
18.02.2025	14:20:00	15:00:00	00:40:00	Writing	Risks and chances of open source	Luna
18.02.2025	16:00:00	16:45:00	00:45:00	Writing	Fixing code   Open risks of open source	Luna
24.02.2025	18:20:00	18:50:00	00:30:00	Writing	Feature excluded from website	Luna
26.02.2025	08:00:00	12:30:00	04:30:00	Writing	Economic part finished	Luna
01.03.2025	18:00:00	20:00:00	02:00:00	Writing	Finishing website section   Small improvements	Luna
02.03.2025	13:00:00	15:30:00	02:30:00	Writing	Pictures added   Test results and analysis (Quantitative and qualitative)   Comparison and selection	Luna
03.03.2025	09:20:00	13:00:00	03:40:00	Writing	Outlook   Introduction   Small improvements	Luna
03.03.2025	13:50:00	15:00:00	01:10:00	Writing	Flask Server structure	Luna
04.03.2025	7:30:00	8:30:00	01:00:00	Writing	Flask Service	Luna
04.03.2025	15:15:00	16:15:00	01:00:00	Writing	Flask Service	Luna
06.03.2025	11:30:00	13:30:00	02:00:00	Writing	Flask Service Utility functions	Luna
06.03.2025	10:00:00	11:30:00	01:30:00	Writing	KI use and Acknowledgement	Luna
10.03.2025	09:00:00	10:00:00	01:00:00	Writing	Conclusion	Luna
16.03.2025	08:00:00	09:00:00	01:00:00	Writing	Smaller fixes and improvements	Luna

*Continued on next page*

Date	Start	End	Hours	Tasks	Details	Persons
18.03.2025	14:00:00	15:00:00	01:00:00	Organization	Group meeting: about printing and binding	All
18.03.2025	17:30:00	21:00:00	03:30:00	Writing	Corrections and improvements	Luna

## B.2. Florian Prandstetter

Date	Start	End	Hours	Tasks	Details	Persons
13.09.2024	08:50:00	09:20:00	00:30:00	Planning	Discussed and assigned the new idea	All (oL)
15.09.2024	14:00:00	15:00:00	01:00:00	Meeting		All (oL)
18.09.2024	16:09:00	16:50:00	00:41:00	Research	Searching for project components	Gabriel, Flo
19.09.2024	14:50:00	17:30:00	02:40:00	Research	OS for the Raspberry Pi 5	Flo
27.09.2024	17:30:00	20:00:00	02:30:00	Software Development	Testing DietPi on Raspberry Pi 5	Flo
04.10.2024	07:50:00	08:00:00	00:10:00	Meeting	Discussion of orders   Definition of the parts list   Cost allocation defined	All (oL)
10.10.2024	14:30:00	18:00:00	03:30:00	Hardware Test	HAILO on Raspberry test and hardware test	All (oL)
10.10.2024	19:00:00	21:00:00	02:00:00	Software Test	Operating system tested and first implementation attempts	Flo
17.10.2024	10:00:00	00:00:00	14:00:00	Research; Software Development	UI implementation methods comparison	Flo
17.10.2024	12:30:00	12:50:00	00:20:00	Meeting	Further discussion with Greinöcker regarding the thesis	Flo, Luna

Continued on next page

Date	Start	End	Hours	Tasks	Details	Persons
21.10.2024	18:00:00	18:30:00	00:30:00	Research; Software Development	Selecting the server operating system	Flo
26.11.2024	18:40:00	20:13:00	01:33:00	Software Test	Visual Studio Code extension development	Flo
27.11.2024	08:34:00	11:51:00	03:17:00	Software Development	Visual Studio Code extension: First requests to the AI server	Flo
28.11.2024	08:10:00	11:35:00	03:25:00	Software Development	VS Code extension development	Flo
28.11.2024	12:30:00	13:50:00	01:20:00	Research; Software Development	VS Code extension chat with OLLAMA via AI server	Flo
28.11.2024	15:15:00	16:50:00	01:35:00	Research; Software Development	VS Code status bar updated	Flo
30.11.2024	13:40:00	16:25:00	02:45:00	Research; Software Development	Research on object recognition, program start of finger recognition for a user interface	Gabriel
02.12.2024	08:00:00	08:50:00	00:50:00	Research; Software Development	Research on code completion	Flo
04.12.2024	08:00:00	12:28:00	04:28:00	Research; Software Development	VS Code extension / Inline chat /	Flo
12.12.2024	10:54:00	11:05:00	00:11:00	Software Development	Dark mode for VS Code extension	Flo
26.12.2024	13:31:00	17:00:00	03:29:00	Software Test	Server setup and installing software	Flo
27.12.2024	15:00:00	16:37:00	01:37:00	Software Test	Server VPN tunnel	Flo
30.12.2024	14:08:00	15:16:00	01:08:00	Software Test	Setting up Tailscale, network architecture	Flo
02.01.2025	14:00:00	15:52:00	01:52:00	Software Development	Extension	Flo

*Continued on next page*

## Appendix B. Time Protocol

Date	Start	End	Hours	Tasks	Details	Persons
03.01.2025	14:22:00	15:39:00	01:17:00	Software Development	Extension	Flo
08.01.2025	11:00:00	11:30:00	00:30:00	Software Test	Setting up backend on home server	Flo
08.01.2025	11:30:00	12:32:00	01:02:00	Software Test	Website backend config and model testing	Flo, Luna
13.01.2025	13:00:00	15:20:00	02:20:00	Software Development	I hate my life (VS Code extension)	Flo
14.01.2025	08:00:00	10:59:00	02:59:00	Software Development	Visual Studio Code extension development	Flo
21.01.2025	10:00:00	11:00:00	01:00:00	Research	Model RAM setting (Fail)	Flo
29.01.2025	08:00:00	11:00:00	03:00:00	Writing	Writing the first part	Flo
09.02.2025	14:12:00	18:14:00	04:02:00	Software Development	Deepseek interface for server / Extension / Dockerizing	Flo
10.02.2025	10:00:00	12:30:00	02:30:00	Writing	Discussion, structure of the thesis, division, general writing	All (oL)
10.02.2025	16:35:00	17:54:00	01:19:00	Software Test	Docker	Flo
11.02.2025	14:45:00	15:31:00	00:46:00	Software Test	Docker	Flo
11.02.2025	16:50:00	17:54:00	01:04:00	Software Test	Docker (now it works)	Flo
11.02.2025	14:30:00	17:06:00	02:36:00	Writing	Docker + Docker Compose + Docker Images	Flo
14.02.2025	14:28:00	15:30:00	01:02:00	Writing	Hello Flo / Extension / TypeScript (+ axios)	Flo
26.02.2025	08:00:00	12:30:00	04:30:00	Writing	Operating system / Research economic aspects	Flo
27.02.2025	13:30:00	14:48:00	01:18:00	Writing	Operating system	Flo
01.03.2025	15:42:00	17:35:00	01:53:00	Writing	Operating system	Flo

# List of Tables



# List of Figures

2.1. Gantt Chart of the Project Evolution . . . . .	10
2.2. Conceptual Illustration of the Self-Sufficiency Raspberry Pi Project . . . . .	12
7.1. Comparative Analysis of CPU Utilization Across AI Models . . . . .	69
7.2. Comparative Analysis of Memory Consumption Across AI Models . . . . .	70
7.3. Comparative Analysis of Model Response Times . . . . .	71
7.4. Comparison of BLEU and ROUGE Scores . . . . .	72
7.5. Comparison of Grammatical Errors Across AI Models . . . . .	74
7.6. Comparison of Readability Scores Across AI Models . . . . .	75
7.7. Comparison of Sentiment Analysis Across AI Models . . . . .	76
7.8. Combined Metrics Overview for AI Models . . . . .	77
8.1. Flask Service Architecture . . . . .	95
9.1. User Account Management and Overview . . . . .	127
9.2. ChatGP API Pricing . . . . .	132
9.3. Image to Text Tool . . . . .	139
9.4. Main Navigation Bar . . . . .	143
9.5. Chat Bot Navigation . . . . .	144
13.1. Operating Systems Market Share . . . . .	182
13.2. Operating Systems for Servers Market Share . . . . .	183
13.3. Operating Systems Market Volume . . . . .	184



# Listings

7.1.	Python-quantitative-data-collection . . . . .	56
7.2.	Python-data-preperation-for-analysis . . . . .	58
7.3.	Python-quantitative-data-analysis . . . . .	62
7.4.	Python-qualitative-data-analysis . . . . .	66
7.5.	Vue.js Template for OpenAI API Integration . . . . .	85
7.6.	Vue.js Script for OpenAI API Integration . . . . .	86
8.1.	Chatbot Endpoint . . . . .	96
8.2.	Image Recognition Endpoint . . . . .	97
8.3.	OCR Endpoint . . . . .	100
8.4.	Programming Bot Endpoint . . . . .	104
8.5.	ask_ollama Utility Function . . . . .	106
8.6.	ask_ollama_vision Utility Function . . . . .	108
8.7.	improve_text_with_ollama Utility Function . . . . .	109
8.8.	perform_ocr Utility Function . . . . .	111
9.1.	Initializing Firebase and setting up authentication . . . . .	123
9.2.	Vue.js component for user sign-in . . . . .	124
9.3.	Abbreviated Vue.js Integration Example . . . . .	129
9.4.	Abbreviated Vue.js Component for the Programming Bot . . . . .	134
9.5.	Abbreviated Vue.js Component for Image Recognition . . . . .	136
9.6.	Abbreviated Vue.js Component for Image-to-Text Conversion . . . . .	139
9.7.	Abbreviated Implementation of the Saved Chats Feature . . . . .	141
10.1.	Create webview . . . . .	148
10.2.	IDE Chat GUI . . . . .	149
10.3.	Axios request . . . . .	152
10.4.	Status Bar . . . . .	153
10.5.	registering Command . . . . .	153
10.6.	assigning Command . . . . .	154
10.7.	Deploying the Extension . . . . .	154



# Bibliography

(n.d.a).

(n.d.b). [Online; accessed 2025-03-18].

*10 biggest advantages of open-source software* (2022). [Online; accessed 2025-01-28].

**URL:** <https://www.rocket.chat/blog/open-source-software-advantages>

*A Comprehensive Guide to Ollama - Cohorte Projects* (n.d.). [Online; accessed 2025-02-14].

**URL:** <https://www.cohorte.co/blog/a-comprehensive-guide-to-ollama>

akash1295 (2025), 'What is an operating system'. [Online; accessed 2025-02-26].

**URL:** <https://www.geeksforgeeks.org/types-of-operating-systems/>

Ankush (2024), 'What is ollama? everything important you should know'. [Online; accessed 2025-01-13].

**URL:** <https://itsfoss.com/ollama/>

Aptiv (2022), 'Aptiv completes the acquisition of wind river from tpg'. [Online; accessed 2025-03-12].

**URL:** <https://www.aptiv.com/en/newsroom/article/aptiv-completes-the-acquisition-of-wind-river-from-tpg>

*Axios Docs* (2025). Accessed: 2025-02-14.

**URL:** <https://axios-http.com/docs/intro>

Bansal, S. & Aggarwal, C. (2025), 'Textstat: Python library for text statistics'. Zugriff am 13. Februar 2025.

**URL:** <https://pypi.org/project/textstat/>

Bird, S., Klein, E. & Loper, E. (2025), 'Natural language toolkit (nltk)'. Zugriff am 13. Februar 2025.

**URL:** <https://www.nltk.org/>

businesswire (2022), 'Operating systems global market to reach 48.18billionby2026'. [Online; accessed 2025 – 03 – 11].

**URL:** <https://www.businesswire.com/news/home/20220825005370/en/Operating-Systems-Global-Market-to-Reach-48.18-Billion>

*Computer use (beta) - Anthropic* (n.d.). [Online; accessed 2025-03-03].

**URL:** <https://docs.anthropic.com/en/docs/agents-and-tools/computer-use>

- Contributors, W. (n.d.a), 'Graphics processing unit'. [Online; accessed 2025-03-18].  
**URL:** [https://en.wikipedia.org/wiki/Graphics\\_processing\\_unit](https://en.wikipedia.org/wiki/Graphics_processing_unit)
- Contributors, W. (n.d.b), 'Power supply'. [Online; accessed 2025-03-18].  
**URL:** [https://en.wikipedia.org/wiki/Power\\_supply](https://en.wikipedia.org/wiki/Power_supply)
- Contributors, W. (n.d.c), 'Random-access memory'. [Online; accessed 2025-03-18].  
**URL:** [https://de.wikipedia.org/wiki/Random-Access\\_Memory](https://de.wikipedia.org/wiki/Random-Access_Memory)
- Datenschutzgesetz (DSG) (1999), <https://www.ris.bka.gv.at/GeltendeFassung.wxe?Abfrage=Bundesnormen&Gesetzesnummer=10001597>. Accessed: 2025-03-18.
- Dharmadhikari, S. (2025), 'embedded operating systems market report'. [Online; accessed 2025-03-12].  
**URL:** <https://www.cognitivemarketresearch.com/embedded-operating-systems-market-report>
- DigitalDefynd, T. (2024), '10 ways ai is being used in economics', <https://digitaldefynd.com/IQ/ai-use-in-economics/>. Accessed: 2025-03-18.
- Dizikes, P. (2024), 'What do we know about the economics of ai?', <https://news.mit.edu/2024/what-do-we-know-about-economics-ai-1206>. Accessed: 2025-03-18.
- DockerFlask(n.d.).[Online; accessed 2025 – 02 – 13].  
**URL:** <https://www.freecodecamp.org/news/how-to-dockerize-a-flask-app/>
- DockerCompose(n.d.).[Online; accessed 2025 – 02 – 13].  
**URL:** <https://docs.docker.com/compose/>
- DTeK (2023), '(51) diy: Cyberdeck multi-function backup computer - youtube'. [Online; accessed 2025-03-03].  
**URL:** <https://www.youtube.com/watch?v=88tgZ6Xq3Jolist=PLoyOhsqi57GmrLomvDFnLXHn17OD3onLsindex=1>
- Firebase Features Explained in Detail (2025 Update) (n.d.). [Online; accessed 2025-02-16].  
**URL:** [https://www.lido.app.firebaseio.firebaseio-features](https://www.lido.app/firebase.firebaseio-features)
- Forbes Technology Council (2024), 'Misconceptions about open source solutions clarified by tech experts'. Accessed: 2024-12-04.  
**URL:** <https://www.forbes.com/councils/forbestechcouncil/2024/10/09/misconceptions-about-open-source-solutions-clarified-by-tech-experts/>
- Fortis, S. (2024), 'Openai hit with privacy complaint in austria, potential eu law breach'. [Online; accessed 2025-02-07].  
**URL:** <https://cointelegraph.com/news/openai-privacy-complaint-austria-potential-eu-law-breach>
- fortune business insights (2025), 'Server operating system market'. [Online; accessed 2025-03-12].  
**URL:** <https://www.fortunebusinessinsights.com/server-operating-system-market-106601>
- Foundation, P. S. (2025), 'json — json encoder and decoder'. Accessed: 2025-02-14.  
**URL:** <https://docs.python.org/3/library/json.html>

- Foy, P. (2024), 'Understanding tokens & context windows'. [Online; accessed 2025-02-07].  
**URL:** <https://blog.mlq.ai/tokens-context-window-llms/>
- Head, R. (2024), 'Red hat enterprise linux ai'. [Online; accessed 2025-03-01].  
**URL:** <https://www.redhat.com/de/technologies/linux-platforms/enterprise-linux/ai>
- Helms, J. (2023), '10 risks of open-source software | connectwise'. [Online; accessed 2025-02-18].  
**URL:** <https://www.connectwise.com/blog/cybersecurity/open-source-software-risks>
- Hendrickson, M., Magoulas, R. & O'Reilly, T. (2012), *Economic Impact of Open Source on Small Business: A Case Study*, O'Reilly Media.  
**URL:** <https://www.oreilly.com/library/view/economic-impact-of/9781449343408/>
- Houbrechts, M. (2024), 'Using ai for data analysis: The ultimate guide', [https://www.luzmo.com.translate.goog/blog/ai-data-analysis?\\_x\\_tr\\_sl=en&\\_x\\_tr\\_tl=de&\\_x\\_tr\\_hl=de&\\_x\\_tr\\_pto=sc](https://www.luzmo.com.translate.goog/blog/ai-data-analysis?_x_tr_sl=en&_x_tr_tl=de&_x_tr_hl=de&_x_tr_pto=sc). Accessed: 2025-03-18.
- HTML - Wikipedia (2001). [Online; accessed 2025-01-23].  
**URL:** <https://en.wikipedia.org/wiki/HTML>
- Hunter, J. D. & the Matplotlib Development Team (2025), 'Matplotlib: Python plotting library'. Accessed: 2025-02-14.  
**URL:** <https://matplotlib.org/>
- IBM (2021), 'What is intelligent automation?', <https://www.ibm.com/think/topics/intelligent-automation>. Accessed: 2025-03-18.
- IBM (2024a), 'Was ist computer-networking?'. [Online; accessed 2025-03-18].  
**URL:** <https://www.ibm.com/de-de/topics/networking>
- IBM (2024b), 'What is containerization?'. [Online; accessed 2025-03-18].  
**URL:** <https://www.ibm.com/think/topics/containerization>
- IBM (2024c), 'What is data storage?'. [Online; accessed 2025-03-18].  
**URL:** <https://www.ibm.com/think/topics/data-storage>
- IBM (n.d.), 'What are large language models (llms)? | ibm'. [Online; accessed 2025-01-21].  
**URL:** <https://www.ibm.com/think/topics/large-language-models>
- Initiative, O. S. (2007), 'The open source definition', <https://opensource.org/osd>. Accessed: 2024-12-02.
- Intel (n.d.), 'Intel® core™ i5-8600K processor'. [Online; accessed 2025-03-18].  
**URL:** <https://www.intel.com/content/www/us/en/products/sku/126685/intel-core-i58600k-processor-9m-cache-up-to-4-30-ghz/specifications.html>
- Introducing data residency in Europe | OpenAI* (n.d.). [Online; accessed 2025-02-07].  
**URL:** [https://openai.com/index/introducing-data-residency-in-europe/?utm\\_source=chatgpt.com](https://openai.com/index/introducing-data-residency-in-europe/?utm_source=chatgpt.com)

- Introduction to Markdown — Write the Docs* (n.d.). [Online; accessed 2025-02-17].  
**URL:** <https://www.writethedocs.org/guide/writing/markdown/>
- Joos, T. (2023), 'Die 12 besten remote administration tools'. [Online; accessed 2025-03-18].  
**URL:** <https://www.ip-insider.de/die-12-besten-remote-administration-tools-a5b8f65d154f5a5c3953dde613eb3e16/>
- Kirvan, P. (n.d.), 'Motherboard'. [Online; accessed 2025-03-18].  
**URL:** <https://www.computerweekly.com/de/definition/Motherboard>
- Liu, H., Li, C., Li, Y. & Lee, Y. J. (2023), 'Improved baselines with visual instruction tuning'.
- manjeetkso07 (2024), 'What is an operating system'. [Online; accessed 2025-02-26].  
**URL:** <https://www.geeksforgeeks.org/what-is-an-operating-system/>
- Mathpati, N. (2023), 'Open-source software overview: Benefits, risks, & best practices'. [Online; accessed 2025-02-18].  
**URL:** <https://www.cobalt.io/blog/risks-of-open-source-software>
- McKinney, W. & the Pandas Development Team (2025), 'Pandas: Python data analysis library'. Accessed: 2025-02-14.  
**URL:** <https://pandas.pydata.org/>
- Munteanu, A. (2024), 'Top 5 reasons to use ubuntu for your ai/ml projects'. [Online; accessed 2025-02-27].  
**URL:** <https://ubuntu.com/blog/ubuntu-ai-ml-projects>
- Naber, D. & andere (2025), 'Languagetool: A multilingual grammar and style checker'. Zugriff am 13. Februar 2025.  
**URL:** <https://pypi.org/project/language-tool-python/>
- NVIDIA, T. P. . (n.d.), 'Nvidia geforce rtx 2060'. [Online; accessed 2025-03-18].  
**URL:** <https://www.techpowerup.com/gpu-specs/geforce-rtx-2060.c3310>
- Office, C. B. (2024), 'Artificial intelligence and its potential effects on the economy and the federal budget', <https://www.cbo.gov/publication/61147>. Accessed: 2025-03-18.
- Oliphant, T. & the NumPy Development Team (2025), 'NumPy: The fundamental package for numerical computation'. Accessed: 2025-02-14.  
**URL:** <https://numpy.org/>
- Ollama* (n.d.a). [Online; accessed 2025-02-07].  
**URL:** <https://ollama.com/search>
- Ollama* (n.d.b). [Online; accessed 2025-01-20].  
**URL:** <https://ollama.com/search>
- ollama/ollama-python: Ollama Python library* (n.d.). [Online; accessed 2025-01-21].  
**URL:** <https://github.com/ollama/ollama-python>

OpenSource.com (2024), 'What is open source?', <https://opensource.com/resources/what-open-source>. Accessed: 2024-12-02.

Open Source Guide für Österreich | netidee (n.d.). [Online; accessed 2025-02-26].  
**URL:** <https://www.netidee.at/opensource-guide-oesterreich>

Overview - OpenAI API (n.d.a). [Online; accessed 2025-01-13].  
**URL:** <https://platform.openai.com/docs/overview>

Overview - OpenAI API (n.d.b). [Online; accessed 2025-02-07].  
**URL:** <https://platform.openai.com/docs/overview>

Pontikis, C. (2013), 'Five reasons to use debian as a server'. [Online; accessed 2025-03-01].  
**URL:** <https://www.pontikis.net/blog/five-reasons-to-use-debian-as-a-server>

pp\_pankaj(2025), 'Kernel in operating system',. Accessed: 2025-03-18.

Pricing | OpenAI (n.d.). [Online; accessed 2025-02-17].  
**URL:** <https://openai.com/api/pricing/>

psutil · PyPI (2024). [Online; accessed 2025-01-21].  
**URL:** <https://pypi.org/project/psutil/>

Rahmatallah, D. (n.d.), 'Absolute guide to software licensing types | licensing models'. [Online; accessed 2025-02-18].  
**URL:** <https://cpl.thalesgroup.com/software-monetization/software-licensing-models-guide>

Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 on the protection of natural persons with regard to the processing of personal data and on the free movement of such data (2016), <https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX:32016R0679>. Accessed: 2025-03-18.

Research, G. (2025), 'Rouge score python library'. Zugriff am 13. Februar 2025.  
**URL:** <https://pypi.org/project/rouge-score/>

Rotich, J. (2024), 'The future of linux-powered operating systems with ai: Unlocking limitless potential'. [Online; accessed 2025-02-27].  
**URL:** <https://www.linkedin.com/pulse/future-linux-powered-operating-systems-ai-unlocking-limitless-rotich-qbusf>

Santhosh, S. (2023), 'Understanding bleu and rouge score for nlp evaluation | by sthanikam santhosh | medium'. [Online; accessed 2025-01-13].  
**URL:** <https://medium.com/@sthanikamsanthosh1994/understanding-bleu-and-rouge-score-for-nlp-evaluation-1ab334ecadcb>

Singla, S. (2022), 'What is the operating system market share?'. [Online; accessed 2025-03-10].

**URL:** <https://www.scaler.com/topics/operating-system-market-share/>

statcounter (2025a), 'Desktop operating system market share worldwide'. [Online; accessed 2025-03-12].

**URL:** <https://gs.statcounter.com/os-market-share/desktop/worldwide>

statcounter (2025b), 'Operating system market share worldwide'. [Online; accessed 2025-03-10].

**URL:** <https://gs.statcounter.com/os-market-share>

*Statement on AI Risk | CAIS* (n.d.). [Online; accessed 2025-03-18].

**URL:** <https://www.safe.ai/work/statement-on-ai-risk>

StudioLabs (2024), 'Open source for startups: Lower costs, higher growth'. Accessed: 2024-12-04.

**URL:** <https://www.studiolabs.com/open-source-for-startups-lower-costs-higher-growth/>

T4 (2022), 'Server operating system market share'. [Online; accessed 2025-03-10].

**URL:** <https://www.t4.ai/industry/server-operating-system-market-share>

Tailscale (n.d.), 'Tailscale'. [Online; accessed 2025-03-18].

**URL:** <https://tailscale.com/>

tanujasm24 (2024), 'What is processor?'. [Online; accessed 2025-03-18].

**URL:** <https://www.geeksforgeeks.org/what-is-processor/>

*The Legal Side of Open Source | Open Source Guides* (2025). [Online; accessed 2025-02-18].

**URL:** <https://opensource.guide/legal/>

*The Pros and Cons of Open-Source Software: A Guide for Developers and Executives* (2023). [Online; accessed 2025-01-28].

**URL:** <https://www.bairesdev.com/blog/the-pros-and-cons-of-open-source-software-a-guide-for-developers-and-executives/>

to Wikimedia projects, C. (2001a), 'Css - wikipedia'. [Online; accessed 2025-01-23].

**URL:** <https://en.wikipedia.org/wiki/CSS>

to Wikimedia projects, C. (2001b), 'Javascript - wikipedia'. [Online; accessed 2025-01-23].

**URL:** <https://en.wikipedia.org/wiki/JavaScript>

to Wikimedia projects, C. (2005), 'Openemr - wikipedia'. [Online; accessed 2025-02-26].

**URL:** <https://en.wikipedia.org/wiki/OpenEMR>

to Wikimedia projects, C. (2006), 'Bleu - wikipedia'. [Online; accessed 2025-01-13].  
URL: <https://en.wikipedia.org/wiki/BLEU>

to Wikimedia projects, C. (2024), 'Red hat'. [Online; accessed 2025-03-12].