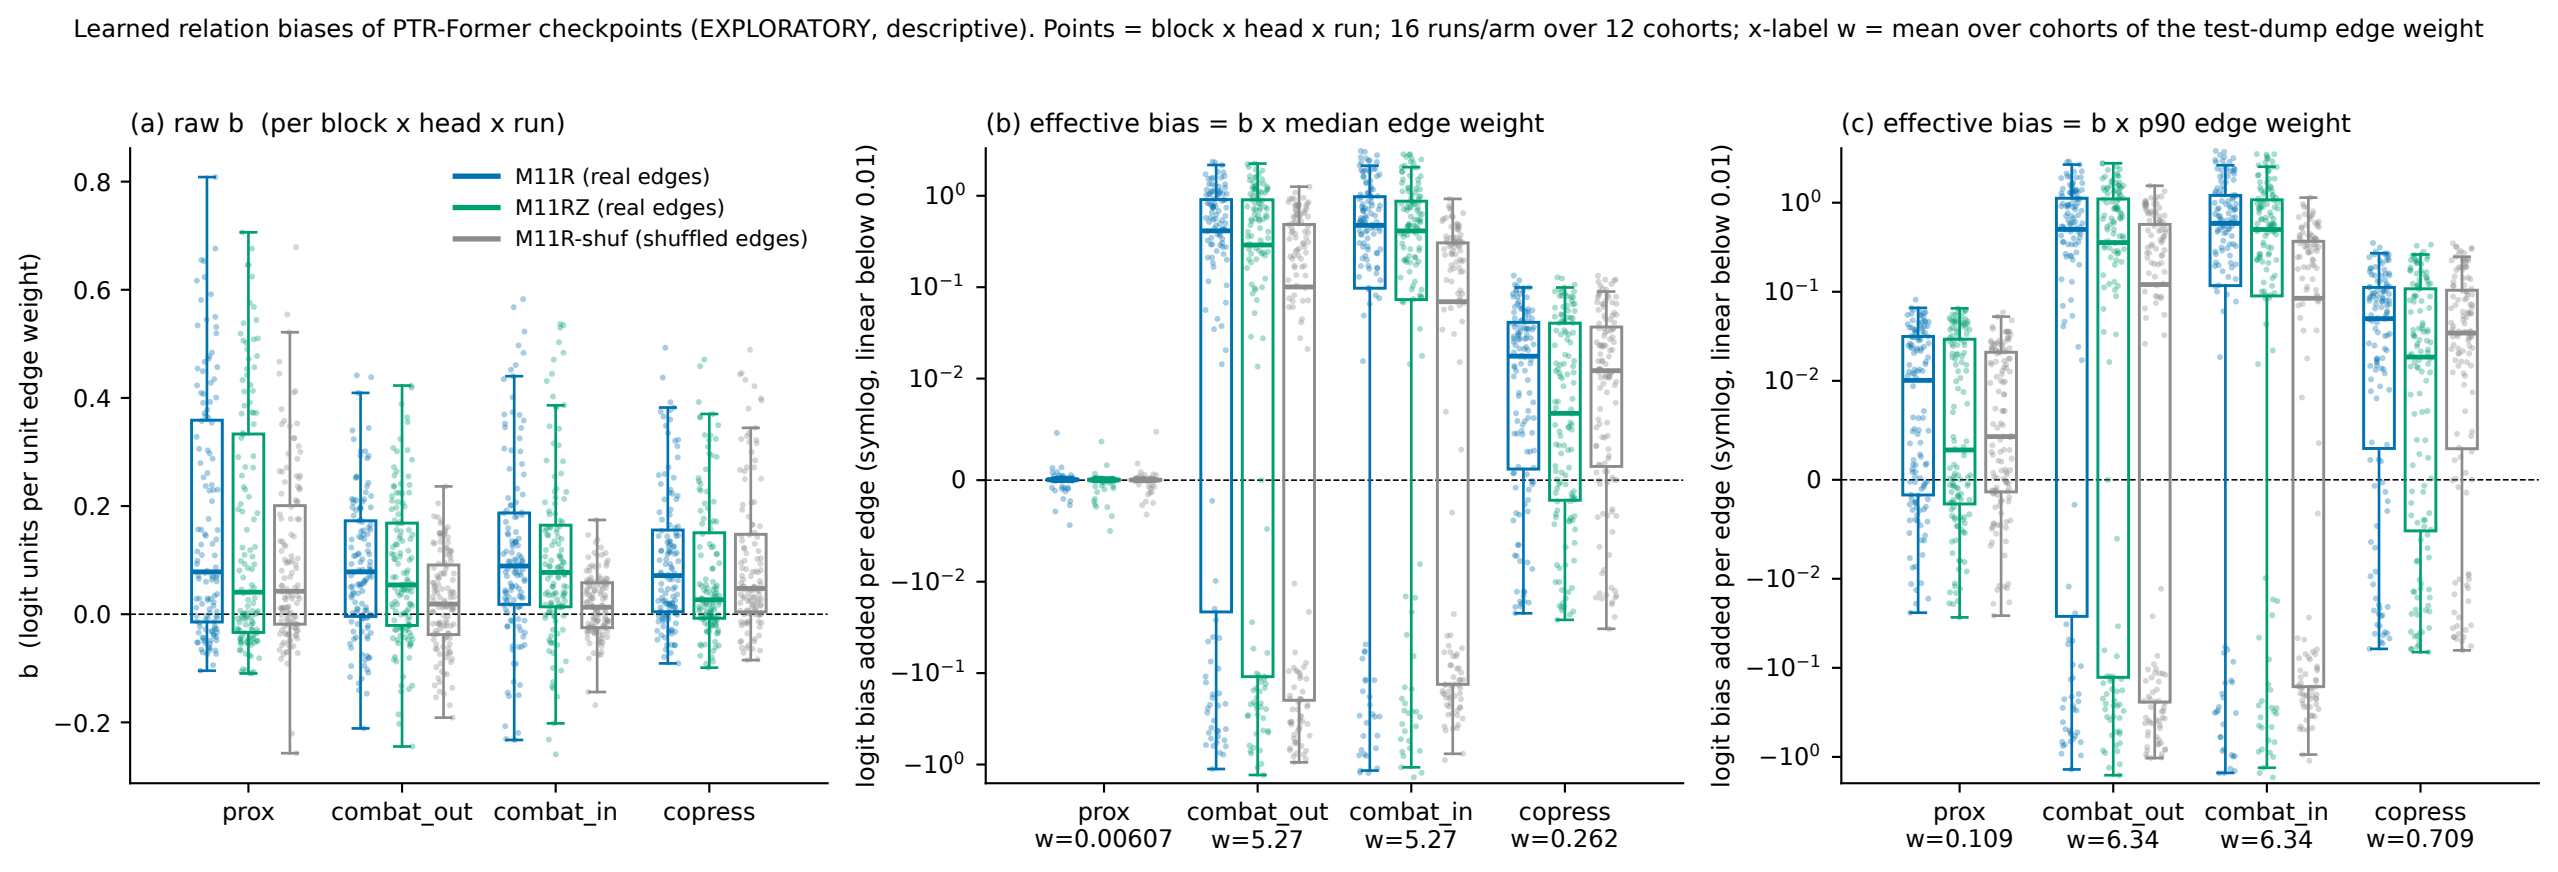

Learned relation biases of PTR-Former checkpoints (EXPLORATORY, descriptive). Points = block x head x run; 16 runs/arm over 12 cohorts; x-label w = mean over cohorts of the test-dump edge weight
(a) raw b (per block x head x run)
M11R (real edges)
M11RZ (real edges)
M11R-shuf (shuffled edges)
b (logit units per unit edge weight)
prox
combat_out
combat_in
copress
(b) effective bias = b x median edge weight
logit bias added per edge (symlog, linear below 0.01)
prox w=0.00607
combat_out w=5.27
combat_in w=5.27
copress w=0.262
(c) effective bias = b x p90 edge weight
logit bias added per edge (symlog, linear below 0.01)
prox w=0.109
combat_out w=6.34
combat_in w=6.34
copress w=0.709