




Vinchin Backup & Recovery

Version 4.0

User Guide for VMware/XenServer/RHV



CONTENTS

1.	Summary	7
1.1.	Product Overview	7
1.2.	Key Features	8
1.3.	Platform Support.....	10
1.4.	System Login.....	11
1.5.	Home Page Overview	12
1.6.	Getting Started	14
2.	Resource Management.....	16
2.1.	System License.....	16
2.2.	Manage Backup Repository	19
2.2.1.	Add Backup Repository.....	19
2.2.1.1.	Partition.....	21
2.2.1.2.	Local Disk.....	23
2.2.1.3.	LVM.....	24
2.2.1.4.	Fibre Channel	25
2.2.1.5.	iSCSI.....	26
2.2.1.6.	NFS.....	27
2.2.1.7.	CIFS	27
2.2.2.	Edit Backup Repository	28
2.2.3.	Delete Backup Repository	29
2.2.4.	Manage Imported Backups	30

2.3.	Virtual Infrastructure	32
2.3.1.	Add Server	32
2.3.2.	Edit Server	34
2.3.3.	Delete Server	35
2.3.4.	Manage Virtual Machines.....	36
2.4.	LAN-Free Settings.....	38
2.4.1.	Add LAN-Free Repository	39
2.4.1.1.	FC Storage.....	39
2.4.1.2.	iSCSI Storage.....	41
2.4.1.3.	NFS Storage	43
2.4.2.	Edit LAN-Free Repository	44
2.4.3.	Delete LAN-Free Repository	44
2.5.	Manage Backup Nodes.....	46
2.5.1.	Edit Backup Node.....	46
2.5.2.	Delete Backup Node.....	47
2.6.	Manage Users.....	49
2.6.1.	Add User.....	50
2.6.2.	Edit User.....	51
2.6.3.	Delete User.....	52
2.6.4.	Unlock User	53
2.7.	System Settings.....	54
2.7.1.	IP Settings.....	54

2.7.2.	Time Settings.....	55
2.7.3.	Email Notification	56
2.7.4.	DNS Settings	59
2.7.5.	Restart & Poweroff	60
3.	Backup / Restore Job.....	61
3.1.	VMware vSphere	61
3.1.1.	VM Backup	61
3.1.1.1.	Authorize Host.....	61
3.1.1.2.	Create Backup Job	63
3.1.1.2.1.	Backup Source	63
3.1.1.2.2.	Primary Strategy.....	67
3.1.1.2.3.	Advanced Strategy.....	73
3.1.1.2.4.	Review & Confirm.....	81
3.1.1.3.	Perform Backup Job.....	81
3.1.2.	VM Restore.....	86
3.1.2.1.	Create Restore Job.....	86
3.1.2.1.1.	Restore Point	86
3.1.2.1.2.	Restore Destination	87
3.1.2.1.3.	Restore Strategy	90
3.1.2.1.4.	Review & Confirm.....	92
3.1.2.2.	Perform Restore Job	93
3.1.3.	VM Instant Recovery.....	95

3.1.3.1. Create Instant Recovery Job	96
3.1.3.2. Perform Instant Recovery Job	97
3.1.4. VM Migration	101
3.2. Citrix XenServer	102
3.2.1. Install Backup Plugin	102
3.2.2. VM Backup	104
3.2.2.1. Authorize Host	104
3.2.2.2. Create Backup Job	107
3.2.2.2.1. Backup Source	107
3.2.2.2.2. Primary Strategy	110
3.2.2.2.3. Advanced Strategy	116
3.2.2.2.4. Review & Confirm	125
3.2.2.3. Perform Backup Job	125
3.2.3. VM Restore	130
3.2.3.1. Create Restore Job	130
3.2.3.1.1. Restore Point	130
3.2.3.1.2. Restore Destination	132
3.2.3.1.3. Restore Strategy	135
3.2.3.1.4. Review & Confirm	136
3.2.3.2. Perform Restore Job	137
3.2.4. VM Instant Recovery	140
3.2.4.1. Create Instant Recovery Job	140

3.2.4.2.	Perform Instant Recovery Job	144
3.2.5.	VM Migration	147
3.3.	RedHat RHV/Ovirt.....	150
3.3.1.	Install Backup Plugin	150
3.3.2.	VM Backup	152
3.3.2.1.	Authorize Host.....	152
3.3.2.2.	Create Backup Job	155
3.3.2.2.1.	Backup Source	155
3.3.2.2.2.	Primary Strategy	157
3.3.2.2.3.	Advanced Strategy	162
3.3.2.2.4.	Review & Confirm.....	170
3.3.2.3.	Perform Backup Job.....	171
3.3.3.	VM Restore.....	175
3.3.3.1.	Create Restore Job	175
3.3.3.1.1.	Restore Point	175
3.3.3.1.2.	Restore Destination	176
3.3.3.1.3.	Restore Strategy	179
3.3.3.1.4.	Review & Confirm.....	180
3.3.3.2.	Perform Restore Job	181
3.3.4.	VM Instant Recovery.....	184
3.3.4.1.	Create Instant Recovery Job.....	184
3.3.4.2.	Perform Instant Recovery Job	187

3.3.5.	VM Migration	189
4.	Monitor & Manage	192
4.1.	Current Job.....	192
4.2.	History Job	195
4.3.	Restore Points	196
4.4.	Backup Copy (For VMware Only)	199
4.5.	Virtual Machines.....	202
5.	Log/Alert	204
5.1.	Job Log	204
5.2.	System Log.....	206
5.3.	Job Alert.....	207
5.4.	System Alert.....	209
6.	Admin.....	211
6.1.	My Information	212
6.2.	Change Password.....	212
6.3.	Lock Screen	213
6.4.	About us	214
6.5.	Help	214
6.6.	Logout.....	214

1. Summary

1.1. Product Overview

Vinchin Backup & Recovery is an easy-to-use, secured and reliable virtual machine data protection software designed to support multiple hypervisors including VMware vSphere, Citrix XenServer, RedHat Virtualization and open-sourced KVM under different virtual environments. It is an image-based agentless backup product which can be seamlessly integrated with your existing virtualization environments.

Vinchin Backup & Recovery supports Web UI management which allows users to manage & monitor any of their backup/restore tasks on either PC, mobile or tablet device. Flexible backup schedules set by daily, weekly, monthly let the backup jobs run as scheduled without system manager. All you need to do is to pre-set the job schedule when first running the software. Meanwhile, the Retention Policy helps users "save the valid" and "delete the expired" backed up data, so as to ensure the continuous operation of the backup tasks and same time save data repository space. When a disaster occurs cause the damage of the virtual machines, you only need to choose the latest restore point and specify a target host to restore to, the virtual machines will be recovered to the pre-disaster status. To help the administrators monitor and review their backup & restore jobs, Vinchin Backup & Recovery supports current jobs view, history jobs review, system logs review and management etc.

1.2. Key Features

- High Compatibility: Supports VMware, XenServer, RedHat, OpenStack, Sangfor, H3C, Inspur and other open-sourced KVM / XenServer based hypervisors .
- Agentless Backup: No need to install any agent on guest OS, Vinchin Backup & Recovery system directly protects VMs on hypervisor-level, leads non-consumption of OS resources. Thus to reduce VM deployment and maintenance workload.
- Smart Backup Strategy: Flexible & smart backup strategies help to do backup & restore jobs as scheduled according to your actual demands in different scenarios.
 - Time granularity of full backup, incremental backup and differential backup can be set to minute-level. Which means your backup job can be automatically repeated every xxx hours/minutes/seconds.
 - Multiple VMs can be backed up and restored concurrently under virtual environments.
 - CBT and valid data comparison technology realizes valid data backup in VMs, and minimizes the backup time.
 - Use bank grade AES encryption to secure the transmission of VM backups. Also support data logic/physical isolation.
- LAN-Free Data Transfer: Using LAN-Free to backup and restore for VMware, XenServer and RHV under SAN environment helps speed up backup and recovery time, lower the production system load.

- Instant VM Recovery: Instant VM Recovery helps to recover TB sized VMs in 15 secs, all business recovery in 1 min, minimized the break-off time of critical businesses.
- Quick-verify Recovery Availability: Recovering the VM backups to Data Verification Area (which is isolated with Business Area) by Instant VM Recovery helps to quick-verify the availability of backed up data.
- Full VM Recovery: When any damage or mistaken-delete happens to the backed up VM, you can fully restore it from any backup point in time rather than just "the latest backup point".
- Live Migration: After instantly recovering, the VM can be synchronously migrated to the production area via virtualization platform live-migration or Vinchin Backup & Recovery's live migration function without effecting the normal operation of your business.

1.3. Platform Support

Vinchin Backup & Recovery supports for the following virtualization platforms:


- VMware ESXI: 4.0 4.1 5.0 5.1 5.5 6.0 6.5 6.7 vSAN 6.x
- Citrix XenServer: 5.6 6.x 7.x
- RedHat RHV/Ovirt: 4.0 4.1
- OpenStack + Ceph
- Sangfor HCI: 5.x
- H3C CAS: CAS 3.0 E0303/E0306
- Inspur InCloud Sphere: 4.0 4.5

1.4. System Login

Deploy the Vinchin Backup & Recovery in your virtual environment by following 《Quick Installation Guide...》. Then you are able to access the below Vinchin Backup & Recovery Web UI Login Portal by entering corresponding IP address (e.g. <http://192.168.65.1>) via web browser ([Google Chrome is recommended](#)).

Default username: [admin](#)

Default Password: [123456](#)

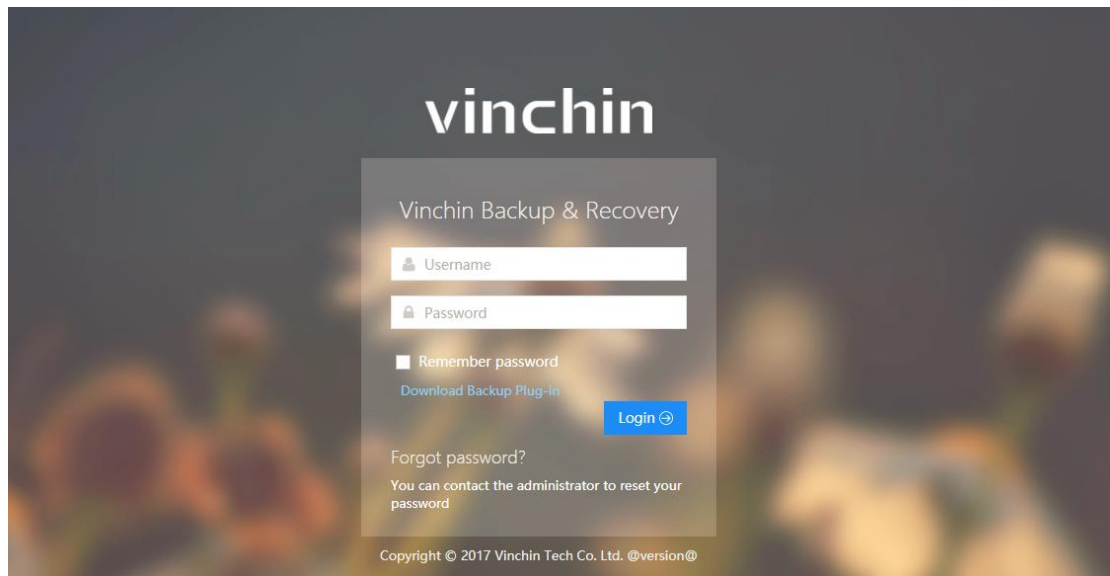


Note: If you forget your password:

1. Operator/Auditor, please contact your administrator to reset your password.
2. Administrator, please contact Vinchin Support Team to reset your password.

1.5. Home Page Overview

After login, you are coming to the home page, this page shows the system running status as below.

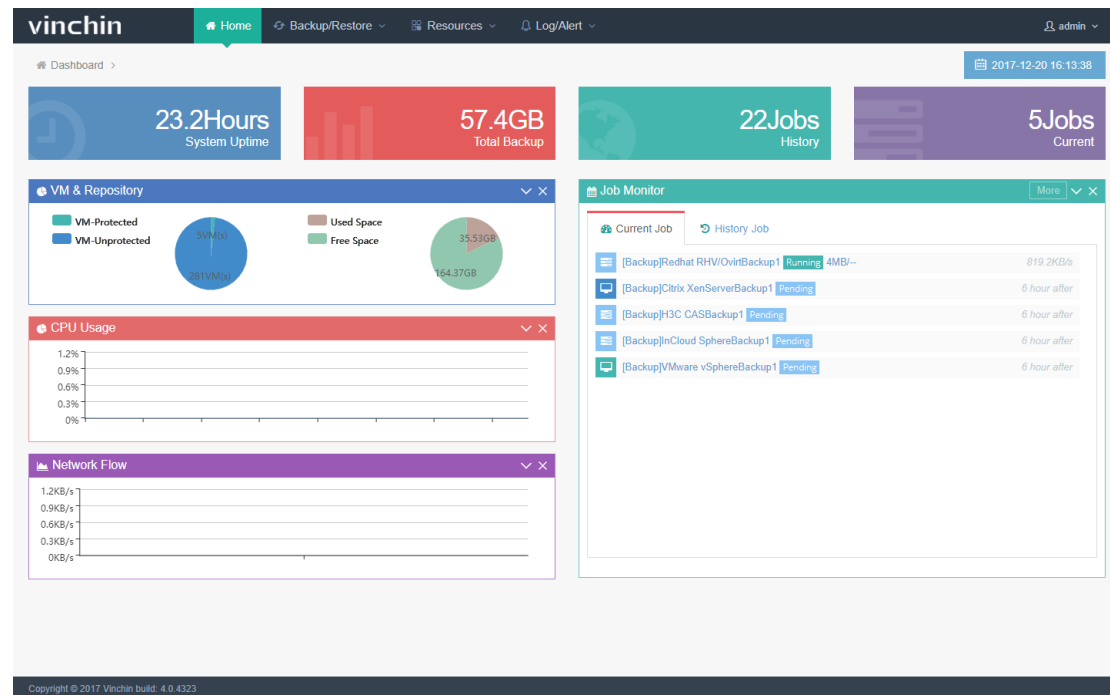

System Uptime is the system running time from the initial start-up to present (now).

Total Backup shows the accumulative backup size from the first backup to the latest backup.

Current shows current running job quantity.

History shows performed job quantity.

CPU Usage shows the CPU usage of the backup system.

Network Flow shows the real-time network traffic of the system.

VM & Repository shows the number of protected/unprotected VMs and used/free space of backup repository .

Current Job shows the current job list, click "more" to review the current job details at


【current Job】 page.

【History Job】 shows the history job list, click “more” to review the history job details at


【History Job】 page.

1.6. Getting Started

- a) Licensing. Upload Vinchin Backup & Recovery system [licence.key](#), details please follow chapter 2.1

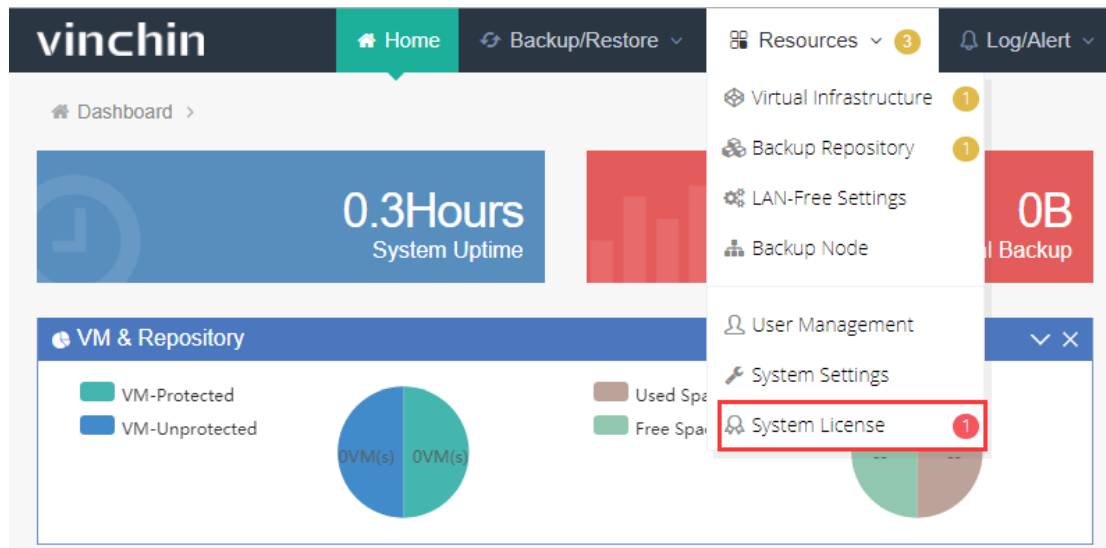


- b) Add Backup Repository. Add a storage location as backup repository, details please follow chapter 2.2

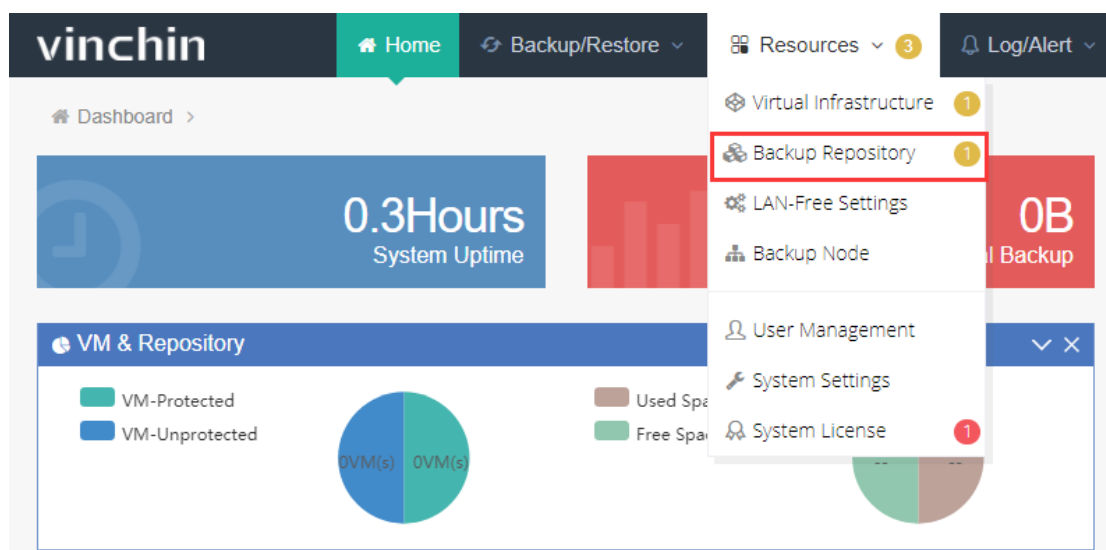


- c) Add virtual infrastructure(s). Add a standalone host or a virtual machine cluster which

need to be backed up, details please follow chapter 2.3.

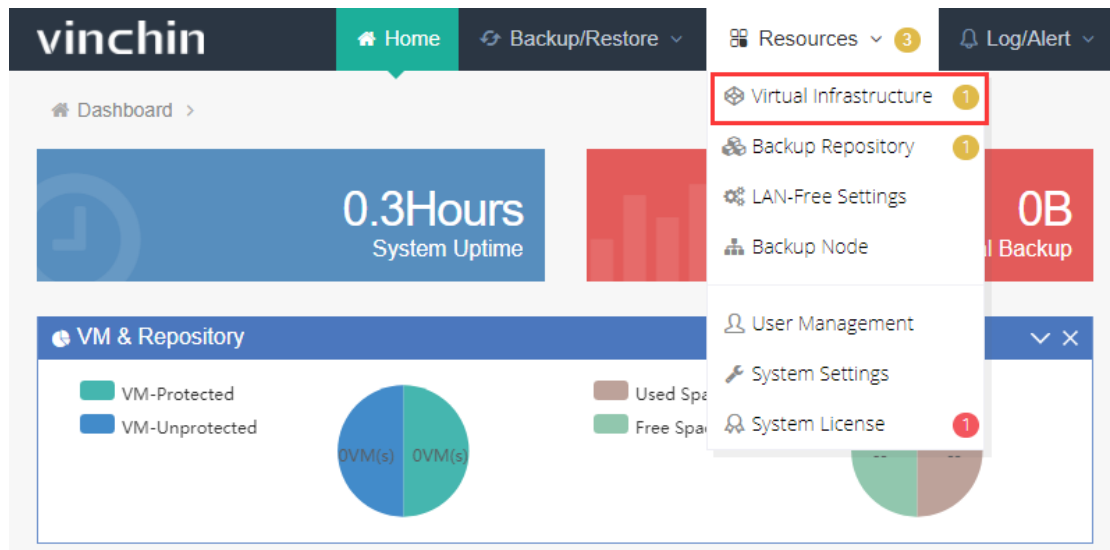

d) Create Backup Job. Create a new backup job to protect the target VMs, details please follow chapter 3.

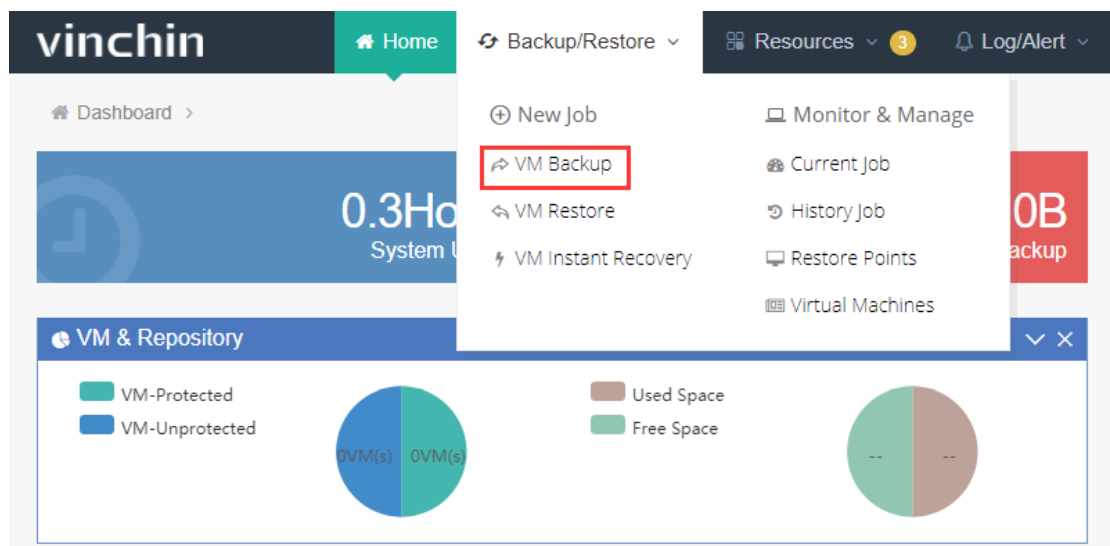


2. Resource Management


2.1. System License

Before starting backup your VMs, you need to get a license key from Vinchin and successfully activate your license in Vinchin Backup & Recovery system from **【Resources】**


- **【System License】** as below:

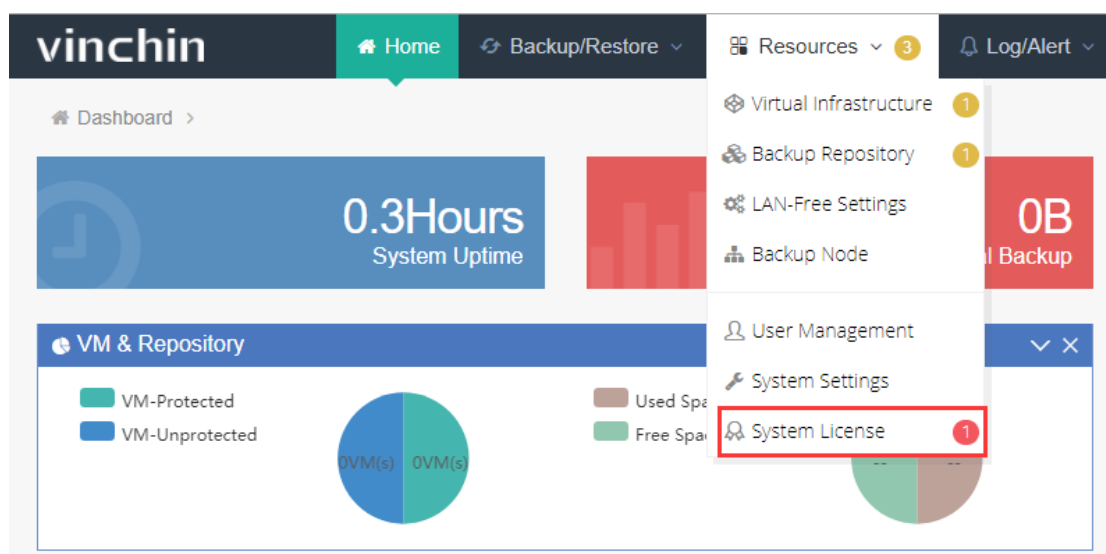

Then you come to the system license page, click **【Download Thumbprint】**, a txt file named "thumbprint.txt" will be downloaded. Send this txt file to support@Vinchin.com and you will receive an email with corresponding "license.key" file in a minute.

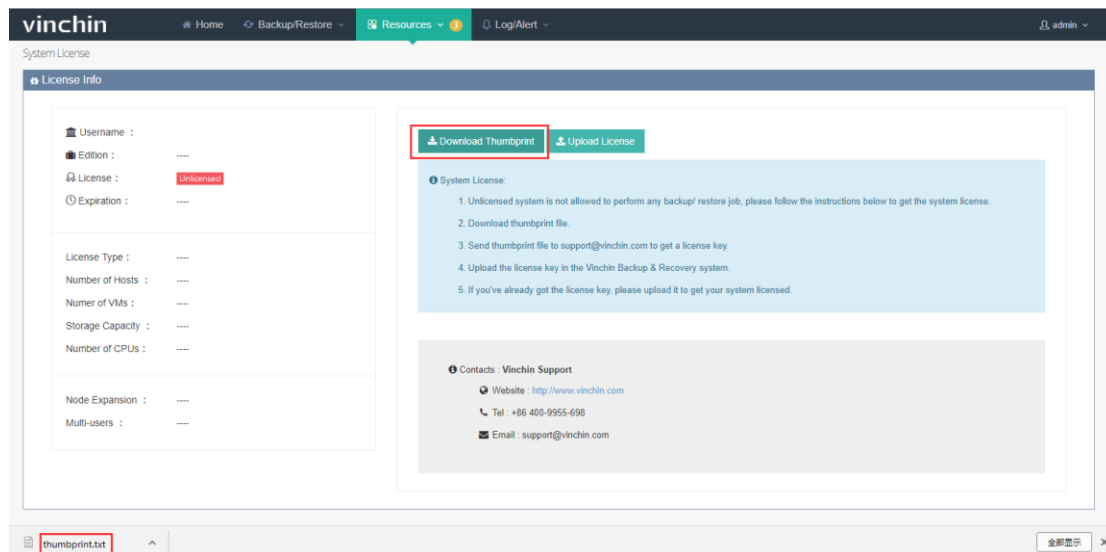

After receiving the "licence.key" file, click **【Upload License】**, choose the "licence.key" file and click **【open】** as below:

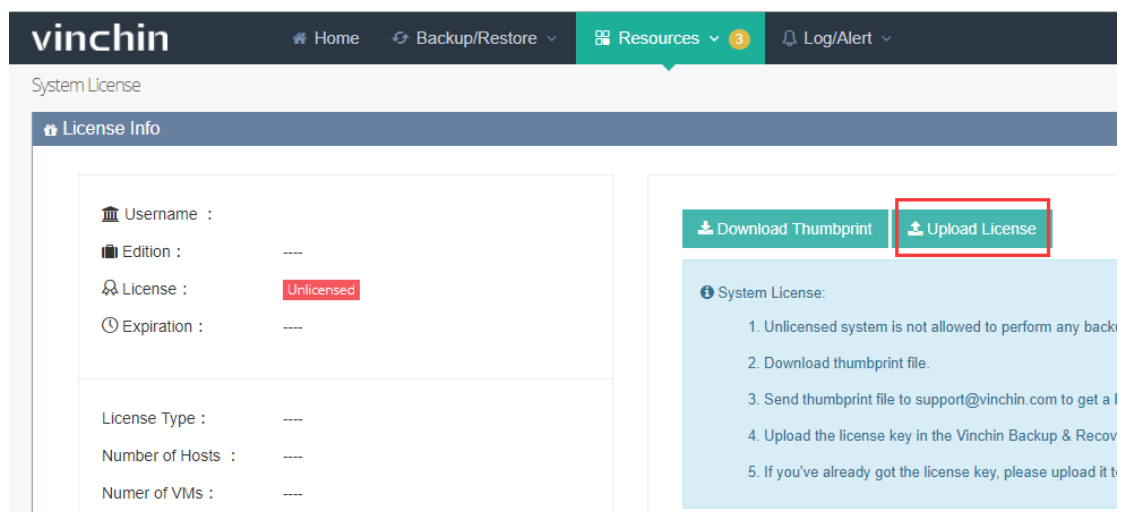

After you uploaded the "license.key" file successfully, you will see the detailed information of your username, software Edition (Standard or Enterprise), expiration date, license type and license limitations etc.

If you already have a license in hand, please upload it directly.

If you are using a perpetual license, there will be no expiration date. If you are using a trial license, the license will be expired and unavailable after a specified period. Please contact Vinchin Support for a perpetual license before expiration.

vinchin Home Backup/Restore Resources 1 Log/Alert admin

System License

License Info

Username : ---
Edition : Enterprise
License : Trial License (365 days left)
Expiration : 2018-12-26 17:28:05

License Type : Per Host
Number of Hosts : 2 / 50
Number of VMs : Unlimited
Storage Capacity : Unlimited
Number of CPUs : Unlimited

Node Expansion : Unlimited
Multi-users : Unlimited

Download Thumbprint **Upload License**

System License:

1. Unlicensed system is not allowed to perform any backup/ restore job, please follow the instructions below to get the system license.
2. Download thumbprint file.
3. Send thumbprint file to support@vinchin.com to get a license key.
4. Upload the license key in the Vinchin Backup & Recovery system.
5. If you've already got the license key, please upload it to get your system licensed.

Contacts : Vinchin Support

Website : <http://www.vinchin.com>
Tel : +86 400-9955-698
Email : support@vinchin.com

Copyright © 2017 Vinchin build: 4.0.4345

vinchin Home Backup/Restore Resources 21 Log/Alert admin

System License

License Info

Username : ---
Edition : Enterprise
License : Perpetual License (29 days left)
Expiration : 2018-02-02 14:32:15

License Type : Per Host
Number of Hosts : 6 / 20
Number of VMs : Unlimited
Storage Capacity : Unlimited
Number of CPUs : Unlimited

Node Expansion : Unlimited
Multi-users : Unlimited

Download Thumbprint **Upload License**

System License:

1. Unlicensed system is not allowed to perform any backup/ restore job, please follow the instructions below to get the system license.
2. Download thumbprint file.
3. Send thumbprint file to support@vinchin.com to get a license key.
4. Upload the license key in the Vinchin Backup & Recovery system.
5. If you've already got the license key, please upload it to get your system licensed.


Contacts : Vinchin Support

Website : <http://www.vinchin.com>
Tel : +86 400-9955-698
Email : support@vinchin.com

2.2. Manage Backup Repository


Backup repository is a place to store backed up data. Vinchin Backup & Recovery system supports multiple types of storage as backup repository including Partition, Local Disks, LVM, FC, iSCSI, NFS and CIFS. Users can add any of them when necessary. click **【Resources】**

- **【Backup Repository】** as below:

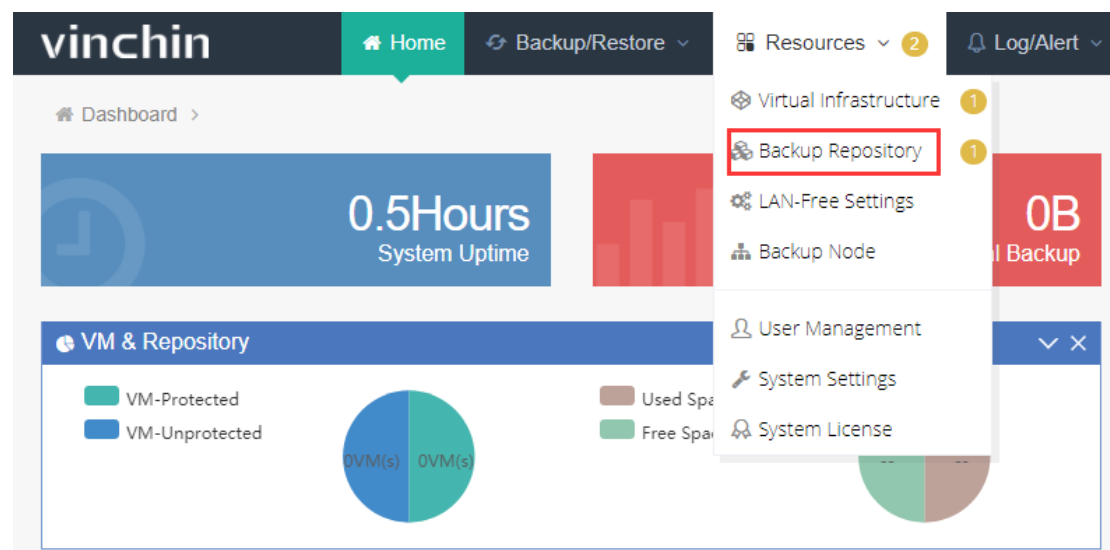

2.2.1. Add Backup Repository

Click **【Add】** in the Backup Repository page, you are able to add a new backup repository by following below steps:

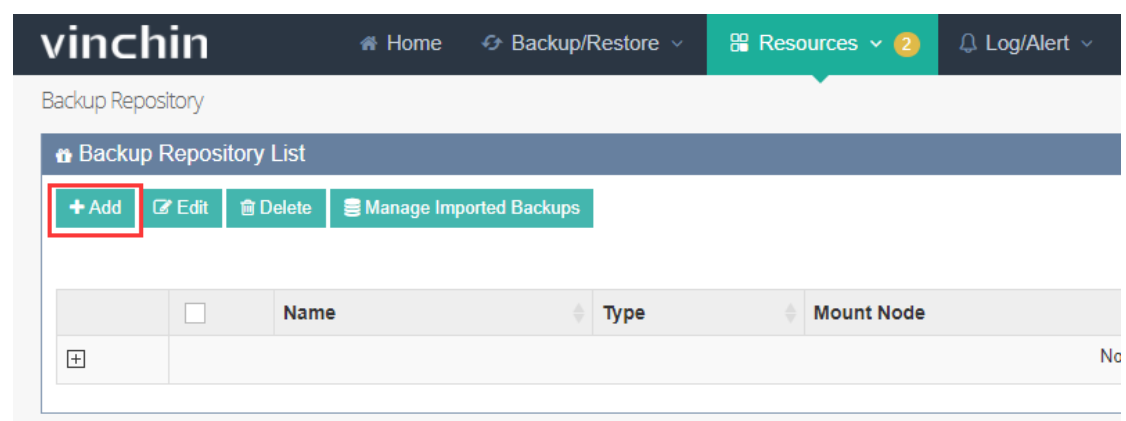

First, choose a backup node from the "Node IP address/domain" where you want to mount your backup repository. If there's more than one backup node in your virtual environment, choose one of them to mount your target storage resource as a backup repository.

Second, specify a storage type which you want to add as backup repository as below :

The screenshot shows the 'vinchin' application interface. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources' (with a notification badge), and 'Log/Alert'. The main content area is titled 'Add Backup Repository' and contains a section for 'Backup Repository Configurations'. This section has three fields: 'Node IP address/domain' with a dropdown menu showing 'localhost.localdomain(192.168.101.42)', 'Storage Type' with a dropdown menu showing a list of options (Partition, Local Disk, LVM, Fibre Channel, iSCSI, NFS, CIFS), and a 'Name' field. Below the 'Storage Type' dropdown is a note: 'Repository will be mounted to the selected backup node.' At the bottom of the configuration area are 'Cancel' and 'Ok' buttons.

Note: Please make sure the specified storage type is the one your production system actually is using.

Third, set up a critical value of storage from storage alert so that when your backup storage is insufficient, system will alert and send you email notification.

Storage Alert ☒ On

Mode Percentage ▼

Value ^ v %

2.2.1.1. Partition

Choose Partition from the "Storage Type", system will recognize the un-mounted /un-used partitions as below shows:

vinchin Home Backup/Restore Resources Log/Alert admin

Add Backup Repository

Backup Repository Configurations

Node IP address/domain: localhost.localdomain(192.168.101.42)
Repository will be mounted to the selected backup node.

Storage Type: Partition
Select a storage type for the repository

Storage Resource:

	Name	Type	Capacity
☐			
☒	/dev/sdb1	Disk Partition	300GB

Name: Partition1
Type a name for this repository.

Cancel Ok

Tick the selected partition, if there is previous backed up data in this partition, you can choose to import the data or format the partition:

vinchin Home Backup/Restore Resources Log/Alert admin

Add Backup Repository

Backup Repository Configurations

Node IP address/domain: localhost.localdomain(192.168.101.42)
Repository will be mounted to the selected backup node.

Storage Type: Partition
Select a storage type for the repository

Storage Resource:

	Name	Type	Capacity
☐			
☒	/dev/sdb1	Disk Partition	300GB

Name: Partition1
Type a name for this repository.


Cancel Ok

Import Backups ☒ Import Backups
The repository to be added contains 17 restore points. Selected restore points will be imported to Vinchin Backup & Recovery system.


Format Repository ☐ Format
Format the storage device will wipe all its data.

Cancel Ok

After importing the previous backups, you can find it in the **【Manage Imported Backups】** as below:

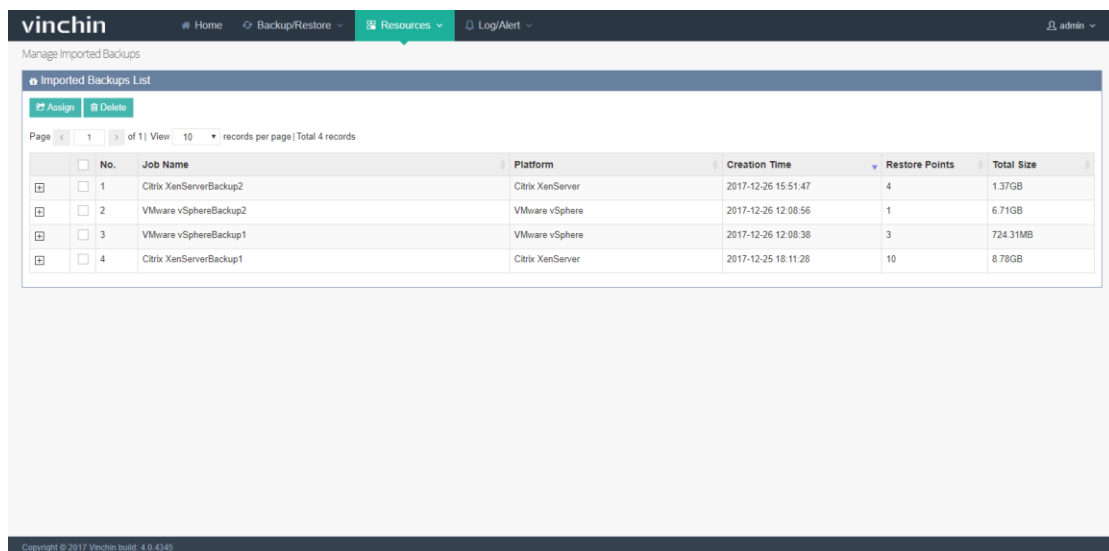

If there is other data but not backups in this partition, you can choose to format the partition:

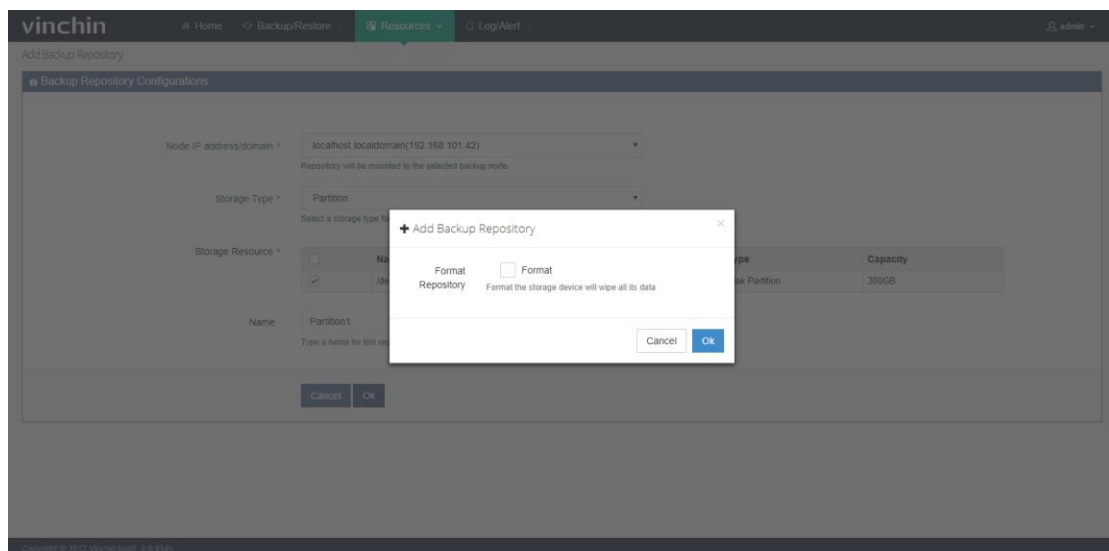

Warning: If you choose "Format", all the data in this partition will be erased.

2.2.1.2.Local Disk

Choose Local Disk from the "Storage Type", system will recognize the un-mounted /un-used disks as below:

Node IP address/domain * localhost.localdomain(192.168.101.42)

Repository will be mounted to the selected backup node.

Storage Type * Local Disk

Select a storage type for the repository

	Name	Type	Capacity
☐			
☒	/dev/sdb	Local Disk	300GB

If there is partition in your storage resource, and you want to save the partition data, please select "Partition" from the Storage Type.

Name Local Disk1

Type a name for this repository.

Cancel OK

Tick the selected disk, a window with Format Storage will come out as below:

Node IP address/domain * localhost.localdomain(192.168.101.42)

Repository will be mounted to the selected backup node.

Storage Type * Local Disk

Select a storage type for the repository

	Name	Type	Capacity
☐			
☒	/dev/sdb	Local Disk	300GB

If there is partition in your storage resource, and you want to save the partition data, please select "Partition" from the Storage Type.

Name Local Disk1

Type a name for this repository.

Cancel OK

Format Storage

The repository to be added /dev/sdb contains below partitions /dev/sdb1

After adding, all partitions contained in the repository will be formatted and data will be lost!

If you need to reserve the data, please add the repository from [Partition]

Format Repository ☐ Format

Format the storage device will wipe all its data

Cancel OK

Warning: If you add a local disk as backup repository, the disk will be forcibly formatted, all the data in this disk will be erased.

After adding repository completed, you can see the added repositories in the 【Backup Repository List】 as below:

Backup Repository

Backup Repository List

[+ Add](#) [Edit](#) [Delete](#) [Manage Imported Backups](#)

Page [1](#) of 1 | View [10](#) records per page | Total 1 records

	Name	Type	Mount Node	Node Status	Capacity	Free Space	Repository Status
☐	Local Disk1	Local Disk	localhost.localdomain(192.168.101.42)	Normal	299.85GB	299.82GB	Normal

2.2.1.3.LVM

Choose LVM (Logic Volume) from the "Storage Type", system will recognize the un-mounted /un-used logic volumes as below:

Add Backup Repository

Backup Repository Configurations

Node IP address/domain *

Repository will be mounted to the selected backup node.

Storage Type *

Select a storage type for the repository

Storage Resource *

☐	Name	Type	Capacity
☒	/dev/mapper/vinchin_vg-vinchin_lvm	LVM	200GB

Name

Type a name for this repository.

[Cancel](#) [Ok](#)

Note: Adding LVM is the same as adding Partition. If there is previous backed up data in the logic volume, you can choose to import the data or format the logic volume. If the data is not backup data, you can choose to format the logic volume.

After adding a LVM as backup repository, you can see the added repositories in the **【Backup Repository List】** as below:

vinchin

[Home](#) [Backup/Restore](#) [Resources](#) [Log/Alert](#) [admin](#)

Backup Repository

Backup Repository List

[+ Add](#) [Edit](#) [Delete](#) [Manage Imported Backups](#)

Page [1](#) of 1 | View [10](#) records per page | Total 1 records

	Name	Type	Mount Node	Node Status	Capacity	Free Space	Repository Status
☐	LVM1	LVM	localhost.localdomain(192.168.101.42)	Normal	199.9GB	199.87GB	Normal

2.2.1.4.Fibre Channel

Choose Fibre Channel from the "Storage Type", system will recognize the Fibre channel information and WWPN No. of HBA card. Map the LUN of FC storage server to the backup server. After mapping, choose FC again from the "Storage Type", system will recognize the mapped LUN as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Add Backup Repository

Backup Repository Configurations

Node IP address/domain * localhost.localdomain(192.168.65.5)

Repository will be mounted to the selected backup node.

Storage Type * Fibre Channel

Select a storage type for the repository

Fibre Channel

No.	Channel	wwn	wwqn	Speed	Status
1	host0	20:00:00:1b:32:81:7fed	21:00:00:1b:32:81:7fed	4 Gbit	Normal

Map the target FC LUN to the corresponding WWN

Storage Resource *

	Name	Type	Capacity
☐	/dev/sdd1	VMware vSphere	3TB

If there is partition in your storage resource, and you want to save the partition data, please select "Partition" from the Storage Type.

Name Fibre Channel1

Type a name for this repository.

Cancel OK

Copyright © 2018 Vinchin build: 4.0.4387

After adding a FC storage as backup repository, you can see the added repositories in the **【Backup Repository List】** as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Backup Repository

Backup Repository List

+ Add Edit Delete Manage Imported Backups

Page 1 of 1 View 10 records Total 1 records

	Name	Type	Mount Node	Node Status	Capacity	Free Space	Repository Status
☐	Fibre Channel1	Fibre Channel	localhost.localdomain(192.168.64.213)	Normal	3TB	3TB	Normal

Note: If you add a FC storage as backup repository, the FC storage will be forcibly formatted, all the data in this storage will be erased. If this FC storage has been added

and already exists backed up data, please add this FC storage via "Partition".

2.2.1.5.iSCSI

Choose iSCSI from the "Storage Type", you will see the iSCSI IQN information. Map the LUN of iSCSI storage server to the backup server IQN. After mapping completed, enter iSCSI server address and click **【Scan the Target】**, system will recognize the mapped LUN as below:

vinchin

Home Backup/Restore Resources Log/Alert

admin

Add Backup Repository

Backup Repository Configurations

Node IP address/domain * localhost.localdomain(192.168.101.42)

Repository will be mounted to the selected backup node.

Storage Type * iSCSI

Select a storage type for the repository

iSCSI Name * iqn.1994-05.com.redhat.347b96bc2c7

iSCSI Server * 192.168.1.183 3260

Enter IP address of the iSCSI server. Please make sure the network connection between the backup node and the iSCSI server is available. If multiple paths exist, you can add an address.

Port

Scan Target

Target LUN *

	Name	iqn	Type	Capacity
☒	/dev/sdc	iqn.2002-10.com.infotrend.raid.uid35812.001	iSCSI	500GB

If there is partition in your storage resource, and you want to save the partition data, please select "Partition" from the Storage Type.

Name * ISCSI1

Type a name for this repository.

Cancel Ok

Copyright © 2017 Vinchin build: 4.0.4345

Choose a LUN and click **【OK】**, the iSCSI storage will be added successfully. After adding an iSCSI storage as backup repository, you can see the added repositories in the **【Backup Repository List】** as below:

vinchin

Home Backup/Restore Resources Log/Alert

admin

Backup Repository

Backup Repository List

+ Add Edit Delete Manage Imported Backups

Page 1 of 1 View 10 records per page Total 1 records

	Name	Type	Mount Node	Node Status	Capacity	Free Space	Repository Status
☐	ISCSI1	iSCSI	localhost.localdomain(192.168.101.42)	Normal	499.75GB	499.72GB	Normal

Note : If you add an iSCSI storage as backup repository, it will be forcibly formatted, all the data in this storage will be erased. If this iSCSI storage has been added and already exists backed up data, please add this storage in via "Partition".

2.2.1.6.NFS

Choose NFS from the "Storage Type", enter your shared folder path as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Add Backup Repository

Backup Repository Configurations

Node IP address/domain * localhost.localdomain(192.168.101.42)
Repository will be mounted to the selected backup node.

Storage Type * NFS
Select a storage type for the repository

Share Folder * 192.168.67.8:/root/ifs ✓
NFS share folder, e.g. 192.168.1.10:/path/directory

Name NFS1
Type a name for this repository.

Cancel Ok

After adding the NFS storage completed, you can see the added repositories in the **【Backup Repository List】** as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Backup Repository

Backup Repository List

+ Add Edit Delete Manage Imported Backups

Page 1 of 1 View 10 records per page Total 1 records

	Name	Type	Mount Node	Node Status	Capacity	Free Space	Repository Status
	NFS1	NFS	localhost.localdomain(192.168.101.42)	Normal	499.76GB	190.87GB	Normal

Note: The share folders' previous data will not be erased when adding NFS storage.

2.2.1.7.CIFS

Choose CIFS from the "Storage Type", enter your shared folder path, username and

password as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Add Backup Repository

Backup Repository Configurations

Node IP address/domain * localhost.localdomain(192.168.101.42)
Repository will be mounted to the selected backup node.

Storage Type * CIFS
Select a storage type for the repository

Share Folder * //192.168.67.12/gongxiang ✓
CIFS share folder, e.g. //192.168.1.10/path/directory

Username vinchin ✓
Username for accessing CIFS

Password ***** ✓
Password for accessing CIFS

Name CIFS1
Type a name for this repository.

Cancel Ok

Copyright © 2017 Vinchin build: 4.0.4345

After adding the CIFS storage completed, you can see the added repositories in the

【Backup Repository List】 as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Backup Repository

Backup Repository List

+ Add Edit Delete Manage Imported Backups


Page 1 of 1 View 10 records per page Total 1 records

	Name	Type	Mount Node	Node Status	Capacity	Free Space	Repository Status
	CIFS1	CIFS	localhost.localdomain(192.168.101.42)	Normal	499.87GB	493.22GB	Normal

Note: The share folders' previous data will not be erased when adding CIFS storage.


2.2.2. Edit Backup Repository

Choose a repository, click 【Edit】 you can edit the repository name.

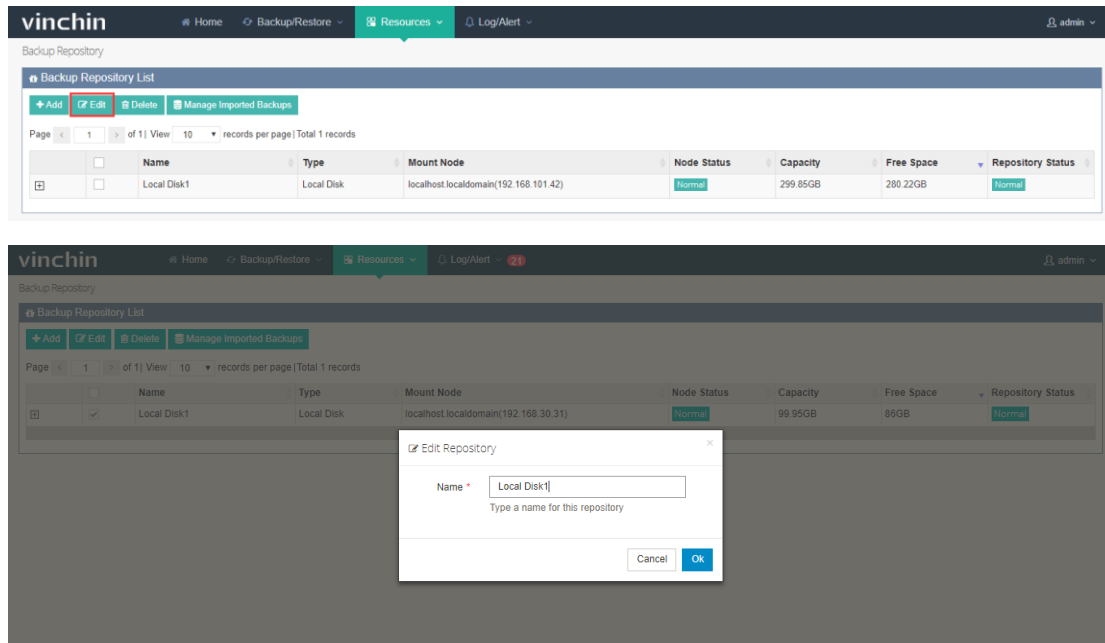

2.2.3. Delete Backup Repository

You can delete any of the repositories from the 【Backup Repository List】. Choose a repository, click 【Delete】. If there are backup data in this repository, system will remind you as below:

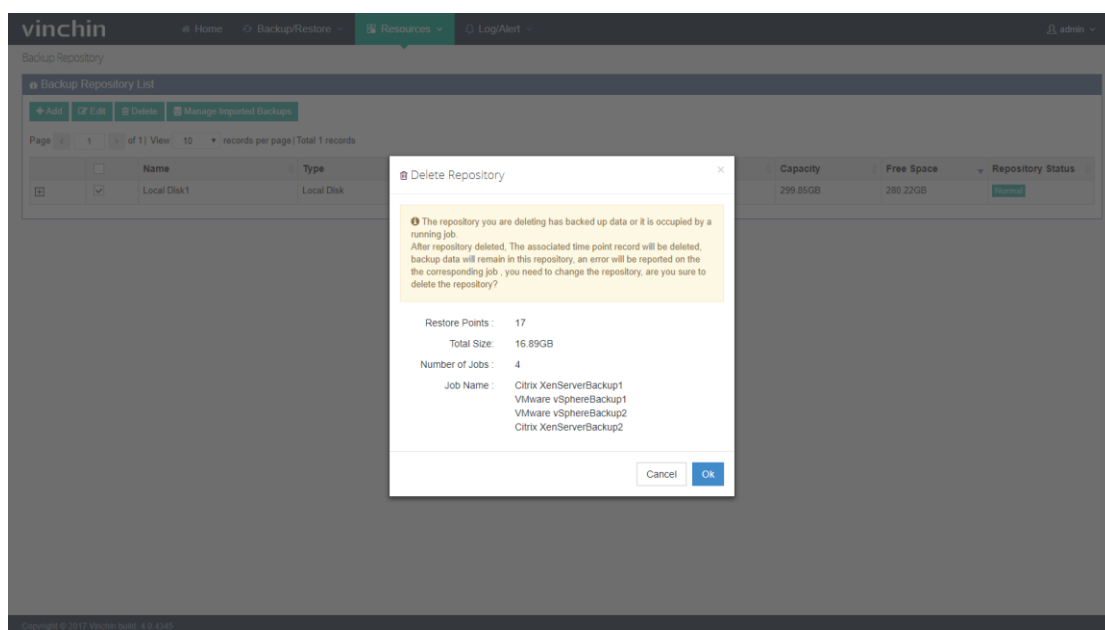


Click **【OK】** to delete the repository. The deleted repository can be re-added via "Partition".

Note: Deleting the repository is a logical action rather than a physical action, which means the VM corresponding restore point record will be deleted, but the backed up data will not be deleted actually. If you need the backed up data, you can re-add the data located repository to the backup system. Choose "Partition" to import the data.


2.2.4. Manage Imported Backups

If the added repository already exists backup data, you can choose to import the backups via "Partition". Imported backups can be found in **【Manage Imported Backups】** page as below:

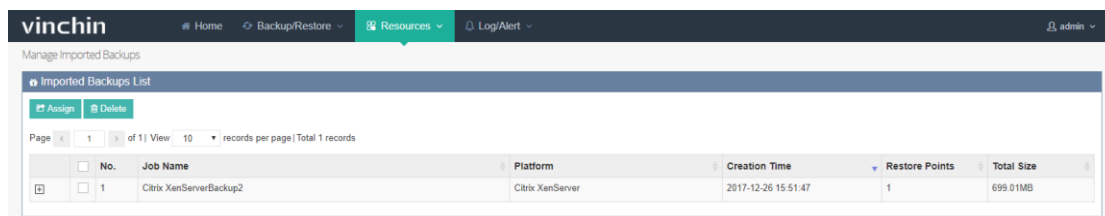

No.	Job Name	Platform	Creation Time	Restore Points	Total Size
1	Citrix XenServerBackup2	Citrix XenServer	2017-12-26 15:51:47	1	699.01MB

If you need to recovery the imported backups, you need to assign it to an user, click **【Assign】** as below:

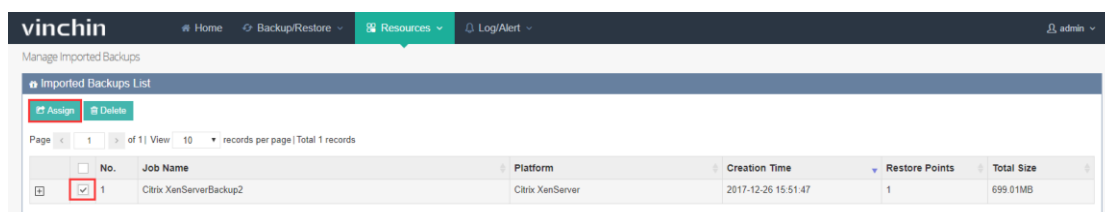

No.	Job Name	Platform	Creation Time	Restore Points	Total Size
1	Citrix XenServerBackup2	Citrix XenServer	2017-12-26 15:51:47	1	699.01MB

Assign to User


Number of Jobs 1

Assign * admin

Please select a user who you want to assign the imported backups to


Cancel Ok

Then you can find the assigned data in this user's **【Backup/Restore】** - **【Restore Points】** page as below:

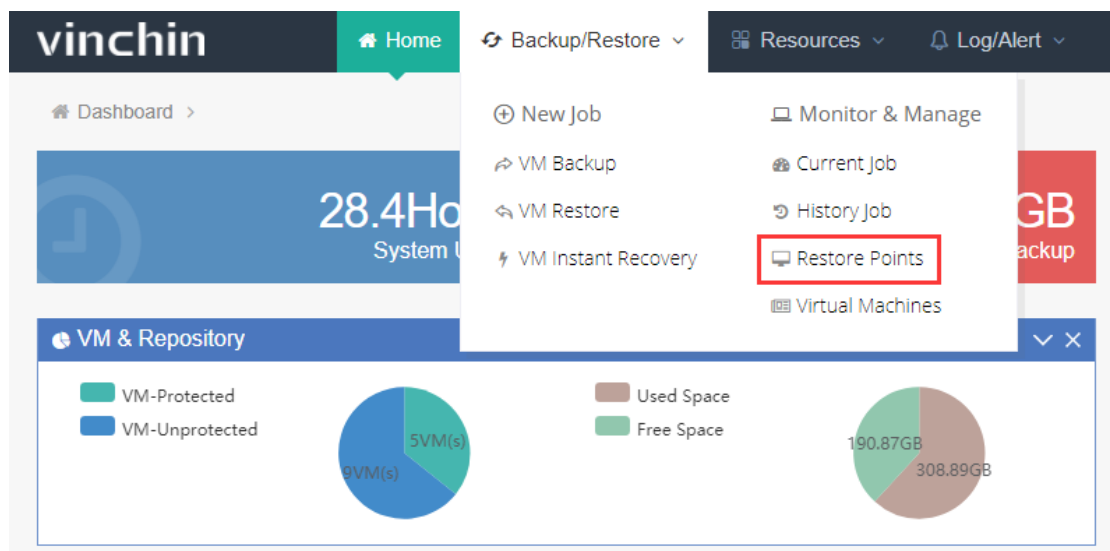

Note: You can create a new restore job to restore the imported backups if necessary.


If you don't need the imported backups, you can delete them by clicking **【Delete】** as below.

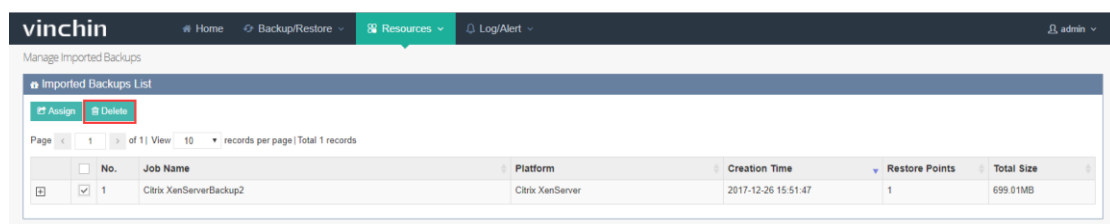

Warning: Once deleted, the imported backups are unrecoverable permanently.

2.3. Virtual Infrastructure

Before starting backup, you need to register your virtual infrastructure (either a VM Manager Server e.g. vCenter or a standalone host e.g. ESXi host) in Vinchin Backup & Recovery system. Click **【Resources】** - **【Virtual Infrastructure】** as below:

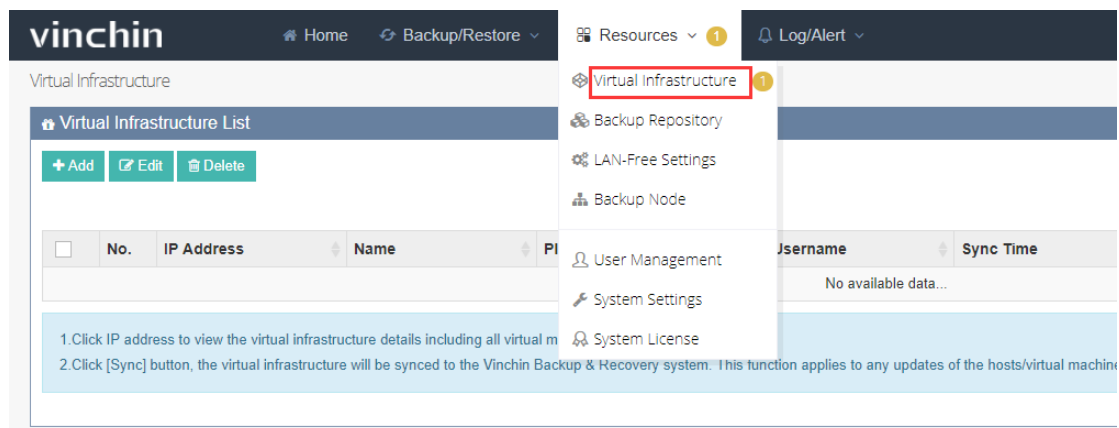

2.3.1. Add Server

Click **【Add】** you are coming to the virtual infrastructure adding page. Choose a virtualization platform (depends on your virtual environment) → Enter IP address, username, password of individual host /VM Manager Server and rename it, then click **【OK】** to save.

The screenshot shows the Vinchin web interface with the 'Add Virtual Infrastructure' form. The form is titled 'Fill in the virtual infrastructure information' and contains the following fields:

- Platform:** A dropdown menu with 'VMware vSphere' selected. Below it, a note says 'Select a virtualization platform to be backed up.'
- IP/Domain:** A text input field containing '192.168.64.10' with a green checkmark icon to its right. Below it, a note says 'To backup individual host, please enter its IP address or domain name. To backup multiple hosts, please enter IP address or domain name of corresponding VM Manager server (e.g. vCenter for VMware vSphere).'
- Username:** A text input field containing 'root' with a green checkmark icon to its right. Below it, a note says 'Username of individual host/VM Manager Server'.
- Password:** A text input field containing masked characters (asterisks) with a green checkmark icon to its right. Below it, a note says 'Password of individual host /VM Manager Server'.
- Name:** A text input field containing '192.168.64.10'. Below it, a note says 'Type a name for the individual host /VM Manager Server'.

At the bottom of the form are 'Cancel' and 'Ok' buttons. The footer of the page shows 'Copyright © 2017 Vinchin build: 4.0.4340'.

Platform: Supports VMware vSphere、Citrix XenServer、RedHat RHVOvirt、H3C CAS and Inspur InCloud.

IP Address/Domain: Either a standalone host IP address/domain (e.g. ESXi host) or a VM Manager Server IP address/domain (e.g. vCenter).

Username/Password: The username /password to access to the individual host /VM Manager Server.

Rename: Edit a name for this new added individual host /VM Manager Server.

Note:

- For XenServer, RHV/Ovirt, InCloud Sphere and H3C CAS, it is required to install a corresponding backup plugin on their hypervisors before getting started, details please refer to "Chapter 3. Backup/Restore Job".
- For H3C CAS, port number "8080" is required to be added in the name; For Redhat RHV/Ovirt, "@internal" is required to be added in the username as below:

No.	IP Address	Name	Platform	Username	Sync Time	Added By	Status	Operation
1	192.168.79.60	192.168.79.60	Redhat RHV/Ovirt	admin@internal	2017-12-25 11:49:57	admin	Unauthorized	Sync Auth
2	192.168.79.30.8080	192.168.79.30.8080	H3C CAS	admin	2017-12-25 11:48:02	admin	Unauthorized	Sync Auth
3	192.168.64.10	192.168.64.10	VMware vSphere	root	2017-12-25 11:41:10	admin	Unauthorized	Sync Auth

1 Click IP address to view the virtual infrastructure details including all virtual machines' status.
2 Click [Sync] button, the virtual infrastructure will be synced to the Vinchin Backup & Recovery system. This function applies to any updates of the hosts/virtual machines in the virtual infrastructure.

2.3.2. Edit Server

After adding the servers, you can find them in the Virtual Infrastructure list.

Click [Sync] button, the virtual infrastructure will be synced to the Vinchin Backup & Recovery system.

No.	IP Address	Name	Platform	Username	Sync Time	Added By	Status	Operation
1	192.168.79.60	192.168.79.60	Redhat RHV/Ovirt	admin@internal	2017-12-25 11:49:57	admin	Unauthorized	Sync Auth
2	192.168.79.30.8080	192.168.79.30.8080	H3C CAS	admin	2017-12-25 11:48:02	admin	Unauthorized	Sync Auth
3	192.168.64.10	192.168.64.10	VMware vSphere	root	2017-12-25 11:41:10	admin	Unauthorized	Sync Auth

1 Click IP address to view the virtual infrastructure details including all virtual machines' status.
2 Click [Sync] button, the virtual infrastructure will be synced to the Vinchin Backup & Recovery system. This function applies to any updates of the hosts/virtual machines in the virtual infrastructure.

Note: This function applies to any updates of the hosts/virtual machines in the virtual infrastructure. You can also click **[Sync]** to refresh your server when creating a new job.

Tick a virtual infrastructure and click **【Edit】** , you are able to edit the details of the virtual infrastructure, click **【OK】** to save the changes.


The screenshot shows the 'Edit Virtual Infrastructure' form in the vinchin application. The form is titled 'Fill in the virtual infrastructure information' and contains the following fields:

- Platform**: A dropdown menu with 'Redhat RHV/Ovirt' selected. Below it, a note says 'Select a virtualization platform to be backed up.'
- IP/Domain**: A text input field containing '192.168.79.60'. Below it, a note says 'To backup individual host, please enter its IP address or domain name. To backup multiple hosts, please enter IP address or domain name of corresponding VM Manager server (e.g. vCenter for VMware vSphere).'
- Username**: A text input field containing 'admin@internal'. Below it, a note says 'Username of individual host/VM Manager Server.'
- Password**: A text input field with masked characters. Below it, a note says 'Password of individual host /VM Manager Server.'
- Name**: A text input field containing '192.168.79.60'. Below it, a note says 'Type a name for the individual host /VM Manager Server.'

At the bottom of the form, there are two buttons: 'Cancel' and 'OK'.

2.3.3. Delete Server


Tick a virtual infrastructure and click **【Delete】** , the system will re-confirm with you this action as below, click **【OK】** the server will be deleted.

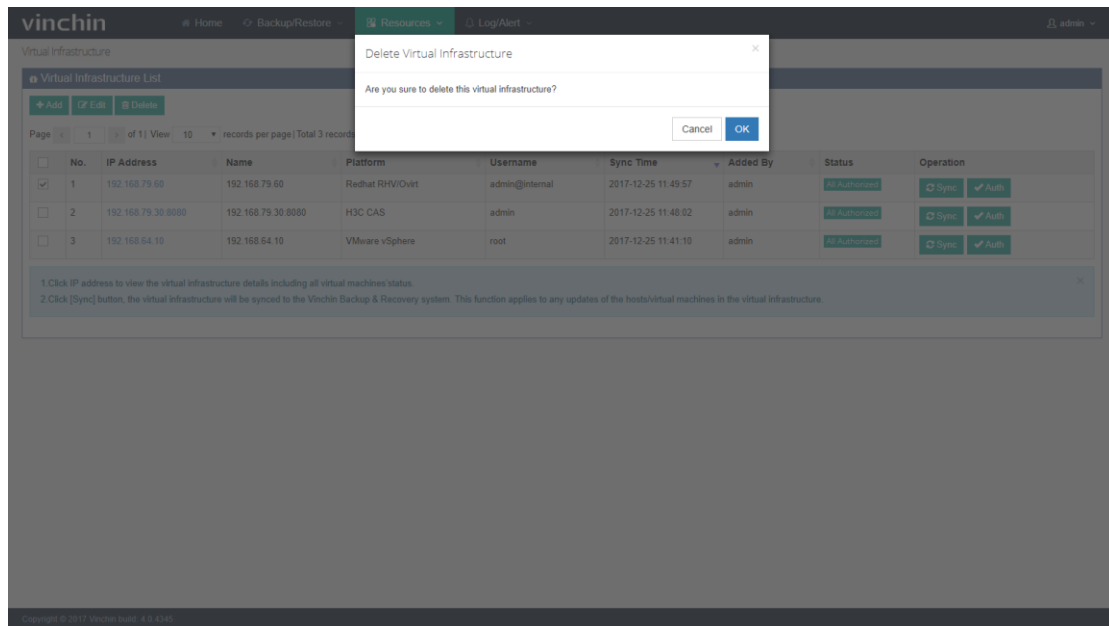

Note: The virtual infrastructure cannot be deleted when it is used in a running job. You must delete the running job before deleting the virtual infrastructure.


2.3.4. Manage Virtual Machines

Click IP address of one virtual infrastructure you are coming to the page showing the virtual infrastructure details including all virtual machines status. Expanding the virtual infrastructure tree on the left, you will see all the VMs under this infrastructure on the right side.

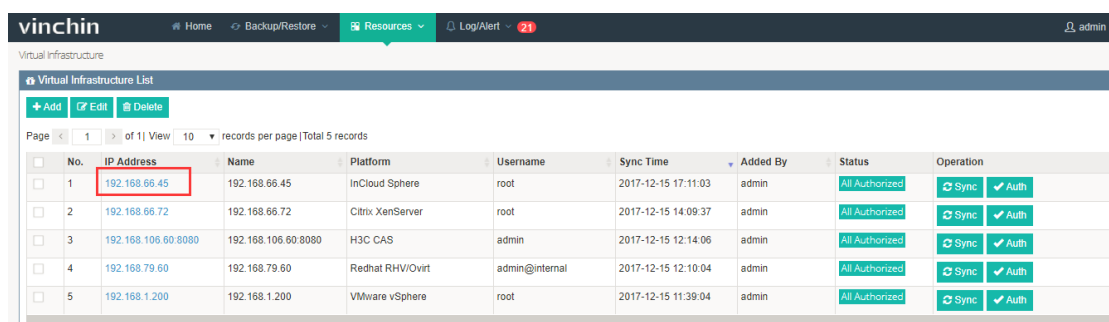



Choose one VM and click [Options] under "Operation", you can power on, pause or power off the VM. You can also choose to add this VM to the existed backup jobs.

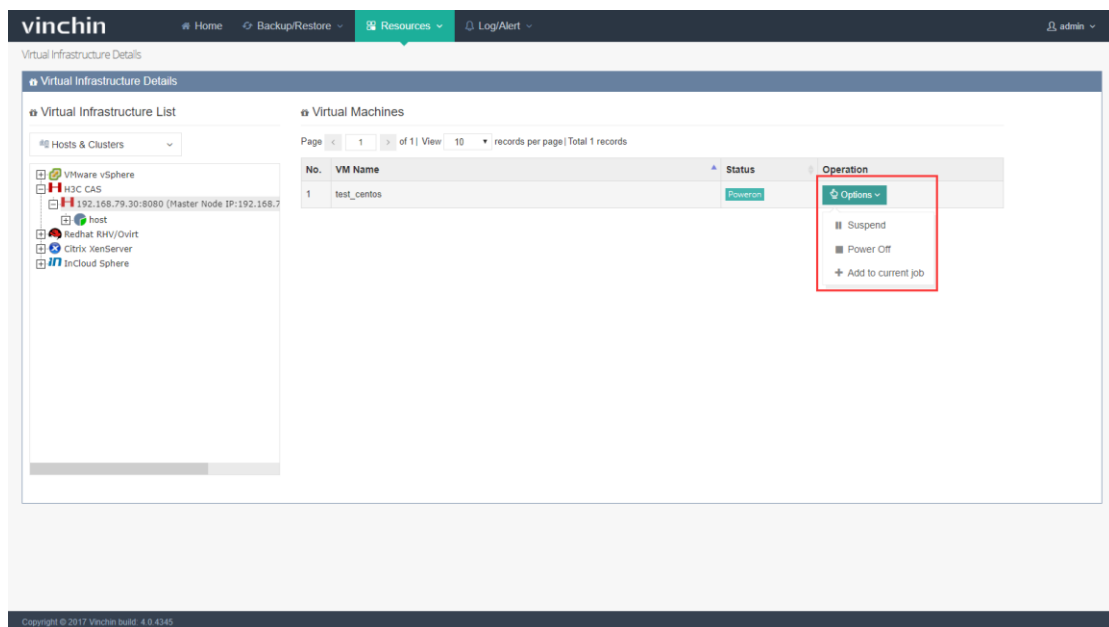


Note: After you change the VM status, please go back to the virtual infrastructure page and sync the VM located virtual infrastructure manually.

2.4. LAN-Free Settings


Data usually is transferred via LAN, but when the data size is too large, network jam will probably occur. Using LAN-Free to backup and restore under SAN environment can help to reduce network jam, improve backup and recovery speed without building any separate DR backup network.

Note: LAN-Free backup is available for VMware, XenServer and RHV.

- For VMware and RHV, you can choose transfer via SAN (LAN-Free) in the “Transmission Network” options when creating a backup / restore job.

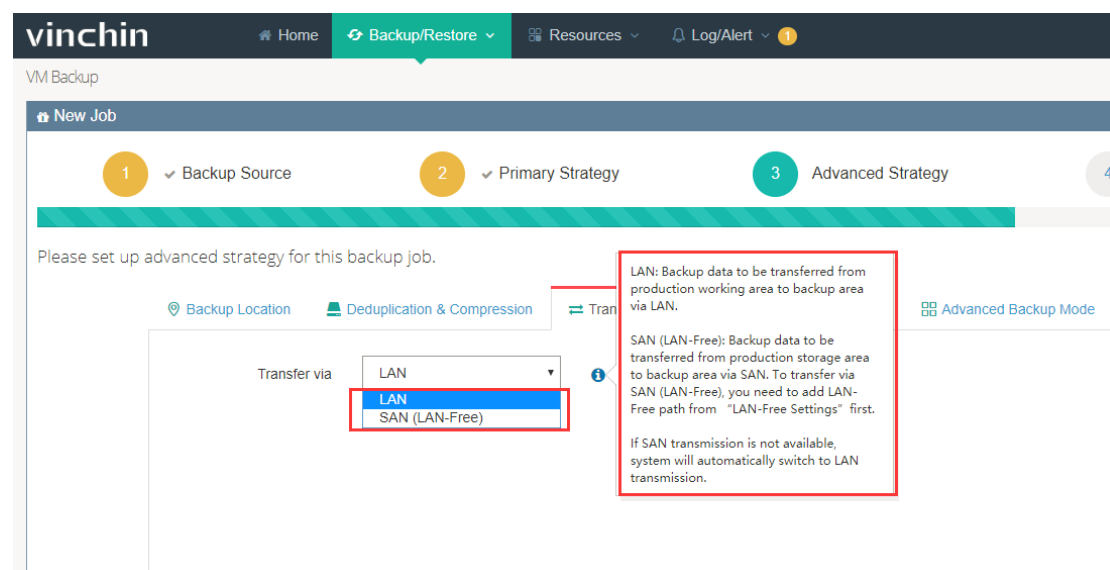

- For XenServer, you can choose transfer via SAN (LAN-Free) or SAN+NBD in the “Transmission Network” options when creating a backup / restore job so that to backup your VMs via LAN-Free.

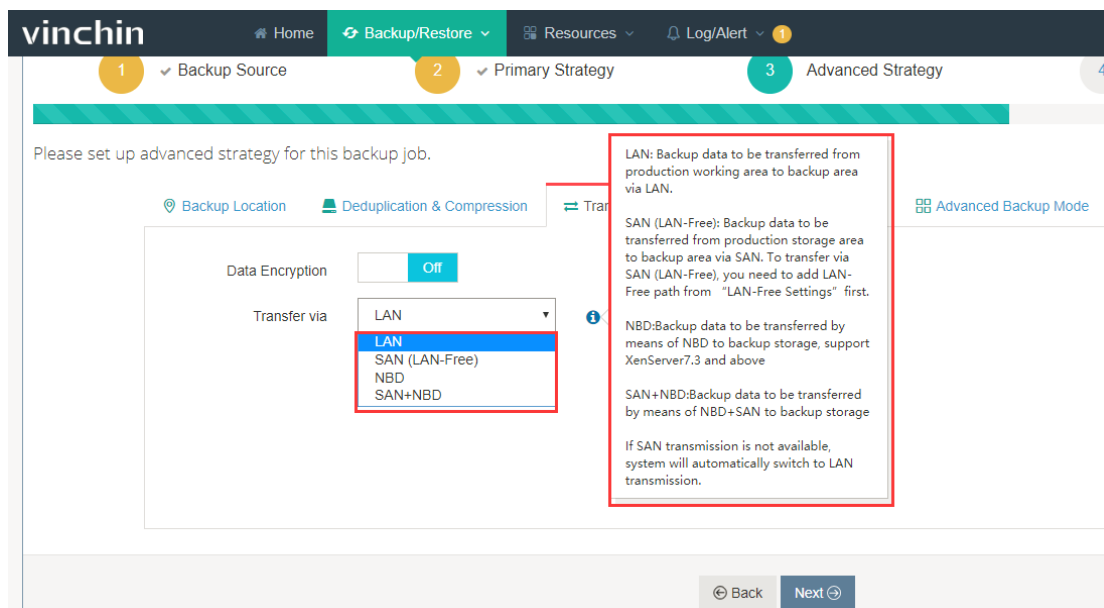

2.4.1. Add LAN-Free Repository

Mapping the production storage to Vinchin Backup & Recovery system, can let the Vinchin Backup & Recovery system directly read data from this storage. Highly improved the backup efficiency without affecting the production working network. Vinchin Backup & Recovery system currently supports FC, ISCSI and NFS LAN-Free settings.


Note: As different storage server has different LUN mapping methods, the following operations are for reference only.

2.4.1.1. FC Storage


Precondition: The LUN mapping of production storage is Fibre Channel mapping.

LAN-Free configuration step of FC storage are as below:

a) Map the LUN of production storage to Vinchin Backup & Recovery system.

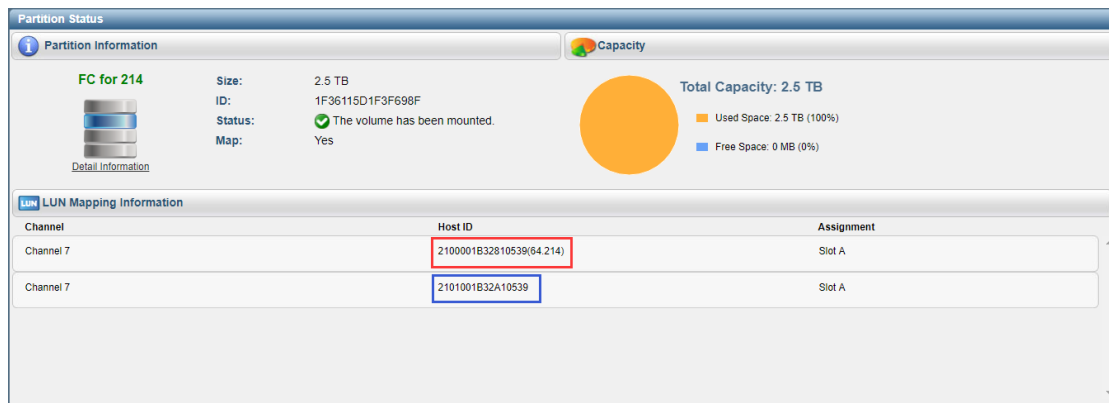

b) Click **【Resources】** - **【LAN-Free Settings】**, you are coming to the LAN-Free settings page.

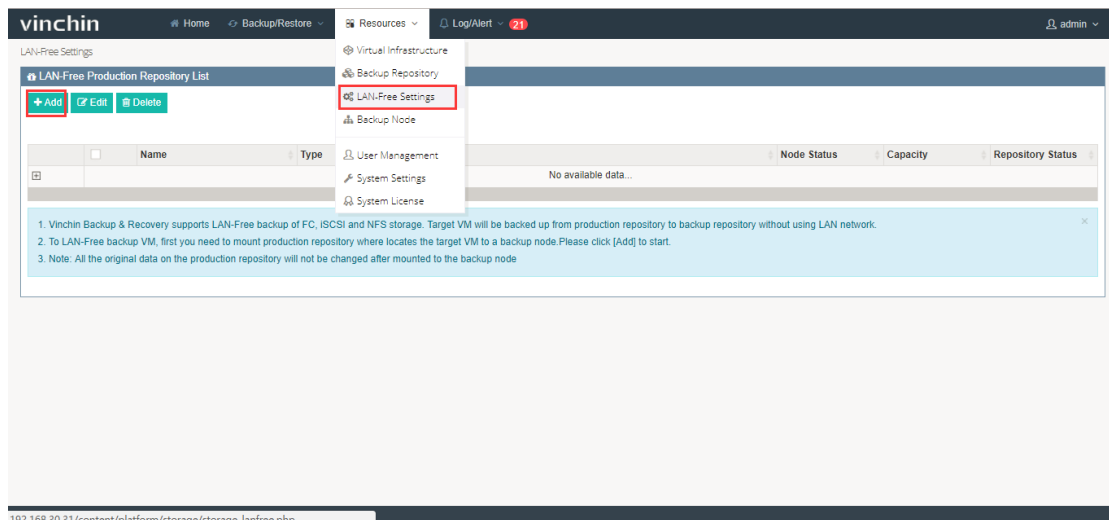

Click **【Add】**, and choose **【Fibre Channel】** from Storage Type, the system will recognize the LUN which is mapped to Vinchin Backup & Recovery system, and display corresponding production server and its total size.

vinchin Home Backup/Restore Resources Log/Alert admin

Add LAN-Free Production Repository

LAN-Free Production Repository Configurations

Node IP address/domain * localhost.localdomain(192.168.65.5)
Repository will be mounted to the selected backup node.

Storage Type * **Fibre Channel**
Select a storage type for the repository

Fibre Channel

No.	Channel	wwnn	wwpn	Speed	Status
1	host0	20:00:00:1b:32:81:7fed	21:00:00:1b:32:81:7fed	4 Gbit	Normal

Map the target FC LUN to the corresponding WWN

Storage Resource *

☐	Name	Type	Capacity
☐	/dev/sdg1	VMware vSphere	5.46TB

Select a production repository to do LAN-Free backup. All the original data on this repository will not be changed.

Name: Fibre Channel1
Type a name for this repository.

Cancel OK

Copyright © 2018 Vinchin build: 4.0.4387

Note: The recognized production LUN type is the LUN mapped hypervisor type. If the production storage is mounted to ESXi host, the Type will be VMware vSphere. If it is mounted to XenServer host, the Type will be Citrix XenServer as above.

Choose a production storage resource and click **【OK】**, you will find the added production storage in the LAN-Free Production Repository List.

vinchin Home Backup/Restore Resources Log/Alert admin

LAN-Free Settings

LAN-Free Production Repository List

+ Add Edit Delete

☐	Name	Type	Mount Node	Node Status	Capacity	Repository Status
☐	Fibre Channel1	Fibre Channel	localhost.localdomain(192.168.64.213)	Normal	3TB	Normal


1. Vinchin Backup & Recovery supports LAN-Free backup of FC, iSCSI and NFS storage. Target VM will be backed up from production repository to backup repository without using LAN network.
2. To LAN-Free backup VM, first you need to mount production repository where locates the target VM to a backup node. Please click [Add] to start.
3. Note: All the original data on the production repository will not be changed after mounted to the backup node

2.4.1.2.iSCSI Storage

Precondition: The LUN mapping of production storage is iSCSI mapping.


LAN-Free configuration of ISCSI storage are as below:

- a) Map the LUN of production storage to Vinchin Backup & Recovery system.

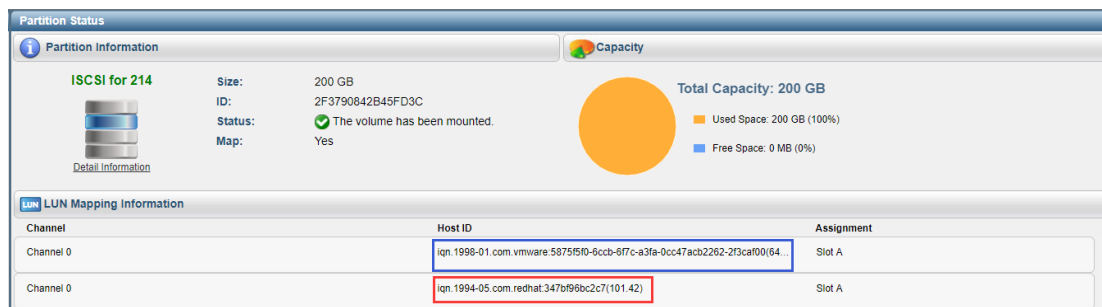

- b) Click **【Resources】** - **【LAN-Free Settings】**, you are coming to the LAN-Free setting page. Click **【Add】**, and choose Storage Type as iSCSI and click **【Scan The Target】**.


The system will recognize the LUN which is mapped to Vinchin Backup & Recovery system, and display corresponding production host and its total size.

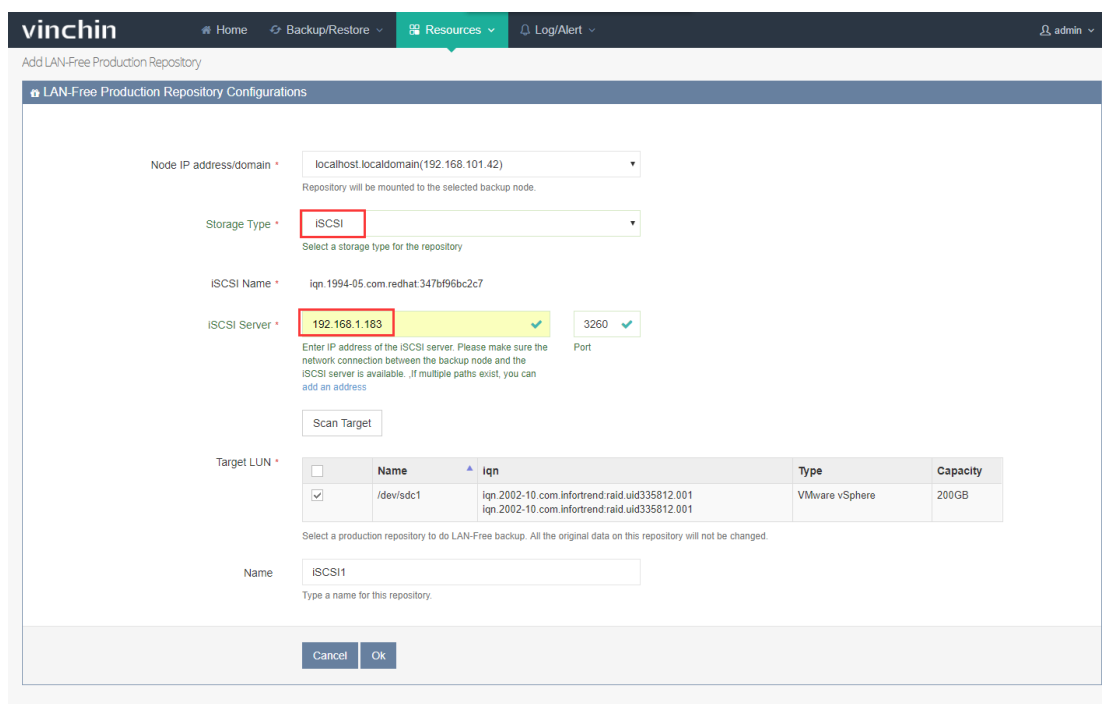

Note: The recognized production LUN type is the LUN mapped hypervisor type. If the production storage belongs to an ESXI host, the Type will show VMware vSphere. If it

belongs to XenServer host, the Type will show Citrix XenServer as above.

Choose a production storage and click **【OK】**, you will find the added production storage in the LAN-Free Production Repository List.

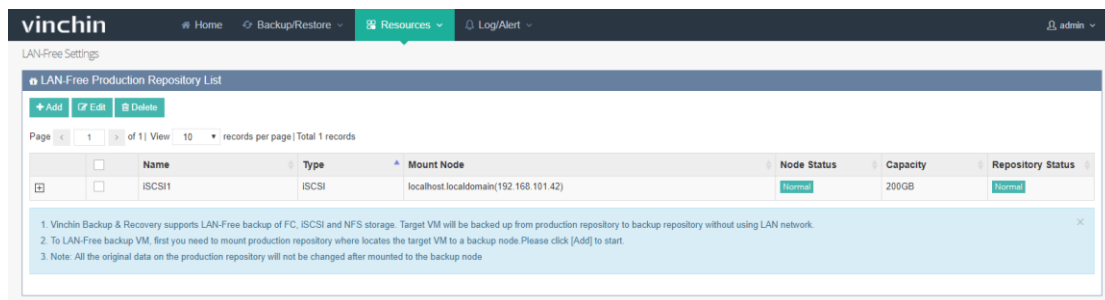


2.4.1.3.NFS Storage

Precondition: The storage type of production system is NFS.

LAN-Free configuration of NFS storage are as below:

Click **【Resources】** - **【LAN-Free Settings】**, you are coming to the LAN-Free setting page.

Click **【Add】**, and choose Storage Type as NFS, enter the storage shared folder path.


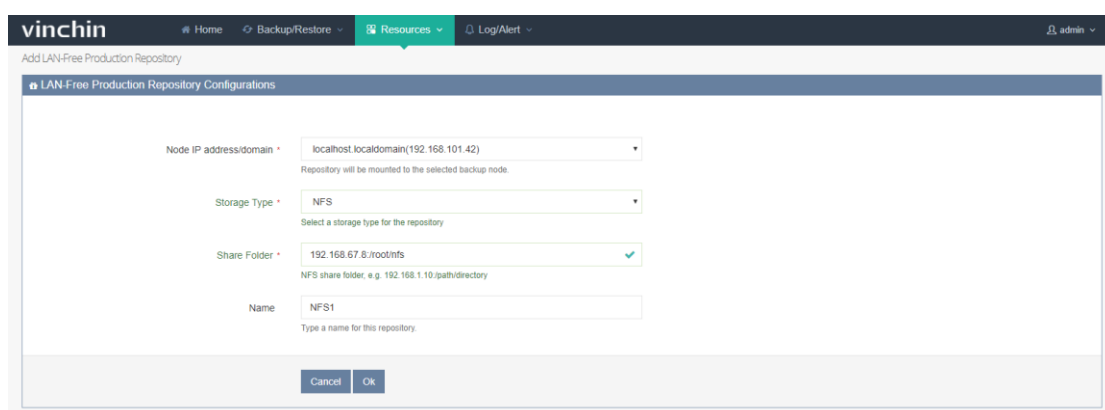


Warning: The production storage which has been mapped to the Vinchin Backup & Recovery system in LAN-Free Settings cannot be added as a backup repository! Adding

a NFS storage as a backup repository will cause the production storage been formatted, all the data in there will be erased/ lost.

2.4.2. Edit LAN-Free Repository

Choose a LAN-Free Production Repository, click **【Edit】**, you can edit a new name for this LAN-Free Production Repository.

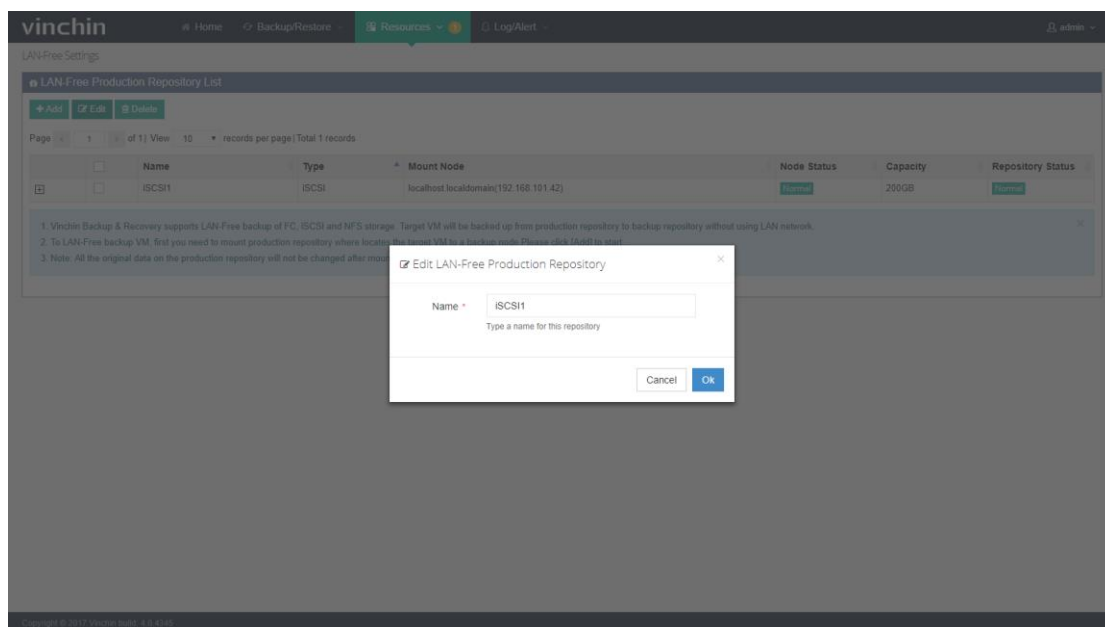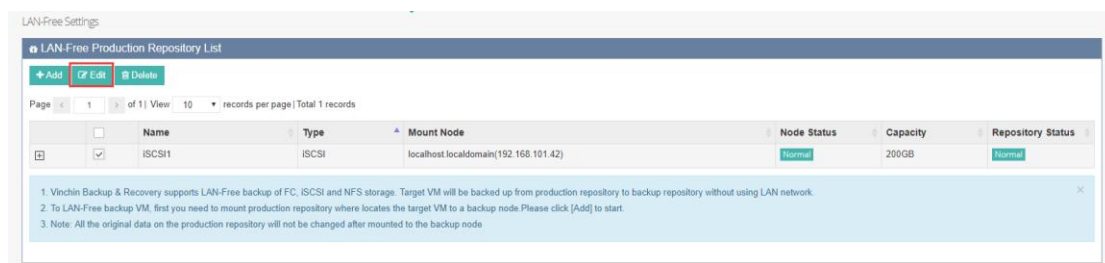

2.4.3. Delete LAN-Free Repository

Choose a LAN-Free Production Repository, click **【Delete】** you can delete this LAN-Free

Production Repository.

LAN-Free Settings

LAN-Free Production Repository List

[+ Add](#) [Edit](#) [Delete](#)

Page of 1 | View records per page | Total 1 records

		Name	Type	Mount Node	Node Status	Capacity	Repository Status
☐	☒	ISCSI1	ISCSI	localhost.localdomain(192.168.101.42)	Normal	200GB	Normal


1. Vinchin Backup & Recovery supports LAN-Free backup of FC, ISCSI and NFS storage. Target VM will be backed up from production repository to backup repository without using LAN network.

2. To LAN-Free backup VM, first you need to mount production repository where locates the target VM to a backup node. Please click [Add] to start.

3. Note: All the original data on the production repository will not be changed after mounted to the backup node


2.5. Manage Backup Nodes

Deploy the backup nodes by following 《Quick Installation Guide》 of Vinchin Backup & Recovery v4.0, then you can view all the backup nodes information in the 【Resources】 – 【Backup Node】 as below:

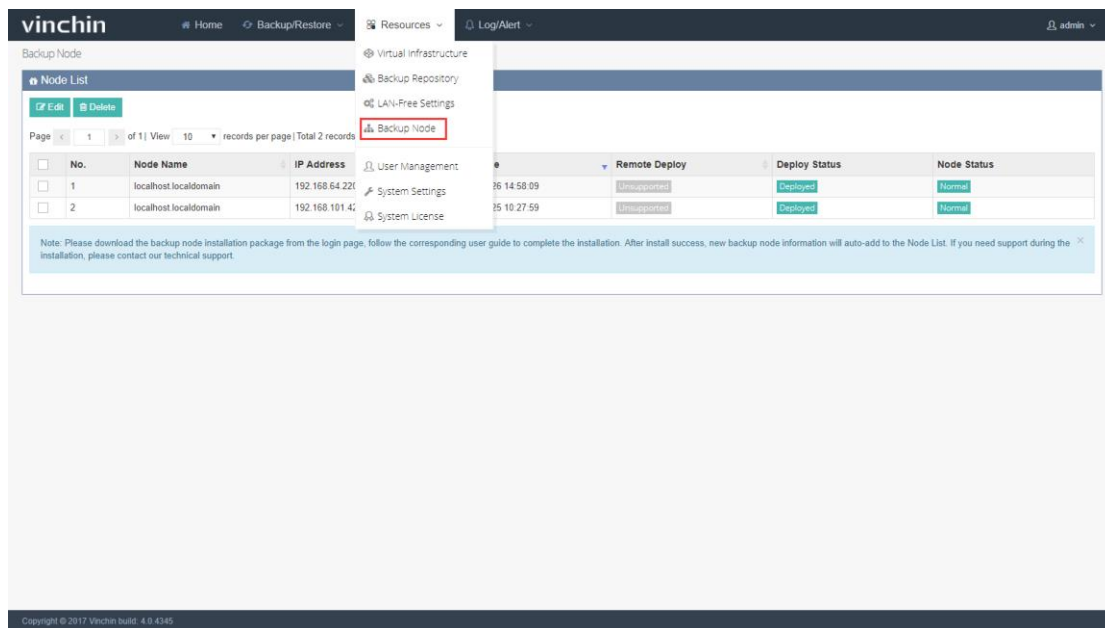


2.5.1. Edit Backup Node

Tick a backup node which you want to edit as below:

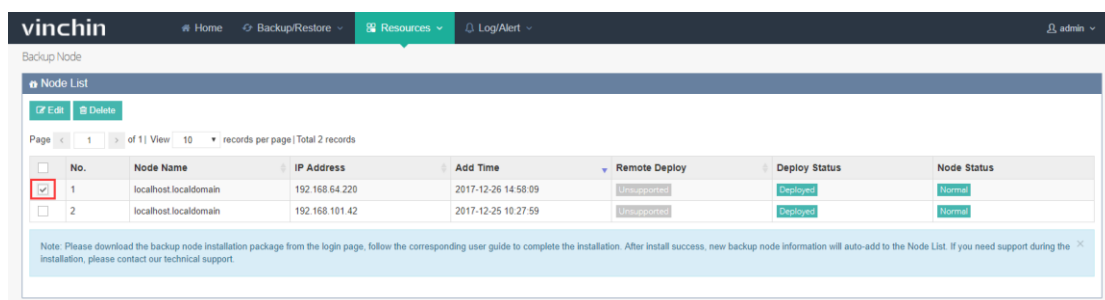


Click 【Edit】 , you can edit a new name for this node as below:

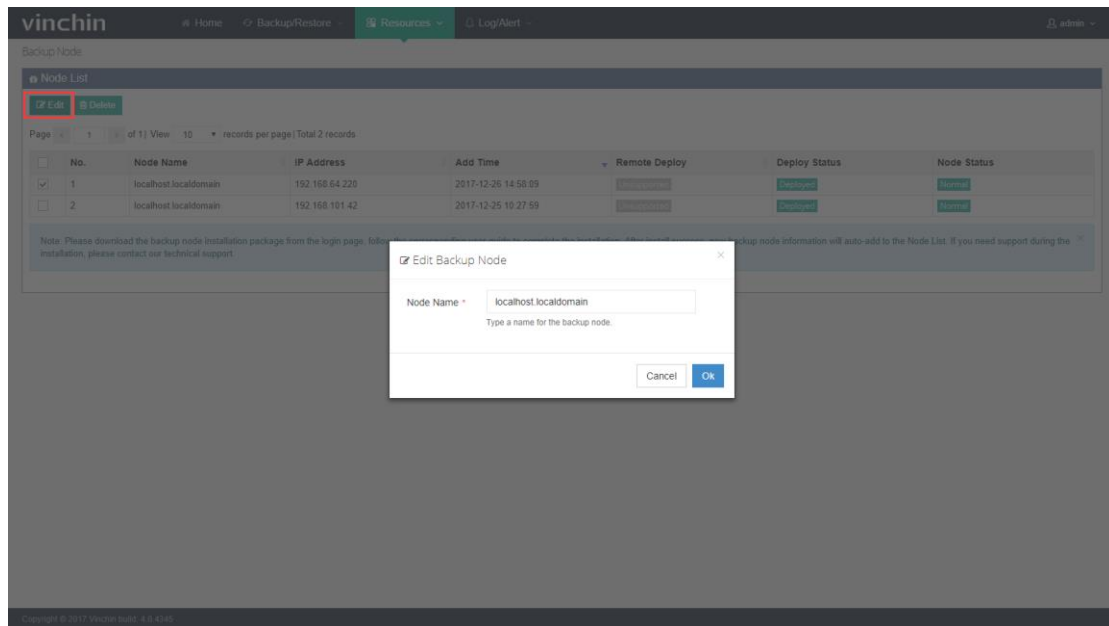


2.5.2. Delete Backup Node

Tick a backup node you want to delete as below:

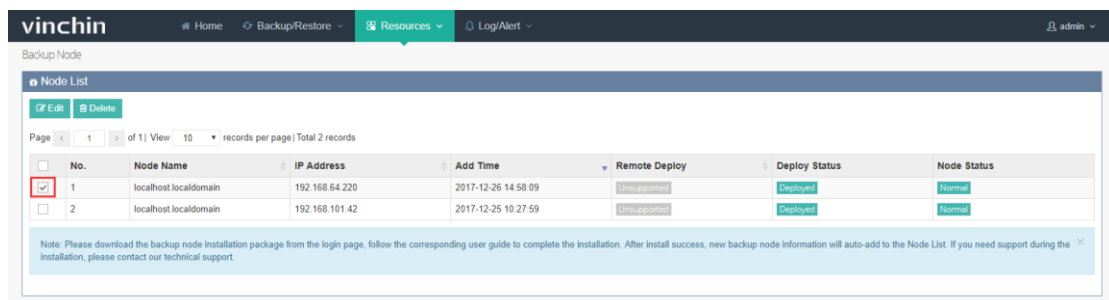

Click **【Delete】**, the system will re-confirm with you, click **【OK】** the node will be deleted as below:


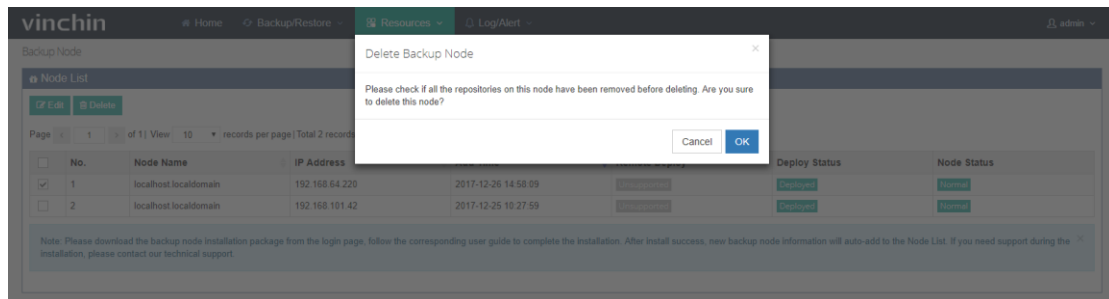


Note:

1. If there's storage mounted on this node, it is undeletable. Please delete the storage and ensure no jobs running on this node.
2. After deleting the node, you need to modify the node config file in the corresponding node system and delete the connected master node IP address.

2.6. Manage Users

Log in your administrator account, click **Resources**——**User Management** as below:

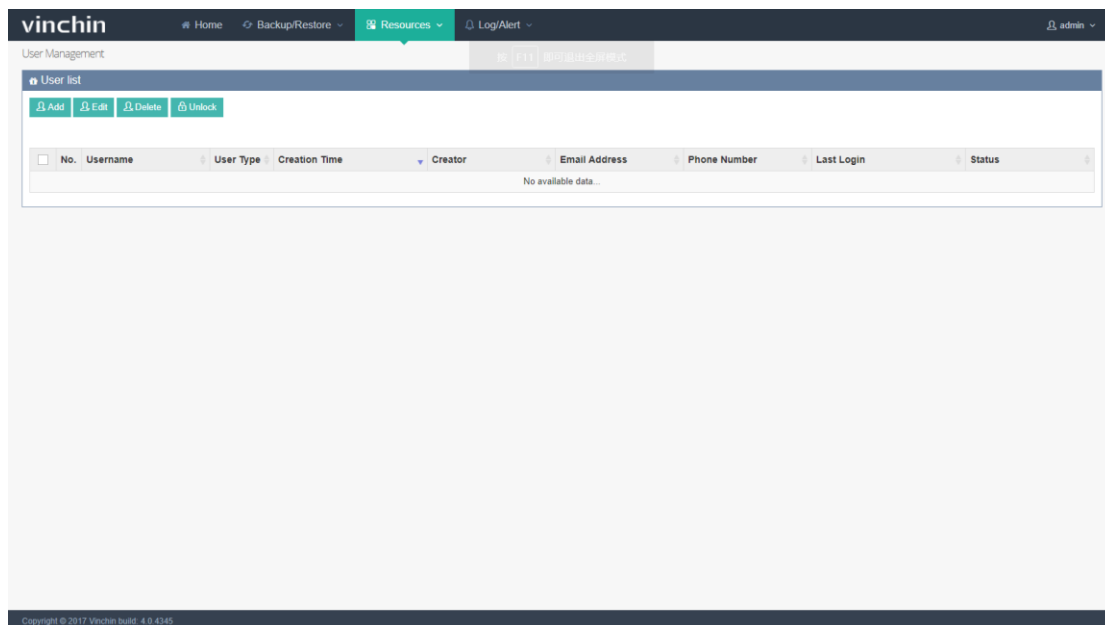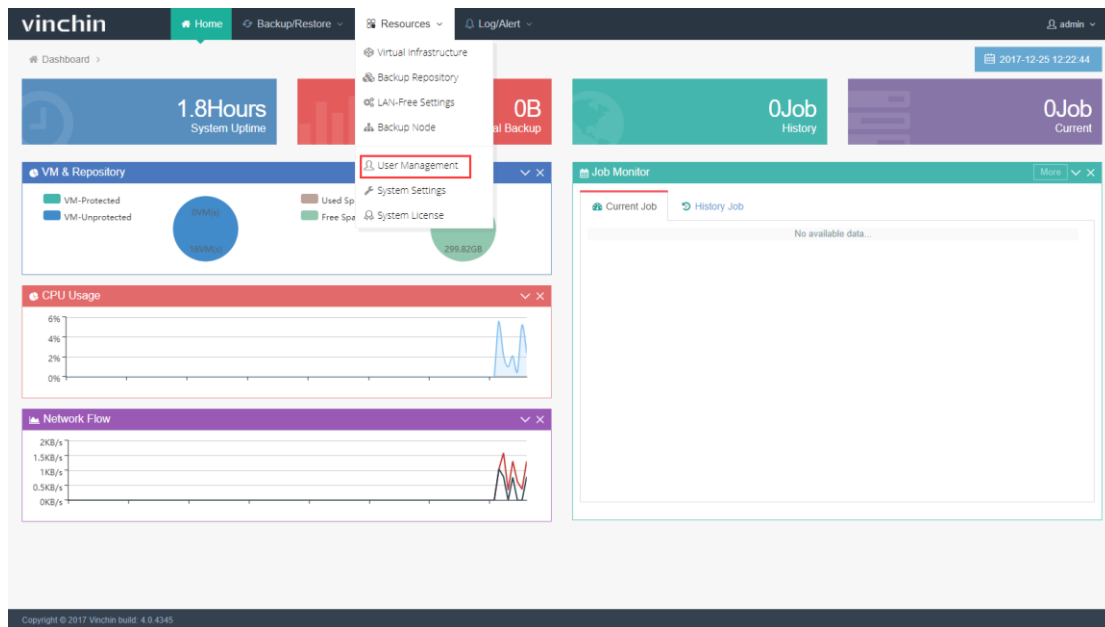

Note: Each administrator can only manage the accounts created by himself.

2.6.1. Add User

Click **【Add】** as below you are coming to the “Add New User” page.

The top screenshot shows the 'User Management' interface with a 'User list' table. The 'Add' button is highlighted in a red box. The table has columns: No., Username, User Type, Creation Time, Creator, Email Address, Phone Number, Last Login, and Status. Below the table, it says 'No available data...'.
The bottom screenshot shows the 'Add New User' form. It has a 'Basic Info' section with fields for Username, Password, Confirm Password, Email Address, Phone Number, and User Type (set to Operator). Below this is a 'User Permission' section with a 'Permission Type' radio button set to 'Default Permission'. At the bottom are 'Cancel' and 'Ok' buttons.

Fill in the blanks with required username, password and confirm password. Choose a user type and permission type for this new user, then click **【OK】**.

User Type includes Admin, Operator and Auditor. Default operation permissions are as below:

Operator: Create & perform Backup/Restore jobs, job monitor, logs/warnings etc.

Auditor: Check logs & warnings.

admin: All permissions.

If choosing “Advanced Permission” in the “Permission Type”, you can add or cancel any permission from the default options manually, but you cannot add a permission which is

not in the default options, details as below:

The screenshot shows the 'User Permission' configuration window in the Vinchin interface. The 'Advanced Permission' tab is selected. The 'Permission Operation' tree is expanded, showing a hierarchy of system functions. The 'User Type' is set to 'Operator'. The 'Permission Type' is set to 'Advanced Permission'. The 'Permission Operation' tree includes the following items:

- Home
- Backup/Restore
 - New Job
 - VM Backup
 - VM Restore
 - VM Instant Recovery
 - Monitor & Manage
 - Current Job
 - History Job
 - Restore Points
 - Virtual Machines
- Resources
 - Virtual Infrastructure
 - Backup Repository
 - LAN-Free Settings
 - Backup Node
 - User Management
 - System Settings
 - System License
- Log/Alert
 - Job Log
 - System Log
 - Job Alert
 - System Alert

Buttons at the bottom: Cancel, OK.

2.6.2. Edit User

Tick a user from the User List, and click **【Edit】** as below you are coming to the user editing page.

The screenshot shows the 'User Management' interface in the Vinchin application. The 'User list' table is displayed with the following columns: No., Username, User Type, Creation Time, Creator, Email Address, Phone Number, Last Login, and Status. The 'Edit' button is highlighted in the table header.

No.	Username	User Type	Creation Time	Creator	Email Address	Phone Number	Last Login	Status
1	user4	Operator	2017-12-25 14:07:40	admin				UnLocked
2	user3	Auditor	2017-12-25 14:07:24	admin				UnLocked
3	user2	Administrator	2017-12-25 14:07:07	admin				UnLocked
4	user1	Operator	2017-12-25 14:06:47	admin				UnLocked

vinchin Home Backup/Restore Resources Log/Alert admin

Edit User

Edit User

Basic Info

Username * user3

Password *

Confirm Password *

Email Address

Phone Number

User Type * Auditor

User Permission

Permission Type * ☐ Default Permission ☒ Advanced Permission

Permission Operation *

- Home
 - Backup/Restore
 - New Job
 - VM Backup
 - VM Restore
 - VM Instant Recovery
 - Monitor & Manage
 - Current Job
 - History Job
 - Restore Points
 - Virtual Machines
 - Resources
 - Virtual Infrastructure
 - Backup Repository
 - LAN-Free Settings
 - Backup Node
 - User Management
 - Customize Kaitline

You can edit the user's information, after finish, click **【OK】** to save the changes.

2.6.3. Delete User

Tick a user from the User List, and click **【Delete】** as below you are coming to the user deleting page.

vinchin Home Backup/Restore Resources Log/Alert admin

User Management


User list

Add Edit **Delete** Unlock

Page 1 of 1 View 10 records per page | Total 4 records

No.	Username	User Type	Creation Time	Creator	Email Address	Phone Number	Last Login	Status
☐ 1	user4	Operator	2017-12-25 14:07:40	admin				UnLocked
☐ 2	user3	Auditor	2017-12-25 14:07:24	admin				UnLocked
☒ 3	user2	Administrator	2017-12-25 14:07:07	admin				UnLocked
☐ 4	user1	Operator	2017-12-25 14:06:47	admin				UnLocked


The system will re-confirm your operation as below, click **【OK】** , the user will be deleted.

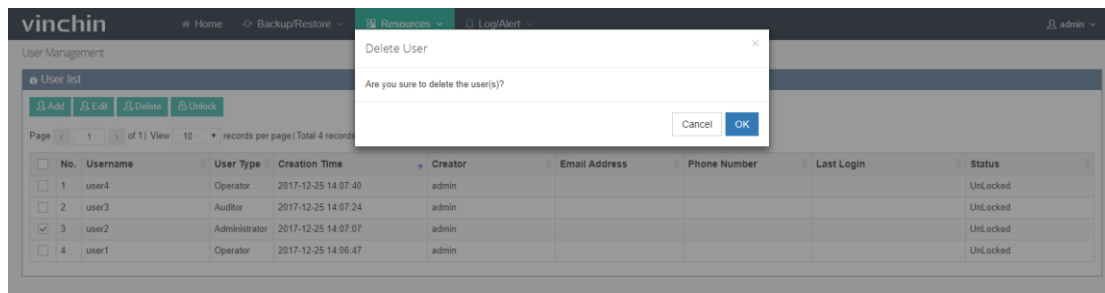


Note: Before deleting a user, you need to empty all the virtual infrastructures registered by this user. Otherwise this operation will be failed.

2.6.4.Unlock User

If enter wrong password for 5 times, the account will be locked. Only the Admin has the permission to unlock the account. Log in the Admin account, click **【Resources】** - **【User Management】** , tick the locked user account as below:

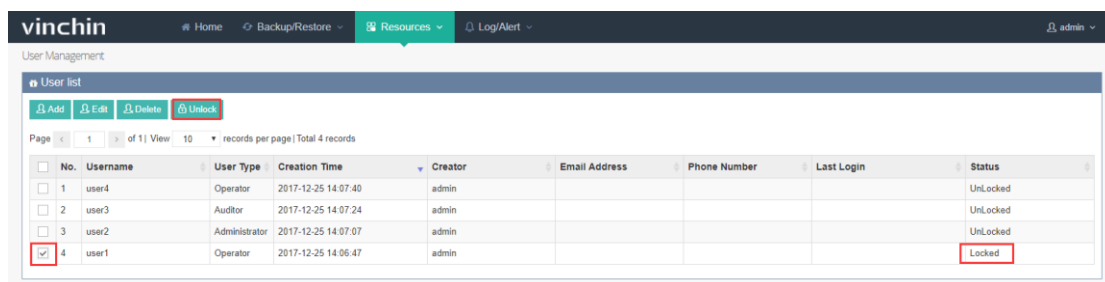


Click **【Unlock】** and this account will be unlocked immediately.

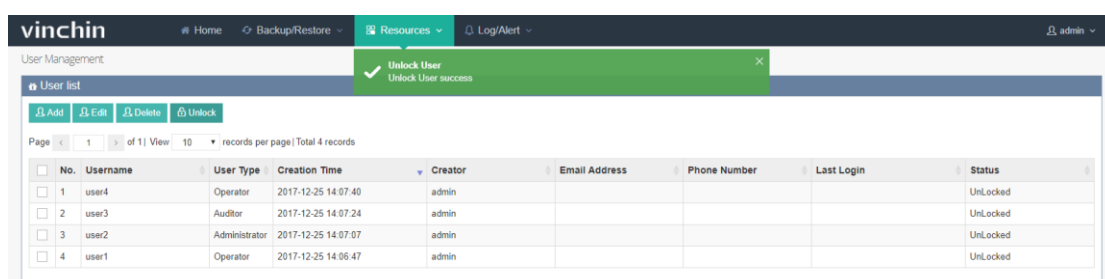

2.7. System Settings

Log in your Admin account, click **【Resources】** – **【System Settings】** as below, you are coming to the system setting page.

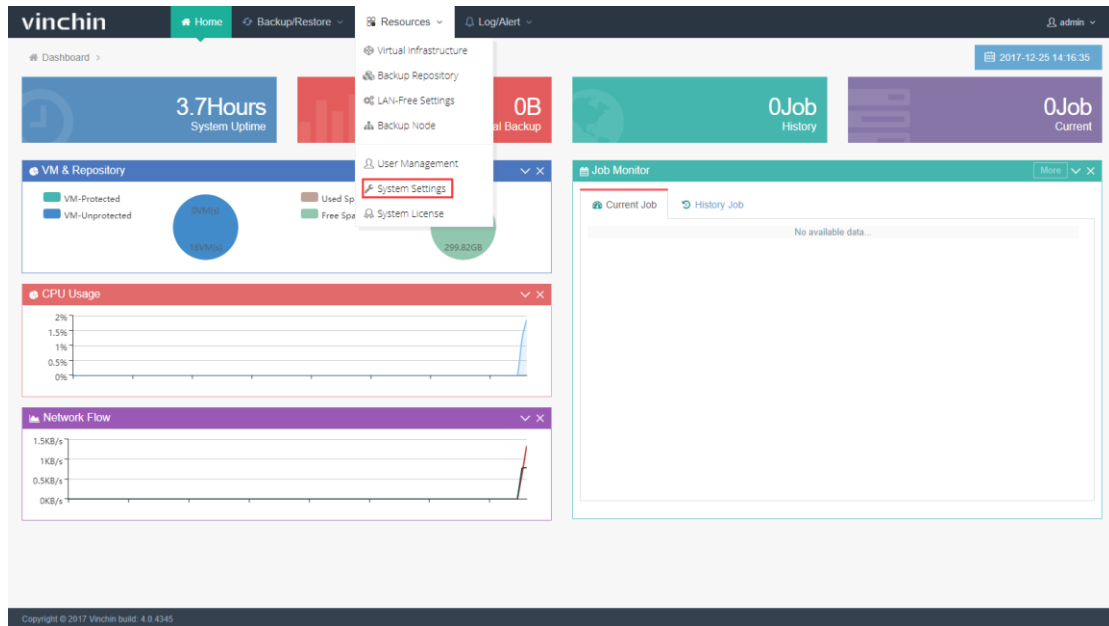

2.7.1. IP Settings

Click "IP Settings" you can set the IP information according to your actual network environment. Click **【OK】** to save the changes. Please make sure all the IP information are correct. Any wrong IP information will result in failure of accessing the backup system.

The screenshot shows the 'vinchin' web interface with the 'Resources' menu selected. Under 'System Settings', the 'IP Settings' tab is active and highlighted with a red box. The page contains several input fields for network configuration:

- Network Interface:** A dropdown menu showing 'ens160'. Below it is a note: 'Please select a network interface to edit corresponding IP information'.
- IP Address:** A text input field containing '192.168.101.42'. Below it is a note: 'Please enter IP address of your backup server, e.g. 192.168.1.168'.
- Subnet Mask:** A text input field containing '255.255.192.0'. Below it is a note: 'Please enter the Subnet Mask of your backup server, e.g. 255.255.255.0'.
- Default Gateway:** A text input field containing '192.168.64.1'. Below it is a note: 'Please enter Gateway of your backup server, e.g. 192.168.1.1'.
- DNS Servers:** A text input field containing '192.168.128.2'. Below it is a note: 'Please enter DNS of your backup server. If more than one DNS, please separate them with "," e.g. 192.168.1.1, 192.168.1.2'.

At the bottom of the form are 'Cancel' and 'OK' buttons. The footer of the page reads 'Copyright © 2017 Vinchin build: 4.0.4345'.

Note: After changing IP address, please log out and re-access the login page by entering the new IP address.


2.7.2. Time Settings

You can set the time zone, time and date according to your current location as below:

The screenshot shows the 'vinchin' web interface with the 'Resources' menu selected. Under 'System Settings', the 'Time Settings' tab is active and highlighted with a red box. The page contains the following configuration options:

- Your Location:** A dropdown menu showing 'America/New_York'. Below it is a note: 'Please select a location, system will auto-match the corresponding timezone.'.
- Your Time:** A text input field showing '2018-01-08 21:34:26'. To its right is a calendar icon. Below it is a note: 'Please select or enter a correct time, format e.g. 21'.
- NTP Sync:** A checkbox labeled 'Off' with the text 'Enable to synchronize to NTP time' below it.

A calendar pop-up is visible, showing 'January 2018'. The date '8' is highlighted in blue. The calendar grid shows days of the week (Su, Mo, Tu, We, Th, Fr, Sa) and dates from 1 to 31. At the bottom of the form are 'Cancel' and 'OK' buttons. The footer of the page reads 'Copyright © 2018 Vinchin build: 4.0.4387'.

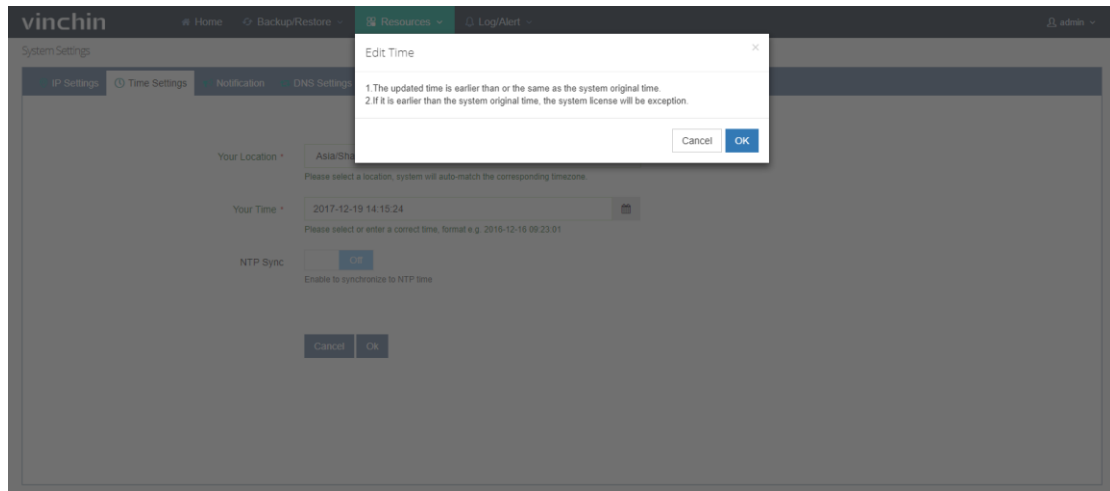

Warning: Please set the time details before licensing your backup system. Changing time details on a non-perpetual licensed system may cause the license error. If error happens, you need to re-license the system with new license key.

2.7.3. Email Notification

Email Notification helps users tracking the system operation such as job progress by email. Before enabling the email notification, you need to set the user's email address.

Go to the top right **【admin】** - **【My Information】** as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

User Information

My Information

Username admin

Email Address 123456@qq.com ✓

Phone Number 12345678900 ✓

Language English

Back Save

My Information Change Password Lock Screen About Us Help Logout

Copyright © 2017 Vinchin build: 4.0.4340

Fill in your email address and click **【OK】** .

Then return to the **【System Settings】** - **【Notification】** . And click "Email Test" as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

System Settings

IP Settings Time Settings Notification DNS Settings Restart/Poweroff

Email Notification


Email Notification: Test

Please click "Email Test" to finish the mail server test before enabling Email Notification.

Cancel Ok


Copyright © 2017 Vinchin build: 4.0.4340

If you have your own mail server, you can change the default sender mail information to yours accordingly. We recommend you to use Vinchin sender mail server, please keep the default information and click **【Send testing email】** , if the sending test is succeeded, click **【OK】** as below:

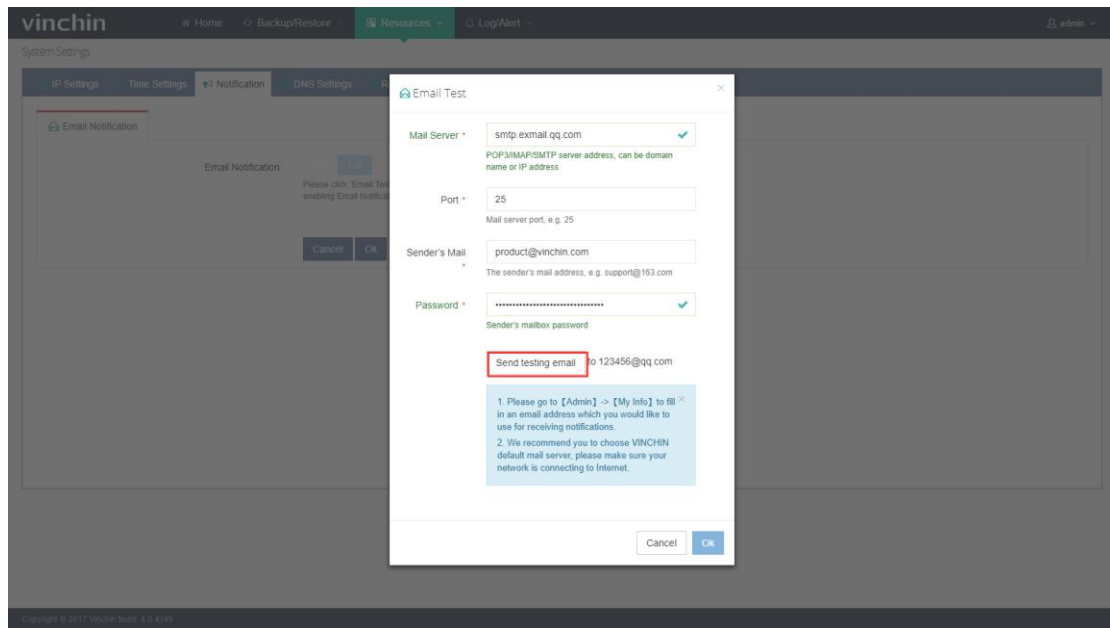

Then click **【Enable】** to enable the email notification.


You can also choose to enable the system/job alert and set different system notification levels as below. System will send the corresponding notification to your email address.

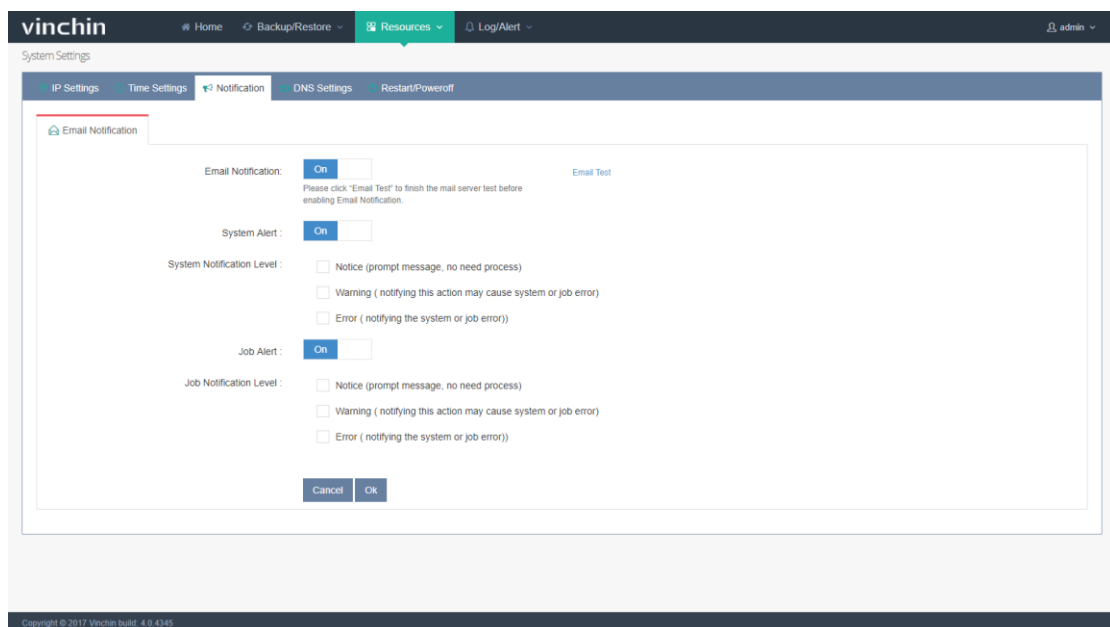

Note: Email notification is a free service. The system will automatically send notification emails to you once you enable this function.

2.7.4.DNS Settings

If an ESXi host was added to the vCenter via its domain name as below, then this ESXi host's corresponding DNS need to be configured in the Vinchin Backup & Recovery system.

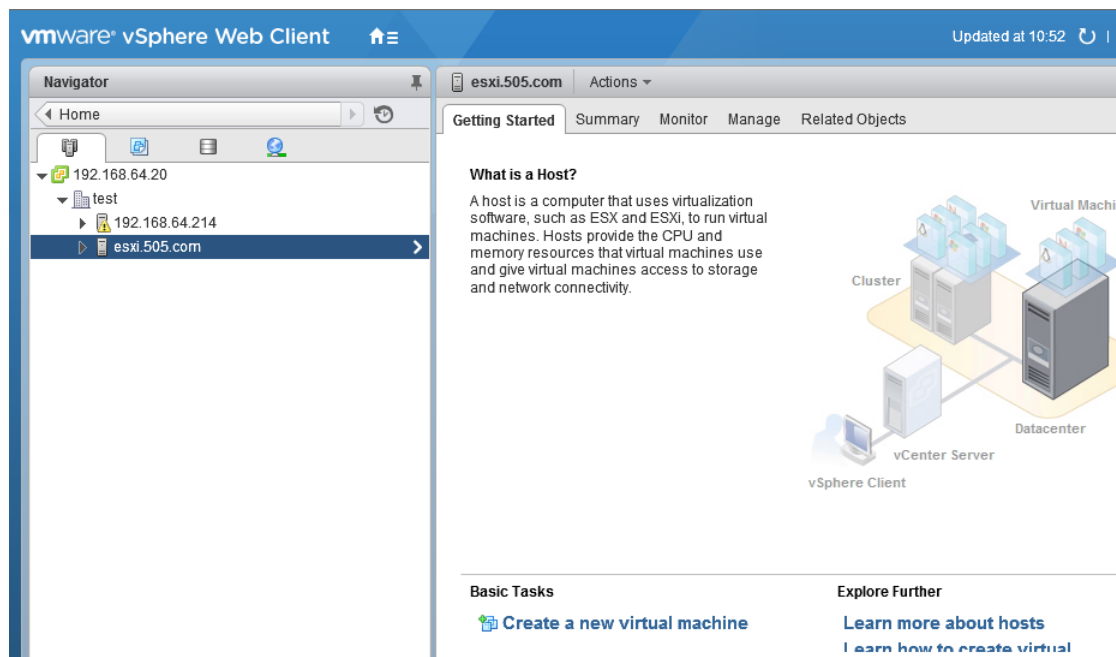

First fill in the IP address of the ESXi host and its domain name (e.g. 192.168.66.14 esxi.505.com), then click **【OK】** to save.

vinchin Home Backup/Restore Resources Log/Alert admin

System Settings

IP Settings Time Settings Notification DNS Settings Restart/Poweroff

Backup Node * localhost.localdomain(192.168.101.42)
Please select a backup node to set DNS.

DNS values * 192.168.64.14 esxi.505.com
Format: IP hostname (The IP address and the hostname should be separated by at least one space. Each entry should be kept on an individual line.)

DNS Sync On
Enable to synchronize the DNS settings to all backup nodes

Cancel Ok

Copyright © 2017 Vinchin build: 4.0.4345

Note: If the Vinchin Backup & Recovery system has been deployed multiple backup nodes, please enable 【DNS Sync】 . DNS settings is available for VMware virtual infrastructure.

2.7.5. Restart & Poweroff

Choose a backup node which you want to restart or power off and click corresponding button.

vinchin Home Backup/Restore Resources Log/Alert 21 admin

System Settings

IP Settings Time Settings Notification DNS Settings Restart/Poweroff

Backup Node * localhost.localdomain(192.168.30.31)
Please select a backup node to restart or power off

Restart Power Off


3. Backup / Restore Job

3.1. VMware vSphere


3.1.1. VM Backup

3.1.1.1. Authorize Host


Before creating a VM backup job, you need to authorize the target hosts which you need to backup. Click **【Resources】** – **【Virtual Infrastructure】** as below:

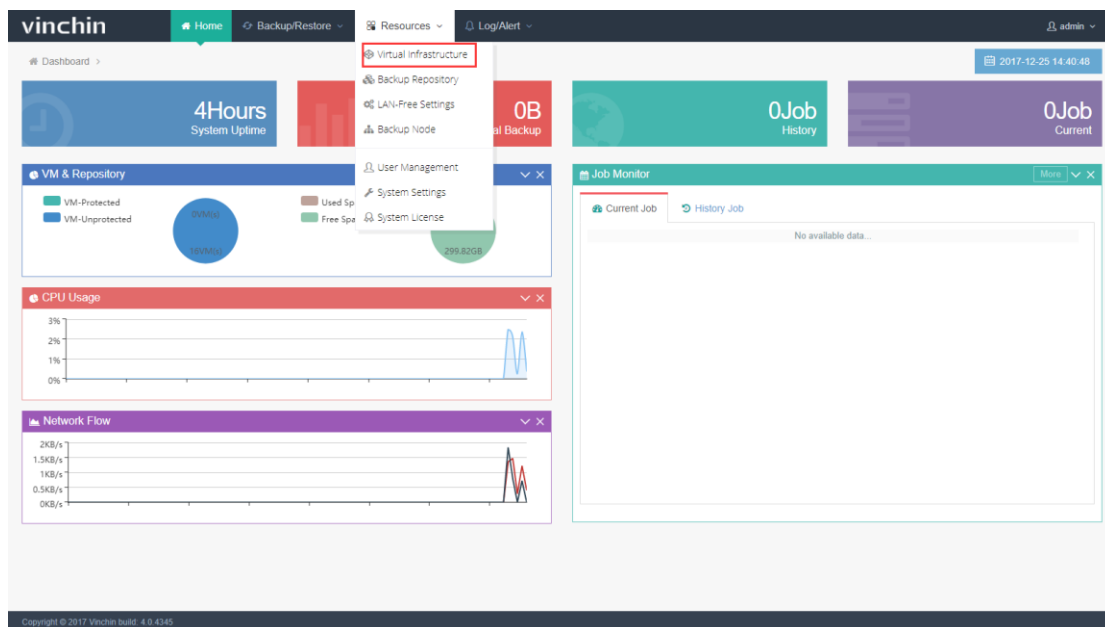


Then you'll see the virtual infrastructure list as below, choose the target virtual infrastructure you want to backup and click **【Auth】** .

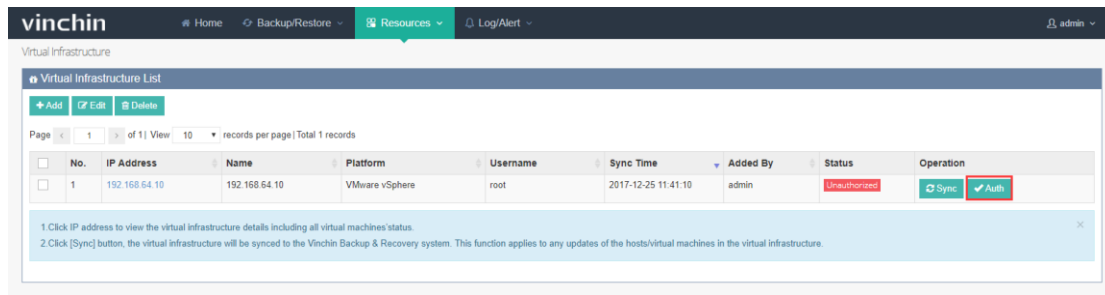

Tick the hosts under this virtual infrastructure you want to backup and click 【Authorize】.

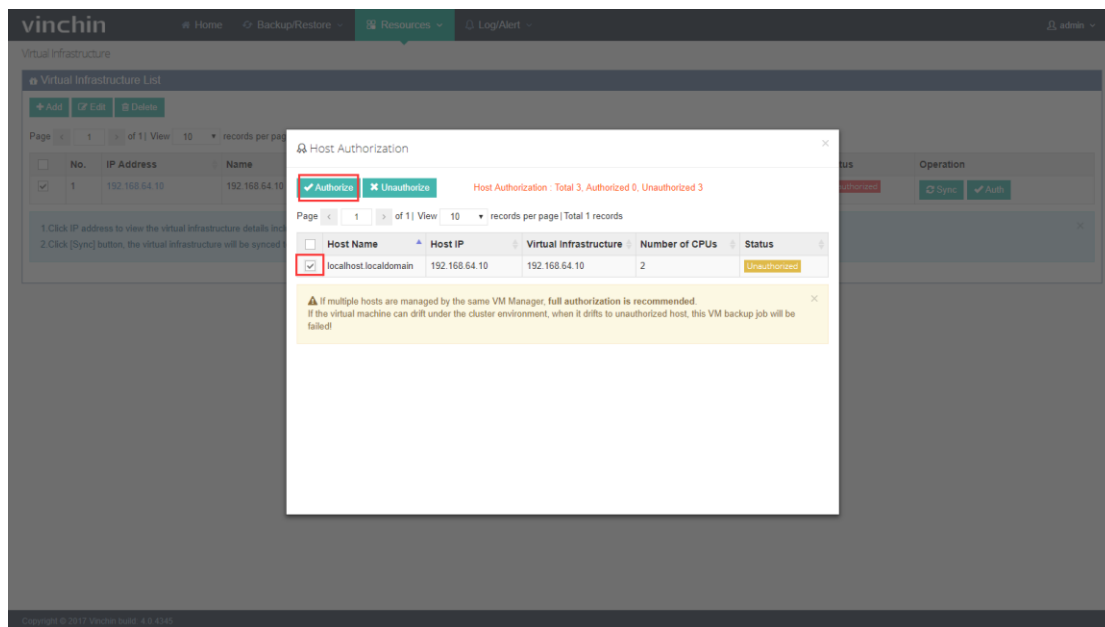

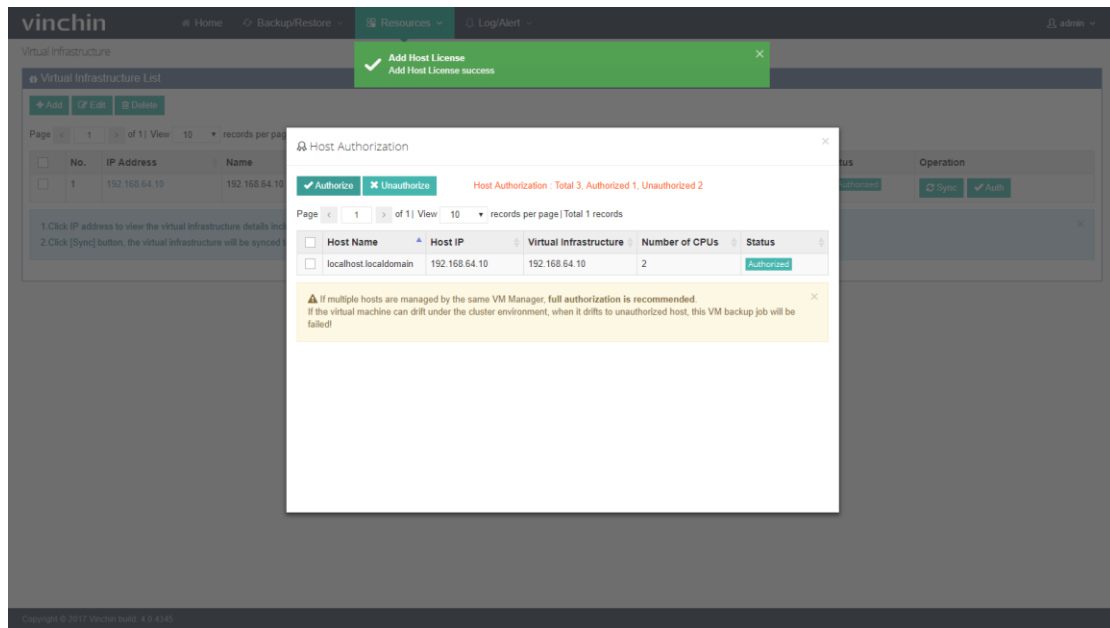

The system will remind you “Authorize the host(s) success”.



Note: If there's no server in the virtual infrastructure list, please add a host or virtual cluster first (please refer to Chapter 2.3.1 Add Server)

3.1.1.2. Create Backup Job


3.1.1.2.1. Backup Source

Select the virtual machines you want to backup.


Click **Backup/Restore** – **VM Backup**, then you will see the virtualization infrastructure tree, expand the VMware vSphere infrastructure until you see the virtual machines. Tick any virtual machines you need to backup, they will be showing in the “Selected VM” column. If you want to delete a selected VM, you can click  button in the right column or directly untick this VM as below:

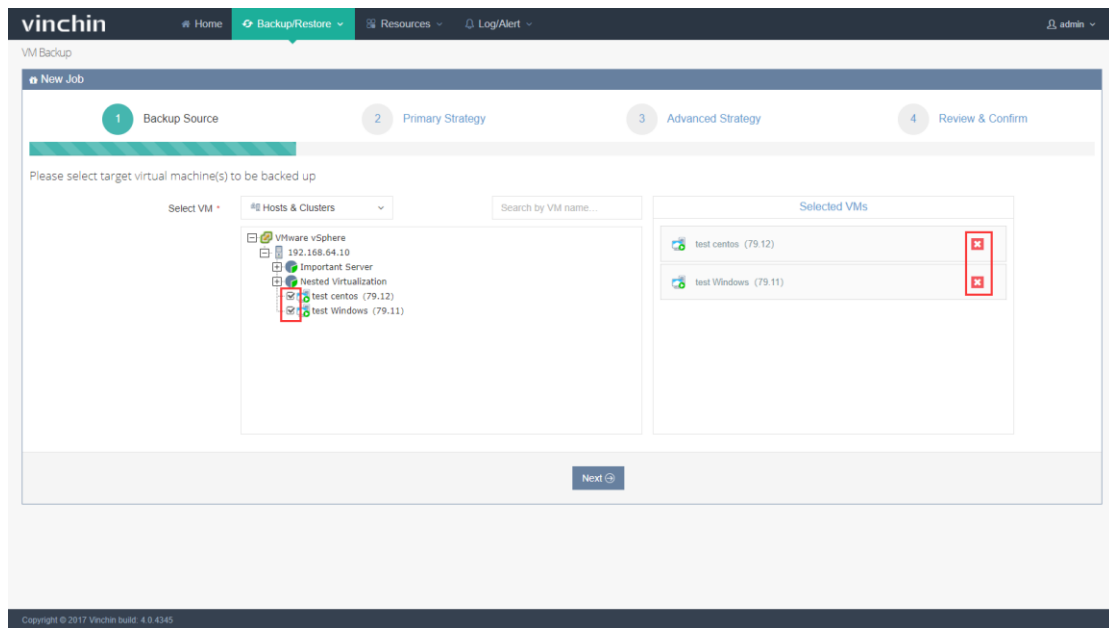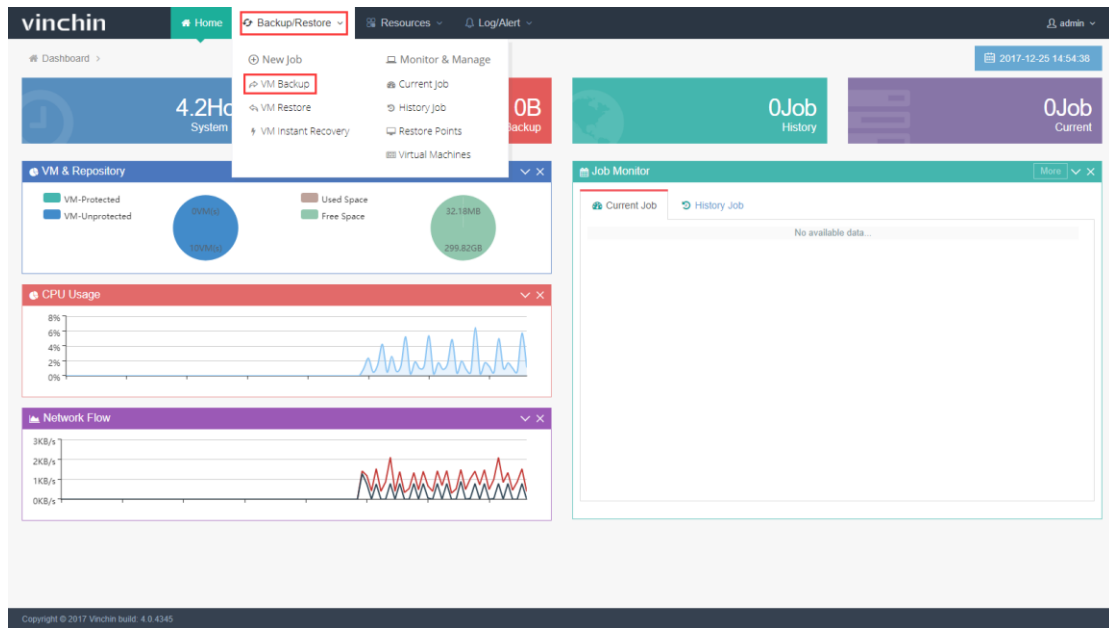


If you know the target VM name, or you know any related key words, you can directly search the VM in the search bar as below:

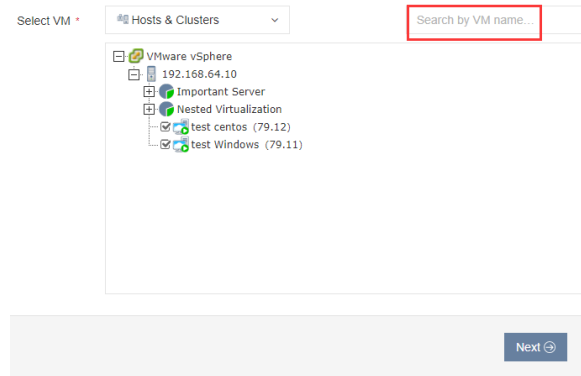


Note: If the VM already exists in the backup job list, it will be highlighted in Green color. And it is un-selectable.

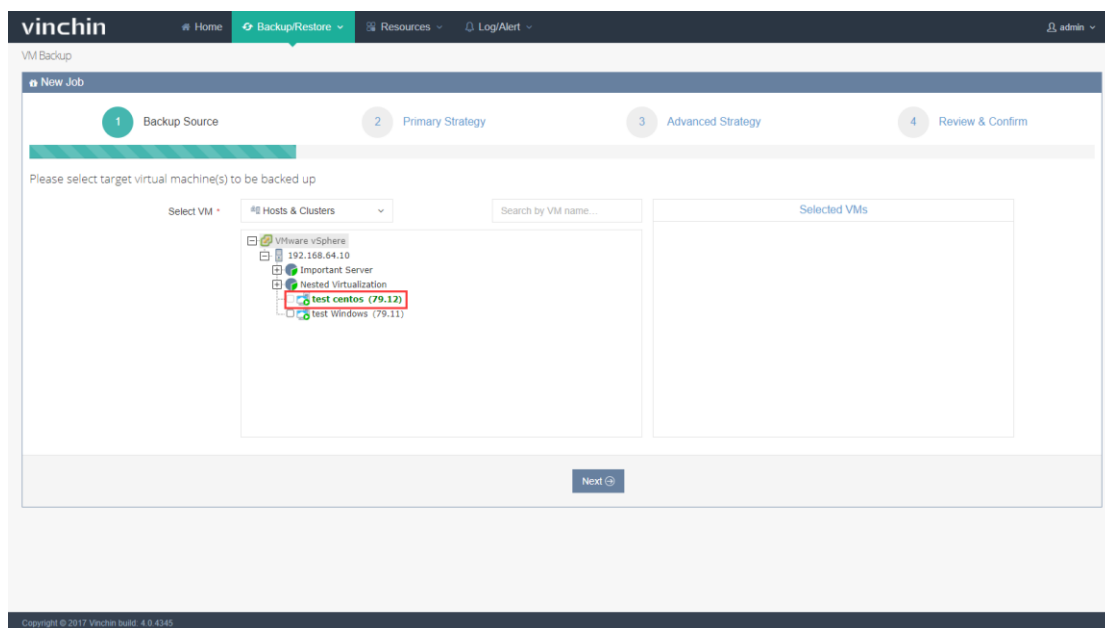


Click the target VM, you can see the virtual disks under this VM, you can choose to backup or exclude any of the disks under this VM without having to backup all the disks on the virtual machine.

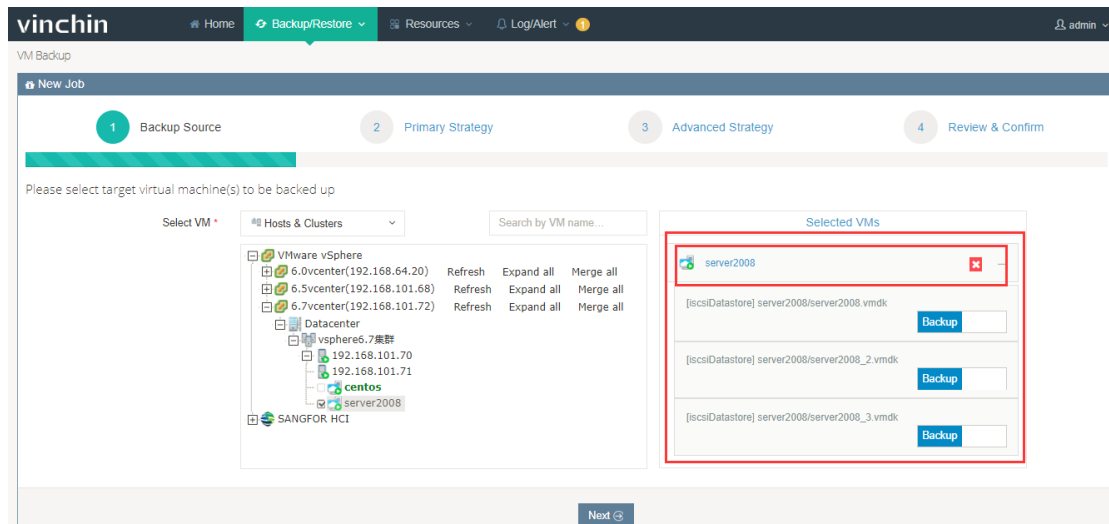

Click **【Next】** once you complete the selection.

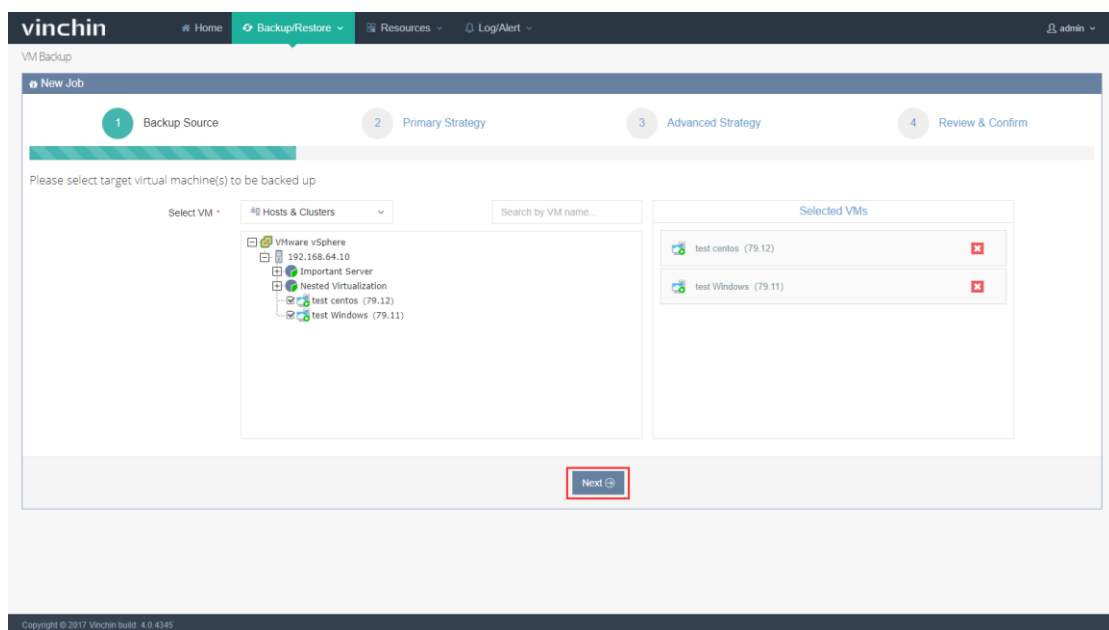

If your VMware vSphere infrastructure has been updated recently, you can click **【Refresh】** to update and sync the servers to Vinchin Backup & Recovery system as below:

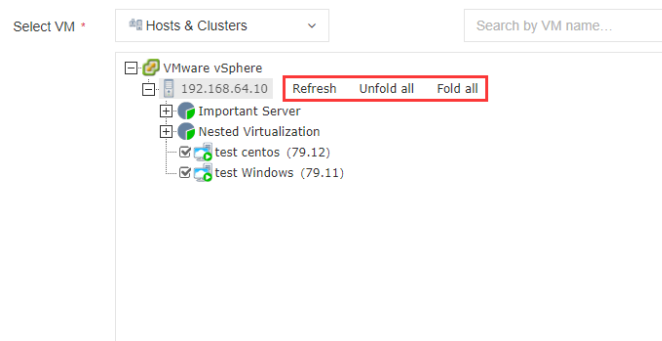


3.1.1.2.2. Primary Strategy

In the Primary Strategy page, there are two backup options available, "Backup at once" and "Backup as scheduled".

3.1.1.2.2.1. Backup at Once

The backup job only perform one time.

Choose "Backup at once", then click  to choose YY/MM/DD and HH:MM:SS, then click **【Next】**, the backup job will be performed at the exact time for only once.

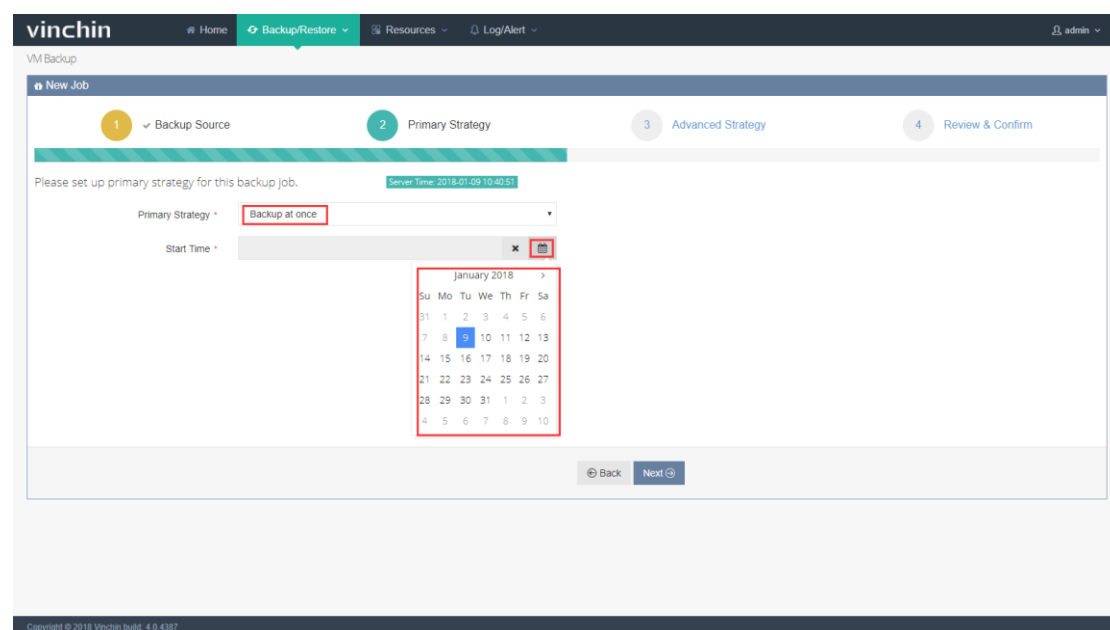

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 15:13:51

Primary Strategy: Backup at once

Start Time: 2017-12-25 15:20:57

Back Next

Copyright © 2017 Vinchin build: 4.0.4340

3.1.1.2.2.2. Backup as Scheduled

The backup job repeats as scheduled.

Choose "Backup as scheduled", then choose a Backup Strategy (Full Backup/Incremental Backup/Differential Backup).

Note: Incremental and Differential cannot be chosen at the same time.

Click the selected strategy bar as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 15:17:29

Primary Strategy: Backup as scheduled

Schedule: ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

- ✓ Full Backup (Every Friday, 23:00:00Start, Unrepeat) +
- ✓ Incremental Backup (Every Day 23:00:00Start, Unrepeat) +

Back Next

Copyright © 2017 Vinchin build: 4.9.4345

Then you will see there are some schedule options, you can choose to repeat the backup job at any time in any day.

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 15:18:12

Primary Strategy: Backup as scheduled

Schedule: ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

Full Backup (Every Friday, 23:00:00Start, Unrepeat)

Every Day ☐ Every Week ☒ Every Month ☐

Every Week: ☐ Monday ☐ Tuesday ☐ Wednesday ☐ Thursday ☒ Friday ☐ Saturday ☐ Sunday

Start Time: 23:00:00

Repeat: OFF

Incremental Backup (Every Day 23:00:00Start, Unrepeat)

Back Next

Copyright © 2017 Vinchin build: 4.9.4345

The time schedule of backup job includes 3 types: Every day, Every Week and Every

Month.

- Every Day schedule only needs to set Start Time as below:

vinchin VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017.12.25 15:21:02

Primary Strategy: Backup as scheduled

Schedule: ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

Full Backup (Every Friday, 23:00:00Start, Unrepeat)

Incremental Backup (Every Day 23:00:00Start, Unrepeat)

Every Day ☒ Start Time: 23:00:00 Repeat: OFF

Every Week ☐

Every Month ☐

Back Next

Copyright © 2017 Vinchin build: 4.0.4345

- Every Week schedule needs to choose which days to perform the backup job as below:

vinchin VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017.12.25 15:22:00

Primary Strategy: Backup as scheduled

Schedule: ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

Full Backup (Every Friday, 23:00:00Start, Unrepeat)

Incremental Backup (Every Monday, Wednesday, Friday, 23:00:00Start, Unrepeat)

Every Day ☐ Every Week ☒ Start Time: 23:00:00 Repeat: OFF

Monday ☒ Tuesday ☐ Wednesday ☒ Thursday ☐
Friday ☒ Saturday ☐ Sunday ☐

Back Next

Copyright © 2017 Vinchin build: 4.0.4345

- Every Month schedule is similar with Every Week schedule, needs to choose which

days to perform the backup job, details as below:

The screenshot shows the 'New Job' configuration page for a VM backup. It is divided into four steps: 1. Backup Source, 2. Primary Strategy (current step), 3. Advanced Strategy, and 4. Review & Confirm. The 'Primary Strategy' section has a dropdown menu set to 'Backup as scheduled'. Below this, there are three checkboxes for 'Schedule': 'Full Backup' (checked), 'Incremental Backup' (checked), and 'Differential Backup' (unchecked). A '+' button is next to the 'Full Backup' line, and a '-' button is next to the 'Incremental Backup' line. The 'Full Backup' line shows a schedule of 'Every Friday, 23:00:00Start, Unrepeat'. The 'Incremental Backup' line shows a schedule of 'Every Month Day1, Day15, 23:00:00Start, Unrepeat'. Below the 'Incremental Backup' line, there are three radio buttons for frequency: 'Every Day', 'Every Week', and 'Every Month' (selected). To the right of these radio buttons is a calendar grid for the month of January. The grid shows days 1 through 31. Days 1 and 15 are checked. Below the calendar grid, there is a 'Start Time' field set to '23:00:00' and a 'Repeat' dropdown menu set to 'OFF'. At the bottom of the page, there are 'Back' and 'Next' buttons. The footer of the page reads 'Copyright © 2017 Vinchin build: 4.0.4345'.

Set the backup "Start Time" and choose whether to enable the "Repeat".

"Repeat" means repeatedly perform the backup job every xx hours/minutes/seconds.

Once enable the "Repeat" option, you need to set the time of "Repeat Interval" and "Repeat End" accordingly.

(Example: Choose Every Month schedule, and tick day 1 and day 15, set the Start Time as 7:00:00, and enable the "Repeat", Repeat Interval Time 2:00:00 and Repeat End Time 21:00:00. This schedule means on 1st and 15th of each month, this backup job will start running from 7:00am, and it will repeat once every 2 hours until 9:00pm of the day.)

vinchin Home Backup/Restore Resources Log/Alert admin

Primary Strategy: Backup as scheduled

Schedule: ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

Full Backup (Every Friday, 23:00:00Start, Unrepeat)

Incremental Backup (Every Month Day1, Day15, 7:00:00Start, Repeat Interval:2:00:00, Repeat End:21:00:00)

Every Day ☐ Every Week ☐ Every Month ☒

Every Month: ☒ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8 ☐ 9 ☐ 10 ☐ 11 ☐ 12 ☐ 13 ☐ 14 ☒ 15 ☐ 16 ☐ 17 ☐ 18 ☐ 19 ☐ 20 ☐ 21 ☐ 22 ☐ 23 ☐ 24 ☐ 25 ☐ 26 ☐ 27 ☐ 28 ☐ 29 ☐ 30 ☐ 31

Start Time: 7:00:00

Repeat: ON

Repeat interval: 2:00:00

Repeat End: 21:00:00

Back Next

Copyright © 2017 Vinchin build: 4.0.4345

After finishing the settings, there will be a green ✓ in front of the schedule, it means the schedule setting is saved. Then click **【Next】**:

vinchin Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017.12.25 15:47:27

Primary Strategy: Backup as scheduled

Schedule: ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

Full Backup (Every Friday, 23:00:00Start, Unrepeat)

Incremental Backup (Every Day 23:00:00Start, Unrepeat)

Back Next

Copyright © 2017 Vinchin build: 4.0.4345


Incremental backup is backup the changes made since the last incremental backup.

Differential backup is backup the changes made since the last full backup, every new differential backup relies on the same full backup.

3.1.1.2.3. Advanced Strategy

3.1.1.2.3.1. Backup Location

Select a repository to store the backed up data. You can enable the “auto-select”, then the backup data will be automatically stored to an optimized repository. You can disable the “auto-select” to specify a repository for the backup data.

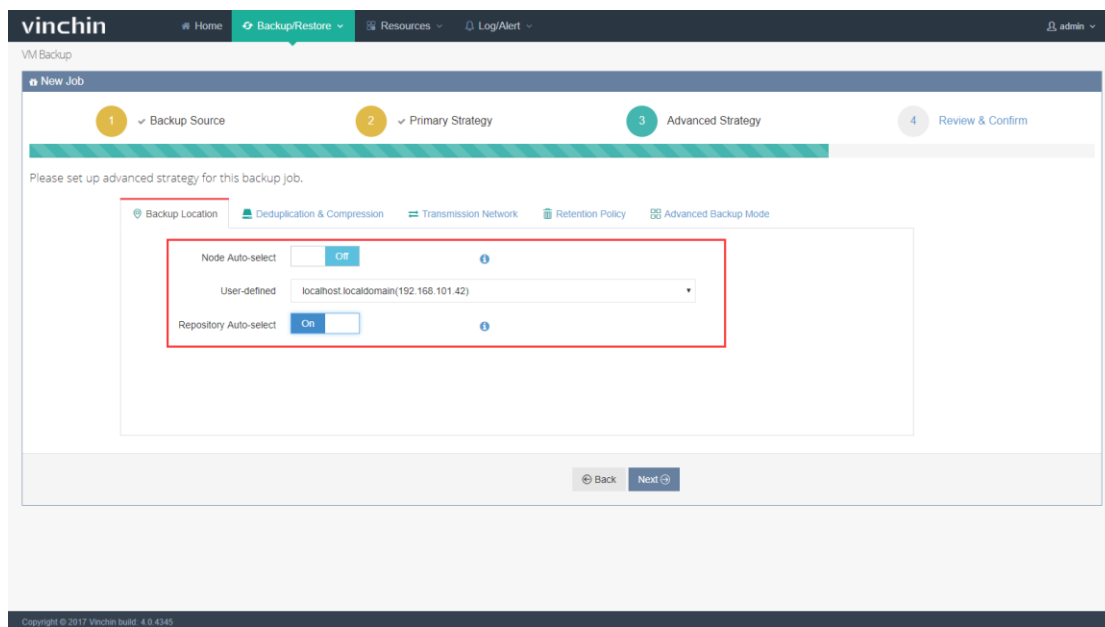

1. If you have added multiple backup nodes as alternative backup repository, you need to select one node first. Click the blue button to disable the “Node Auto-Select”, select one available node as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off

User-defined localhost.localdomain(192.168.101.42)

Repository Auto-select ☒ On

Back Next

- If you prefer to specify a backup repository under this node, disable the "Repository Auto-Select" and specify a selectable repository for this backup job.

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off

User-defined localhost.localdomain(192.168.101.42)

Repository Auto-select ☐ Off

User-defined Local Disk1(Local Disk, Capacity :299.85GB, Free Space:299.82GB)

Back Next

- If you prefer to let the system select the optimized repository, keep the "Node Auto-Select" or/and "Repository Auto-Select" enabled.

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☒ On

Back Next

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off

User-defined localhost.localdomain(192.168.101.42)

Repository Auto-select ☒ On

Back Next

3.1.1.2.3.2. Deduplication & Compression

Choose to enable/disable data deduplication, data compression and data block size.

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Data Deduplication ☐ Off

Compression ☒ On

Block size 64 KB


Back Next

Copyright © 2017 Vinchin build: 4.0-4349

- Data Deduplication: Enable it to delete the duplicated data, can reduce the total backup size.
- Data Compression: Enable it to compress the backup data size, can reduce the total backup size.
- Data Block Size: Choose a block size from 64KB to 2048KB, Backup data will be reorganized as specified size. When enabling Deduplication, the duplicated data will be deleted as specified size.

3.1.1.2.3.3. Transmission Network

Data can be transferred via LAN or SAN (LAN-Free).

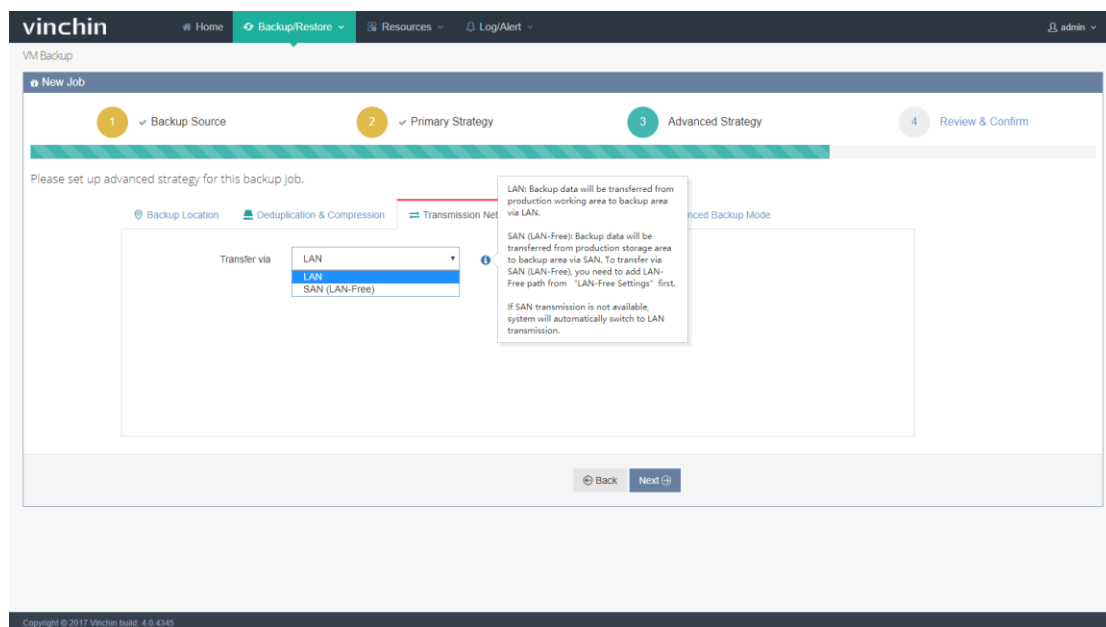

If you have pre-set up LAN-Free, you can choose transfer via SAN to speed up the backup/restore. If you haven't set up any LAN-Free, you can refer to chapter 2.4 to set

up the LAN-Free first. If you have no SAN environment, please choose LAN to Transfer.


3.1.1.2.3.4. Retention Policy

Backup retention policy is a policy to reserve backup data on disk according to number of days/restore points. Old restore points out of date/over range will be auto-deleted.


For VMware vSphere, the retention policy is based on every single restore point no matter its full backup, incremental backup or differential backup time point. It will lead a deletion of the furthest restore point when a new restore point is generated.

Retention Policy includes "Number of Restore Points" and "Number of Days", details as below:

Number of Restore Points: Restore points will be reserved according to number limitation.

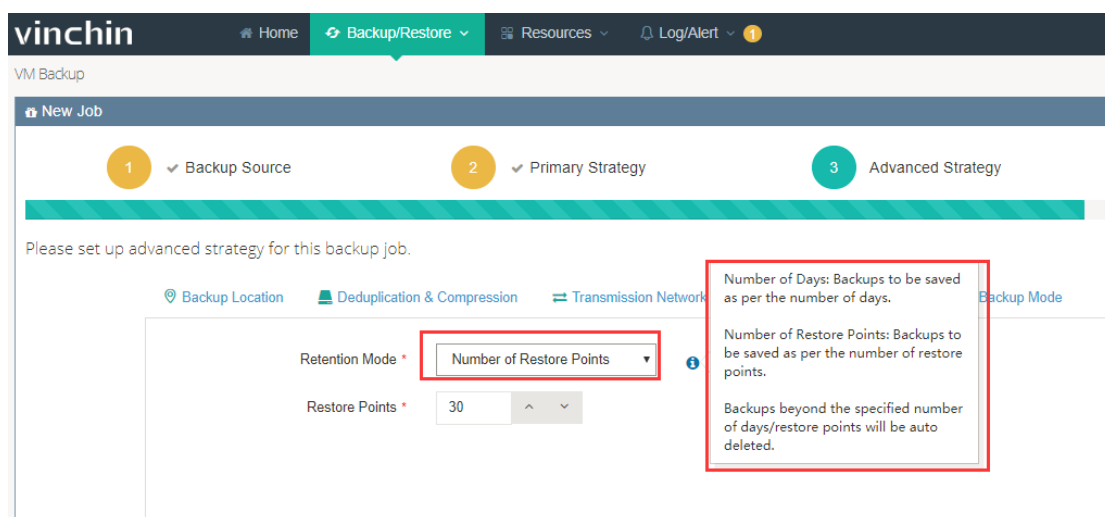


Number of Days: Restore points will be reserved according to days limitation.

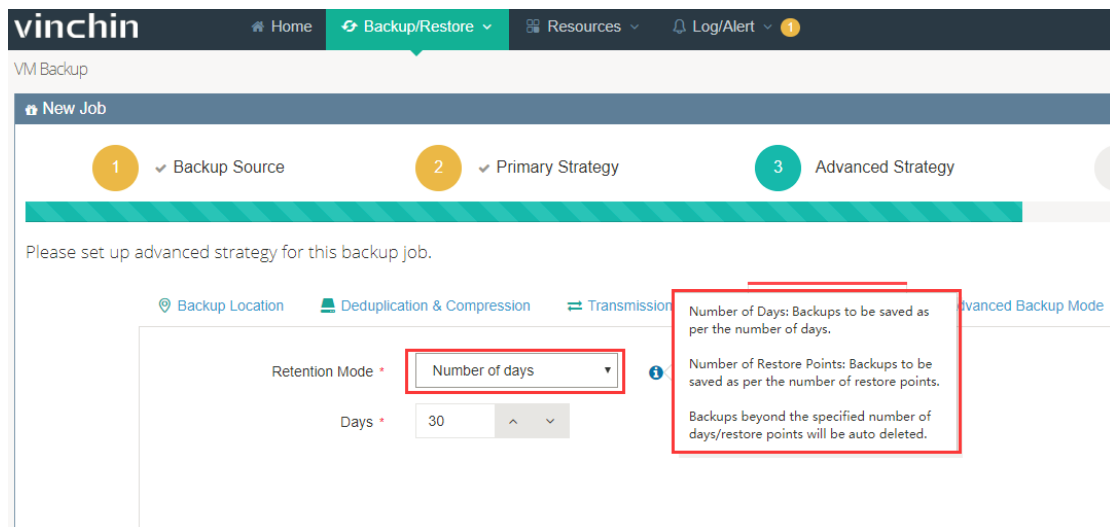

3.1.1.2.3.5. Advanced Backup Mode

1) Serial snapshot / parallel snapshot

- ✓ Serial snapshot: taking snapshot of each VM in turn and complete transfer in turn.
- ✓ Parallel snapshot: taking snapshot of all VMs concurrently and complete transfer in turn. It is necessarily to be chosen when there's business relationship between the VMs or backup time consistency is required of all the VMs.

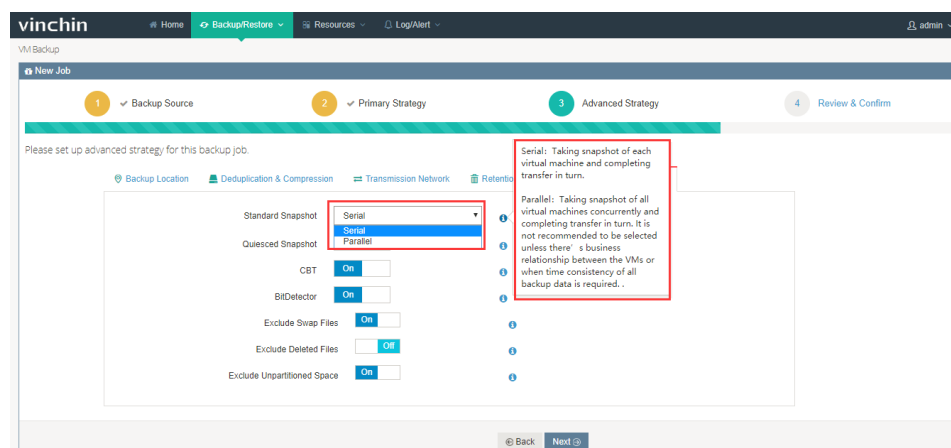


2) Quiesced Snapshot

For VMware vSphere, "Quiesced Snapshot" is a technology to keep file systems or

applications on the VM in a consistent state via application-awareness processing (VMware tools) before the VM snapshot is created. Applications on Windows OS are required to support Microsoft VSS. If failed to take quiesced snapshot, system will take standard snapshot.

Please install VMware tools before enabling the "Quiesced Snapshot".

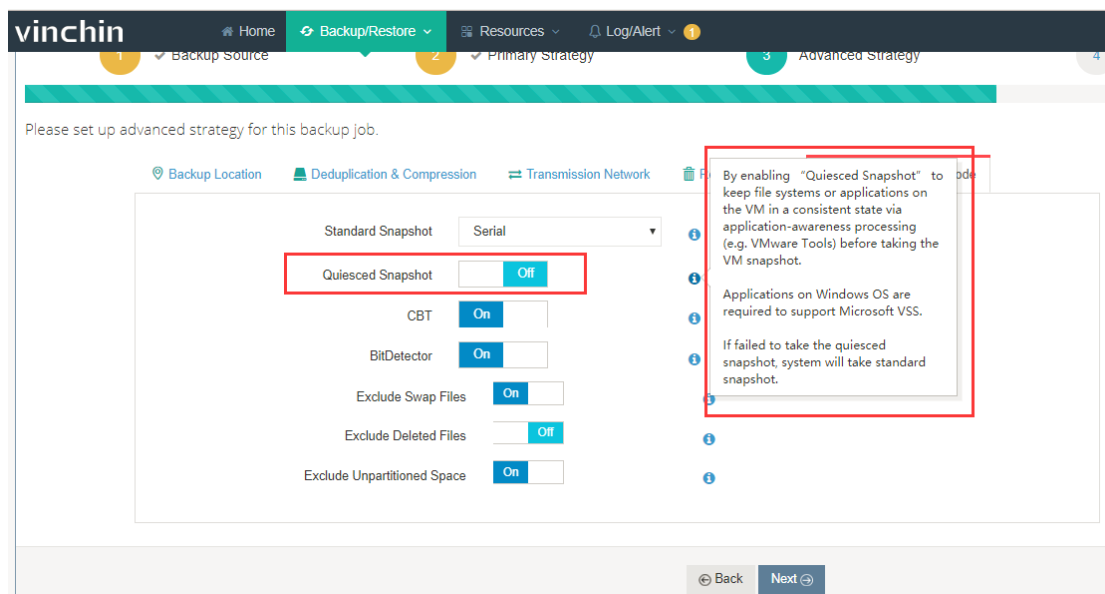

3) CBT

CBT (Changed Block Tracking), it is the underlying support technology for VMware to implement "incremental backup". Enable "CBT" can help to improve the incremental backup speed.

Note: virtual machine version 7 and above shall support.

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy **Advanced Backup Mode**

Standard Snapshot Serial

Quiesced Snapshot Off

CBT On

BitDetector On

Exclude Swap Files On

Exclude Deleted Files Off

Exclude Unpartitioned Space On

Enabling "CBT" can improve speed of incremental backups. Virtual machine version 7 or above supports.

Back Next

4) BitDetector

BitDetector is a vinchin technology to improve backup efficiency and save backup storage space.

Enabling "BitDetector" you can choose not to backup those swap files, deleted files and unpartitioned space which might be useless or unnecessary data for you.

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy **Advanced Backup Mode**

Standard Snapshot Serial

Quiesced Snapshot Off

CBT On

BitDetector On

Exclude Swap Files On

Exclude Deleted Files Off

Exclude Unpartitioned Space On

Back Next

3.1.1.2.4. Review & Confirm

After finish, you are able to review and confirm the settings. Click **【Submit】** if confirm, the backup job creation will be completed.

vinchin

Home Backup/Restore Resources Log/Alert admin

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please review and confirm your configurations.

Job Name: VMware vSphereBackup1
Default job name could be modified.

Backup Source

Backup Source: 192.168.64.10/test-centos (79.12)
192.168.64.10/test-Windows (79.11)
VMware vSphere Backup

Primary Strategy

Primary Strategy: Backup as scheduled
Backup Schedule: Full Backup (Every Friday, 23:00:00Start, Unrepeat)
Incremental Backup (Every Day 23:00:00Start, Unrepeat)

Advanced Strategy

Backup Location: User-defined: localhost.localdomain(192.168.101.42)
Repository Auto-select: Ok

Deduplication & Compression: Data Deduplication: OFF
Compression: ON
Block size: 64 KB

Transmission Network: Transfer via: LAN

Retention Policy: Days retention: Retention value is 30

Advanced Backup Mode: VM Quiescence: OFF

Back Submit

Copyright © 2017 Vinchin build: 4.0.4345

Note: You can change the Job name before submitting.

3.1.1.3. Perform Backup Job

After creating a new backup job, you will see this job in the "Current Job List" as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Current Job

Job List


Page 1 of 1 View 10 records per page Total 1 records

Search by job name Search


Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-25 16:19:11	Pending	-	admin	Options

Tip: Click job name you can view the job details.

Click " + ", you can review the backup schedules of this job as below:

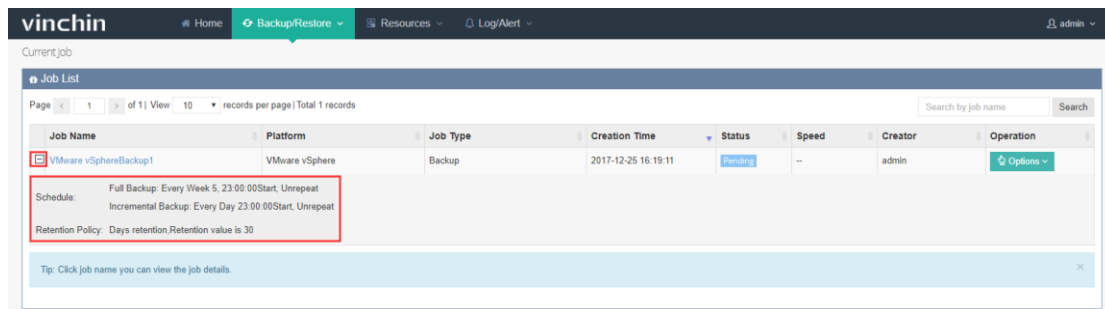

Click **【Options】** , you will see operation options including Activate Incr.(Incremental Backup), Activate Diff.(Differential Backup), Activate Full(Full Backup) and Stop.

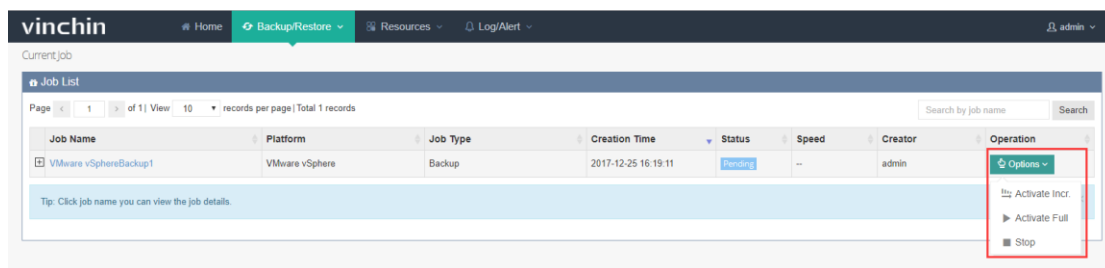

Note: If you choose incremental backup or differential backup, the backup job will automatically change to full backup when the first time you perform it. After then the backup job will be repeated time by time as scheduled.

If you want to stop this backup job, click **【Stop】** button. After stopped, if you want to re-activate this backup job, you can click **【Options】** → **【Enable Schedule】** to backup as scheduled if necessary or Activate, edit, delete the backup job according to your demands.

The screenshot shows the 'Current Job' section with a 'Job List' table. The table has columns: Job Name, Platform, Job Type, Creation Time, Status, Speed, Creator, and Operation. The first row is 'VMware vSphereBackup1' with status 'Stopped'. The 'Operation' column has a dropdown menu with options: 'Options', 'Enable Schedule', 'Activate Incr.', 'Activate Full', 'Edit', and 'Delete'. The 'Options' menu is highlighted with a red box.

Click the job name, you will see the job running details page as below:

The screenshot shows the 'Current Job' section with a 'Job List' table. The job name 'VMware vSphereBackup1' is highlighted with a red box. The status is 'Running'.

The screenshot shows the 'Job Details' page. The 'Basic Info' tab is selected, showing job details for 'VMware vSphereBackup1'. The 'Run Log' is visible below, showing the progress of the backup operation. The 'Job Flow' graph shows the progress of the backup operation, with a peak of 59MB/s.

On the top right are 3 main columns showing the job configuration info as below:

The three screenshots show the job configuration info for 'VMware vSphereBackup1'.

- Basic Info:**
 - Job Name: VMware vSphereBackup1
 - Job Type: Backup[VMware vSphere]
 - Job Status: Running
 - Total Size: 13.93GB
 - Processed: 2.08GB
 - Start Time: 2017-12-25 16:30:09
 - Duration: 00:00:58
 - Job finish at: 2017-12-25 16:35:34
- Repository Info:**
 - Backup Node: localhost.localdomain 192.168.101.42
 - Repository: Local Disk1(Local Disk)
 - Capacity: 299.85GB, Free space: 297.11GB
 - Data Deduplication: Off
 - Compression: On
 - Block size: 64KB
 - VM Quiescence: Off
- Strategy Info:**
 - Creation Time: 2017-12-25 16:19:11
 - Next Run: 2017-12-25 23:00:00
 - Full Backup: Every Friday 23:00:00Start, Unrepeat
 - Incremental Backup: Every Day 23:00:00Start, Unrepeat
 - Differential Backup: None
 - Retention Policy: Days retention, Retention value is 30
 - Transfer via: LAN

On the bottom left are another 3 main columns are Run Log, Current Run and History Run.

Run Log		Current Run	History Run
✓	Opening remote disk[localraid 5.4T] test Windows (79.11) \test Windows (79.11) .vmdk'		2017-12-25 16:30:47
✓	Starting data transmission		2017-12-25 16:30:47
✓	Backup VM configuration info		2017-12-25 16:30:47
✓	Starting backing up VM'test Windows (79.11) '		2017-12-25 16:30:47
✓	Data transmission success		2017-12-25 16:30:46
✓	Deleting VM backup snapshot		2017-12-25 16:30:46
✓	Opening remote disk[localraid 5.4T] test centos (79.12) \test centos (79.12) .vmdk'		2017-12-25 16:30:15
✓	Starting data transmission		2017-12-25 16:30:15

Run Log: Records the current backup job running logs.

Run Log

Current Run

History Run

No.	VM Name	Job Type	Total	Processed	Backed up	Speed	Progress	Status	Description
1	test centos (79.12)	FullBackup	1.33GB	1.33GB	724.32MB	--	100%	Finished	
2	test Windows (79.11)	FullBackup	12.61GB	8.02GB	4.53GB	48MB/s	63.63%	Running	

Current Run: Shows the current job details including VM Name, Job Type (Full Backup/Incremental Backup/Differential Backup), Total (VM total size), Processed (Processed size), Backed up (The real size that has been stored to the backup repository) , Speed(Data transfer speed), Progress(Job running progress), Status etc.

Run Log

Current Run

History Run

Page

1

of 1

View

10

records per page

Total 3 records

No.	Job Type	Status	Total	Processed	Backed up	Start Time	End Time
1	IncrementalBackup	success	896KB	896KB	232.17KB	2017-12-25 16:36:20	2017-12-25 16:36:32
2	IncrementalBackup	success	2.25MB	2.25MB	566.37KB	2017-12-25 16:35:51	2017-12-25 16:36:04
3	FullBackup	success	13.93GB	13.93GB	7.42GB	2017-12-25 16:30:09	2017-12-25 16:35:23

History Run: Reviews all the history operations of this backup job.

Note:

- If the backup job has been set as "Backup at once", after job running finished, you can find it in the History Job list.
- If the backup job has been set as "Backup as scheduled", the job will remain in the Current Job list and continue backup job as scheduled.
- Once enable "Deduplication & Compression" when creating backup job, the "Backed up" size will be smaller.

3.1.2. VM Restore


3.1.2.1. Create Restore Job

3.1.2.1.1. Restore Point

Click **【Backup/Restore】** - **【VM Restore】**, you are coming to the restore job creating page.


Select a target VM restore point under the VMware vSphere which you want to restore.

You can quickly find the target restore point by specifying backup node and selecting “Group by VMs” or “Group by Restore Points” accordingly.

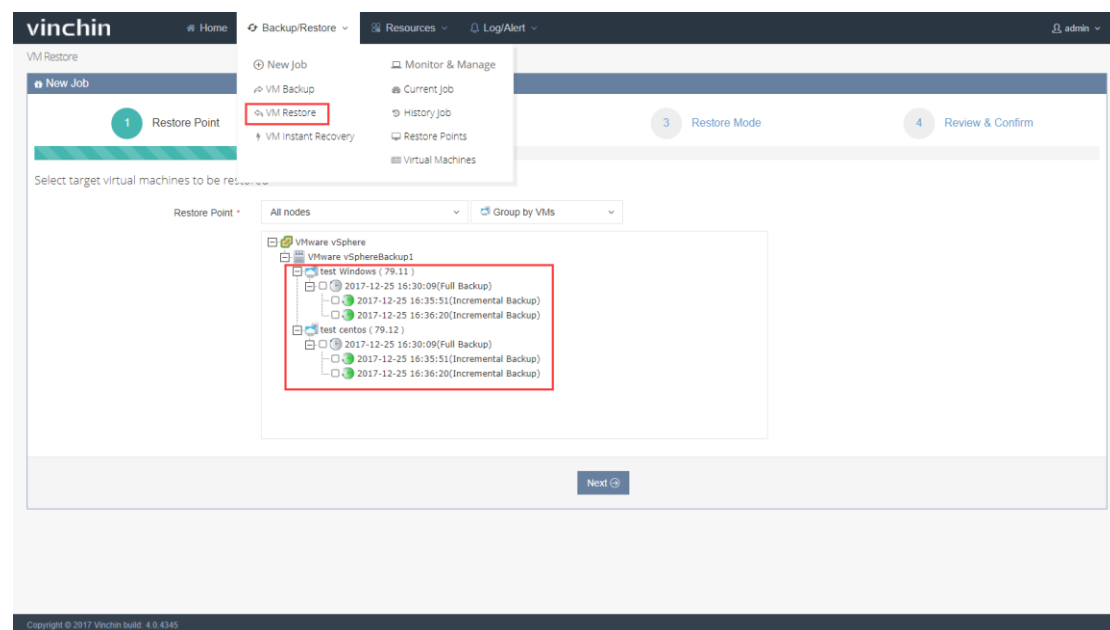

- A Restore Point has been marked with the name of a backup job. Each backup job name has displayed the backup time point and backup type (full backup/incremental backup/differential backup) for users to recognize and select.

Choose one restore point under each virtual machine, click **【Next】** as below:

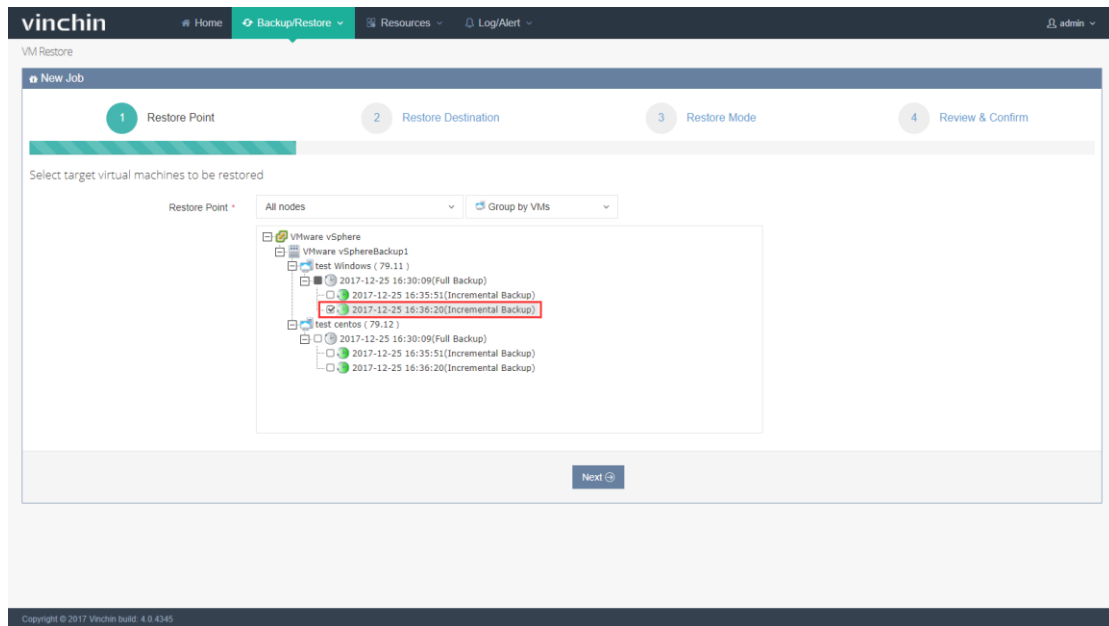

Note: You can choose multiple virtual machines to restore at once. If one virtual machine has multiple restore points, you can only choose one point to restore at once.

3.1.2.1.2. Restore Destination

- 1) Select Target Host: Select a target host where you want to run the restored VMs as below:

The screenshot shows the 'VM Restore' interface in the Vinchin web console. The navigation bar includes 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The user is logged in as 'admin'. The 'New Job' section has four steps: 1. Restore Point, 2. Restore Destination (active), 3. Restore Mode, and 4. Review & Confirm. Under 'Step 2', the instruction is 'Select a host where to run the restored VMs'. The 'Target Host' field is highlighted with a red box and contains two IP addresses: 192.168.64.10 and 192.168.64.10. Below this, it says 'Unfold the virtual infrastructures to select a host where to run the restored VM'. The 'Unified Configurations' section has a toggle switch set to 'Off'. The 'VM Configurations' section shows a single VM: 'test Windows (79.11) _2017-12-25 16:36:20'. At the bottom, there are 'Back' and 'Next' buttons.

After restored, the VMs will run on the selected host.


- 2) Unified Configurations: Enable this function you can set multiple VMs' storage, network information, and choose whether to power on the target VM(s) after restoring as below:

The screenshot shows the 'VM Restore' interface in the Vinchin web console. The navigation bar includes 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The user is logged in as 'admin'. The 'New Job' section has four steps: 1. Restore Point, 2. Restore Destination (active), 3. Restore Mode, and 4. Review & Confirm. Under 'Step 2', the instruction is 'Select a host where to run the restored VMs'. The 'Target Host' field contains two IP addresses: 192.168.64.10 and 192.168.64.10. Below this, it says 'Unfold the virtual infrastructures to select a host where to run the restored VM'. The 'Unified Configurations' section is highlighted with a red box and contains four items: 'Unified Configurations' (toggle switch set to 'On'), 'Restore to' (dropdown menu set to 'Auto-select'), 'Connect to' (dropdown menu set to 'Auto-select'), and 'Power on target VM after restoring' (toggle switch set to 'Off'). Below this, it says 'Please keep the original backed up VM poweroff after enable this function.' The 'VM Configurations' section shows a single VM: 'test Windows (79.11) _2017-12-25 16:36:20'. At the bottom, there are 'Back' and 'Next' buttons.


- 3) Single VM Configurations: Select a target VM, you can rename it and pre-set its storage, network information details as below:



Note: When renaming the VM, make sure there's no special characters. Any combination of letters, numbers and underscore characters are recommended.

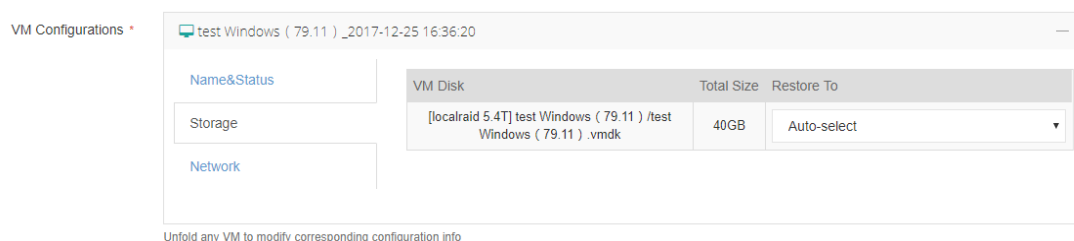

Note: If choose Auto-select in the "Storage", the system will automatically choose the biggest storage space. If all the storages are out of free space, the restore job will fail, and system will remind insufficient space.

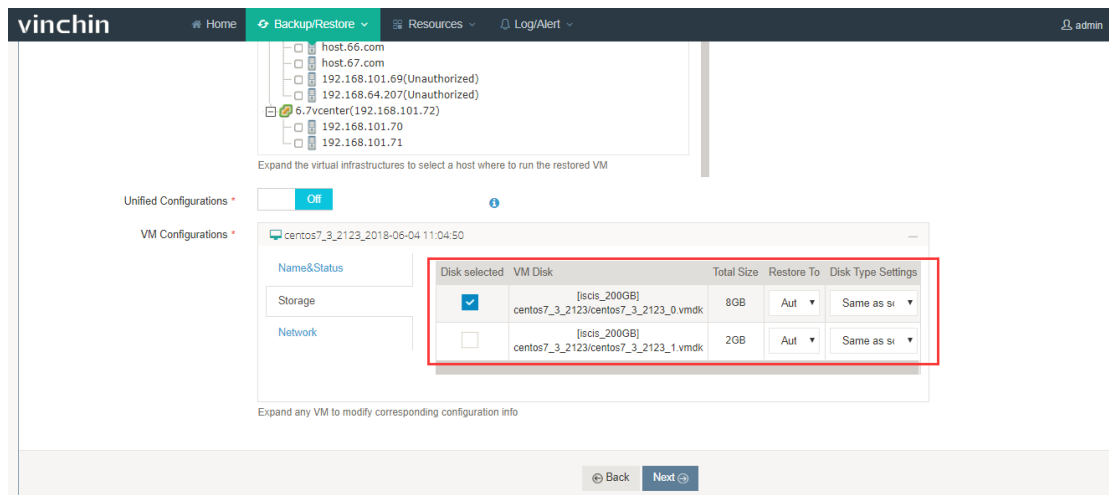

When a virtual machine has multiple disks, you can choose individual disks to restore without having to restore all the disks on the virtual machine by click [v].

You can also choose where to connect the VM network interface to after restoring.



3.1.2.1.3. Restore Strategy

Choose "Restore at once" or Restore as scheduled" as below:

The screenshot shows the 'VM Restore' 'New Job' wizard in the Vinchin interface. The progress bar indicates four steps: 1. Restore Point, 2. Restore Destination, 3. Restore Mode (current), and 4. Review & Confirm. The 'Restore Mode' dropdown is set to 'Restore at once'. Below it, the 'Advanced Strategy' section shows 'Transmission Network' with 'Transfer via' set to 'LAN'. At the bottom, there are 'Back' and 'Next' buttons. The footer shows 'Copyright © 2017 Vinchin build: 4.9.4345'.

If choosing "Restore at once", the restore job will start running after created.

If choosing "Restore as scheduled", you need to set restore schedules as below. After done, the job will run as scheduled.

This screenshot shows the same 'VM Restore' 'New Job' wizard, but with 'Restore Mode' set to 'Restore as scheduled'. The 'Schedule' section is expanded, showing a 'Restore Strategy (Every Friday, 23:00:00 Start, Unrepeat)'. The 'Every Week' radio button is selected, and the 'Friday' checkbox is checked. The 'Start Time' is set to '23:00:00' and 'Repeat' is set to 'OFF'. The 'Advanced Strategy' section remains the same with 'Transfer via' set to 'LAN'. 'Back' and 'Next' buttons are at the bottom. The footer shows 'Copyright © 2017 Vinchin build: 4.9.4345'.

Note: Restore as schedule is not recommended if no special circumstances, because restoring too many VMs will occupy production resources.

You can choose transmission network in the “Advanced Strategy”, you can choose LAN or SAN (LAN-Free) according to your virtual environment. After finish, click **【Next】** .

3.1.2.1.4. Review & Confirm

After finish, you are able to review and confirm the settings. Click **【Submit】** if confirm, the restore job creation will be completed.

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Restore

New Job

1 ✓ Restore Point 2 ✓ Restore Destination 3 ✓ Restore Mode 4 Review & Confirm

Please review and confirm your configurations.

Job Name : VMware vSphereRestore1
Default job name could be modified.

Restore Point

Restore point info : VMware vSphereRestore 192.168.64.10/test Windows (79.11) (2017-12-25 16:36:20)

Restore Destination

Restore Destination : Restore to 192.168.64.10 -> 192.168.64.10
The restored VMs names are:
test_Windows_79_11_2017_12_25_16_36_20

Restore Mode

Restore Mode : Restore as scheduled - Restore Strategy (Every Friday, 23:00:00Start, Unrepeat)

Transmission Network: Transfer via : LAN

Back Submit


Copyright © 2017 Vinchin build: 4.0.4345

Note:

- You can rename the restore job.
- Make sure all the settings are correct before submitting.
- If you have chosen “Restore at once”, the restore job will start running once you submit the job.


3.1.2.2.Perform Restore Job

After creating a new restore job, you will see this job in the “Current Job List” as below:

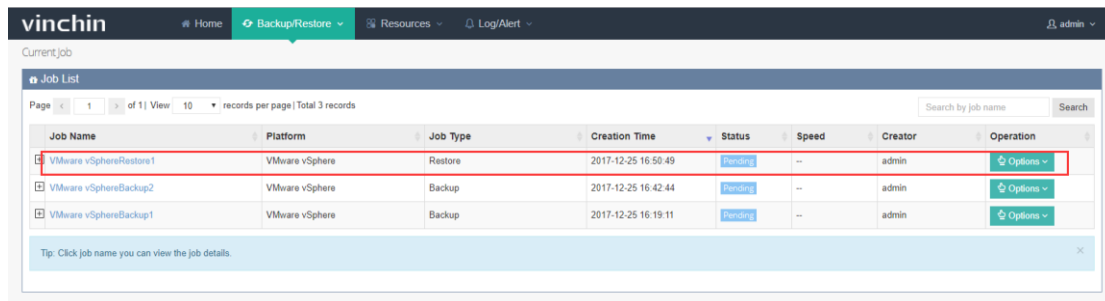


Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-25 16:50:49	Pending	--	admin	Options
VMware vSphereBackup2	VMware vSphere	Backup	2017-12-25 16:42:44	Pending	--	admin	Options
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-25 16:19:11	Pending	--	admin	Options

Click “+”, you can review the restore schedules of this job as below (if you have set “Restore as scheduled”) :

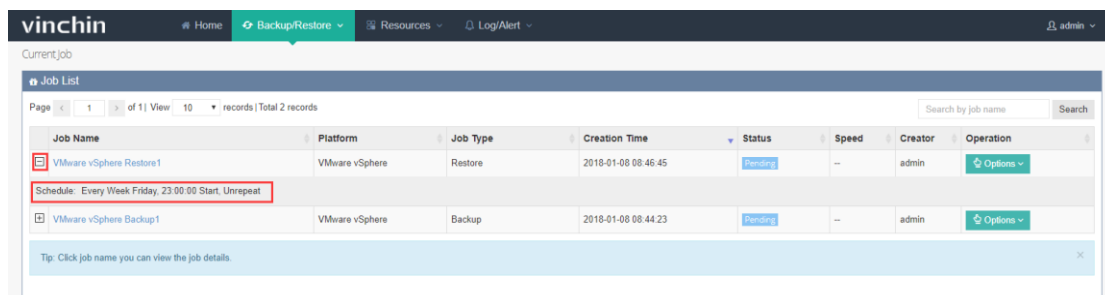

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
VMware vSphere Restore1	VMware vSphere	Restore	2018-01-08 08:46:45	Pending	--	admin	Options
Schedule: Every Week Friday, 23:00:00 Start, Unrepeat							
VMware vSphere Backup1	VMware vSphere	Backup	2018-01-08 08:44:23	Pending	--	admin	Options

Click 【Options】 - 【Activate job】 to start the restore job.

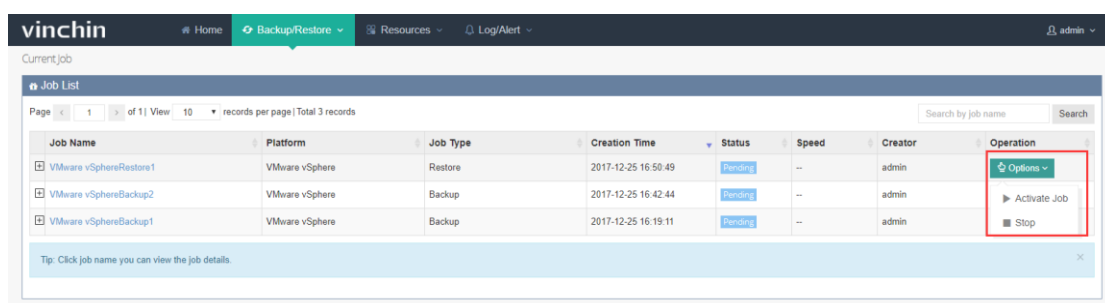

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-25 16:50:49	Pending	--	admin	Options
VMware vSphereBackup2	VMware vSphere	Backup	2017-12-25 16:42:44	Pending	--	admin	Options
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-25 16:19:11	Pending	--	admin	Options

If you want to stop this restore job, click 【Stop】 button. Click 【Options】 again, you can

activate or delete this job as you want.

The screenshot shows the Vinchin Backup/Restore interface. At the top, there's a navigation bar with 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. Below this, a 'Current Job' section shows a green status bar indicating 'Stop Restore Job' and 'Stop Restore Job success'. The main area is the 'Job List' table, which has columns for Job Name, Platform, Job Type, Creation Time, Status, Speed, Creator, and Operation. The table contains three rows: 'VMware vSphereRestore1' (Status: Stopped), 'VMware vSphereBackup2' (Status: Pending), and 'VMware vSphereBackup1' (Status: Pending). A red box highlights the 'Operation' column for the first row, showing buttons for 'Options', 'Activate Job', and 'Delete'. A tip at the bottom says 'Click job name you can view the job details.'

Click the job name, you will see the job details page as below:

This screenshot shows the same 'Job List' table as the previous one. The 'VMware vSphereRestore1' job name in the first row is highlighted with a red box, indicating it is the selected job for which details are being viewed.

The screenshot shows the 'Job Details' page for the 'VMware vSphereRestore1' job. The page has a 'Basic Info' tab selected. On the left, there's a 'Job Flow' graph showing data transfer rates over time, and a 'Job Progress' bar indicating 12.33% completion. On the right, the 'Basic Info' section lists job details: Job Name (VMware vSphereRestore1), Job Type (Restore[VMware vSphere]), Job Status (Running), Total Size (12.61GB), Processed (1.55GB), Start Time (2017-12-25 16:57:50), Duration (00:00:47), and Job finish at (2017-12-25 17:03:29). Below this, the 'Run Log' section shows a list of steps with checkboxes and timestamps, including 'Opening remote disk', 'Starting data transmission', 'Rebuilding VM', 'Starting restoring VM', 'Capturing restored data size', 'Activating the restore job', and 'Capturing restore VM list'.

Run Log: Records the current restore job running progress.

Run Log Current Run History Run									
No.	VM Name	Job Type	Total	Processed	Recovered	Speed	Progress	Status	Description
1	test Windows (79.11)	Restore	12.61GB	2.51GB	2.51GB	40MB/s	19.92%	Running	

Current Run: Shows the current job details including VM Name, Job Type (Restore), Total (VM total size), Processed (Processed size), Recovered (The real size that has been restored) , Speed(Data transfer speed), Progress(Job running progress), Status etc.

Run Log Current Run History Run									
Page 1 of 1 View 10 records per page Total 1 records									
No.	Job Type	Status	Total	Processed	Recovered	Start Time	End Time		
1	Restore	Success	12.61GB	12.61GB	12.61GB	2017-12-25 16:57:50	2017-12-25 17:02:51		

History: If you've set "Restore at once" for this restore job, this job will be auto-deleted after completing restoring and shows no data. If you've set " Restore as scheduled" ,you can review all the history operations of this restore job.

Warning: During a restore process, do not power on the VM before the restore job is completed, otherwise the VM data will be damaged or lost.

3.1.3. VM Instant Recovery


VM Instant Recovery helps to recover TB sized VMs in 15 secs, all business recovery in 1 min, minimized the break-off time of critical businesses.

When creating a VM Instant Recovery job, make sure there's available restore point. If no, please backup target VM(s) with Vinchin Backup & Recovery system first.

3.1.3.1. Create Instant Recovery Job

Click **【VM Instant Recovery】** you are coming to the instant recovery new job adding page.

Select a target VM restore point under the VMware vSphere which you want to instantly recover as below. You can quickly find the target restore point by specifying backup node and selecting "Group by VMs" or "Group by Restore Points" accordingly.

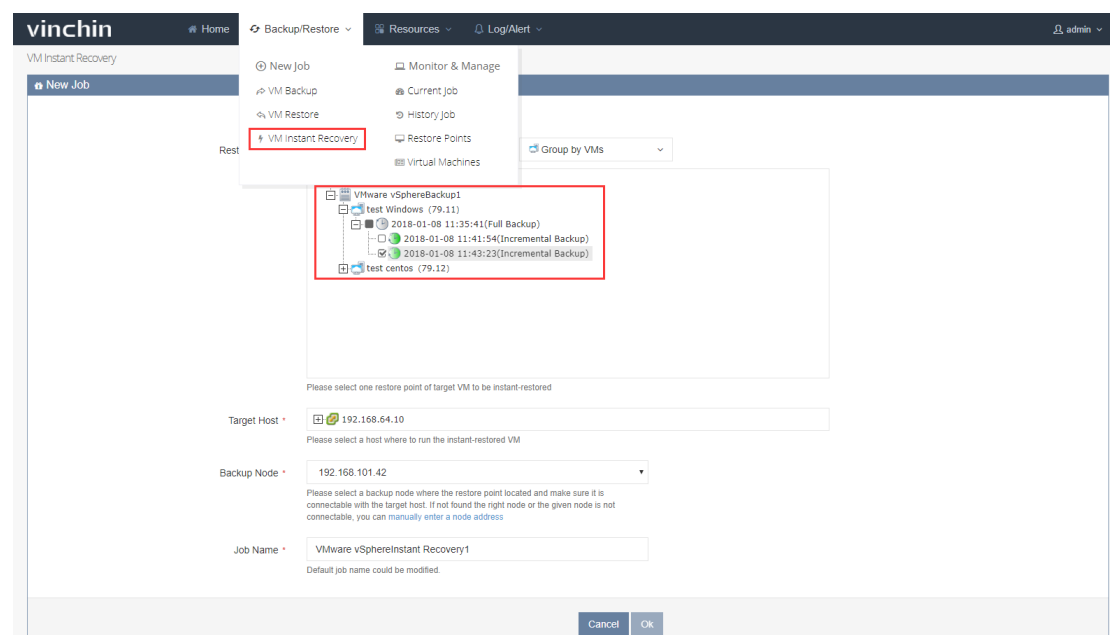

Note: You can only select one restore point for each instant recovery job.

Select a host as the recovery destination where you want to run the instantly recovered VMs, and select the backup node IP/domain where the backup repository was mounted.

You can also set the VMs' name, network info and whether to power on the VM after restoring.

vinchin

Home Backup/Restore Resources Log/Alert admin

2018-01-08 11:41:54(Incremental Backup)
2018-01-08 11:43:23(Incremental Backup)
test centos (79.12)

Please select one restore point of target VM to be instant-restored

Target Host * 192.168.64.10
192.168.64.10

Please select a host where to run the instant-restored VM

Backup Node * 192.168.101.42

Please select a backup node where the restore point located and make sure it is connectable with the target host. If not found the right node or the given node is not connectable, you can manually enter a node address

VM Configurations *

Name&Status Restored VM Name: *
test_Windows_79_11_2018_01_08_11_43_23VM_Instant_Recovery

Network

Power on the VM after restoring *
OFF

Job Name * VMware vSphereInstant Recovery1
Default job name could be modified.

Cancel Ok

Copyright © 2017 Vinchin build: 4.0.4345

Click **【OK】** you are coming to the Current Job List as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Current Job

Job List

Page 1 of 1 View 10 records per page Total 2 records

Search by job name Search


Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
VMware vSphereInstant Recovery1	VMware vSphere	Instant Recovery	2018-01-08 11:52:24	Pending	--	admin	Options ▶ Activate Job ■ Stop
VMware vSphereBackup1	VMware vSphere	Backup	2018-01-08 11:19:15	Pending	--	admin	

Tip: Click job name you can view the job details.

Operation details please refer to "chapter 3.1.2.VM Restore".

3.1.3.2. Perform Instant Recovery Job

Click **【Activate】** to activate the Instant Recovery job and click job name to view the job running details as below:

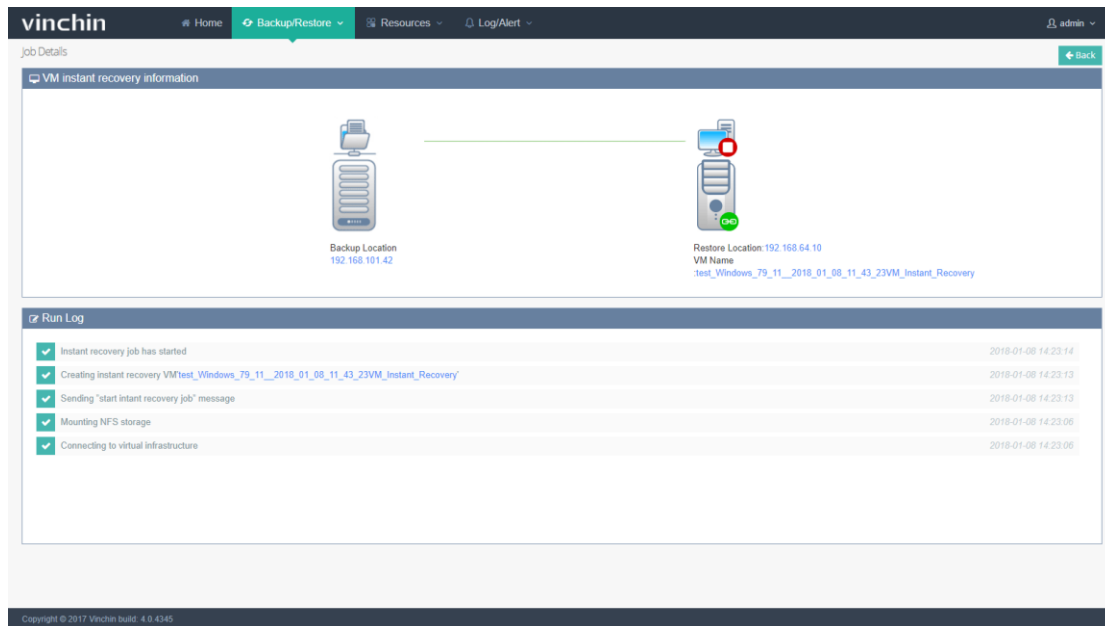


The logs will display the instant recovery job progress.

After the job is completed successfully, you can power on the recovered VMs.


If you have preset "power on the VM after restoring", the VM will be powered on automatically once you activate the job in 15 seconds.

Warning: Do not create snapshot on the instantly recovered VM, or change any disk information. Otherwise error will occur to the VM or it will crash.

Log in to VMware vSphere, you can see the instantly recovered VM is created in second level, and is workable:

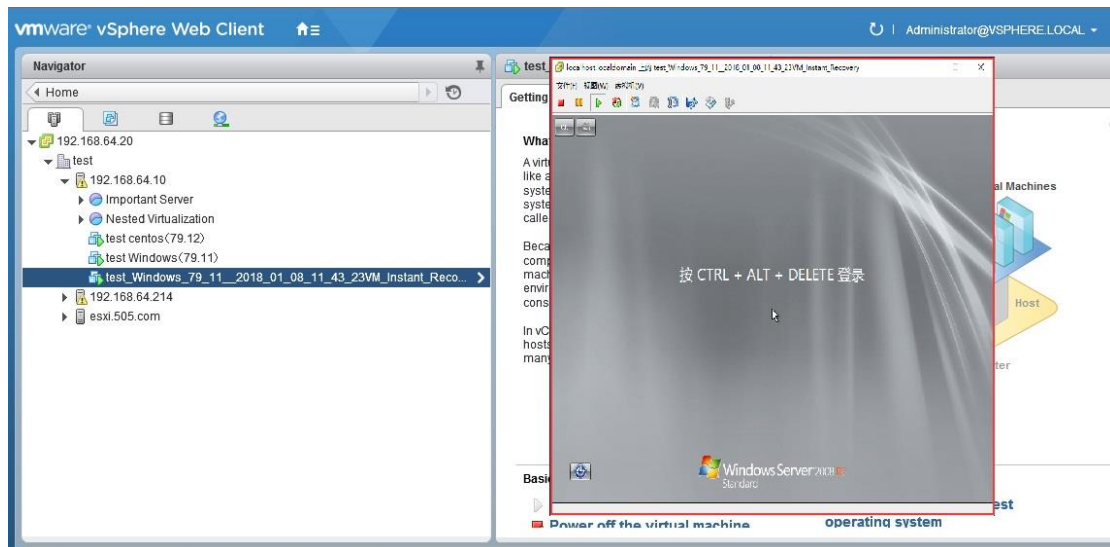

If you want to delete the instant recovery job, you can click **【Stop】** as below:

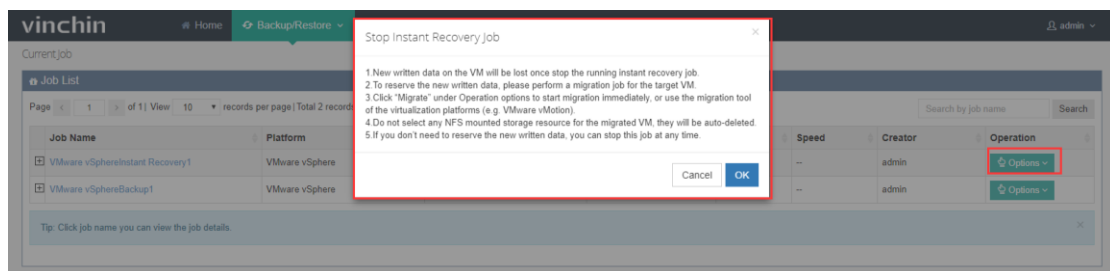

Please read the stop reminder carefully before confirming.

The screenshot displays the Vinchin Backup/Restore web interface. The top navigation bar includes links for Home, Backup/Restore (active), Resources, and Log/Alert. The user is logged in as 'admin'. The main section is titled 'job Details' and shows 'VM instant recovery information'. It features two server icons: one for 'Backup Location' (192.168.101.42) and another for 'Restore Location' (192.168.64.10) with VM Name 'test_Windows_79_11_2018_01_08_11_43_23VM_Instant_Recovery'. Below this is a 'Run Log' section with a red border, listing the following steps with green checkmarks:

- Instant recovery job has stopped
- Delete the instant recovery VM 'test_Windows_79_11_2018_01_08_11_43_23VM_Instant_Recovery'
- Connecting to virtual infrastructure
- Instant recovery job has started
- Creating instant recovery VM 'test_Windows_79_11_2018_01_08_11_43_23VM_Instant_Recovery'
- Sending 'start instant recovery job' message
- Mounting NFS storage
- Connecting to virtual infrastructure


The log entries are timestamped from 2018-01-08 14:23:06 to 2018-01-08 14:26:23. The footer indicates 'Copyright © 2017 Vinchin build: 4.0.4345'.

Warning: If you stop the instant recovery job, all the recovered VM information will be deleted (Including newly written data during the instant recovery). If you need to reserve the recovered VM and its newly written data, do not stop the job until you have migrated them to a safe place.


3.1.4. VM Migration

When performing instant recovery job, the VM and newly written data can be synchronously migrated to the business area via VMware vMotion or Vinchin backup's live-migration function without effecting the normal operation of your business.


Select a normally running instant recovery job and click **【Migration】** as below:

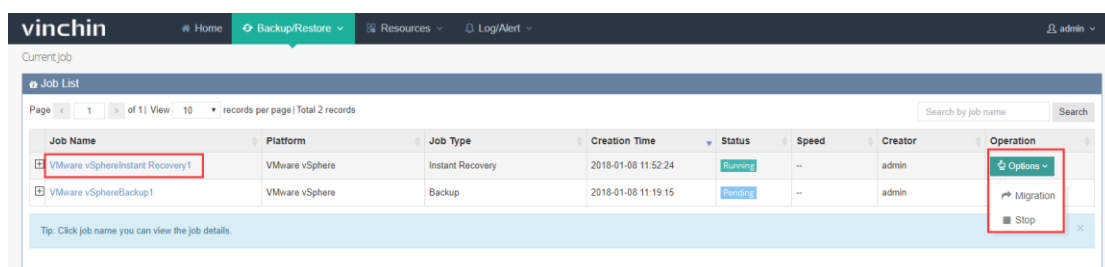

You are coming to the New VM Migration Job page, Select a host where to migrate the VM. Then you can rename the migrated VM and choose to whether power on it after migration, set storage and network for the VM as below:

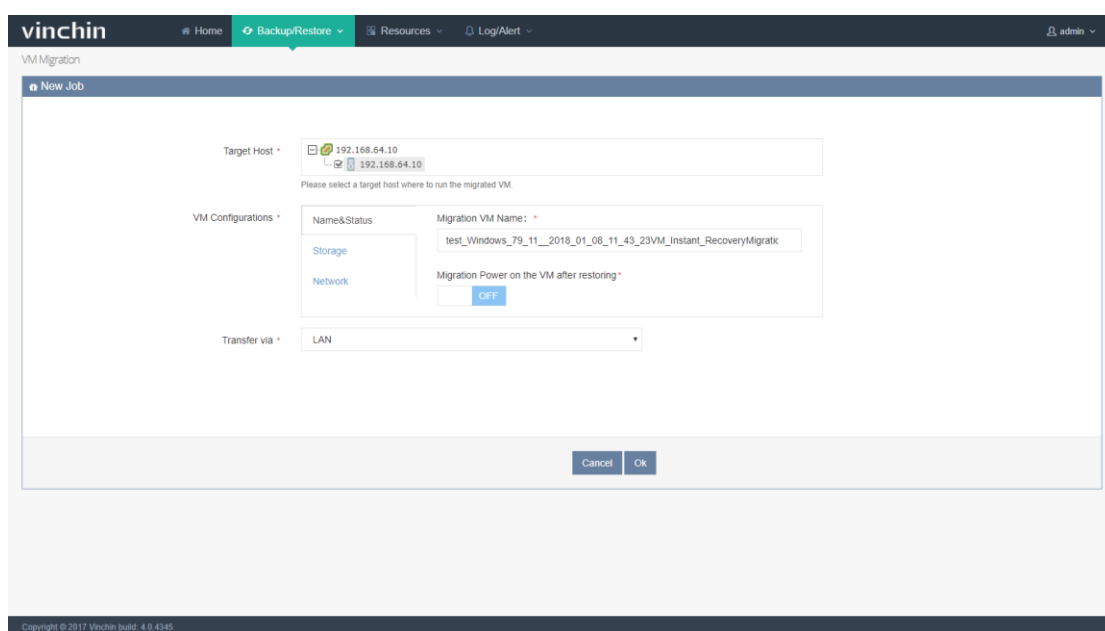

Click **【OK】** to start the migration job. You can view the migration job running details in the previous instant recovery job:

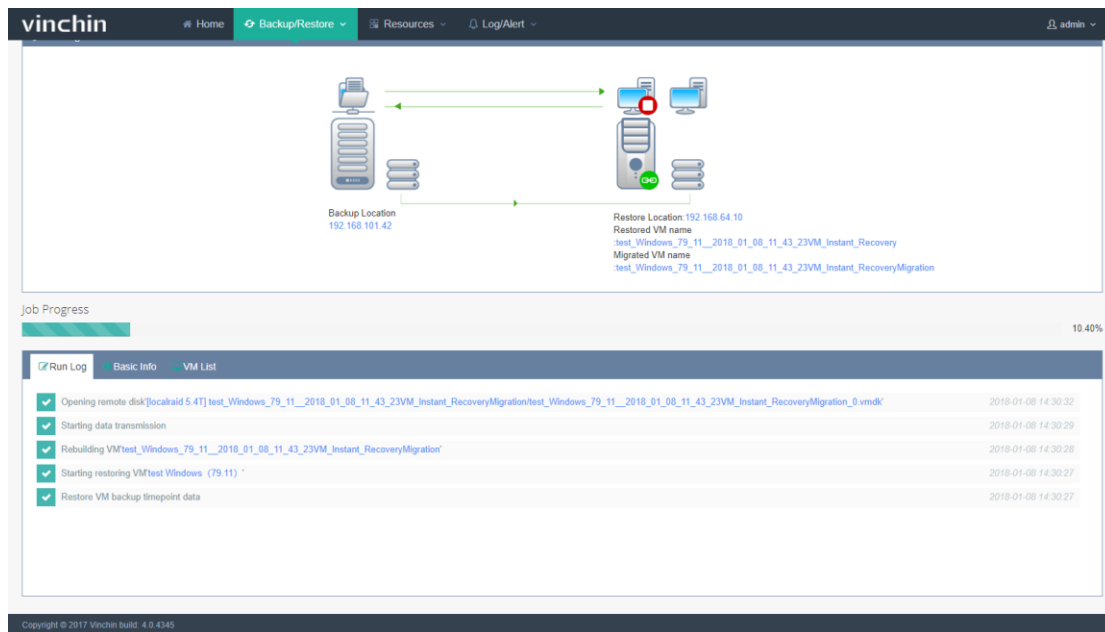

After migration completed, the migration job will automatically change back to **【Instant Recovery Job】** and this job is still in a running status. But the VM in this job is powered off and the business will be taken over by the migrated VM.

Note: You can also use VMware migration function to realize the above operations.


Warning: Do not power on the VM when it is being migrated, otherwise the VM will be damaged.

3.2. Citrix XenServer

3.2.1. Install Backup Plugin

When backing up a XenServer virtual environment, you need to install the XenServer backup plugin in the XenServer hosts.

- a) Download the backup plugin from the Vinchin Backup & Recovery system login page as below:

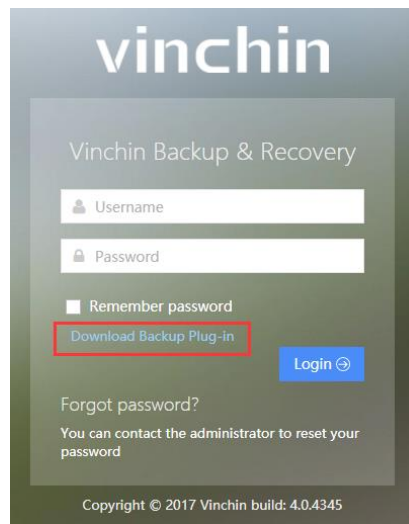

- b) Click "Download Backup Plug-in" → "Citrix XenServer" and your corresponding software version, then click **【Download】** as below:



- c) Copy the downloaded plugin to XenServer host/root directory, and install as below:


```
[root@xenserver-btmehbhc ~]# ls
vxe-backup-agent-4.0-4145.xe.6.5.0.and.7.0.0.x86_64.rpm
[root@xenserver-btmehbhc ~]# rpm -ivh vxe-backup-agent-4.0-4145.xe.6.5.0.and.7.0.0.x86_64.rpm
Preparing...
##### [100%]
Updating / installing...
 1:vxe-backup-agent-4.0-4145.xe.6.5.##### [100%]
Restarting vxe_backup_agent (via systemctl): [ OK ]
iptables: Saving firewall rules to /etc/sysconfig/iptables:[ OK ]
[root@xenserver-btmehbhc ~]#
```

Note: For pool environment, please install the backup plugin in every XenServer host under this pool environment.


3.2.2. VM Backup

3.2.2.1. Authorize Host



Before creating a VM backup job, you need to authorize the target hosts which you need to backup. Click **【Resources】** – **【Virtual Infrastructure】** as below:

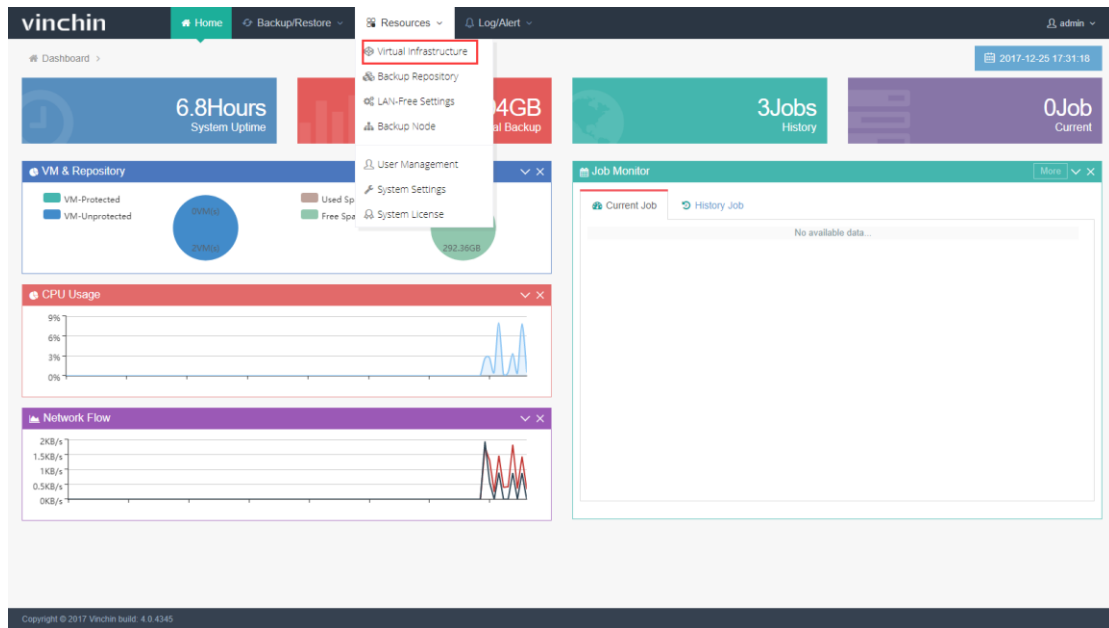

Then you'll see the virtual infrastructure list as below, choose the target virtual infrastructure you want to backup and click **Auth** .

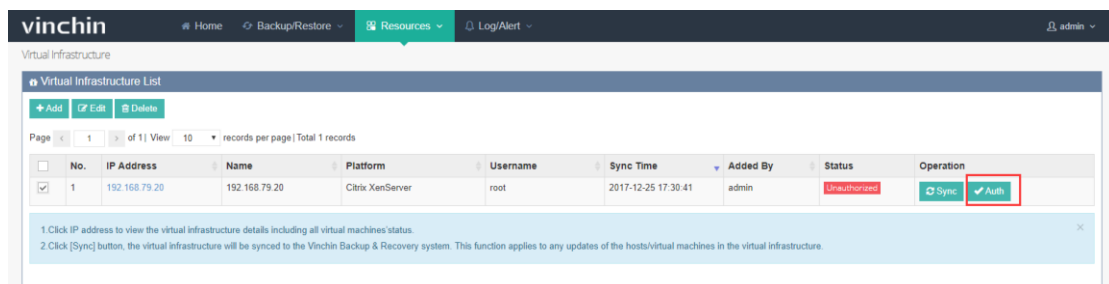

Tick the hosts under this virtual infrastructure you want to backup and click **Authorize** .

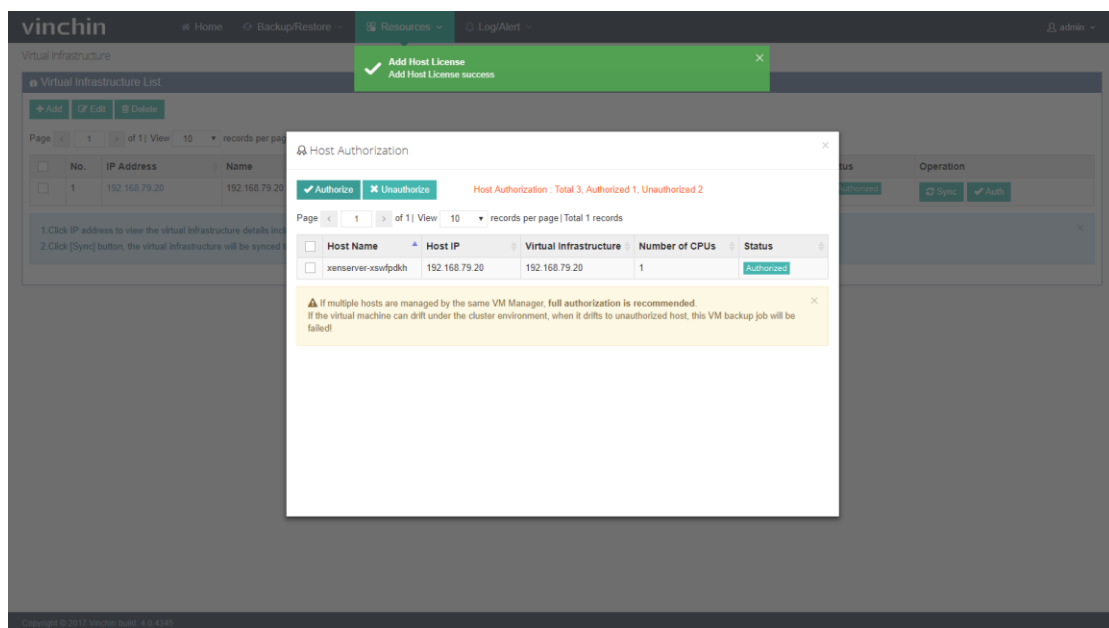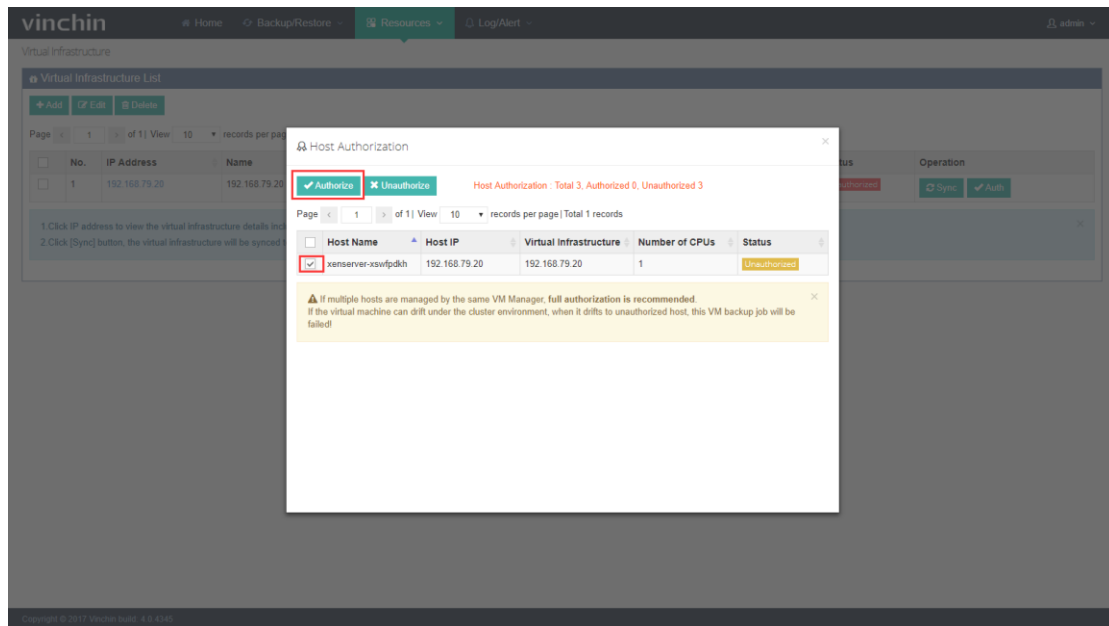

The system will remind you "Authorize the host success".


Note: If there's no server in the virtual infrastructure list, please add a host or virtual cluster first (please refer to Chapter 2.3.1 Add Server)


3.2.2.2. Create Backup Job

3.2.2.2.1. Backup Source


Select the virtual machines you want to backup.

Click【Backup/Restore】 – 【VM Backup】, then you will see the virtualization infrastructure tree, expand the Citrix XenServer infrastructure until you see the virtual machines. Tick any virtual machines you need to backup, they will be showing in the "Selected VM" column. If you want to delete a selected VM, you can click  button in the right column or directly untick this VM as below:

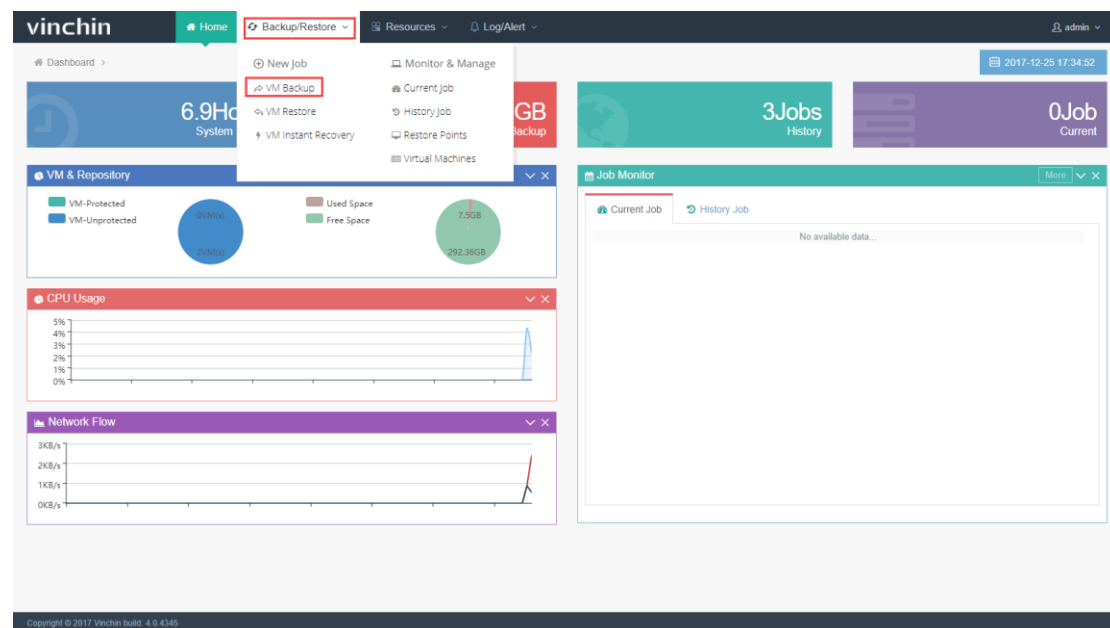

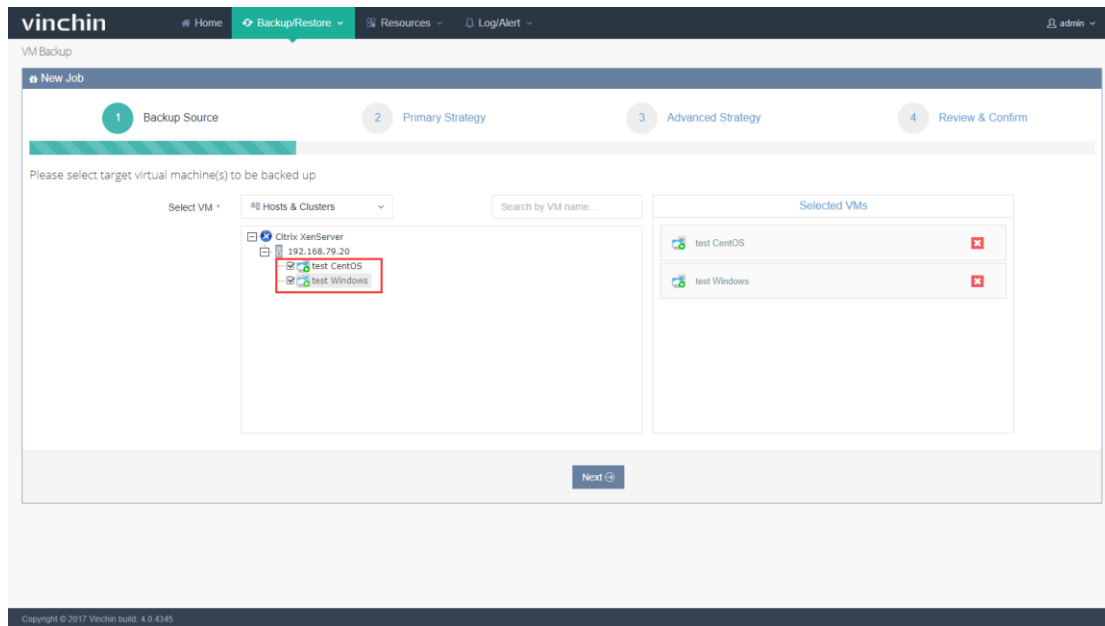


If you know the target VM name, or you know any related key words, you can directly search the VM in the search bar as below:

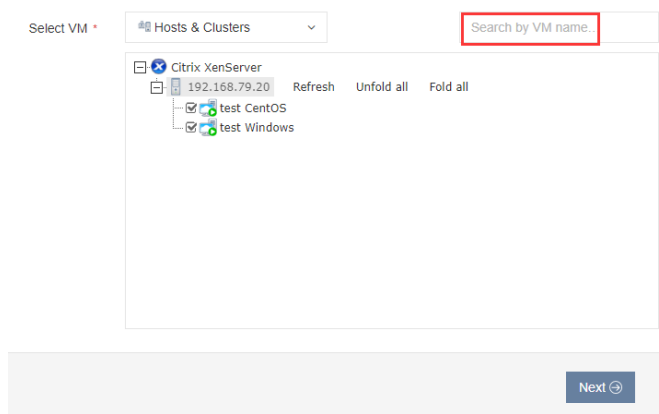


Note: If the VM already exists in the backup job list, it will be highlighted in Green color.


And it is un-selectable.

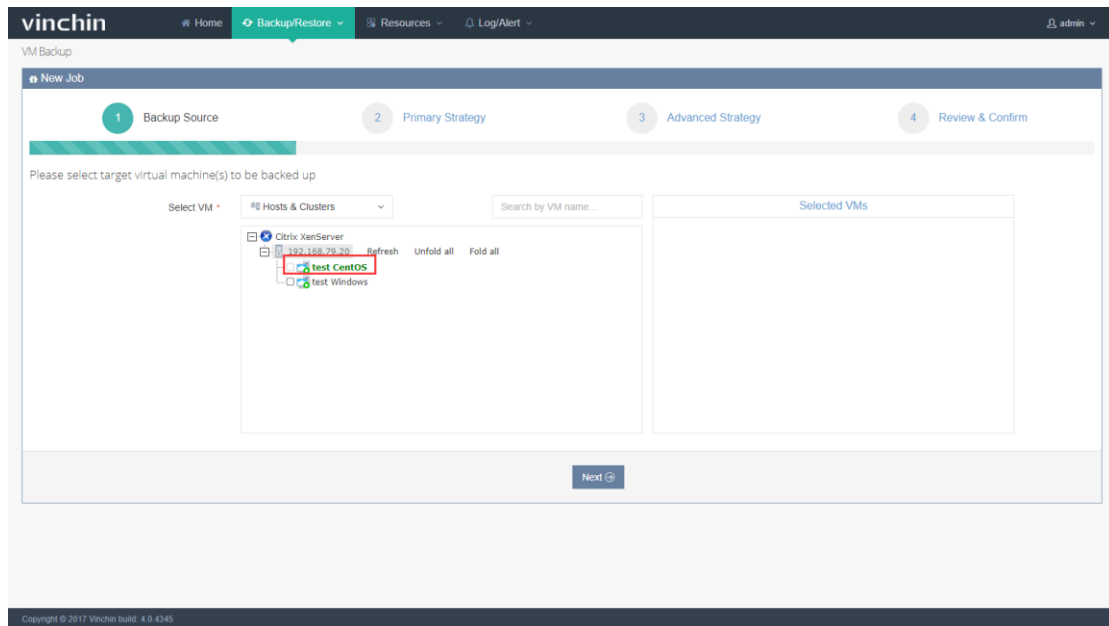


Click the target VM, you can see the virtual disks under this VM, you can choose to backup or exclude any of the disks under this VM without having to backup all the disks on the virtual machine.

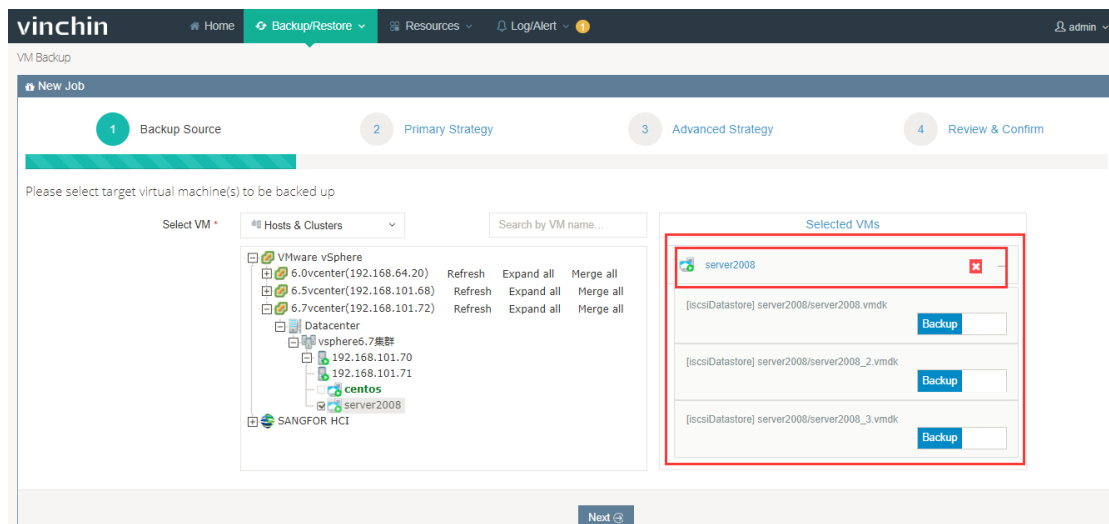

Click **【Next】** once you complete the selection.

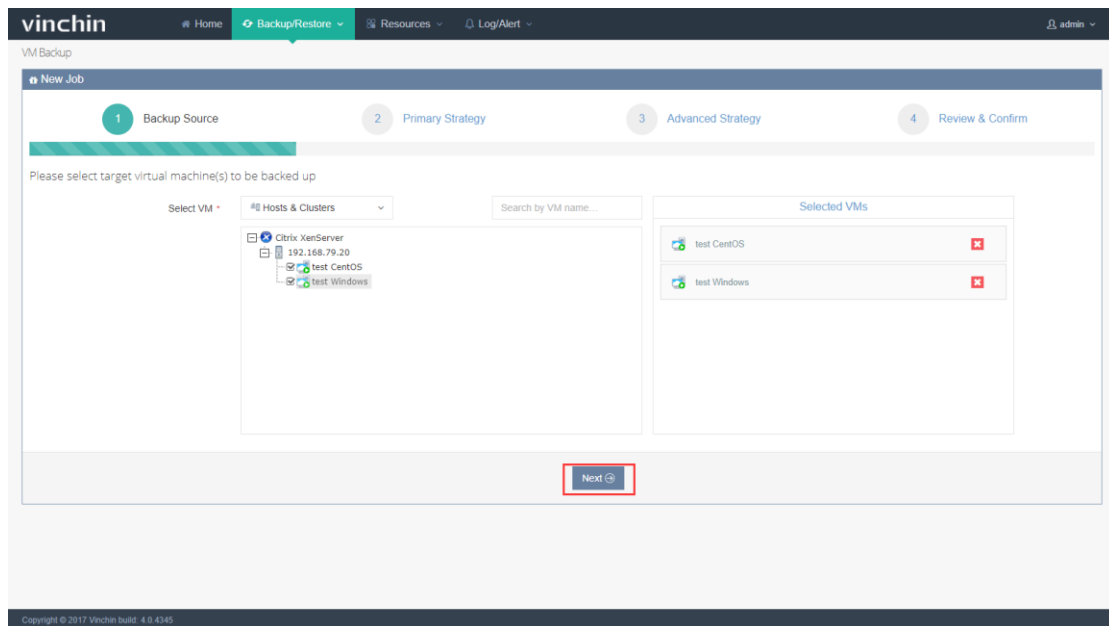

If your Citrix XenServer infrastructure has been updated recently, you can click **【Refresh】** to update and sync the servers to Vinchin Backup & Recovery system as below:

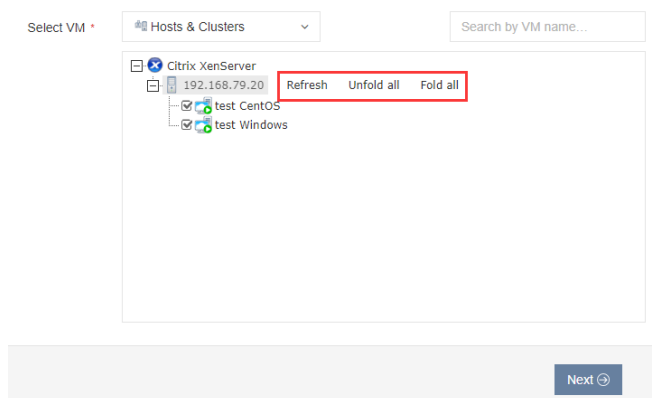


3.2.2.2.2. Primary Strategy

In the Primary Strategy page, there are two backup options available.

3.2.2.2.1.Backup at Once

The backup job only perform one time.

Choose "Backup at once", then click " " to choose YY/MM/DD and HH:MM:SS, then click **【Next】** , the backup job will be performed at the exact time for only once.

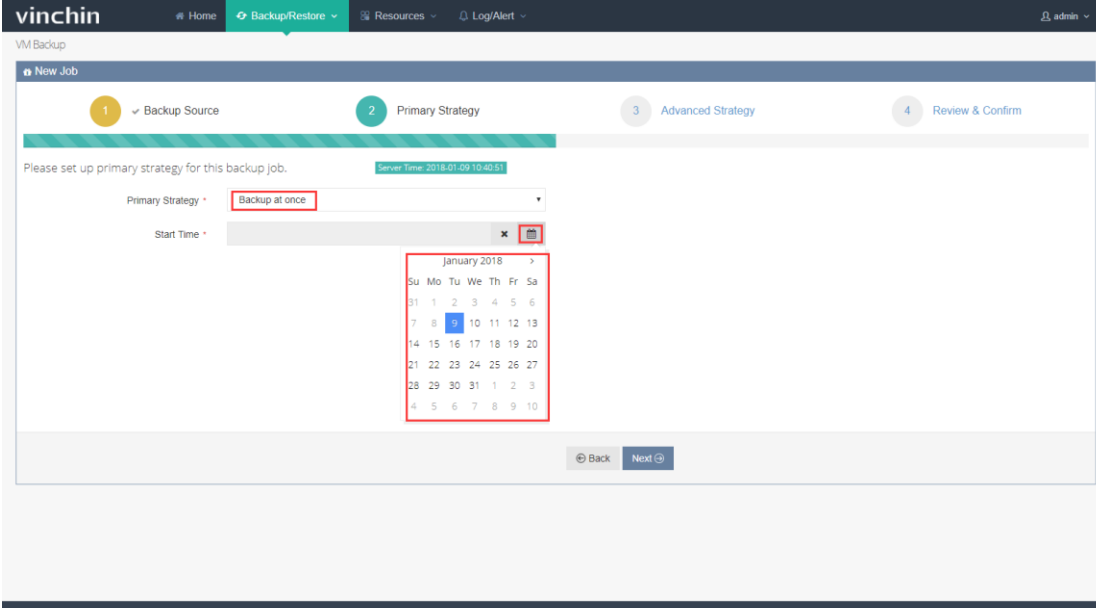

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2018-01-09 10:40:51

Primary Strategy: Backup at once


Start Time: 

January 2018

Su	Mo	Tu	We	Th	Fr	Sa
31	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31	1	2	3
4	5	6	7	8	9	10

Back Next

Copyright © 2018 Vinchin build: 4.0.4387

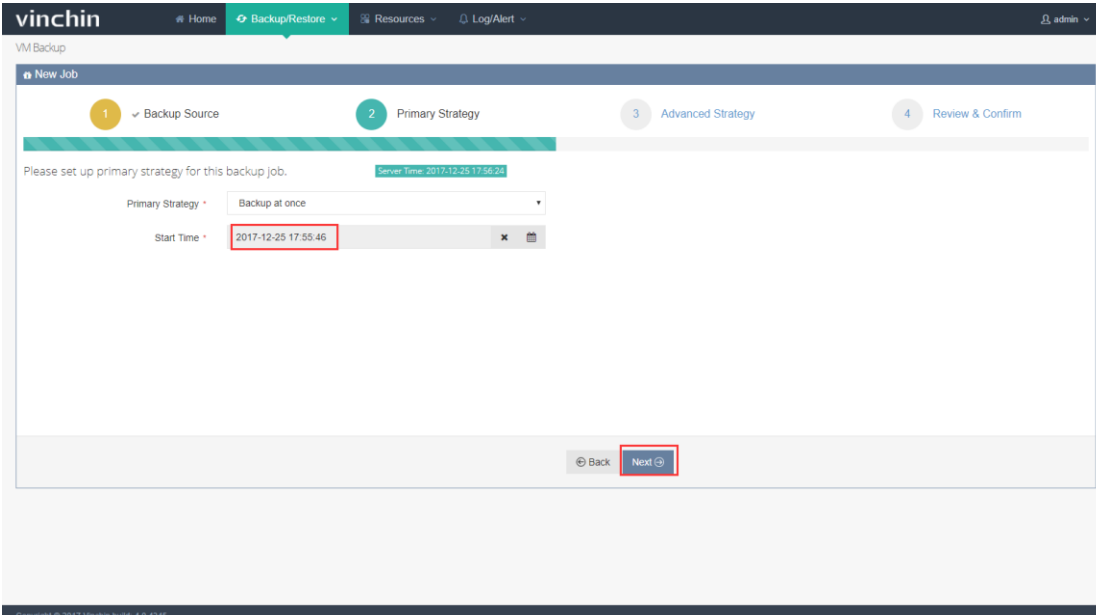

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:56:24

Primary Strategy: Backup at once

Start Time: 2017-12-25 17:55:46

Back Next

Copyright © 2017 Vinchin build: 4.0.4345

3.2.2.2.2. Backup as Scheduled

The backup job repeats as scheduled.

Choose “Backup as scheduled”, then choose a Backup Strategy (Full Backup/Incremental Backup/Differential Backup).

Note: Incremental and Differential cannot be chosen at the same time.

Click the selected strategy bar as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:57:00

Primary Strategy * Backup as scheduled

Schedule * ☒ Full Backup ☐ Incremental Backup ☐ Differential Backup

☒ Full Backup (Every Friday, 23:00:00Start, Unrepeat) +

Back Next

Then you will see there are some schedule options, you can choose to repeat the backup job at any time in any day.

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:58:09

Primary Strategy * Backup as scheduled

Schedule * ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

☒ Full Backup (Every Day 23:00:00Start, Unrepeat)

☒ Every Day ☐ Every Week ☐ Every Month

Start Time 23:00:00

Repeat OFF

☒ Incremental Backup (Every Day 23:00:00Start, Unrepeat) +

Back Next

The time schedule of backup job includes 3 types: Every day, Every Week and Every Month.

- Every Day schedule only needs to set Start Time as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:58:51

Primary Strategy * Backup as scheduled

Schedule * ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

✓ Full Backup (Every Day 23:00:00Start, Unrepeat) +

✓ Incremental Backup (Every Day 23:00:00Start, Unrepeat) -

☒ Every Day Start Time 23:00:00 Repeat OFF

☐ Every Week

☐ Every Month

Back Next

- Every Week schedule needs to choose which days to perform the backup job, details as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:59:26

Primary Strategy * Backup as scheduled

Schedule * ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

✓ Full Backup (Every Day 23:00:00Start, Unrepeat) +

✓ Incremental Backup (Every Monday, Wednesday, Friday, 23:00:00Start, Unrepeat) -

☐ Every Day

☒ Every Week Every Week ☒ Monday ☐ Tuesday ☒ Wednesday ☐ Thursday ☒ Friday ☐ Saturday ☐ Sunday

☐ Every Month

Start Time 23:00:00 Repeat OFF

Back Next

- Every Month schedule is similar with Every Week schedule, needs to choose which days to perform the backup job, details as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:59:55

Primary Strategy: Backup as scheduled

Schedule: ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

Full Backup (Every Day 23:00:00Start, Unrepeat)

Incremental Backup (Every Month Day1, Day15, 23:00:00Start, Unrepeat)

Every Day ☐ Every Week ☐ Every Month ☒

Every Month

☒	1	☐	2	☐	3	☐	4	☐	5	☐	6	☐	7
☐	8	☐	9	☐	10	☐	11	☐	12	☐	13	☐	14
☒	15	☐	16	☐	17	☐	18	☐	19	☐	20	☐	21
☐	22	☐	23	☐	24	☐	25	☐	26	☐	27	☐	28
☐	29	☐	30	☐	31								

Start Time: 23:00:00

Repeat: OFF

Back Next

Set the backup "Start Time" and choose whether to enable the "Repeat".

"Repeat" means repeatedly perform the backup job every xx hours/minutes/seconds.

Once enable the "Repeat" option, you need to set the time of "Repeat Interval" and "Repeat End" accordingly.

(Example: Choose Every Month schedule, and tick day 1 and day 15, set the Start Time as 7:00:00, and enable the "Repeat", Repeat Interval Time 2:00:00 and Repeat End Time 21:00:00. This schedule means on 1st and 15th of each month, this backup job will start running from 7:00am, and it will repeat once every 2 hours until 9:00pm of the day.)

vinchin Home Backup/Restore Resources Log/Alert admin

Primary Strategy Backup as scheduled

Schedule ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

✓ Full Backup (Every Day 23:00:00Start, Unrepeat) +

✓ Incremental Backup (Every Month Day1, Day15, 7:00:00Start, Repeat Interval:2:00:00, Repeat End:21:00:00) -

☐ Every Day ☐ Every Week ☒ Every Month

Every Month ☒ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8 ☐ 9 ☐ 10 ☐ 11 ☐ 12 ☐ 13 ☐ 14 ☒ 15 ☐ 16 ☐ 17 ☐ 18 ☐ 19 ☐ 20 ☐ 21 ☐ 22 ☐ 23 ☐ 24 ☐ 25 ☐ 26 ☐ 27 ☐ 28 ☐ 29 ☐ 30 ☐ 31

Start Time 7:00:00

Repeat ON

Repeat interval 2:00:00

Repeat End 21:00:00

Back Next

Copyright © 2017 Vinchin build: 4.0.4345

After finishing the settings, there will be a green ✓ in front of the schedule, it means the schedule setting is saved. Then click **【Next】**:

vinchin Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 18:01:33

Primary Strategy Backup as scheduled

Schedule ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

✓ Full Backup (Every Day 23:00:00Start, Unrepeat) +

✓ Incremental Backup (Every Day 23:00:00Start, Unrepeat) +

Back Next

Copyright © 2017 Vinchin build: 4.0.4345

Incremental backup is backup the changes made since the last incremental backup.

Differential backup is backup the changes made since the last full backup, every new differential backup relies on the same full backup.

3.2.2.2.3. Advanced Strategy

3.2.2.2.3.1. Backup Location

Select a repository to store the backed up data. You can enable the “auto-select”, then the backup data will be automatically stored to an optimized repository. You can disable the “auto-select” to specify a repository for the backup data.

The screenshot shows the 'vinchin' interface for creating a new backup job. The 'Advanced Strategy' step is selected. The 'Backup Location' tab is active, showing options to enable or disable auto-selection for nodes and repositories. The 'Node Auto-select' and 'Repository Auto-select' are currently disabled. The 'User-defined' fields show the selected node and repository details. The 'Back' and 'Next' buttons are visible at the bottom of the form.

1. If you have added multiple backup nodes as alternative backup repository, you need to select one node first. Click the blue button to disable the “Node Auto-Select”, select one available node as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off ⓘ

User-defined localhost.localdomain(192.168.101.42) ▼

Repository Auto-select ☒ On ⓘ

Back Next

- If you prefer to specify a backup repository under this node, disable the “Repository Auto-Select” and specify a selectable repository for this backup job.

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off ⓘ

User-defined localhost.localdomain(192.168.101.42) ▼

Repository Auto-select ☐ Off ⓘ

User-defined Local Disk1(Local Disk, Capacity :299.85GB, Free Space:299.82GB) ▼

Back Next

- If you prefer to let the system select the optimized repository, keep the “Node Auto-Select” or/and “Repository Auto-Select” enabled.

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☒ On

Back Next

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off

User-defined localhost.localdomain(192.168.101.42)

Repository Auto-select ☒ On

Back Next

3.2.2.2.3.2. Deduplication & Compression

Choose to enable/disable data deduplication, data compression and data block size.

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Data Deduplication ☐ Off

Compression ☒ On


Back Next

Copyright © 2017 Vinchin build: 4.0-4349

- Data Deduplication: Enable it to delete the duplicated data, can reduce the total backup size.
- Data Compression: Enable it to compress the backup data size, can reduce the total backup size.

3.2.2.2.3.3. Transmission Network

Click **【Transmission Network】** , you can choose to enable the **【Data Encryption】** , the backed up data will be encrypted during transferring from the backup source to backup repository.

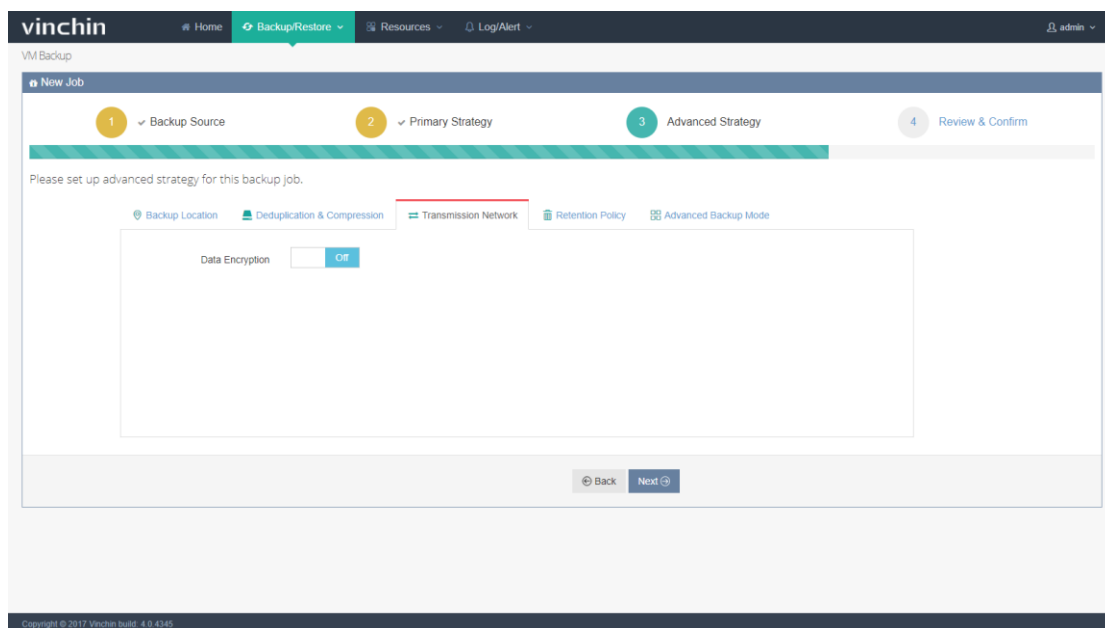

Note: If you have pre-set up LAN-Free, backup/restore data will be transferred via SAN(LAN-Free) automatically. If you haven't set up any LAN-Free, you can refer to chapter 2.4 to set up the LAN-Free first.


3.2.2.2.3.4. Retention Policy

Backup retention policy is a policy to reserve backup data on disk according to number of days/restore points. Old restore points out of date/over range will be auto-deleted.


For Citrix XenServer, the retention policy is based on full backup time points. It will lead a deletion of the furthest full backup point together with its corresponding incremental or differential backup points when a new full backup point is generated.

Retention Policy includes “Number of Restore Points” and “Number of Days”, details as below:

Number of Restore Points: Restore points will be reserved according to number limitation.

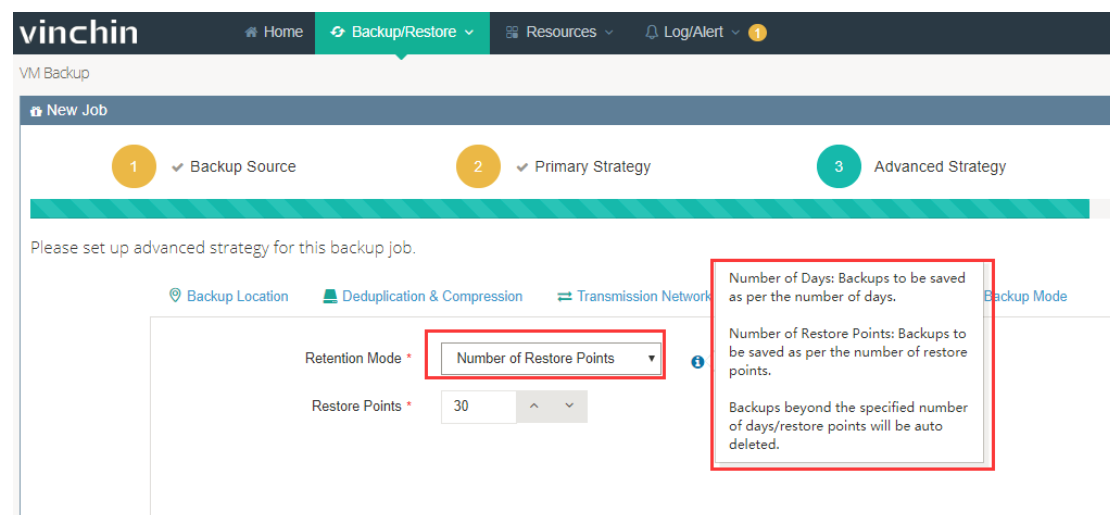


Number of Days: Restore points will be reserved according to days limitation.

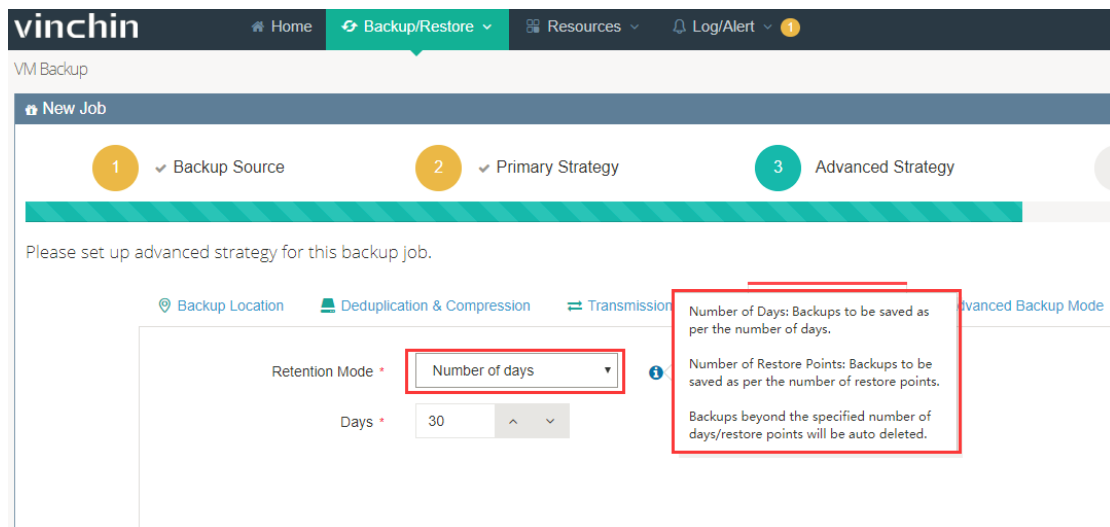

3.2.2.2.3.5. Advanced Backup Mode

1) Standard Snapshot (Serial snapshot / parallel snapshot)

- ✓ Serial snapshot: taking snapshot of each VM in turn and complete transfer in turn.
- ✓ Parallel snapshot: taking snapshot of all VMs concurrently and complete transfer in turn. It is necessarily to be chosen when there's business relationship between the VMs or backup time consistency is required of all the VMs.

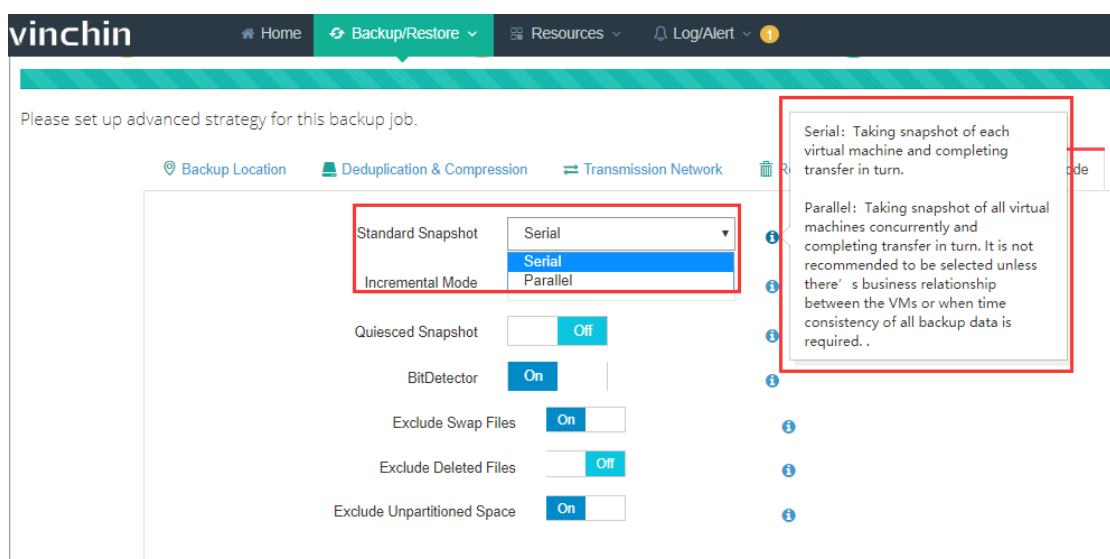

2) Incremental Mode: SpeedKit / CBT / Ordinary

- ✓ SpeedKit is a Vinchin developed technology to improve the computing speed of changed data when doing an incremental backup. Choose "SpeedKit" can help to improve backup efficiency and in case CBT does not work.


Note: Choosing "SpeedKit", the system will keep one snapshot for each VM in the backup storage when doing incremental backup everytime, so you must make sure your backup storage space is sufficient.

- ✓ CBT (Changed Block Tracking) is the underlying support technology for XenServer to implement "incremental backup". Choose "CBT" can help to improve the incremental backup speed.

Note: CBT is only available on XenServer 7.3 and above version.

- ✓ Choosing "Ordinary" will take more time to do backup especially when you have a large numbers of VMs to protect.

Note: virtual machine version 7 and above shall support.

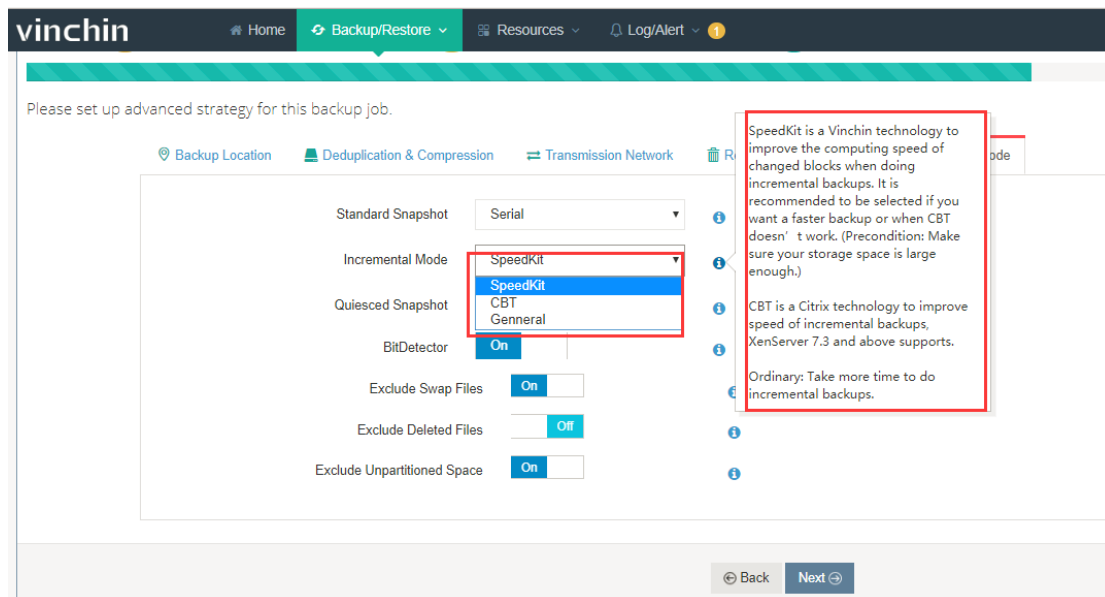

3) Quiesced Snapshot

For Citrix XenServer, "Quiesced Snapshot" is a technology to keep file systems or applications on the VM in a consistent state via application-awareness processing (XenServer tools) before the VM snapshot is created. Applications on Windows OS are required to support Microsoft VSS. If failed to take quiesced snapshot, system will take standard snapshot.

Please install XenServer tools before enabling the "Quiesced Snapshot".

Please set up advanced strategy for this backup job.

Backup Location | Deduplication & Compression | Transmission Network | Retention Policy | **Advanced Backup Mode**

Standard Snapshot: Serial

Incremental Mode: SpeedKit

Quiesced Snapshot: Off

BitDetector: On

Exclude Swap Files: On

Exclude Deleted Files: Off

Exclude Unpartitioned Space: On

By enabling "Quiesced Snapshot" to keep file systems or applications on the VM in a consistent state via application-awareness processing (e.g. VMware Tools) before taking the VM snapshot.

Applications on Windows OS are required to support Microsoft VSS.

If failed to take the quiesced snapshot, system will take standard snapshot.

Back Next

4) BitDetector

BitDetector is a vinchin technology to improve backup efficiency and save backup storage space.

Enabling "BitDetector" you can choose not to backup those swap files, deleted files and unpartitioned space which might be useless or unnecessary data for you.

Please set up advanced strategy for this backup job.

Backup Source | Primary Strategy | **Advanced Strategy**

Backup Location | Deduplication & Compression | Transmission Network | Retention Policy | **Advanced Backup Mode**

Standard Snapshot: Serial

Quiesced Snapshot: Off

CBT: On

BitDetector: On

Exclude Swap Files: On

Exclude Deleted Files: Off

Exclude Unpartitioned Space: On

Back Next

3.2.2.2.4. Review & Confirm

After finish, you are able to review and confirm the settings. Click **【Submit】** if confirm, the backup job creation will be completed.

The screenshot displays the 'New Job' configuration page in the Vinchin Backup/Restore application. The interface is divided into four steps: 1. Backup Source, 2. Primary Strategy, 3. Advanced Strategy, and 4. Review & Confirm. The 'Review & Confirm' step is active, showing a summary of the configured settings. At the top, there is a 'Job Name' field with the value 'Citrix XenServerBackup1' and a note 'Default job name could be modified.' Below this, the settings are organized into sections: 'Backup Source' (listing 'xenserver-xswf/pd/h/test CentOS', 'xenserver-xswf/pd/h/test Windows', and 'Citrix XenServer Backup'), 'Primary Strategy' (showing 'Backup as scheduled' and 'Backup Schedule' with 'Full Backup (Every Day 23:00:00Start, Unrepeat)' and 'Incremental Backup (Every Day 23:00:00Start, Unrepeat)'), and 'Advanced Strategy' (showing 'Backup Location' with 'User-defined: localhost.localdomain(192.168.101.42)' and 'User-defined: Local Disk1(Local Disk, Capacity: 299.95GB, Free Space 291.67GB)', 'Deduplication & Compression' with 'Data Deduplication: OFF' and 'Compression: ON', 'Transmission Network' with 'Data Encryption: OFF', 'Retention Policy' with 'Days retention.Retention value is 30', and 'Advanced Backup Mode' with 'Speed-up Backup: ON VM Quiescence: OFF'). At the bottom right, there are 'Back' and 'Submit' buttons.

Please review and confirm your configurations.

Job Name :
Default job name could be modified.

Backup Source

Backup Source :
xenserver-xswf/pd/h/test CentOS
xenserver-xswf/pd/h/test Windows
Citrix XenServer Backup

Primary Strategy

Primary Strategy :
Backup as scheduled
Backup Schedule :
Full Backup (Every Day 23:00:00Start, Unrepeat)
Incremental Backup (Every Day 23:00:00Start, Unrepeat)

Advanced Strategy

Backup Location :
User-defined : localhost.localdomain(192.168.101.42)
User-defined : Local Disk1(Local Disk, Capacity: 299.95GB, Free Space 291.67GB)

Deduplication & Compression :
Data Deduplication : OFF
Compression : ON

Transmission Network:
Data Encryption : OFF

Retention Policy :
Days retention.Retention value is 30

Advanced Backup Mode :
Speed-up Backup : ON VM Quiescence: OFF


[Back](#) [Submit](#)

Copyright © 2017 Vinchin build: 4.0.4345


Note: You can change the Job name before submitting.

3.2.2.3. Perform Backup Job


After creating a new backup job, you will see this job in the "Current Job List" as below:

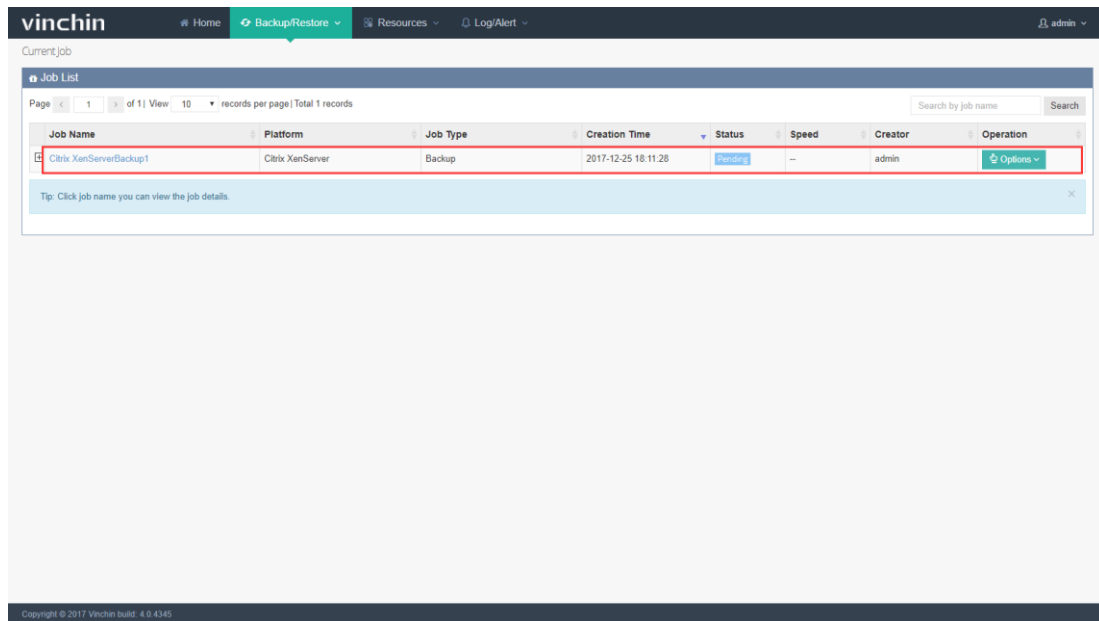

Click " + ", you can review the backup schedules of this job as below:

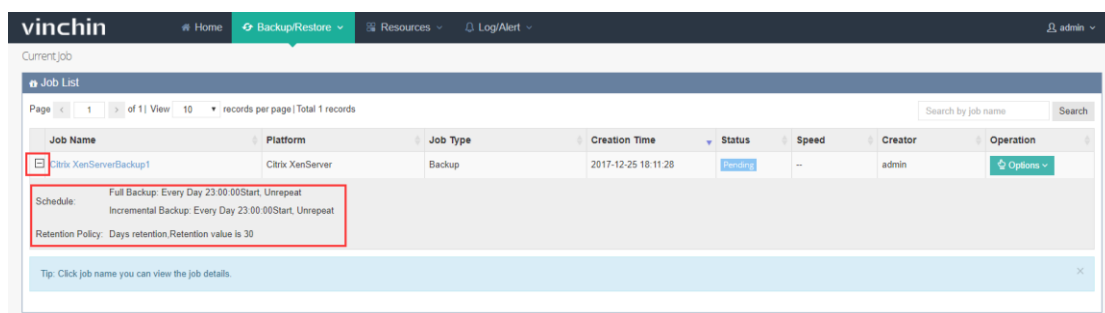


Click **Options** , you will see operation options including Activate Incr.(Incremental Backup), Activate Diff.(Differential Backup), Activate Full(Full Backup) and Stop. Choose one option to start or stop the backup job.

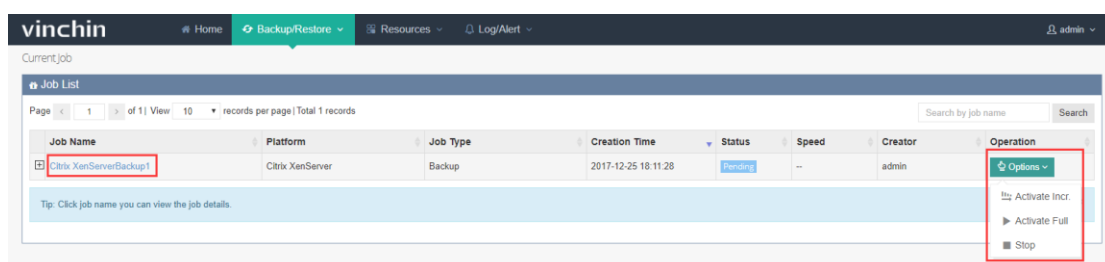


Note: If you choose incremental backup or differential backup, the backup job will


automatically change to full backup when the first time you perform it. After then the backup jobs will be repeated time by time as scheduled.

If you want to stop this backup job, click **【Stop】** button. After stopped, if you want to re-activate this backup job, you can click **【Options】** → **【Enable Schedule】** to backup as scheduled if necessary or Activate, edit, delete the backup job according to your demands.

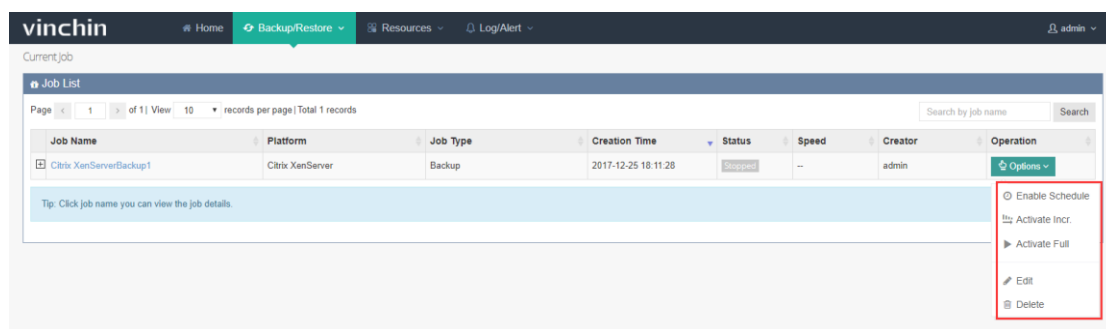


When the job in a running status, click the job name, you will see the job running details page as below:

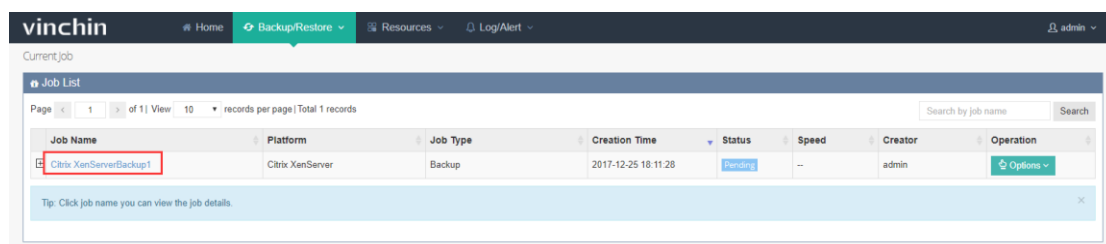

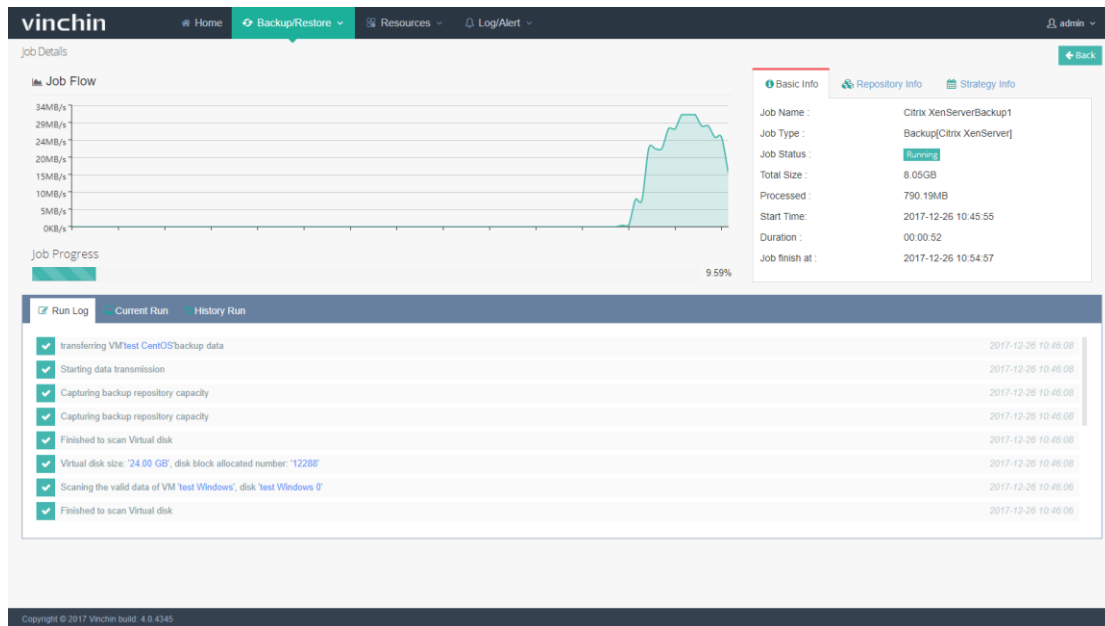

On the top right are 3 main columns showing the job configuration info as below:

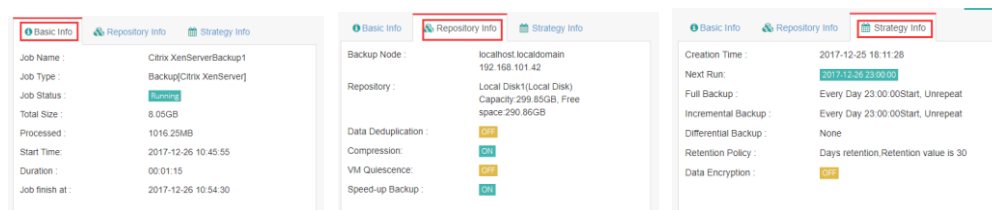

On the bottom left are another 3 main columns showing Run Log, Current Run and history Run.



Job Logs: Records the current backup job running logs.

Run Log Current Run History Run									
No.	VM Name	Job Type	Total	Processed	Backed up	Speed	Progress	Status	Description
1	test CentOS	FullBackup	1.29GB	1.29GB	699.01MB	--	100%	Finished	
2	test Windows	FullBackup	6.76GB	2.07GB	1.18GB	21.61MB/s	30.57%	Running	

Current Run: Shows all the virtual machines under the current backup job. Details include VM Name, Backup Type (Full Backup/Incremental Backup/Differential Backup), VM Size (VM valid data size), Processed Size (The size that Vinchin Backup & Recovery system has processed), Backup Size (The real size that has been stored to the backup repository) , Processing Rate, Progress, Status etc.

Run Log Current Run History Run							
Page 1 of 1 View 10 records per page Total 3 records							
No.	Job Type	Status	Total	Processed	Backed up	Start Time	End Time
1	IncrementalBackup	Success	2MB	2MB	532.96KB	2017-12-26 10:54:46	2017-12-26 10:55:10
2	IncrementalBackup	Success	4MB	4MB	1.13MB	2017-12-26 10:54:09	2017-12-26 10:54:33
3	FullBackup	Success	8.05GB	8.05GB	4.39GB	2017-12-26 10:45:55	2017-12-26 10:53:57

History: Reviews all the history operations of this backup job, details including backup type, status, backed up size, backup start time & end time etc.

Note:

- If the backup job has been set as "Backup at once", after job running finished, you can find it in the History Job list.
- If the backup job has been set as "Backup as scheduled", the job will remain in the Current Job list and continue backup job as scheduled.
- Once enable "Deduplication & Compression" when creating backup job, the

"Backed up" size will be smaller.


3.2.3. VM Restore

3.2.3.1. Create Restore Job

3.2.3.1.1. Restore Point


Click **【Backup/Restore】** - **【VM Restore】**, you are coming to the restore job creating page.

Select a target VM restore point under the Citrix XenServer which you want to restore as below. You can quickly find the target restore point by specifying backup node and selecting "Group by VMs" or "Group by Restore Points" accordingly.

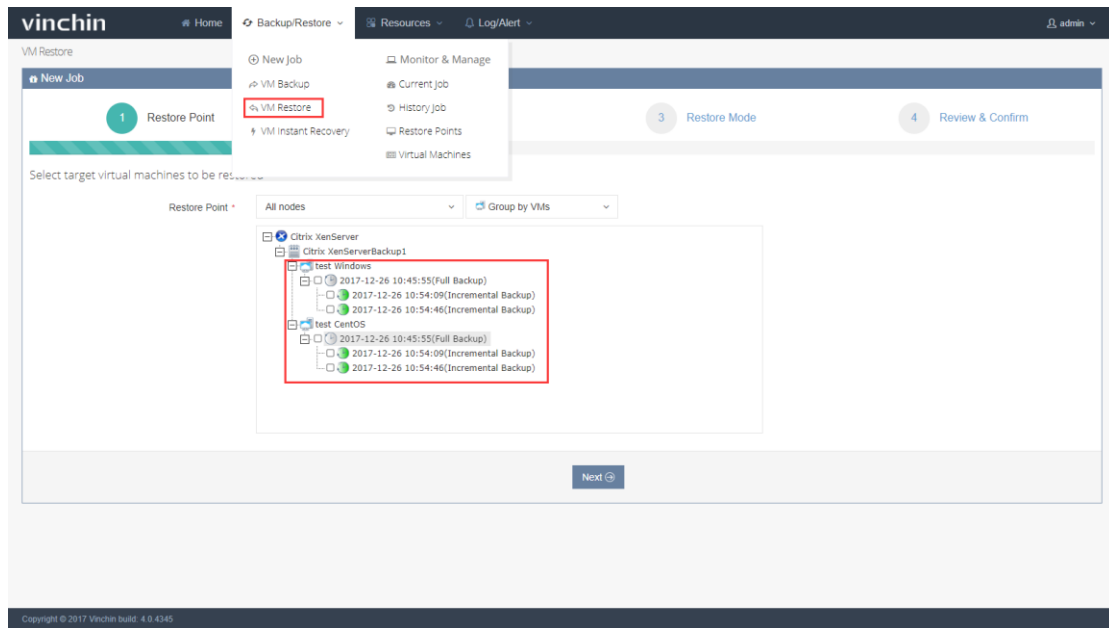

- A Restore Point has been marked with the name of a backup job. Each backup job name has displayed the backup time point and backup type (full backup/incremental backup/differential backup) for users to recognize and select.

Choose one restore point under each virtual machine, click **Next** as below:

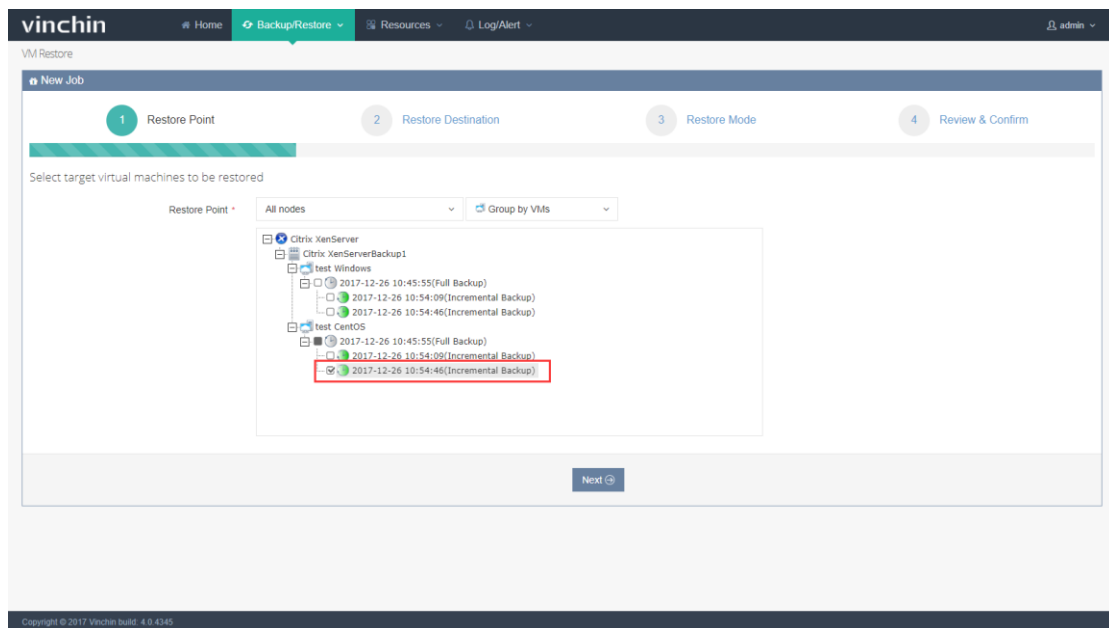


Note: You can choose multiple virtual machines to restore at the same time. If one virtual

machine has multiple restore points, you can only choose one point to restore at once.

3.2.3.1.2. Restore Destination

- 1) Select Target Host: Select a target host where you want to run the restored VMs as below:

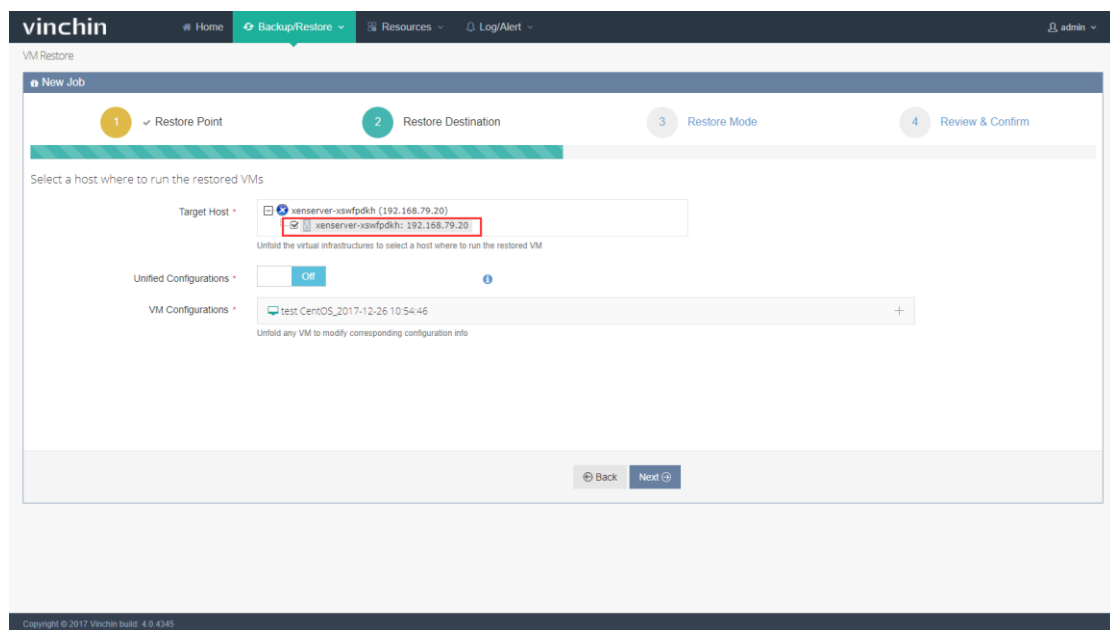

After restored, the VMs will run on the selected host.

- 2) Unified Configurations: Enable this function you can set multiple VMs' storage, network information, and choose whether to power on the target VM(s) after restoring as below:

The screenshot shows the 'VM Restore' interface in the Vinchin web console. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The 'Backup/Restore' section is active. The 'New Job' section shows a progress bar with four steps: 1. Restore Point (active), 2. Restore Destination, 3. Restore Mode, and 4. Review & Confirm. Below the progress bar, the instruction 'Select a host where to run the restored VMs' is displayed. The 'Target Host' field shows two options: 'xenserver-xswfpdkh (192.168.79.20)' and 'xenserver-xswfpdkh: 192.168.79.20'. Below this, a red box highlights the 'Unified Configurations' section, which includes a toggle for 'On', a dropdown for 'Restore to' (set to 'Auto-select'), a dropdown for 'Connect to' (set to 'Auto-select'), and a toggle for 'Power on target VM after restoring' (set to 'OFF'). Below the red box, the 'VM Configurations' section shows a list of VMs, including 'test CentOS_2017-12-26 10:54:46'. At the bottom, there are 'Back' and 'Next' buttons.

3) Single VM Configurations: Select a target VM, you can rename it and pre-set its storage, network information details as below:

The screenshot shows the 'VM Configurations' dialog box for a specific VM. The title bar reads 'VM Configurations *'. The main content area is divided into two sections. The left section, titled 'Name&Status', has a sidebar with 'Storage' and 'Network' options. The right section, titled 'Restored VM Name: *', contains a text input field with the value 'test_CentOS_2017_12_26_10_54_46'. Below this, there is a toggle for 'Power on the VM after restoring *' set to 'OFF'. At the bottom, there is a note: 'Unfold any VM to modify corresponding configuration info'.

Note: When renaming the VM, make sure there's no special characters. Any combination of letters, numbers and underscore characters are recommended.

VM Configurations * test CentOS_2017-12-26 10:54:46

Name&Status

Storage

Network

VM Disk	Total Size	Restore To
test CentOS 0	10GB	Auto-select

Unfold any VM to modify corresponding configuration info

Note: If choose Auto-select in the "Storage", the system will automatically choose the biggest storage space. If all the storages are out of free space, the restore job will fail, and system will remind insufficient space.

vinchin Home Backup/Restore Resources Log/Alert admin

host.66.com
host.67.com
192.168.101.69(Unauthorized)
192.168.64.207(Unauthorized)
6.7vcenter(192.168.101.72)
192.168.101.70
192.168.101.71

Expand the virtual infrastructures to select a host where to run the restored VM

Unified Configurations * Off

VM Configurations * centos7_3_2123_2018-06-04 11:04:50

Name&Status

Storage

Network

Disk selected	VM Disk	Total Size	Restore To	Disk Type Settings
☒	[iscsi_200GB] centos7_3_2123/centos7_3_2123_0.vmdk	8GB	Aut	Same as sr
☐	[iscsi_200GB] centos7_3_2123/centos7_3_2123_1.vmdk	2GB	Aut	Same as sr

Expand any VM to modify corresponding configuration info

Back Next

When a virtual machine has multiple disks, you can choose individual disks to restore without having to restore all the disks on the virtual machine by click [v].

You can also choose where to connect the VM network interface to after restoring.

VM Configurations * test CentOS_2017-12-26 10:54:46

Name&Status

Storage

Network

VM Network Interface	MAC Address	Remain MAC	Connect To
0	fe:b5:a8:35:8c:c5	☐	Auto-select

Unfold any VM to modify corresponding configuration info

3.2.3.1.3. Restore Strategy

Choose “Restore at once” or Restore as scheduled” as below:

The screenshot shows the 'New Job' form for VM Restore, specifically Step 3: Restore Mode. The progress bar indicates the current step. The 'Restore Mode' dropdown menu is highlighted with a red box and set to 'Restore at once'. The 'Back' and 'Next' buttons are visible at the bottom.

VM Restore

New Job

1 Restore Point 2 Restore Destination 3 Restore Mode 4 Review & Confirm

Set up restore strategies for the restore job

Restore Mode * Restore at once

Back Next

Copyright © 2017 Vinchin build: 4.0-4345

If choosing “Restore at once”, the restore job will start running after created.

If choosing “Restore as scheduled”, you need to set restore schedules as below. After done, the job will run as scheduled.

The screenshot shows the 'New Job' form for VM Restore, specifically Step 3: Restore Mode. The 'Restore Mode' dropdown menu is highlighted with a red box and set to 'Restore as scheduled'. Below it, the 'Schedule' section is expanded, showing a 'Restore Strategy (Every Friday, 23:00:00 Start, Unrepeat)'. The 'Every Week' radio button is selected, and the 'Friday' checkbox is checked. The 'Start Time' is set to 23:00:00, and the 'Repeat' option is set to 'OFF'. The 'Back' and 'Next' buttons are visible at the bottom.

VM Restore

New Job

1 Restore Point 2 Restore Destination 3 Restore Mode 4 Review & Confirm

Set up restore strategies for the restore job

Restore Mode * Restore as scheduled

Schedule * Restore Strategy (Every Friday, 23:00:00 Start, Unrepeat)

Every Day Every Week Every Month

Every Week

Monday Tuesday Wednesday Thursday Friday

Saturday Sunday

Start Time 23:00:00

Repeat OFF

Back Next

Copyright © 2017 Vinchin build: 4.0-4345

Note: Restore as schedule is not recommended if no special circumstances, because restoring too many VMs will occupy productive resources.

3.2.3.1.4. Review & Confirm

After finish, you are able to review and confirm the settings. Click **【Submit】** if correct, the restore job creation will be completed.


The screenshot shows the 'Review & Confirm' step of the VM Restore process in the Vinchin interface. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The 'New Job' section shows a progress bar with four steps: 1. Restore Point, 2. Restore Destination, 3. Restore Mode, and 4. Review & Confirm (the current step). Below the progress bar, a message says 'Please review and confirm your configurations.' The 'Job Name' field is 'Citrix XenServerRestore1' with a note 'Default job name could be modified.' The 'Restore Point' section shows 'Restore point info: Citrix XenServerRestore xenserver-xswfcdh/test CentOS(2017-12-26 10:54:46)'. The 'Restore Destination' section shows 'Restore Destination: Restore to xenserver-xswfcdh (192.168.79.20) -> xenserver-xswfcdh: 192.168.79.20' and 'The restored VMs names are: test_CentOS_2017_12_26_10_54_46'. The 'Restore Mode' section shows 'Restore Mode: Restore as scheduled - Restore Strategy (Every Friday, 23:00:00Start, Unrepeat)'. At the bottom, there are 'Back' and 'Submit' buttons. The footer indicates 'Copyright © 2017 Vinchin build: 4.0.4345'.

Note:

- You can rename the restore job.
- Make sure all the settings are correct before submitting.
- If you have chosen "Restore at once", the restore job will start running once you submit the job.

3.2.3.2. Perform Restore Job

After creating a new restore job, you will see this job in the “Current Job List” as below:

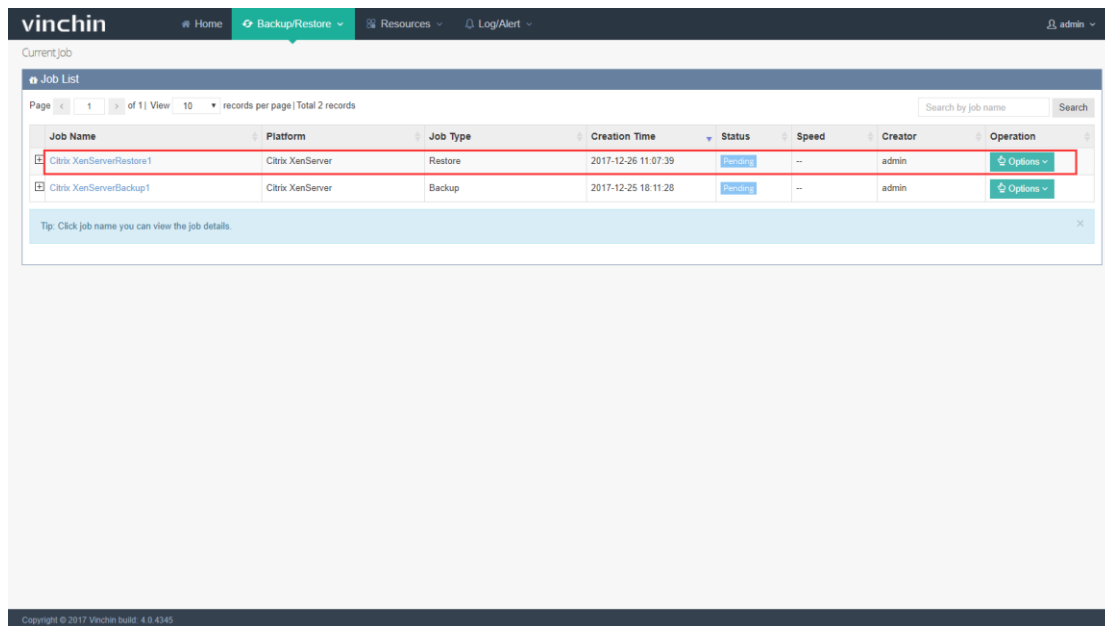


The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The 'Current Job List' section displays a table with the following data:

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Citrix XenServerRestore1	Citrix XenServer	Restore	2017-12-26 11:07:39	Pending	--	admin	Options
Citrix XenServerBackup1	Citrix XenServer	Backup	2017-12-25 18:11:28	Pending	--	admin	Options

A tip at the bottom states: "Click job name you can view the job details."

Click “+”, you can review the restore schedules of this job as below (if you have set “Restore as scheduled”) :

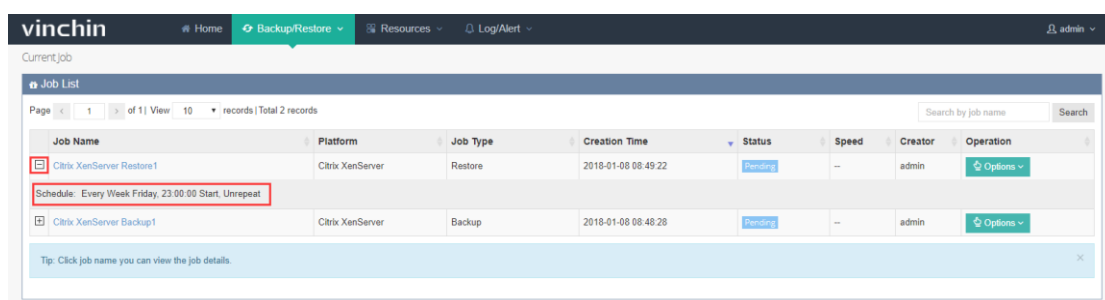


The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The 'Current Job List' section displays a table with the following data:


Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Citrix XenServerRestore1	Citrix XenServer	Restore	2018-01-08 08:49:22	Pending	--	admin	Options
Schedule: Every Week Friday, 23:00:00 Start, Unrepeat							
Citrix XenServerBackup1	Citrix XenServer	Backup	2018-01-08 08:48:28	Pending	--	admin	Options

A tip at the bottom states: "Click job name you can view the job details."


Click 【Options】 - 【Activate job】 to start the restore job.

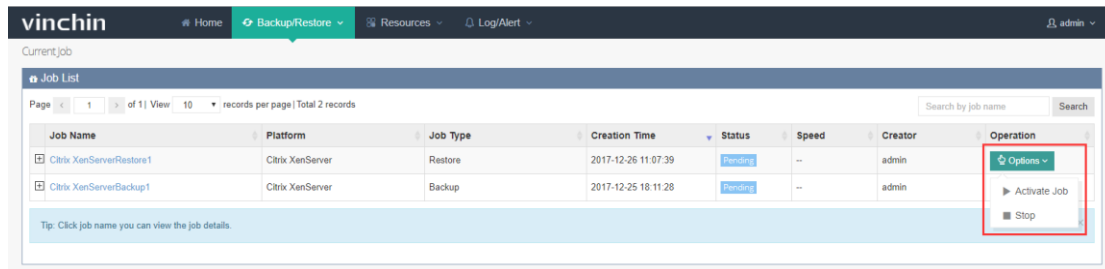


If you want to stop this restore job, click **Stop** button. Click **Options** again, you can activate or delete this job as you want.

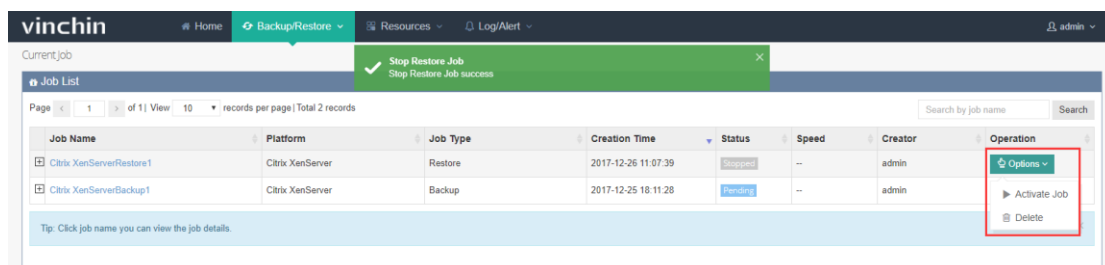

Click the job name, you will see the job details page as below:

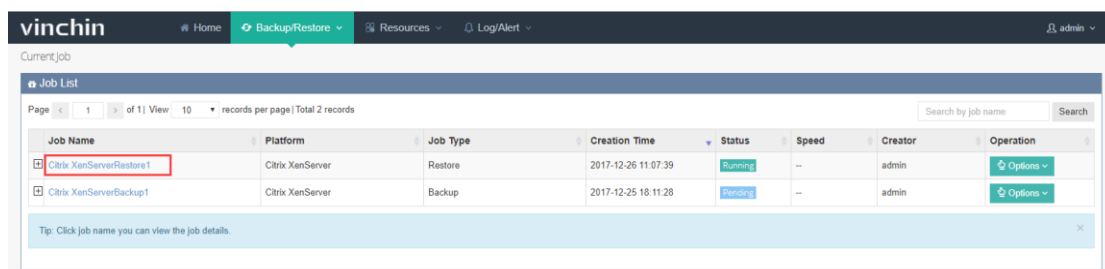

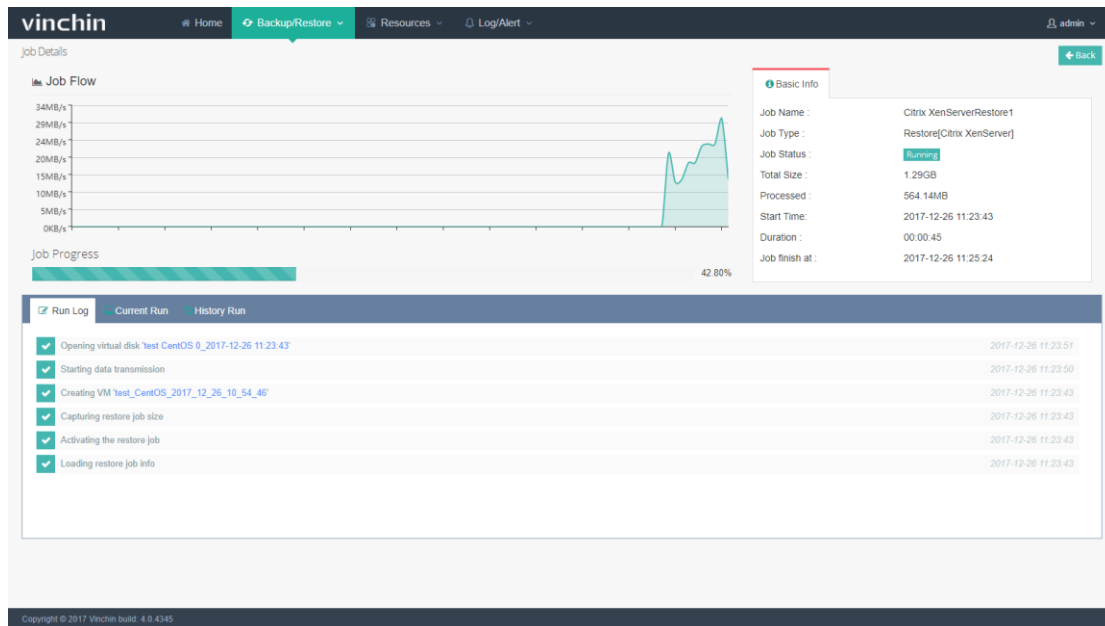

Job Logs: Records the current restore job running progress.

No.	VM Name	Job Type	Total	Processed	Recovered	Speed	Progress	Status	Description
1	test CentOS	Restore	1.29GB	812.2MB	812.2MB	24.81MB/s	61.62%	Running	

Current Run: Shows the current job details including VM Name, Job Type (Restore), Total (VM total size), Processed (Processed size), Recovered (The real size that has been restored) , Speed(Data transfer speed), Progress(Job running progress), Status etc.

No.	Job Type	Status	Total	Processed	Recovered	Start Time	End Time
1	Restore	Success	1.29GB	1.29GB	1.29GB	2017-12-26 11:23:43	2017-12-26 11:25:04

History: If you've set "Restore at once" for this restore job, this job will be auto-deleted after completing restoring and shows no data. If you've set " Restore as scheduled" ,you

can review all the history operations of this restore job.

Warning: During a restore process, do not power on the VM before the restore job is completed, otherwise the VM data will be damaged or lost.

3.2.4. VM Instant Recovery

VM Instant Recovery helps to recover TB sized VMs in 15 secs, all business recovery in 1 min, minimized the break-off time of critical businesses.

When creating a VM Instant Recovery job, make sure there's available restore point. If no, please backup target VM(s) with Vinchin Backup & Recovery system first.

3.2.4.1. Create Instant Recovery Job

Click **【VM Instant Recovery】** you are coming to the instant recovery new job adding page. Select a target VM restore point under the Citrix XenServer which you want to instantly recover as below. You can quickly find the target restore point by specifying backup node and selecting "Group by VMs" or "Group by Restore Points" accordingly.

The screenshot shows the 'Backup/Restore' section of the Vinchin interface. The 'Restore Point' dropdown is set to 'All nodes'. A tree view shows the backup structure for 'Citrix XenServer', including 'Citrix XenServerBackup1', 'test Windows', and 'test CentOS'. Under 'test CentOS', two incremental backup points are listed: '2017-12-26 10:45:55(Full Backup)' and '2017-12-26 10:54:09(Incremental Backup)'. The 'Target Host' is set to 'xenserver-xswfpdkh (192.168.79.20)'. The 'Backup Node' is set to '192.168.101.42'. The 'Job Name' is 'Citrix XenServerInstant Recovery1'. The interface includes 'Cancel' and 'Ok' buttons at the bottom.

Note: You can only select one VM restore point for each instant recovery job.

Select a host as the restore destination where you want to run the instantly recovered VMs, and select the backup node IP/domain where the backup repository was mounted.

This screenshot shows the same 'Backup/Restore' configuration window, but with additional settings. The 'Target Host' dropdown is now expanded, showing two options: 'xenserver-xswfpdkh (192.168.79.20)' and 'xenserver-xswfpdkh: 192.168.79.20'. The 'Backup Node' remains '192.168.101.42'. The 'VM Configurations' section is now visible, showing 'Name&Status' as 'Network' and 'Restored VM Name' as 'test_CentOS_2017_12_26_10_54_46VM_Instant_Recovery'. There is a checkbox for 'Power on the VM after restoring' which is currently unchecked. The 'Job Name' is still 'Citrix XenServerInstant Recovery1'. The 'Cancel' and 'Ok' buttons are at the bottom.

vinchin

Home Backup/Restore Resources Log/Alert admin

2017-12-26 10:45:55(Full Backup)
2017-12-26 10:54:09(Incremental Backup)
2017-12-26 10:54:45(Incremental Backup)

Please select one restore point of target VM to be instant-restored

Target Host *
xenserver-xswfpdkh (192.168.79.20)
xenserver-xswfpdkh: 192.168.79.20

Please select a host where to run the instant-restored VM

Backup Node *
192.168.101.42
Please select a backup node where the restore point located and make sure it is connectable with the target host. If not found the right node or the given node is not connectable, you can manually enter a node address

VM Configurations *
Name&Status
Network

Restored VM Name: *
test_CentOS_2017_12_26_10_54_46VM_Instant_Recovery

Power on the VM after restoring *
OFF

Job Name *
Citrix XenServerInstant Recovery1
Default job name could be modified.

Cancel Ok

Copyright © 2017 Vinchin build: 4.0.4345

You can also preset the restored VMs' name, network connection and whether to power on the VM after restoring.

VM Configurations *

Name&Status

Restored VM Name: *

test_CentOS_2017_12_26_10_54_46VM_Instant_Recovery

Power on the VM after restoring *

OFF

VM Configurations *

Name&Status

Network

VM Network Interface	MAC Address	Remain MAC	Connect To
0	fe:b5:a8:35:8c:c5	☐	Auto-select ▼

You can also change the job name as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Citrix XenServerBackup1

- test Windows
- test CentOS
- 2017-12-26 10:45:55(Full Backup)
- 2017-12-26 10:54:09(Incremental Backup)
- 2017-12-26 10:54:46(Incremental Backup)

Please select one restore point of target VM to be instant-restored

Target Host * xenserver-xswfpdsh (192.168.79.20)

Please select a host where to run the instant-restored VM

Backup Node * 192.168.101.42

Please select a backup node where the restore point located and make sure it is connectable with the target host. If not found the right node or the given node is not connectable, you can manually enter a node address

VM Configurations *

Name&Status	VM Network Interface	MAC Address	Remain MAC	Connect To
Network	0	fe b5 a8 35 8c c5	☐	Auto-select

Job Name * Citrix XenServerInstant Recovery1

Default job name could be modified.

Cancel Ok

Copyright © 2017 Vinchin build: 4.0.4345

Click 【OK】 you are coming to the Current Job List as below:

vinchin

Home Backup/Restore Resources Log/Alert admin

Current Job

Job List

Page 1 of 1 View 10 records per page Total 3 records

Search by job name Search

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	2017-12-26 11:36:26	Pending	--	admin	Options
Citrix XenServerRestore1	Citrix XenServer	Restore	2017-12-26 11:07:39	Pending	--	admin	Options
Citrix XenServerBackup1	Citrix XenServer	Backup	2017-12-25 18:11:28	Pending	--	admin	Options


Tip: Click job name you can view the job details.

Copyright © 2017 Vinchin build: 4.0.4345


Operation details please refer to "chapter 3.2.3.VM Restore".

3.2.4.2. Perform Instant Recovery Job

Click **【Activate】** to activate the Instant Recovery job and click job name to view the job running details as below:

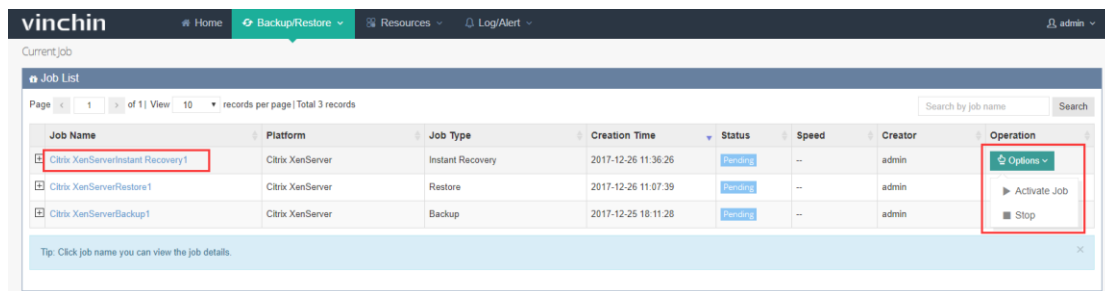


The logs will display the instant recovery job progress.

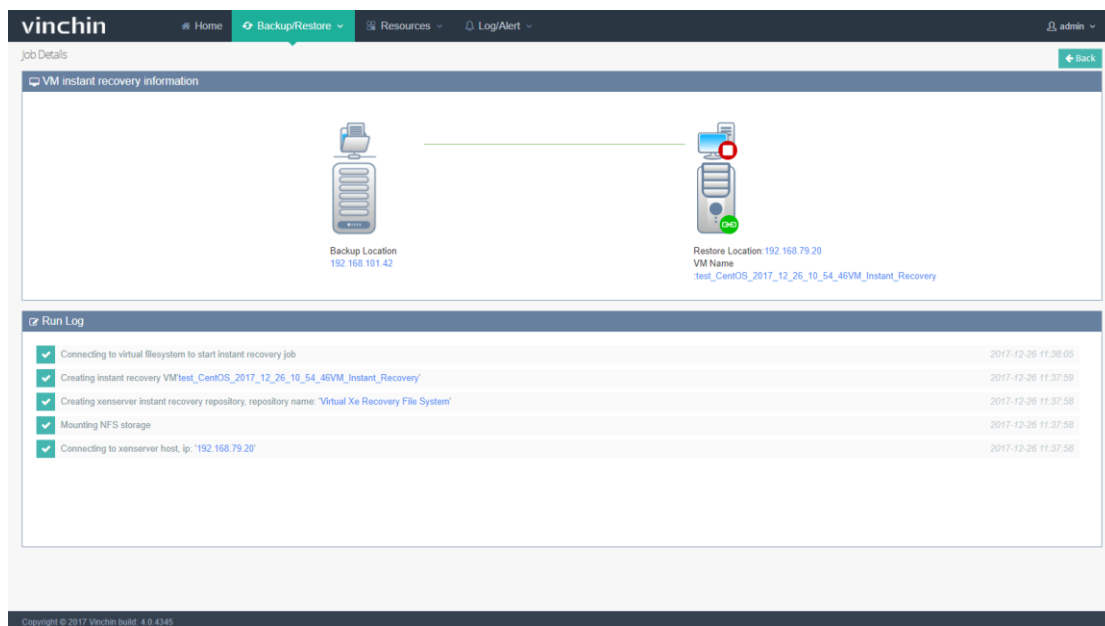

After the job is completed successfully, you can power on the recovered VMs.


If you have preset "power on the VM after restoring", the VM will be powered on automatically once you activate the job in 15 seconds.

Log in to XenCenter, you can see the instantly recovered VM is created in second level, and is workable:

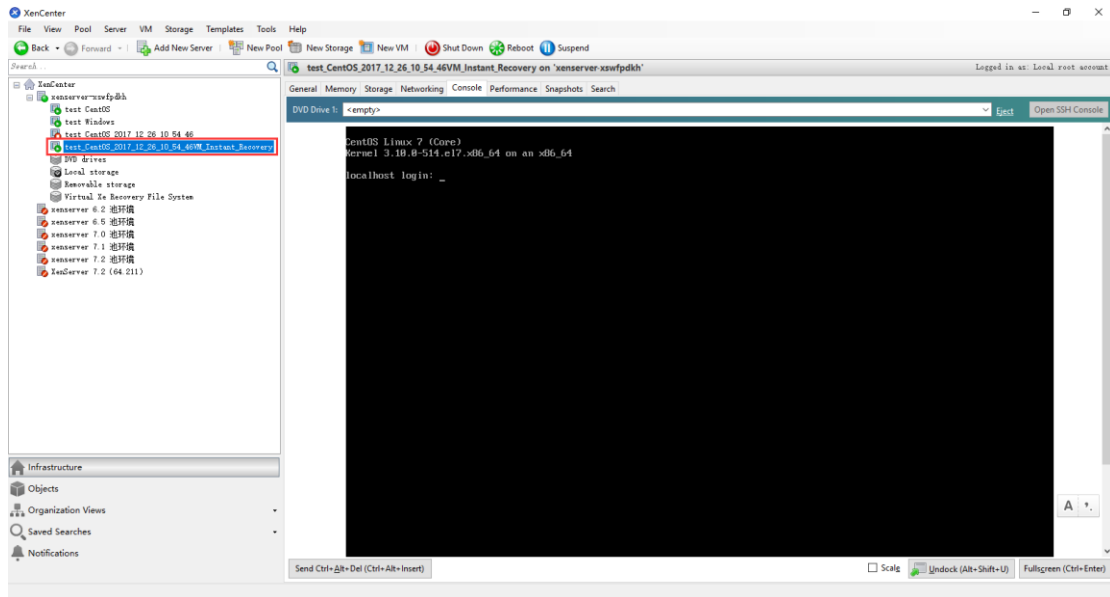


Warning: Do not create snapshot on the instantly recovered VM, or change any disk information. Otherwise error will occur to the VM or it will crash.

If you stop the job when it's still running, the restored VM will be deleted. System will remind you as below:

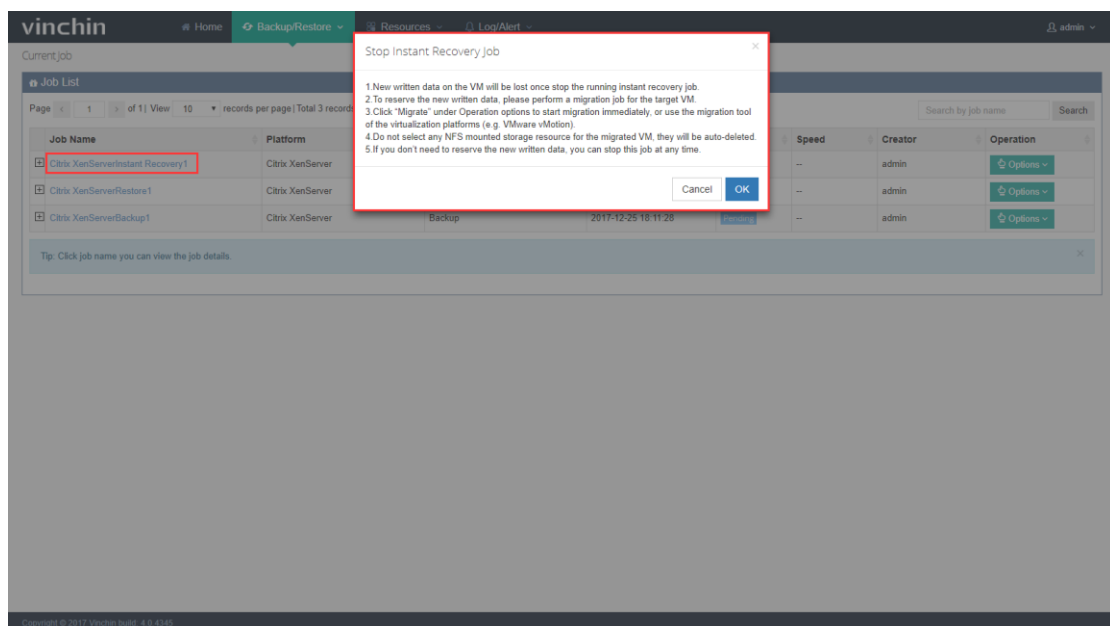

Please read the stop reminder carefully before confirming.

Once you stop the job, it will stay as "stopped" as below:

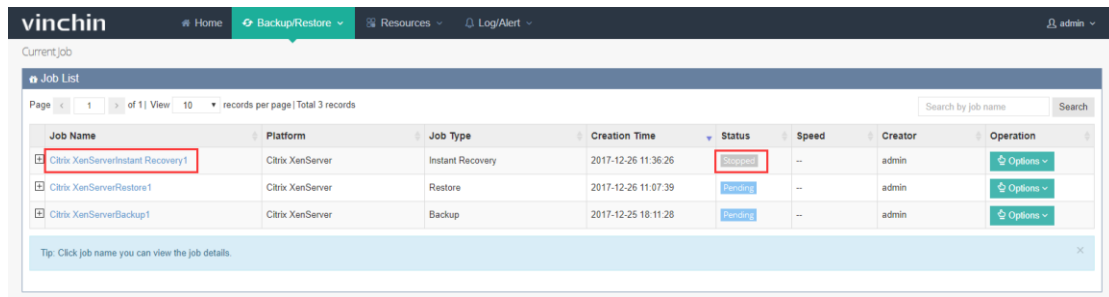

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	2017-12-26 11:36:26	Stopped	--	admin	Options
Citrix XenServerRestore1	Citrix XenServer	Restore	2017-12-26 11:07:39	Pending	--	admin	Options
Citrix XenServerBackup1	Citrix XenServer	Backup	2017-12-25 18:11:28	Pending	--	admin	Options


Tip: Click job name you can view the job details.

Warning: If you stop the instant recovery job, all the recovered VM information will be deleted (Including newly increased data during the instant recovery). If you need to reserve the recovered VM and its newly increased data, do not stop the job until you have migrated them to a safe place.

3.2.5. VM Migration

When performing instant recovery job, the VM and newly increased data can be synchronously migrated to the production area via Vinchin Backup & Recovery live-migration function without effecting the normal operation of your business.

Select a normally running instant recovery job and click **【Migration】** as below:

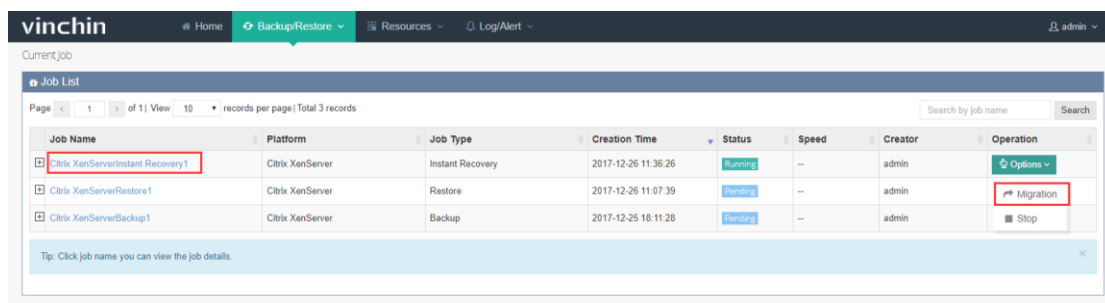

You are coming to the "Create VM Migration Job" page, Select a host where you want to migrate the VM to.

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Migration

New Job

Target Host *

xenserver-xswfpdkh (192.168.79.20)

xenserver-xswfpdkh: 192.168.79.20

Please select a target host where to run the migrated VM.

VM Configurations *

Name&Status

Storage

Network

Migration VM Name: *

test_CentOS_2017_12_26_10_54_46VM_Instant_RecoveryMigration

Migration Power on the VM after restoring *

OFF

Cancel Ok

Copyright © 2017 Vinchin build: 4.0.4340

VM Configurations:

(1) "Name & Status" allows you to preset the migrated VM name and whether to power on it after migrating as below:

VM Configurations *

Name&Status

Storage

Network

Migration VM Name: *

test_CentOS_2017_12_26_10_54_46VM_Instant_RecoveryMigration

Migration Power on the VM after restoring *

OFF

Note: Make sure there's no special characters, no more than 60 characters. Any combination of letters, numbers and underscore characters are recommended.

(2) If choose Auto-select in the "Storage", the system will automatically choose the biggest storage space. If all the storages are out of free space, the restore job will fail, and system will remind insufficient space.

VM Configurations *

Name&Status	VM Disk	Total Size	Restore To
Storage	test CentOS 0	10GB	Auto-select ▼
Network			

(3) The “VM network interface” belongs to the backed up VM. This setup is to band it to a destination host’s network interface.

VM Configurations *

Name&Status	VM Network Interface	MAC Address	Remain MAC	Connect To
Storage	0	fe:b5:a8:35:8c:c5	☐	Auto-select ▼
Network				

Note: If tick “Remain MAC”, system will remain the MAC of original backed up VM, not the MAC of instant-recovered VM.

Click **【OK】** to start the migration job. You can view the migration job running details in the previous instant recovery job:

The screenshot displays the Vinchin Backup/Restore web interface. At the top, there's a navigation bar with 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The main area shows a diagram of a migration process from a 'Backup Location' (192.168.101.42) to a 'Restore Location' (192.168.79.20). Below the diagram, a 'Job Progress' bar indicates 19.88% completion. A 'Run Log' section lists the following steps:

- Opening virtual disk 'test CentOS 0_2017-12-26 11:46:33' (2017-12-26 11:46:41)
- Migrating restore point data (2017-12-26 11:46:40)
- Creating VM 'test_CentOS_2017_12_26_10_54_46VM_Instant_RecoveryMigration' (2017-12-26 11:46:33)
- Capturing migration job size (2017-12-26 11:46:33)
- Loading live migration job configuration information (2017-12-26 11:46:33)

The footer shows 'Copyright © 2017 Vinchin build: 4.0.4345'.

After migration completed, the migration job will automatically change back to **【Instant Recovery Job】** and this job is still in a running status. But the VM in this job is powered off and the business will be taken over by the migrated VM.


Warning: Do not power on the VM when it is being migrated, otherwise the VM will be damaged.

3.3. RedHat RHV/Ovirt


3.3.1. Install Backup Plugin

When backing up a RedHat RHV/Ovirt virtual environment, you need to install the RedHat RHV/Ovirt backup plugin in the RHV/Ovirt hosts.

- a) Download the backup plugin from the Vinchin Backup & Recovery system login page as below:

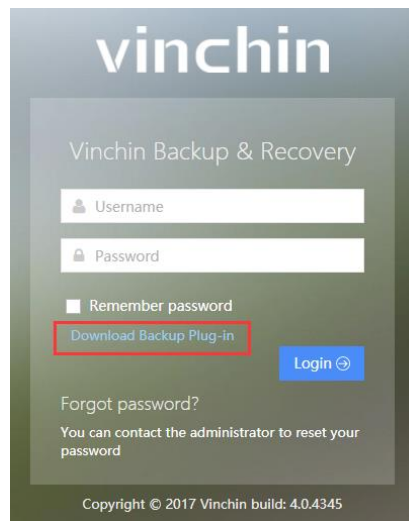

- b) Click "Download Backup Plug-in" → "RedHat RHV/Ovirt" and your corresponding software version, then click **【Download】** as below:

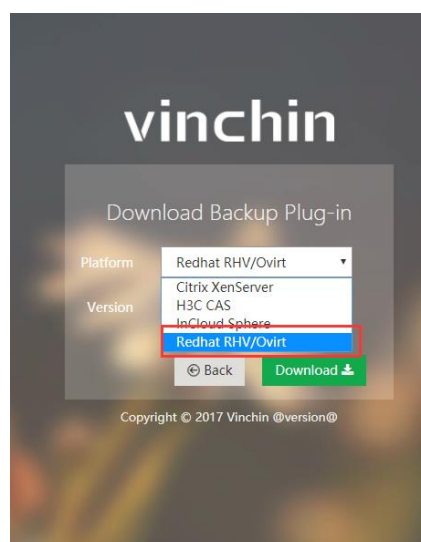

- c) Copy the downloaded plugin to RHV/Ovirt host/root directory, and install as below:

```

[root@rhv3 ~]# ls
anaconda-ks.cfg vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64.tar.gz
[root@rhv3 ~]# tar -zxvf vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64.tar.gz
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/bin/
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/conf/
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/conf/kvm_virt_server.conf.xml
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/conf/kvm_backup_service.conf.xml
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/conf/certificate.pem
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/conf/private_key.pem
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/lib/
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/lib/libjsoncpp.so.1.6.2
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/lib/libvirt.so.0.2004.0
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/lib/libjsoncpp.so.1
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/lib/libjsoncpp.so
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/lib/libvirt.so.0
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/lib/libvirt.so
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_virt_server
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_backup_service
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_virt_server.service
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_virt_server.service.old
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_virt_server.service.debian
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_backup_service.service
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_backup_service.service.old
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_backup_service.service.debian
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_backup_watch_dog.service.debian
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_backup_watch_dog.sh
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_backup_patch_install
vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64/kvm_backup_patch_uninstall
[root@rhv3 ~]# cd vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64
[root@rhv3 vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64]# ls
bin      kvm_backup_patch_install  kvm_backup_service      kvm_backup_service.service.debian  kvm_backup_watch_dog.service.debian
conf     kvm_backup_patch_uninstall  kvm_backup_service.service  kvm_backup_service.service.old      kvm_backup_watch_dog.sh
[root@rhv3 vinchin-kvm-backup-patch-4.0.4145-RHEL.7-x86_64]# ./kvm_backup_patch_install
check the installation environment ...done


```

Note: For cluster environment, please install the backup plugin in every RHV/Ovirt host under this cluster environment.

3.3.2. VM Backup

3.3.2.1. Authorize Host

Before creating a VM backup job, you need to authorize the target hosts which you need to backup. Click **【Resources】** – **【Virtual Infrastructure】** as below:


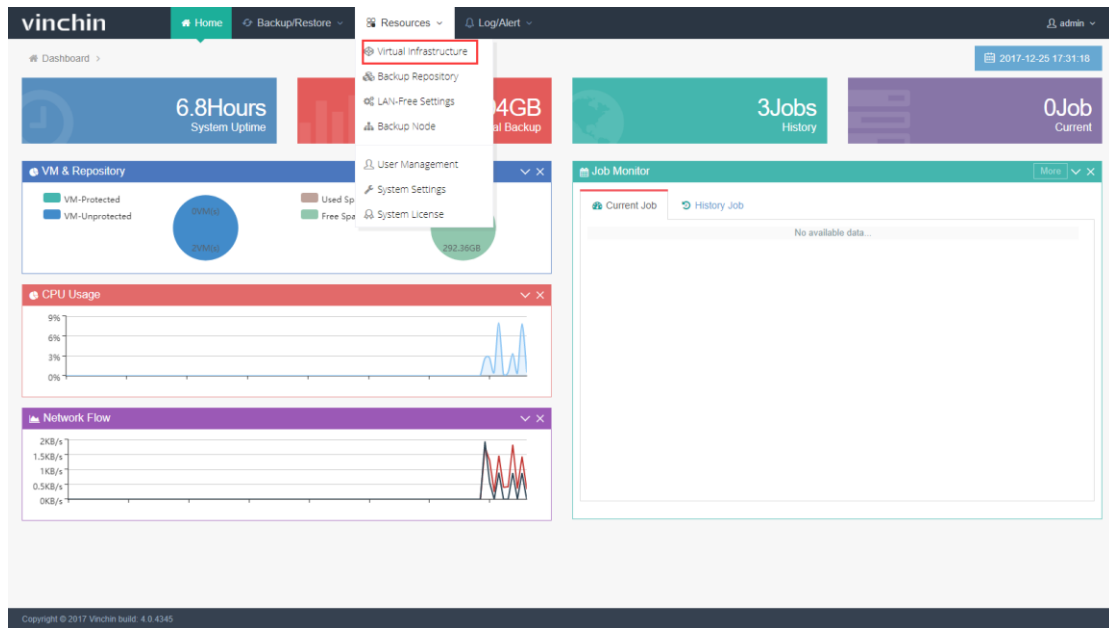


Then you'll see the virtual infrastructure list as below, choose the target virtual infrastructure you want to backup and click **Auth** .

The screenshot shows the 'Virtual Infrastructure List' table in the Vinchin interface. The table has columns for No., IP Address, Name, Platform, Username, Sync Time, Added By, Status, and Operation. Five records are listed. The fourth record is highlighted with a red box, and its 'Auth' button in the Operation column is also highlighted with a red box.

No.	IP Address	Name	Platform	Username	Sync Time	Added By	Status	Operation
1	192.168.66.45	192.168.66.45	InCloud Sphere	root	2017-12-15 17:11:03	admin	Unauthorized	Sync Auth
2	192.168.66.72	192.168.66.72	Citrix XenServer	root	2017-12-15 14:09:37	admin	Unauthorized	Sync Auth
3	192.168.106.60.8080	192.168.106.60.8080	H3C CAS	admin	2017-12-15 12:14:06	admin	Unauthorized	Sync Auth
4	192.168.79.60	192.168.79.60	Redhat RHV/Ovirt	admin@internal	2017-12-15 12:10:04	admin	Unauthorized	Sync Auth
5	192.168.1.200	192.168.1.200	VMware vSphere	root	2017-12-15 11:39:04	admin	Unauthorized	Sync Auth

Tick the hosts under this virtual infrastructure you want to backup and click **Authorize** .

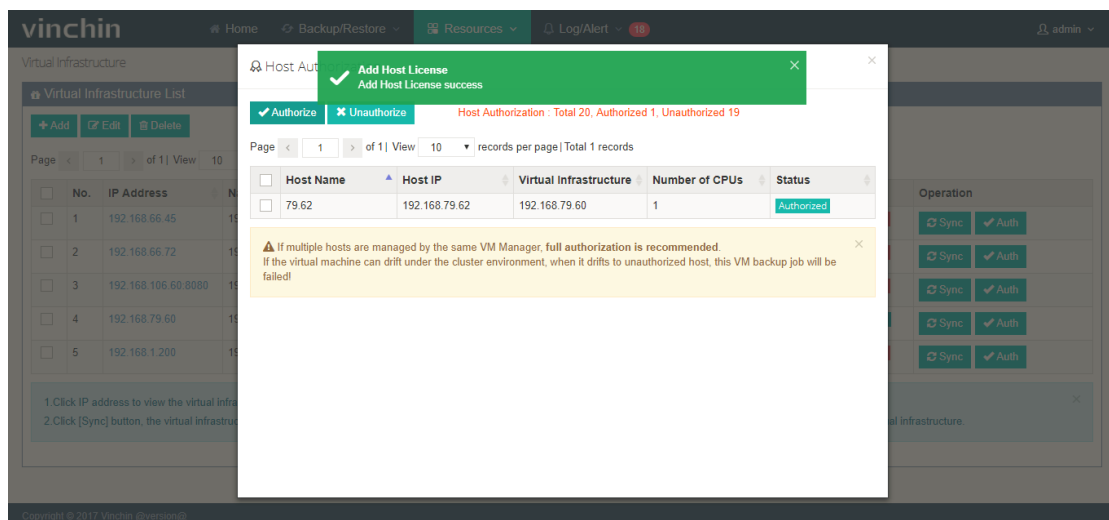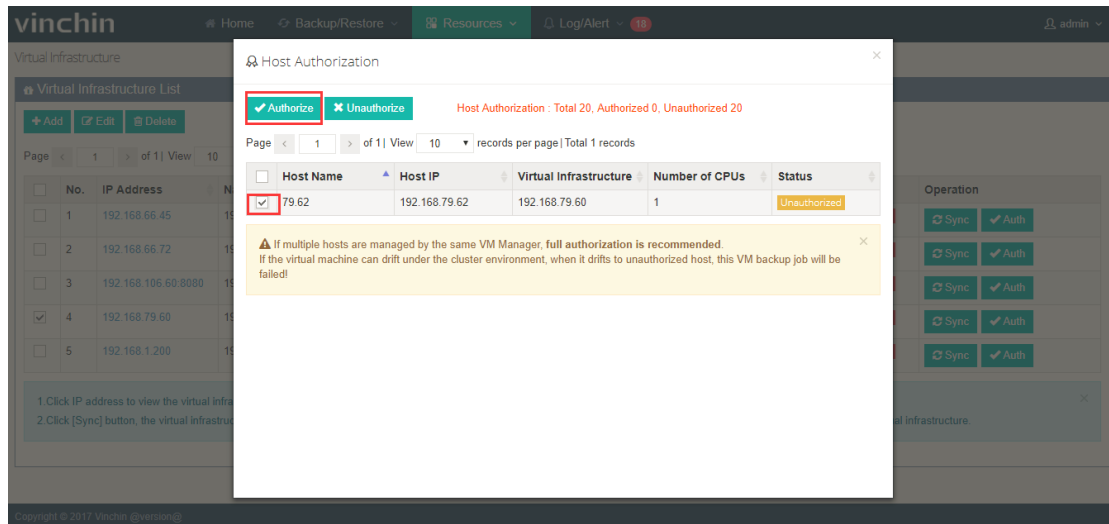

The system will remind you "Authorize the host success".



Note: If there's no server in the virtual infrastructure list, please add a host or virtual cluster first (please refer to Chapter 2.3.1 Add Server)

3.3.2.2. Create Backup Job


3.3.2.2.1. Backup Source

Select the virtual machines you want to backup.

Click【Backup/Restore】 – 【VM Backup】, then you will see the virtualization infrastructure tree, expand the RedHat RHV/Ovirt infrastructure until you see the virtual machines. Tick any virtual machines you need to backup, they will be showing in the “Selected VM” column. If you want to delete a selected VM, you can click  button in the right column or directly untick this VM as below:

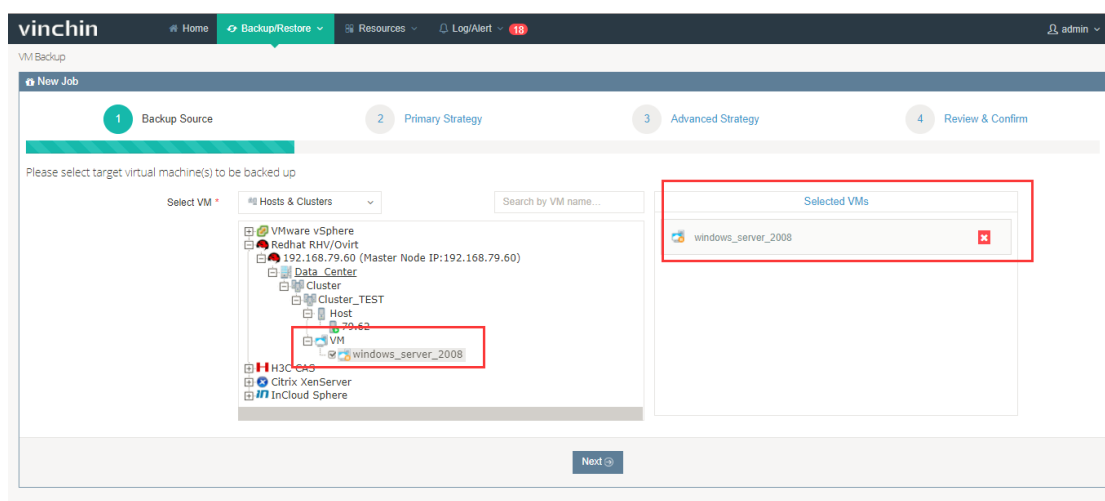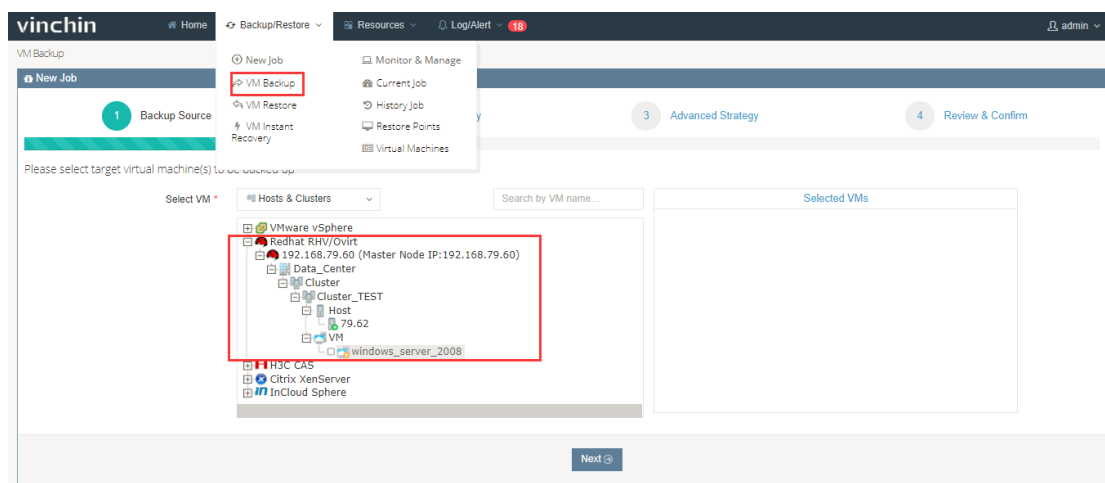


If you know the target VM name, or you know any related key words, you can directly search the VM in the search bar as below:

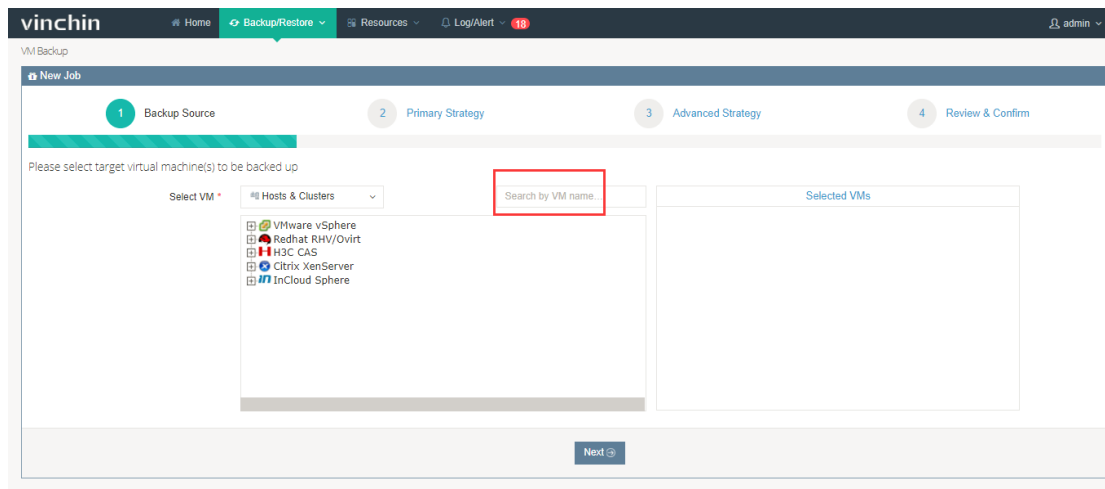

Note: If the VM already exists in the backup job list, it will be highlighted in Green color.


And it is un-selectable.

Click the target VM, you can see the virtual disks under this VM, you can choose to backup or exclude any of the disks under this VM without having to backup all the disks on the virtual machine.

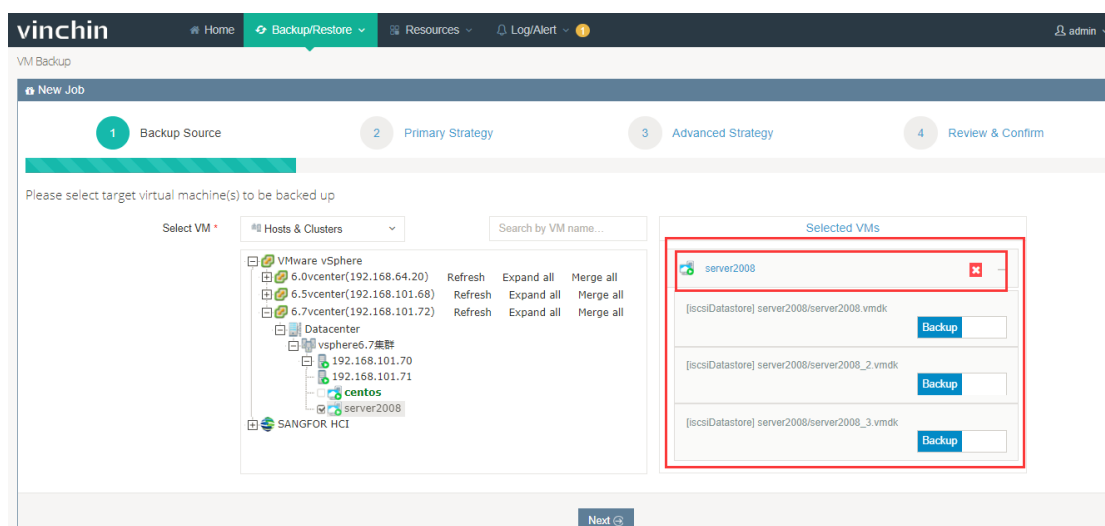

Click **【Next】** once you complete the selection.

If your RHV infrastructure has be updated recently, you can click **【Refresh】** to update and sync the servers to Vinchin Backup & Recovery system as below:

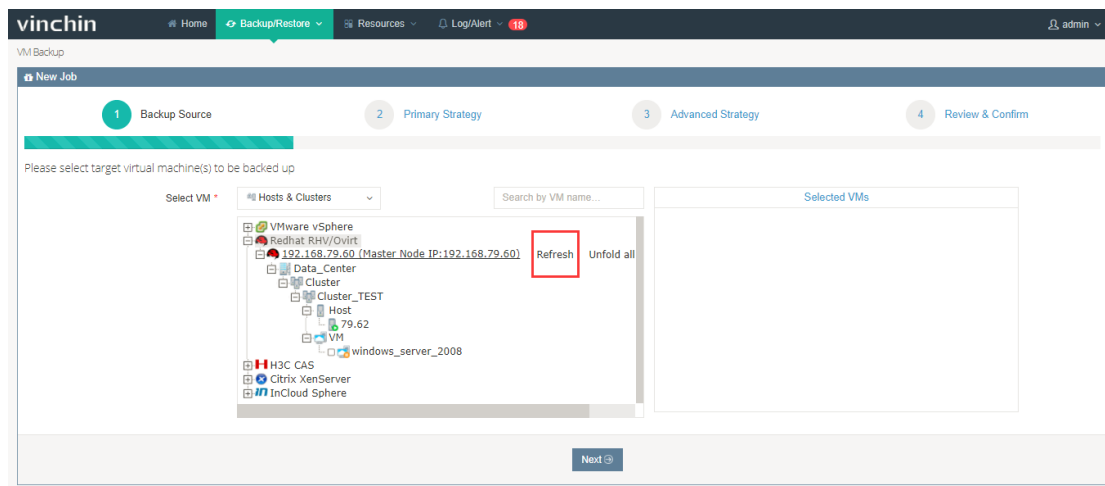

3.3.2.2.2. Primary Strategy

In the Primary Strategy page, there are two backup options available.

3.3.2.2.2.1.Backup at Once

The backup job only perform one time.

Choose "Backup at once", then click "📅" to choose YY/MM/DD and HH:MM:SS, then click **【Next】** , the backup job will be performed at the exact time for only once.

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2018-01-09 10:40:51

Primary Strategy * Backup at once

Start Time *

January 2018

Su	Mo	Tu	We	Th	Fr	Sa
31	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31	1	2	3
4	5	6	7	8	9	10

Copyright © 2018 Vinchin build: 4.0.4387

vinchin

Home Backup/Restore Resources Log/Alert 18 admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2018-01-03 16:22:37

Primary Strategy * Backup at once

Start Time * 2018-01-17 10:50:55

3.3.2.2.2. Backup as Scheduled

The backup job repeats as scheduled.

Choose "Backup as scheduled", then choose a Backup Strategy (Full Backup/Incremental Backup/Differential Backup).

Note: Incremental and Differential cannot be chosen at the same time.

Click the selected strategy bar as below:

The screenshot shows the 'New Job' wizard in the Vinchin VM Backup interface. Step 2, 'Primary Strategy', is active. The 'Primary Strategy' dropdown is set to 'Backup as scheduled'. Under the 'Schedule' section, 'Full Backup' is selected. A red box highlights the schedule text: 'Full Backup (Every Friday, 23:00:00Start, Unrepeat)'. The 'Next' button is visible at the bottom right.

Then you will see there are some schedule options, you can choose to repeat the backup job at any time in any day.

The screenshot shows the 'Full Backup (Every Friday, 23:00:00Start, Unrepeat)' schedule expanded. It shows options for 'Every Day', 'Every Week', and 'Every Month'. The 'Every Week' option is selected, and the 'Friday' checkbox is checked. The 'Start Time' is set to '23:00:00' and 'Repeat' is set to 'OFF'.

The time schedule of backup job includes 3 types: Every day, Every Week and Every Month.

- Every Day schedule only needs to set Start Time as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:58:51

Primary Strategy * Backup as scheduled

Schedule * ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

✓ Full Backup (Every Day 23:00:00 Start, Unrepeat) +

✓ Incremental Backup (Every Day 23:00:00 Start, Unrepeat) -

☒ Every Day ☐ Every Week ☐ Every Month

Start Time 23:00:00

Repeat OFF

Back Next

- Every Week schedule needs to choose which days to perform the backup job, details as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:59:26

Primary Strategy * Backup as scheduled

Schedule * ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

✓ Full Backup (Every Day 23:00:00 Start, Unrepeat) +

✓ Incremental Backup (Every Monday, Wednesday, Friday, 23:00:00 Start, Unrepeat) -

☐ Every Day ☒ Every Week ☐ Every Month

Every Week ☒ Monday ☐ Tuesday ☒ Wednesday ☐ Thursday ☒ Friday ☐ Saturday ☐ Sunday

Start Time 23:00:00

Repeat OFF

Back Next

- Every Month schedule is similar with Every Week schedule, needs to choose which days to perform the backup job, details as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up primary strategy for this backup job. Server Time: 2017-12-25 17:59:55

Primary Strategy * Backup as scheduled

Schedule * ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

☒ Full Backup (Every Day 23:00:00Start, Unrepeat) +

☒ Incremental Backup (Every Month Day1, Day15, 23:00:00Start, Unrepeat) -

☐ Every Day ☐ Every Week ☒ Every Month

Every Month

☒	1	☐	2	☐	3	☐	4	☐	5	☐	6	☐	7
☐	8	☐	9	☐	10	☐	11	☐	12	☐	13	☐	14
☒	15	☐	16	☐	17	☐	18	☐	19	☐	20	☐	21
☐	22	☐	23	☐	24	☐	25	☐	26	☐	27	☐	28
☐	29	☐	30	☐	31								

Start Time 23:00:00

Repeat OFF

Back Next

Set the backup "Start Time" and choose whether to enable the "Repeat".

"Repeat" means repeatedly perform the backup job every xx hours/minutes/seconds.

Once enable the "Repeat" option, you need to set the time of "Repeat Interval" and "Repeat End" accordingly.

(Example: Choose Every Month schedule, and tick day 1 and day 15, set the Start Time as 7:00:00, and enable the "Repeat", Repeat Interval Time 2:00:00 and Repeat End Time 21:00:00. This schedule means on 1st and 15th of each month, this backup job will start running from 7:00am, and it will repeat once every 2 hours until 9:00pm of the day.)

vinchin

Home Backup/Restore Resources Log/Alert admin

Primary Strategy * Backup as scheduled

Schedule * ☒ Full Backup ☒ Incremental Backup ☐ Differential Backup

☒ Full Backup (Every Day 23:00:00Start, Unrepeat) +

☒ Incremental Backup (Every Month Day1, Day15, 7:00:00Start, Repeat Interval:2:00:00, Repeat End:21:00:00) -

☐ Every Day ☐ Every Week ☒ Every Month

Every Month

☒	1	☐	2	☐	3	☐	4	☐	5	☐	6	☐	7
☐	8	☐	9	☐	10	☐	11	☐	12	☐	13	☐	14
☒	15	☐	16	☐	17	☐	18	☐	19	☐	20	☐	21
☐	22	☐	23	☐	24	☐	25	☐	26	☐	27	☐	28
☐	29	☐	30	☐	31								

Start Time 7:00:00

Repeat ON


Repeat interval 2:00:00

Repeat End 21:00:00

Back Next

Copyright © 2017 Vinchin build: 4.0.4345

After finishing the settings, there will be a green ✓ in front of the schedule, it means the schedule setting is saved. Then click **【Next】**:

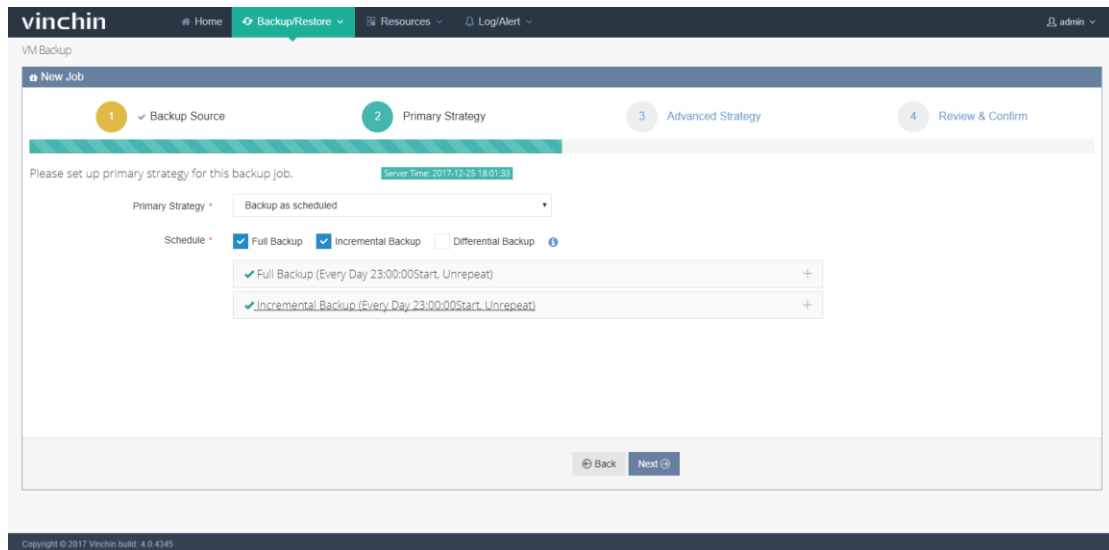

Incremental backup is backup the changes made since the last incremental backup.

Differential backup is backup the changes made since the last full backup, every new differential backup relies on the same full backup.

3.3.2.2.3. Advanced Strategy

3.3.2.2.3.1.Backup Location

Select a repository to store the backed up data. You can enable the “auto-select”, then the backup data will be automatically stored to an optimized repository. You can disable the “auto-select” to specify a repository for the backup data.

vinchin

Home Backup/Restore Resources Log/Alert admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off ?

User-defined localhost.localdomain(192.168.101.42)

Repository Auto-select ☐ Off ?

User-defined Local Disk1(Local Disk, Capacity: 299.85GB, Free Space: 291.67GB)

Back Next

Copyright © 2017 Vinchin build: 4.0.4340

If you have added multiple backup nodes as alternative backup repository, you need to select one node first. Click the blue button to disable the “Node Auto-Select”, select one available node as below:

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off ?

User-defined localhost.localdomain(192.168.101.42)

Repository Auto-select ☐ On ?

Back Next

If you prefer to specify a backup repository under this node, disable the “Repository Auto-Select” and specify a selectable repository for this backup job.

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off

User-defined localhost.localdomain(192.168.101.42)

Repository Auto-select ☐ Off

User-defined Local Disk1(Local Disk, Capacity: 299.85GB, Free Space: 299.82GB)

Back Next

If you prefer to let the system select the optimized repository, keep the “Node Auto-Select” or/and “Repository Auto-Select” enabled.

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☒ On

User-defined

Repository Auto-select ☐ Off

User-defined

Back Next

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Node Auto-select ☐ Off

User-defined localhost.localdomain(192.168.101.42)


Repository Auto-select ☒ On

User-defined

Back Next

3.3.2.2.3.2. Deduplication & Compression


Choose to enable/disable data deduplication, data compression and data block size.

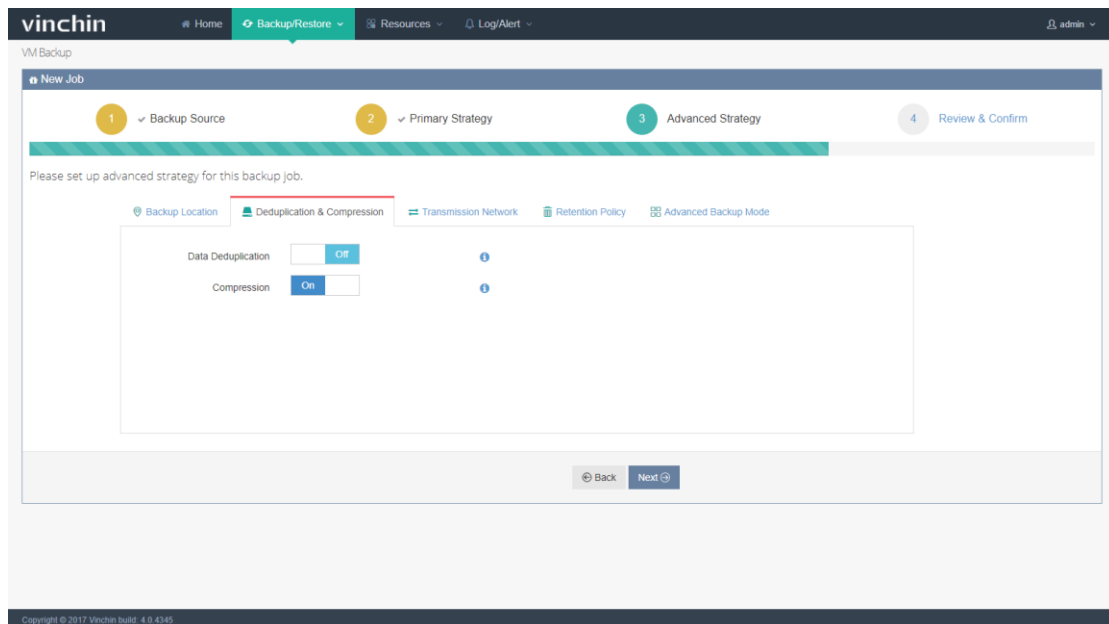

- Data Deduplication: Enable it to delete the duplicated data, can reduce the total backup size.
- Data Compression: Enable it to compress the backup data size, can reduce the total backup size.

3.3.2.2.3.3. Transmission Network

Click **【Transmission Network】** , you can choose to enable the **【Data Encryption】** , the backed up data will be encrypted during transferring from the backup source to backup repository.

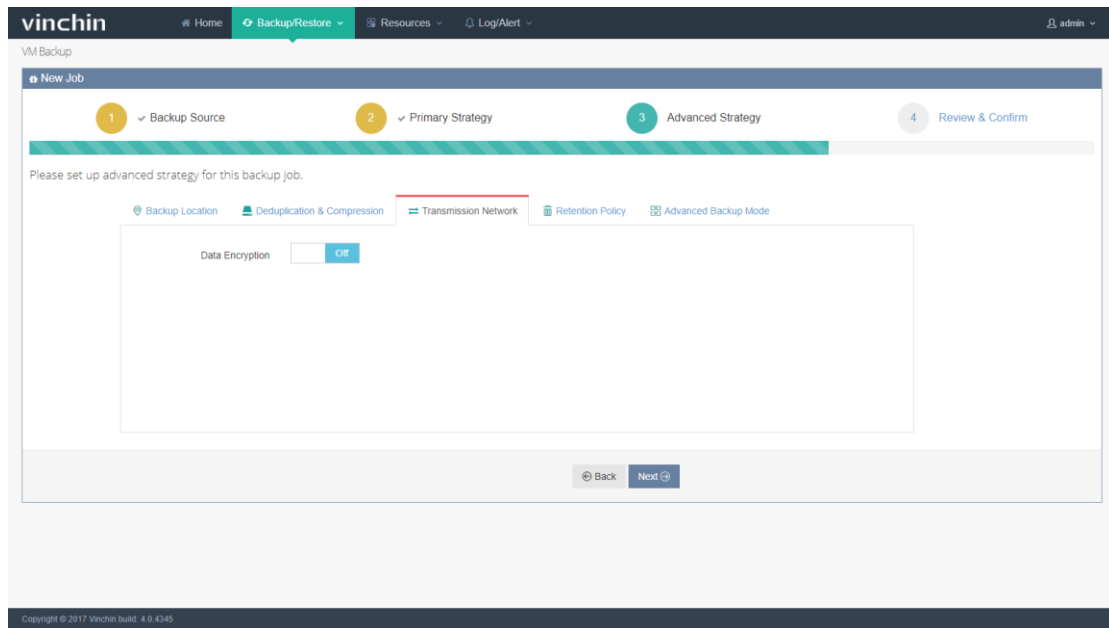

3.3.2.2.3.4. Retention Policy

Backup retention policy is a policy to reserve backup data on disk according to number of days/restore points. Old restore points out of date/over range will be auto-deleted.

For RedHat RHV/Ovirt, the retention policy is based on full backup time points. It will lead a deletion of the furthest full backup point together with its corresponding incremental or differential backup points when a new full backup point is generated.

Retention Policy includes "Number of Restore Points" and "Number of Days", details as below:

Number of Restore Points: Restore points will be reserved according to number limitation.

vinchin Home Backup/Restore Resources Log/Alert 1

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Backup Mode

Retention Mode * Number of Restore Points

Restore Points * 30

Number of Days: Backups to be saved as per the number of days.

Number of Restore Points: Backups to be saved as per the number of restore points.

Backups beyond the specified number of days/restore points will be auto deleted.

Number of Days: Restore points will be reserved according to days limitation.

vinchin Home Backup/Restore Resources Log/Alert 1

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Advanced Backup Mode

Retention Mode * Number of days

Days * 30

Number of Days: Backups to be saved as per the number of days.

Number of Restore Points: Backups to be saved as per the number of restore points.


Backups beyond the specified number of days/restore points will be auto deleted.

3.3.2.2.3.5. Advanced Backup Mode

1) Standard Snapshot (Serial snapshot / parallel snapshot)

- ✓ Serial snapshot: taking snapshot of each VM in turn and complete transfer in turn.

- ✓ Parallel snapshot: taking snapshot of all VMs concurrently and complete transfer in turn. It is necessarily to be chosen when there's business relationship between the VMs or backup time consistency is required of all the VMs.

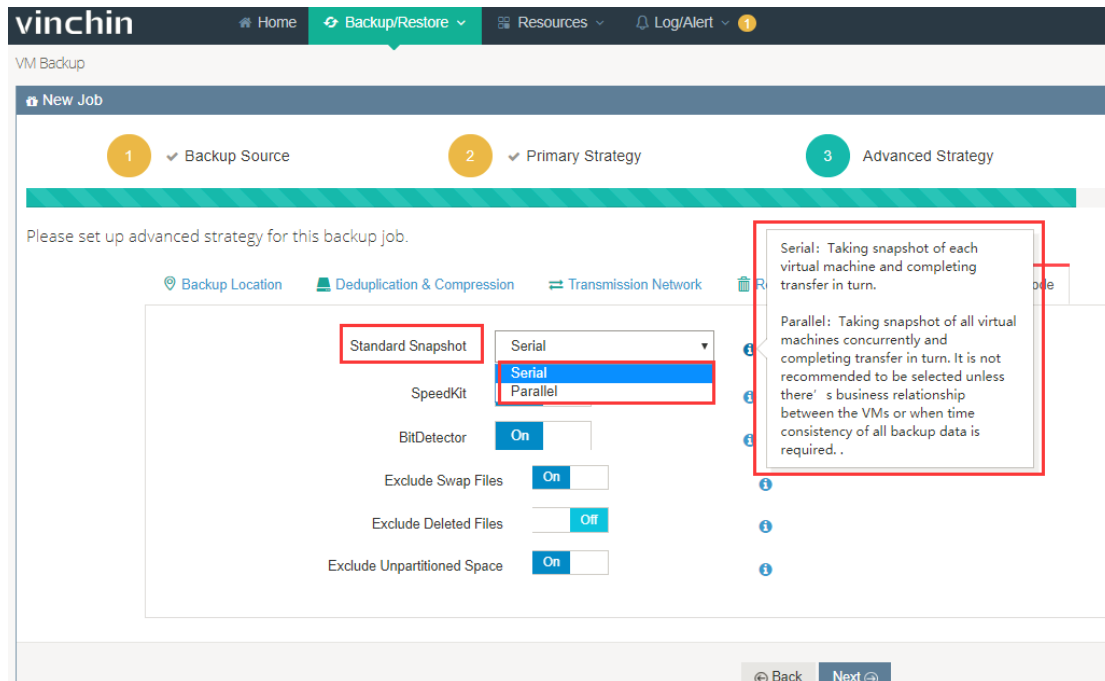

2) SpeedKit

SpeedKit is a Vinchin developed technology to improve the computing speed of changed data when doing an incremental backup. Enabling "SpeedKit" can help to improve backup efficiency.

Note: Enabling "SpeedKit", the system will keep one snapshot for each VM in the backup storage when doing incremental backup everytime, so you must make sure your backup storage space is sufficient.

vinchin Home Backup/Restore Resources Log/Alert 1

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Standard Snapshot Serial

SpeedKit On

BitDetector On

Exclude Swap Files On

Exclude Deleted Files Off

Exclude Unpartitioned Space On

SpeedKit can help improving the computing speed of changed blocks when doing incremental backups. It is recommended to be enabled if you want a faster backup. (Precondition: Your storage space is large enough.)

Back Next

3) BitDetector

BitDetector is a vinchin technology to improve backup efficiency and save backup storage space.

Enabling "BitDetector" you can choose not to backup those swap files, deleted files and unpartitioned space which might be useless or unnecessary data for you.

vinchin Home Backup/Restore Resources Log/Alert 1

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy

Please set up advanced strategy for this backup job.

Backup Location Deduplication & Compression Transmission Network Retention Policy Advanced Backup Mode

Standard Snapshot Serial

SpeedKit On

BitDetector On

Exclude Swap Files On

Exclude Deleted Files Off

Exclude Unpartitioned Space On

Back Next

3.3.2.2.4. Review & Confirm

After finish, you are able to review and confirm the settings. Click **【Submit】** if confirm, the backup job creation will be completed.

vinchin Home Backup/Restore Resources Log/Alert 18 admin

VM Backup

New Job

1 Backup Source 2 Primary Strategy 3 Advanced Strategy 4 Review & Confirm

Please review and confirm your configurations.

Job Name : Redhat RHV/OvirtBackup1
Default job name could be modified.


Backup Source	Backup Source : 192.168.79.60/Data_Center/cluster/Cluster_TEST/vm/windows_server_2008 Redhat RHV/Ovirt Backup
Primary Strategy	Primary Strategy : Backup as scheduled Backup Schedule : Full Backup (Every Friday, 23:00:00Start, Unrepeat)
Advanced Strategy	Backup Location : Node Auto-select : OK Deduplication & Compression : Data Deduplication : OFF Compression : ON Transmission Network : Data Encryption : OFF Retention Policy : Quantity retention, Retention value is 30 Advanced Backup Mode : Speed-up Backup : ON

Back Submit

Note: You can change the Job name before submitting.

3.3.2.3. Perform Backup Job


After creating a new backup job, you will see this job in the “Current Job List” as below:

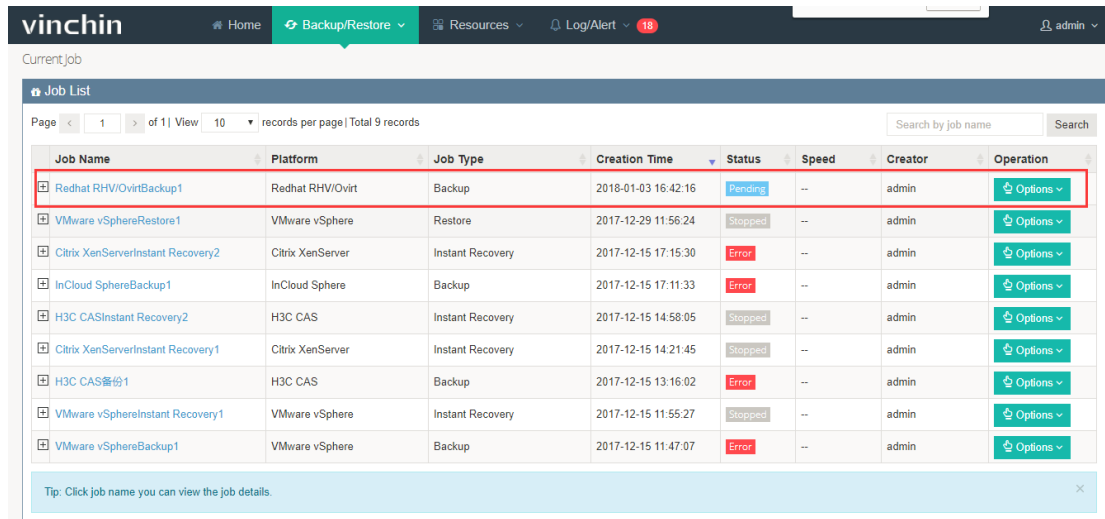

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Pending	--	admin	Options
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-29 11:56:24	Stopped	--	admin	Options
Citrix XenServerInstant Recovery2	Citrix XenServer	Instant Recovery	2017-12-15 17:15:30	Error	--	admin	Options
InCloud SphereBackup1	InCloud Sphere	Backup	2017-12-15 17:11:33	Error	--	admin	Options
H3C CASInstant Recovery2	H3C CAS	Instant Recovery	2017-12-15 14:58:05	Stopped	--	admin	Options
Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	2017-12-15 14:21:45	Stopped	--	admin	Options
H3C CAS备份1	H3C CAS	Backup	2017-12-15 13:16:02	Error	--	admin	Options
VMware vSphereInstant Recovery1	VMware vSphere	Instant Recovery	2017-12-15 11:55:27	Stopped	--	admin	Options
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-15 11:47:07	Error	--	admin	Options

Tip: Click job name you can view the job details.

Click “+”, you can review the backup schedules of this job as below:

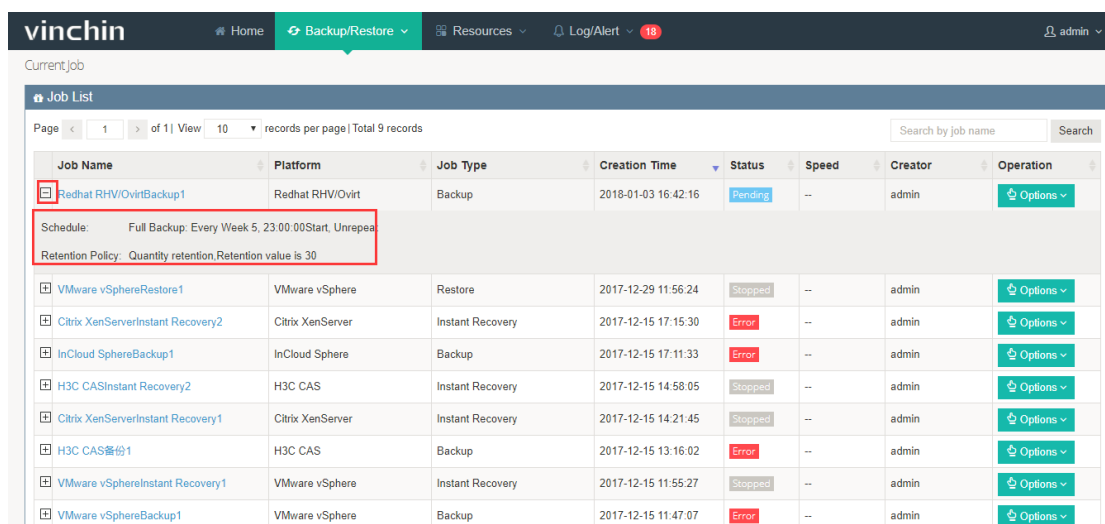

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Pending	--	admin	Options
Schedule: Full Backup: Every Week 5, 23:00:00Start, Unrepea Retention Policy: Quantity retention, Retention value is 30							
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-29 11:56:24	Stopped	--	admin	Options
Citrix XenServerInstant Recovery2	Citrix XenServer	Instant Recovery	2017-12-15 17:15:30	Error	--	admin	Options
InCloud SphereBackup1	InCloud Sphere	Backup	2017-12-15 17:11:33	Error	--	admin	Options
H3C CASInstant Recovery2	H3C CAS	Instant Recovery	2017-12-15 14:58:05	Stopped	--	admin	Options
Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	2017-12-15 14:21:45	Stopped	--	admin	Options
H3C CAS备份1	H3C CAS	Backup	2017-12-15 13:16:02	Error	--	admin	Options
VMware vSphereInstant Recovery1	VMware vSphere	Instant Recovery	2017-12-15 11:55:27	Stopped	--	admin	Options
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-15 11:47:07	Error	--	admin	Options

Click 【Options】, you will see operation options including Activate Incr.(Incremental Backup), Activate Diff.(Differential Backup), Activate Full(Full Backup) and Stop. Choose one option to start or stop the backup job.

The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', 'Log/Alert', and a user profile 'admin'. The 'Current Job' section is empty. Below is the 'Job List' table with 9 records. The first job, 'Redhat RHV/OvirtBackup1', is in 'Pending' status. The 'Options' button for this job is highlighted with a red box. The table columns are: Job Name, Platform, Job Type, Creation Time, Status, Speed, Creator, and Operation.

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Pending	--	admin	Options
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-29 11:56:24	Stopped	--	admin	Activate Incr.
Citrix XenServerInstant Recovery2	Citrix XenServer	Instant Recovery	2017-12-15 17:15:30	Error	--	admin	Activate Diff.
InCloud SphereBackup1	InCloud Sphere	Backup	2017-12-15 17:11:33	Error	--	admin	Activate Full
H3C CASInstant Recovery2	H3C CAS	Instant Recovery	2017-12-15 14:58:05	Stopped	--	admin	Stop
Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	2017-12-15 14:21:45	Stopped	--	admin	Options
H3C CAS备份1	H3C CAS	Backup	2017-12-15 13:16:02	Error	--	admin	Options
VMware vSphereInstant Recovery1	VMware vSphere	Instant Recovery	2017-12-15 11:55:27	Stopped	--	admin	Options
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-15 11:47:07	Error	--	admin	Options


Note: If you choose incremental backup or differential backup, the backup job will automatically change to full backup when the first time you perform it. After then the backup jobs will be repeated time by time as scheduled.

If you want to stop this backup job, click **【Stop】** button. After stopped, if you want to re-activate this backup job, you can click **【Options】** → **【Enable Schedule】** to backup as scheduled if necessary or Activate, edit, delete the backup job according to your demands.

The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', 'Log/Alert', and a user profile 'admin'. The 'Current Job' section is empty. Below is the 'Job List' table with 9 records. The first job, 'Redhat RHV/OvirtBackup1', is in 'Stopped' status. The 'Options' button for this job is highlighted with a red box. The 'Enable Schedule' option is selected. The table columns are: Job Name, Platform, Job Type, Creation Time, Status, Speed, Creator, and Operation.

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Stopped	--	admin	Options
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-29 11:56:24	Stopped	--	admin	Enable Schedule
Citrix XenServerInstant Recovery2	Citrix XenServer	Instant Recovery	2017-12-15 17:15:30	Error	--	admin	Activate Incr.
InCloud SphereBackup1	InCloud Sphere	Backup	2017-12-15 17:11:33	Error	--	admin	Activate Diff.
H3C CASInstant Recovery2	H3C CAS	Instant Recovery	2017-12-15 14:58:05	Stopped	--	admin	Activate Full
Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	2017-12-15 14:21:45	Stopped	--	admin	Edit
H3C CAS备份1	H3C CAS	Backup	2017-12-15 13:16:02	Error	--	admin	Delete
VMware vSphereInstant Recovery1	VMware vSphere	Instant Recovery	2017-12-15 11:55:27	Stopped	--	admin	Options
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-15 11:47:07	Error	--	admin	Options

When the job in a running status, click the job name, you will see the job running details page as below:

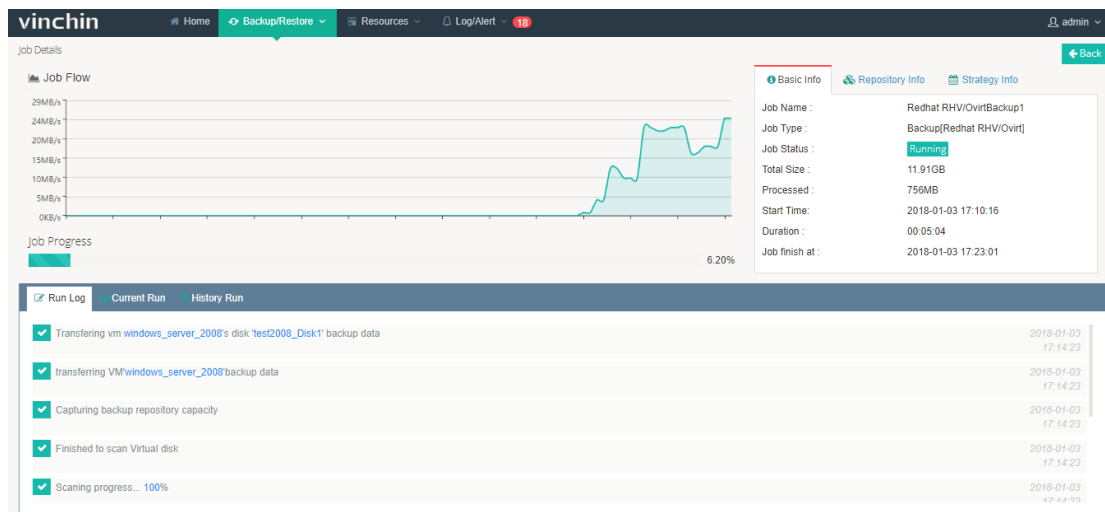

On the top right are 3 main columns showing the job configuration info as below:

Basic Info	Repository Info	Strategy Info
Job Name : Redhat RHV/OvirtBackup1 Job Type : Backup[Redhat RHV/Ovirt] Job Status : Running Total Size : 11.91GB Processed : 2.2GB Start Time : 2018-01-03 17:10:16 Duration : 00:06:22 Job finish at : 2018-01-03 17:24:01	Backup Node : localhost.localdomain 192.168.30.31 Repository : Local Disk1(Local Disk) Capacity: 99.95GB, Free space: 90.72GB Data Deduplication : OFF Compression : ON Speed-up Backup : ON	Creation Time : 2018-01-03 16:42:16 Next Run : 2018-01-05 23:00:00 Full Backup : Every Friday, 23:00:00Start, Unrepeat Incremental Backup : None Differential Backup : None Retention Policy : Quantity retention.Retention value is 30 Data Encryption : OFF

On the bottom left are another 3 main columns showing Run Log, Current Run and history Run.

Run Log	Current Run	History Run
transferring VM'windows_server_2008'backup data Capturing backup repository capacity Finished to scan Virtual disk Scanning progress... 100% Capturing the disk bitmap, progress: 100% Scanning the valid data of VM 'windows_server_2008', disk 'test2008_Disk1' Creating vm 'windows_server_2008' snapshot Activating the backup job		

Job Logs: Records the current backup job running logs.

Run Log Current Run History Run									
No.	VM Name	Job Type	Total	Processed	Backed up	Speed	Progress	Status	Description
1	windows_server_2008	FullBackup	11.91GB	3.4GB	1.93GB	5.6MB/s	28.54%	Running	

Current Run: Shows all the virtual machines under the current backup job. Details include VM Name, Backup Type (Full Backup/Incremental Backup/Differential Backup), VM Size (VM valid data size), Processed Size (The size that Vinchin Backup & Recovery system has processed), Backup Size (The real size that has been stored to the backup repository) , Processing Rate, Progress, Status etc.

Run Log Current Run History Run									
Page 1 of 1 View 10 records per page Total 3 records									
No.	Job Type	Status	Total	Processed	Backed up	Start Time	End Time		
1	IncrementalBackup	Success	2MB	2MB	532.96KB	2017-12-26 10:54:46	2017-12-26 10:55:10		
2	IncrementalBackup	Success	4MB	4MB	1.13MB	2017-12-26 10:54:09	2017-12-26 10:54:33		
3	FullBackup	Success	8.05GB	8.05GB	4.39GB	2017-12-26 10:45:55	2017-12-26 10:53:57		

History: Reviews all the history operations of this backup job, details including backup type, status, backed up size, backup start time & end time etc.

Note:

- If the backup job has been set as "Backup at once", after job running finished, you can find it in the History Job list.
- If the backup job has been set as "Backup as scheduled", the job will remain in the Current Job list and continue backup job as scheduled.
- Once enable "Deduplication & Compression" when creating backup job, the "Backed up" size will be smaller.

3.3.3. VM Restore


3.3.3.1. Create Restore Job

3.3.3.1.1. Restore Point

Click **【Backup/Restore】** - **【VM Restore】**, you are coming to the restore job creating page.


Select a target VM restore point under the RHV/Ovirt which you want to restore as below.

You can quickly find the target restore point by specifying backup node and selecting “Group by VMs” or “Group by Restore Points” accordingly.

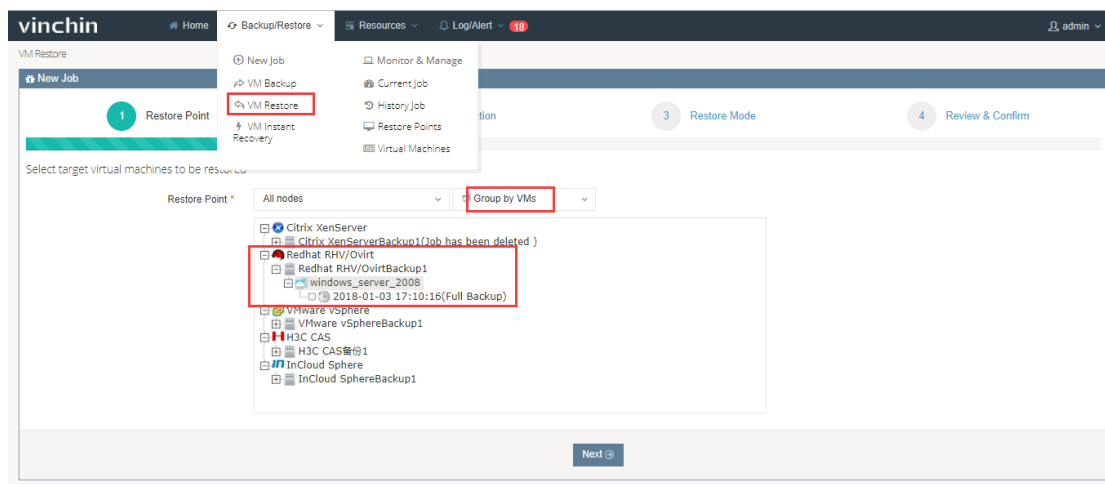

A Restore Point has been marked with the name of a backup job. Each backup job name has displayed the backup time point and backup type (full backup/incremental backup/differential backup) for users to recognize and select.


Choose one restore point under each virtual machine, click **【Next】**

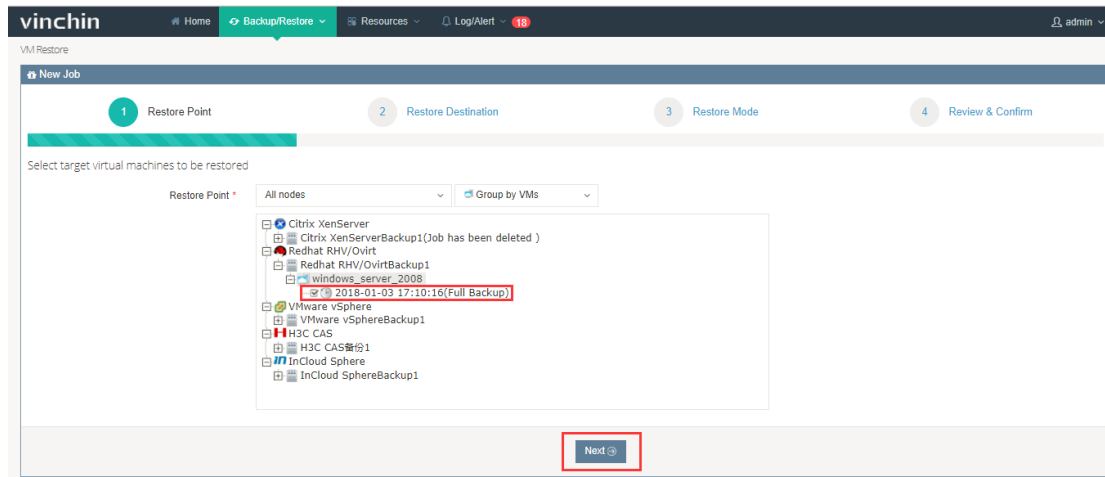

Note: You can choose multiple virtual machines to restore at the same time. If one virtual machine has multiple restore points, you can only choose one point to restore at once.

3.3.3.1.2. Restore Destination

- 1) Select Target Host: Select a target host where you want to run the restored VMs as below:

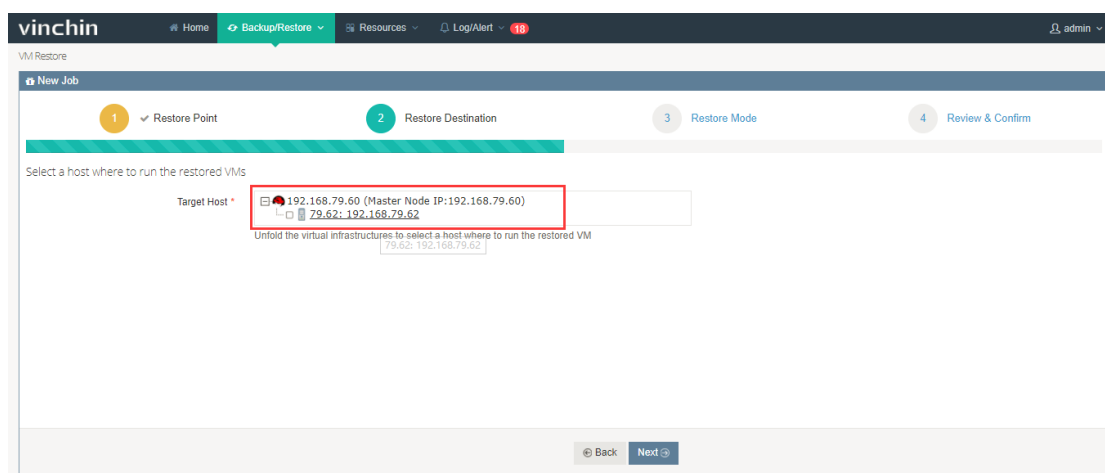

After restored, the VMs will run on the selected host.

- 2) Unified Configurations: Enable this function you can set multiple VMs' storage, network information, and choose whether to power on the target VM(s) after restoring as below:

The screenshot shows the 'VM Restore' interface with a progress bar indicating four steps: 1. Restore Point, 2. Restore Destination (current), 3. Restore Mode, and 4. Review & Confirm. Under 'Restore Destination', there is a 'Target Host' field with IP addresses. Below it, the 'Unified Configurations' checkbox is checked and labeled 'On'. Other options include 'Restore to', 'Connect to', and 'Power on target VM after restoring' (currently 'Off'). A note states: 'Please keep the original backed up VM poweroff after enable this function.' At the bottom, there is a 'VM Configurations' section with a list of VMs, including 'windows_server_2008_2018-01-03 17:10:16'.

- 3) Single VM Configurations: Select a target VM, you can rename it and pre-set its storage, network information details as below:

The screenshot shows the 'VM Configurations' section for a specific VM. The 'Restored VM Name' field is highlighted with a red box and contains the text 'windows_server_2008_2018_01_03_17_10_16'. The 'Power on the VM after restoring' checkbox is also highlighted with a red box and is currently checked (On). The 'Name&Status' tab is selected, and there are links for 'Storage' and 'Network' configuration. A note at the bottom states: 'Unfold any VM to modify corresponding configuration info'.

Note: When renaming the VM, make sure there's no special characters. Any combination of letters, numbers and underscore characters are recommended.

VM Configurations * windows_server_2008_2018-01-03 17:10:16

Name&Status

Storage

Network

VM Disk	Total Size	Restore To
test2008_Disk1	20GB	Auto-select

Unfold any VM to modify corresponding configuration info

Note: If choose Auto-select in the "Storage", the system will automatically choose the biggest storage space. If all the storages are out of free space, the restore job will fail, and system will remind insufficient space.

vinchin Home Backup/Restore Resources Log/Alert admin

host.66.com
host.67.com
192.168.101.69(Unauthorized)
192.168.64.207(Unauthorized)
6.7vcenter(192.168.101.72)
192.168.101.70
192.168.101.71

Expand the virtual infrastructures to select a host where to run the restored VM

Unified Configurations * Off

VM Configurations * centos7_3_2123_2018-06-04 11:04:50

Name&Status

Storage

Network

Disk selected	VM Disk	Total Size	Restore To	Disk Type Settings
☒	[iscsi_200GB] centos7_3_2123/centos7_3_2123_0.vmdk	8GB	Aut	Same as sr
☐	[iscsi_200GB] centos7_3_2123/centos7_3_2123_1.vmdk	2GB	Aut	Same as sr

Expand any VM to modify corresponding configuration info

Back Next

When a virtual machine has multiple disks, you can choose individual disks to restore without having to restore all the disks on the virtual machine by click [v].

You can also choose where to connect the VM network interface to after restoring.

VM Configurations * windows_server_2008_2018-01-03 17:10:16

Name&Status

Storage

Network

VM Network Interface	MAC Address	Remain MAC	Connect To
nic1	00:1a:4a:16:01:52	☐	Auto-select

Unfold any VM to modify corresponding configuration info

Note: A RHV cluster environment management platform normally includes two network interface: management interface and data interface, it is better manually select an

interface to connect the VM network interface, "Auto-select" is not recommended.

Warning: The RHV platform does not support two VMs sharing one MAC address. Please ensure the original VM has been deleted before you tick "Remain MAC".

3.3.3.1.3. Restore Strategy

Choose "Restore at once" or Restore as scheduled" as below:

The screenshot shows the 'VM Restore' interface in the Vinchin console. The 'New Job' section has four steps: 1. Restore Point, 2. Restore Destination, 3. Restore Mode, and 4. Review & Confirm. Step 3 is currently active. Below the steps, there is a section titled 'Set up restore strategies for the restore job'. Under 'Restore Mode', a dropdown menu is open, showing three options: 'Restore at once' (selected), 'Restore at once', and 'Restore as scheduled'.

If choosing "Restore at once", the restore job will start running after created.

If choosing "Restore as scheduled", you need to set restore schedules as below. After done, the job will run as scheduled.

The screenshot shows the 'VM Restore' interface in the Vinchin console, specifically the 'Restore Mode' step. The 'Restore Mode' dropdown is set to 'Restore as scheduled'. Below it, the 'Schedule' section is expanded, showing a 'Restore Strategy (Every Friday, 23:00:00Start, Unrepeat)'. The 'Every Week' option is selected. The 'Every Week' section shows a calendar grid with 'Friday' selected. The 'Start Time' is set to '23:00:00' and the 'Repeat' option is set to 'OFF'.

Note: Restore as schedule is not recommended if no special circumstances, because restoring too many VMs will occupy productive resources.

3.3.3.1.4. Review & Confirm

After finish, you are able to review and confirm the settings. Click **【Submit】** if correct, the restore job creation will be completed.

vinchin Home Backup/Restore Resources Log/Alert 18 admin

1 Restore Point 2 Restore Destination 3 Restore Mode 4 Review & Confirm

Please review and confirm your configurations.

Job Name : Redhat RHV/OvirtRestore1
Default job name could be modified.

Restore Point

Restore point info : Redhat RHV/OvirtRestore
192.168.79.60/Data_Center/cluster/Cluster_TEST/vm/windows_server_2008(2018-01-03 17:10:16)

Restore Destination

Restore Destination : Restore to 192.168.79.60 (Master Node IP: 192.168.79.60) -> 79.62: 192.168.79.62
The restored VMs'names are:
windows_server_2008_2018_01_03_17_10_16

Restore Mode

Restore Mode : Restore as scheduled : Restore Strategy (Every Friday, 23:00:00Start, Unrepeat)


Back Submit

Note:

- You can rename the restore job.
- Make sure all the settings are correct before submitting.
- If you have chosen "Restore at once", the restore job will start running once you submit the job.


3.3.3.2. Perform Restore Job

After creating a new restore job, you will see this job in the “Current Job List” as below:

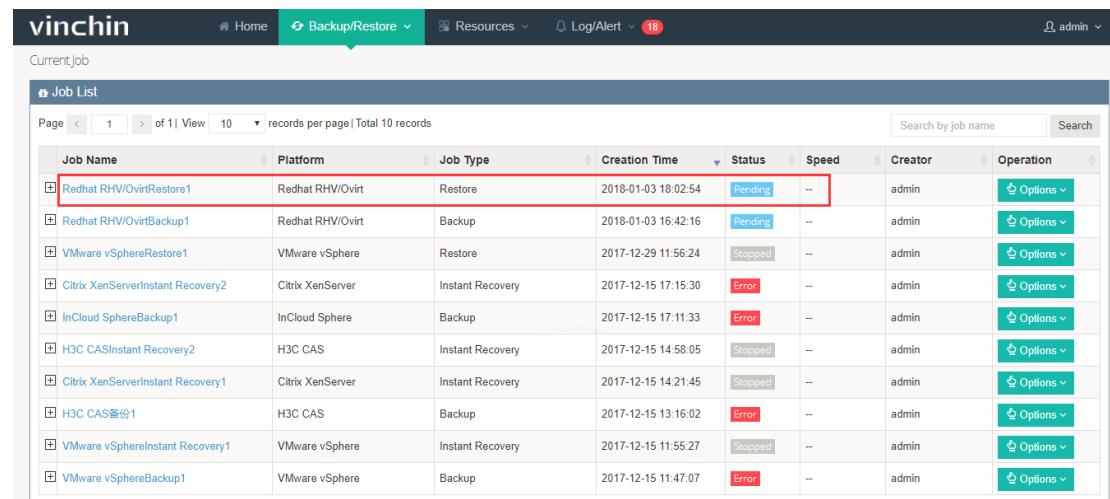

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtRestore1	Redhat RHV/Ovirt	Restore	2018-01-03 18:02:54	Pending	--	admin	Options
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Pending	--	admin	Options
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-29 11:56:24	Stopped	--	admin	Options
Citrix XenServerInstant Recovery2	Citrix XenServer	Instant Recovery	2017-12-15 17:15:30	Error	--	admin	Options
InCloud SphereBackup1	InCloud Sphere	Backup	2017-12-15 17:11:33	Error	--	admin	Options
H3C CASInstant Recovery2	H3C CAS	Instant Recovery	2017-12-15 14:58:05	Stopped	--	admin	Options
Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	2017-12-15 14:21:45	Stopped	--	admin	Options
H3C CAS备份1	H3C CAS	Backup	2017-12-15 13:16:02	Error	--	admin	Options
VMware vSphereInstant Recovery1	VMware vSphere	Instant Recovery	2017-12-15 11:55:27	Stopped	--	admin	Options
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-15 11:47:07	Error	--	admin	Options


Click “+”, you can review the restore schedules of this job as below (if you have set “Restore as scheduled”):

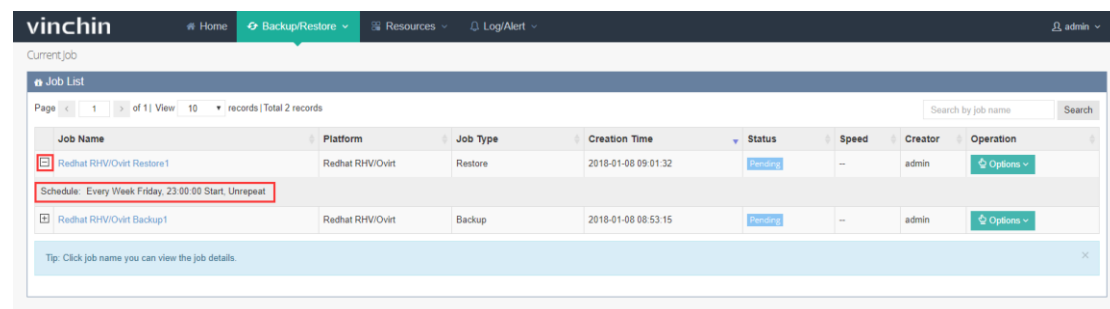

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/Ovirt Restore1	Redhat RHV/Ovirt	Restore	2018-01-08 09:01:32	Pending	--	admin	Options
Schedule: Every Week Friday, 23:00:00 Start, Unrepeat							
Redhat RHV/Ovirt Backup1	Redhat RHV/Ovirt	Backup	2018-01-08 08:53:15	Pending	--	admin	Options

Tip: Click job name you can view the job details.


Click **Options** - **Activate job** to start the restore job.

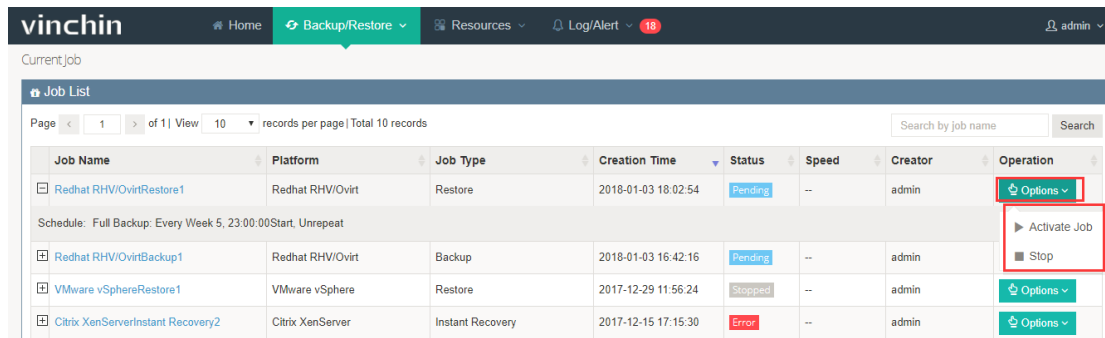

The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar includes Home, Backup/Restore (selected), Resources, Log/Alert (18), and a user profile (admin). The main section is titled 'Current Job' and contains a 'Job List' table. The table has columns: Job Name, Platform, Job Type, Creation Time, Status, Speed, Creator, and Operation. The first job, 'Redhat RHV/OvirtRestore1', is in a 'Pending' status. The 'Options' button for this job is highlighted, and a dropdown menu is shown with 'Activate Job' and 'Stop' options.


Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtRestore1	Redhat RHV/Ovirt	Restore	2018-01-03 18:02:54	Pending	--	admin	Options ▾ ▶ Activate Job ■ Stop
Schedule: Full Backup: Every Week 5, 23:00:00Start, Unrepeat							
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Pending	--	admin	
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-29 11:56:24	Stopped	--	admin	Options ▾
Citrix XenServerInstant Recovery2	Citrix XenServer	Instant Recovery	2017-12-15 17:15:30	Error	--	admin	Options ▾

If you want to stop this restore job, click **Stop** button. Click **Options** again, you can activate or delete this job as you want.

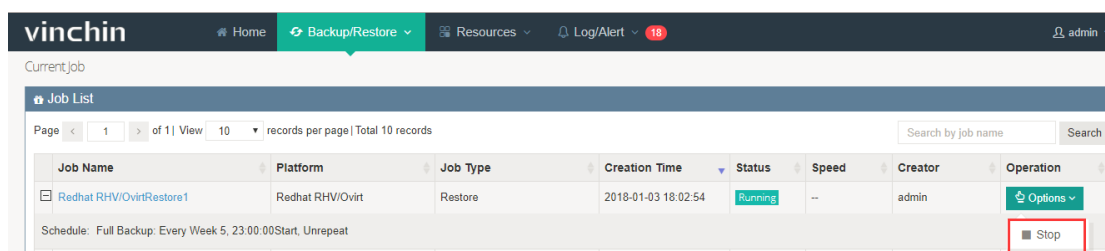

The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar is the same. The 'Job List' table shows the first job, 'Redhat RHV/OvirtRestore1', in a 'Running' status. The 'Stop' button in the 'Operation' column is highlighted.


Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtRestore1	Redhat RHV/Ovirt	Restore	2018-01-03 18:02:54	Running	--	admin	Options ▾ ■ Stop
Schedule: Full Backup: Every Week 5, 23:00:00Start, Unrepeat							
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Pending	--	admin	

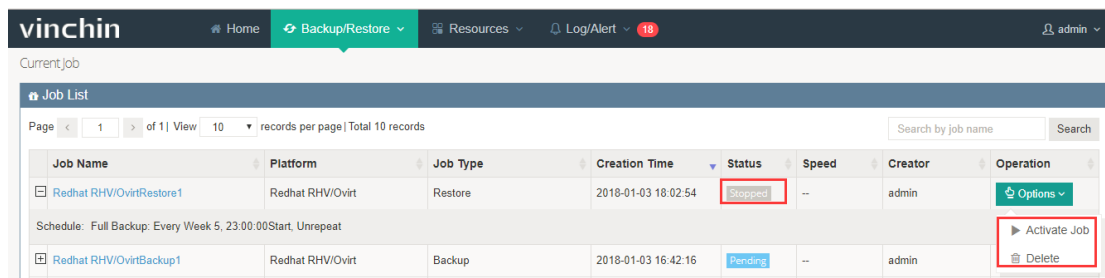

The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar is the same. The 'Job List' table shows the first job, 'Redhat RHV/OvirtRestore1', in a 'Stopped' status. The 'Options' button for this job is highlighted, and a dropdown menu is shown with 'Activate Job' and 'Delete' options.


Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtRestore1	Redhat RHV/Ovirt	Restore	2018-01-03 18:02:54	Stopped	--	admin	Options ▾ ▶ Activate Job ■ Delete
Schedule: Full Backup: Every Week 5, 23:00:00Start, Unrepeat							
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Pending	--	admin	

When the job is in a running status, click the job name, you will see the job details page as below:

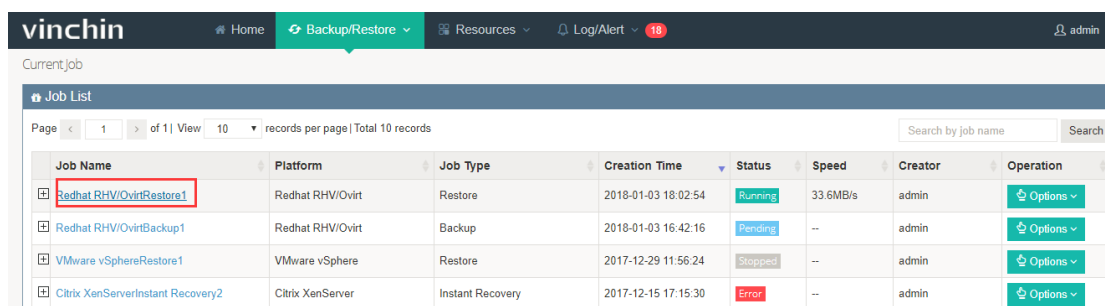

The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar is the same. The 'Job List' table shows the first job, 'Redhat RHV/OvirtRestore1', in a 'Running' status. The job name is highlighted.

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtRestore1	Redhat RHV/Ovirt	Restore	2018-01-03 18:02:54	Running	33.6MB/s	admin	Options ▾
Redhat RHV/OvirtBackup1	Redhat RHV/Ovirt	Backup	2018-01-03 16:42:16	Pending	--	admin	Options ▾
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-29 11:56:24	Stopped	--	admin	Options ▾
Citrix XenServerInstant Recovery2	Citrix XenServer	Instant Recovery	2017-12-15 17:15:30	Error	--	admin	Options ▾

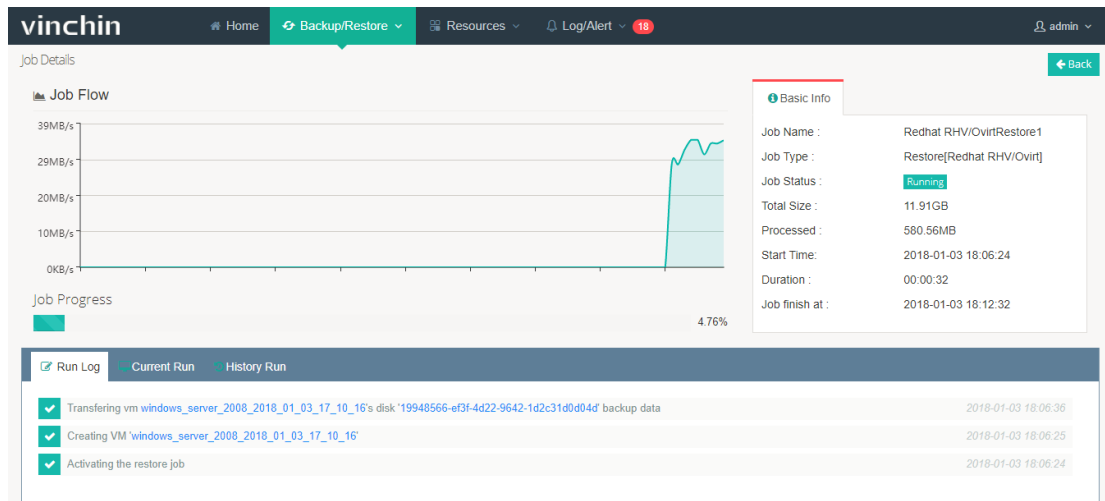

Job Logs: Records the current restore job running progress.

No.	VM Name	Job Type	Total	Processed	Recovered	Speed	Progress	Status	Description
1	windows_server_2008	Restore	11.91GB	2.59GB	2.59GB	34.67MB/s	21.78%	Running	

Current Run: Shows the current job details including VM Name, Job Type (Restore), Total (VM total size), Processed (Processed size), Recovered (The real size that has been restored) , Speed(Data transfer speed), Progress(Job running progress), Status etc.

No.	Job Type	Status	Total	Processed	Recovered	Start Time	End Time
1	Restore	Suspended	11.91GB	60MB	60MB	2018-01-03 18:05:17	2018-01-03 18:05:41

History: If you've set "Restore at once" for this restore job, this job will be auto-deleted after completing restoring and shows no data. If you've set " Restore as scheduled" ,you can review all the history operations of this restore job.

Warning: During a restore process, do not power on the VM before the restore job is completed, otherwise the VM data will be damaged or lost.

3.3.4. VM Instant Recovery


VM Instant Recovery helps to recover TB sized VMs in 15 secs, all business recovery in 1 min, minimized the break-off time of critical businesses.

When creating a VM Instant Recovery job, make sure there's available restore point. If no, please backup target VM(s) with Vinchin Backup & Recovery system first.

3.3.4.1. Create Instant Recovery Job


Click **【VM Instant Recovery】** you are coming to the instant recovery new job adding page.

Select a target VM restore point under the RHV/Ovirt which you want to instantly recover as below. You can quickly find the target restore point by specifying backup node and selecting "Group by VMs" or "Group by Restore Points" accordingly.

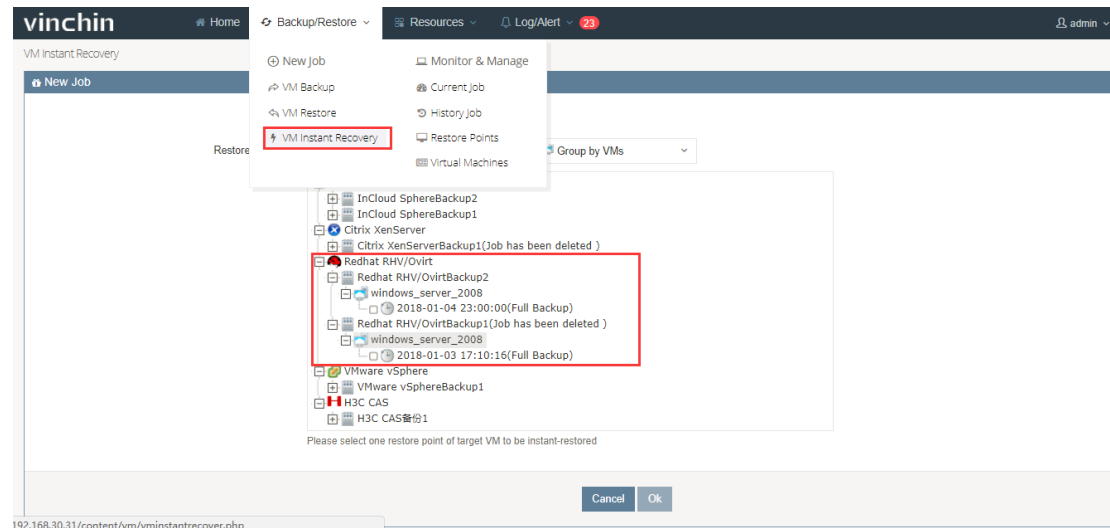

Note: You can only select one VM restore point for each instant recovery job.

Select a host as the restore destination where you want to run the instantly recovered VMs, and select the backup node IP/domain where the backup repository was mounted.

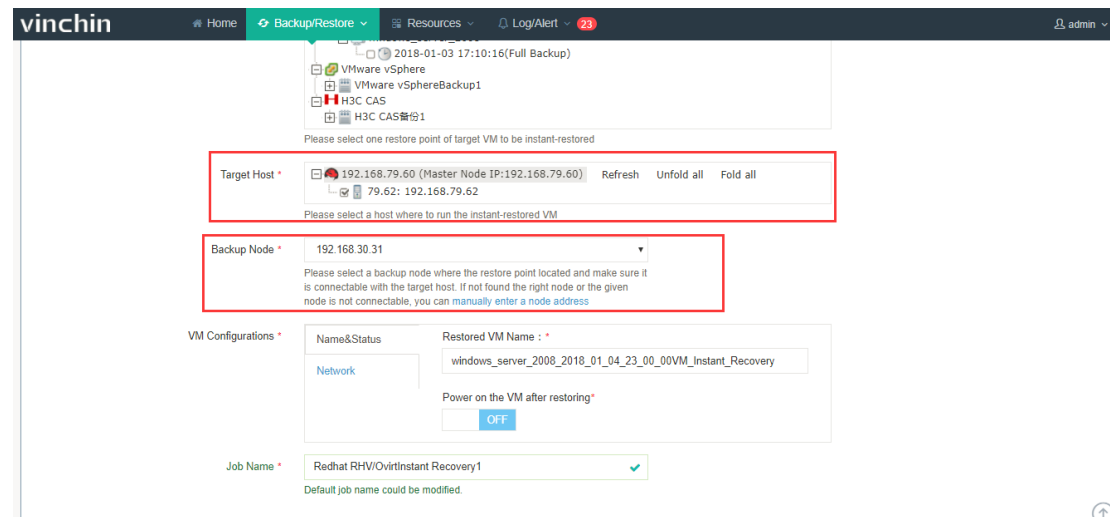

You can also preset the restored VMs' name, network connection and whether to power on the VM after restoring.

VM Configurations *

Name&Status

Restored VM Name : *

Network

Power on the VM after restoring*

OFF

VM Configurations *

Name&Status

Network

VM Network Interface	MAC Address	Remain MAC	Connect To
nic1	00:1a:4a:16:01:52	☐	Auto-select
			Auto-select
			ovirtmgmt

You can modify the job name as below:

vinchin

Home Backup/Restore Resources Log/Alert 23 admin

2018-01-03 17:10:16(Full Backup)

VMware vSphere

VMware vSphereBackup1

H3C CAS

H3C CAS备份1

Please select one restore point of target VM to be instant-restored

Target Host *

192.168.79.60 (Master Node IP:192.168.79.60) Refresh Unfold all Fold all

79.62: 192.168.79.62

Please select a host where to run the instant-restored VM

Backup Node *

192.168.30.31

Please select a backup node where the restore point located and make sure it is connectable with the target host. If not found the right node or the given node is not connectable, you can manually enter a node address

VM Configurations *

Name&Status

Network

VM Network Interface	MAC Address	Remain MAC	Connect To
nic1	00:1a:4a:16:01:52	☐	Auto-select

Job Name *

Redhat RHV/OvirtInstant Recovery1

Default job name could be modified.

Cancel Ok

Click **【OK】** you are coming to the Current Job List as below:

vinchin Home Backup/Restore Resources Log/Alert 23 admin

Current Job

Job List

Page 1 of 2 View 10 records per page Total 15 records Search by job name Search

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtInstant Recovery1	Redhat RHV/Ovirt	Instant Recovery	2018-01-05 10:48:23	Pending	--	admin	Options
InCloud SphereInstant Recovery1	InCloud Sphere	Instant Recovery	2018-01-04 17:33:55	Running	--	admin	Options
InCloud SphereRestore1	InCloud Sphere	Restore	2018-01-04 17:27:00	Pending	--	admin	Options
InCloud SphereBackup2	InCloud Sphere	Backup	2018-01-04 17:11:01	Pending	--	admin	Options
VMware vSphereRestore3	VMware vSphere	Restore	2018-01-04 16:37:53	Pending	--	admin	Options
Redhat RHV/OvirtBackup2	Redhat RHV/Ovirt	Backup	2018-01-04 16:24:58	Pending	--	admin	Options
H3C CASBackup1	H3C CAS	Backup	2018-01-04 11:10:31	Stopped	--	admin	Options
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-29 11:56:24	Stopped	--	admin	Options
Citrix XenServerInstant Recovery2	Citrix XenServer	Instant Recovery	2017-12-15 17:15:30	Error	--	admin	Options
InCloud SphereBackup1	InCloud Sphere	Backup	2017-12-15 17:11:33	Pending	--	admin	Options

Tip: Click job name you can view the job details.

Copyright © 2017 Vinchin @version@

Operation details please refer to "chapter 3.3.3.VM Restore".

3.3.4.2. Perform Instant Recovery Job

Click **【Activate】** to activate the Instant Recovery job and click job name to view the job running details as below:

vinchin Home Backup/Restore Resources Log/Alert 23 admin


Current Job

Job List

Page 1 of 2 View 10 records per page Total 15 records Search by job name Search

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtInstant Recovery1	Redhat RHV/Ovirt	Instant Recovery	2018-01-05 10:48:23	Pending	--	admin	Options Activate Job
InCloud SphereInstant Recovery1	InCloud Sphere	Instant Recovery	2018-01-04 17:33:55	Running	--	admin	Options
InCloud SphereRestore1	InCloud Sphere	Restore	2018-01-04 17:27:00	Pending	--	admin	Options
InCloud SphereBackup2	InCloud Sphere	Backup	2018-01-04 17:11:01	Pending	--	admin	Options


The logs will display the instant recovery job progress.

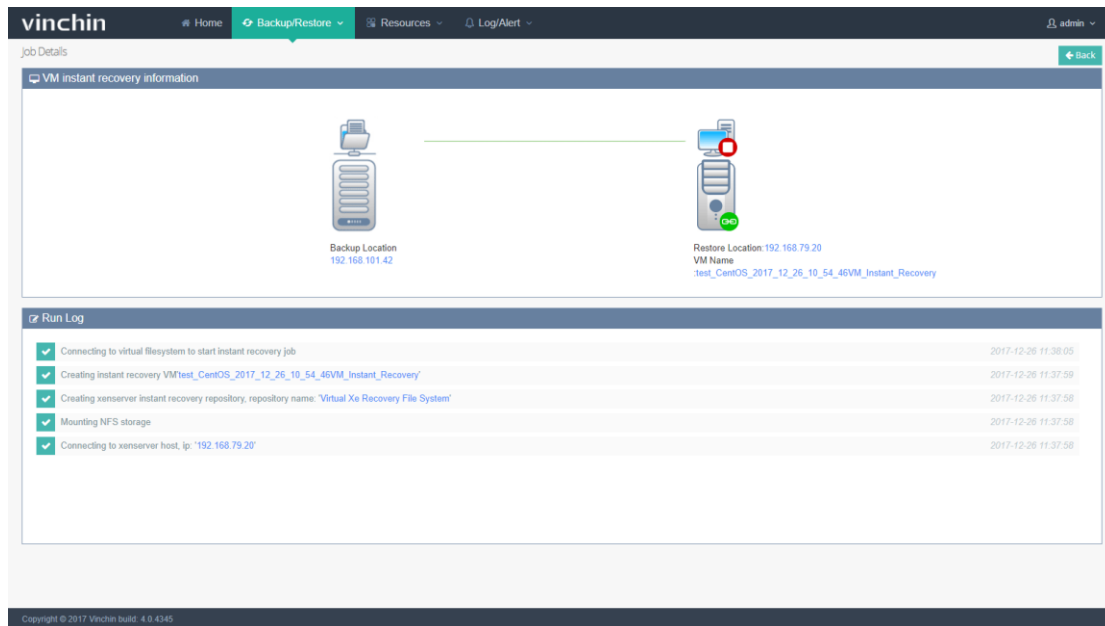

After the job is completed successfully, you can power on the recovered VMs.

If you have preset “power on the VM after restoring”, the VM will be powered on automatically once you activate the job in 15 seconds.


Log in to RHV management platform, you can see the instantly recovered VM is created in second level, and is workable:

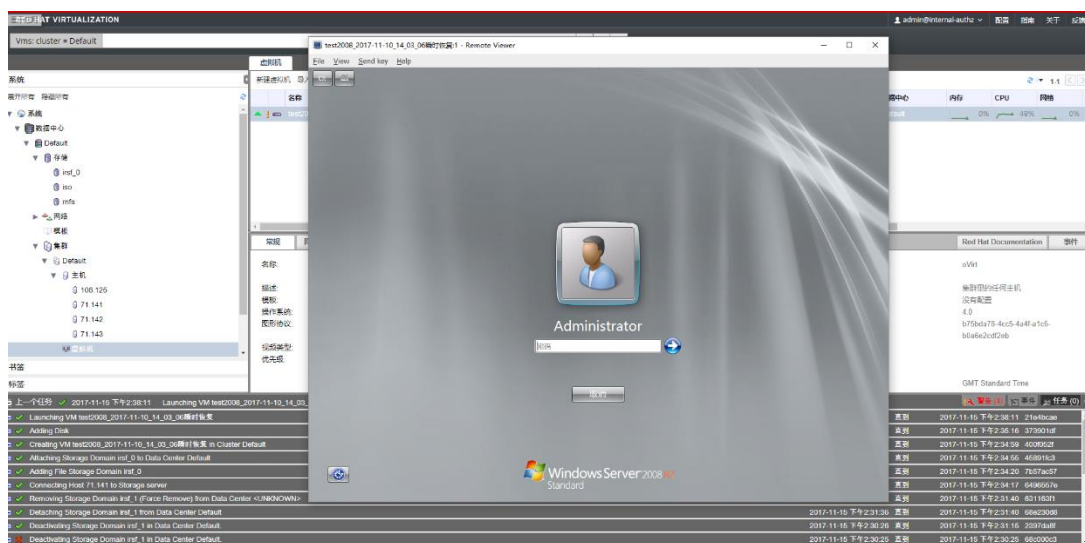

Warning: Do not create snapshot on the instantly recovered VM, or change any disk

information. Otherwise error will occur to the VM or it will crash.

If you stop the job when it's still running, the restored VM will be deleted. System will remind you as below:

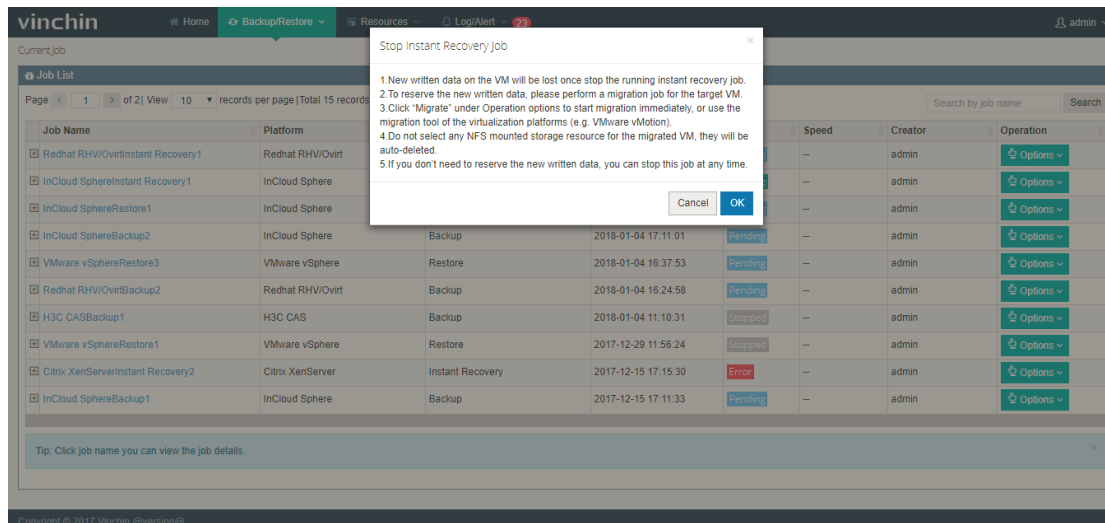


Warning: If you stop the instant recovery job, all the recovered VM information will be deleted (Including newly increased data during the instant recovery). If you need to reserve the recovered VM and its newly increased data, do not stop the job until you have migrated them to a safe place.

3.3.5. VM Migration

When performing instant recovery job, the VM and newly increased data can be synchronously migrated to the production area via Vinchin Backup & Recovery live-migration function without effecting the normal operation of your business.


Select a normally running instant recovery job and click **【Migration】** as below:

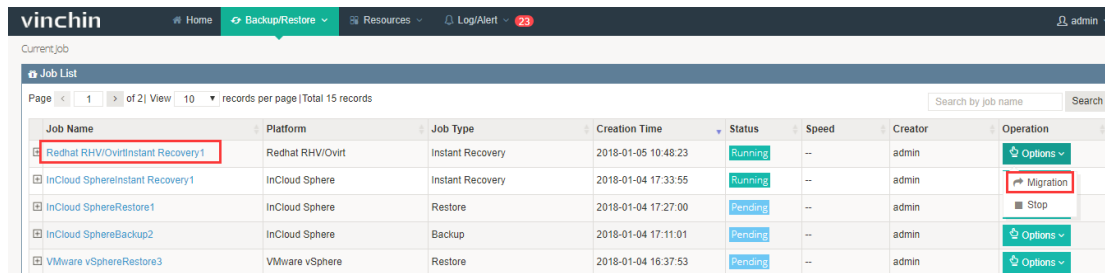

The screenshot shows the Vinchin Backup/Restore interface. At the top, there's a navigation bar with 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. Below this is a 'Job List' section with a search bar and a table of jobs. The table has columns for Job Name, Platform, Job Type, Creation Time, Status, Speed, Creator, and Operation. The first job, 'Redhat RHV/OvirtInstant Recovery1', is highlighted with a red box around its name and a red box around the 'Migration' button in the Operation column.

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
Redhat RHV/OvirtInstant Recovery1	Redhat RHV/Ovirt	Instant Recovery	2018-01-05 10:48:23	Running	--	admin	Options Migration
InCloud SphereInstant Recovery1	InCloud Sphere	Instant Recovery	2018-01-04 17:33:55	Running	--	admin	Options Stop
InCloud SphereRestore1	InCloud Sphere	Restore	2018-01-04 17:27:00	Pending	--	admin	Options
InCloud SphereBackup2	InCloud Sphere	Backup	2018-01-04 17:11:01	Pending	--	admin	Options
VMware vSphereRestore3	VMware vSphere	Restore	2018-01-04 16:37:53	Pending	--	admin	Options


You are coming to the “Create VM Migration Job” page, Select a host where you want to migrate the VM to.

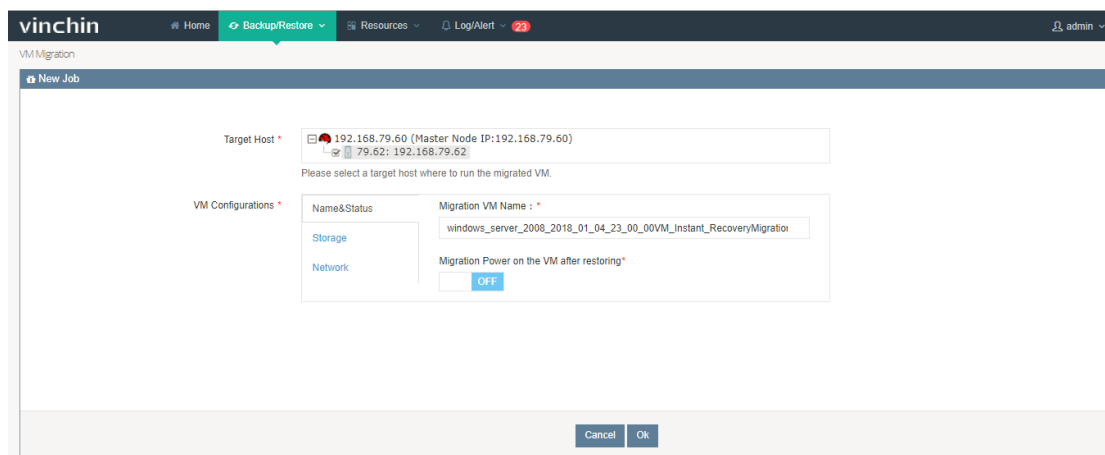

The screenshot shows the 'New Job' form for VM Migration. It has a 'Target Host' field with a dropdown menu showing '192.168.79.60 (Master Node IP:192.168.79.60)'. Below this is a 'Please select a target host where to run the migrated VM.' message. The 'VM Configurations' section has three tabs: 'Name&Status', 'Storage', and 'Network'. The 'Name&Status' tab is active, showing a 'Migration VM Name' field with the value 'windows_server_2008_2018_01_04_23_00_00VM_Instant_RecoveryMigration' and a 'Migration Power on the VM after restoring' checkbox set to 'OFF'. At the bottom are 'Cancel' and 'Ok' buttons.

VM Configurations:

(1) “Name & Status” allows you to preset the migrated VM name and whether to power on it after migrating as below:

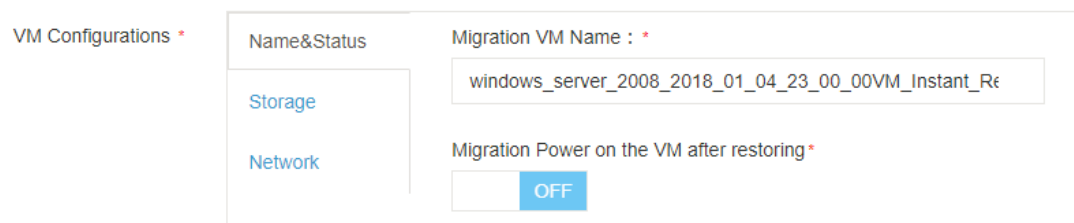

This is a close-up of the 'Name&Status' tab in the VM Configurations section. It shows the 'Migration VM Name' field with the value 'windows_server_2008_2018_01_04_23_00_00VM_Instant_RecoveryMigration' and the 'Migration Power on the VM after restoring' checkbox set to 'OFF'.

Note: Make sure there's no special characters, no more than 60 characters. Any combination of letters, numbers and underscore characters are recommended.

(2) If choose Auto-select in the “Storage”, the system will automatically choose the biggest storage space. If all the storages are out of free space, the restore job will fail,

and system will remind insufficient space.

VM Configurations *

Name&Status	VM Disk	Total Size	Restore To
Storage	test2008_Disk1	20GB	Auto-select
Network			Auto-select nfs_vm(netsfs, Capacity :499GB, Free Space:486GB)

(3) The “VM network interface” belongs to the backed up VM. This setup is to band it to a destination host’s network interface.

VM Configurations *

Name&Status	VM Network Interface	MAC Address	Remain MAC	Connect To
Storage	nic1	00:1a:4a:16:01:5a	☐	Auto-select
Network				Auto-select ovirtmgmt

Note: If tick “Remain MAC”, system will remain the MAC of original backed up VM, not the MAC of instant-recovered VM.

Click **【OK】** to start the migration job. You can view the migration job running details in the previous instant recovery job:

vinchin

Home Backup/Restore Resources Log/Alert admin

Backup Location: 192.168.101.42

Restore Location: 192.168.79.20

Restored VM name: test_CentOS_2017_12_26_10_54_46VM_Instant_Recovery

Migrated VM name: test_CentOS_2017_12_26_10_54_46VM_Instant_RecoveryMigration

Job Progress: 19.88%

Run Log Basic Info VM List

- Opening virtual disk 'test_CentOS_0_2017-12-26 11:46:33' 2017-12-26 11:46:41
- Migrating restore point data 2017-12-26 11:46:40
- Creating VM 'test_CentOS_2017_12_26_10_54_46VM_Instant_RecoveryMigration' 2017-12-26 11:46:33
- Capturing migration job size 2017-12-26 11:46:33
- Loading live migration job configuration information 2017-12-26 11:46:33

Copyright © 2017 Vinchin build: 4.0.4345


After migration completed, the migration job will automatically change back to **【Instant Recovery Job】** and this job is still in a running status. But the VM in this job is powered off and the business will be taken over by the migrated VM.

Warning: Do not power on the VM when it is being migrated, otherwise the VM will be damaged.

4. Monitor & Manage


4.1. Current Job

After creating a new job (backup/restore), you can view and manage the new created job in the current job page. All the basic information and status of the job will be shown in the current job list. You can activate, stop or delete the job accordingly. Click [Backup /Restore] – [Current Job] as below:

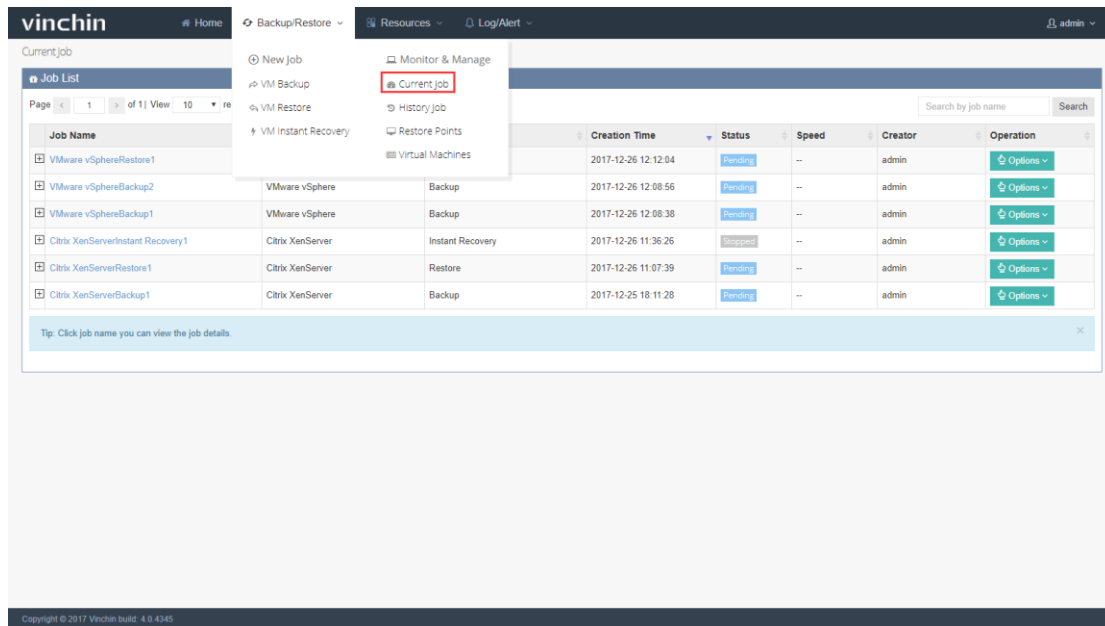

You can search the certain job by entering job name in the right top search bar.

Click [Options] to activate or stop the certain job.

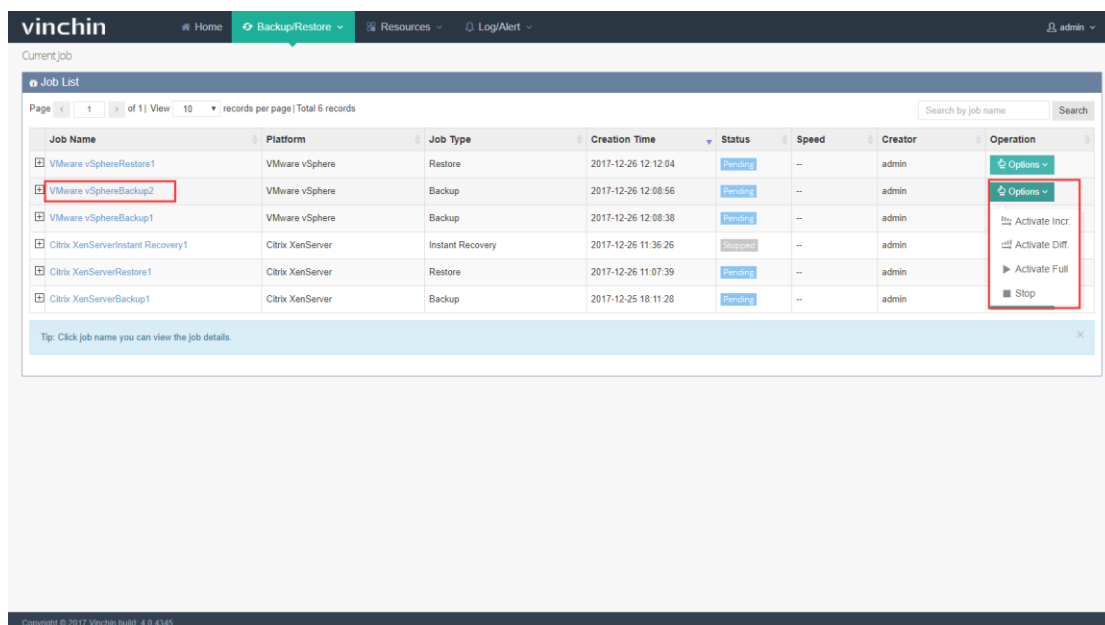

Click " + ", you can review the backup schedules of this job as below:

The screenshot shows the Vinchin Backup/Restore interface. The 'Job List' table contains the following data:

Job Name	Platform	Job Type	Creation Time	Status	Speed	Creator	Operation
VMware vSphereRestore1	VMware vSphere	Restore	2017-12-26 12:12:04	Pending	--	admin	Options
VMware vSphereBackup2	VMware vSphere	Backup	2017-12-26 12:08:56	Pending	--	admin	Options
VMware vSphereBackup1	VMware vSphere	Backup	2017-12-26 12:08:38	Pending	--	admin	Options
Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	2017-12-26 11:36:26	Stopped	--	admin	Options
Citrix XenServerRestore1	Citrix XenServer	Restore	2017-12-26 11:07:39	Pending	--	admin	Options
Citrix XenServerBackup1	Citrix XenServer	Backup	2017-12-25 18:11:28	Pending	--	admin	Options

Below the table, the schedule details for 'Citrix XenServerBackup1' are shown:

Schedule: Full Backup: Every Day 23:00:00Start, Unrepeat
Incremental Backup: Every Day 23:00:00Start, Unrepeat
Retention Policy: Days retention Retention value is 30

Click the job name, you will see the job running details page as below:

The screenshot shows the 'Job Details' page for 'Citrix XenServerBackup1'. The 'Job Flow' section displays a graph of data transfer speed over time, peaking at approximately 34MB/s. The 'Job Progress' section shows a progress bar at 9.59%.

The 'Run Log' section shows the following steps:

- Transferring VMTest CentOS backup data
- Starting data transmission
- Capturing backup repository capacity
- Capturing backup repository capacity
- Finished to scan Virtual disk
- Virtual disk size: '24.00 GB', disk block allocated number: '12288'
- Scanning the valid data of VM 'test Windows', disk 'test Windows 8'
- Finished to scan Virtual disk

The 'Basic Info' section provides the following details:

- Job Name: Citrix XenServerBackup1
- Job Type: Backup[Citrix XenServer]
- Job Status: Running
- Total Size: 8.05GB
- Processed: 790.19MB
- Start Time: 2017-12-26 10:45:55
- Duration: 00:00:52
- Job finish at: 2017-12-26 10:54:57

In the job running page, you can check the job current running details, as well as job

history running details.


Click the top right [Back], you can go back to the current job list.

If you preset the job as run at once, it will disappear from the current job list and system will remind you the job has been finished. You can find it from the History Job page.

If you preset the job as run as scheduled, it will stay in the current job list when first time job finished, and waiting for next run automatically.

4.2. History Job

Click [Backup/Restore] – [History Job], you are coming to the history job page. All the performed jobs will be listed here for you to review the history job running details and status. You can also delete any of the history jobs when necessary.

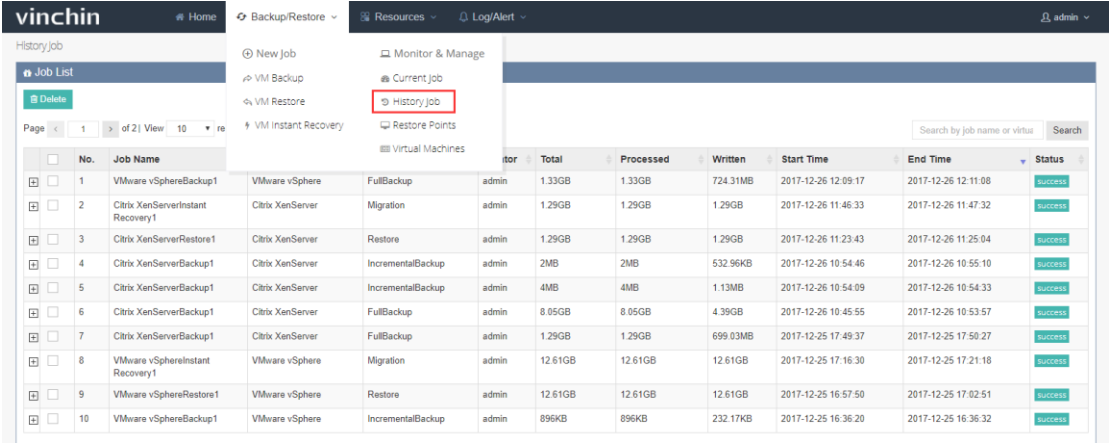


The screenshot displays the Vinchin web interface for the 'History Job' page. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The left sidebar shows a 'History Job' section with a 'Delete' button and a 'Job List' table. The main content area shows a table of 10 jobs. The 'History Job' menu item in the sidebar is highlighted with a red box.

No.	Job Name	Source	Target	User	Total	Processed	Written	Start Time	End Time	Status
1	VMware vSphereBackup1	VMware vSphere	FullBackup	admin	1.33GB	1.33GB	724.31MB	2017-12-26 12:09:17	2017-12-26 12:11:08	Success
2	Citrix XenServerInstant Recovery1	Citrix XenServer	Migration	admin	1.29GB	1.29GB	1.29GB	2017-12-26 11:46:33	2017-12-26 11:47:32	Success
3	Citrix XenServerRestore1	Citrix XenServer	Restore	admin	1.29GB	1.29GB	1.29GB	2017-12-26 11:23:43	2017-12-26 11:25:04	Success
4	Citrix XenServerBackup1	Citrix XenServer	IncrementalBackup	admin	2MB	2MB	532.96KB	2017-12-26 10:54:46	2017-12-26 10:55:10	Success
5	Citrix XenServerBackup1	Citrix XenServer	IncrementalBackup	admin	4MB	4MB	1.13MB	2017-12-26 10:54:09	2017-12-26 10:54:33	Success
6	Citrix XenServerBackup1	Citrix XenServer	FullBackup	admin	8.05GB	8.05GB	4.39GB	2017-12-26 10:45:55	2017-12-26 10:53:57	Success
7	Citrix XenServerBackup1	Citrix XenServer	FullBackup	admin	1.29GB	1.29GB	699.03MB	2017-12-25 17:49:37	2017-12-25 17:50:27	Success
8	VMware vSphereInstant Recovery1	VMware vSphere	Migration	admin	12.61GB	12.61GB	12.61GB	2017-12-25 17:16:30	2017-12-25 17:21:18	Success
9	VMware vSphereRestore1	VMware vSphere	Restore	admin	12.61GB	12.61GB	12.61GB	2017-12-25 16:57:50	2017-12-25 17:02:51	Success
10	VMware vSphereBackup1	VMware vSphere	IncrementalBackup	admin	896KB	896KB	232.17KB	2017-12-25 16:36:20	2017-12-25 16:36:32	Success

Note: If you delete any history job from the history job page, it will also be deleted from home page history job list.

4.3. Restore Points

After finishing a backup job successfully, you can view and manage the corresponding restore point from [Backup/Restore]-[Restore Points] as below:

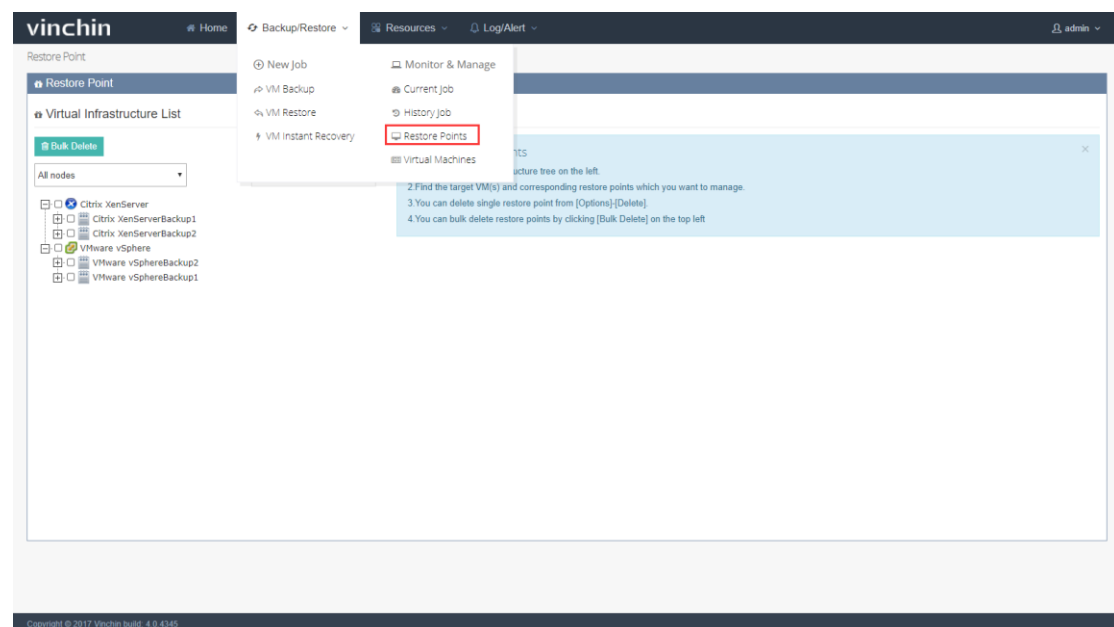

Expand the virtual infrastructure tree, find the target VM you have backed up and click on it, you will see all the restore points of this VM are listed in the right side of the page.

The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar includes Home, Backup/Restore (selected), Resources, and Log/Alert. The main content area is titled 'Restore Point' and contains two panels: 'Virtual Infrastructure List' on the left and 'Restore Point List' on the right.

The 'Virtual Infrastructure List' panel shows a tree view of nodes. Under 'test Windows', several backup points are listed, including '2017-12-26 10:45:55(Full Backup)' and '2017-12-26 10:54:09(Incremental Backup)'. A red box highlights the 'test Windows' node.

The 'Restore Point List' panel displays a table with 5 records. The table has columns: No., Time Point, Type, Total Size, Backup Size, Remark, Operation, and Mark. The 'Operation' column contains a green 'Options' button for each record. A note at the bottom states: 'Note: Once marked, the restore point will be reserved permanently.'

No.	Time Point	Type	Total Size	Backup Size	Remark	Operation	Mark
1	2017-12-26 14:14:18	Incremental Backup	4MB	1.13MB		Options	
2	2017-12-26 14:09:01	Full Backup	6.76GB	3.71GB		Options	☆
3	2017-12-26 10:54:46	Incremental Backup	2MB	532.96KB		Options	
4	2017-12-26 10:54:09	Incremental Backup	4MB	1.13MB		Options	
5	2017-12-26 10:45:55	Full Backup	6.76GB	3.71GB		Options	☆

Click [Options] under Operation, you will be able to remark or delete the point.

This screenshot shows the Vinchin Backup/Restore interface with a different set of backup points. The 'Virtual Infrastructure List' on the left shows a tree view with nodes like 'InCloud Sphere', 'Citrix XenServer', and 'VMware vSphere'. A red box highlights the 'VMware vSphere' node.

The 'Restore Point List' panel displays a table with 4 records. The 'Operation' column contains a green 'Options' button for each record. A red box highlights the 'Options' button for the first record. A note at the bottom states: 'Note: Once marked, the restore point will be reserved permanently.'

No.	Time Point	Type	Total Size	Backup Size	Remark	Operation	Mark
1	2017-12-24 23:00:04	Incremental Backup	0B	0B		Options	☆
2	2017-12-23 23:00:04	Incremental Backup	0B	0B		Remark	☆
3	2017-12-22 23:00:03	Full Backup	10.6GB	2.02GB		Delete	☆
4	2017-12-15 11:47:20	Full Backup	5.61GB	2.02GB		Options	☆

If you want to bulk delete multiple points, you can first select target points from the left tree, and click [Bulk Delete].

Restore Point

Virtual Infrastructure List

Bulk Delete

Restore Point List

Page 1 of 2 | View 10 records per page | Total 13 records

No.	Time Point	Type	Total Size	Backup Size	Remark	Operation	Mark
1	2018-01-04 23:00:00	Incremental Backup	0B	0B		Options	
2	2017-12-24 23:00:00	Incremental Backup	0B	0B		Options	
3	2017-12-23 23:00:00	Incremental Backup	0B	0B		Options	
4	2017-12-22 23:00:00	Incremental Backup	0B	0B		Options	
5	2017-12-21 23:00:00	Incremental Backup	0B	0B		Options	
6	2017-12-21 14:17:53	Full Backup	946.23MB	471.15MB		Options	☆
7	2017-12-20 23:00:00	Incremental Backup	0B	0B		Options	
8	2017-12-19 23:00:00	Incremental Backup	0B	0B		Options	
9	2017-12-18 23:00:00	Incremental Backup	0B	0B		Options	
10	2017-12-17 23:00:00	Incremental Backup	0B	0B		Options	

Note: Once marked, the restore point will be reserved permanently.

Note:


- Once deleted, the restore point is not recoverable.
- If you want to reserve the restore point, you can mark it, it will not be auto-deleted due to retention policy.
 - a) For XenServer、RedHat RHV/Ovirt 、InCloud and H3C CAS, only full backup restore point can be marked.
 - b) For VMware, you can mark full backup, incremental backup and differential backup restore point.
- To delete a restore point:
 - a) For VMware, to delete a full backup restore point, you need to delete corresponding incremental backup or differential backup restore point.
 - b) For XenServer、InCloud、RedHat RHVOvirt and H3C CAS when deleting full backup restore point, corresponding incremental backup or differential backup restore point will be deleted together with full backup restore point.

- Retention Policy for restore points:
 - a) For VMware, when activating retention policy, the incremental restore points will be merged first, after the incremental points are merged or deleted, the full backup point will be auto-deleted due to retention policy.
 - b) For XenServer、InCloud、RedHat RHVOvirt、H3C CAS, retention policy will delete full backup restore points accordingly, when deleting full backup restore points, corresponding incremental and differential backup restore points will be deleted together.

4.4. Backup Copy (For VMware Only)

Backup copy allows you to copy the restore points to another storage (either in the same host or a different host locally). To further improve the security of backup data.

Click [Backup Copy] as below, you are coming to the Backup Copy Job List page.

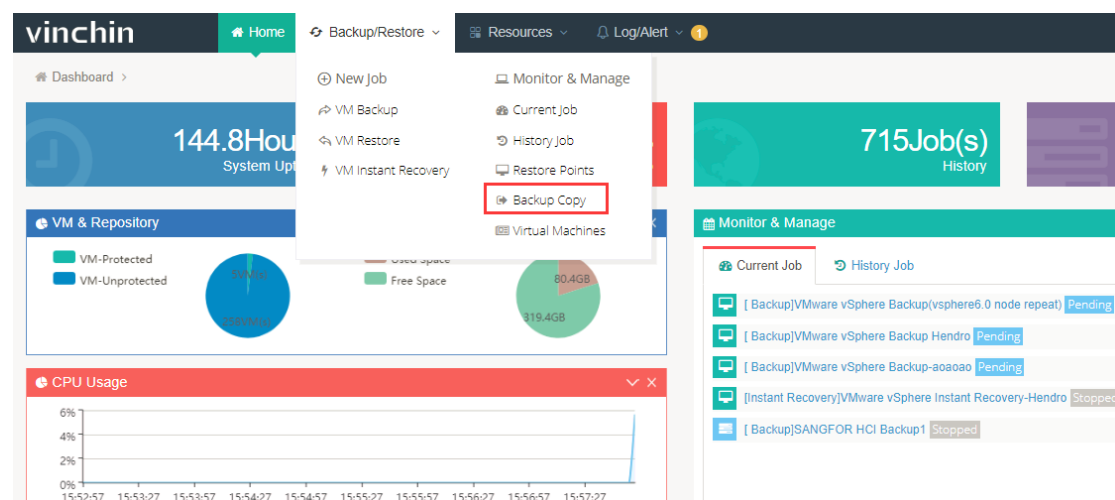


The screenshot shows the Vinchin Backup/Restore interface. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert'. The main header indicates the current action: 'Backup Copy Copy the backup data to the storage device'. Below this, there is a 'Backup Copy Job List' section with a '+ New Job' button. A pagination bar shows 'Page 1 of 1 | View 10 records | Total 2 records'. The job list table has columns for Job Name, Platform, Destination, Speed, Progress, Status, Creation Time, and Operation. Two jobs are listed: 'Backup Copy-2' and 'Backup Copy-a0a0a', both with a status of 'Stopped'.

Job Name	Platform	Destination	Speed	Progress	Status	Creation Time	Operation
Backup Copy-2	VMware vSphere	65.51Local Disk1(Local Disk, Capacity :199.9GB, Free Space:138.72GB)	--	--	Stopped	2018-06-05 15:44:20	Options
Backup Copy-a0a0a	VMware vSphere	65.51Local Disk1(Local Disk, Capacity :199.9GB, Free Space:138.72GB)	--	--	Stopped	2018-06-05 15:43:34	Options


Click [New Job] to create a Backup Copy job:

The screenshot shows the 'New Job' form in the Vinchin Backup/Restore interface. The top navigation bar is the same as the previous screenshot. The main header indicates the current action: 'Backup Copy Copy the VM backup data to the specified storage'. The form includes a 'Restore Point' section with a dropdown menu showing 'localhost.localdomain(192.168.65.51 2)' and a 'Group by VMs' dropdown. Below this is a list of restore points: 'VMware vSphere', 'VMware vSphere Backup(vsphere6.7 lan-free)(Job has been deleted)', 'VMware vSphere Backup- hendro(Job has been deleted)', and 'Backup Copy-2'. A 'Copy to destination storage' dropdown shows '65.51Local Disk1(Local Disk, Capacity :199.9GB, Free Space:138.72GB)'. The 'Job Name' field is set to 'Backup Copy1' with a note 'Default job name could be modified.' At the bottom right are 'Cancel' and 'OK' buttons.

Select the target restore points which you want to copy.

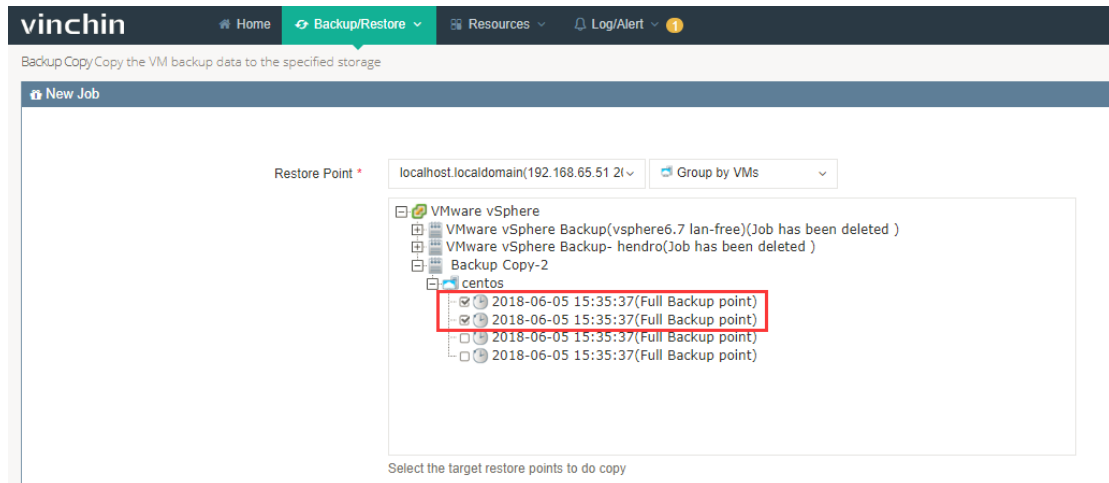

Select a destination storage where you want to store the backup copy.

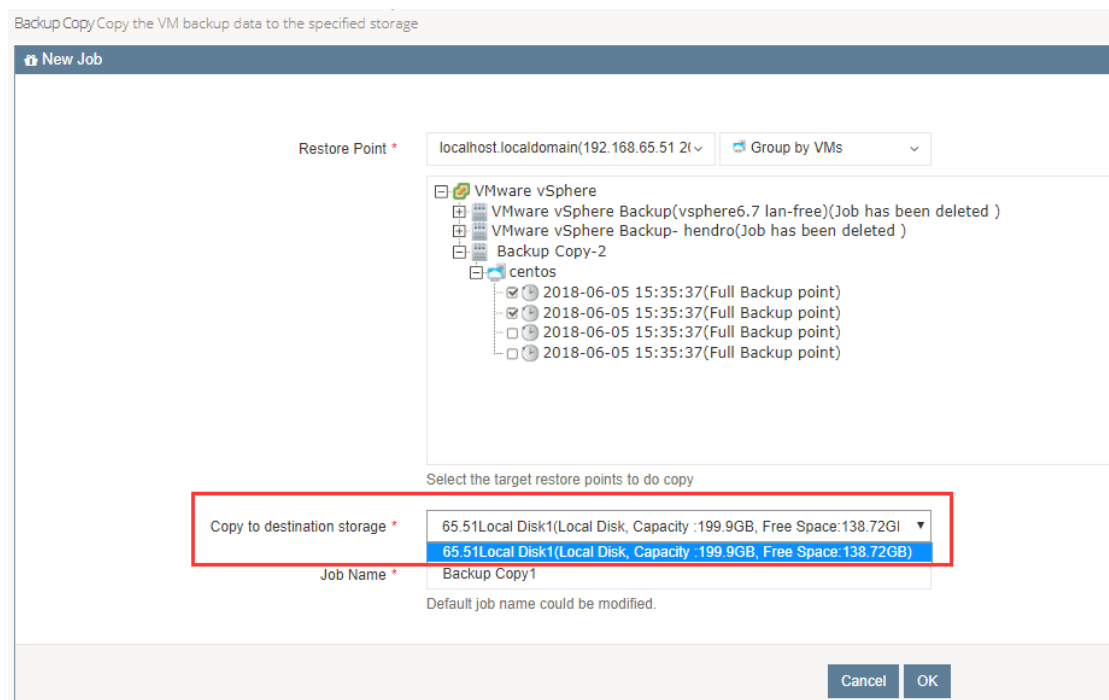

And you can rename the job.

After job is created, click [Activate Job] to start copy.


The screenshot displays the Vinchin Backup/Restore interface. The top navigation bar includes 'Home', 'Backup/Restore', 'Resources', 'Log/Alert', and a user profile 'admin'. Below the navigation bar, a sub-header reads 'Backup/Restore Copy the backup data to the storage device'. The main section is titled 'Backup Copy Job List' and features a '+ New Job' button. A table lists three backup jobs: 'Backup Copy-test', 'Backup Copy-2', and 'Backup Copy-aoaoa'. The 'Backup Copy-test' job is highlighted with a red box. The 'Operation' column for this job shows 'Options' and 'Activate Job' buttons, with 'Activate Job' also highlighted. A green success message banner at the top of the table area states 'Activate backup export task' and 'Activate backup export task success'. The table columns are: Job Name, Platform, Destination, Speed, Progress, Status, Creation Time, and Operation. The 'Backup Copy-test' job has a progress of 0.00% and a status of 'Running'.

Job Name	Platform	Destination	Speed	Progress	Status	Creation Time	Operation
Backup Copy-test	VMware vSphere	65.51Local Disk1(Local Disk, Capacity :199.9GB, Free Space:138.72GB)	--	0.00%	Running	2018-06-11 16:04:37	Options Activate Job Delete
Backup Copy-2	VMware vSphere	65.51Local Disk1(Local Disk, Capacity :199.9GB, Free Space:138.72GB)	--	--	Stopped	2018-06-05 15:44:20	Options
Backup Copy-aoaoa	VMware vSphere	65.51Local Disk1(Local Disk, Capacity :199.9GB, Free Space:138.72GB)	--	--	Stopped	2018-06-05 15:43:34	Options


The backup data will be copied to the destination storage in 1-2 seconds. After finish, you can find the copy data from the storage.

4.5. Virtual Machines


In the Virtual Machines page, you can view all the VMs status you added into Vinchin Backup& Recovery system from [Virtual Infrastructure]. Click [Backup/Restore]-[Virtual Machines] you are coming to the VM page as below:

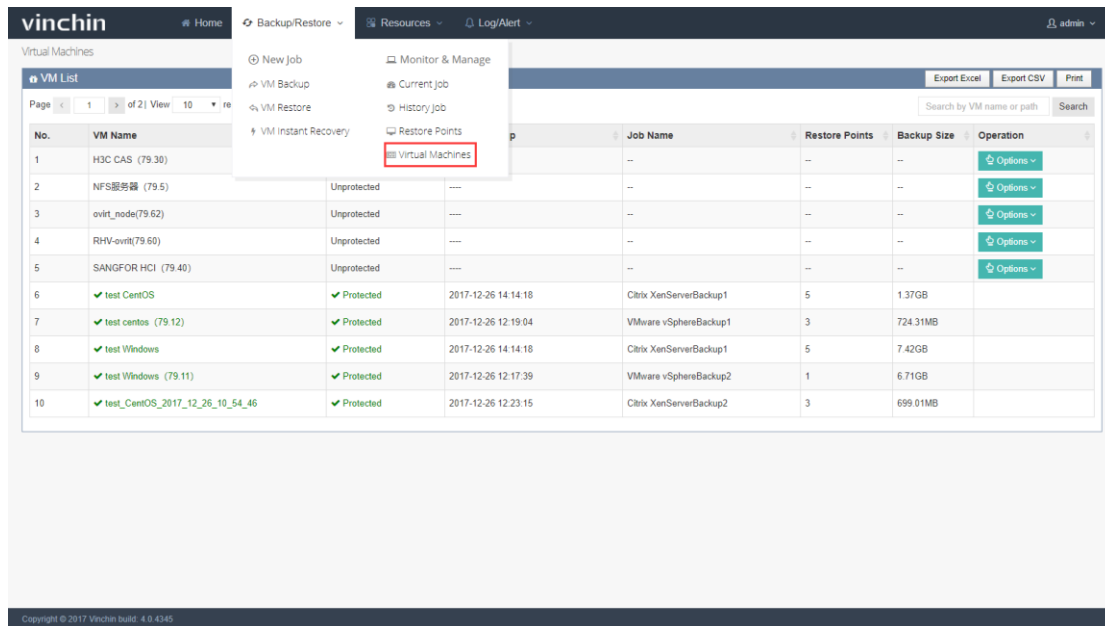

You can manage the unprotected VMs, click [Options] under Operation, you can choose to add the VM to a current running backup job, or choose to create a new backup job for this VM as below:

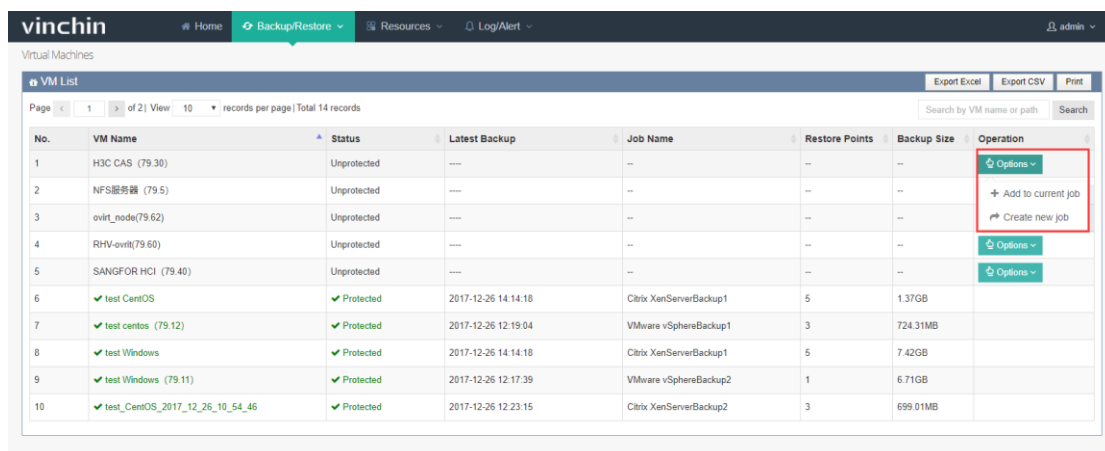

Click [Add to current job], you can choose a current backup job to add the target VM in as below:

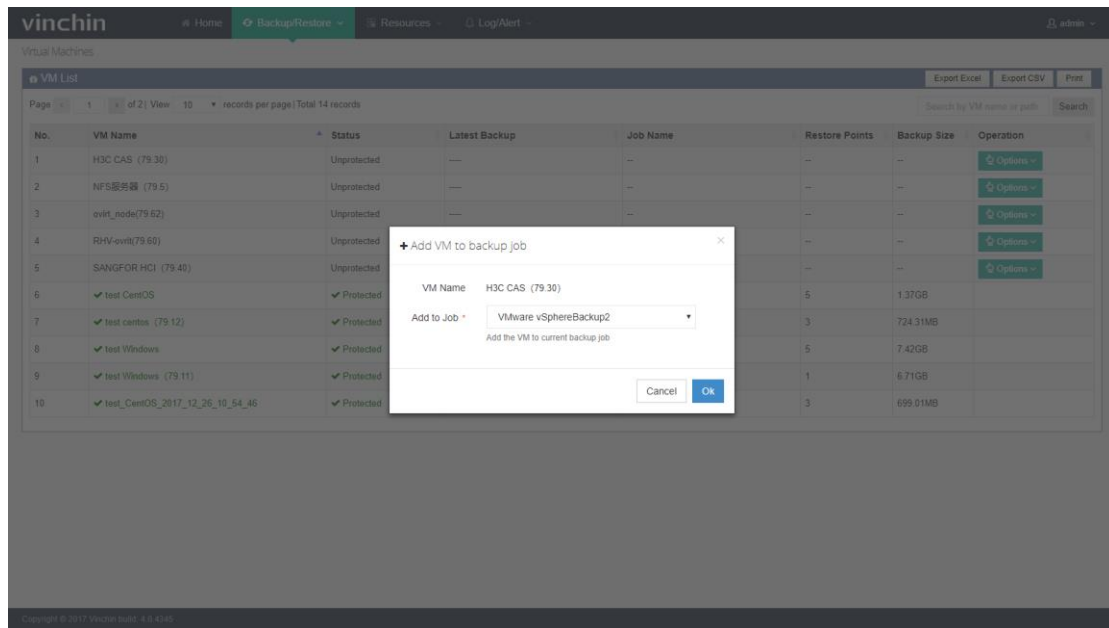

Click [Create new job] you can create a new backup job for the target VM, details please refer to “Chapter 3.1.2. Create Backup Job”.

5. Log/Alert

5.1. Job Log

Click [Log/Alert] – [Job Log], you are coming to the job log page, here has listed all the

job logs details including job running status, time and description etc. as below:

The screenshot shows the Vinchin Job Log interface. The top navigation bar includes links for Home, Backup/Restore, Resources, and Log/Alert. The 'Log/Alert' dropdown menu is open, showing options for Job Log, System Log, Job Alert, and System Alert. The 'Job Log' option is highlighted with a red box. Below the navigation bar, the 'Log List' section displays a table of job logs. The table has columns for No., Job Name, Platform, Job Type, User, Time, Status, and Description. The first 10 jobs are listed, with their status and descriptions. A search bar is located at the top right of the table, labeled 'Search by job name'.

No.	Job Name	Platform	Job Type	User	Time	Status	Description
1	Citrix XenServerBackup2	Citrix XenServer	Backup	admin	2017-12-26 12:18:49	Normal	Job 'Citrix XenServerBackup2' has been created
2	VMware vSphereRestore1	VMware vSphere	Restore	admin	2017-12-26 12:12:04	Normal	Job 'VMware vSphereRestore1' has been created
3	VMware vSphereBackup2	VMware vSphere	Backup	admin	2017-12-26 12:08:56	Normal	Job 'VMware vSphereBackup2' has been created
4	VMware vSphereBackup1	VMware vSphere	Backup	admin	2017-12-26 12:08:38	Normal	Job 'VMware vSphereBackup1' has been created
5	Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	admin	2017-12-26 11:36:26	Normal	Job 'Citrix XenServerInstant Recovery1' has been created
6	Citrix XenServerRestore1	Citrix XenServer	Restore	admin	2017-12-26 11:22:54	Normal	Job 'Citrix XenServerRestore1' has been stopped
7	Citrix XenServerRestore1	Citrix XenServer	Restore	admin	2017-12-26 11:07:39	Normal	Job 'Citrix XenServerRestore1' has been created
8	Citrix XenServerBackup1	Citrix XenServer	Backup	admin	2017-12-26 10:44:20	Normal	Job 'Backup as scheduled has been enabled
9	Citrix XenServerBackup1	Citrix XenServer	Backup	admin	2017-12-26 10:43:16	Normal	Job 'Citrix XenServerBackup1' has been stopped
10	Citrix XenServerBackup1	Citrix XenServer	Backup	admin	2017-12-26 10:40:04	Normal	Job 'Backup as scheduled has been enabled

You can search a certain job to delete by entering the job name via the top right search bar as below:

The screenshot shows the Vinchin Job Log interface with the 'Delete' button highlighted in red. The search bar is also highlighted in red. The table of job logs is visible, with the first 10 jobs listed. The 'Delete' button is located in the top left corner of the table, and the search bar is located in the top right corner.

No.	Job Name	Platform	Job Type	User	Time	Status	Description
1	Citrix XenServerBackup2	Citrix XenServer	Backup	admin	2017-12-26 12:18:49	Normal	Job 'Citrix XenServerBackup2' has been created
2	VMware vSphereRestore1	VMware vSphere	Restore	admin	2017-12-26 12:12:04	Normal	Job 'VMware vSphereRestore1' has been created
3	VMware vSphereBackup2	VMware vSphere	Backup	admin	2017-12-26 12:08:56	Normal	Job 'VMware vSphereBackup2' has been created
4	VMware vSphereBackup1	VMware vSphere	Backup	admin	2017-12-26 12:08:38	Normal	Job 'VMware vSphereBackup1' has been created
5	Citrix XenServerInstant Recovery1	Citrix XenServer	Instant Recovery	admin	2017-12-26 11:36:26	Normal	Job 'Citrix XenServerInstant Recovery1' has been created
6	Citrix XenServerRestore1	Citrix XenServer	Restore	admin	2017-12-26 11:22:54	Normal	Job 'Citrix XenServerRestore1' has been stopped
7	Citrix XenServerRestore1	Citrix XenServer	Restore	admin	2017-12-26 11:07:39	Normal	Job 'Citrix XenServerRestore1' has been created
8	Citrix XenServerBackup1	Citrix XenServer	Backup	admin	2017-12-26 10:44:20	Normal	Job 'Backup as scheduled has been enabled
9	Citrix XenServerBackup1	Citrix XenServer	Backup	admin	2017-12-26 10:43:16	Normal	Job 'Citrix XenServerBackup1' has been stopped
10	Citrix XenServerBackup1	Citrix XenServer	Backup	admin	2017-12-26 10:40:04	Normal	Job 'Backup as scheduled has been enabled

Note: Once deleted, the job log is not recoverable.

5.2. System Log

Click [Log/Alert] – [System Log], you are coming to the system log page, here has listed all the system logs details including status, time and description etc. as below:

The screenshot shows the Vinchin System Log page. The top navigation bar includes Home, Backup/Restore, Resources, and Log/Alert. The Log/Alert dropdown menu is open, showing options: Log List, System Log (highlighted), Job Log, Job Alert, and System Alert. The System Log page displays a table of system logs with columns: No., User, Time, Status, and Description. The table contains 10 records of system logs.

No.	User	Time	Status	Description
1	admin	2017-12-26 14:03:40	Normal	System login success
2	admin	2017-12-26 12:08:20	Normal	Authorizing host'localhost.localdomain'[192.168.64.10] success
3	admin	2017-12-26 12:07:16	Normal	Adding virtual infrastructure'192.168.64.10'[192.168.64.10] success
4	admin	2017-12-26 11:59:43	Normal	System login success
5	admin	2017-12-26 11:16:58	Normal	Personal information was changed
6	admin	2017-12-26 11:16:37	Normal	Personal information was changed
7	admin	2017-12-26 10:35:21	Normal	System login success
8	admin	2017-12-25 17:46:27	Normal	Authorizing host'xenserver.xswfcdk'[192.168.79.20] success
9	admin	2017-12-25 17:46:09	Normal	Adding virtual infrastructure'192.168.79.20'[192.168.79.20] success
10	admin	2017-12-25 17:45:45	Normal	Adding virtual infrastructure'192.168.64.10'[192.168.64.10] success

You can choose target system logs to delete as below:


The screenshot shows the Vinchin System Log page with the Delete button highlighted. The table of system logs is visible, with the first two rows selected for deletion.

No.	User	Time	Status	Description
1	admin	2018-01-05 11:17:57	Normal	Authorizing host'cvmnode'[192.168.106.61] success
2	admin	2018-01-05 11:17:04	Normal	Authorizing host'xenserver 7.1 (66.72)'[192.168.66.72] success
3	admin	2018-01-05 11:17:04	Normal	Authorizing host'xenserver 7.1 (66.73)'[192.168.66.73] success
4	admin	2018-01-05 11:16:55	Normal	Unauthorizing host'cvmnode'[192.168.106.61] success
5	admin	2018-01-05 10:41:12	Normal	System login success
6	admin	2018-01-04 17:03:26	Normal	System login success
7	admin	2018-01-04 16:17:25	Normal	System login success
8	admin	2018-01-04 15:43:07	Normal	System login success
9	admin	2018-01-04 15:08:05	Normal	Unauthorizing host'xenserver 7.1 (66.72)'[192.168.66.72] success
10	admin	2018-01-04 15:08:05	Normal	Unauthorizing host'xenserver 7.1 (66.73)'[192.168.66.73] success

Note: Once deleted, the system log is not recoverable.

If you want to download the system logs, you can click [Download System Logs], then

select backup node and choose a system log file in a certain day to download as below:

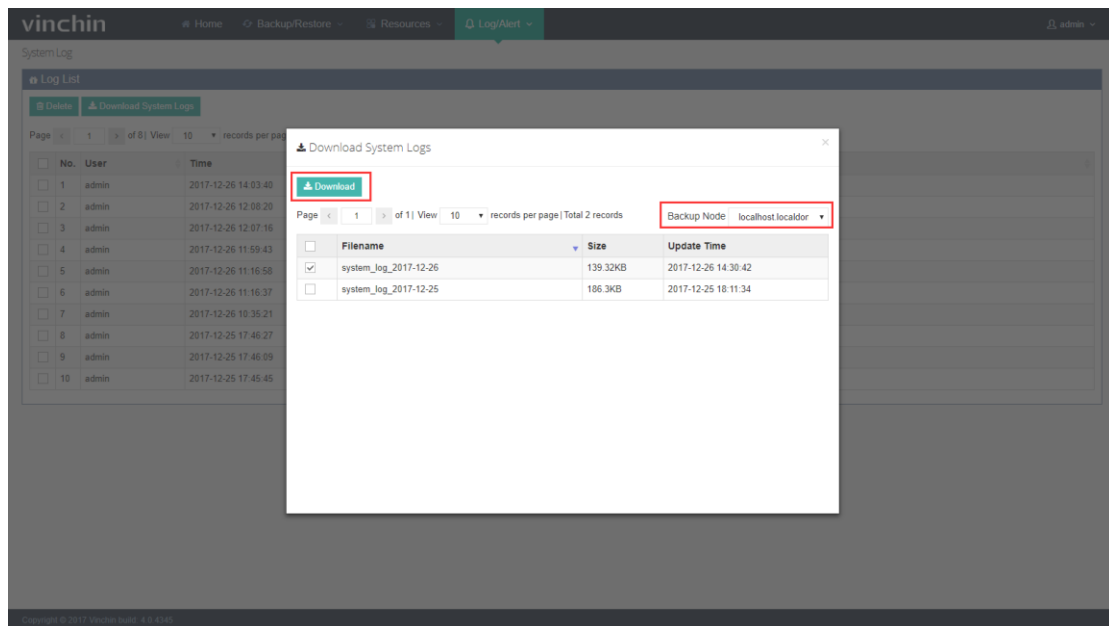

The downloaded log file name is "system_log.zip", includes:

名称	修改日期	类型	大小
node_server-2017-12-26.log	2017/12/26 14:31	文本文档	2 KB
pt_server-2017-12-26.log	2017/12/26 14:31	文本文档	3 KB
rt_server-2017-12-26.log	2017/12/26 14:31	文本文档	93 KB
vm_server-2017-12-26.log	2017/12/26 14:31	文本文档	44 KB
vxefs-2017-12-26.log	2017/12/26 14:31	文本文档	3 KB

5.3. Job Alert

Click [Log/Alert]-[Job Alert], you are coming to the job alert page. In this page you are able to view each job running alert including "Notice" "Warning" "Error", you can also delete them as below:

vinchin

Home Backup/Restore Resources Log/Alert 1 admin

Job Alert

Alert List

Delete Mark as Processed

Page 1 of 2 View 10 records per page Total 20 records

No.	Job Name	Job Type	Alert Type	Alert Time	Description	Mark	Alert Details
1	Citrix XenServerBackup1	Backup	Error	2017-12-26 14:36:31	Job failed [#3122]could not connect to host or poor	Pending	Details
2	Citrix XenServerBackup1	Backup	Notice	2017-12-26 14:14:41	Job success	Pending	Details
3	Citrix XenServerBackup1	Backup	Notice	2017-12-26 14:13:09	Job success	Pending	Details
4	VMware vSphereBackup2	Backup	Notice	2017-12-26 12:24:01	Job success	Pending	Details
5	Citrix XenServerBackup2	Backup	Notice	2017-12-26 12:23:26	Job success	Pending	Details
6	Citrix XenServerBackup2	Backup	Notice	2017-12-26 12:22:54	Job success	Pending	Details
7	Citrix XenServerBackup2	Backup	Notice	2017-12-26 12:20:29	Job success	Pending	Details
8	VMware vSphereBackup1	Backup	Notice	2017-12-26 12:19:26	Job success	Pending	Details
9	VMware vSphereBackup1	Backup	Notice	2017-12-26 12:17:57	Job success	Pending	Details
10	VMware vSphereBackup1	Backup	Notice	2017-12-26 12:11:08	Job success	Pending	Details

Copyright © 2017 Vinchin build: 4.0.4345

Note: Once deleted, the job alert is not recoverable.

New job alert is default marked as pending, if you have checked this alert and processed accordingly, you can mark it as processed by clicking [Mark as Processed]. Click Details you can see the job alert details as below:

vinchin

Home Backup/Restore Resources Log/Alert 1 admin

Job Alert

Alert List

Delete Mark as Processed

Page 1 of 2 View 10 records per page Total 20 records

No.	Job Name	Job Type	Alert Type	Alert Time	Description	Mark	Alert Details
1	Citrix XenServerBackup1	Backup	Error	2017-12-26 14:36:31	Job failed [#3122]could not connect to host or poor	Pending	Details
2	Citrix XenServerBackup1	Backup	Notice	2017-12-26 14:14:41	Job success	Pending	Details
3	Citrix XenServerBackup1	Backup	Notice	2017-12-26 14:13:09	Job success	Pending	Details
4	VMware vSphereBackup2	Backup	Notice	2017-12-26 12:24:01	Job success	Pending	Details
5	Citrix XenServerBackup2	Backup	Notice	2017-12-26 12:23:26	Job success	Pending	Details
6	Citrix XenServerBackup2	Backup	Notice	2017-12-26 12:22:54	Job success	Pending	Details
7	Citrix XenServerBackup2	Backup	Notice	2017-12-26 12:20:29	Job success	Pending	Details
8	VMware vSphereBackup1	Backup	Notice	2017-12-26 12:19:26	Job success	Pending	Details
9	VMware vSphereBackup1	Backup	Notice	2017-12-26 12:17:57	Job success	Pending	Details
10	VMware vSphereBackup1	Backup	Notice	2017-12-26 12:11:08	Job success	Pending	Details

Alert Details

Basic Info Log Info

Alert ID: 27

Job Name: Citrix XenServerBackup1

Platform: Citrix XenServer

Job Type: Backup

Node: localhost.localdomain(192.168.101.42)

Repository: Local Disk1

Alert Type: Error

Alert Time: 2017-12-26 14:36:31

Description: Job failed [#3122]could not connect to host or poor

Mark: Processed

Processed by: admin

Processed at: 2017-12-26 14:38:02


Email Notification: Unsent

Download Logs Mark as Pending Close

Copyright © 2017 Vinchin build: 4.0.4345


If it is an error alert, you can check the error info from "Log Info" page as below, and you

can download the log details.

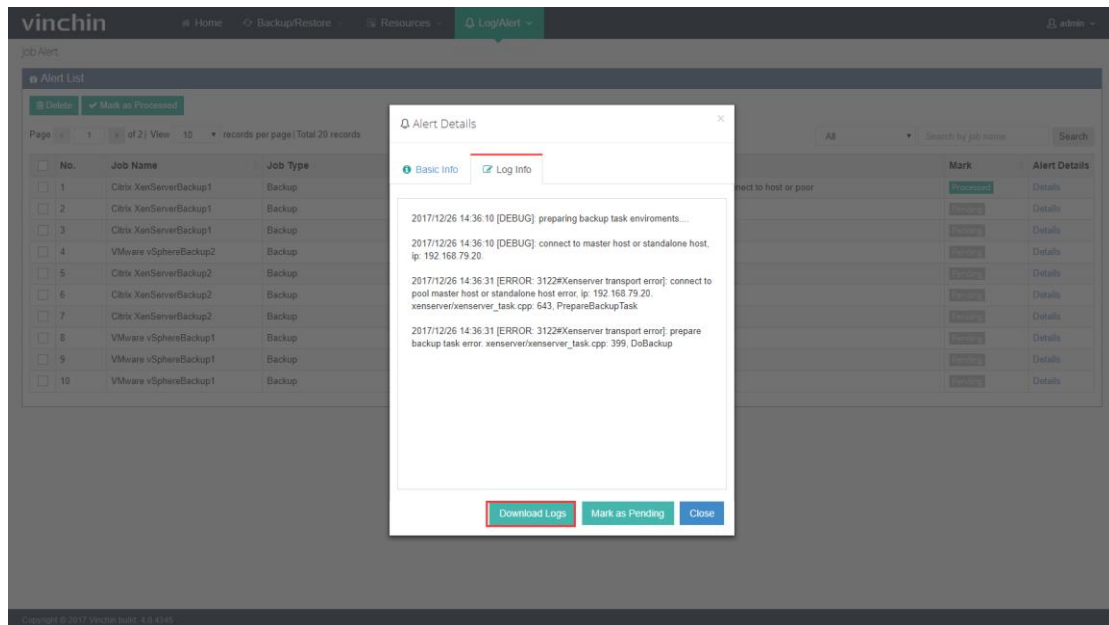

5.4. System Alert


Click [Log/Alert]-[System Alert], you are coming to the system alert page. In this page you are able to view system running alert including "Notice" "Warning" "Error", you can also delete them as below:

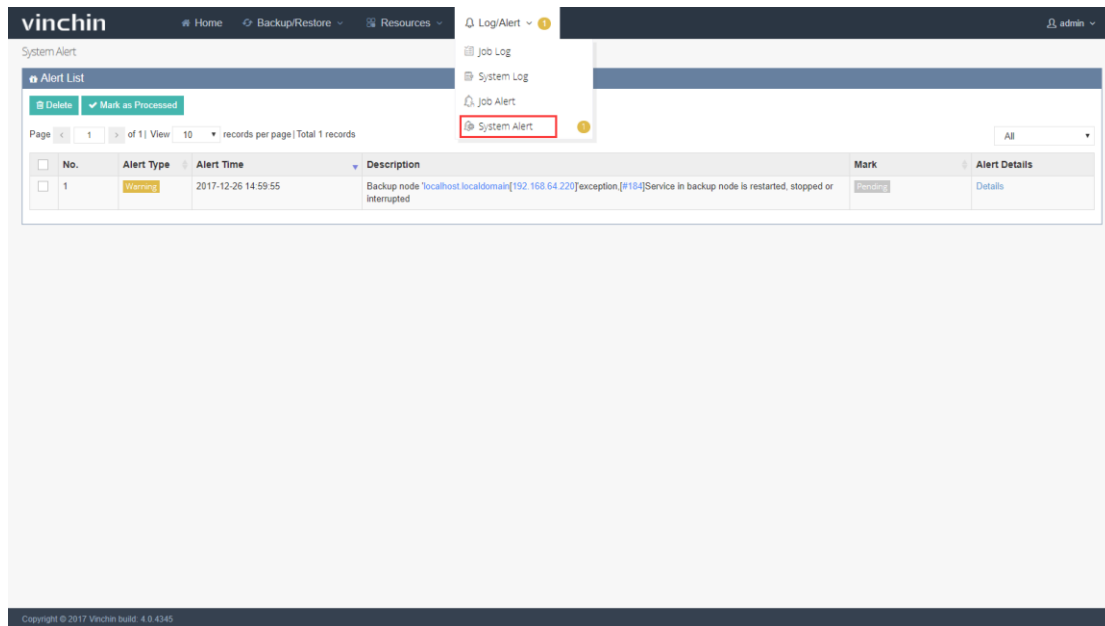

Note: Once deleted, the system alert is not recoverable.


New system alert is default marked as pending, if you have checked this alert and processed accordingly, you can mark it as processed by clicking [Mark as Processed].

Click Details you can see the system alert details as below:

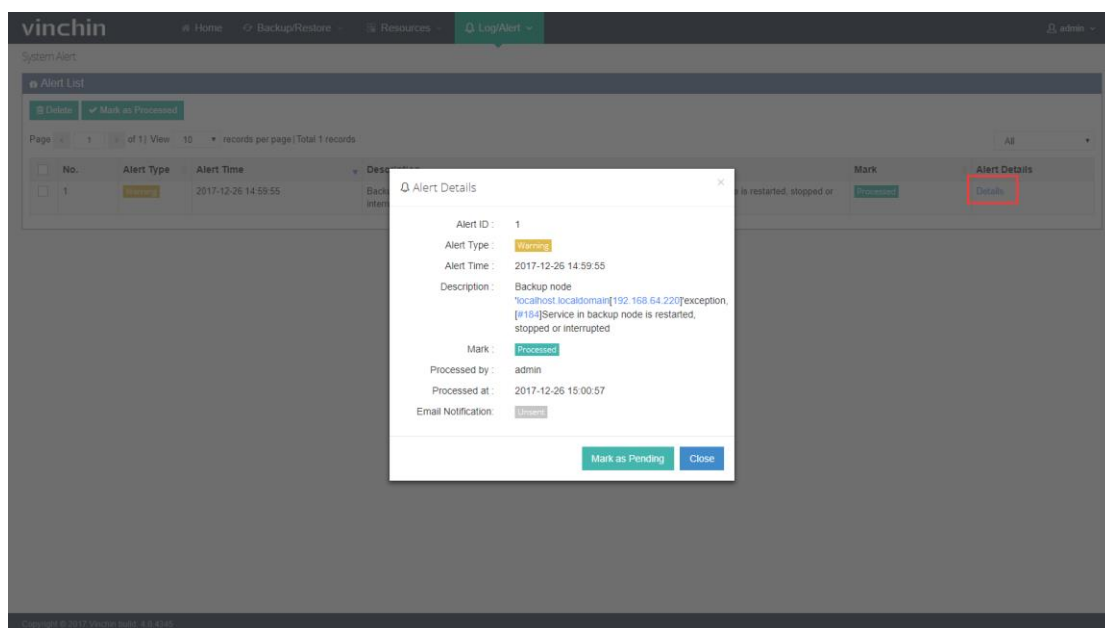


6. Admin

Click [Admin] on the top right, you will see several basic settings as below:

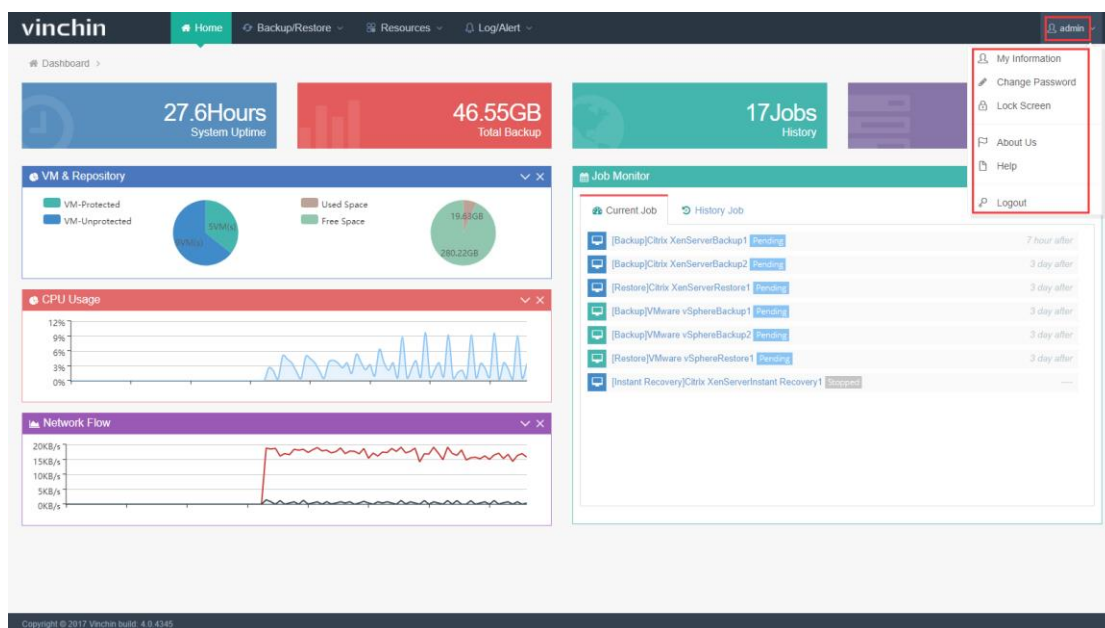

6.1. My Information

Click [My Information] you can edit email address, phone number and change language (currently support English, Chinese simple, Chinese Traditional) .

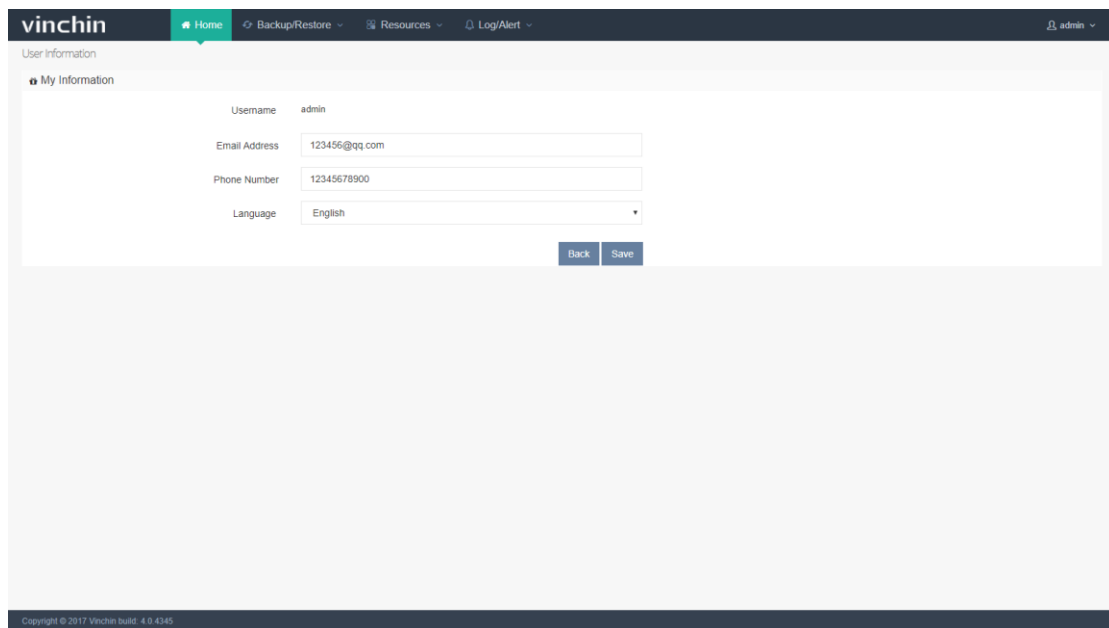

The screenshot shows the 'vinchin' web application interface. At the top, there is a navigation bar with 'Home', 'Backup/Restore', 'Resources', and 'Log/Alert' links. The user is logged in as 'admin'. Below the navigation bar, the 'User Information' section is active, showing 'My Information'. The form displays the following details:

Username	admin
Email Address	123456@qq.com
Phone Number	12345678900
Language	English

At the bottom right of the form are 'Back' and 'Save' buttons. The footer of the page indicates 'Copyright © 2017 Vinchin build: 4.0.4345'.


6.2. Change Password

Here you can change system login password as below:

The screenshot shows the Vinchin web interface. At the top, there is a navigation bar with the Vinchin logo, a 'Home' button, and links for 'Backup/Restore', 'Resources', and 'Log/Alert'. The user 'admin' is logged in. The main content area is titled 'Change Password' and contains a form with three input fields: 'Original password', 'New password', and 'Confirm new password'. Below the form are 'Back' and 'Save' buttons. The footer indicates 'Copyright © 2017 Vinchin build: 4.0.4345'.

6.3. Lock Screen

Here you can manually lock the system as below:

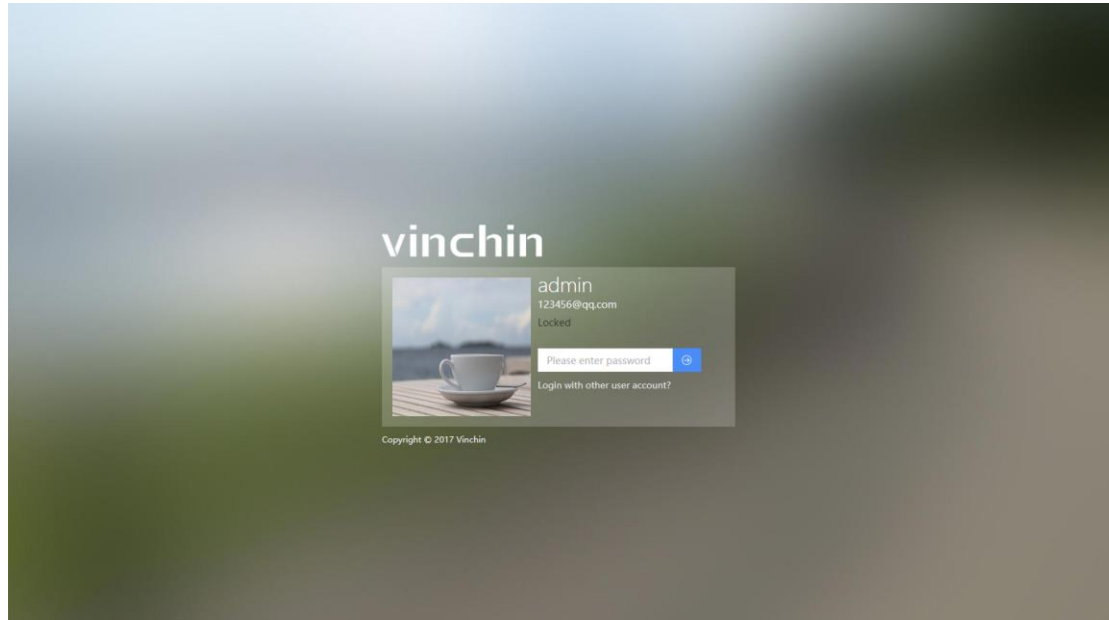

6.4. About us

Here is the link to Vinchin Official Website.

6.5. Help

If you need any support during using Vinchin Backup & Recovery system, you can contact us via [Help].

6.6. Logout

Click[Logout] to manually log out Vinchin Backup& Recovery system as below:

