

The Tree Maximum-A-Posteriori Algorithm

Example Question: What is $3x^2+1$?

Step 1: Generate the trunk trajectories.

Q_T $3 \times 2 = 42$. $42 + 1 = \boxed{43}$

Let's do it step by step. $3 \times 2 + 1 = 6 + 1 = \boxed{7}$

```
L ``python 3*2+1`` ``7`` \boxed{7}
```

Step 2: Branch from existing trunks.

Q $3 \times 2 = 42$. $42 + 1 = \boxed{43}$

⌞wait, actually $3 \times 2 = 6$. $6 + 1 = \boxed{7}$

Let's do it step by step. $3 \times 2 + 1 = 6 + 1 = \boxed{7}$

$$\lfloor 3 \times 2 = 6. \top 6 + 1 = \boxed{7} \rfloor$$
$$6+1=\boxed{42}$$

```
L` ``python 3T*2+1` `` ``7` `` \boxed{7}
```

$$L_{x2+1} \dots \text{error} \quad \boxed{\text{error}}$$

Step 3: Calculate the advantages from the leaf correctness with Maximum-A-Posteriori

advantage scale

-1.0

+1.0


correct answer



excluded from training



incorrect answer

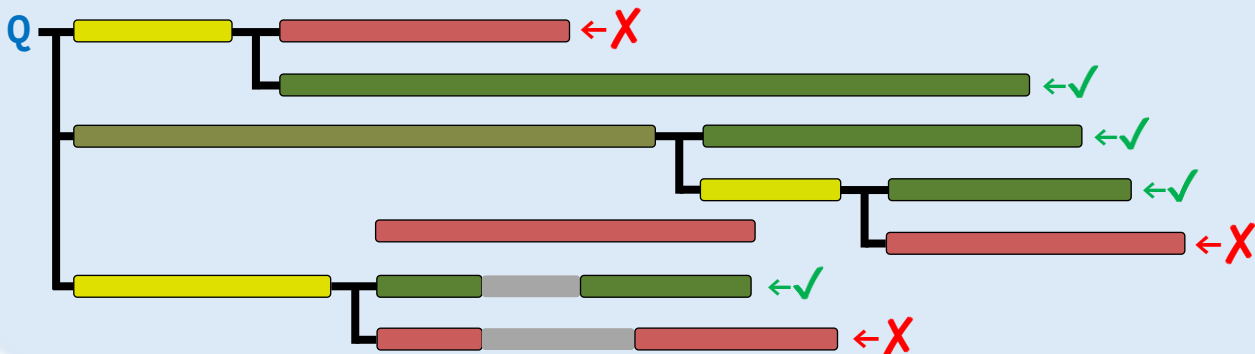

Step 4: Generate the flattened training trajectories.

Q $3 \times 2 = 42$. $42 + 1 = \boxed{43}$

Q—Let's do it step by step. $3 \times 2 = 6$. $6 + 1 = \boxed{7}$

Q- `python 3*2+1` `` 7` `` \boxed{7}`

And then do the training.