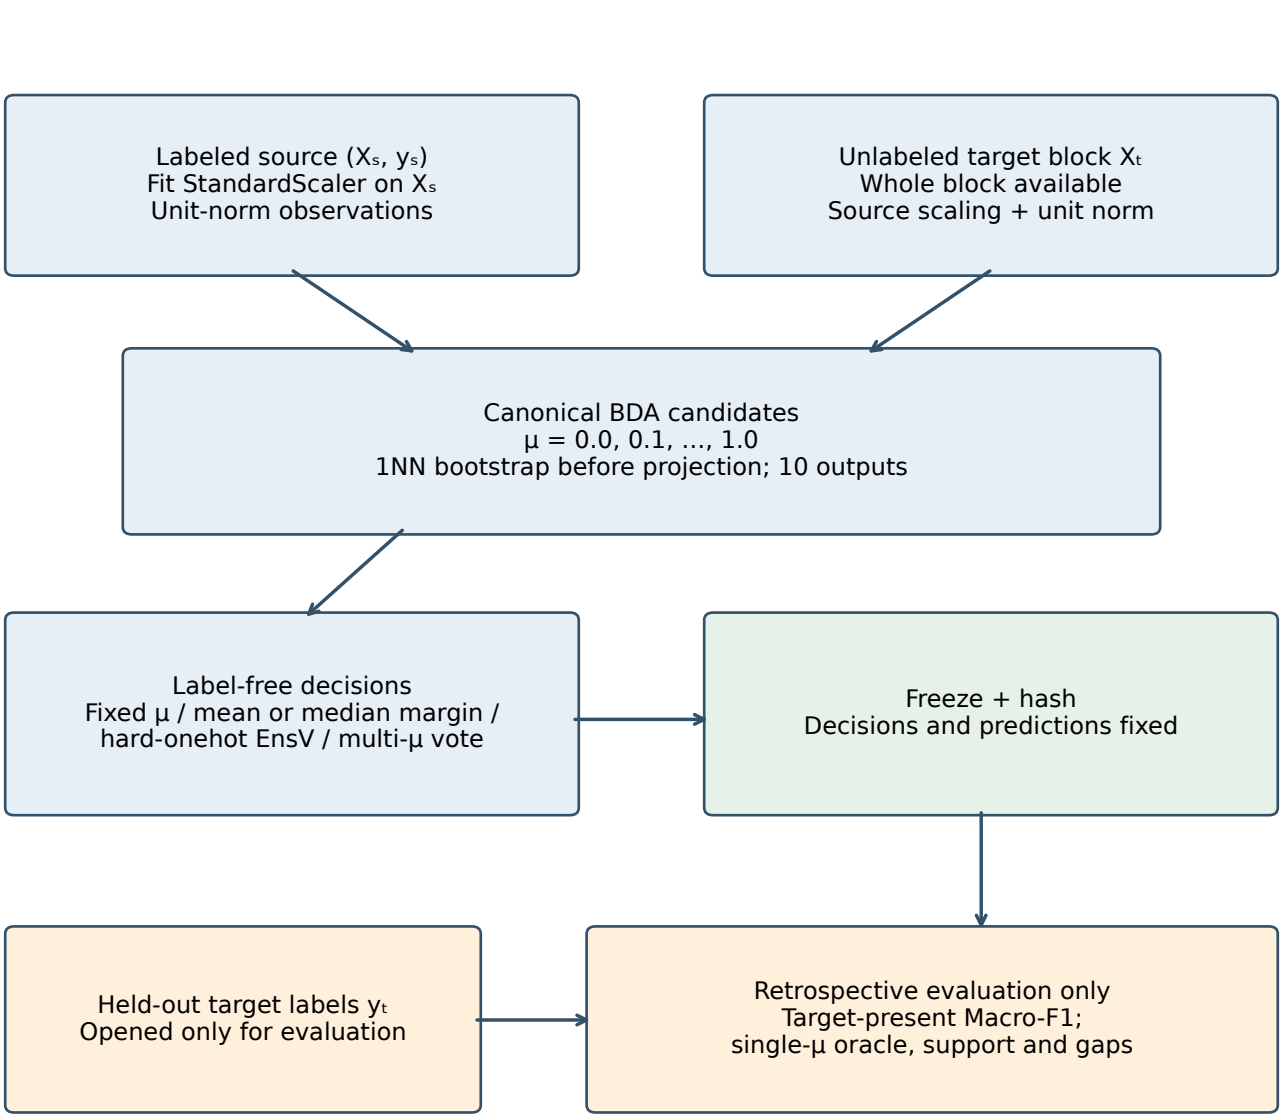
Strict target-label-free protocol
Labeled source (X_s, y_s)
Fit StandardScaler on X_s
Unit-norm observations
Unlabeled target block X_t
Whole block available
Source scaling + unit norm
Canonical BDA candidates
μ = 0.0, 0.1, ..., 1.0
1NN bootstrap before projection; 10 outputs
Label-free decisions
Fixed μ / mean or median margin /
hard-onehot EnsV / multi-μ vote
Freeze + hash
Decisions and predictions fixed
Held-out target labels y_t
Opened only for evaluation
Retrospective evaluation only
Target-present Macro-F1;
single-μ oracle, support and gaps