

# Reinforcement Learning & Intelligent Agents

## Lecture 3: Markov Decision Processes

S. M. Ahsan Kazmi

## Recap

Last lecture: multiple actions, but only one state — no model

This lecture:

- Formalise the problem with the full sequential structure
  - Markov Reward Processes
  - Markov Decision Processes

# Markov Processes

# Introduction to MDPs

- Markov decision processes formally describe an environment for reinforcement learning
- Where the environment is fully observable
  - i.e. The current state completely characterizes the process
- Almost all RL problems can be formalised as MDPs, e.g.
  - Optimal control primarily deals with continuous MDPs
  - Partially observable problems can be converted into MDPs
  - Bandits are MDPs with one state

# Markov Property

## Definition

A state  $S_t$  is *Markov* if and only if

$$\mathbb{P}[S_{t+1} \mid S_t] = \mathbb{P}[S_{t+1} \mid S_1, \dots, S_t]$$

- The future is independent of the past given the present
- The state captures all relevant information from the history
- Once the state is known, the history may be thrown away
- i.e. The state is a sufficient statistic of the future

# Markov Process

## Definition


A *Markov Process* (or *Markov Chain*) is a tuple  $\langle \mathcal{S}, \mathcal{P} \rangle$

- $\mathcal{S}$  is a (finite) set of states
- $\mathcal{P}$  is a state transition probability matrix,  
$$\mathcal{P}_{ss'} = \mathbb{P}[S_{t+1} = s' \mid S_t = s]$$

A Markov process is a memoryless random process, i.e. a sequence of random states  $S_1, S_2, \dots$  with the Markov property.

- For a Markov state  $s$  and successor state  $s'$ , the state transition probability is  $P_{ss'}$


## Example: Student Markov Chain

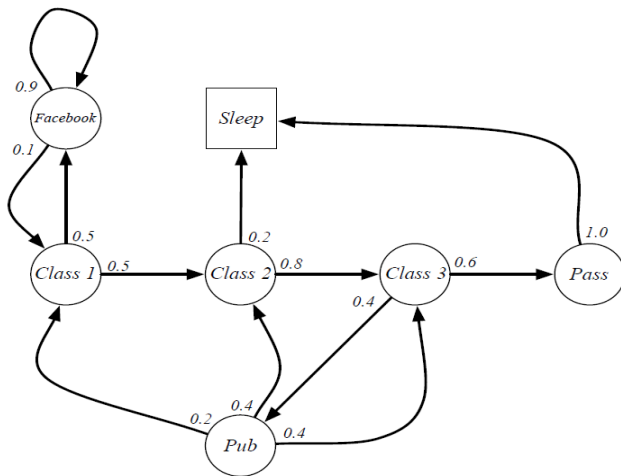

## Example: Student Markov Chain Episodes

Sample **episodes** for Student Markov Chain starting from  $S_1 = C1$


$$S_1, S_2, \dots, S_T$$

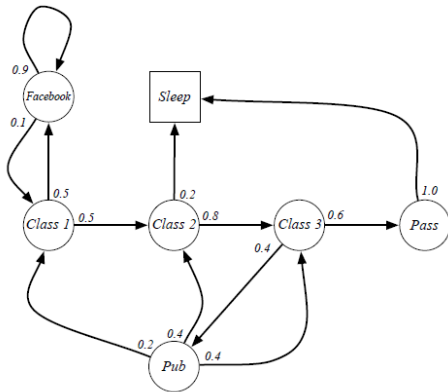

- C1 C2 C3 Pass Sleep
- C1 FB FB C1 C2 Sleep
- C1 C2 C3 Pub C2 C3 Pass Sleep
- C1 FB FB C1 C2 C3 Pub C1 FB FB  
FB C1 C2 C3 Pub C2 Sleep



# Example: Student Markov Chain Transition Matrix

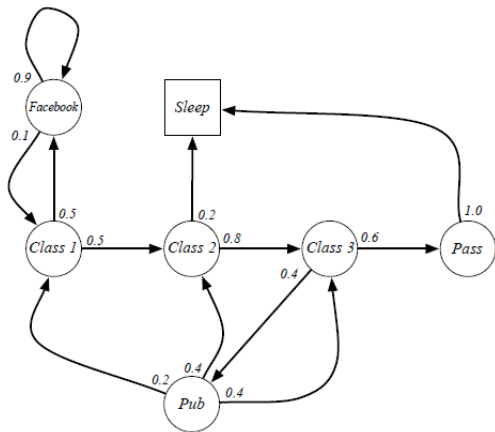

$$\mathcal{P} = \begin{matrix} & \begin{matrix} C1 & C2 & C3 & Pass & Pub & FB & Sleep \end{matrix} \\ \begin{matrix} C1 \\ C2 \\ C3 \\ Pass \\ Pub \\ FB \\ Sleep \end{matrix} & \left[ \begin{array}{ccccccc} & & & & & & \\ & 0.5 & & & & 0.5 & \\ & & & 0.8 & & & 0.2 \\ & & & & 0.6 & 0.4 & \\ 0.2 & 0.4 & 0.4 & & & & 1.0 \\ 0.1 & & & & & & \\ & & & & & 0.9 & \\ & & & & & & 1 \end{array} \right] \end{matrix}$$

# Markov Reward Processes

# Markov Reward Process


A Markov reward process is a Markov chain with values.

## Definition

A *Markov Reward Process* is a tuple  $\langle \mathcal{S}, \mathcal{P}, \mathcal{R}, \gamma \rangle$

- $\mathcal{S}$  is a finite set of states
- $\mathcal{P}$  is a state transition probability matrix,  
 $\mathcal{P}_{ss'} = \mathbb{P}[S_{t+1} = s' \mid S_t = s]$
- $\mathcal{R}$  is a reward function,  $\mathcal{R}_s = \mathbb{E}[R_{t+1} \mid S_t = s]$
- $\gamma$  is a discount factor,  $\gamma \in [0, 1]$

## Example: Student MRP

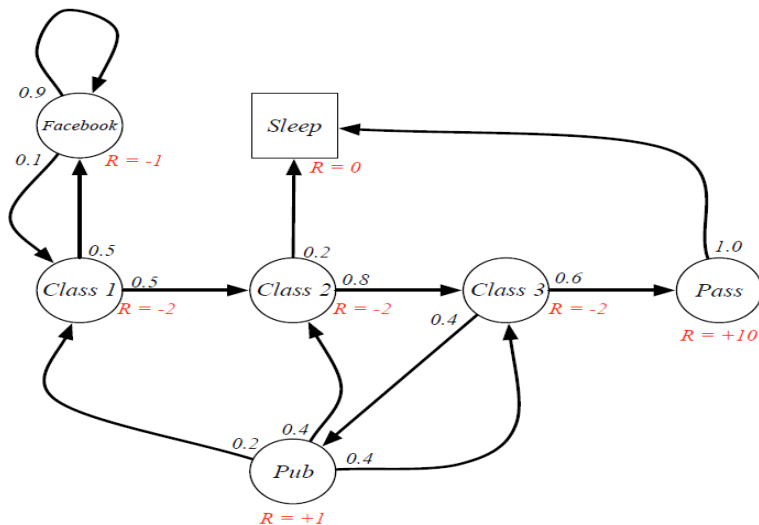

# Returns

Acting in a MDP results in **immediate rewards**  $R_t$ , which leads to **returns**  $G_t$

## Definition

The *return*  $G_t$  is the total discounted reward from time-step  $t$ .

$$G_t = R_{t+1} + \gamma R_{t+2} + \dots = \sum_{k=0}^{\infty} \gamma^k R_{t+k+1}$$

The discount is the present value of future rewards

## Discounts?

Most Markov decision processes are discounted. Why?

### **Problem specification:**

- Immediate rewards may be more valuable (e.g., consider earning interest)
- Animal/human behavior shows preference for immediate reward

### **Solution side:**

- Mathematically convenient to discount rewards
- Avoids infinite returns in cyclic Markov processes

The way to think about it: reward and discount together determine the goal

# Value Function

The value function  $v(s)$  gives the long-term value of state  $s$

## Definition


The *state value function*  $v(s)$  of an MRP is the expected return starting from state  $s$

$$v(s) = \mathbb{E}[G_t \mid S_t = s]$$

## Example: Student MRP Returns

Sample **returns** for Student MRP:  
Starting from  $S_1 = \text{C1}$  with  $\gamma = \frac{1}{2}$

$$G_1 = R_2 + \gamma R_3 + \dots + \gamma^{T-2} R_T$$

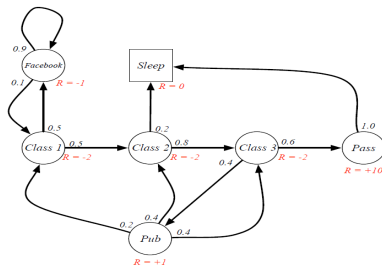

C1 C2 C3 Pass Sleep

$$v_1 = -2 - 2 * \frac{1}{2} - 2 * \frac{1}{4} + 10 * \frac{1}{8} = -2.25$$

C1 FB FB C1 C2 Sleep

$$v_1 = -2 - 1 * \frac{1}{2} - 1 * \frac{1}{4} - 2 * \frac{1}{8} - 2 * \frac{1}{16} = -3.125$$

C1 C2 C3 Pub C2 C3 Pass Sleep

$$v_1 = -2 - 2 * \frac{1}{2} - 2 * \frac{1}{4} + 1 * \frac{1}{8} - 2 * \frac{1}{16} \dots = -3.41$$


C1 FB FB C1 C2 C3 Pub C1 ...

$$v_1 = -2 - 1 * \frac{1}{2} - 1 * \frac{1}{4} - 2 * \frac{1}{8} - 2 * \frac{1}{16} \dots = -3.20$$


FB FB FB C1 C2 C3 Pub C2 Sleep




## Example: State-Value Function for Student MRP

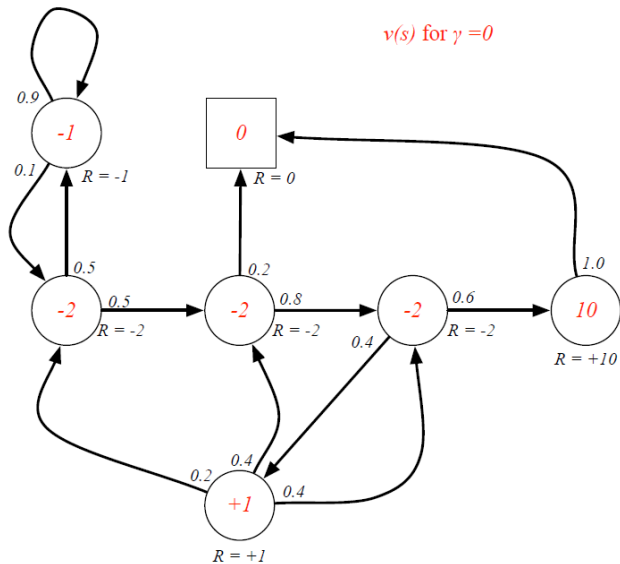

## Example: State-Value Function for Student MRP

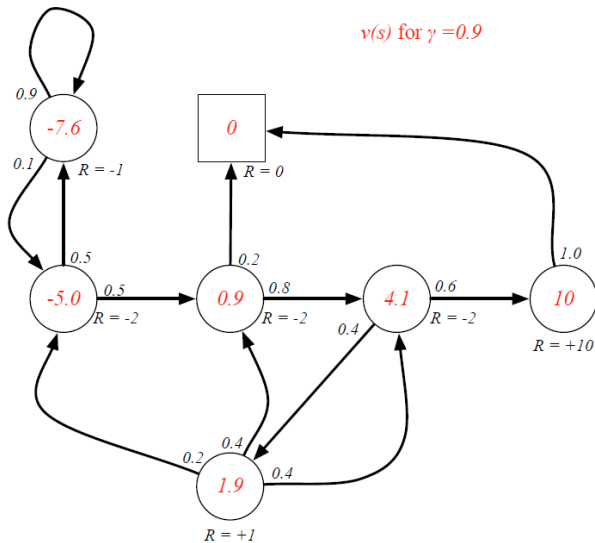

## Example: State-Value Function for Student MRP

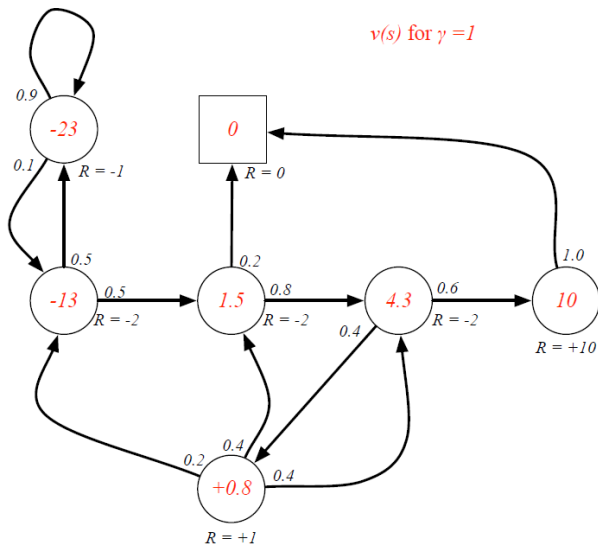


# Bellman Equation for MRPs

- The value function can be decomposed into two parts:
  - immediate reward  $R_{t+1}$
  - discounted value of successor state  $v(S_{t+1})$

$$\begin{aligned}v(s) &= \mathbb{E}[G_t \mid S_t = s] \\&= \mathbb{E}[R_{t+1} + \gamma R_{t+2} + \gamma^2 R_{t+3} + \dots \mid S_t = s] \\&= \mathbb{E}[R_{t+1} + \gamma(R_{t+2} + \gamma R_{t+3} + \dots) \mid S_t = s] \\&= \mathbb{E}[R_{t+1} + \gamma G_{t+1} \mid S_t = s] \\&= \mathbb{E}[R_{t+1} + \gamma v(S_{t+1}) \mid S_t = s]\end{aligned}$$

$$v(s) = \mathbb{E}[R_{t+1} + \gamma v(S_{t+1}) \mid S_t = s]$$




Matrix Form

$$v = \mathcal{R} + \gamma \mathcal{P}v$$

$$\begin{bmatrix} v(1) \\ \vdots \\ v(n) \end{bmatrix} = \begin{bmatrix} \mathcal{R}_1 \\ \vdots \\ \mathcal{R}_n \end{bmatrix} + \gamma \begin{bmatrix} \mathcal{P}_{11} & \dots & \mathcal{P}_{1n} \\ \vdots & & \\ \mathcal{P}_{n1} & \dots & \mathcal{P}_{nn} \end{bmatrix} \begin{bmatrix} v(1) \\ \vdots \\ v(n) \end{bmatrix}$$

$$v(s) = \mathcal{R}_s + \gamma \sum_{s' \in \mathcal{S}} \mathcal{P}_{ss'} v(s')$$

## Example: Bellman Equation for Student MRP

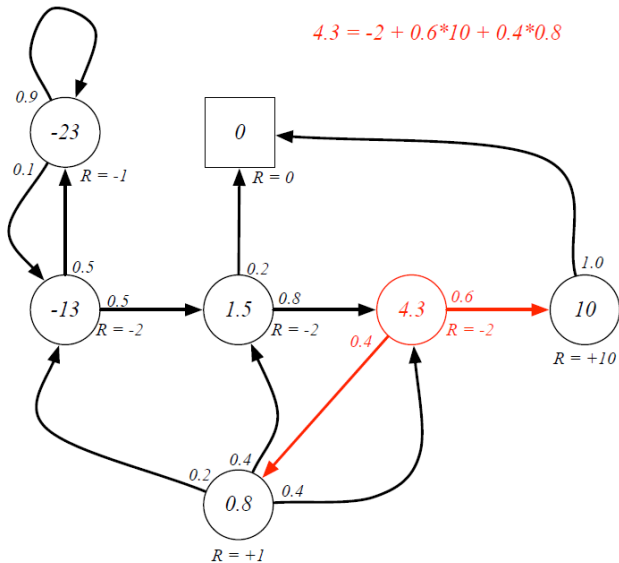

# Solving the Bellman Equation

The Bellman equation is a linear equation

- It can be solved directly:

$$v = \mathcal{R} + \gamma \mathcal{P} v$$

$$(I - \gamma \mathcal{P}) v = \mathcal{R}$$

$$v = (I - \gamma \mathcal{P})^{-1} \mathcal{R}$$

- Computational complexity is  $O(n^3)$  for  $n$  states
- Direct solution only possible for small MRPs
- There are many iterative methods for large MRPs, e.g.
  - Dynamic programming
  - Monte-Carlo evaluation
  - Temporal-Difference learning

# Markov Decision Processes

# Markov decision process (MDP)

- A Markov decision process (MDP) is a Markov reward process with decisions.
- It is an environment in which all states are Markov.


## Definition

A *Markov Decision Process* is a tuple  $\langle \mathcal{S}, \mathcal{A}, \mathcal{P}, \mathcal{R}, \gamma \rangle$

- $\mathcal{S}$  is a finite set of states
- $\mathcal{A}$  is a finite set of actions
- $\mathcal{P}$  is a state transition probability matrix,  
 $\mathcal{P}_{ss'}^a = \mathbb{P}[S_{t+1} = s' \mid S_t = s, A_t = a]$
- $\mathcal{R}$  is a reward function,  $\mathcal{R}_s^a = \mathbb{E}[R_{t+1} \mid S_t = s, A_t = a]$
- $\gamma$  is a discount factor  $\gamma \in [0, 1]$ .



## Example: Student MDP

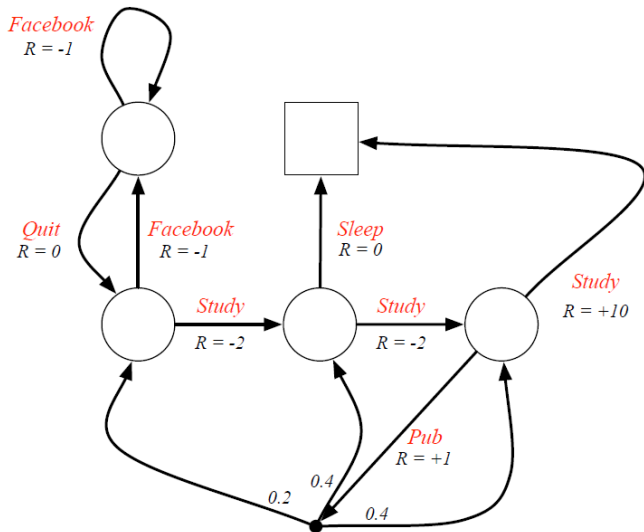

# Policies

## Definition

A *policy*  $\pi$  is a distribution over actions given states,

$$\pi(a|s) = \mathbb{P}[A_t = a \mid S_t = s]$$

- A policy fully defines the behavior of an agent
- MDP policies depend on the current state (not the history)

# Policies

Given an MDP  $\mathcal{M} = \langle \mathcal{S}, \mathcal{A}, \mathcal{P}, \mathcal{R}, \gamma \rangle$  and a policy  $\pi$

The state sequence  $S_1, S_2, \dots$  is a Markov process  $\langle \mathcal{S}, \mathcal{P}^\pi \rangle$

The state and reward sequence  $S_1, R_1, S_2, \dots$  is a Markov reward process  $\langle \mathcal{S}, \mathcal{P}^\pi, \mathcal{R}^\pi, \gamma \rangle$

where

$$\mathcal{P}_{s,s'}^\pi = \sum_{a \in \mathcal{A}} \pi(a|s) \mathcal{P}_{ss'}^a$$

$$\mathcal{R}_s^\pi = \sum_{a \in \mathcal{A}} \pi(a|s) \mathcal{R}_s^a$$

# Value Function

## Definition

The *state-value function*  $v_{\pi}(s)$  of an MDP is the expected return starting from state  $s$ , and then following policy  $\pi$


$$v_{\pi}(s) = \mathbb{E}_{\pi} [G_t \mid S_t = s]$$

## Definition

The *action-value function*  $q_{\pi}(s, a)$  is the expected return starting from state  $s$ , taking action  $a$ , and then following policy  $\pi$

$$q_{\pi}(s, a) = \mathbb{E}_{\pi} [G_t \mid S_t = s, A_t = a]$$

## Example: State-Value Function for Student MDP

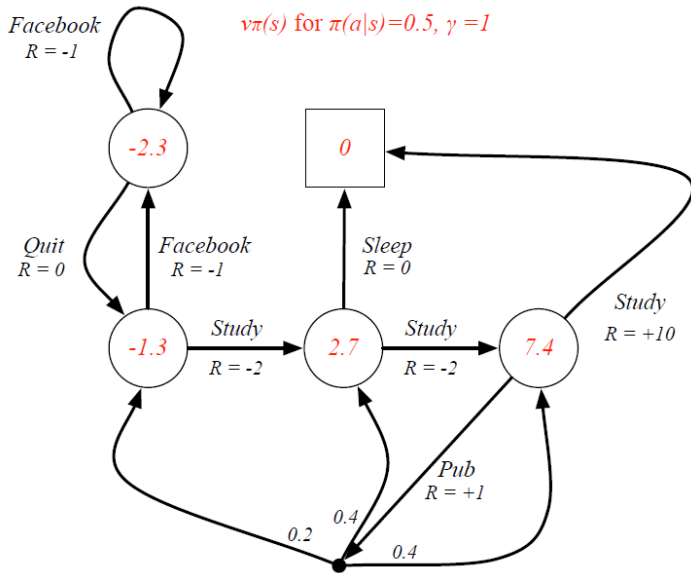

## Bellman Expectation Equation


The state-value function can again be decomposed into immediate reward plus discounted value of successor state,

$$v_{\pi}(s) = \mathbb{E}_{\pi} [R_{t+1} + \gamma v_{\pi}(S_{t+1}) \mid S_t = s]$$


The action-value function can similarly be decomposed,

$$q_{\pi}(s, a) = \mathbb{E}_{\pi} [R_{t+1} + \gamma q_{\pi}(S_{t+1}, A_{t+1}) \mid S_t = s, A_t = a]$$

# Bellman Expectation Equation

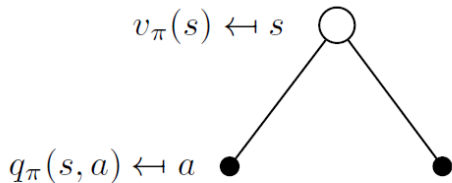


$$v_\pi(s) = \sum_{a \in \mathcal{A}} \pi(a|s) q_\pi(s, a)$$

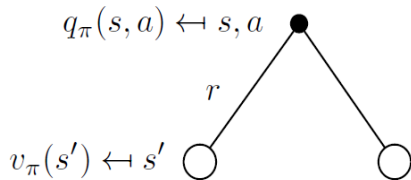


$$q_\pi(s, a) = \mathcal{R}_s^a + \gamma \sum_{s' \in \mathcal{S}} \mathcal{P}_{ss'}^a v_\pi(s')$$

# Bellman Expectation Equation

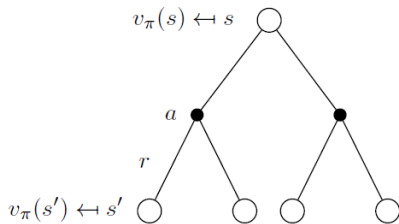


$$v_\pi(s) = \sum_{a \in \mathcal{A}} \pi(a|s) \left( \mathcal{R}_s^a + \gamma \sum_{s' \in \mathcal{S}} \mathcal{P}_{ss'}^a v_\pi(s') \right)$$

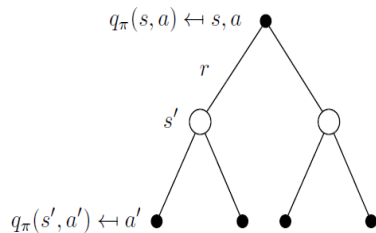

$$q_\pi(s, a) = \mathcal{R}_s^a + \gamma \sum_{s' \in \mathcal{S}} \mathcal{P}_{ss'}^a \sum_{a' \in \mathcal{A}} \pi(a'|s') q_\pi(s', a')$$



## Example: Bellman Expectation Equation in Student MDP

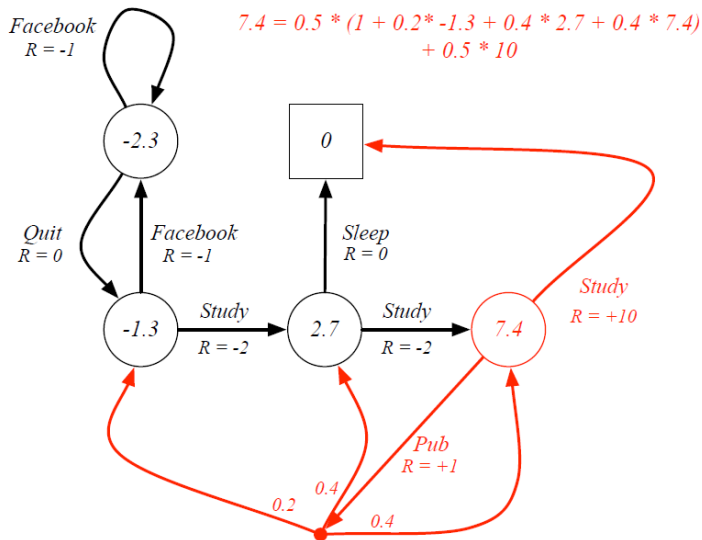

# Optimal Value Function

The optimal value function specifies the best possible performance in the MDP.

## Definition


The *optimal state-value function*  $v_*(s)$  is the maximum value function over all policies

$$v_*(s) = \max_{\pi} v_{\pi}(s)$$


The *optimal action-value function*  $q_*(s, a)$  is the maximum action-value function over all policies

$$q_*(s, a) = \max_{\pi} q_{\pi}(s, a)$$

## Example: Optimal Value Function for Student MDP

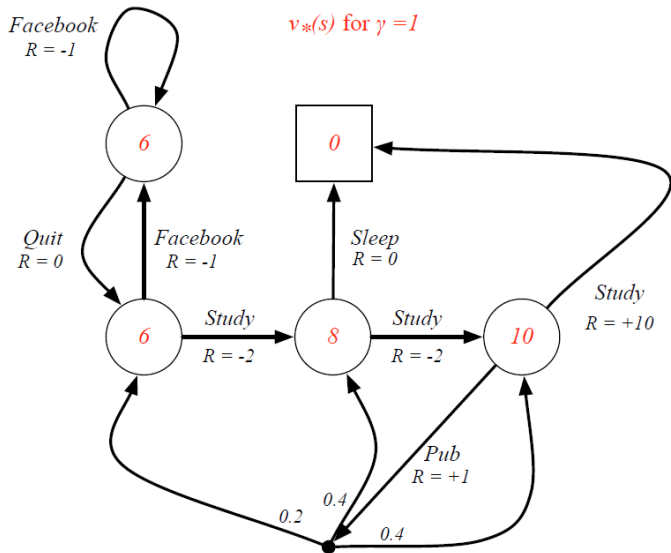

## Example: Optimal Value Function for Student MDP

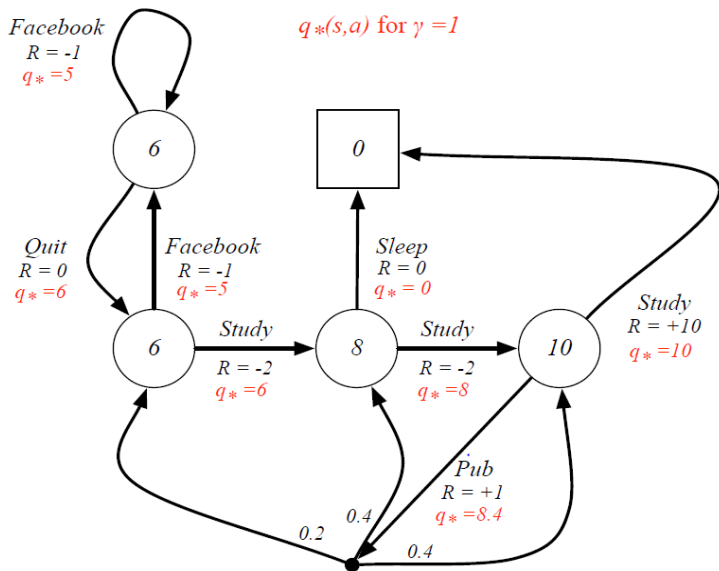

# Optimal Policy

Define a partial ordering over policies

$$\pi \geq \pi' \text{ if } v_{\pi}(s) \geq v_{\pi'}(s), \forall s$$

## Theorem

*For any Markov Decision Process*

- *There exists an optimal policy  $\pi_*$  that is better than or equal to all other policies,  $\pi_* \geq \pi, \forall \pi$*
- *All optimal policies achieve the optimal value function,  $v_{\pi_*}(s) = v_*(s)$*
- *All optimal policies achieve the optimal action-value function,  $q_{\pi_*}(s, a) = q_*(s, a)$*


## Finding an Optimal Policy

An optimal policy can be found by maximising over  $q_*(s, a)$ ,

$$\pi_*(a|s) = \begin{cases} 1 & \text{if } a = \operatorname{argmax}_{a \in \mathcal{A}} q_*(s, a) \\ 0 & \text{otherwise} \end{cases}$$

- There is always a deterministic optimal policy for any MDP
- If we know  $q_*(s, a)$ , we immediately have the optimal policy

## Example: Optimal Policy for Student MDP

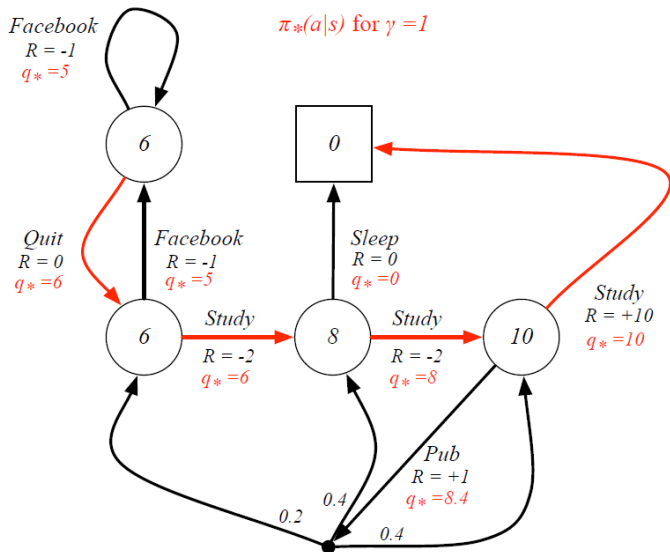

# Solving the Bellman Optimality Equation

- Bellman Optimality Equation is non-linear
- No closed form solution (in general)
- Many iterative solution methods
  - Value Iteration
  - Policy Iteration
  - Q-learning
  - Sarsa

Ref: Sutton & Barto 2018, Chapter 3