

“This is my gift back to the community that got me interested in crypto.”

— STANLEY GEBARA
cryptolwa.io

XRPL Delegation Checker

User Manual. How to see who can act as your XRP Ledger wallet, take that power back, check a transaction before you sign it, and test every part of the tool yourself.

A free community tool by CryptoLwa
Written by Stanley Gebara · www.cryptolwa.io · The Crypto Intelligence Ecosystem
Tool version 1.0.4 · Manual edition 3 · October 2026
© 2026 Stanley Gebara. The software is free and open source under the MIT License.

Contents

1 What this tool does, in plain English

2 Why it matters right now

3 What you need, and which wallets work today

4 Check a wallet, step by step

5 Reading your results

6 Revoke a delegate

7 Practise on Testnet: the Practice Lab

8 Test everything yourself: the full checklist

9 Check before you sign

10 Your security switches

11 Golden safety rules

12 Troubleshooting

13 Questions people ask

14 For builders: hosting, verifying and running the tests

15 Glossary

How to read this manual

Every technical word is followed by its everyday meaning, so you never have to look anything up. In a hurry? Read chapter 4 to check your wallet. To try the whole thing safely, follow chapter 7. To test the tool properly before you trust it or recommend it, work through the checklist in chapter 8.

Read this first: wallet support on 24 October 2026

We tested the current Crossmark (0.2.19) and GemWallet (3.8.2) browser extensions with a real revoke on Testnet. **Neither can sign the revoke transaction yet.** Both stop with the message *"Invalid field TransactionType: DelegateSet"*, because the XRP Ledger software built into them is older than the delegation feature. Nothing is sent when this happens. Checking a wallet works for everyone. Chapter 3 explains what this means for you, and chapter 6 shows the ways to revoke that do work.

1 · What this tool does, in plain English

Your XRP Ledger wallet is like a bank account that only you hold the key to. Since October 2026, the XRP Ledger lets an account owner hand a **spare key with limits** to another account. The official name is **permission delegation**, which just means letting someone else send certain transactions in your name without giving them your main key.

That is useful for businesses. It is dangerous if a scam website tricks you into handing a spare key to a thief. The XRPL Delegation Checker does four jobs:

1. **Check a wallet.** It shows every account holding a spare key to an address, exactly what each key can do, and anything a spare key has already been used for.
2. **Revoke.** It builds the one transaction that takes every spare key back, checks it field by field, and hands it to your wallet to sign. After signing, it reads the ledger to prove the key is gone.
3. **Check before you sign.** It translates a transaction into plain English before you approve it anywhere else, including bundles of transactions that try to hide something in the middle.
4. **Practise on Testnet.** Its Practice Lab lets anyone run the whole cycle (give a spare key, see it, revoke it, prove it is gone) with throwaway practice accounts and play money.

> **What it never does**
>
> It never asks for your secret key or your recovery words. It never holds your money. It has no account to sign up for, no tracking and no ads. Checking a wallet only *reads* the public ledger, which anyone in the world can read. The only keys it ever uses are the throwaway Testnet practice keys in the Practice Lab, which it gets from the official Testnet faucet and forgets when you leave Testnet.

2 · Why it matters right now

On **8 October 2026**, the XRP Ledger switched on a feature called `PermissionDelegationV1_1`. A second feature, `BatchV1_1`, is also switched on; it lets several transactions be bundled together and run as one. We confirmed both are enabled by asking the ledger directly on 24 October 2026.

Put those two together and a new trick becomes possible. A fake “rewards” or “airdrop” site asks you to sign something that looks routine. Hidden inside is a transaction called `DelegateSet`, which is the transaction that hands out a spare key. Once you sign it, the thief can come back later and send transactions as you, and nothing on your screen changes.

We proved it on the XRP Ledger Testnet

The Testnet is the XRP Ledger's practice network. It runs the same rules as the real thing, but its coins have no value. Using the tool's own Practice Lab, on 24 October 2026:

1. A practice owner account gave a helper account the `Payment` permission.
2. The helper sent **1 XRP out of the owner's account** to itself, without the owner signing anything. The ledger accepted it.
3. The owner revoked the permission with one transaction, through the tool's normal revoke window.
4. The helper tried again. The ledger refused with `terNO_DELEGATE_PERMISSION`, which means “this account no longer has permission.”

That is the whole story in four lines: the danger is real, and revoking stops it. Chapter 7 shows you how to run this exact test yourself in about two minutes.

We backtested it against every real delegation on Mainnet

On 19 October 2026 we read the entire state of the real XRP Ledger, twice, three hours apart (ledgers 107,769,897 and 107,773,208). Both times there were exactly **31 delegations** held over **10 wallets**, and **28 of the 31 included the Payment permission**, which is full spending power. We ran the tool on every one of them and graded it against three independent answers:

CHECK	RESULT
Owner wallets: every delegate and permission matched the full ledger and the wallet's own replayed history	**10 of 10**
Delegate wallets: the reverse view matched	**31 of 31**
Real signed DelegateSet transactions decoded correctly, with the right danger level	**33 of 33**
“Already used” count equal to the real number of transactions sent by a delegate	**9 of 9** exact; the 10th wallet had sent about 33,400 and the tool correctly reported “at least” the 3,981 it reached

We tried to break it, and fixed what broke

We attacked the tool the way a scammer, a broken server or a tampered browser would: 35 automated attacks on its core and 26 in a real browser where every ledger server was replaced by a hostile one. Every problem found was fixed. Highlights:

- **Fake data from a server** could crash a scan, turn fake addresses into links, or use invisible right-to-left characters to make a delegate's website look like *ripple.com*. It is now dropped or cleaned.
- **Our own cross-check was weaker than we said.** Its two Mainnet servers turned out to be one cluster under two names. It now asks two *different organisations* (InFTF and Ripple, with Honeycluster as a backup).
- **A server outage while confirming a revoke** could skip the final check and offer “Sign” again. Now a sent transaction is never offered again, and the check retries until it can run.
- **Real wallets, 24 October 2026.** Testing with the real Crossmark and GemWallet extensions found that the Crossmark button in version 1.0.3 failed on every click (a build-setting bug, fixed in 1.0.4), and that neither wallet can sign DelegateSet yet. The tool now explains that in plain English instead of showing a raw error.

3 · What you need, and which wallets work today

TO…	YOU NEED
Check any wallet	Only a web browser on a computer or phone. Nothing to install, nothing to connect.
Practise the whole cycle	A web browser. The Practice Lab (chapter 7) creates free practice accounts for you on Testnet.
Revoke on your real wallet	A wallet that can sign a `DelegateSet` transaction. See the table below.
Pay for a revoke	About **0.00001 XRP** in network fees. You also get **0.2 XRP** of your reserve back, because each spare key ties up 0.2 XRP that you cannot spend. The *reserve* is the minimum the ledger makes every account keep (on 24 October 2026: 1 XRP per account plus 0.2 XRP per item it owns).

Wallet support, as we measured it on 24 October 2026

WALLET	CONNECT TO THE TOOL	REPORT ITS NETWORK	SIGN THE REVOKE (DELEGATESET)
Crossmark 0.2.19 (browser extension)	Works	Works	**Not yet.** Stops with “Invalid field TransactionType: DelegateSet”. Nothing is sent.
GemWallet 3.8.2 (browser extension)	Works	Works	**Not yet.** Same message. Nothing is sent.

We checked this three ways: a live revoke on Testnet with each real extension, the extensions' own code (neither contains the DelegateSet transaction type), and a public Crossmark developer issue from 18 October 2026 asking whether DelegateSet is supported, still unanswered when we checked. Wallets update often, so this will change. The tool always tells you the truth on screen: if your wallet cannot sign, you see **“[Wallet] cannot sign this type of transaction yet … Nothing was sent and nothing changed”**, together with a copy of the revoke you can sign elsewhere.

What this means for you today

Checking works for everyone, on any wallet, and is the most important part: you find out whether anyone holds a spare key to your wallet. **Revoking** needs a wallet or XRPL software that understands `DelegateSet`; chapter 6 lists the routes. **Practising and testing** work for everyone through the Practice Lab.

4 · Check a wallet, step by step


1. **Open the tool** in its own browser tab. It refuses to run if another website tries to show it inside a frame. That is a safety feature.

2. **Pick the network** with the **Mainnet / Testnet** switch near the top. **Mainnet** is the real XRP Ledger. **Testnet** is the practice network; when it is on, an orange line appears along the top edge of the page content and the words “Testnet: practice network, coins have no value” appear under the switch.

3. **Paste an address** into the box. An XRPL address starts with the letter `r`. You can check your own wallet, a friend's, or a project's. Exchange-style **X-addresses** (starting with `X`) are converted for you. If what you pasted contains **hidden, invisible characters** (a known clipboard trick), the tool stops and tells you to copy it again from your wallet.

4. **Compare the fingerprint.** Under the box, “Check against your wallet” shows the first five and last five characters in large type. Make sure they match the address in your wallet app. Some computer viruses quietly swap a copied address for a different one, and this check catches that.

5. **Press Scan.** The list of delegates appears first, usually within seconds. The check of what delegates have already done follows underneath.

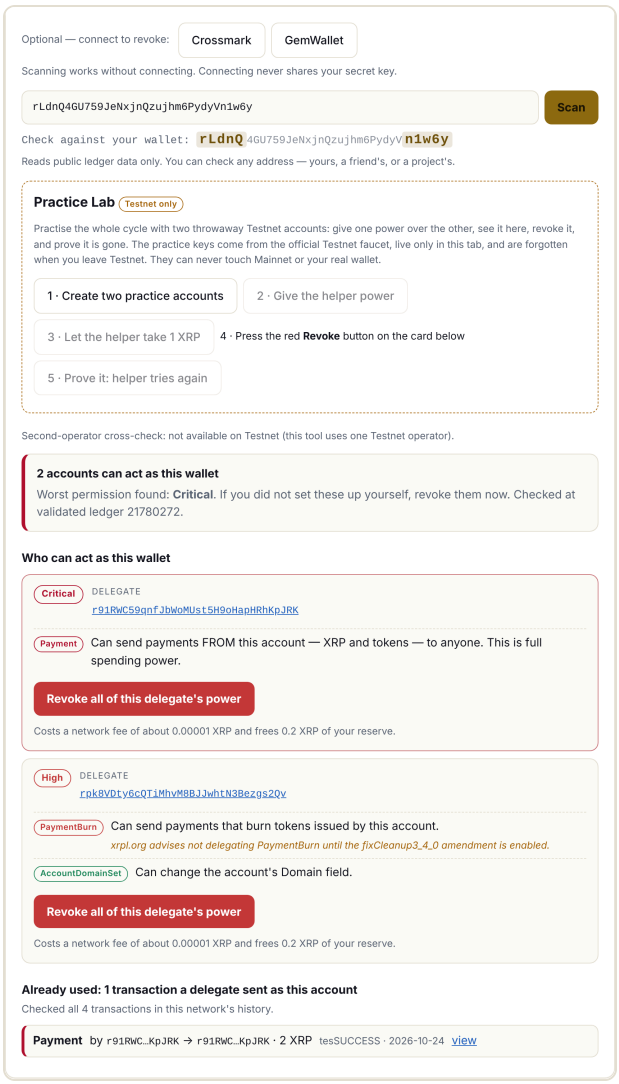

A Testnet scan. Two accounts hold spare keys; one has the Critical “Payment” permission and has already used it. The Practice Lab panel appears only on Testnet.

5 · Reading your results

The banners at the top

- **Green line: “Two independent operators agree”** (Mainnet only). Two different organisations' servers gave the same answer.
- **Green banner: “No one has delegated power over this account.”** Nobody holds a spare key. You are done.
- **Red banner: “1 account can act as this wallet”** (or “N accounts”). Someone holds a spare key. Read the cards below it.
- **Red banner: “Change detected.”** You scanned this same wallet earlier in this tab and the list of spare keys has changed since. Review the list now.

Danger levels

LEVEL	WHAT IT MEANS	EXAMPLE PERMISSIONS
Critical	Can send your XRP and tokens to anyone. This is full spending power.	`Payment`
High	Can move or lock up your funds in other ways, such as trading them away, or can create or burn tokens you issue.	`OfferCreate`, `EscrowCreate`, `TrustSet`, `PaymentMint`, `PaymentBurn`
Medium	Can change settings on tokens you issue, such as freezing a holder or changing a transfer fee.	`TrustlineFreeze`, `AccountTransferRateSet`
Low	Can only change harmless profile fields on your account.	`AccountDomainSet`, `AccountEmailHashSet`

The worst card is always shown first, with the delegate's address and any website it *claims* to belong to. Anyone can type any website into their account, so treat that claim as unverified. Each card has a red **“Revoke all of this delegate's power”** button and tells you the cost.

“Already used” list

If a delegate has already sent transactions in your name, they are listed here with a link to each one. If you see a payment you did not expect, revoke immediately, then read chapter 11.

The tool always tells you how far back it looked. On Mainnet it checks **every transaction since delegation went live on 8 October 2026**, because nothing could have been sent by a delegate before that. For an extremely

busy wallet it stops after the most recent 4,000 transactions and says so plainly, with the words “at least” in front of the count, so you are never told “nothing happened” when it simply did not look.

“Accounts this wallet can act for”

This is the reverse view. It shows other wallets that gave *this* address a spare key. Only those owners can take their keys back.

PaymentBurn note


If you see `PaymentBurn`, the tool repeats the official xrpl.org advice: do not delegate it until the `fixCleanup3_4_0` amendment is enabled. Before that fix, a delegate can sometimes create new tokens instead of only burning them. On 24 October 2026 the fix was still not enabled on Mainnet.

6 · Revoke a delegate

Revoking means sending one `DelegateSet` transaction with an **empty permission list**. The ledger's rule is simple: an empty list deletes that delegate's spare key completely. Only the wallet owner can send it. There are three ways.

Route A · With the wallet buttons (when your wallet supports DelegateSet)

1. **Connect the owner's wallet.** Press **Crossmark** or **GemWallet** near the top of the page and approve in the pop-up. Connecting only shares your public address, never your secret key.
2. **Scan that same address.** The tool will not let a different wallet revoke for it.
3. **Press "Revoke all of this delegate's power"** on the card.
4. **Read the window that opens.** It shows the exact transaction, and green ticks show the safety checks passed: *"Strict check passed"* and *"Wallet is on mainnet"* (or testnet).
5. **Press "Sign with my wallet."** In your wallet, check that the type is **DelegateSet** and the **Authorize** address ends in the same five characters the tool showed you. Then approve.
6. **Wait for the result.** **"Revoked … Verified on the ledger by two independent server operators"** (Mainnet) or **"Revoked … Verified on the ledger"** (Testnet) means it is done. If your wallet cannot sign DelegateSet yet, you will instead see that it cannot, that **nothing was sent**, and a copy of the revoke for Route B.

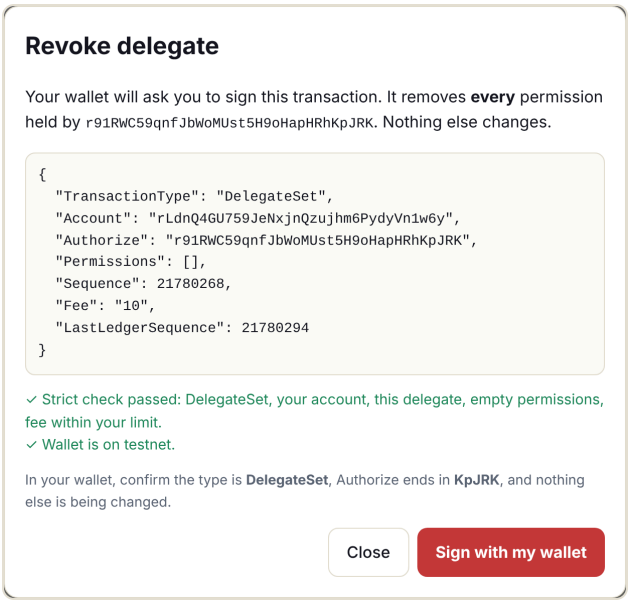

The revoke window shows exactly what your wallet will be asked to sign, with the safety checks above the button.

Route B · Sign it somewhere else

In the revoke window, open **“Sign the revoke somewhere else (another wallet, multi-sign or an XRPL library)”** and press **Copy transaction**. It looks like this (with your own two addresses):

```
{ "TransactionType": "DelegateSet", "Account": "your address", "Authorize": "the delegate's address", "Permissions": [] }
```

Sign it with a wallet or XRPL software you trust that supports `DelegateSet`. The signer adds the fee and sequence number. Then scan again: the card should be gone. Developers can use current versions of the official XRPL libraries; on 24 October 2026 the xrpl.js version used to build and test this tool (5.3.0) signed DelegateSet correctly.

Route C · Practise it first

If you just want to see exactly what a revoke does, use the Practice Lab in chapter 7. It uses the very same revoke window, the same safety checks and the same ledger verification as Route A.


What the tool does for you after signing

It waits for the ledger to confirm the transaction, then reads it back and checks it is exactly the revoke you approved and that the delegate is gone. On Mainnet it asks servers run by two different organisations. If the servers are busy you will see **“Sent — not confirmed yet. Do NOT sign again.”** with a **Check again** button: the page never offers to sign a second time once a revoke has been sent. One click only ever sends one transaction.

7 · Practise on Testnet: the Practice Lab

The Practice Lab runs the whole story from chapter 2 for you, with two throwaway accounts on the Testnet and play money. It takes about two minutes and needs no wallet. Nothing you do here can touch Mainnet or your real wallet.

> **How the Practice Lab keeps you safe**
>
> It appears only when the page is on **Testnet**. It gets its two practice accounts and their keys from the official Testnet faucet (a free service that hands out play-money accounts). The keys live only in this browser tab, are never stored or shown, and are forgotten the moment you switch to Mainnet or press **Forget everything now**. The lab can only sign for its own two practice accounts and refuses anything else. These rules are enforced in the tool's code, and our tests check them.

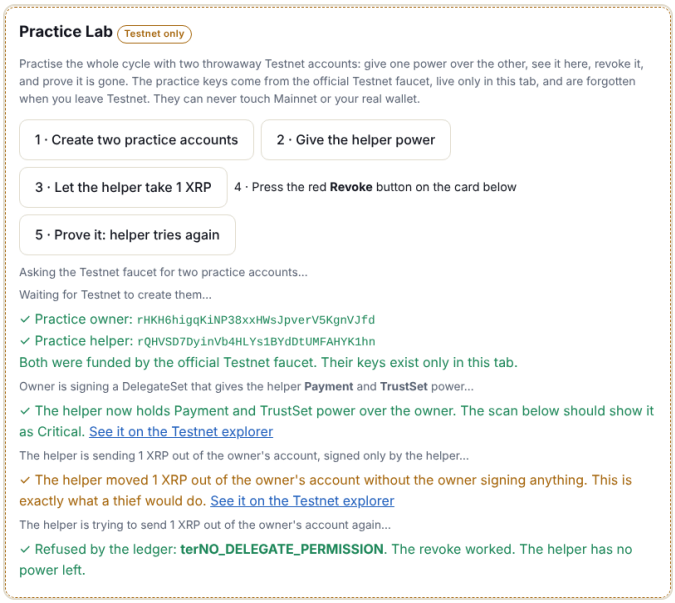


The Practice Lab after every step. Each line tells you what happened, with a link to the transaction on the Testnet explorer.


The buttons in the lab are numbered **1**, **2**, **3** and **5**; number **4** is the red Revoke button on the card below the lab. Follow them in order.

- **Before you start: switch to Testnet** with the switch near the top. The orange line appears, and the **Practice Lab** panel appears under the address box.
- **Press "1 · Create two practice accounts."** After a few seconds you see *"✓ Practice owner: r…"* and *"✓ Practice helper: r…"*. The wallet line now reads *"Connected: Practice Lab (Testnet)"*, the owner's address is filled in, and a scan runs: *"No one has delegated power over this account."*

- **Press “2 · Give the helper power.”** The owner signs a DelegateSet giving the helper **Payment** and **TrustSet**, which is what a scam site would ask you for. You see *“✓ The helper now holds Payment and TrustSet power over the owner.”* The automatic re-scan shows a red *“Change detected”* banner (the list changed) and a red *“1 account can act as this wallet”* banner with a **Critical** card.
- **Press “3 · Let the helper take 1 XRP.”** The helper sends 1 XRP out of the owner's account, signed only by the helper. You see *“✓ The helper moved 1 XRP out of the owner's account without the owner signing anything.”* The scan's **Already used** list now shows that payment.
- **Step 4 · press the red “Revoke all of this delegate's power” button** on the card. The revoke window opens with the button **“Sign with the practice key”** and two green ticks. Press it. Within a few seconds you see **“Revoked … no longer has any power over this account. Verified on the ledger.”** Close the window; the scan shows a red *“Change detected”* banner above the green *“No one has delegated power”* banner.
- **Press “5 · Prove it: helper tries again.”** You see **“✓ Refused by the ledger: terNO_DELEGATE_PERMISSION. The revoke worked.”**

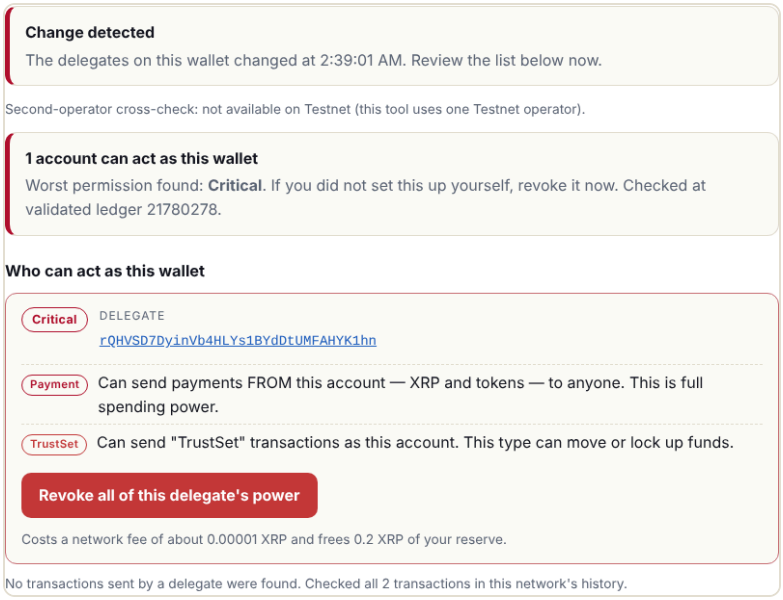

After button 2: the helper holds Critical power over the practice owner, exactly as a victim's wallet would look.

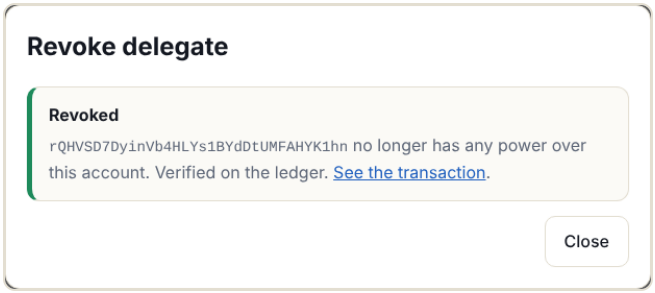

After the revoke: confirmed and verified on the ledger.

Want to run it again? Press button 1 again for two fresh accounts. Ripple can reset the Testnet at any time (xrpl.org), and the faucet can be busy; if button 1 fails, wait a minute and try again.

8 · Test everything yourself: the full checklist

Work through this list to test every part of the tool before you rely on it or recommend it. Each test says exactly what you should see. If anything is different, note the test number and what you saw, and report it.

A · Checking

#	DO THIS	YOU SHOULD SEE	
A1	On **Mainnet**, scan your own address (or any address you know).	The fingerprint matches your wallet. A green line *"Two independent operators agree: InFTF (xrplcluster.com) and Ripple (s2/s1.ripple.com)"*, then either the green *"No one has delegated power"* banner or the list of delegates.	☐
A2	Change one character of the address and press Scan.	*"Not a valid address"*. Every XRPL address has a built-in checksum, so one wrong letter is caught.	☐
A3	Switch to **Testnet** and scan your real Mainnet address.	Usually *"This account does not exist on this network"*, because your real wallet has never been used on the practice network. This is correct.	☐

B · The whole cycle (Practice Lab, Testnet)

#	DO THIS	YOU SHOULD SEE	
B1	On Mainnet, look for the Practice Lab.	It is not there. It only exists on Testnet.	☐
B2	Follow chapter 7 from "Before you start" to button 5.	Each message as described in chapter 7, ending with *terNO_DELEGATE_PERMISSION*.	☐
B3	After button 2, press Scan again on the same address.	No *"Change detected"* banner this time, because nothing changed since the last scan.	☐
B4	Open any *"See it on the Testnet explorer"* link.	The same transaction on testnet.xrpl.org, with result *tesSUCCESS*.	☐
B5	Switch back to Mainnet.	The wallet line says *"Practice Lab closed. Its throwaway keys were forgotten."*	☐

C · Your wallet extension (Crossmark or GemWallet)

#	DO THIS	YOU SHOULD SEE	
C1	Without the extension installed, press its button.	*"Crossmark is not installed in this browser."* (or GemWallet).	☐
C2	With it installed and unlocked, press its button and approve.	*"Connected: Crossmark · r…"* (or GemWallet), and your address in the box.	☐
C3	Put the wallet on Mainnet and the page on Testnet, scan your address, and press Revoke on any card (if you have one), or use a Testnet wallet that has a delegate.	The **Network lock** stops you: *"your wallet reports mainnet but this page is on testnet."*	☐
C4	On Testnet, with the wallet on its Testnet network and holding a practice account that has a delegate, press Revoke, then "Sign with my wallet", and approve in the wallet.	Today: *"[Wallet] cannot sign this type of transaction yet … Nothing was sent and nothing changed"* and a copy of the revoke. Once your wallet adds DelegateSet: *"Revoked … Verified on the ledger."*	☐

For test C4 you need a Testnet account with a delegate, held in your wallet. Your wallet can create a Testnet account, and the official XRPL faucet can fund it. Giving it a delegate needs software that can sign DelegateSet with permissions, which the extensions cannot do yet, so most people should use the Practice Lab (section B) instead.

D · Check before you sign

Open the **Check before you sign** tab, paste each sample, press **Explain it in plain English**, and compare. These are examples only; never sign them.

#	PASTE THIS	YOU SHOULD SEE	
D1	`{"TransactionType":"DelegateSet","Account":"rPT1Sjq2YGrBMTttX4GZHjKu9dyfzbpAYe","Authorize":"rUn84CUYbNjRoTQ6mSW7BVJPSVJNLb1QLo","Permissions":[{"Permission":{"PermissionValue":"Payment"}}]}`	**Do not sign unless you are 100% sure** It grants another account power to act as yours, with Payment (full spending power).	☐
D2	`{"TransactionType":"AccountSet","Account":"rPT1Sjq2YGrBMTttX4GZHjKu9dyfzbpAYe","SetFlag":4}`	**Do not sign unless you are 100% sure** It turns on “disable the master key”.	☐
D3	`{"TransactionType":"Batch","Account":"rPT1Sjq2YGrBMTttX4GZHjKu9dyfzbpAYe","Flags":65536,"RawTransactions":[{"RawTransaction":{"TransactionType":"Payment","Account":"rPT1Sjq2YGrBMTttX4GZHjKu9dyfzbpAYe","Destination":"rUn84CUYbNjRoTQ6mSW7BVJPSVJNLb1QLo","Amount":"1","Flags":1073741824}},{"RawTransaction":{"TransactionType":"DelegateSet","Account":"rPT1Sjq2YGrBMTttX4GZHjKu9dyfzbpAYe","Authorize":"rUn84CUYbNjRoTQ6mSW7BVJPSVJNLb1QLo","Permissions":[{"Permission":{"PermissionValue":"Payment"}}],"Flags":1073741824}}]}`	**Do not sign unless you are 100% sure** A bundle of 2: a tiny payment as “Inside #1” and the spending key hidden as “Inside #2”.	☐
D4	`{"TransactionType":"Payment","Account":"rPT1Sjq2YGrBMTttX4GZHjKu9dyfzbpAYe","Destination":"rUn84CUYbNjRoTQ6mSW7BVJPSVJNLb1QLo","Amount":"10000000"}`	**Read every line before signing** “Sends 10 XRP to rUn84…”	☐
D5	`{"TransactionType":"AccountSet","Account":"rPT1Sjq2YGrBMTttX4GZHjKu9dyfzbpAYe","Domain":"6578616D706C652E636F6D"}`	**Check the details** “Changes account settings.”	☐
D6	Type `hello`	*“Could not read that”*, with the reason.	☐

E · Security switches

#	DO THIS	YOU SHOULD SEE	
E1	Security tab: turn on **Privacy blur**, then scan.	Addresses are blurred until you hover over or tap them.	☐
E2	Turn off **Address fingerprint**.	The large “Check against your wallet” line disappears. Turn it back on.	☐
E3	Press **Forget everything now**.	The page clears, the wallet disconnects, every switch returns to its default, and *“Everything forgotten.”* appears.	☐
E4	Turn off **Strict transaction check**, then press **Reset to safest defaults**.	Every switch returns to the default shown in chapter 10 (“Remember settings” stays as you set it).	☐

F · Is my copy the real one?

If you downloaded the tool file, compare its fingerprint with the published one (chapter 14). If it does not match exactly, do not use it.

9 · Check before you sign

Use this tab whenever a website or app asks you to sign something and you are not sure what it is. Nothing you paste here leaves your computer.

1. Open the **Check before you sign** tab.
2. Paste the transaction. It can be text that starts with `{` (called JSON), or a long string of numbers and letters A–F (called a *blob*, the packed form a wallet signs).
3. Press **Explain it in plain English.**


YOU SEE	WHAT TO DO
Do not sign unless you are 100% sure	It can hand over your wallet or its funds, for example a `SetRegularKey` (gives another key full control), a `SignerListSet`, an `AccountDelete`, or a `DelegateSet` granting `Payment`. Stop and ask someone you trust.
Read every line before signing	It moves money or grants power. Check the amount and the receiving address.
Check the details	It changes something. Make sure it is what you meant.
Low risk	Nothing in it moves funds or grants power.

Bundles. If the transaction is a `Batch`, every transaction inside it is listed separately as “Inside #1”, “Inside #2” and so on. Scammers like to put a harmless tiny payment first and the dangerous part second, so read them all. A batch holds 2 to 8 transactions, and a batch inside a batch is not allowed on the ledger, so the tool calls that out as a trick.

Scams the checker recognises

TRICK	WHAT THE CHECKER SAYS
Handing out a spending key (`DelegateSet` with `Payment`), or hiding an 11th permission past the ledger's limit of 10	Critical
Giving away control: `SetRegularKey` , `SignerListSet` , or `AccountSet` that **disables your master key**	Critical
“Selling” your NFT for 0 to a chosen address (giving it away)	Critical
A huge network fee that burns your XRP	Critical
An already-signed transaction, or one using a *Ticket*, with **no expiry** — whoever holds it can submit it months later	High
Escrows, payment channels and checks that lock up or hand over funds	High, with amount and receiver
A memo containing a web link	High, “Links in memos are a common scam; never follow them.”
The partial-payment flag (the amount delivered can be far less than shown)	High

The checker refuses anything larger than a real transaction could be (over 1 million characters) instead of freezing your browser.

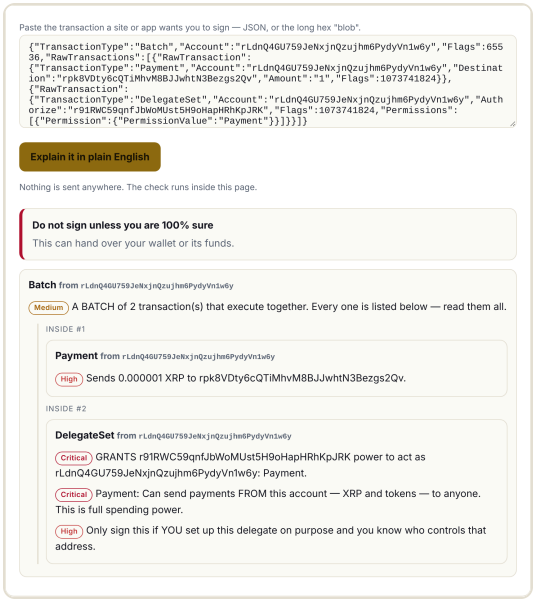

A bundle that sends a tiny payment first and hands out a spending key second. The tool flags the hidden part.


10 · Your security switches

Open the **Security** tab. Every switch is yours to turn on or off, and the safest choice is already on. Changes apply straight away.

SWITCH	DEFAULT	WHAT IT PROTECTS YOU FROM
Strict transaction check	On	Before your wallet even opens, the tool checks the revoke field by field: right type, your account, the delegate you chose, an empty permission list, and a fee under your limit. Anything else is blocked.
Verify on the ledger after signing	On	A broken or fake wallet that signs something different from what you approved. After signing, the tool reads the transaction back from the ledger. If it does not match, you get a red warning telling you to move your funds to a fresh wallet. We tested this with a deliberately dishonest wallet and the alarm fired.
Network lock	On	Signing on the wrong network. If your wallet reports a different network from the page, signing is blocked. (If you use a custom network in your wallet, it may report “custom”; switch the wallet to its built-in Mainnet or Testnet.)
Fee limit	0.001 XRP	Paying an inflated fee. The normal fee is 0.00001 XRP. Choose 0.0001, 0.001 or 0.005 XRP as the most the tool will ever ask for.
Second-operator cross-check	On	A ledger server that is out of date, broken or lying. On Mainnet the tool asks servers run by two **different organisations** — InFTF (`xrplcluster.com`) and Ripple (`s1/s2.ripple.com`), with Honeycluster as a backup — and tells you whether they agree. (`xrpl.ws` is another name for `xrplcluster.com` , so it is never counted as a second opinion.) A second opinion that does not answer within 10 seconds is skipped and you are told. On Testnet the tool uses one operator (XRPL Labs), so there is no second opinion, and the tool says so.
Address fingerprint	On	Clipboard malware that swaps an address you copied for a different one.
Privacy blur	Off	People seeing your addresses while you share your screen or stream. Addresses blur until you hover over or tap them.
Auto-disconnect wallet	On, 5 min	Someone using your unattended computer. The tool forgets your connected wallet after 2, 5 or 15 minutes without activity.
Watch mode	Off	A new spare key appearing on your wallet while you are not looking. While the tab stays open, the tool re-checks every 5, 10 or 30 minutes and flashes the tab title if anything changed.
Browser notifications	Off	Missing a Watch mode alert. Shows a system pop-up even when the tab is in the background. Your browser asks your permission first.

Remember settings on this device	Off	Off means nothing is saved anywhere. On keeps your choices in this browser only. Turning it off erases them.

Reset to safest defaults puts every switch back to its default, except “Remember settings on this device”, which stays as you set it. **Forget everything now** disconnects your wallet, closes the Practice Lab, clears the page, puts every switch back to its default (including turning “Remember settings” off), and erases anything the tool saved in this browser.

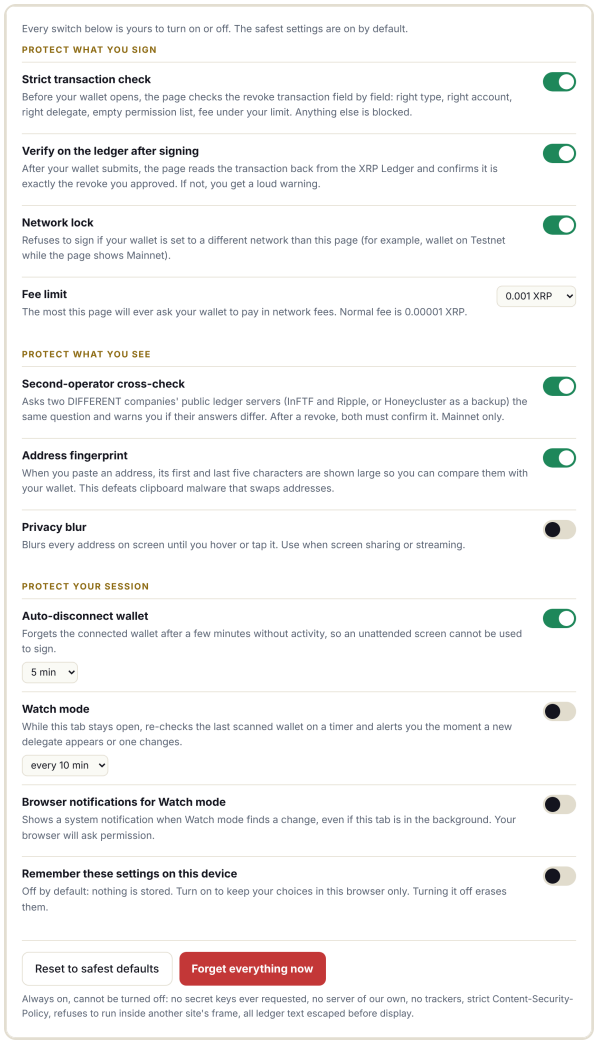

The Security tab.

Protections that are always on

- No secret key or recovery words are ever requested.
- The tool is one file with no server of its own, no trackers and no outside scripts.
- A strict browser rule called a *Content-Security-Policy* only lets the tool's own code run, and only lets it talk to the public ledger servers named in chapter 14 and the official Testnet faucet.

- It refuses to run inside another website's frame, which stops tricks where a hidden page steals your clicks.
- Everything read from the ledger is cleaned before display, so a hostile account name cannot inject code into the page.
- Data from a server is never trusted for shape or size: malformed entries, fake addresses, fake transaction links and invisible or right-to-left characters are dropped or stripped.
- Every ledger question has a time limit of 40 seconds across all servers, so a dead or hostile server cannot freeze the page.
- Saved number settings (fee limit, timers) are only accepted if they are one of the exact choices offered, so a tampered browser cannot quietly raise your fee limit. If settings saved in your browser have any protection switched off, the tool warns you in red the moment the page opens.
- While a revoke is in flight, the network cannot be switched and a second click cannot send a second transaction.
- Garbage numbers from a server never reach your wallet: the revoke is blocked before signing.

11 · Golden safety rules

1. **Nobody legitimate ever needs your recovery words.** Not this tool, not support staff, not an airdrop.
2. **“Free reward” plus “connect your wallet” is the oldest trick there is.** Check before you sign (chapter 9).
3. **If a delegate already sent money you did not expect,** revoke it, then move your remaining funds to a brand-new wallet. Someone may also have your key.
4. **If you cannot revoke straight away** (for example because your wallet cannot sign DelegateSet yet) and a delegate holds Critical power you did not give on purpose, move your funds to a brand-new wallet that has no delegates. A spare key only works on the account it was given for.
5. **Bookmark the real address of this tool** and always open it from your bookmark, never from a link in a message.
6. **Re-check every so often,** or turn on Watch mode while you work.

12 · Troubleshooting

MESSAGE	WHAT IT MEANS AND WHAT TO DO
“Not a valid address”	A character is missing, extra or mistyped. XRPL addresses carry a built-in checksum, so even one wrong letter is caught. Copy it again.
“Hidden characters found”	What you pasted contains invisible characters, a known clipboard trick. Copy the address again directly from your wallet app.
“This account does not exist on this network”	Either the address has never been funded, or you are on the wrong network. Check the Mainnet/Testnet switch.
“No ledger server could be reached right now”	The public servers are busy or your internet dropped. The tool already tried every server for up to 40 seconds. Wait a minute and press Scan again.
Orange “Only one operator answered”	The result could not be double-checked by a second, independent organisation this time. Scan again in a minute.
Red “Two independent operators disagree”	Two different organisations' servers gave different answers. One may be a few seconds behind; scan again in a minute. If it keeps happening, check the account on a public explorer.
“Could not finish the history check”	The list of delegates is still correct; only the “already used” check stopped. Scan again later or check the wallet on an explorer.
“[Wallet] cannot sign this type of transaction yet”	Your wallet's built-in XRP Ledger software is older than DelegateSet. Nothing was sent. Use Route B in chapter 6, or check for a wallet update.
“Crossmark / GemWallet is not installed in this browser”	Install the extension from its official website and refresh the page, or use Route B in chapter 6.
“Network lock: your wallet reports … but this page is on …”	Your wallet and the page are on different networks. Switch one of them so they match.
“Strict check blocked this transaction”	Something about the revoke did not match, for example the network fee rose above your limit. Read the reason shown. Raise the fee limit only if you understand why.
Orange “Sent — not confirmed yet. Do NOT sign again.”	The revoke was sent but the servers were too busy to confirm it. Do not sign again. Press **Check again** in a minute.
Orange “Revoke sent — waiting for full confirmation”	The revoke went through but a server has not caught up yet. Scan again in a minute and the card should be gone.

Red “WARNING: the ledger shows a different transaction”	Your wallet signed something other than what you approved. Stop using that wallet, move your funds to a fresh wallet, and scan again.
Practice Lab: “Could not get practice accounts from the Testnet faucet”	The free Testnet faucet is busy or down. Wait a minute and press button 1 again.

13 · Questions people ask

Is it really free?
Yes. The tool is free and open source. The only cost is the ledger's own network fee when you revoke, about 0.00001 XRP, and that fee goes to the ledger, not to us.

Can this tool move my money?
No. It can only *ask* your wallet to sign one kind of transaction, a revoke, and you approve or reject it inside your wallet. The Practice Lab signs only for its own throwaway Testnet accounts.

Why can't my wallet sign the revoke?
DelegateSet is a new transaction type, switched on in October 2026. A wallet has to update the XRP Ledger software built into it before it can build and sign one. On 24 October 2026 Crossmark and GemWallet had not done so yet. Checking your wallet does not depend on this.

Does it store my address?
No. Nothing is stored unless you turn on “Remember settings,” and even then only your switch choices are saved, in your own browser.

Why isn't the tool built into the XRP Ledger itself?
The XRP Ledger does not run custom programs on its main network. It doesn't need to: reading delegations and revoking them are already built into the ledger. This tool makes them easy to use.

Is it made by Ripple or the XRPL Foundation?
No. It is an independent community tool by Stanley Gebara of CryptoLwa, and it is not affiliated with Ripple, the XRPL Foundation, Crossmark or GemWallet.

Is delegation always bad?
No. Businesses use it on purpose, for example letting a compliance account freeze tokens without holding the main key. The tool shows you what exists so you can decide.

14 · For builders: hosting, verifying and running the tests

The whole tool is a single HTML file. To host it:

1. Upload `xrpl-delegation-checker--2026-10-24.html` to any static host, such as Cloudflare Pages, GitHub Pages or Netlify, for example as `/tools/xrpl-delegation-checker/index.html`.
2. Add the lines from `_headers--2026-10-24.txt` to your host's headers settings, and change the path line (it starts with `/tools/`) to match where you put the file. These headers add frame blocking, HTTPS enforcement and other protections that a web page cannot set for itself.
3. Prove your copy is the original: run `sha256sum` on Linux or Mac, or `certutil -hashfile <file> SHA256` on Windows, and compare the result with `SHA256SUMS--2026-10-24.txt`.

The tool only connects to public XRPL servers listed on xrpl.org's “Public Servers” page: `xrplcluster.com` and its alias `xrpl.ws` (InFTF), `s1.ripple.com` and `s2.ripple.com` (Ripple), and `honeycluster.io` (Honeycluster) for Mainnet, and `testnet.xrpl-labs.com` for Testnet; plus the official Testnet faucet `faucet.altnet.rippletest.net` for the Practice Lab. Ripple and Honeycluster are reached over WebSocket, because their HTTPS addresses do not allow a web page to read the answer.

Rebuild it yourself and get the identical file

The build is **reproducible**: in the `source` folder, run `npm ci` and then `node build.mjs`. The file it produces has exactly the same SHA-256 fingerprint as the published one. The exact library versions are pinned in `package-lock.json`. Always build and test from this same folder: version 1.0.3's Crossmark bug came from testing a build made with different settings from the release.

The automated tests

TEST FILE	WHAT IT PROVES	RESULT FOR 1.0.4
`unit.mjs`	Core logic, server failover and rate limits	All passed
`attack-core.mjs`	Hostile server data, bad input, decoder tricks	35 of 35
`attack-browser.mjs`	Real browser with every server replaced by a hostile one	26 of 26
`browser.mjs`	Live Testnet and Mainnet, every security feature	35 of 35
`lab-live.mjs`	Practice Lab logic on live Testnet: signing matches xrpl.js byte for byte, refuses Mainnet and foreign accounts, full cycle ending in terNO_DELEGATE_PERMISSION	All passed
`lab-browser.mjs`	The full Practice Lab cycle through the real revoke window, in the release file	All passed
`release-smoke.mjs`, `file-open.mjs`	The exact release file loads under its security policy, scans Mainnet, both wallet buttons work, and it works opened from disk	All passed
`wallet-e2e/`	Drives the real Crossmark and GemWallet extensions through connect and revoke on Testnet	Connect works; signing refused by both wallets, as described in chapter 3

Educational and informational only, not financial advice. Facts in this manual were checked against the live XRP Ledger, the official documentation at xrpl.org and the real wallet extensions on 24 October 2026. The XRP Ledger and wallets change, so check xrpl.org and your wallet's release notes for the latest. © 2026 Stanley Gebara · CryptoLwa · www.cryptolwa.io

15 · Glossary

Address

Your public account number on the XRP Ledger. It starts with “r”. Safe to share.

Amendment

An upgrade to the XRP Ledger's rules. It switches on only after the network's validators vote for it.

Batch

A bundle of 2 to 8 transactions that run together as one.

Delegate

An account that has been given a spare key with limits to act for another account.

DelegateSet

The transaction that gives, changes or takes back a delegate's permissions. An empty permission list takes everything back.

Faucet

A free service that creates Testnet accounts filled with play money for practice.

Fee

The tiny amount of XRP every transaction burns, normally 0.00001 XRP.

Mainnet / Testnet

The real XRP Ledger, and its practice copy where coins have no value.

Permission

One specific thing a delegate is allowed to do, such as `Payment`. One delegate can hold up to 10.

Practice Lab

The part of this tool, shown only on Testnet, that lets you practise giving and revoking a spare key with throwaway accounts.

Reserve

XRP the ledger makes every account keep and not spend: 1 XRP per account, plus 0.2 XRP for each item the account owns, including each delegate.

Revoke

Take a delegate's permissions back.

Secret key / recovery words

The master key to your wallet. Never type them into any website.

Sign

Approve a transaction with your wallet. Signing is what makes it real.

terNO_DELEGATE_PERMISSION

The ledger's answer when an account tries to act for another account without permission. After a revoke, this is what a thief gets.

Wallet extension

A small add-on in your browser, such as Crossmark or GemWallet, that holds your keys and asks you before signing anything.