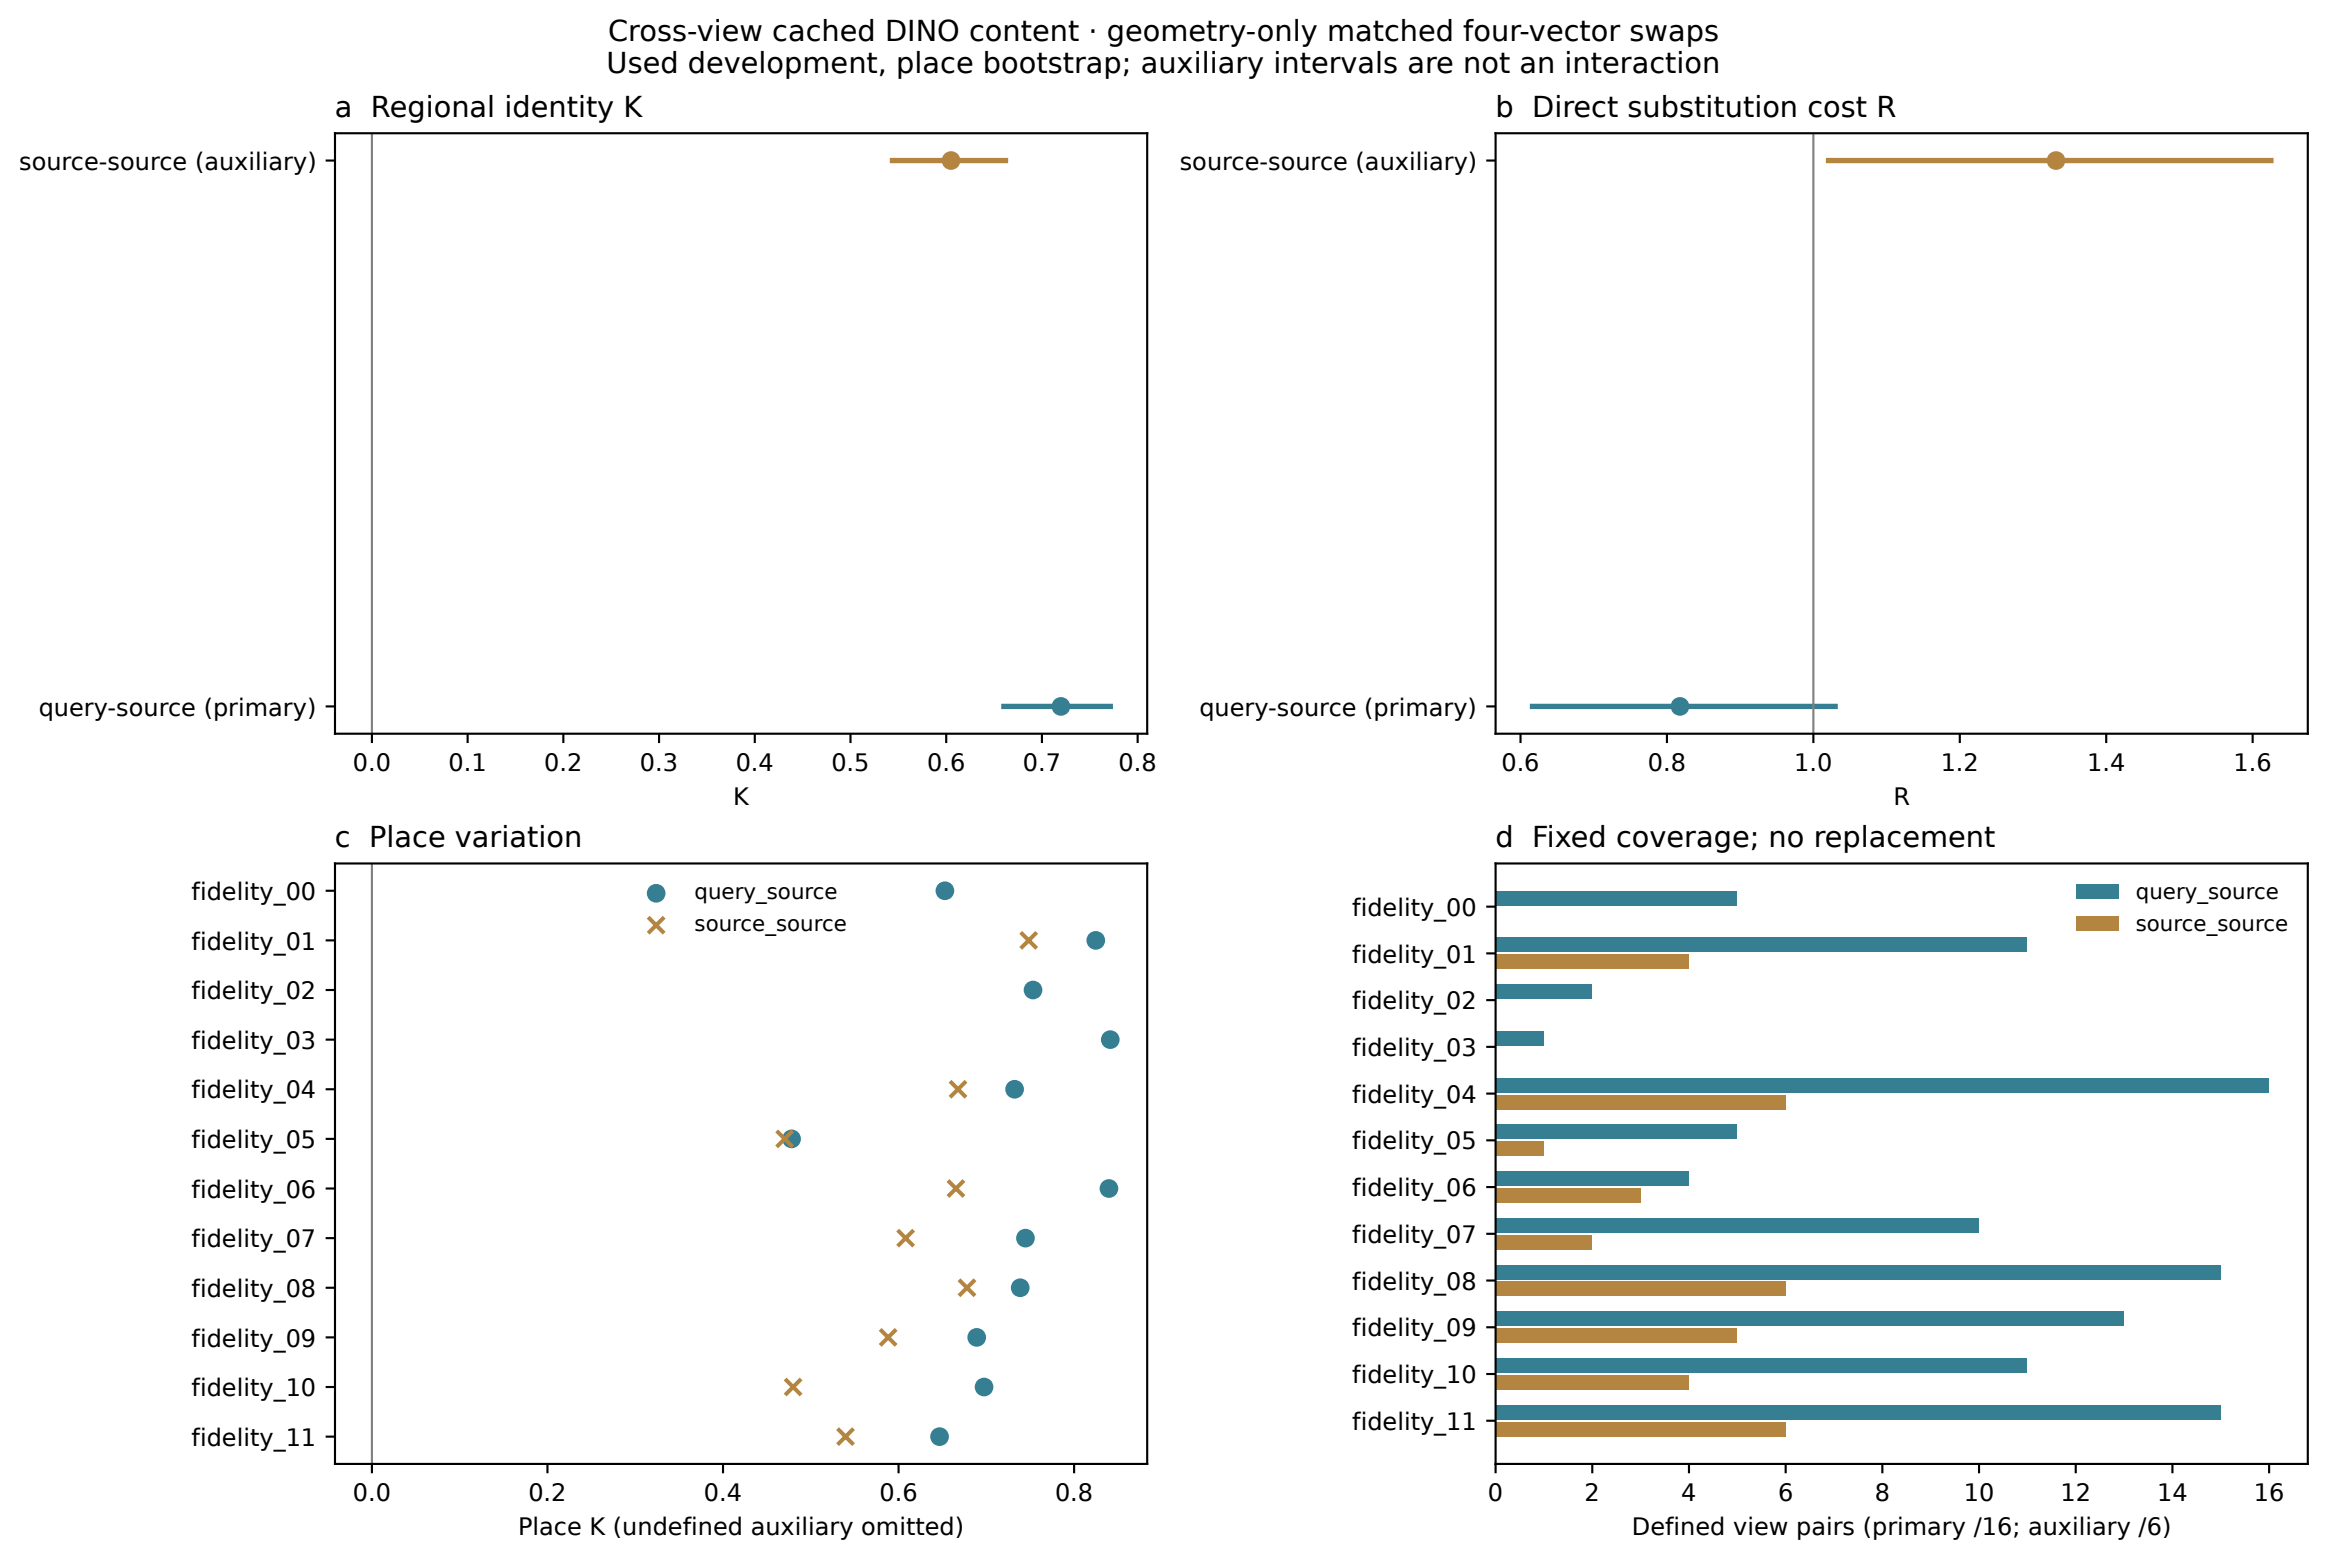
Cross-view cached DINO content · geometry-only matched four-vector swaps
Used development, place bootstrap; auxiliary intervals are not an interaction
a Regional identity K
source-source (auxiliary)
query-source (primary)
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
K
b Direct substitution cost R
source-source (auxiliary)
query-source (primary)
0.6
0.8
1.0
1.2
1.4
1.6
R
c Place variation
query_source
source_source
fidelity_00
fidelity_01
fidelity_02
fidelity_03
fidelity_04
fidelity_05
fidelity_06
fidelity_07
fidelity_08
fidelity_09
fidelity_10
fidelity_11
0.0
0.2
0.4
0.6
0.8
Place K (undefined auxiliary omitted)
d Fixed coverage; no replacement
query_source
source_source
fidelity_00
fidelity_01
fidelity_02
fidelity_03
fidelity_04
fidelity_05
fidelity_06
fidelity_07
fidelity_08
fidelity_09
fidelity_10
fidelity_11
0
2
4
6
8
10
12
14
16
Defined view pairs (primary /16; auxiliary /6)