HCI: STUDY DESIGN

Dr Kami Vaniea

First, the news…

- https://www.interaction-design.org/literature/book/the-encyclopedia-of-human-computer-interaction-2nd-ed/visual-representation

No Class on Thursday

We have been learning about discount usability because these are easy to do with a small amount of time and budget.

Today: designing studies and evaluating the results

Step 1: Define what “usable” means
Step 2: Identify your variables
Step 3: Setup your study
Step 4: Evaluate the outcome

The problem:
You just built a new widget and now you need to evaluate it

Step 1: Define what “usable” means

A system which is undefined can never be wrong, it can only ever be surprising

Define your usability goal

- This step is very similar to specifying tasks for a think-aloud type study
- Identify what you think your users need to be able to do using your system
- The goals need to be specific and easy to identify if they have or have not been completed
- Examples:
  - Find a stool on a shopping page and purchase it
  - Locate the nearest bus stop that the 8 bus stops at
- Bad examples:
  - Have fun using the site
  - Find a bus to go somewhere

Step 2: Identify your variables

What are you going to measure?

- In statistics there are classically two types of measurements (variables): dependent and independent
- Dependent
  - Also known as the outcome variable
  - Measures the usability goal
- Independent
  - Anything you are directly manipulating
  - An element of the study which is under your control
  - A pre-existing feature of your participant

Lets use this study as an example

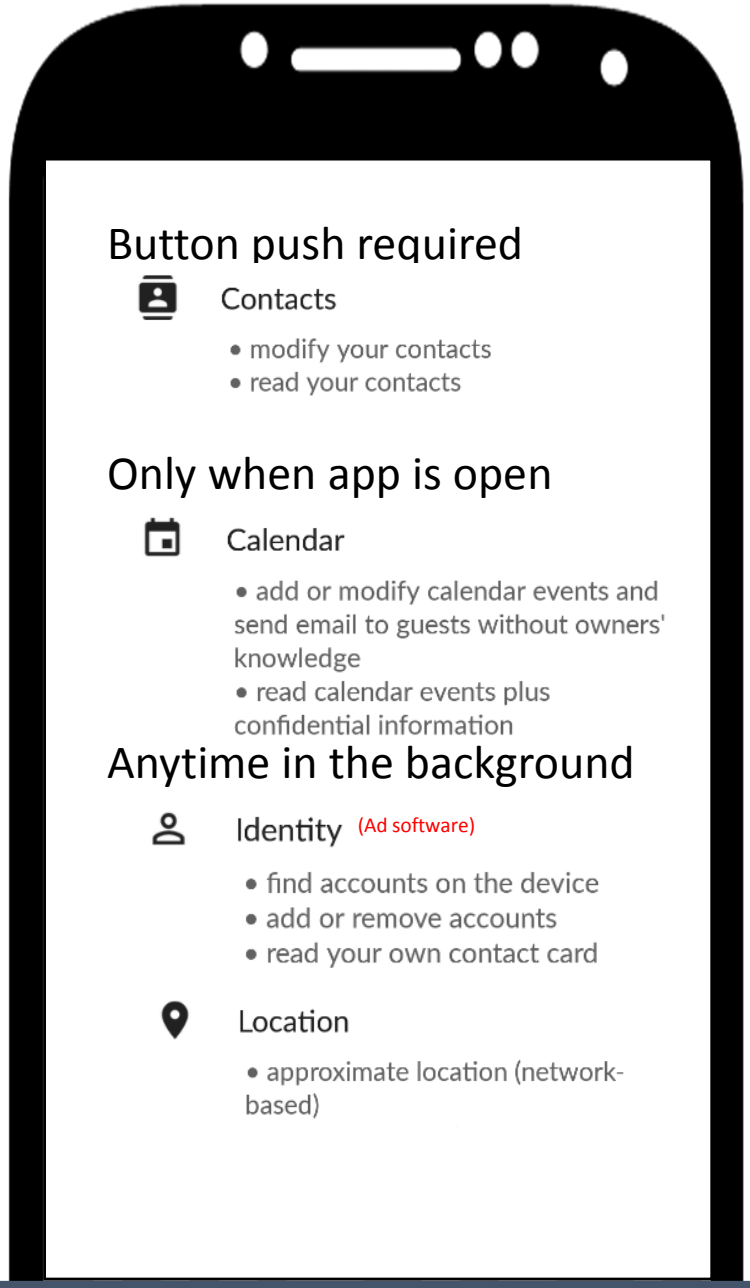

Goal:
User can identify if an app can or cannot perform an action directly tied to a permission.

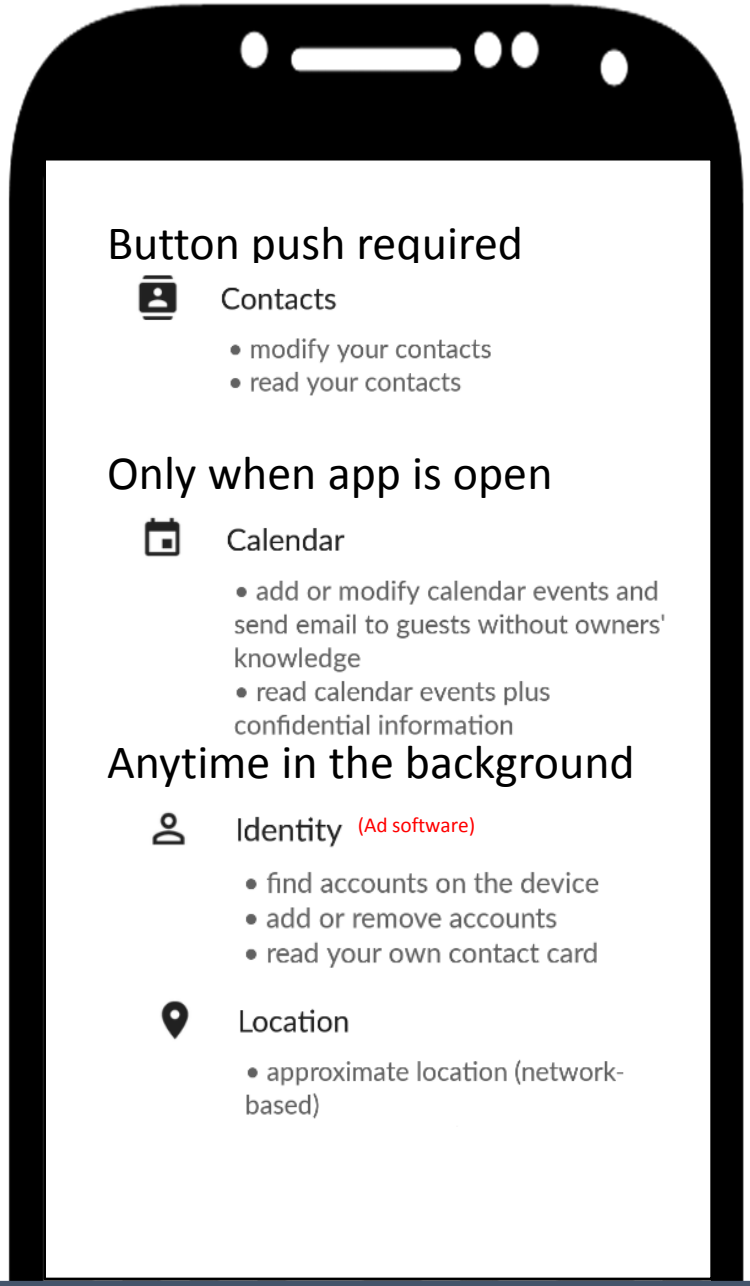

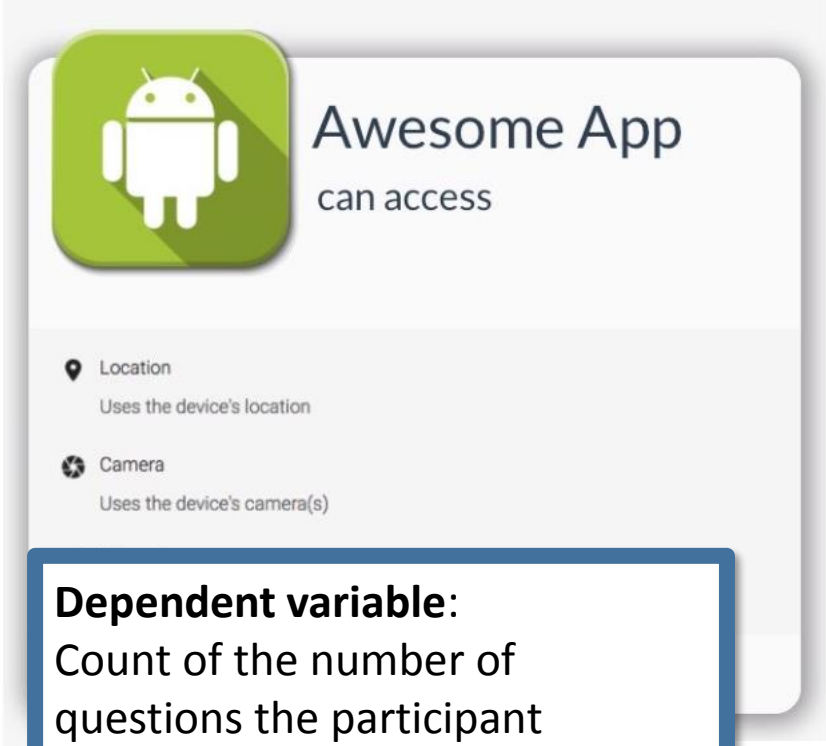

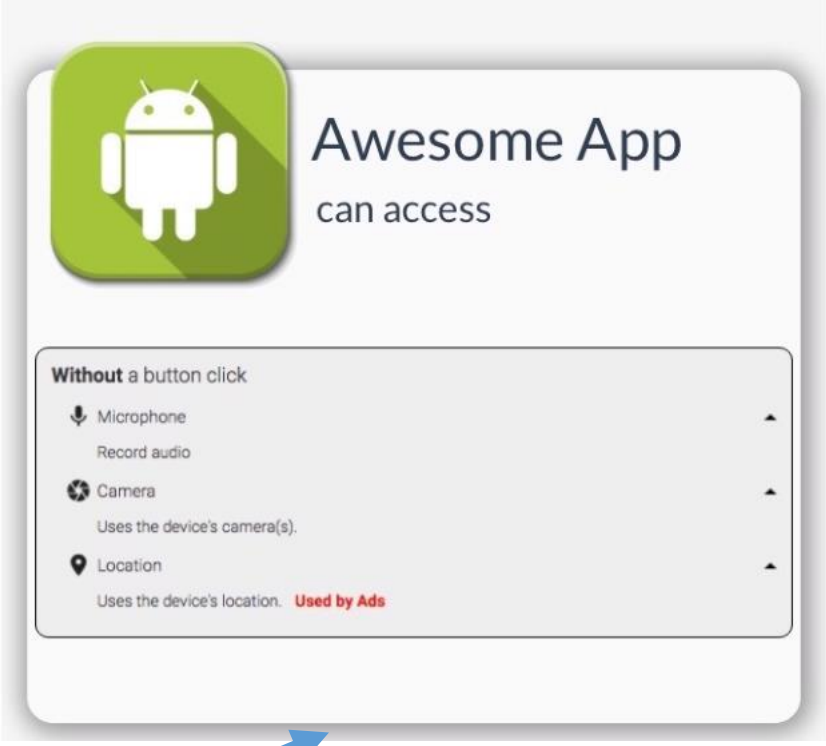

Dependent variable:
Count of the number of questions the participant answered correctly

Independent variable:
Which of the two interfaces the participant was shown

…n this app do?

					Absolutely Possible
Charge purchases to your credit card at any time.					○
Get your location.	○	○	○	○	○
Allow ads to know your location.	○	○	○	○	○
Load ads.	○	○	○	○	○
Write on the SD card					

Variables that would make sense

- Goal: User can identify if an app can or cannot perform an action directly tied to a permission.
- Dependent
  - Number of permissions correctly/incorrectly read
  - Time spent reading the permission screen
- Independent
  - Study group
  - Order of the permissions
  - Time of day
  - Type of device (laptop, mobile, PC)
  - Demographics of the participants

XKCD ran a study to see what men and women call different colors

- Dependent
  - The color name they typed in
- Independent
  - Sex (man or woman)
  - Color they were shown

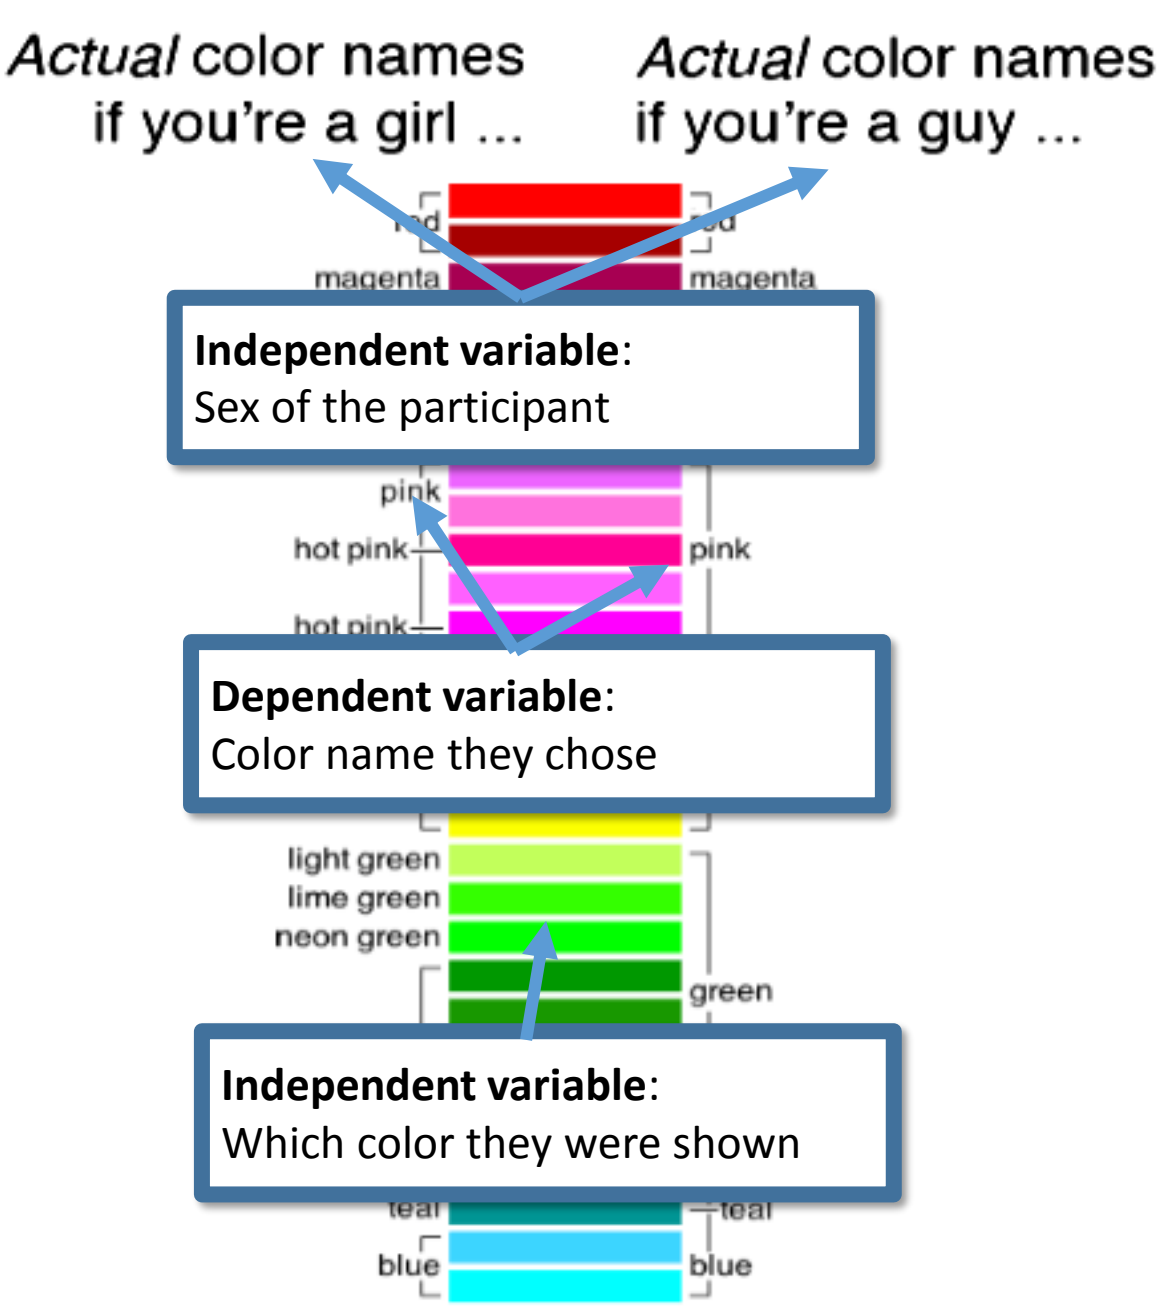

https://blog.xkcd.com/2010/05/03/color-survey-results/

MSc Project on reading config files

- Goal: Does the order of lines in a configuration file impact the way people interpret the file?
- Dependent
  - True/False – did the participant consider order
  - 1-7 – How confident were they in their answer
- Independent
  - Education level for technical professions only
  - Self-efficacy statements around programming and configuration file modification
  - Prior experience with configuration files
  - Other demographics

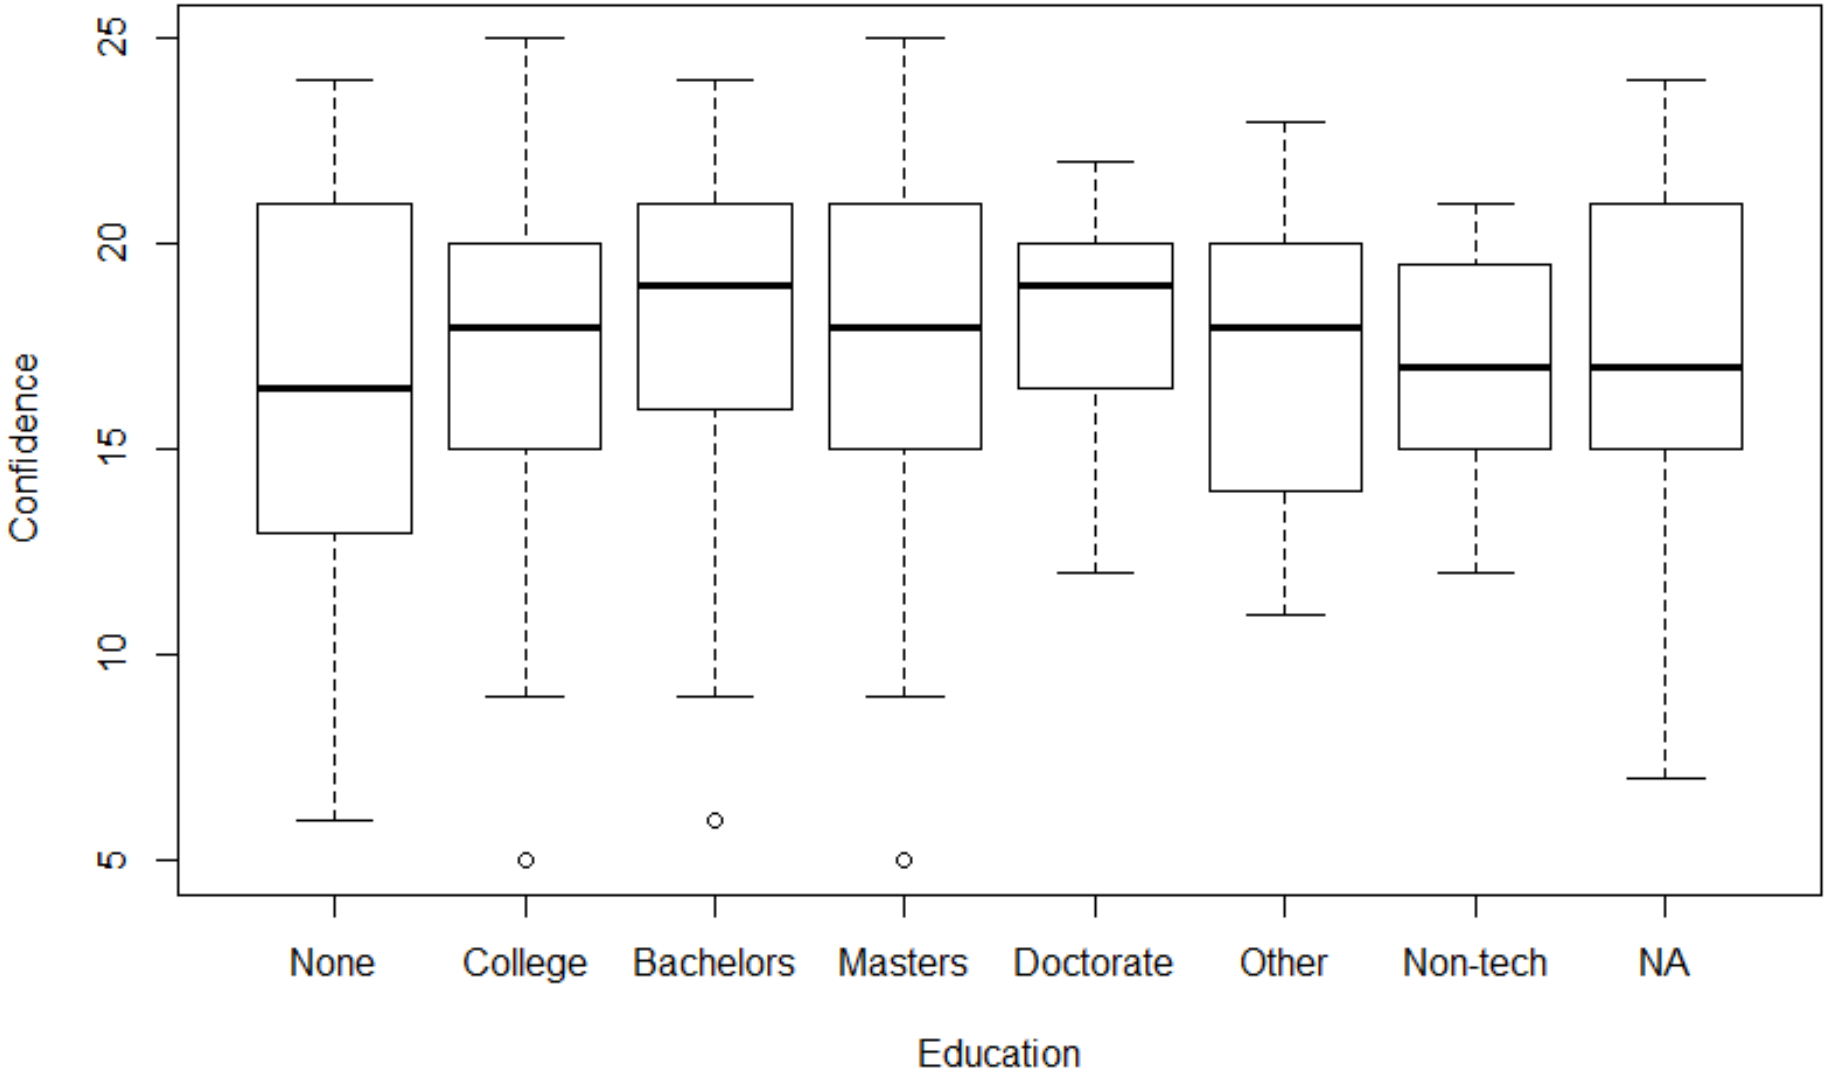
Confidence
5
10
15
20
25
None
College
Bachelors
Masters
Doctorate
Other
Non-tech
NA
Education

What I really want you to learn:

Think about what variables you are interested in and what graph / plot / table you want **before** you conduct the study

Common dependent things to measure

- Time to complete task
- Percent of task completed
- Percent of task completed per unit of time
- Ratio of successes to failures
- Time spent in errors
- Percent or number of errors
- Percent or number of competitors better than it
- Number of commands used
- Frequency of help and documentation use
- Percent of favorable/unfavorable user commands

Common dependent things to measure

- Number of:
  - Repetitions of failed commands
  - Runs of successes and failures
  - Times interface misleads the user
  - Good and bad features recalled by users
  - Available commands not invoked
  - Regressive behaviors
  - Users preferring your system
  - Times users need to work around a problem
  - Times the user is disrupted from a work task
  - Times the user loses control of the system
  - Times user expresses frustration or satisfaction

System Usability Scale

- Have the participants interact with the system
- Have them answer the questions on the right
- Follow the scale instructions
- Use the resulting number as a dependent variable

1. I think that I would like to use this system frequently.
2. I found the system unnecessarily complex.
3. I thought the system was easy to use.
4. I think that I would need the support of a technical person to be able to use this system.
5. I found the various functions in this system were well integrated.
6. I thought there was too much inconsistency in this system.
7. I would imagine that most people would learn to use this system very quickly.
8. I found the system very cumbersome to use.
9. I felt very confident using the system.
10. I needed to learn a lot of things before I could get going with this system.

https://www.usability.gov/how-to-and-tools/methods/system-usability-scale.html

Step 3: Setup your study

What do you want to be able to say after the evaluation is done?

- X interface is better than Y interface
  - Run an A/B study
  - Randomly assign users to groups
  - Have all users complete the same tasks
- My new interface is better than my old interface
  - Same as above
  - Or use rapid usability approach
- Users can use interface X to accomplish Y
  - Have users accomplish a set of tasks using X
  - Measure the usability (see step 2)
- Using my interface makes people better/smarter
  - Pre/post test – give them the same test before and after using your system

Between vs. Within subjects

- Between subjects
  - Your study only shows one interface to one person
  - You are measuring how well the people randomly assigned to the A interface did compared to the people randomly assigned to the B interface
  - Lots of variability with this method
- Within subjects
  - Your study shows all interfaces to all people
  - You are measuring the difference in how they do on the two interfaces
  - Less variability (same person) but more learning effects and priming

Scripted vs observational

- Scripted studies are planned in advance
  - Tasks are prepared in advance
  - Participants are in a controlled environment such as a lab
  - Nearly all lab based studies are scripted
  - Think-aloud is scripted
- Observational studies are not planned and simply observe users doing their own tasks
  - Participants may not even be notified that they are part of a study
  - Participants are in their natural environment doing what they would normally do
  - Hard/impossible to prove what task the user was trying to accomplish

Study design

- A/B test between the existing and new interface
- Between subjects
- 10 Tasks shown in the same order to all participants
- Dependent variables
  - Accuracy on task
- Independent variables
  - Which interface

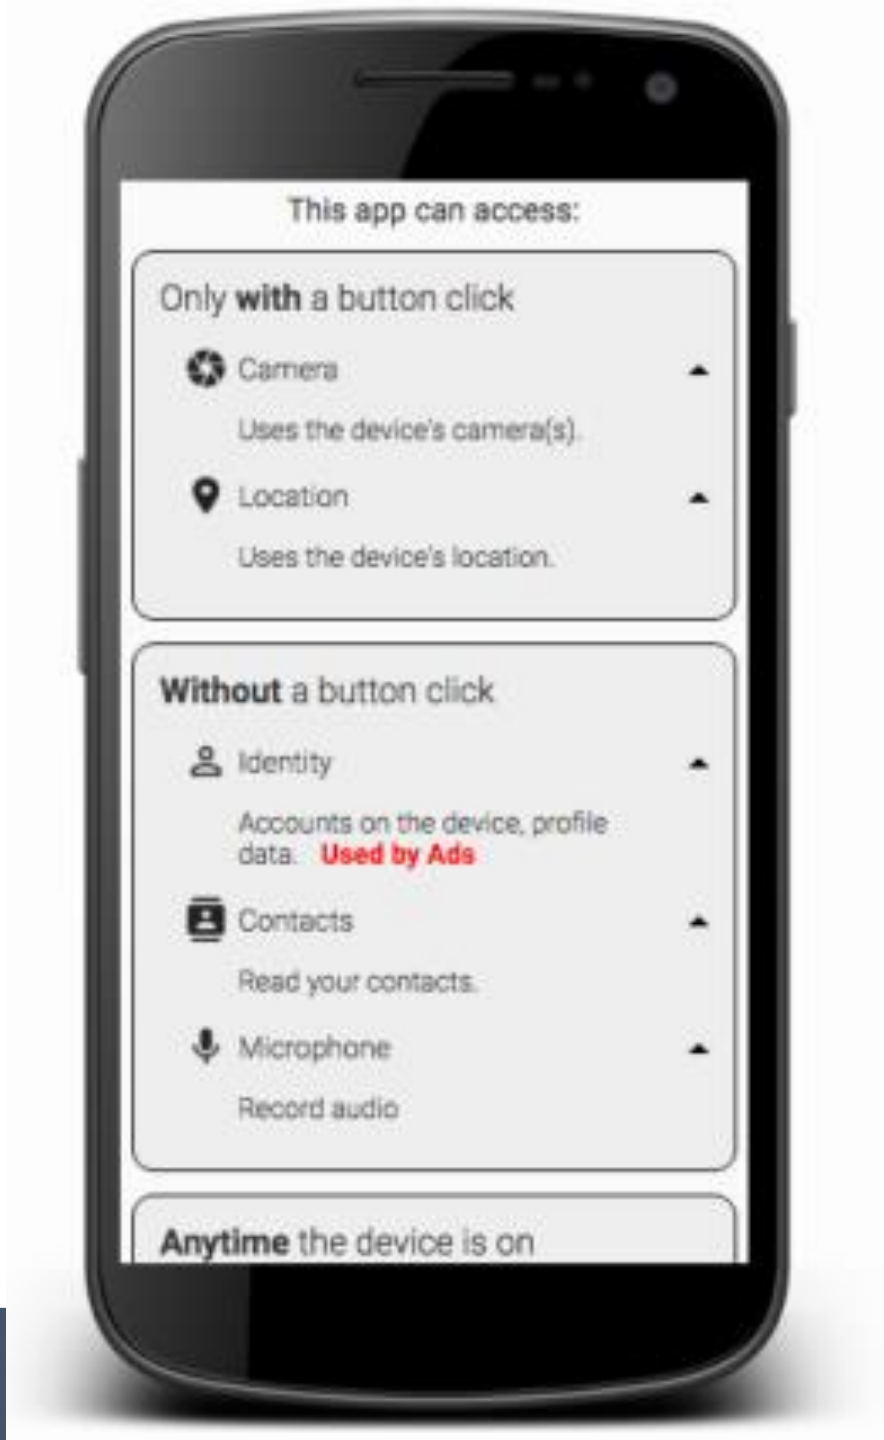

Study design

- Between subjects
- Multiple tasks
- Dependent
  - The color name they typed in
- Independent
  - Sex (man or woman)
  - Color they were shown

https://blog.xkcd.com/2010/05/03/color-survey-results/

Step 4: Evaluate the outcome

Evaluation options

- Basic
  - Counts of effectiveness on tasks
- Academically sound
  - Statistics

Basic version

- Count the number of tasks where the participant was able to accomplish your goal
- If most participants were able to accomplish the goal then Yay! The interface is usable.

	Current Interface	New Interface
Task 1	15	12
Task 2	12	14
Task 3	11	10
Task 4	7	4

We are about to learn about some of the basic statistics used in HCI

These are only needed if you want to prove that a statement is true

Common statistical tests

- Regression
- T-Test
- ANOVA
- χ^2 (Chi Squared)

Chi Squared

- $\chi^2 = \sum \frac{(Observed\ Value - Expected\ Value)^2}{(Expected\ Value)}$
- Answers the question:
  - Does the observed data have the same ratio as expected

OR

  - Do two counts come from the same distribution

Questions?