



THE UNIVERSITY *of* EDINBURGH
informatics

Distributed Systems

Multicast and Agreement


Björn Franke

University of Edinburgh
2016/2017

Multicast

- Send message to multiple nodes
- Node can join multicast *group*, receives all messages sent to that group
- Sender sends only once: to group address
- Network takes care of delivering to all nodes in the group
- Note: groups are restricted to specific networks such as LANs & WANs
 - e.g. multicast in the University network will not reach nodes outside the network


Multicast

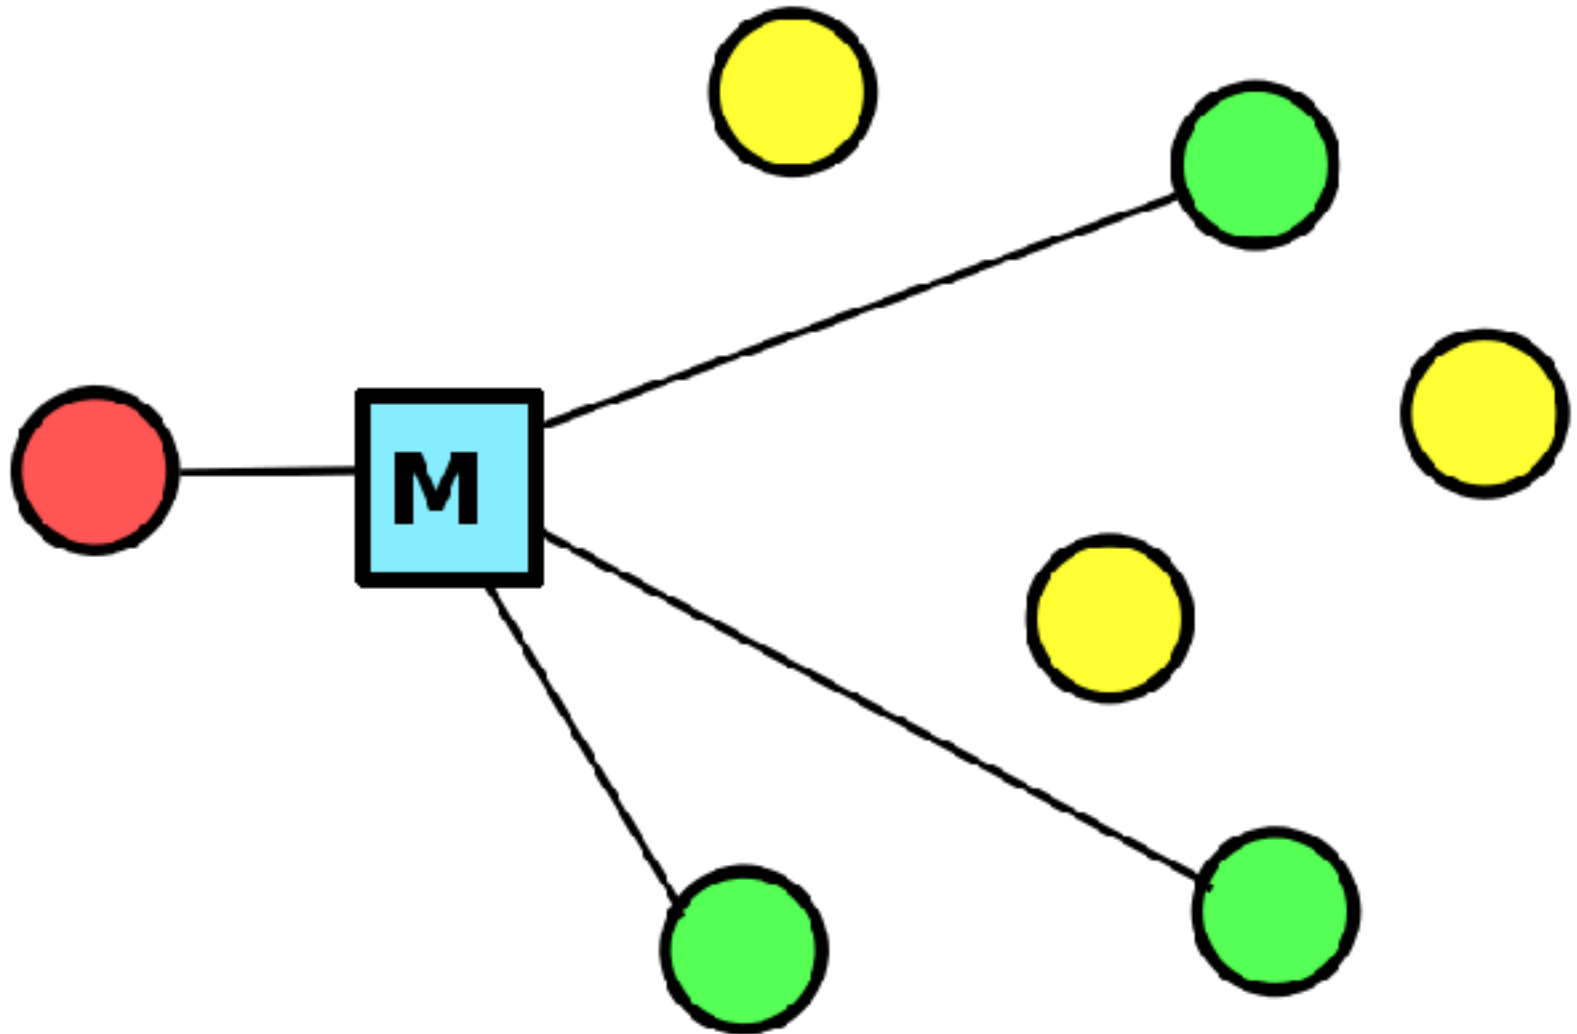

Multicast

- A special version of broadcast (restricted to a subset of nodes)
- In a LAN
 - Sender sends a broadcast
 - Interested nodes accept the message others reject
- In larger networks we can use a tree
 - Remember trees can be used for broadcast
 - Interested nodes join the tree, and thus get messages
 - All nodes can use the same tree to multicast to the same group

Multicast

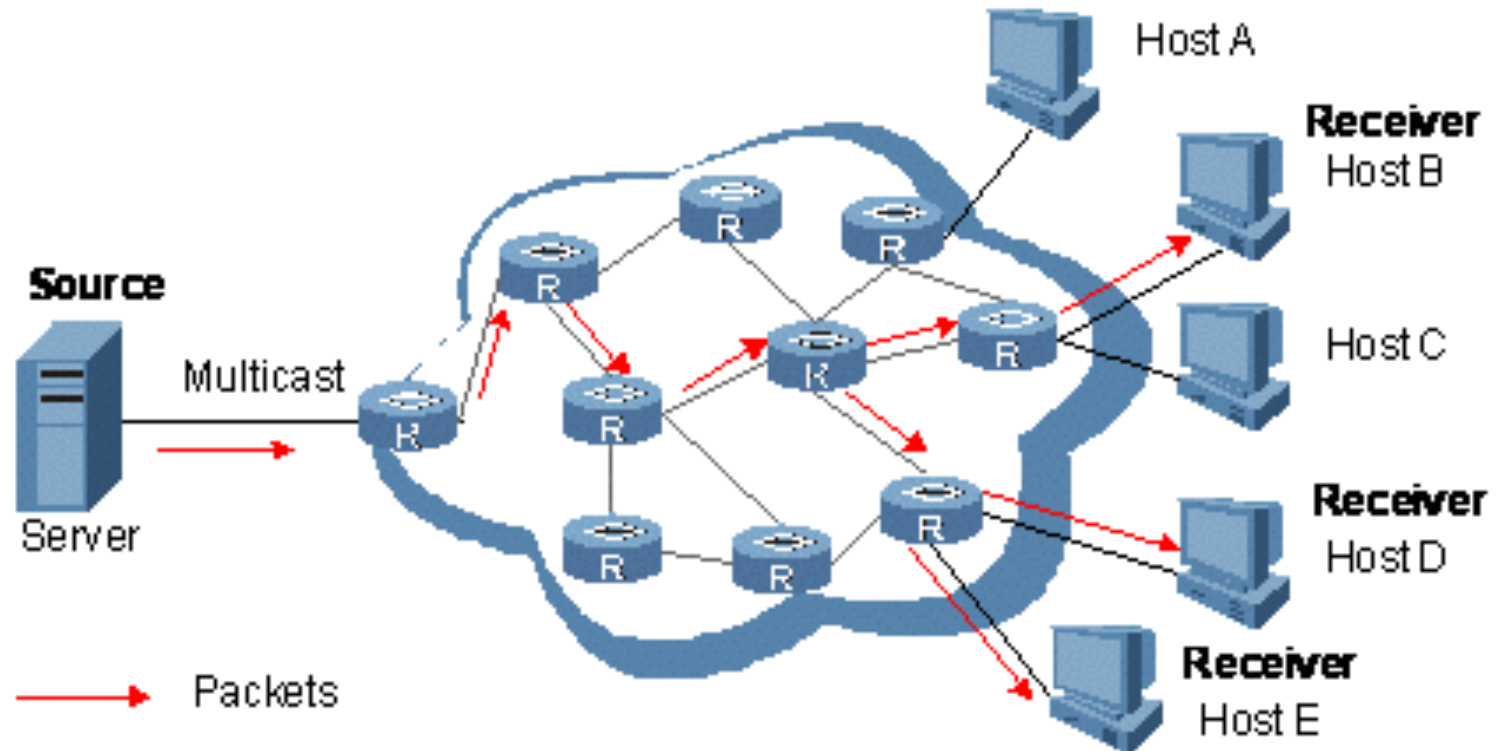

IP Multicast

- IP has a specific multicast protocol
- Addresses from 224.0.0.0 to 239.255.255.255 are reserved for multicast
 - They act as *groups*
 - Some of these are reserved for specific multicast based protocols
- Any message sent to one of the addresses goes to all processes subscribed to the group
 - Must be in the same “network”
 - Basically depends on how routers are configured
- In a LAN, communication is broadcast
- In more complex networks, tree-based protocols can be used

IP Multicast

- Any process interested in joining a group informs its OS
- The OS informs the “network”
 - The network interface (LAN card) receives and delivers group messages to the OS & process
 - The router may need to be informed
 - IGMP - Internet group management protocol

IP Multicast


- Sender sends only once
- Any router also forwards only once
- No acknowledgement mechanism
 - Uses UDP
- No guarantee that intended recipient gets the message
- Often used for streaming media type content
- Not good for critical information

Multicast

- Can we design a reliable protocol?
- If there are multiple messages, can we ensure they are delivered in correct order?

Multicast

- Imagine: We are designing an OS service
- Other applications will use this service to perform multicasts.
- We have to ensure that everything goes *correctly*

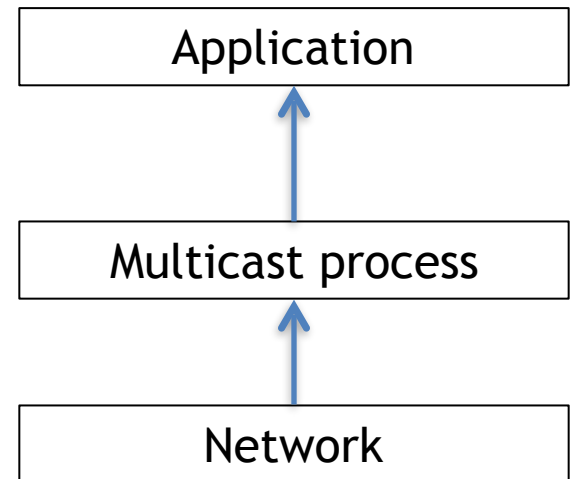


Reliable Multicast

- The sending process is in the multicast group
- Nodes may fail (by crashing)
- We will use one to one communication between processes
 - The communication is reliable (may be using suitable ack-based protocol)
 - If both processes are alive, the message gets delivered. i.e. the network does not fail
- Note that these assumptions are necessary.
 - If network and message delivery can fail, then there may be 2 sets of processes who never communicate with each other
 - Thus message from one set will never reach the other

Reliable Multicast

- *multicast*(g, m) :
multicast message m to
group g
- *receive*(m): The OS or
network card receives
the message and gives to
the multicasting process
- *deliver*(m): The multicast
process delivers m to the
application

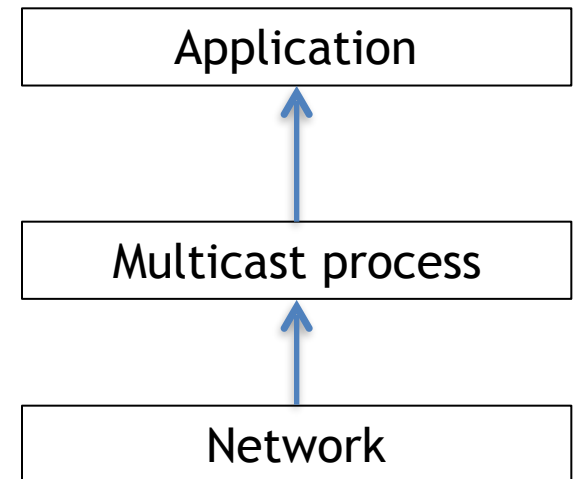

Reliable Multicast - Definition

- Must have the following properties:
 - **Integrity:** A working process p in group g delivers m at most once, and m was multicast by some working process
 - **Agreement:** If a working process delivers m then all other working processes in group g will deliver m
- What is the point of having reliable multicast?

Reliable Multicast - Definition

- Must have the following properties:
 - **Integrity:** A working process p in group g delivers m at most once, and m was multicast by some working process
 - **Agreement:** If a working process delivers m then all other working processes in group g will deliver m
- What is the point of having reliable multicast?
 - We ensure that one process can communicate with all others
 - Application programmer does not have to worry about it

Basic Multicast

- Suppose $\text{send}(p, m)$ is **reliable**
- Define Basic multicast $p.\text{Bmulticast}(g, m)$:
 - For each q in g :
 - $P.\text{send}(q, m)$
 - On $p.\text{receive}(m)$: # by multicasting algorithm
 - $P.\text{Bdeliver}(m)$ # to the application
- Assumes the sender does not crash in operation
- Therefore, does not implement Agreement in presence of crashes

Reliable Multicast

- Use Bmulticast as function/procedure
- Implement *Rmulticast*(g, m) and *Rdeliver*(m)


Reliable Multicast

- Initialization: $Received = \{\}$
- $p.Rmulticast(g, m)$:
 - $p.Bmulticast(g, m)$
- $q.Bdeliver(m)$:
 - If m is not in $Received$:
 - $Received = Received \cup \{m\}$
 - If $p \neq q : q.Bmulticast(g, m)$
 - $q.Rdeliver(m)$
- The key point is that q sends the message to other working nodes *before* it accepts the message and delivers to the interested application

Reliable Multicast

- **Integrity:** A message is delivered at most once and was multicast by some correct process
 - Obvious, since $\text{send}(p,m)$ is reliable
- **Agreement:** Since a process forwards the message to others *before* it delivers to the local application
 - If it was in the reverse order, then the following could have occurred:
 - Application gets the message and takes action according to it (such as send a message to update a database)
 - The machine fails, so that no other working processes receive the multicast
 - Result: inconsistent state
 - In the present case, a process failing in between the 2 actions is like it having failed before the multicast starts.

Multicast Ordering

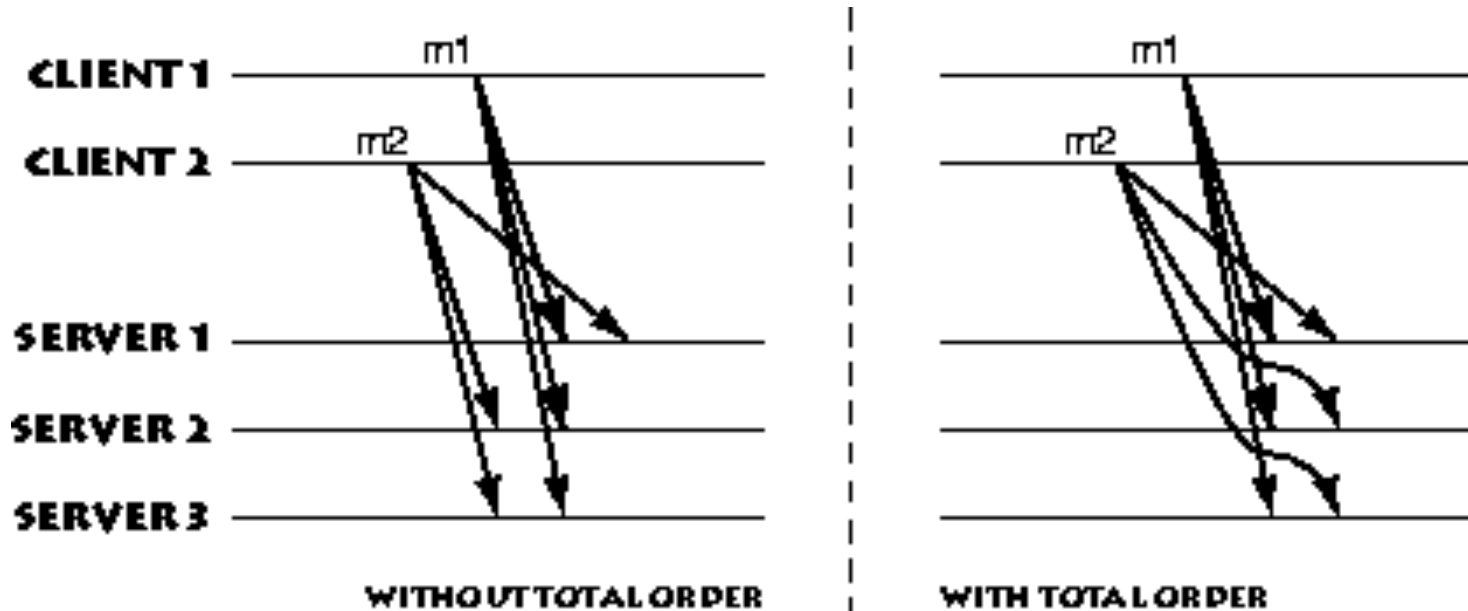

Multicast Ordering

- We want messages delivered in “correct” (intended, consistent etc) order
- **FIFO:** If a process p performs 2 multicasts, then every working process that delivers these 2 messages deliver in the correct order
- **Causal:** if $p.\text{multicast}(g,m) \rightarrow q.\text{multicast}(g,m')$ then every process which delivers both, deliver m before m'
- **Total:** All working processes deliver messages in the same order

Multicast Ordering

- Causal implies FIFO
- Total ordering
 - Requires messages are delivered in *same* order by each process
 - But this order may have no relation to causality or message sending order
 - Can be modified to be FIFO-total or Causal-total orders

FIFO ordered multicast

- Our reliable multicast implements FIFO
 - Assuming the Bmulticast sends to group members in same order & channels are FIFO
 - Sequence numbers can be used to implement FIFO otherwise

Causally ordered Multicast

- Each process has a Vector clock
- Suppose p sends a multicast m
- q receives m and holds it until:
 - It has delivered any earlier message by p
 - delivered any multicast message that has been delivered by p (to its application) before p multicast m
- These are easy to check using vector timestamps

Total ordered multicast

- Using sequencer process
 - p wants to multicast
 - It asks sequencer process for a sequence number
 - Sends multicast tagged with the sequence number
 - All processes deliver messages by sequence number
- Simple
- Single point of failure and bottleneck

Total ordered multicast

- Using collective agreement
- p first sends $B_{\text{multicast}}$ to the group
- Each process in group picks a sequence number
- Processes run a distributed protocol to agree on a sequence number for the message
- Messages delivered according to sequence number

Consensus

- Agreeing on things (leader, sequence numbers, time for action, action to be taken etc)

Basic Consensus

- Set of processes
- Each starts with *state = undecided*
- Each has a single value
- Have to set their decision variable to the same value and enter decided state

Basic Consensus

- **Termination:** each process sets its decision variable and enters decided state
- **Agreement:** If any 2 processes have entered decided state, then their decision variables are equal
- **Integrity:** If all working processes proposed the same value v , then all of them in decided state have $\text{decision}=v$

Basic Consensus

- A simple solution:
 - Use reliable multicast to communicate all values
 - Use a simple rule (min, max etc) to decide
- Inefficient, but works!

Byzantine generals consensus

- 3 or more generals deciding whether to attack or not
- A commander issues the attack
- One or more processes may be faulty (controlled by the enemy)
- Properties:
 - Termination : everyone decides eventually
 - Agreement : non-faulty processes agree
 - Integrity : If the commander is non-faulty, then all non-faulty processes agree with commander

Byzantine generals consensus

- Suppose 3 processes: A, B, C.
 - C is commander
 - B is faulty
- C says attack to both
- A tells B: “C told me: attack”
- B tells A: “C told me: do-not-attack”
- A knows someone is lying. But does not know who
- No solution with 3 processes
- In general, no solution with $n \leq 3f$ processes, where f is number of faulty processes

Interactive consensus

- Processes have to agree on a vector of values
- Each process contributed only to part of the vector (but all processes must have same vector in the end)
- Termination : everyone decides
- Agreement: they decide the same vector V
- If p_i proposes x , then in $V_i = x$ for all processes

Consensus in Asynchronous systems

- Cannot be guaranteed
- Process A is not responding:
 - Is it failed or just slow?
 - It might just send a message at the wrong time

Termination detection

- How do we know when a distributed computation has ended?

Termination detection

- We suppose that the computation is started by a process s .
 - This means, other processes start working after receiving message from s or some other process
 - They have no other way to know that a computation is in progress
- s wants to know when all other processes have concluded working
- S starts with $\text{weight} = 1.0$
- Other processes start with $\text{weight} = 0$
- When a process sends a message, it puts part (say, half) of its weight in the message.
- When a process receives a message, it adds the message weight to its own weight.
- When a process has finished computing, it sends its current weight to s
- When s has $\text{weight}=1$, it knows no other process is active

Termination detection

- Works on the assumption that no message is lost
 - Methods like TCP give good guarantee for delivery
 - Many other distributed algorithms have this assumption
 - Useful for their termination detection
- Other, more complicated methods are possible

Resources

- <https://www.youtube.com/watch?v=qhL7GW1KOj8>
- <https://www.youtube.com/watch?v=5zncx3iDiJo>
- <https://www.youtube.com/watch?v=UVzCZqNngaU>
- Reading: CDK 4.4
- Reading: CDK 15.4, 15.5