# Challenge #5: Implementation of head tags

Implement head tags in your project
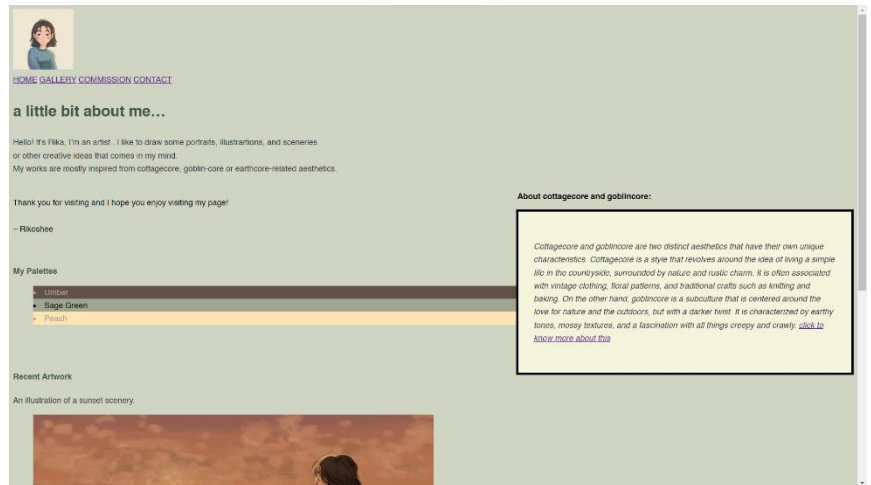
**‹title›**

```
<title>Rikoshee</title>
```



**‹style›**
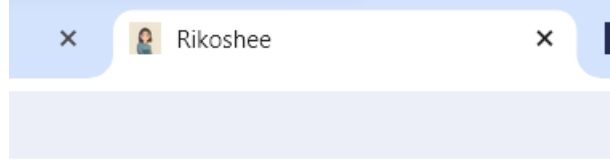
```
<style>
html * {
    font-size: 16px;
    line-height: 1.625;
    color: #2020131;
    font-family: Helvetica, sans-serif;
}
body {background-color: ■rgb(207, 212, 195);}
h1 {color: ■rgb(69, 88, 67);}
p {color: ■rgb(47, 47, 52);}
aside {
    height:150%;
    width: 90%;
    padding-top: 40px;
    padding-bottom: 40px;
    padding-left: 30px;
    padding-right: 30px;
    float: right;
    font-style:italic;
    background-color: ■beige;
 border:5px solid □black;
}
article{
    height:40%;
    width: 40%;
    position: relative;
    float:right;
    top: 1;
    right: 0;
}
</style>
```



```
<h3 style="color :□rgb(69, 88, 67);">My Palettes</h3>
    <menu>
        <li style="background-color:■#635147;color:■#A8A495;">Umber</li>
        <li style="background-color:■#9EA791; color:□black;">Sage Green</li>
        <li style="background-color:■#FFE5B4;color:■#A8A495;">Peach</li>
    </menu>
```
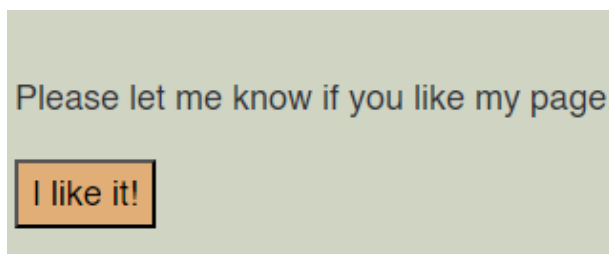
**‹link›**

```
    <link rel="stylesheet" href="style.css">
    <link rel="icon" type="image/png" href="pic.png">
```

**‹meta›**

```
<head>
    <meta charset="UTF-8">
    <meta name="description" content="Art Website">
    <meta name="keywords" content="Rikoshee, Art, Illustration, Commission">
     <meta name="author" content="Rikoshee">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Rikoshee</title>
```

**‹script›**

```
    <script>
        function myFunction() {
            document.getElementById("demo").innerHTML = "Thankyou!Have a good
day!";
        }
    </script>
    <p id="demo">Please let me know if you like my page.</p>
    <button type="button" onclick="myFunction()" style="background-
color:#e2ae77;">I like it!</li></button><br>
```

This is how it looks like when the button isn't clicked yet:

Please let me know if you like my page.

I like it!

When clicked:

Thankyou!Have a good day!

I like it!