GlucoLink architecture and responsibilities

Implemented: glucolink_a2 + eight empty namespaces. Business processing below is planned, not a completed pipeline.

A Xiaolong Yang	B Zhihao Zhang	C Quang Tie Le	D Yutong Geng	E Shuo Ding	F Minha Kim
Scope and UC3 rules	Setup and design	Sources and RAW	Identity and quality	Model and UC3	Tests and integration

ONE LOCAL POSTGRESQL DATABASE / glucolink_a2

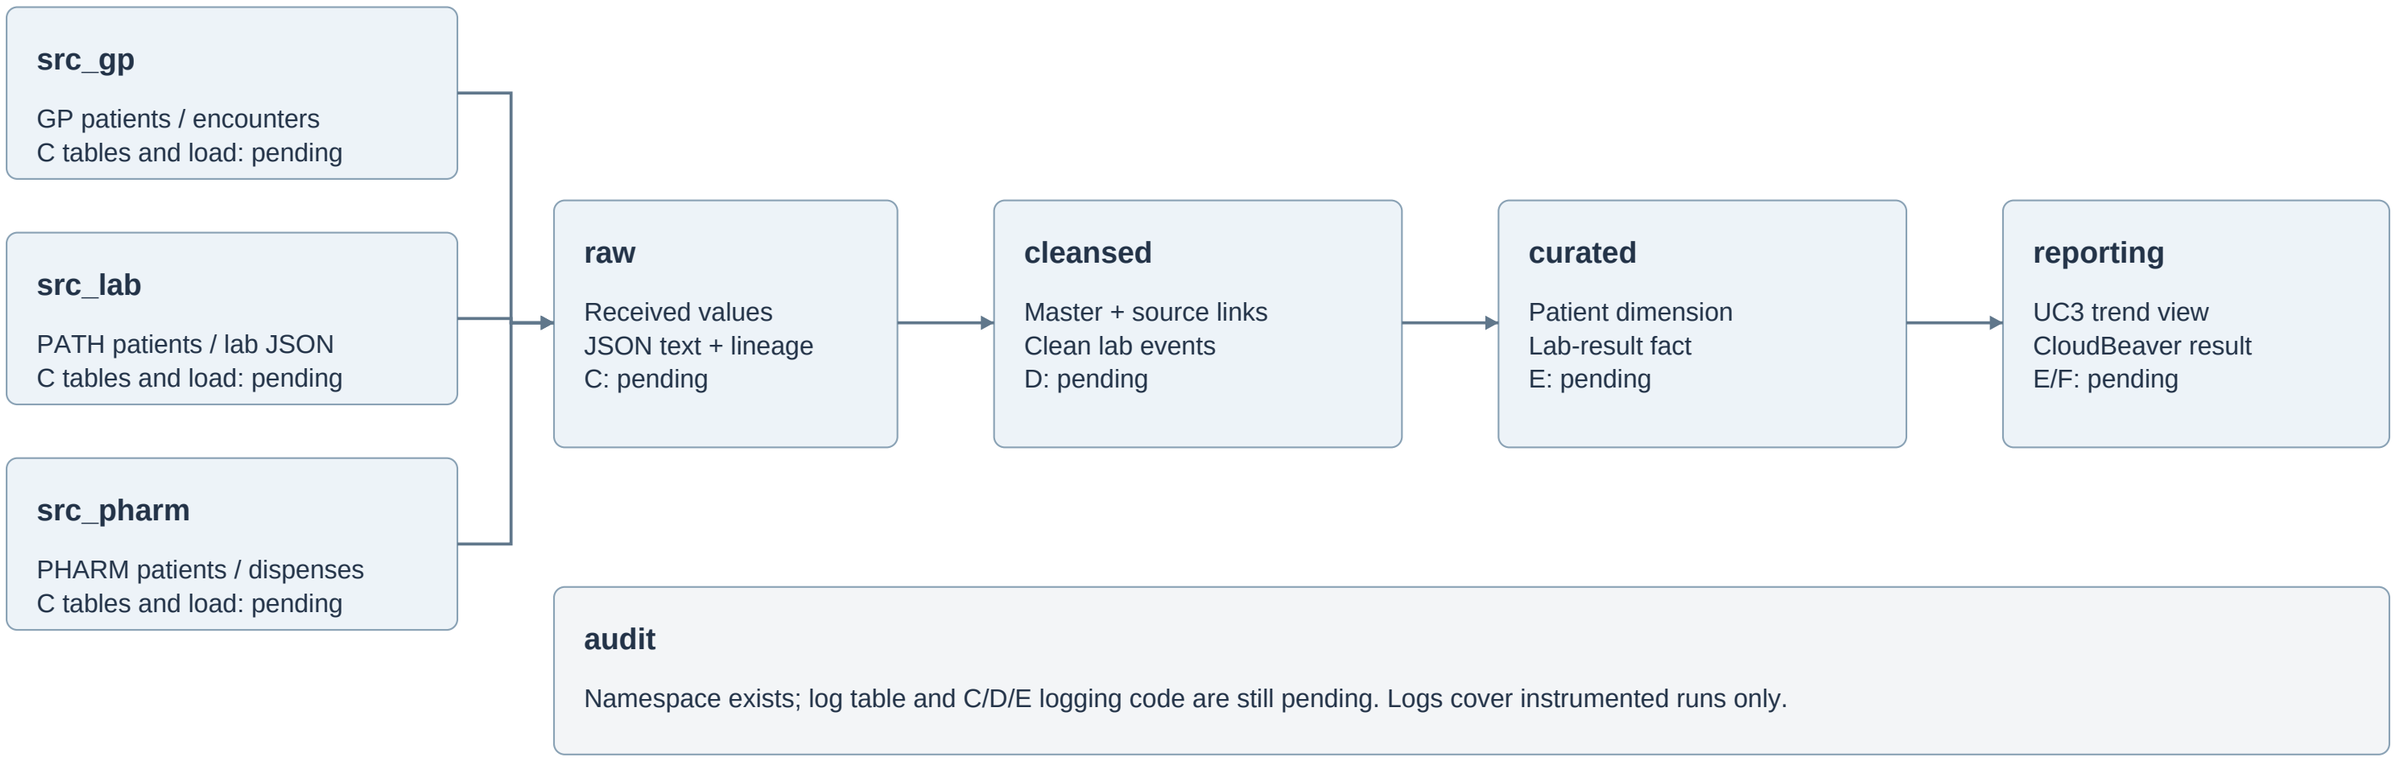

Local collaboration

Each member runs the same released fixture + scripts on their own lab. F runs the combined release on one chosen local machine.

Trade-off: reproducible local copies avoid a live shared host, but require consistent file versions and repeated integration checks.

B creates namespaces; C/D/E implement business objects. No remote access, business tables or automated monitoring is claimed.

Conceptual model for the checkpoint

Business meaning before SQL types. Proposed model for D/E review; no patient records or relationships have been loaded.

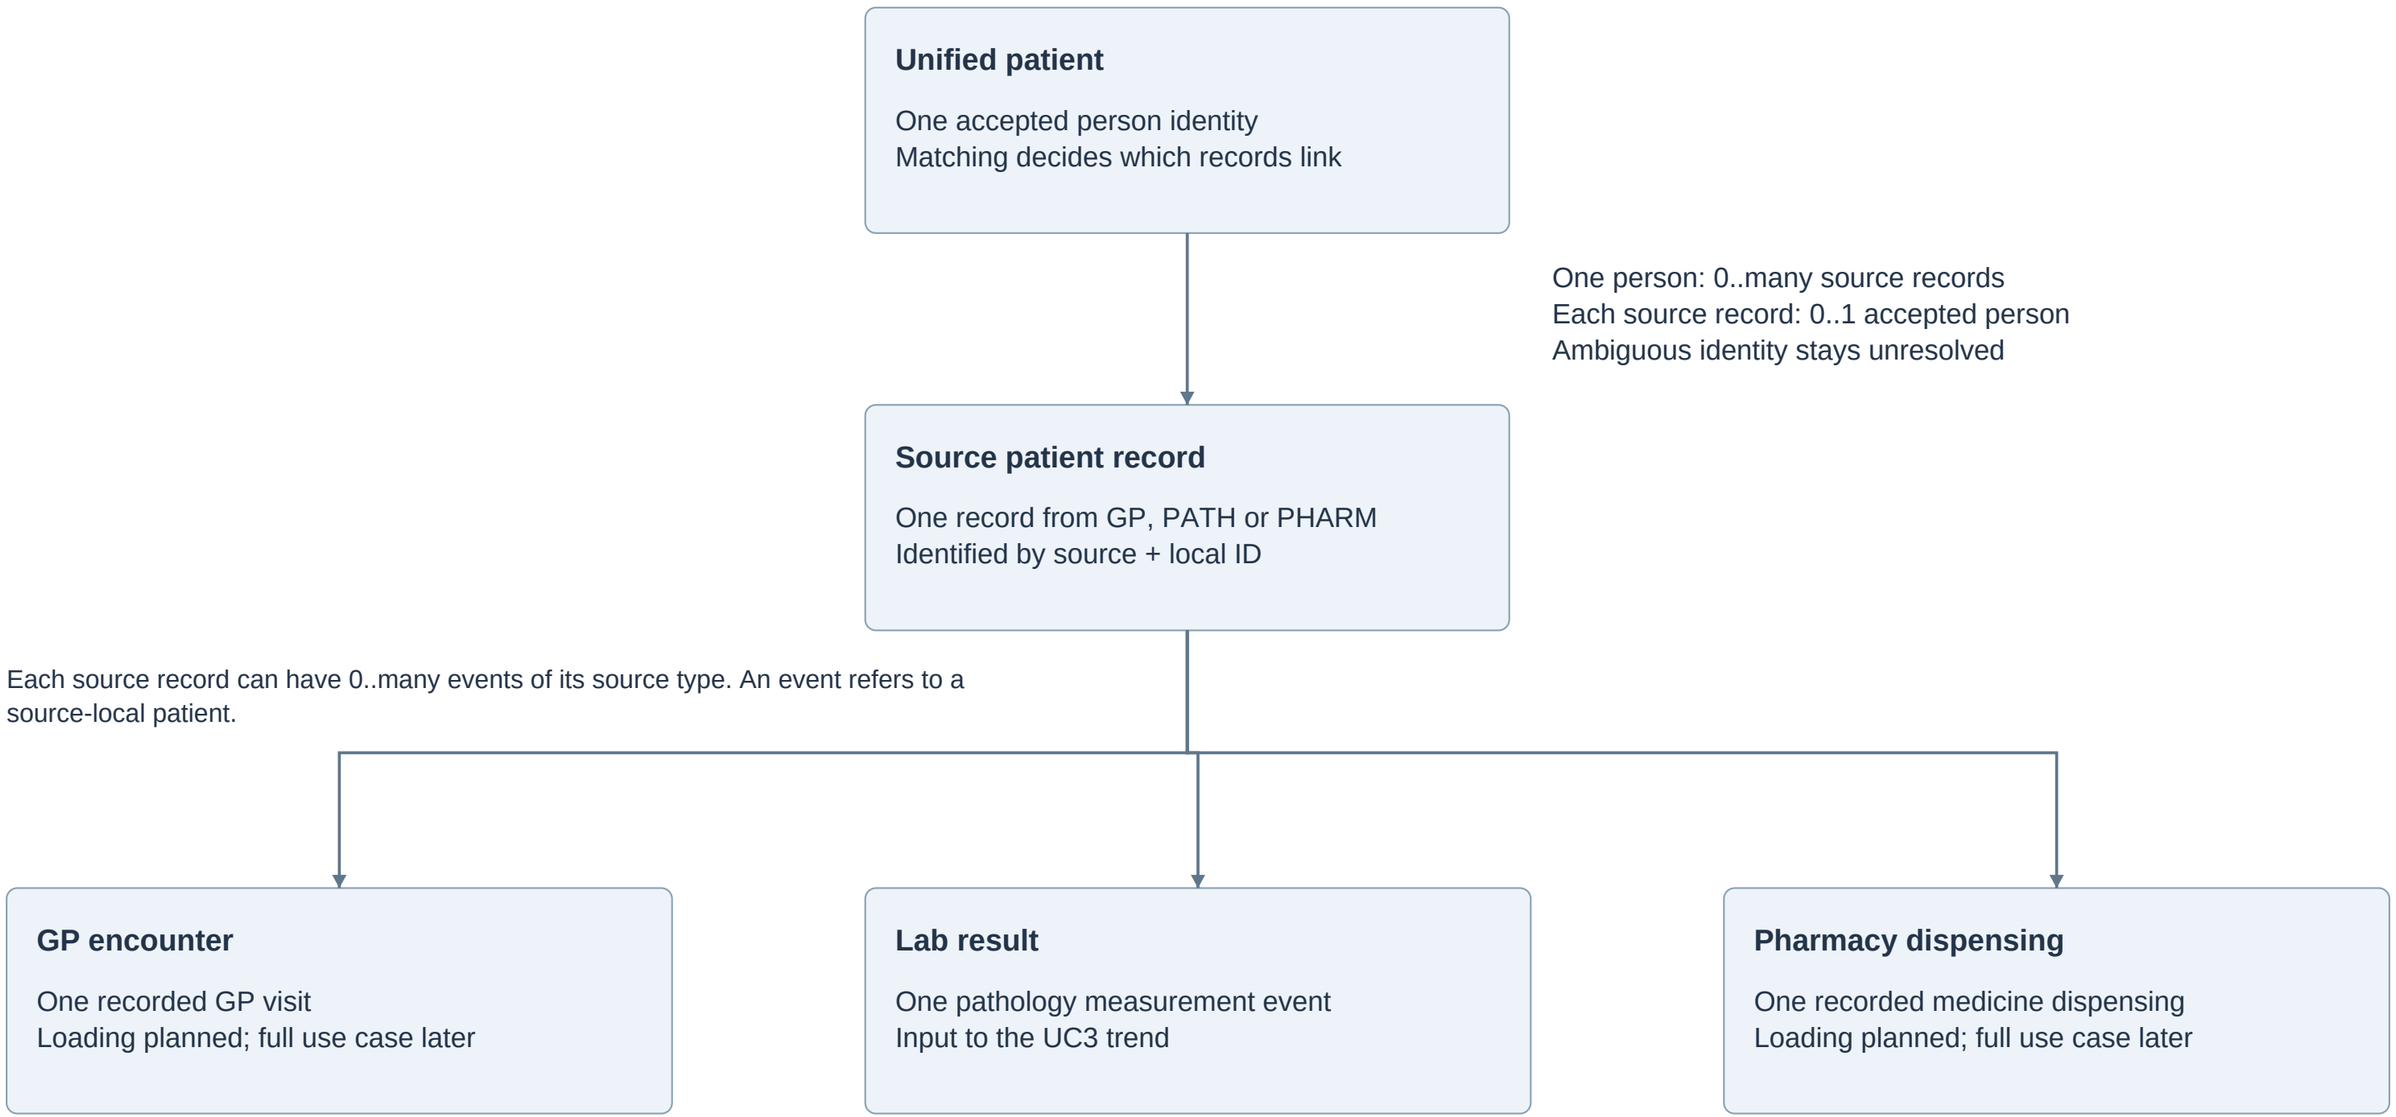

UC3 compares eligible lab results for an accepted identity. Three-source patient links are demonstrated separately.

Source references can be missing or invalid in received data; D retains quality outcomes rather than forcing a patient match.

Logical model for the small UC3 path

Proposed tables and keys, NOT deployed DDL. Core fields shown; full types, nullability and review decisions are in the dictionary.

PK = primary key | UQ = unique | FK = proposed foreign key | FK? = nullable foreign key | dashed = logical/derived

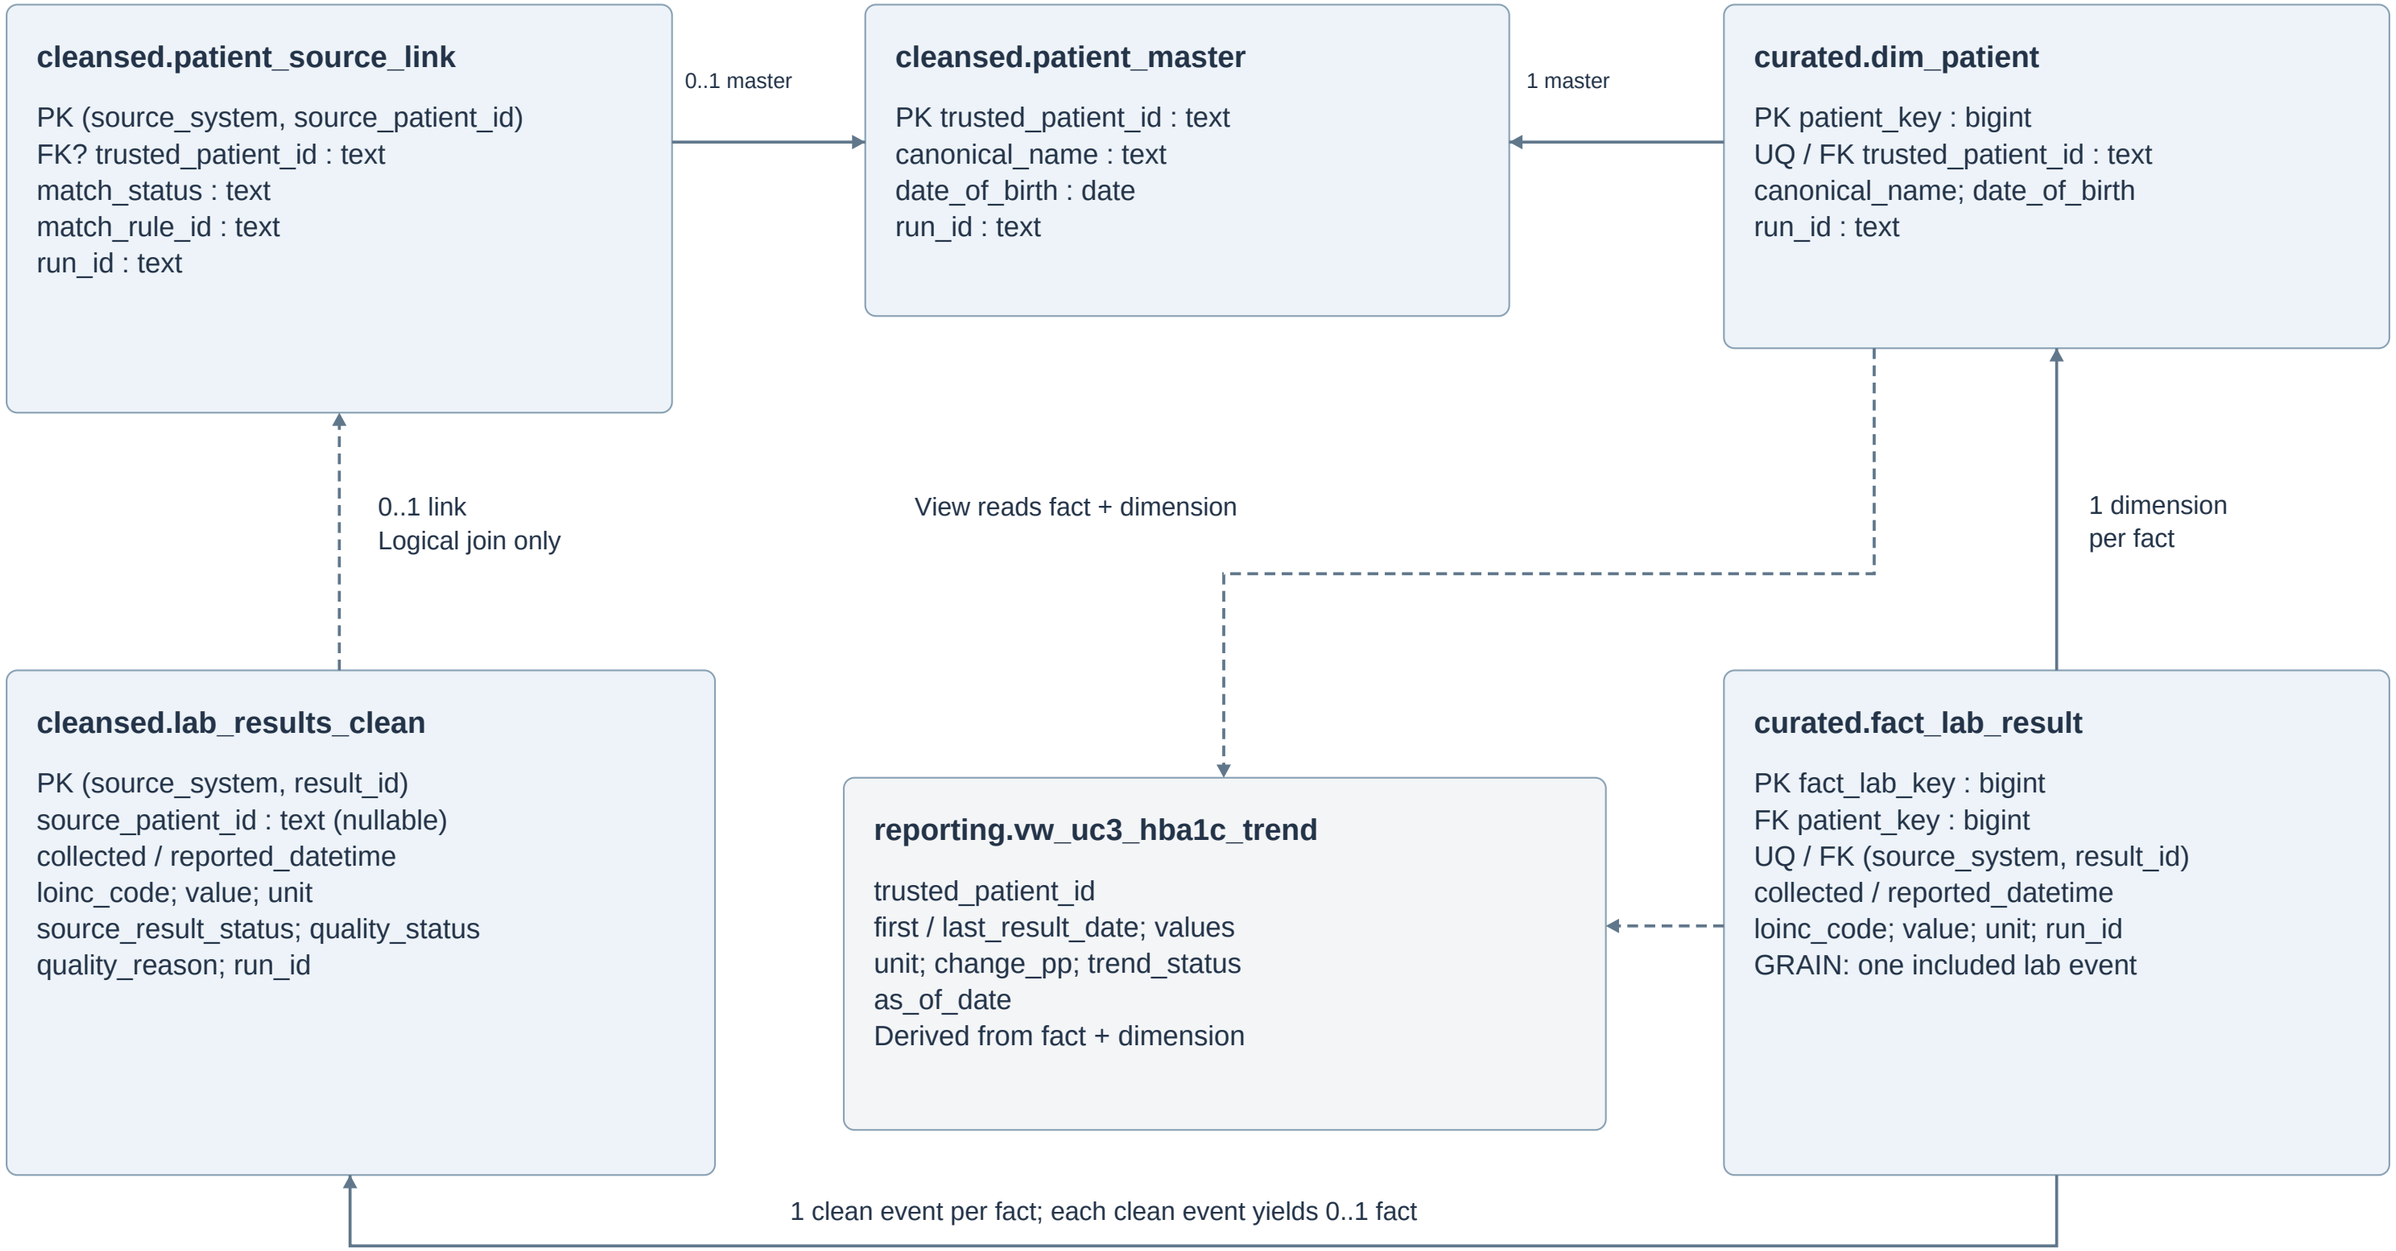

A patient may have many facts. Timestamp timezone and status literals need D/E/A/F confirmation. No match accuracy is claimed.