




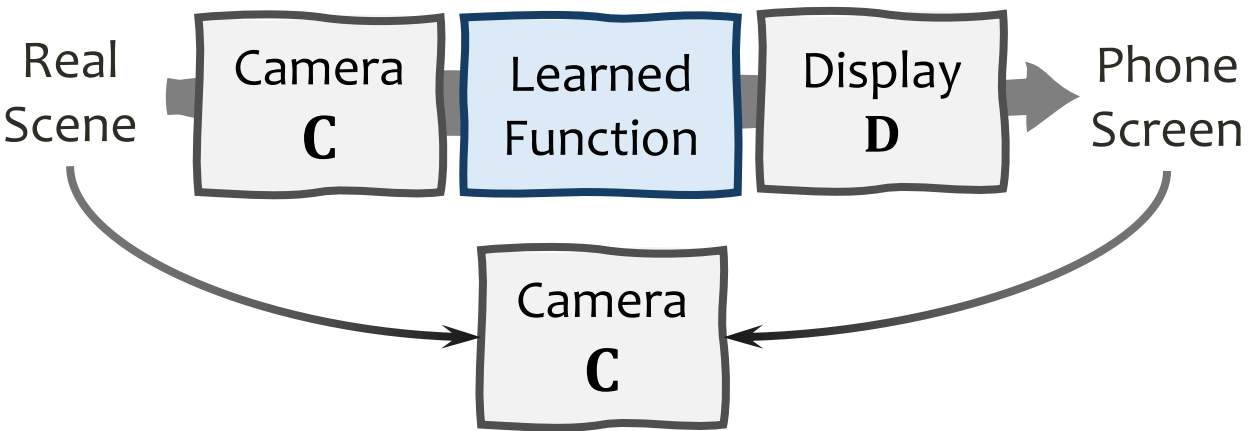

(a) **Special case:** Observer as $\mathbf{M} := \mathbf{C}$

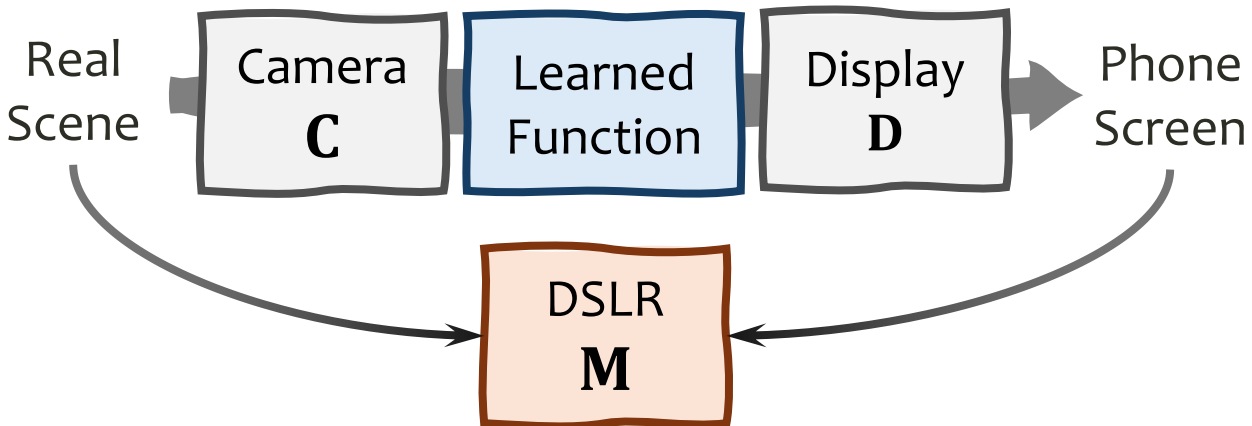

(b) **Common case:** Observer as $\mathbf{M} \neq \mathbf{C}$

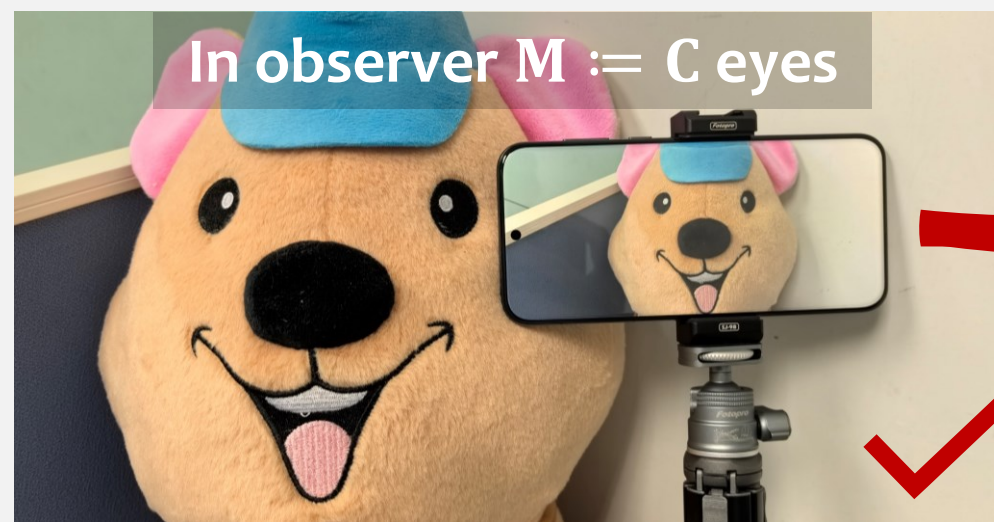

Not necessary to
perform
camera-null correction

Learned Function = $(\mathbf{CD})^\dagger \rightarrow \hat{\mathcal{F}}_{\mathbf{C}}$



Learned Function = $(\mathbf{MD})^\dagger \mathbf{MC}^\dagger \rightarrow \hat{\mathcal{F}}_{\mathbf{C}} \cdot (\mathbf{Cs}_i - \varphi(\hat{\mathbf{a}}_i \mathbf{e}))$



(i) Only camera-display projection for $\mathbf{C}$

(ii) After camera-null correction for $\mathbf{M}$