

What is network security?

confidentiality: only sender, intended receiver should “understand” message contents

- sender encrypts message
- receiver decrypts message




authentication: sender, receiver want to confirm identity of each other

message integrity: sender, receiver want to ensure message not altered (in transit, or afterwards) without detection e.g #

access and availability: services must be accessible and available to users

There are bad guys (and gi

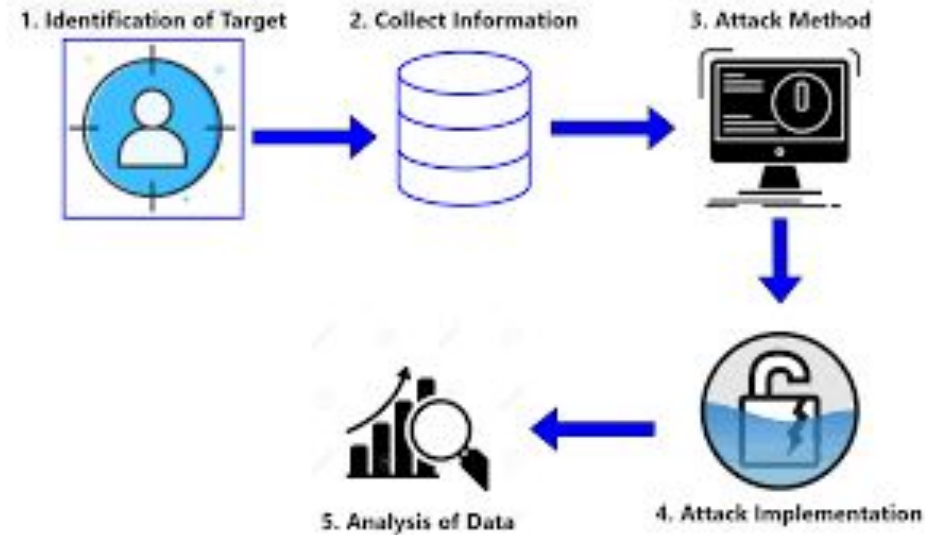


Q: What can a “bad guy” do?

A: A lot! (recall section 1.6)

- **eavesdrop**: intercept messages
- actively **insert** messages into connection
- **impersonation**: can fake (spoof) source address in packet (or any field in packet)
- **hijacking**: “take over” ongoing connection by removing sender or receiver, inserting himself in place
- **denial of service**: prevent service from being used by others (e.g., by overloading resources)


Breaking an encryption scheme

- **cipher-text only attack:**
Trudy has ciphertext she can analyze
- **two approaches:**

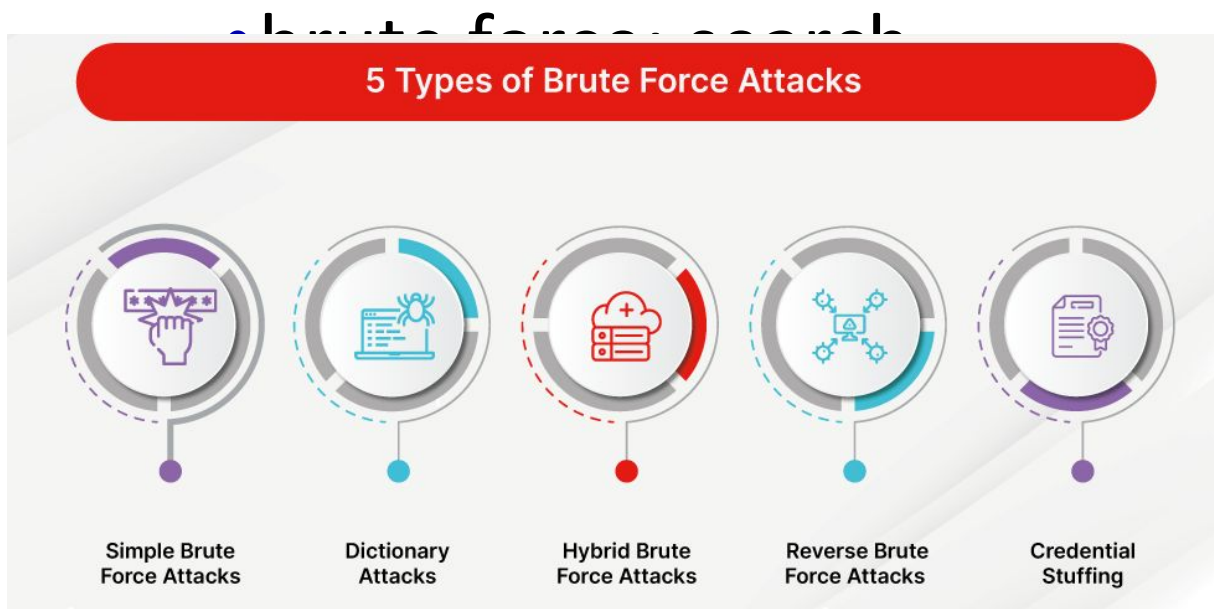

- **known-plaintext attack:**
Trudy has plaintext corresponding to ciphertext
 - *e.g.*, in monoalphabetic cipher, Trudy determines pairings for a,l,i,c,e,b,o,
- **chosen-plaintext attack:**
Trudy can get ciphertext for chosen plaintext

Symmetric key cryptography

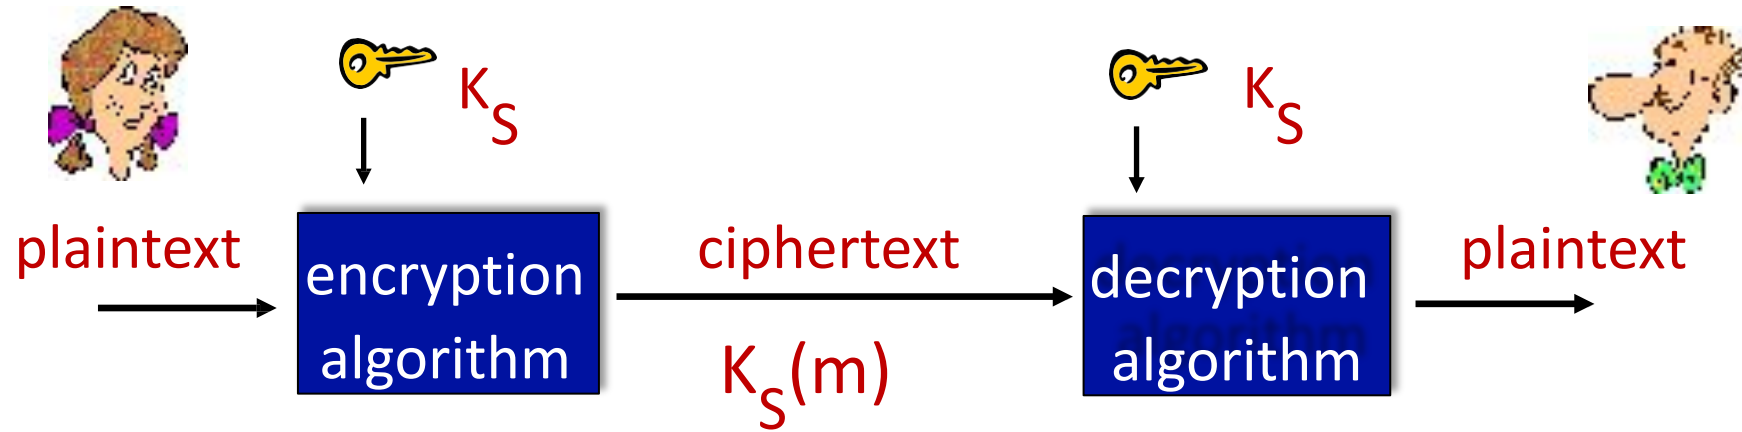

symmetric key crypto: Bob and Alice share same (symmetric) key: K

- *e.g.*, key is knowing substitution pattern in mono alphabetic substitution cipher

Q: how do Bob and Alice agree on key value?

Simple encryption scheme

substitution cipher: substituting one thing for another

- monoalphabetic cipher: substitute one letter for another

plaintext: abcdefghijklmnopqrstuvwxyz

ciphertext:



mnbvcxza pasdfghiklpöbytrewe give you. alice

ciphertext: nkn. s gktc wky. mgsbc


 e.g.:

Encryption key: mapping from set of 26 letters

Symmetric key crypto: DES

DES: Data Encryption Standard

- US encryption standard [NIST 1993]
- 56-bit symmetric key, 64-bit plaintext input
- block cipher with cipher block chaining
- how secure is DES?
 - DES Challenge: 56-bit-key-encrypted phrase in less than a day
 - no known good analytic attack
- making DES more secure:
 - 3DES: encrypt 3 times with 3 different keys

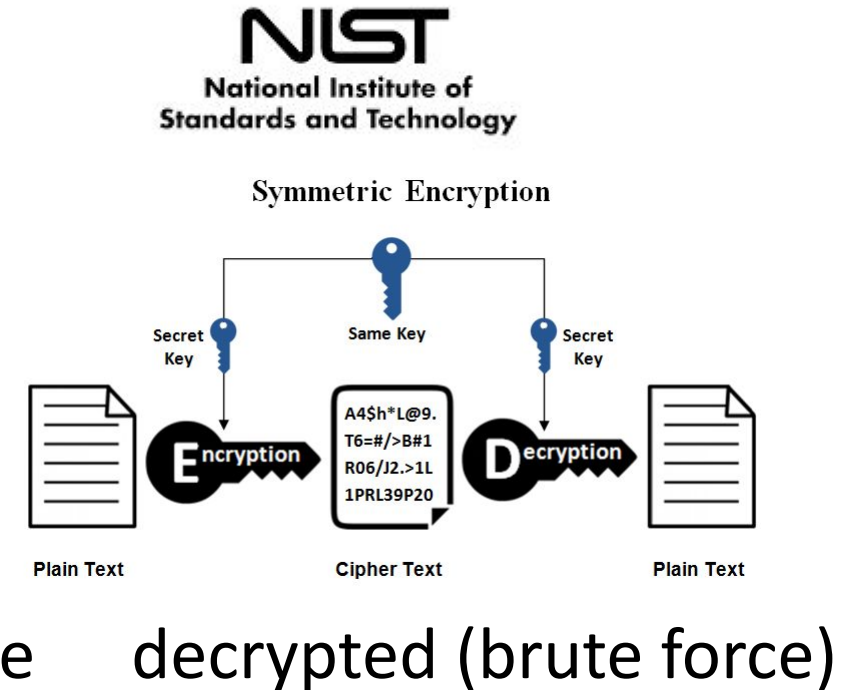

AES: Advanced Encryption Standard

- symmetric-key NIST standard, replaced DES (Nov 2001)
- processes data in 128 bit blocks
- 128, 192, or 256 bit keys
- brute force decryption (try each key) taking 1 sec on DES, takes 149 trillion years for AES

Public Key Cryptography




symmetric key crypto:

- requires sender, receiver know shared secret key
- Q: how to agree on key in first place (particularly if never “met”)?


public key crypto

- *radically* different approach [Diffie-Hellman76, RSA78]
- sender, receiver do *not* share secret key
- *public* encryption key known to *all*
- *private* decryption key known only to receiver

- A password is a secret series of characters that is generated by the user in order to verify their identity.
- A password can also be used to generate cryptographic keys.

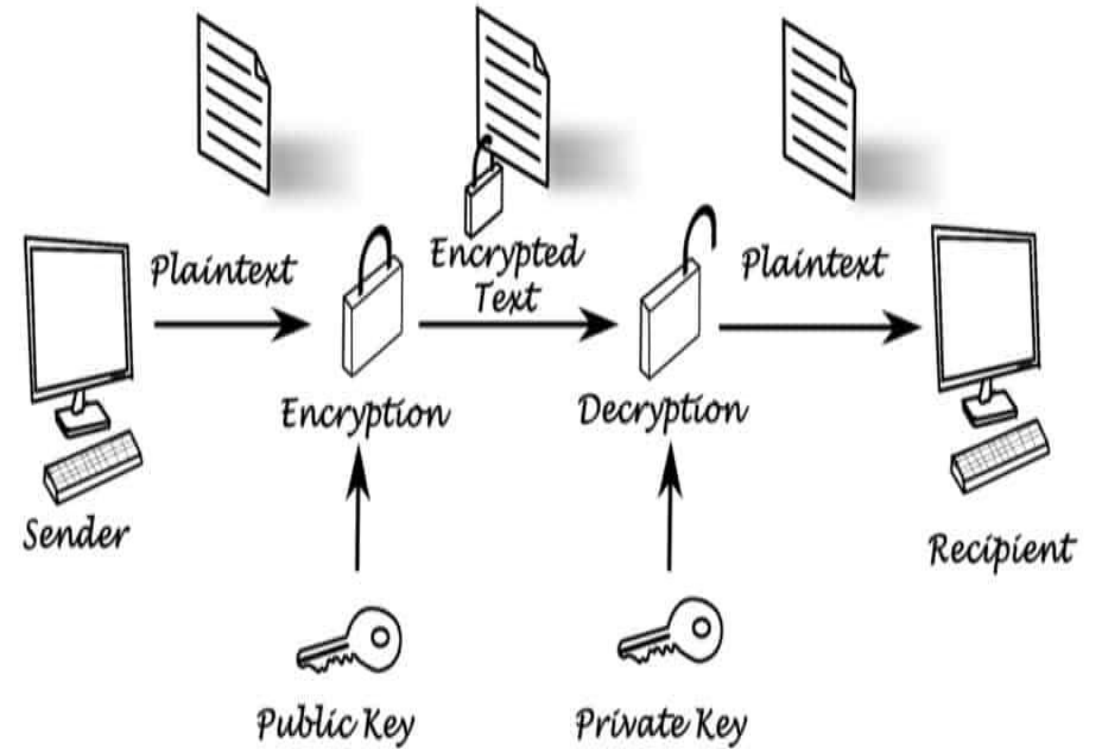

Public Key Cryptography

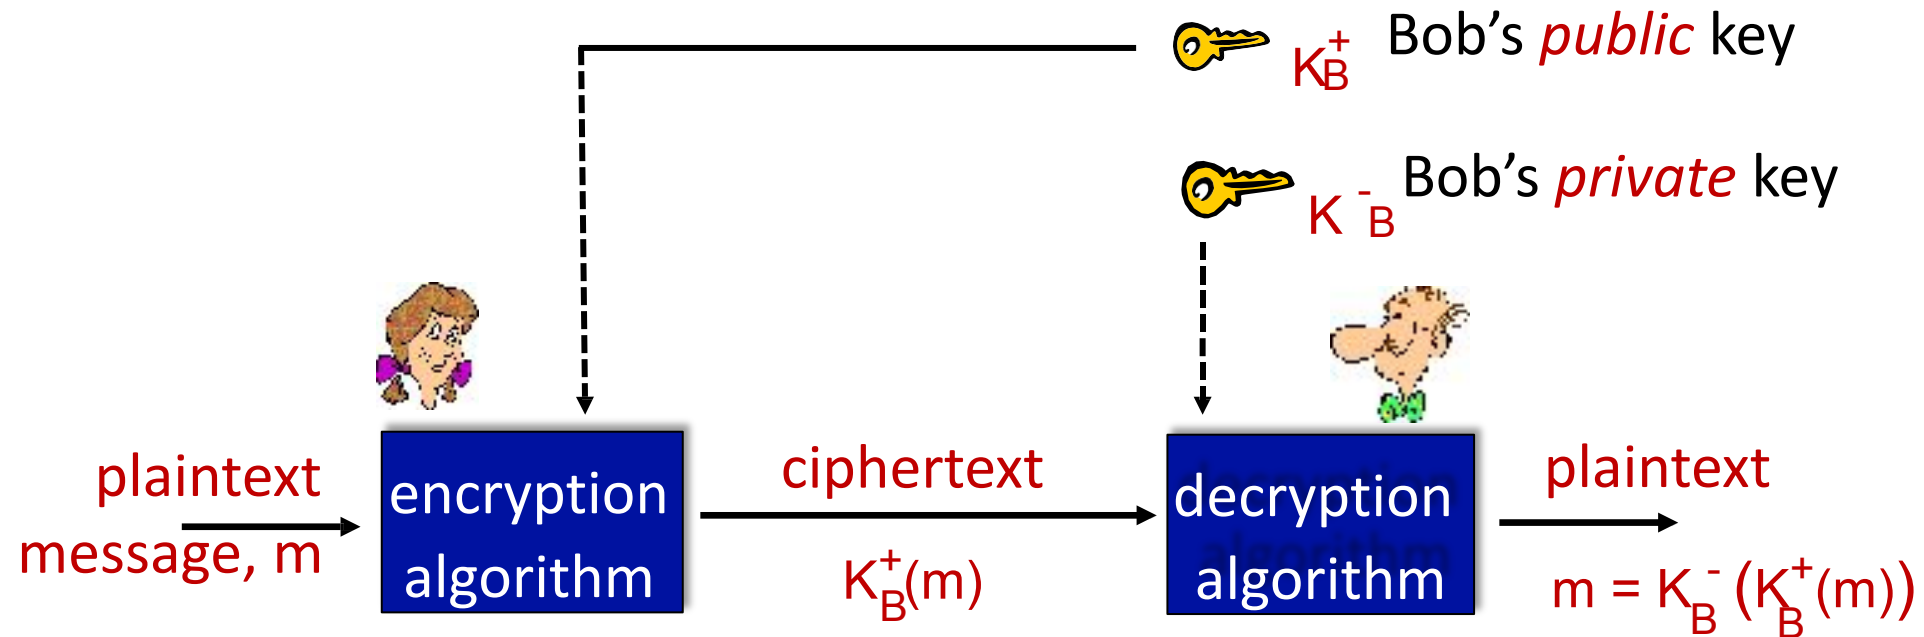

Wow - public key cryptography revolutionized 2000-year-old (previously only symmetric key) cryptography!

- similar ideas emerged at roughly same time, independently in US and UK (classified)

Public key encryption algorithms

requirements:

① need K_B^+ and K_B^- such that

$$K_B^-(K_B^+(m)) = m$$

② given public key K_B^+ , it should be impossible to compute private key K_B^-

RSA: Rivest, Shamir, Adelson algorithm

Prerequisite: modular arithmetic

- $x \bmod n$ = remainder of x when divide by n

- facts:

$$[(a \bmod n) + (b \bmod n)] \bmod n = (a+b) \bmod n$$

$$[(a \bmod n) - (b \bmod n)] \bmod n = (a-b) \bmod n$$

$$[(a \bmod n) * (b \bmod n)] \bmod n = (a*b) \bmod n$$

- thus

$$(a \bmod n)^d \bmod n = a^d \bmod n$$

- example: $x=14$, $n=10$, $d=2$:

$$(x \bmod n)^d \bmod n = 4^2 \bmod 10 = 6$$

$$x^d = 14^2 = 196 \quad x^d \bmod 10 = 6$$


Why is RSA secure?

- suppose you know Bob's public key (n,e) . How hard is it to determine d ?
- essentially need to find factors of n without knowing the two factors p and q
 - fact: factoring a big number is hard

Digital signatures

cryptographic technique analogous to hand-written signatures:

- sender (Bob) digitally signs document: he is document owner/creator.
- *verifiable, nonforgeable*: recipient (Alice) can prove to someone that Bob, and no one else (including Alice), must have signed document
- simple digital signature for message m :
 - Bob signs m by encrypting with his private key K_B , creating “signed” message, $K_B^-(m)$

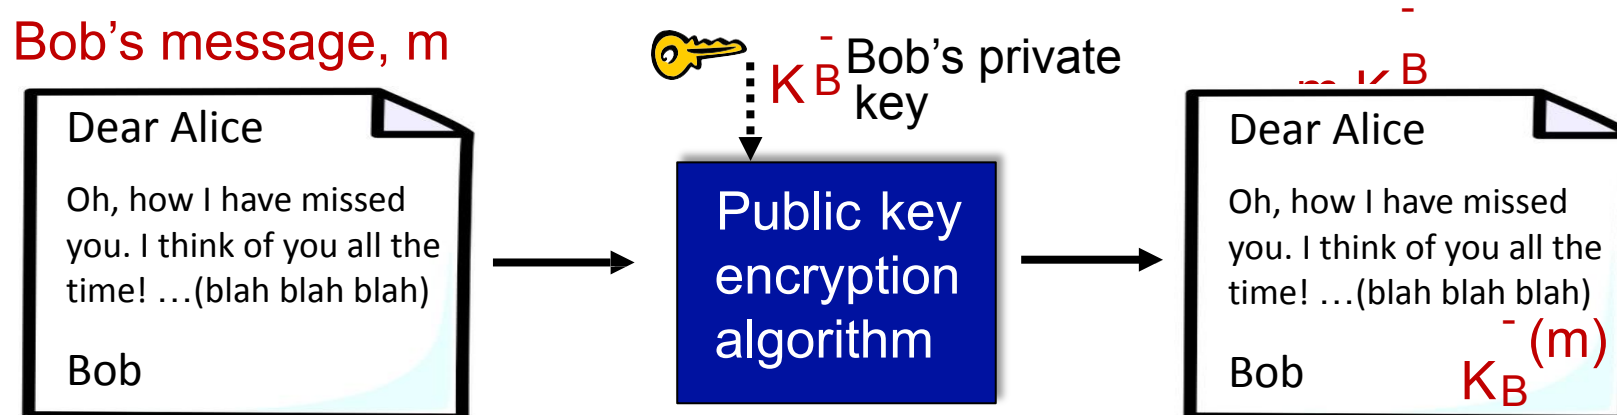

Digital signatures

- suppose Alice receives msg m , with signature: $m, K_B^-(m)$
- Alice verifies m signed by Bob by applying Bob's public key K_B^+ to $K_B^-(m)$
then checks $K_B^+(K_B^-(m)) = m$
- If $K_B^-(K_B^+(m)) = m$, whoever signed m must have used Bob's private key

Alice thus verifies that:


- Bob signed m
 - no one else signed m
 - Bob signed m and not m'
- non-repudiation:
- ✓ Alice can take m , and signature $K_B^-(m)$ to court and prove that Bob signed m

Message digests

computationally expensive to public-key-encrypt long messages

goal: fixed-length, easy- to-compute digital “fingerprint”

- apply hash function H to m , get fixed size message digest, $H(m)$

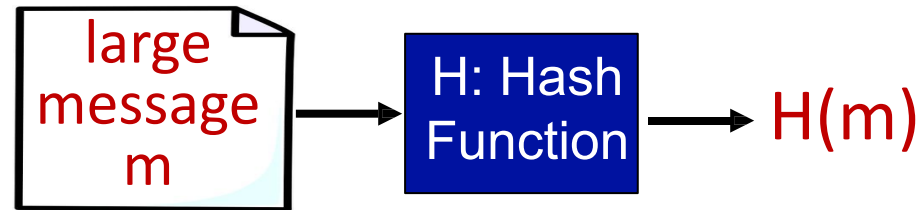

Hash function properties:

- many-to-1
- produces fixed-size msg digest (fingerprint)
- given message digest x , computationally infeasible to find m such that $x = H(m)$

Internet checksum: poor crypto hash function

Internet checksum has some properties of hash function:

- produces fixed length digest (16-bit sum) of message
- is many-to-one

but given message with given hash value, it is easy to find another message with same hash value:


<u>message</u>	<u>ASCII format</u>
I O U 1	49 4F 55 31
0 0 . 9	30 30 2E 39
9 B O B	39 42 D2 42
	<hr/>
	B2 C1 D2 AC

Hash function algorithms

- MD5 hash function widely used (RFC 1321)
 - computes 128-bit message digest in 4-step process.
 - arbitrary 128-bit string x , appears difficult to construct msg m whose MD5 hash is equal to x
- SHA-1 is also used
 - US standard [NIST, FIPS]
 - 160-bit message digest


Public key Certification Authorities (CA)

- **certification authority (CA):** binds public key to particular entity, E
- entity (person, website, router) registers its public key with CE provides “proof of identity” to CA
 - CA creates certificate binding identity E to E’s public key
 - certificate containing E’s public key digitally signed by CA: CA says “this is E’s public key”

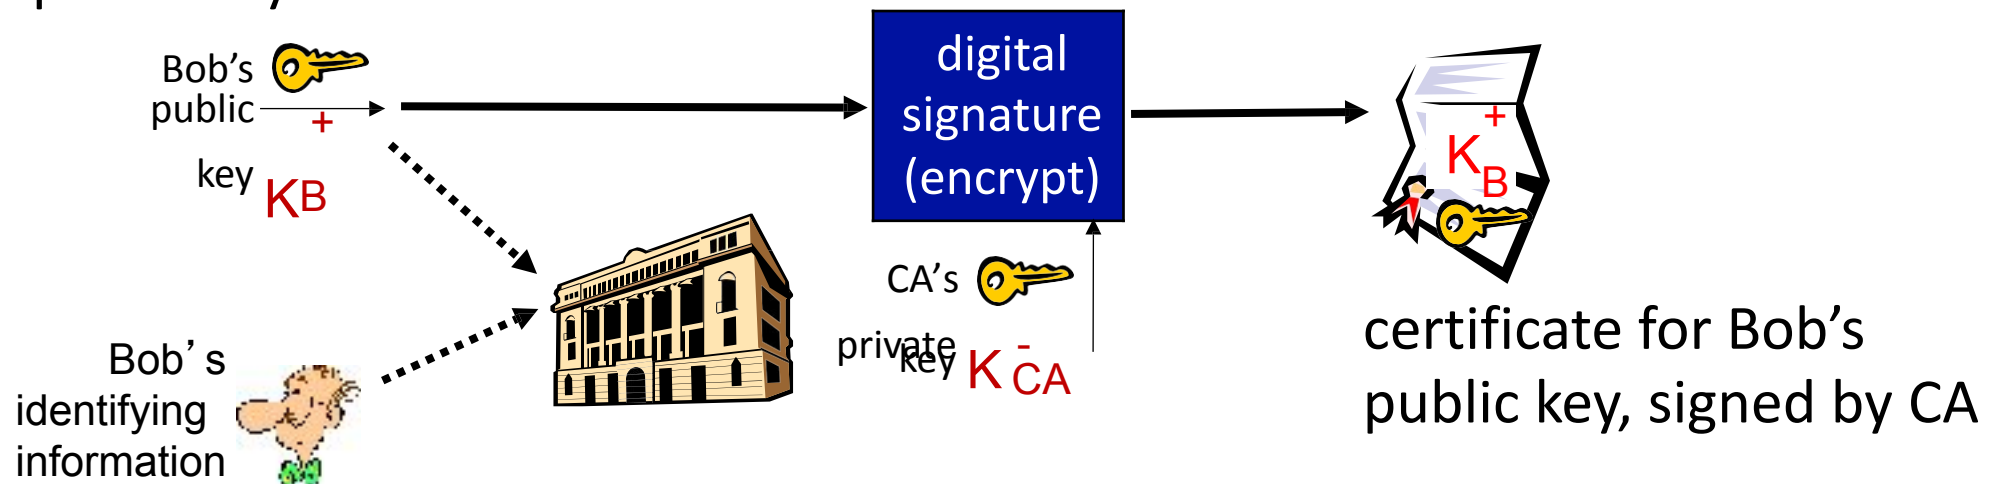

Public key Certification Authorities (CA)

- when Alice wants Bob's public key:
 - gets Bob's certificate (Bob or elsewhere)
 - apply CA's public key to Bob's certificate, get Bob's public key

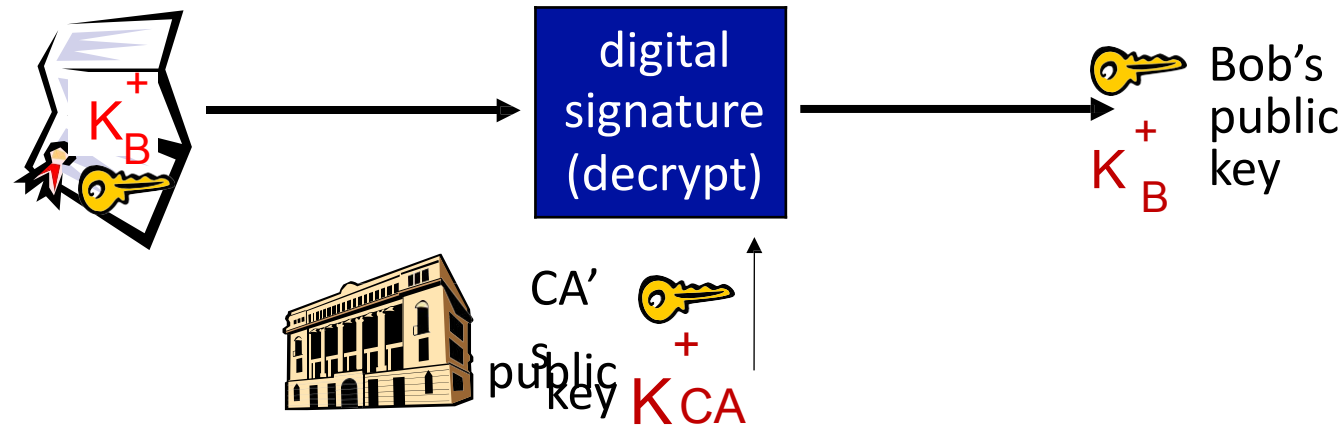

Transport-layer security (TLS)

- widely deployed security protocol above the transport layer
 - supported by almost all browsers, web servers: https (port 443)
 - provides:
 - **confidentiality**: via *symmetric encryption*
 - **integrity**: via *cryptographic hashing*
 - **authentication**: via *public key*
- } *all techniques we have studied!*
- history:
 - early research, implementation: secure network programming, secure sockets
 - secure socket layer (SSL) deprecated [2015]
 - TLS 1.3: RFC 8846 [2018]

Transport-layer security: what's needed?

- let's *build* a toy TLS protocol, *t-tls*, to see what's needed!
- we've seen the “pieces” already:
 - **handshake**: Alice, Bob use their certificates, private keys to authenticate each other, exchange or create shared secret
 - **key derivation**: Alice, Bob use shared secret to derive set of keys
 - **data transfer**: stream data transfer: data as a series of records
 - not just one-time transactions
 - **connection closure**: special messages to securely close connection

t-tls: encrypting data

- recall: TCP provides data *byte stream* abstraction
- Q: can we encrypt data in-stream as written into TCP socket?
 - A: where would MAC go? If at end, no message integrity until all data received and connection closed!
 - solution: break stream in series of “records”
 - each client-to-server record carries a MAC, created using M_c
 - receiver can act on each record as it arrives
- t-tls record encrypted using symmetric key, K_c , passed to TCP:



t-tls: encrypting data (more)

■ possible attacks on data stream?

- *re-ordering*: man-in middle intercepts TCP segments and reorders (manipulating sequence #s in unencrypted TCP header)
- *replay*

■ solutions:

- use TLS sequence numbers (data, TLS-seq-# incorporated into MAC)
- use nonce

t-tls: connection close

- truncation attack:
 - attacker forges TCP connection close segment
 - one or both sides thinks there is less data than there actually is
- **solution:** record types, with one type for closure
 - type 0 for data; type 1 for close
- MAC now computed using data, type, sequence #



Transport-layer security (TLS)

- TLS provides an API that *any* application can use
- an HTTP view of TLS:

