

DAY: _____

DATE: _____

EAD-12

107/04/25

.cshtml $\Rightarrow$ Razor Page (C# + html)

$\Rightarrow$ Passing data to view (from controller)

1) ViewBag.num = 20; (set)

// Binding
controller
with view

@ViewBag.num. (use)

2) View("login", "Hi") (set)
 $\hookrightarrow$ // pass any obj here

@Model (use)

// Model has dynamic data type.

$\hookrightarrow$ View constructor default returns method's view

1) View() 2) View(name) 3) View(name, data)

$\hookrightarrow$ (Install 3 Packages)

$\hookrightarrow$ html data to controller $\Rightarrow$ form.

action = "product/saveProd"

[HttpPost]

ActionResult saveProd (String name, int price)
 $\nwarrow$ $\nearrow$ set names in form

return RedirectToAction("-");

}

$\hookrightarrow$ Session + Auth for security.


DAY: _____

DATE: _____

EAD-13

(10/04/25)

MVC

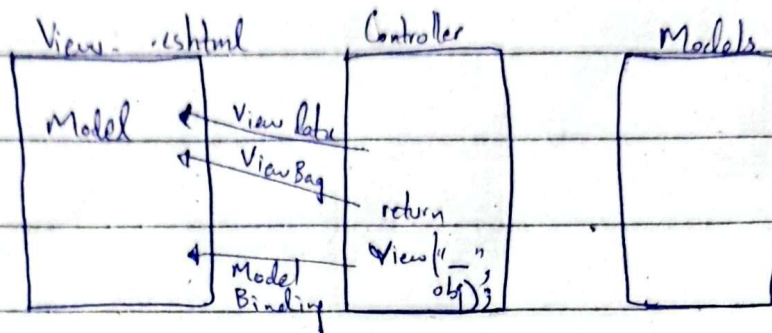


↳ strongly Typed View $\Rightarrow$ Telling before compilation.

@model List<Vetusers>

EAD-14

(19/03/25)

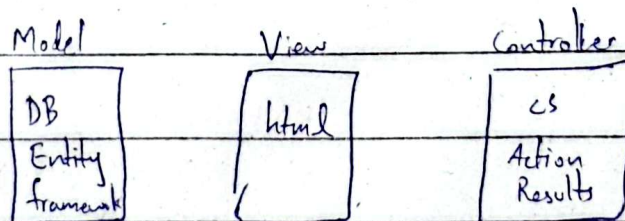

Req $\rightarrow$ Controller $\rightarrow$ Model/DB $\rightarrow$ CS $\rightarrow$ View $\rightarrow$ CS $\rightarrow$ Response

(Ctrl + F8 $\rightarrow$ IIS (Internal Info Server)).

$\Rightarrow$ IP:PORT/Login/display? a=20 & b=10
 $\downarrow$
 func parameters.

$\Rightarrow$ program.cs $\rightarrow$ default route set.

$\Rightarrow$ for returning html page.

DAY: _____

DATE: _____

```
public ActionResult firstPage() {  
    return View();  
}
```

EAD-15

(17/04/25)

Session and Cookies

EAD-16

(21/04/25)

⇒ AJAX calls (async) ⇒ for changing on client side without complete page load.

↳ jquery lib

↳ To execute js/jquery after loading DOM.

`$(document).ready(function() { — });`

↳ // delete element with AJAX call:

// get id of row: ⇒ `var id = $(this).data('id');`

// row of ~~btn~~ ⇒ `var nearestRow = $(this).closest('tr');`

DAY: _____

DATE: _____

```
$(ajax call) $.ajax({  
    url: "/dashboard/deleteUser",  
    method: "Post",  
    data: { plcId: Id },  
    success: function(result) {  
        if (result == true) {  
            nearestRow.remove();  
        }  
    }  
});
```

EAD-17

128/04/25)

(AJAX call)

using SEProject.Models. _____

create APIController.cs string u, string p.

public JsonResult getData() {

List<User>? temp = null;

if (u == "" && p == "") { //auth

using (DbContext db = new DbContext())

{ temp = db.Users.ToList(); }

if (temp == null) return Json(0);

return temp;

}

public ActionResult Index() { }

4 index.cshtml

<button id="load-data"> Load Data using Ajax
</button>

<table id="tbl">

<tr

</table>

<script src="jquery-">

</script>

\$(document).ready(function() {

\$('#load-data').click(function() {

\$.ajax({

url: 'API/getData',

DAY: _____

DATE: _____

type: 'GET',

success: function (result) {

\$.each(result, function (index, user) {

var row = "<tr><td>"

+ user.userName +

"</td><td>" +

user. — +

"</td><button>"

</button></td>"

</tr>"

\$("#tbl").append(row);

});

}); }

EAD-18

(05/05/25)

255 E, Bootstrap

1 req should return 3 files → (html, css, js)

wwwroot folder ⇒ public

< link rel = "—" href "/css/—-css"/ >

< form form-group >

< input form-control >