

Multiprogramming (Batch system)

- Single user cannot always keep CPU and I/O devices busy
- Multiprogramming organizes jobs (code and data) so CPU always has one to execute
- A subset of total jobs in system is kept in memory
- One job selected and run via **job scheduling**
- When job has to wait (for I/O for example), OS switches to another job






Multitasking (Timesharing)

- A logical extension of Batch systems– the CPU switches jobs so frequently that users can interact with each job while it is running, creating **interactive** computing
  - **Response time** should be < 1 second
  - Each user has at least one program executing in memory **process**
  - If several jobs ready to run at the same time **CPU scheduling**
  - If processes don't fit in memory, **swapping** moves them in and out to run
  - **Virtual memory** allows execution of processes not completely in memory





Memory Layout for Multiprogrammed System

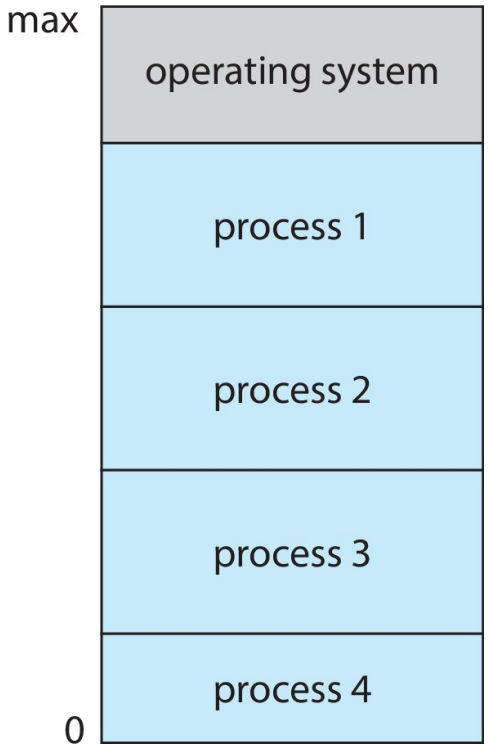





Dual-mode Operation

- **Dual-mode** operation allows OS to protect itself and other system components
  - **User mode** and **kernel mode**
- **Mode bit** provided by hardware
  - Provides ability to distinguish when system is running user code or kernel code.
  - When a user is running mode bit is “user”
  - When kernel code is executing mode bit is “kernel”
- How do we guarantee that user does not explicitly set the mode bit to “kernel”?
  - System call changes mode to kernel, return from call resets it to user
- Some instructions designated as **privileged**, only executable in kernel mode





Computer System Environments





Computing Environments

- Traditional
- Mobile
- Client Server
- Peer-to-Peer
- Cloud computing
- Real-time Embedded





Traditional

- Stand-alone general-purpose machines
- But blurred as most systems interconnect with others (i.e., the Internet)
- **Portals** provide web access to internal systems
- **Network computers** (**thin clients**) are like Web terminals
- Mobile computers interconnect via **wireless networks**
- Networking becoming ubiquitous – even home systems use **firewalls** to protect home computers from Internet attacks





Mobile


- Handheld smartphones, tablets, etc.
- What is the functional difference between them and a “traditional” laptop?
- Extra feature – more OS features (GPS, gyroscope)
- Allows new types of apps like ***augmented reality***
- Use IEEE 802.11 wireless, or cellular data networks for connectivity
- Leaders are **Apple iOS** and **Google Android**





Client Server

- Client-Server Computing
  - Dumb terminals supplanted by smart PCs
  - Many systems now **servers**, responding to requests generated by **clients**
    - **Compute-server system** provides an interface to client to request services (i.e., database)
    - **File-server system** provides interface for clients to store and retrieve files

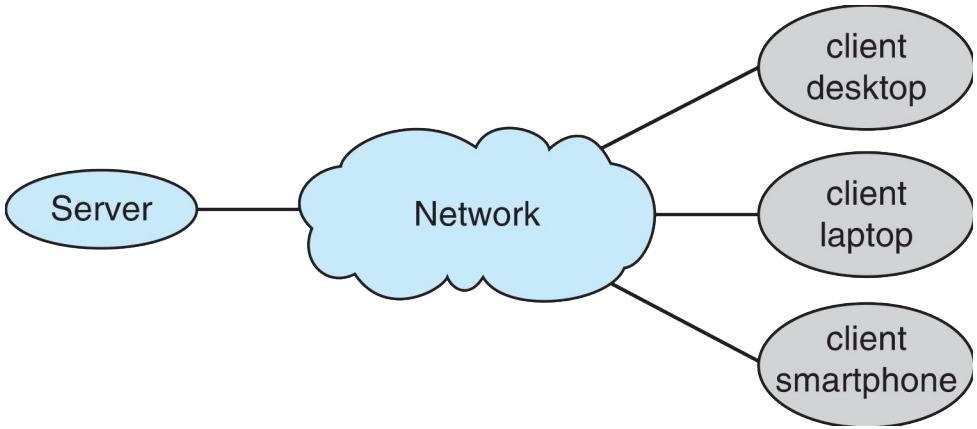






Peer-to-Peer

- Another model of distributed system
- P2P does not distinguish clients and servers
  - Instead all nodes are considered peers
  - May each act as client, server or both
  - Node must join P2P network
    - Registers its service with central lookup service on network, or
    - Broadcast request for service and respond to requests for service via ***discovery protocol***
  - Examples include Napster and Gnutella, **Voice over IP** (**VoIP**) such as Skype

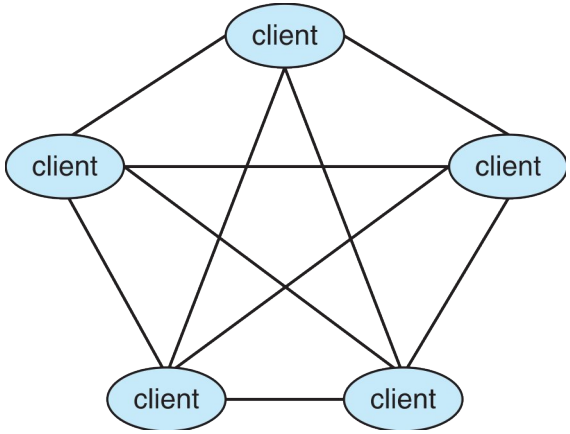





Cloud Computing

- Delivers computing, storage, even apps as a service across a network
- Logical extension of virtualization because it uses virtualization as the base for it functionality.
  - Amazon **EC2** has thousands of servers, millions of virtual machines, petabytes of storage available across the Internet, pay based on usage





Cloud Computing (Cont.)


- Many types
  - **Public cloud** – available via Internet to anyone willing to pay
  - **Private cloud** – run by a company for the company's own use
  - **Hybrid cloud** – includes both public and private cloud components
  - Software as a Service (**SaaS**) – one or more applications available via the Internet (i.e., word processor)
  - Platform as a Service (**PaaS**) – software stack ready for application use via the Internet (i.e., a database server)
  - Infrastructure as a Service (**IaaS**) – servers or storage available over Internet (i.e., storage available for backup use)





Cloud Computing (cont.)

- Cloud computing environments composed of traditional OSes, plus VMMs, plus cloud management tools
  - Internet connectivity requires security like firewalls
  - Load balancers spread traffic across multiple applications

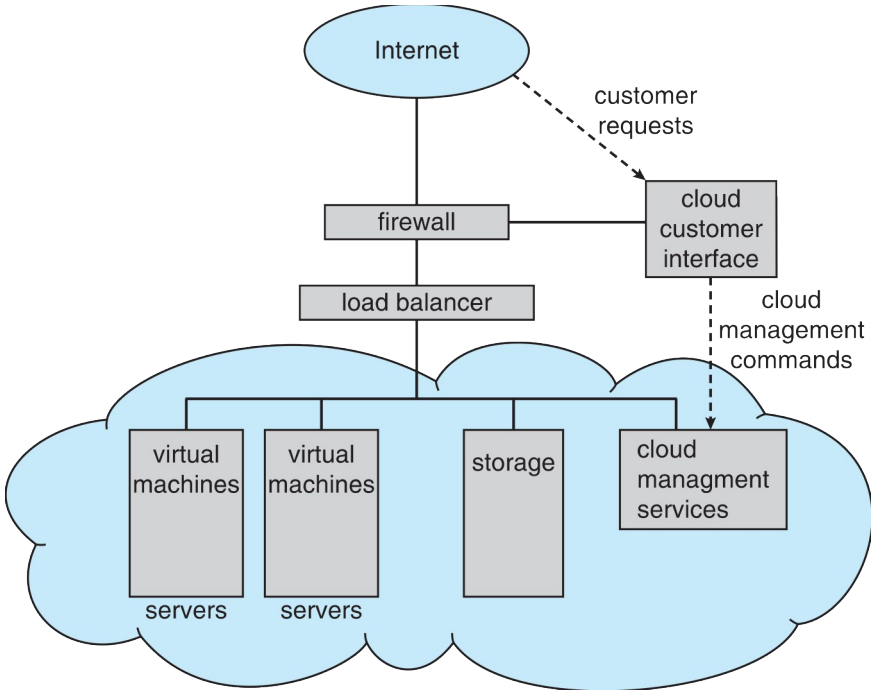





Real-Time Embedded Systems

- Real-time embedded systems most prevalent form of computers
  - Vary considerable, special purpose, limited purpose OS, **real-time OS**
  - Use expanding
- Many other special computing environments as well
  - Some have OSes, some perform tasks without an OS
- Real-time OS has well-defined fixed time constraints
  - Processing ***must*** be done within constraint
  - Correct operation only if constraints met





Free and Open-Source Operating Systems

- Operating systems made available in source-code format rather than just binary **closed-source** and **proprietary**
- Counter to the **copy protection** and **Digital Rights Management** (**DRM**) movement
- Started by **Free Software Foundation** (**FSF**), which has "copyleft" **GNU Public License** (**GPL**)
  - Free software and open-source software are two different ideas championed by different groups of people
    - **https://www.gnu.org/philosophy/open-source-misses-the-point.en.html**
- Examples include **GNU/Linux** and **BSD UNIX** (including core of **Mac OS X**), and many more
- Can use VMM like VMware Player (Free on Windows), Virtualbox (open source and free on many platforms - http://www.virtualbox.com)
  - Use to run guest operating systems for exploration






The Study of Operating Systems

There has never been a more interesting time to study operating systems, and it has never been easier. The open-source movement has overtaken operating systems, causing many of them to be made available in both source and binary (executable) format. The list of operating systems available in both formats includes Linux, BUSD UNIX, Solaris, and part of macOS. The availability of source code allows us to study operating systems from the inside out. Questions that we could once answer only by looking at documentation or the behavior of an operating system we can now answer by examining the code itself.

Operating systems that are no longer commercially viable have been open-sourced as well, enabling us to study how systems operated in a time of fewer CPU, memory, and storage resources. An extensive but incomplete list of open-source operating-system projects is available from https://curlie.org/Computers/Software/Operating_Systems/Open_Source/

In addition, the rise of virtualization as a mainstream (and frequently free) computer function makes it possible to run many operating systems on top of one core system. For example, VMware (http://www.vmware.com) provides a free "player" for Windows on which hundreds of free "virtual appliances" can run. Virtualbox (http://www.virtualbox.com) provides a free, open-source virtual machine manager on many operating systems. Using such tools, students can try out hundreds of operating systems without dedicated hardware.

The advent of open-source operating systems has also made it easier to make the move from student to operating-system developer. With some knowledge, some effort, and an Internet connection, a student can even create a new operating-system distribution. Just a few years ago, it was difficult or impossible to get access to source code. Now, such access is limited only by how much interest, time, and disk space a student has.





Operating System Services

- Operating systems provide an environment for execution of programs and services to programs and users
- One set of operating-system services provides functions that are helpful to the user:
  - **User interface** - Almost all operating systems have a user interface (**UI**).
    - Varies between **Command-Line** (**CLI**), **Graphics User Interface** (**GUI**), **touch-screen**, **Batch**
  - **Program execution** - The system must be able to load a program into memory and to run that program, end execution, either normally or abnormally (indicating error)
  - **I/O operations** - A running program may require I/O, which may involve a file or an I/O device
  - **File-system manipulation** - The file system is of particular interest. Programs need to read and write files and directories, create and delete them, search them, list file Information, permission management.





Operating System Services (Cont.)


- One set of operating-system services provides functions that are helpful to the user (Cont.):
  - **Communications** – Processes may exchange information, on the same computer or between computers over a network
    - Communications may be via shared memory or through message passing (packets moved by the OS)
  - **Error detection** – OS needs to be constantly aware of possible errors
    - May occur in the CPU and memory hardware, in I/O devices, in user program
    - For each type of error, OS should take the appropriate action to ensure correct and consistent computing
    - Debugging facilities can greatly enhance the user's and programmer's abilities to efficiently use the system






Operating System Services (Cont.)

- Another set of OS functions exists for ensuring the efficient operation of the system itself via resource sharing
  - **Resource allocation -** When multiple users or multiple jobs running concurrently, resources must be allocated to each of them
    - Many types of resources - CPU cycles, main memory, file storage, I/O devices.
  - **Logging -** To keep track of which users use how much and what kinds of computer resources
  - **Protection and security -** The owners of information stored in a multiuser or networked computer system may want to control use of that information, concurrent processes should not interfere with each other
    - **Protection** involves ensuring that all access to system resources is controlled
    - **Security** of the system from outsiders requires user authentication, extends to defending external I/O devices from invalid access attempts





A View of Operating System Services

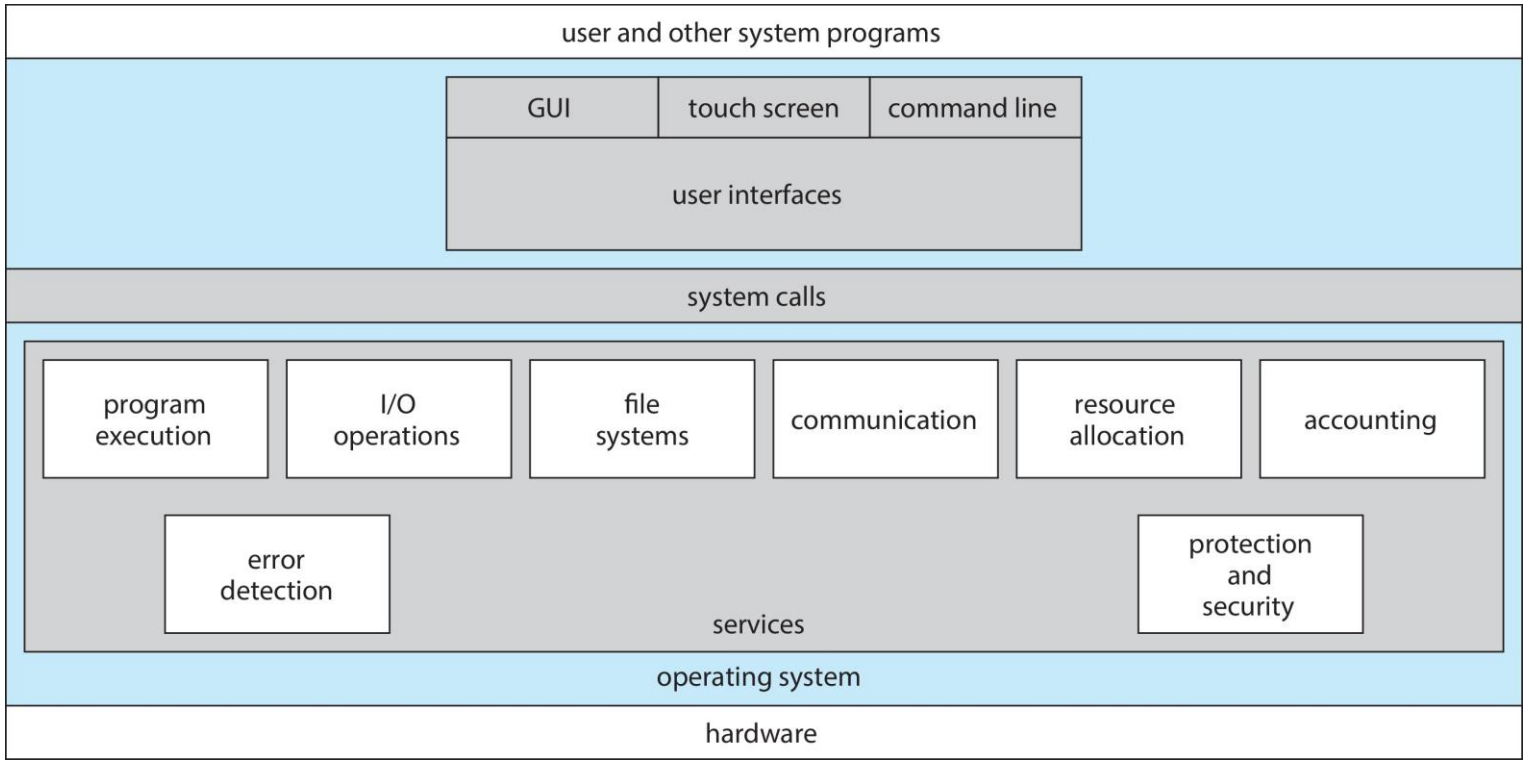





Command Line interpreter

- CLI allows direct command entry
- Sometimes implemented in kernel, sometimes by systems program
- Sometimes multiple flavors implemented – **shells**
- Primarily fetches a command from user and executes it
- Sometimes commands built-in, sometimes just names of programs
  - If the latter, adding new features doesn't require shell modification





Bourne Shell Command Interpreter

1. root@r6181-d5-us01:~ (ssh)

root@r6181-d5-u... ⌘1 | ssh ⌘2 | root@r6181-d5-us01... ⌘3

```
Last login: Thu Jul 14 08:47:01 on ttys002
iMacPro:~ pbg$ ssh root@r6181-d5-us01
root@r6181-d5-us01's password:
Last login: Thu Jul 14 06:01:11 2016 from 172.16.16.162
[root@r6181-d5-us01 ~]# uptime
 06:57:48 up 16 days, 10:52,  3 users,  load average: 129.52, 80.33, 56.55
[root@r6181-d5-us01 ~]# df -kh
Filesystem            Size  Used Avail Use% Mounted on
/dev/mapper/vg_ks-lv_root
                       50G   19G   28G  41% /
tmpfs                 127G  520K  127G   1% /dev/shm
/dev/sda1             477M   71M  381M  16% /boot
/dev/dssd0000         1.0T  480G  545G  47% /dssd_xfs
tcp://192.168.150.1:3334/orangefs
                       12T  5.7T  6.4T  47% /mnt/orangefs
/dev/gpfs-test         23T  1.1T   22T   5% /mnt/gpfs
[root@r6181-d5-us01 ~]#
[root@r6181-d5-us01 ~]# ps aux | sort -nrk 3,3 | head -n 5
root      97653 11.2  6.6 42665344 17520636 ?   S<Ll Jul13 166:23 /usr/lpp/mmfs/bin/mmfsd
root      69849  6.6  0.0        0        0 ?        S    Jul12 181:54 [vpthread-1-1]
root      69850  6.4  0.0        0        0 ?        S    Jul12 177:42 [vpthread-1-2]
root       3829  3.0  0.0        0        0 ?        S    Jun27 730:04 [rp_thread 7:0]
root       3826  3.0  0.0        0        0 ?        S    Jun27 728:08 [rp_thread 6:0]
[root@r6181-d5-us01 ~]# ls -l /usr/lpp/mmfs/bin/mmfsd
-r-x------ 1 root root 20667161 Jun  3  2015 /usr/lpp/mmfs/bin/mmfsd
[root@r6181-d5-us01 ~]#
```





User Operating System Interface - GUI


- User-friendly **desktop** metaphor interface
  - Usually mouse, keyboard, and monitor
  - **Icons** represent files, programs, actions, etc
  - Various mouse buttons over objects in the interface cause various actions (provide information, options, execute function, open directory (known as a **folder**)
  - Invented at Xerox PARC
- Many systems now include both CLI and GUI interfaces
  - Microsoft Windows is GUI with CLI “command” shell
  - Apple Mac OS X is “Aqua” GUI interface with UNIX kernel underneath and shells available
  - Unix and Linux have CLI with optional GUI interfaces (CDE, KDE, GNOME)






Touchscreen Interfaces


- Touchscreen devices require new interfaces
  - Mouse not possible or not desired
  - Actions and selection based on gestures
  - Virtual keyboard for text entry
- Voice commands

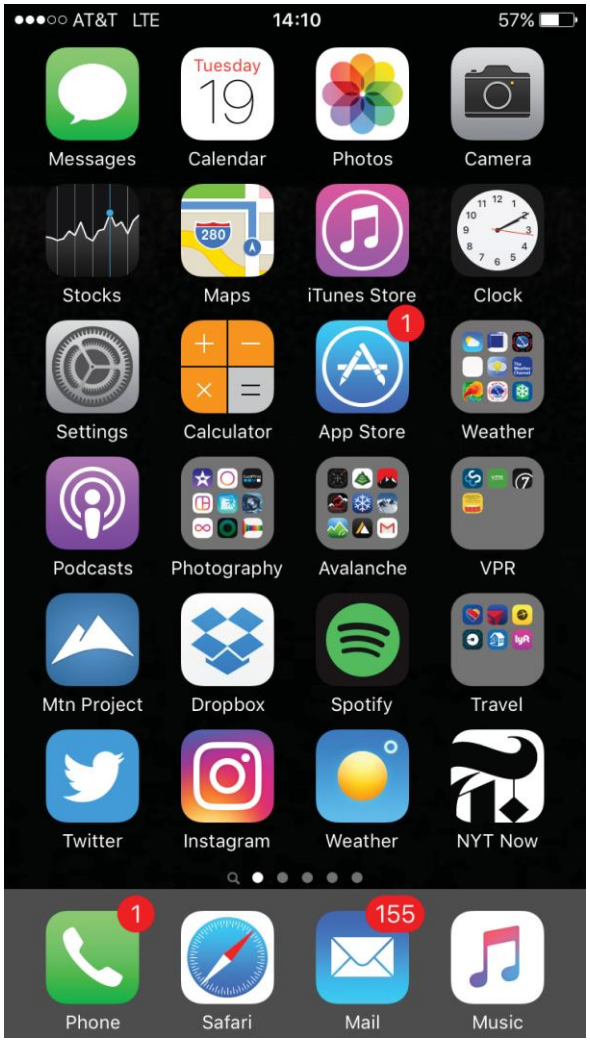






The Mac OS X GUI

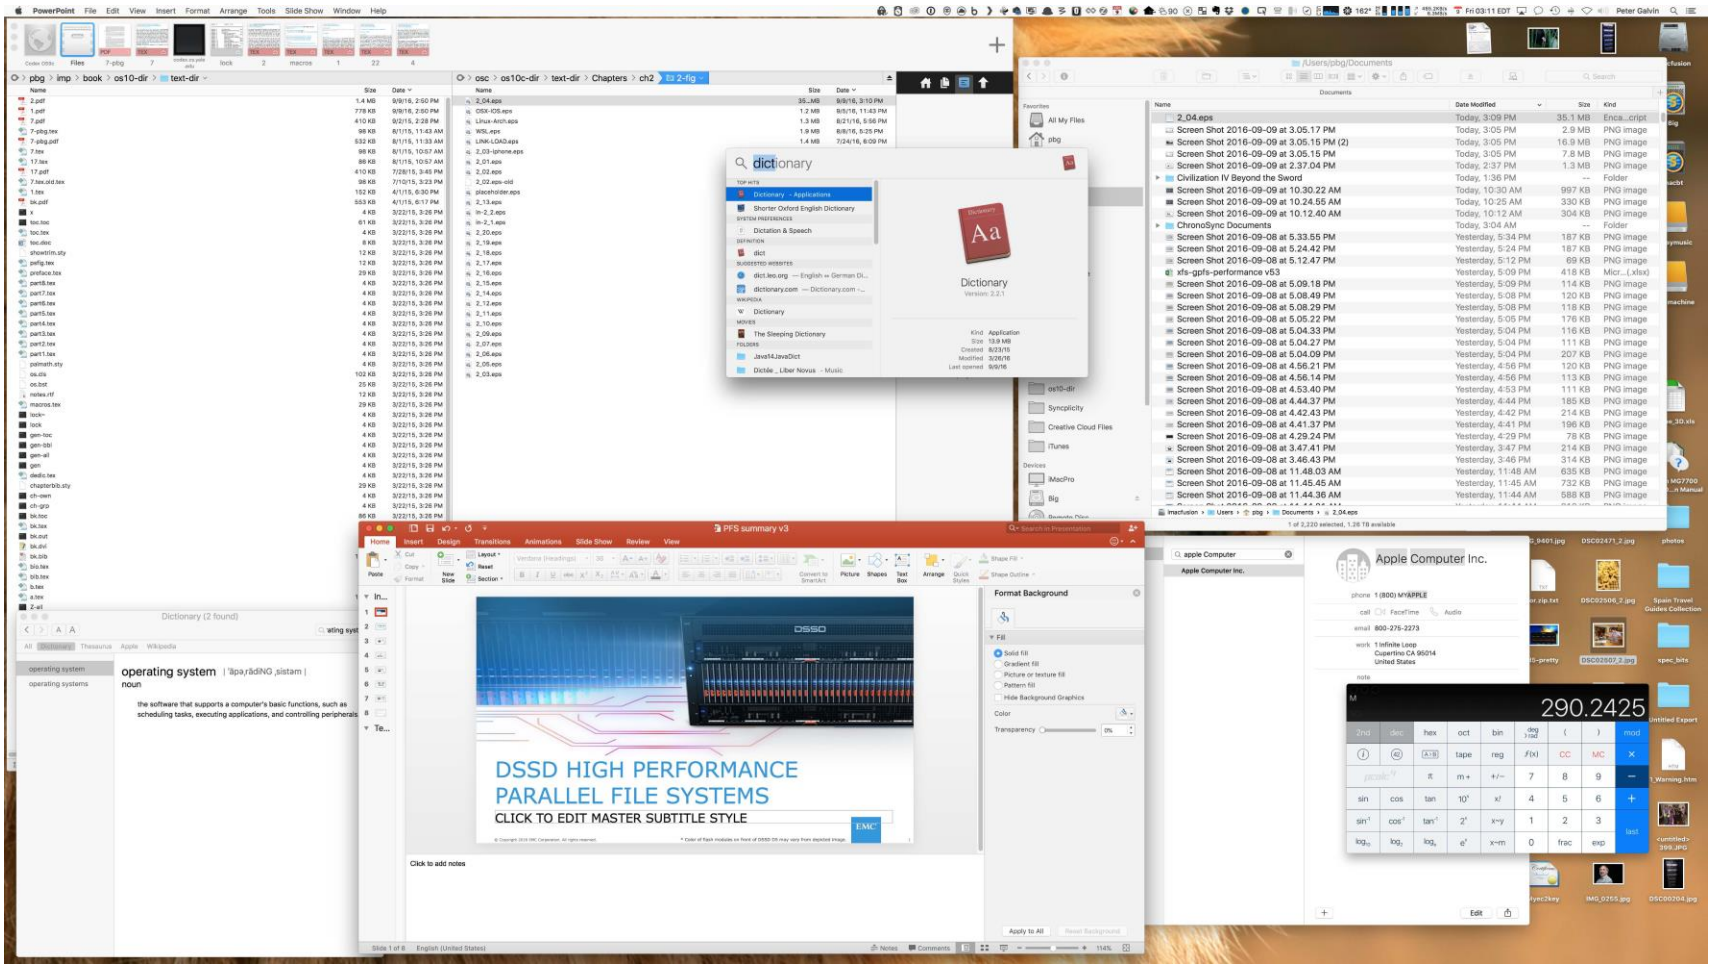






System Calls

- Programming interface to the services provided by the OS
- Typically written in a high-level language (C or C++)
- Mostly accessed by programs via a high-level **Application Programming Interface** (**API**) rather than direct system call use
- Three most common APIs are Win32 API for Windows, POSIX API for POSIX-based systems (including virtually all versions of UNIX, Linux, and Mac OS X), and Java API for the Java virtual machine (JVM)


Note that the system-call names used throughout this text are generic





Example of System Calls

- System call sequence to copy the contents of one file to another file

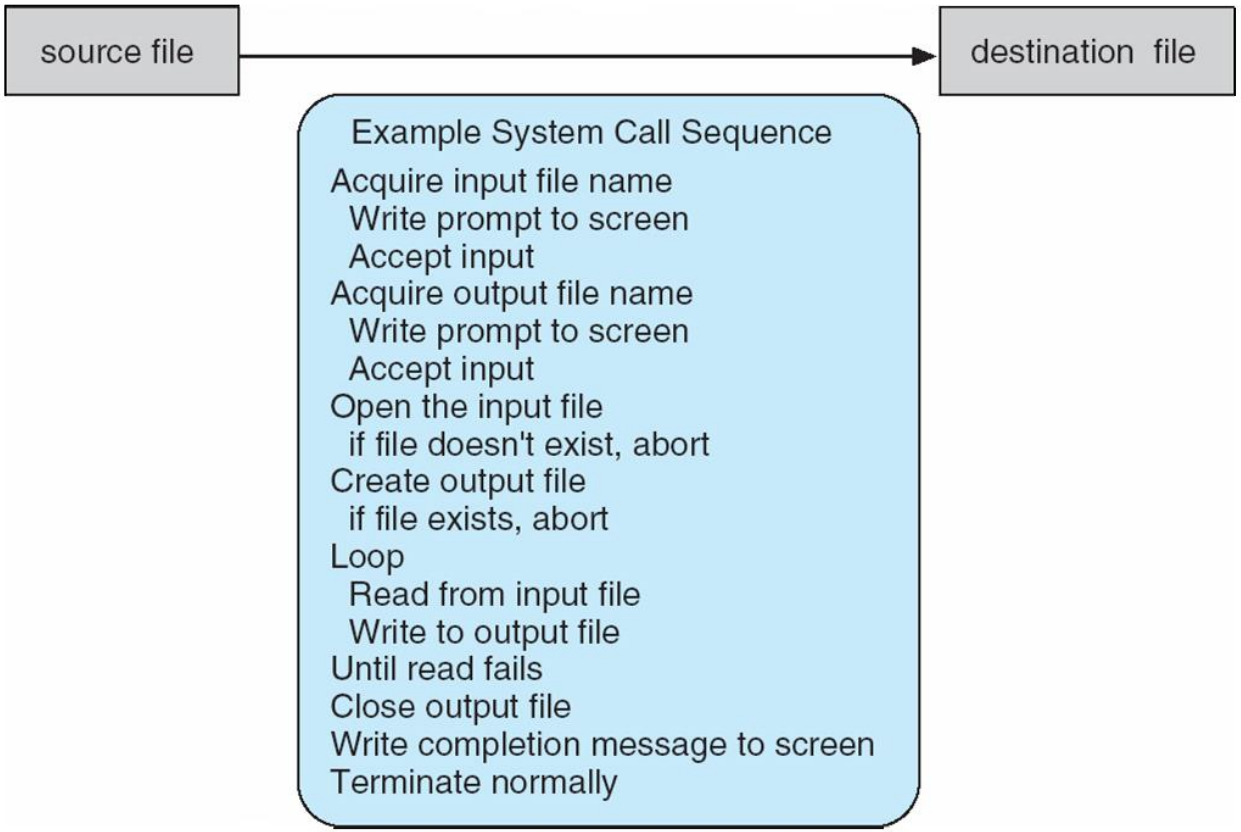





Example of Standard API

EXAMPLE OF STANDARD API

As an example of a standard API, consider the `read()` function that is available in UNIX and Linux systems. The API for this function is obtained from the `man` page by invoking the command

```
man read
```

on the command line. A description of this API appears below:

```
#include <unistd.h>


ssize_t    read(int fd, void *buf, size_t count)
```

return value — function name — parameters

A program that uses the `read()` function must include the `unistd.h` header file, as this file defines the `ssize_t` and `size_t` data types (among other things). The parameters passed to `read()` are as follows:

- `int fd`—the file descriptor to be read
- `void *buf`—a buffer into which the data will be read
- `size_t count`—the maximum number of bytes to be read into the buffer

On a successful read, the number of bytes read is returned. A return value of 0 indicates end of file. If an error occurs, `read()` returns −1.






System Call Implementation

- Typically, a number is associated with each system call
  - **System-call interface** maintains a table indexed according to these numbers
- The system call interface invokes the intended system call in OS kernel and returns status of the system call and any return values
- The caller need know nothing about how the system call is implemented
  - Just needs to obey API and understand what OS will do as a result call
  - Most details of OS interface hidden from programmer by API
    - Managed by run-time support library (set of functions built into libraries included with compiler)





API – System Call – OS Relationship

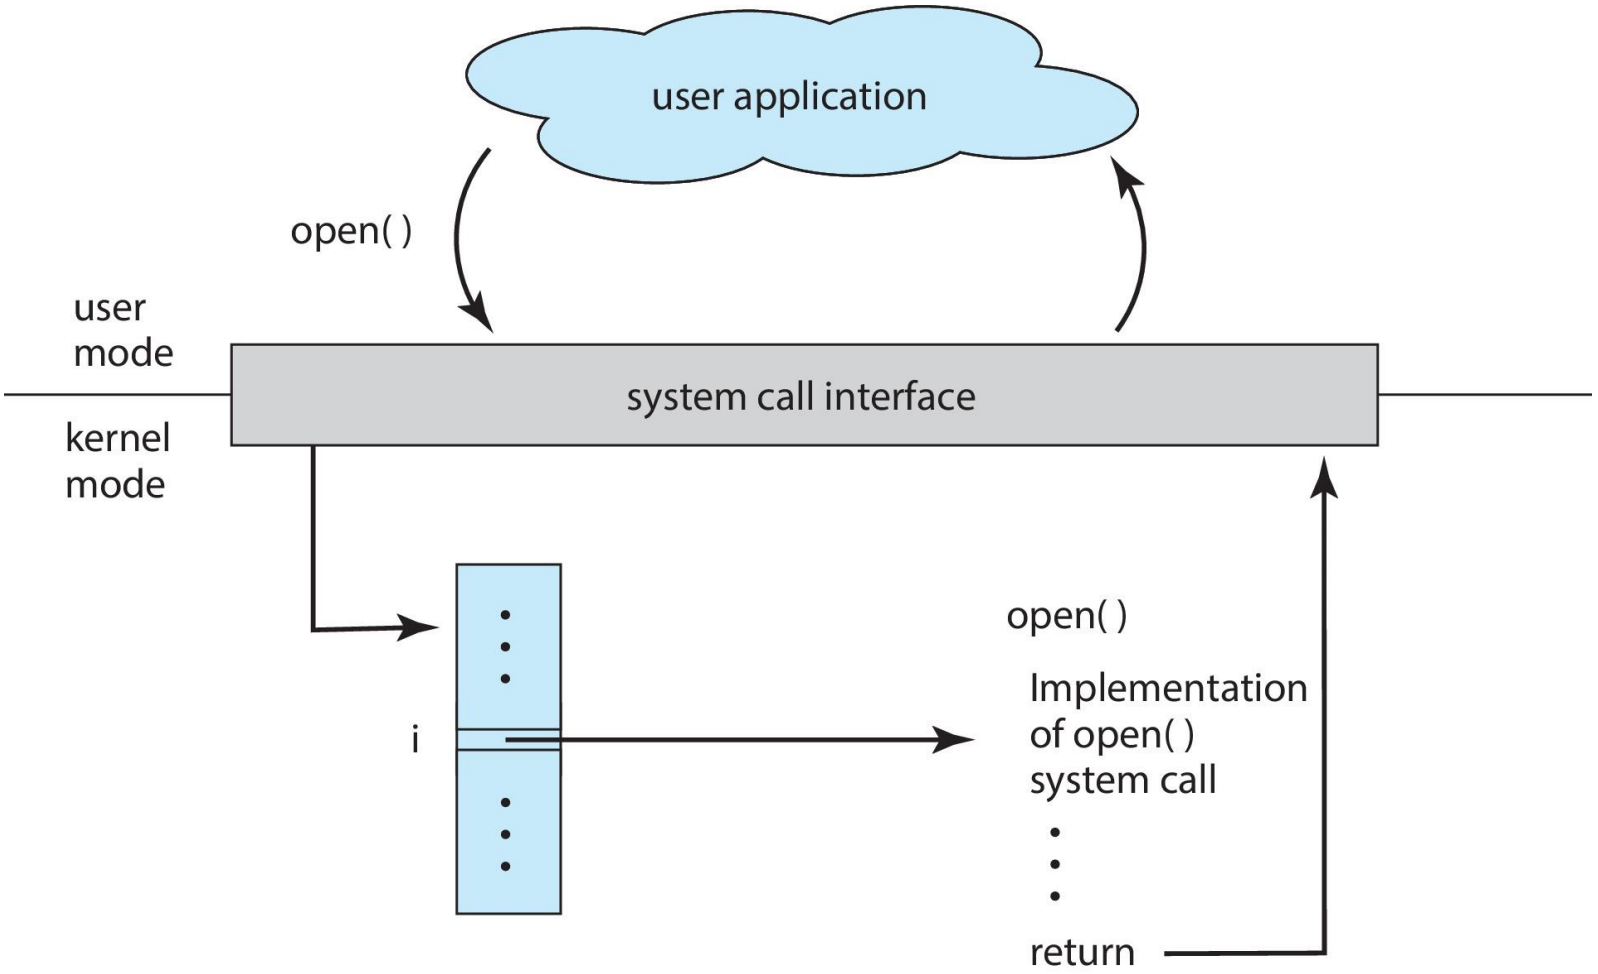





System Call Parameter Passing

- Often, more information is required than simply identity of desired system call
  - Exact type and amount of information vary according to OS and call
- Three general methods used to pass parameters to the OS
  - Simplest: pass the parameters in registers
    - In some cases, may be more parameters than registers
  - Parameters stored in a block, or table, in memory, and address of block passed as a parameter in a register
    - This approach taken by Linux and Solaris
  - Parameters placed, or **pushed**, onto the **stack** by the program and **popped** off the stack by the operating system
  - Block and stack methods do not limit the number or length of parameters being passed





Parameter Passing via Table

