

## **PYTHON PROGRAMMING LAB**



**Prepared by:**

Name of Student: **Mahajan Piyush Dnyaneshwar**

Roll No: **35**

Batch: **2023-27**

**DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING**

<b>Exp. No</b>	<b>List of Experiment</b>
1	<p>1. Write a program to compute Simple Interest.</p> <p>2. Write a program to perform arithmetic, Relational operators.</p> <p>3. Write a program to find whether a given no is even &amp; odd.</p> <p>4. Write a program to print first n natural number &amp; their sum.</p> <p>5. Write a program to determine whether the character entered is a Vowel or not</p> <p>6. Write a program to find whether given number is an Armstrong Number.</p> <p>7. Write a program using for loop to calculate factorial of a No.</p>
	1.8 Write a program to print the following pattern
	<p>i)</p> <pre>* * * * * * * * * * * * * * *</pre>
	<p>ii)</p> <pre>1 2 2 3 3 3 4 4 4 4 5 5 5 5 5</pre>

	<p>iii)</p> <pre> * * * * * * * * * * * * </pre>
2	<p>2.1 Write a program that defines the list of countries that are in BRICS.</p>
	<p>2.2 Write a program to traverse a list in reverse order.</p> <ol style="list-style-type: none"> <li>1.By using Reverse method.</li> <li>2.By using slicing</li> </ol>
	<p>2.3 Write a program that scans the email address and forms a tuple of username and domain.</p>
	<p>2.4 Write a program to create a list of tuples from given list having number and add its cube in tuple. i/p: c= [2,3,4,5,6,7,8,9]</p>
	<p>2.5 Write a program to compare two dictionaries in Python? (By using == operator)</p>
	<p>2.6 Write a program that creates dictionary of cube of odd numbers in the range.</p>

	<p>2.7 Write a program for various list slicing operation.</p> <p>a= [10,20,30,40,50,60,70,80,90,100]</p> <ul style="list-style-type: none"> <li>i. Print Complete list</li> <li>ii. Print 4th element of list</li> <li>iii. Print list from 0th to 4th index.</li> <li>iv. Print list -7th to 3rd element</li> <li>v. Appending an element to list.</li> <li>vi. Sorting the element of list.</li> <li>vii. Popping an element.</li> <li>viii. Removing Specified element.</li> <li>ix. Entering an element at specified index.</li> <li>x. Counting the occurrence of a specified element.</li> <li>xi. Extending list.</li> <li>xii. Reversing the list.</li> </ul>
3	<p>3.1 Write a program to extend a list in python by using given approach.</p> <ul style="list-style-type: none"> <li>i. By using + operator.</li> <li>ii. By using Append ()</li> <li>iii. By using extend ()</li> </ul>
	<p>3.2 Write a program to add two matrices.</p>
	<p>3.3 Write a Python function that takes a list and returns a new list with distinct elements from the first list.</p>
	<p>3.4 Write a program to Check whether a number is perfect or not.</p>
	<p>3.5 Write a Python function that accepts a string and counts the number of upper- and lower-case letters.</p> <pre>string_test= 'Today is My Best Day'</pre>
4	<p>4.1 Write a program to Create Employee Class &amp; add methods to get employee details &amp; print.</p>

	4.2 Write a program to take input as name, email & age from user using combination of keywords argument and positional arguments (*args and **kwargs) using function,
	4.3 Write a program to admit the students in the different Departments(pgdm/btech)and count the students. (Class, Object and Constructor).
	4.4 Write a program that has a class store which keeps the record of code and price of product display the menu of all product and prompt to enter the quantity of each item required and finally generate the bill and display the total amount.
	4.5 Write a program to take input from user for addition of two numbers using (single inheritance).
	4.6 Write a program to create two base classes LU and ITM and one derived class. (Multiple inheritance).
	4.7 Write a program to implement Multilevel inheritance, Grandfather→Father→Child to show property inheritance from grandfather to child.
5	4.8 Write a program Design the Library catalogue system using inheritance take base class (library item) and derived class (Book, DVD & Journal) Each derived class should have unique attribute and methods and system should support Check in and check out the system. (Using Inheritance and Method overriding)
5	5.1 Write a program to create my_module for addition of two numbers and import it in main script.
	5.2 Write a program to create the Bank Module to perform the operations such as Check the Balance, withdraw and deposit the money in bank account and import the module in main file.
	5.3 Write a program to create a package with name cars and add different modules (such as BMW, AUDI, NISSAN) having classes and functionality and import them in main file cars.

6	6.1 Write a program to implement Multithreading. Printing “Hello” with one thread & printing “Hi” with another thread.
7.	7.1 Write a program to use ‘whether API’ and print temperature of any city, also print the sunrise and sunset times for the same humidity of that area.
	7.2 Write a program to use the ‘API’ of crypto currency.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 1.1**

---

**Title: Write a program to compute Simple Interest.**

**Theory: Formula for Simple Interest=**


**Principal\*rate of interest\*time/100**

**Since principal, rate of interest, and time can be in decimal points, their datatype is float. Taking all these values from the user, and then printing the value of simple interest from these values.**

**Code:**

```
a=float(input("Enter principal: "))
b=float(input("Enter rate of interest: "))
c=float(input("Enter time(in years): "))
print("Simple Interest:",(a*b*c)/100)
```

**Output: (screenshot)**

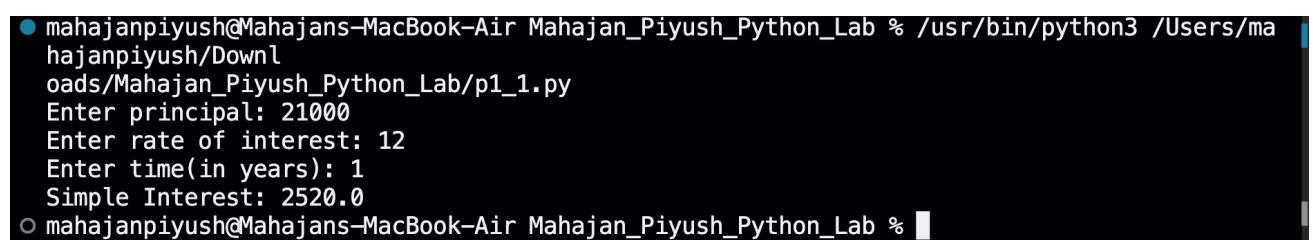

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_1.py
Enter principal: 21000
Enter rate of interest: 12
Enter time(in years): 1
Simple Interest: 2520.0
```

## Test Case: Any two (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_1.py
Enter principal: 10000
Enter rate of interest: 12
Enter time(in years): 2
Simple Interest: 2400.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_1.py
Enter principal: 50000
Enter rate of interest: 7
Enter time(in years): 2
Simple Interest: 7000.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Conclusion:

Hence using the formula for simple interest, I have calculated it from the values given by the user and printed the result.

**Name of Student:** Mahajan Piyush Dnyaneshwar

**Roll Number:** 35

## Experiment No: 1.2

**Title:** Write a program to perform Arithmetic, Relational operators.

**Theory:** Arithmetic operators are those operators which perform mathematical arithmetic operations on the values or variables(eg- addition(+), subtraction(-), division(/), etc.) Relational operators are used to compare two or more values or variables(eg- less than(<), greater than(>), equal to(==) or not equal to(!=), etc.)

**Code:**

```
a=float(input("Enter first number: "))
b=float(input("Enter second number: "))
c=input("Select the operator: +,-,/,*,%,//,** ")
if c=="+"[ ]:
    print("Sum:",a+b)
elif c=="-":[ ]
    print("Difference:",a-b)
elif c=="*":[ ]
    print("Multiplication:",a*b)
elif c=="/":[ ]
    print("Division:",a/b)
elif c=="%":[ ]
    print("Remainder:",a%b)
elif c=="//":[ ]
    print("Floor division:",a//b)
elif c=="**":[ ]
    print("Power:",a**b)
else:[ ]
    print("Invalid operator!")
if a>b:[ ]
    print(a,"is greater than",b)
elif a==b:[ ]
    print(a,"is equal to",b)
else:[ ]
    print(b,"is greater than",a)
```

## Output: (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_2.py
Enter first number: 21
Enter second number: 12
Select the operator: +,-,/,*,%,//,** +
Sum: 33.0
21.0 is greater than 12.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Test Case: Any two (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_2.py
Enter first number: 99
Enter second number: 1
Select the operator: +,-,/,*,%,//,** -
Invalid operator!
99.0 is greater than 1.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_2.py
Enter first number: 78
Enter second number: 34
Select the operator: +,-,/,*,%,//,** //
Floor division: 2.0
78.0 is greater than 34.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence using the arithmetic, calculated the result of two values given by the user, and using relational operators, printing the greater value given by the user.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 1.3**

---

**Title: Write a program to find whether a given no is even & odd.**

**Theory:** Even numbers are those numbers which are divisible by 2(eg- 2,4,6,8,10, so on) and odd numbers are those numbers which are not divisible by 2(eg- 1,3,5,7,9, so on).

To check whether a given number is odd or even, we need to check whether it is divisible by 2 using modulus operator(%).

**Code:**

```
a=int(input("Enter a number: "))
if a%2==0:
    print(a,"is an even number.")
else:
    print(a,"is odd number.")
```

**Output: (screenshot)**

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/program13.py
Enter a number: 12
12 is an even number.
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Test Case: Any two (screenshot)**

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/program13.py
Enter a number: 12131321
12131321 is odd number.
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/program13.py
Enter a number: 9
9 is odd number.
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion: Hence using the modulus operator(%), checked whether a given number is odd or even.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 1.4**

---


**Title: Write a program to print first n natural number & their sum.**

**Theory:** Natural numbers are numbers which start from 1 and go upto infinity. Using a for loop, print all the natural numbers and add them till the range given by the user.

**Code:**

```
a=int(input("Enter a number: "))
sum=0
if a<=0:
    print("Invalid number!")
else:
    for i in range(1,a+1):
        print(i)
        sum+=i
    print("Sum:",sum)
```

**Output: (screenshot)**

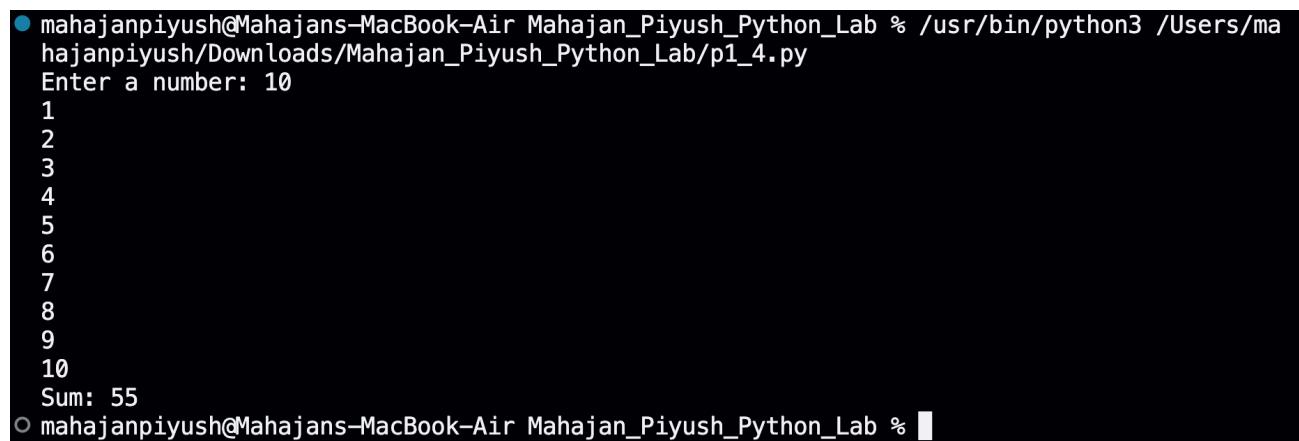

A terminal window showing the execution of a Python script. The command `/usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_4.py` is run, followed by the input `Enter a number: 10`. The script then prints the numbers 1 through 10, followed by the sum `Sum: 55`.

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_4.py
Enter a number: 10
1
2
3
4
5
6
7
8
9
10
Sum: 55
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Test Case: Any two (screenshot)**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_4.py
Enter a number: 5
1
2
3
4
5
Sum: 15
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_4.py
Enter a number: 7
1
2
3
4
5
6
7
Sum: 28
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Conclusion:

Hence using a for loop to iterate over each number from 1 to the range(given by the user which is inclusive), printed all the natural numbers and calculated their sum and printed it.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 1.5**

---


**Title: Write a program to determine whether the character entered is a Vowel or not.**

**Theory: A character is a vowel if it is either A,E,I,O,U(be it lower or upper case). Else, it is not a vowel(consonant).**

**Code:** a


```
a=["a","e","i","o","u"]
b=input("Enter a character: ")
if b.lower() in a:
    print(b,"is a vowel")
else:
    print(b,"is not a vowel")
```

**Output: (screenshot)**

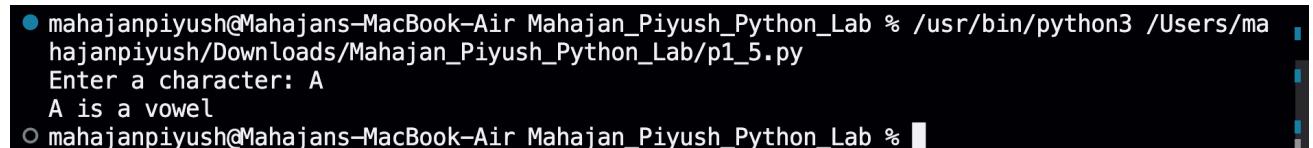

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_5.py
Enter a character: A
A is a vowel
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Test Case: Any two (screenshot)**

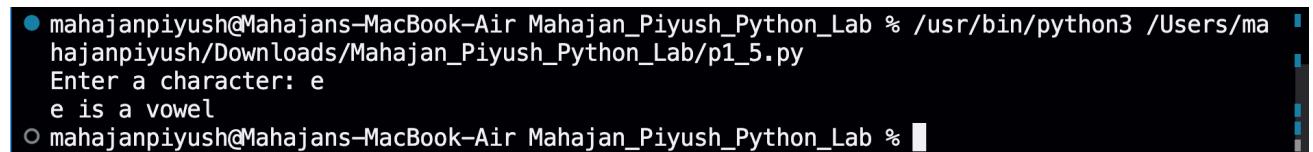

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_5.py
Enter a character: e
e is a vowel
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_5.py
Enter a character: t
t is not a vowel
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

### Conclusion:

Hence using a membership operator(**in**) to check whether a user given character is inside the vowel list or not, and printing the appropriate message to the user.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

## **Experiment No: 1.6**

---

**Title: Write a program to find whether given number is an Armstrong Number.**


**Theory:** A positive number is called an Armstrong number of order n if

$abcd=a^n+b^n+c^n+d^n$ . Eg- 153(3 digits are there, therefore, order=3), therefore,  $1^3+5^3+3^3+3^3=153$ . Therefore, 153 is an Armstrong number of order 3.

**Code:**


```
a=int(input("Enter a number: "))
b=len(str(a))
c=a
sum=0
while c!=0:
    d=c%10
    sum+=d**b
    c//=10
if sum==a:
    print(a,"is an armstrong number")
else:
    print(a,"is not an armstrong number")
```

**Output: (screenshot)**

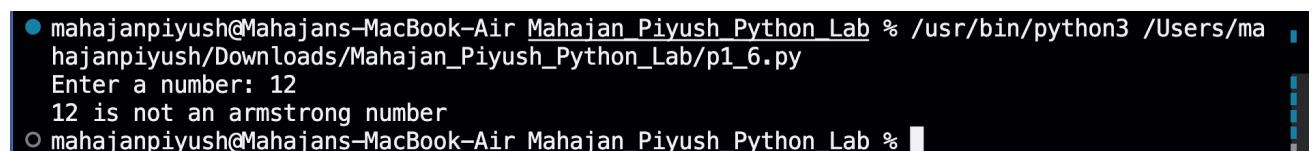

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_6.py
Enter a number: 12
12 is not an armstrong number
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Test Case: Any two (screenshot)**

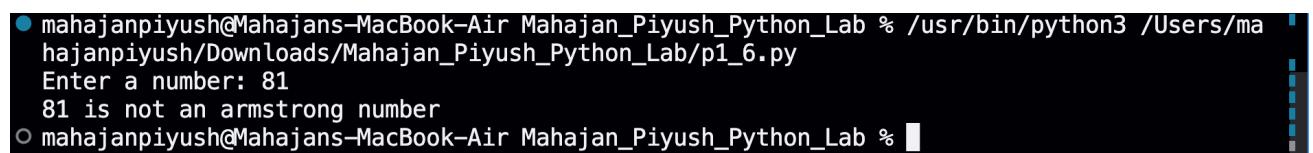

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_6.py
Enter a number: 81
81 is not an armstrong number
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_6.py
Enter a number: 153
153 is an armstrong number
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Conclusion:

Hence, calculating the order of the user given number(using len function), and adding the digits of the number raised to the power of the order(using while loop), and checking whether the sum is equal to the number(using relational operator ==) and printing the appropriate message(using if else statement).

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 1.7**

---

**Title: Write a program using for loop to calculate factorial of a number.**

**Theory:** Factorial of a number is the product of all numbers from the number till . It is denoted by  $n!$ , where  $n$  is the number given by the user. Only positive numbers have a

factorial.

Eg-  $5! = 5 * 4 * 3 * 2 * 1 = 120$

**Code:**

```
a=int(input("Enter a number: "))
fact=1
if a<0:
    print("Invalid number")
elif a==0 or a==1:
    print("Factorial:",1)
else:
    for i in range(1,a+1):
        fact*=i
    print("Factorial:",fact)
```

**Output: (screenshot)**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_7.py
Enter a number: 5
Factorial: 120
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Test Case: Any two (screenshot)**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_7.py
Enter a number: 10
Factorial: 3628800
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_7.py
Enter a number: 4
Factorial: 24
○ mahaianopivush@Mahaians-MacBook-Air Mahaian_Pivush_Python_Lab %
```

## Conclusion:

Hence, calculating the factorial of the user given number by first checking if it is a valid number(using if else statement), and using a for loop by calculating all the numbers from 1 to the number itself and printing it.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 1.8**

---

**Title: Write a program to print the following pattern**

**i)**

```
*  
* *  
* * *  
* * * *  
* * * * *
```

**Theory:**

**Using nested for loops to print ascending half pyramid pattern. One for loop for the rows and another for loop to print stars in each row. Number of stars in each row should be equal to the row they are in. Eg- In 4th row, there should be 4 stars, in 5th row, there should be 5 stars, etc.**

**Code:**

```
for i in range(1,6):  
    for j in range(i):  
        print(" * ",end='')  
    print("\n")
```

**Output: (screenshot)**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_8_1.py  
*  
* *  
* * *  
* * * *  
* * * * *
```

**Conclusion: Hence, printing a half pyramid ascending star pattern using nested for loops.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 1.8**

---

**Title: Write a program to print the following pattern**

**ii)**

**1**

**2 2**

**3 3 3**

**4 4 4 4**

**5 5 5 5 5**

**Theory:** Using nested for loops to print ascending half pyramid pattern. One for loop for the rows and another for loop to print numbers in each row. There should be n numbers and all numbers should have n value in nth row. Eg- In 4th row there should be 4 numbers and each one of them should be of the value 4.

**Code:**

```
for i in range(1,6):
    for j in range(i):
        print(" * ",end='')
    print("\n")
```

**Output: (screenshot)**

The screenshot shows a terminal window with the following content:

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_8_2.py
1
22
333
4444
55555
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

The terminal shows the execution of a Python script named p1\_8\_2.py. The output displays a half pyramid pattern of numbers from 1 to 5, where each row contains the number repeated as many times as its row index. The terminal prompt changes from a blue circle to a blue square after the script has run.

**Conclusion:**

**Hence, printing a half pyramid ascending number pattern using nested for loops.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 1.8**

---

**Title: Write a program to print the following pattern**

**iii)**

```
*  
* * *  
* * * * *  
* * * * * * *  
* * * * * * * *
```

**Theory:** Using nested for loops to print ascending pyramid pattern. One for loop for the rows and another for loop to print stars in each row. There should be  $2n-1$  stars in nth row.

**Eg-** In 4th row there should be  $2(4)-1=7$  stars, in 5th row there should be  $2(5)-1=9$  stars.

**Code:**

```
for i in range(1,6):  
    for j in range(6,i,-1): #pyramid pattern ascending  
        print(" ",end='')  
    for k in range(2*i-1):  
        print("*",end='')  
    print()
```

**Output(Screenshot):**

The terminal window shows the command being run: `mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p1_8_3.py`. The output displays the following pattern:

```
*  
***  
*****  
***** *  
***** * *
```

**Conclusion: Hence, printing a half pyramid ascending number pattern using nested for loops.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 2.1**

---

**Title: Write a program that define the list of defines the list of define countries that are in BRICS.**


**Theory: BRICS countries= Brazil, Russia, India, China, South Africa.**

**Using a membership operator(in), can check whether country given by user is a BRICS member or not. Can use in operator to check whether the value of variable is inside BRICS list or not.**

**Code:**


```
brics=["brazil","russia","india","china","south africa"]
a=input("Enter a country: ")
if a.lower() in brics:
    print(a,"is a member of BRICS")
else:
    print(a,"is not a member of BRICS")
```

**Output(Screenshot):**

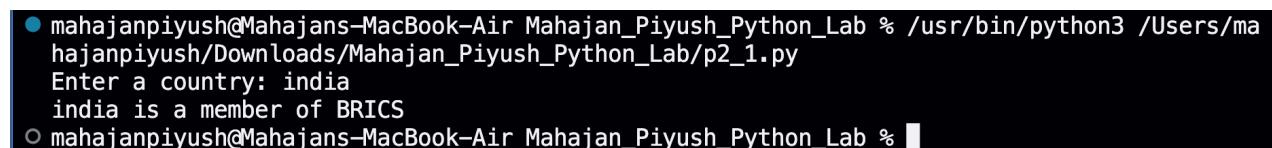

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_1.py
Enter a country: india
india is a member of BRICS
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Test Case: Any two (screenshot)**

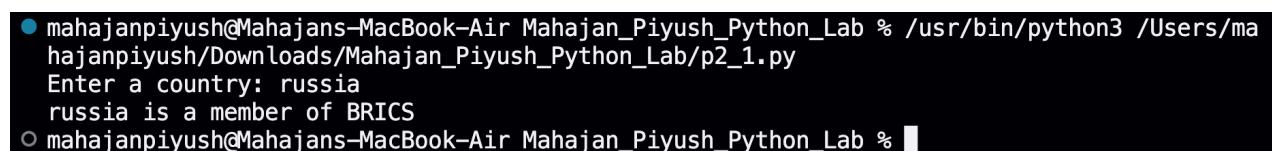

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_1.py
Enter a country: russia
russia is a member of BRICS
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_1.py
Enter a country: dubai
dubai is not a member of BRICS
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion: Hence, using a membership operator(in), check user given country is in BRICS or not and printing the appropriate message using if else statement.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 2.2**

---

**Title: Write a program to traverse a list in reverse order.**

**1.By using Reverse method.**

**2.By using slicing**

**Theory: 1. By using predefined function reverse(), we can reverse a list and print it.**

**2. By using index slicing, we can print the list in reverse using step size as -1.**

**Code:**

**1.**

```
a=[]
n=int(input("Enter number of elements: "))
for i in range(n):
    b=int(input("Enter an element: "))
    a.append(b)
print(a)
a.reverse()
print("Reversed list:",a)
```

**2.**

```
a=[]
n=int(input("Enter number of elements: "))
for i in range(n):
    b=int(input("Enter an element: "))
    a.append(b)
print(a)
print("Reversed list:",a[::-1])
```

**Output(Screenshot):**

```
Enter number of elements: 3
Enter an element: 21
Enter an element: 12
Enter an element: 42
[21, 12, 42]
Reversed list: [42, 12, 21]
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_2_2.py
Enter number of elements: 3
Enter an element: 12
Enter an element: 14
Enter an element: 81
[12, 14, 81]
Reversed list: [81, 14, 12]
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % []
```

**Conclusion:** Hence, traversing the index in reverse order using index slicing and predefined function reverse().

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 2.3**

---

**Title: Write a program that scans the email address and forms a tuple of username and domain.**

**Theory:**

Using `split()` function with `@` as a parameter to split the email address given by user and store it in a tuple. Then print the first element of the tuple as username and the second element from the same tuple as domain.

**Code:**

```
a=input("Enter your email address: ")
if "@" in a:
    b=(a.split("@"))
    c=(b[0],b[1])
    print("User name:",c[0])
    print("Domain:",c[1])
else:
    print("Wrong email address entered")
```

**Output(Screenshot):**



mahajanpiyush@Mahajans-MacBook-Air Mahajan\_Piyush\_Python\_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan\_Piyush\_Python\_Lab/p2\_2.py  
Enter your email address: mahajanpi@2105gmail.com  
User name: mahajanpi  
Domain: 2105gmail.com

## Test Case: Any two (Screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_2.py
Enter your email address: pishsd
Wrong email address entered
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_2.py
Enter your email address: 2023.mahajanp@isu.ac.in
User name: 2023.mahajanp
Domain: isu.ac.in
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Conclusion:

Hence, using `split()` function to split the email address in username and domain and printing them after storing them in a tuple.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 2.4**

**Title: Write a program to create a list of tuples from given list having number and add its cube in tuple.**

**i/p: c= [2,3,4,5,6,7,8,9]**

**Theory:** Using list comprehension, make another list with tuples as its elements. Each tuple would have the number from original list and it's cube using arithmetic operator(\*\*).

**Code:**

```
c= [2,3,4,5,6,7,8,9]
a=[(num,num**3)for num in c]
print(a)
```

**Output(Screenshot):**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_4.py
[(2, 8), (3, 27), (4, 64), (5, 125), (6, 216), (7, 343), (8, 512), (9, 729)]
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, using list comprehension to make a list of tuples containing the values and their cube using \*\* operator from the original list.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 2.5**

---

**Title: 2.5 Write a program to compare two dictionaries in Python**

**(By using == operator)**


**Theory:** Dictionary is a datatype in Python which stores information as key-value pairs, where keys are unique and are used to distinguish between values. Using relational

**operator(==) to check whether two dictionaries have same key-value pairs or not.**

**Code:**

```
a={1:1,2:"a",3:23,4:52}
b={1:1,2:"a",3:23,4:52}
if a==b:
    print("Both the dictionaries are equal")
else:
    print("Both the dictionaries are not equal")
```

**Output(Screenshot):**

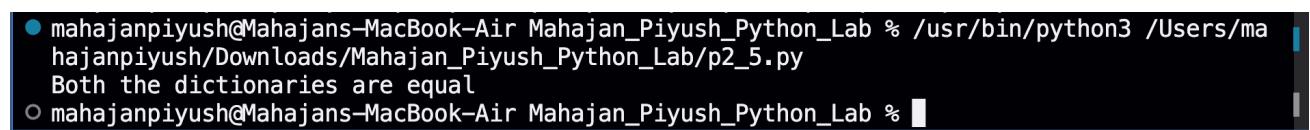

A terminal window showing the execution of a Python script named p2\_5.py. The command entered is "/usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan\_Piyush\_Python\_Lab/p2\_5.py". The output displayed is "Both the dictionaries are equal".

**Conclusion:** Hence, using == operator to check whether two dictionaries have same key-value pairs or not and printing appropriate messages using if else statements.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 2.6**

---

**Title: Write a program that creates dictionary of cube of odd numbers in the range.**

**Theory:** Using for loop to iterate over every number from 1 till range given by user and using if statement to check whether a number is odd or even using modulus operator(%) and making the number as key and its cube as a value, and printing the dictionary in the end.

**Code:**

```
a=int(input("Enter range: "))
b={}
for i in range(1,a):
    if i%2!=0:
        b[i]=i**3
print(b)
```

**Output(Screenshot):**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_6.py
Enter range: 4
{1: 1, 3: 27}
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Test Case: Any two (screenshot)**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_6.py
Enter range: 5
{1: 1, 3: 27}
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_6.py
Enter range: 10
{1: 1, 3: 27, 5: 125, 7: 343, 9: 729}
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Conclusion:

Hence, using **for loop** and **if statement** to create a dictionary of odd numbers as keys and their cube as values and printing the dictionary.

**Name of Student:** Mahajan Piyush Dnyaneshwar

**Roll Number:** 35

**Experiment No:** 2.7

---

**Title:** Write a program for various list slicing operation.

a= [10,20,30,40,50,60,70,80,90,100]

- i. Print Complete list
- ii. Print 4th element of list
- iii. Print list from 0th to 4th index.
- iv. Print list -7th to 3rd element
- v. Appending an element to list.
- vi. Sorting the element of list.
- vii. Popping an element.
- viii. Removing Specified element.
- ix. Entering an element at specified index.
- x. Counting the occurrence of a specified element.
- xi. Extending list.
- xii. Reversing the list.

**Theory:** Using index slicing to print specific elements, predefined functions such as append() to add an element in the list, sort() to sort the list in ascending or descending order, pop() to remove an element in the list, insert() to add an element in the list at a specific index, remove() to remove a specific element from the list, for loop to check the occurrence of an element, extend() to add multiple elements in the list, reverse() to reverse the list.

**Code:**

```
a= [10,20,30,40,50,60,70,80,90,100]
print(a)
```

```
print(a[3]) #Print 4th element of list

print(a[0:4]) #Print list from 0th to 4th index.

print(a[-7:4]) #Print list -7th to 3rd element

a.append(110) #Appending an element to list.
print(a)

a.sort() #Sorting the element of list.
print(a)
a.sort(reverse=True) #Sorting the element of list in descending
order.
print(a)

a.pop() #Popping an element.
print(a)

b=int(input("Enter element to remove: "))
if b in a:
    a.remove(b) #Removing Specified element.
    print(a)
else:
    print("Invalid element")

b=int(input("Enter element to add: "))
c=int(input("Enter index where to insert: "))
a.insert(c,b) #Entering an element at specified index.
print(a)

b=int(input("Enter element to count: "))
count=0
for i in a:
    if i==b:
        count+=1 #Counting the occurrence of a specified element.
print("Count of element:",count)

c=int(input("Enter number of elements: "))

d=[]
for i in range(c):
    b=int(input("Enter element: "))
    d.append(b)
a.extend(d) #Extending list.
print(a)

a.reverse() #Reversing the list.
print(a)
```

## Output(Screenshot):

```
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_7.py
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100]
40
[10, 20, 30, 40]
[40]
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110]
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110]
[110, 100, 90, 80, 70, 60, 50, 40, 30, 20, 10]
[110, 100, 90, 80, 70, 60, 50, 40, 30, 20]
Enter element to remove: 110
[100, 90, 80, 70, 60, 50, 40, 30, 20]
Enter element to add: █
```

## Test Case: Any two (screenshot)

```
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_7.py
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100]
40
[10, 20, 30, 40]
[40]
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110]
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110]
[110, 100, 90, 80, 70, 60, 50, 40, 30, 20, 10]
[110, 100, 90, 80, 70, 60, 50, 40, 30, 20]
Enter element to remove: 20
[110, 100, 90, 80, 70, 60, 50, 40, 30]
Enter element to add: █
```

```
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p2_7.py
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100]
40
[10, 20, 30, 40]
[40]
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110]
[10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110]
[110, 100, 90, 80, 70, 60, 50, 40, 30, 20, 10]
[110, 100, 90, 80, 70, 60, 50, 40, 30, 20]
Enter element to remove: 20
[110, 100, 90, 80, 70, 60, 50, 40, 30]
Enter element to add: 110
Enter index where to insert: █
```

**Conclusion:Hence, using for loop, slicing, and various predefined list functions to add, remove, sort and reverse a list.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 3.1**

---

**Title: Write a program to extend a list in python by using given approach.**

- i. By using + operator.
- ii. By using Append ()
- iii. By using extend ()

**Theory:**

**+ operator is used to add a list to another list. Append() is used to add an element at**

**the end of the list. Extend() is used to add multiple elements at the end of the list.**

**Code:**

```
a=[1,2,3,4,5]
c=[]
b=int(input("Enter number of elements: "))
for i in range(b):
    d=int(input("Enter element: "))
    c.append(d)
a+=c #using + operator
print(a)

b=int(input("Enter element: "))
a.append(b) #using append()
print(a)

c=[]
b=int(input("Enter number of elements: "))
for i in range(b):
    d=int(input("Enter element: "))
    c.append(d)
a.extend(c) #using extend()
print(a)
```

## Output(Screenshot):

```
/usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_1.py
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_1.py
Enter number of elements: 2
Enter element: 12
Enter element: 15
[1, 2, 3, 4, 5, 12, 15]
Enter element: █
```

## Test Case: Any two (screenshot)

```
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_1.py
Enter number of elements: 2
Enter element: 12
Enter element: 15
[1, 2, 3, 4, 5, 12, 15]
Enter element: 21
[1, 2, 3, 4, 5, 12, 15, 21]
Enter number of elements: 15
Enter element: █
```

```
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_1.py
Enter number of elements: 2
Enter element: 12
Enter element: 54
[1, 2, 3, 4, 5, 12, 54]
```

**Conclusion:** Hence, using for loop and if statement to create a dictionary of odd numbers as keys and their cube as values and printing the dictionary.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 3.2**

---

**Title: Write a program to add two matrices.**

**Theory:** A matrix is a nested list in Python(a list of lists). It consists of two lists which have three lists inside each of them. Using nested for loop, one for each of the two lists, add elements from the two matrices and store the sum in another matrix of same dimension and print it.

**Code:**

```
a=[[2,5,4],[1,3,9],[7,6,2]]  
b=[[1,8,5],[7,3,6],[4,0,9]]  
c=[[0,0,0],[0,0,0],[0,0,0]]  
for i in range(len(a)):  
    for j in range(len(b)):  
        c[i][j]=a[i][j]+b[i][j]  
print(c)
```

**Output(Screenshot):**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab/program32.py  
[[3, 13, 9], [8, 6, 15], [11, 6, 11]]
```

**Test Case: Any two (screenshot)**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab/program32.py  
[[3, 13, 9], [8, 6, 15], [11, 6, 11]]
```

**Conclusion:** Hence, using nested for loop, add the elements of two nested lists and store the sum in another nested list

**Name of Student:** Mahajan Piyush Dnyaneshwar

**Roll Number:** 35

### **Experiment No: 3.3**

---

**Title:** Write a Python function that takes a list and returns a new list with distinct elements from the first list.

**Theory:** Making a user defined function distin() taking a user list as a parameter and then making an empty list and using a for loop to iterate through the user list and using membership operator(in) to check whether the element is present in the empty list too. If it is not present, append it in the list and check the next element for the same.

**Code:**

```
def distin(a):
    b=[]
    for i in a:
        if i not in b:
            b.append(i)
    print(b)
a=[]
while True:
    c=int(input("Enter a number(0 to exit): "))
    if c == 0:
        break
    else:
        a.append(c)
print(a)
print("Distinct list:")
distin(a)
```

**Output(Screenshot):**

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_3.py
Enter a number(0 to exit): 1
Enter a number(0 to exit): 3
Enter a number(0 to exit): 24
Enter a number(0 to exit): 0
[1, 3, 24]
Distinct list:
[1, 3, 24]
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Test Case: Any two (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_3.py
Enter a number(0 to exit): 12
Enter a number(0 to exit): 434
Enter a number(0 to exit): 325
Enter a number(0 to exit): 13
Enter a number(0 to exit): 0
[12, 434, 325, 13]
Distinct list:
[12, 434, 325, 13]
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_3.py
Enter a number(0 to exit): 12
Enter a number(0 to exit): 12
Enter a number(0 to exit): 12
Enter a number(0 to exit): 0
[12, 12]
Distinct list:
[12]
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, by making a function, using nested for loop to check whether each element in the list is only present once and appending it to another list and then printing the other list at the end.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 3.4**

---


**Title: Write a program to Check whether a number is perfect or not.**

**Theory:** A number is a perfect number if the sum of its divisors(excluding the number itself) is equal to the number itself. Eg- 6 is a perfect number as divisors of 6 are 1,2,3. Sum-  $1+2+3=6$  which is equal to the number itself.

**Code:**


```
def perfect(a):
    sum = 0
    for i in range(1, a):
        if a % i == 0:
            sum += i
    if sum == a:
        print(a, "is a perfect number")
    else:
        print(a, "is not a perfect number")
a = int(input("Enter a number: "))
perfect(a)
```

**Output(Screenshot):**

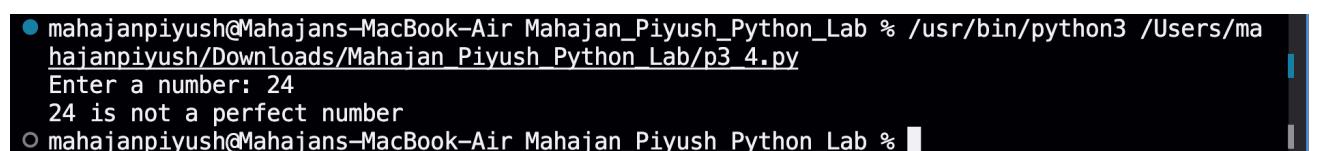

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_4.py
Enter a number: 24
24 is not a perfect number
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Test Case: Any two (screenshot)**

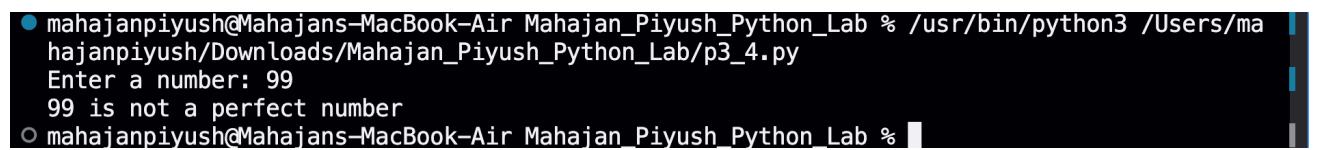

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_4.py
Enter a number: 99
99 is not a perfect number
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_4.py
Enter a number: 28
28 is a perfect number
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, using a for loop to iterate over each number from 1 to number itself(exclusive) and checking whether it is a divisor of the number using if else statement and adding it in sum variable and checking afterwards if the sum is equal to the number and printing the appropriate message using if else statement.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 3.5**

---


**Title: Write a Python function that accepts a string and counts the number of upper-case and lower-case letters.**

**Theory:** Using a for loop to iterate each character in the string and if elif statement and predefined functions isupper() and islower() to check whether a character is lowercase or uppercase and incrementing the value of the respective uppercase or lowercase counter by 1.

**Code:**

```
a=input("Enter a string: ")
ucount=0
lcount=0
for i in a:
    if i.islower():
        lcount+=1
    elif i.isupper():
        ucount+=1
print(a)
print("Number of lower case letters:",lcount)
print("Number of upper case letters:",ucount)
```

**Output(Screenshot):**

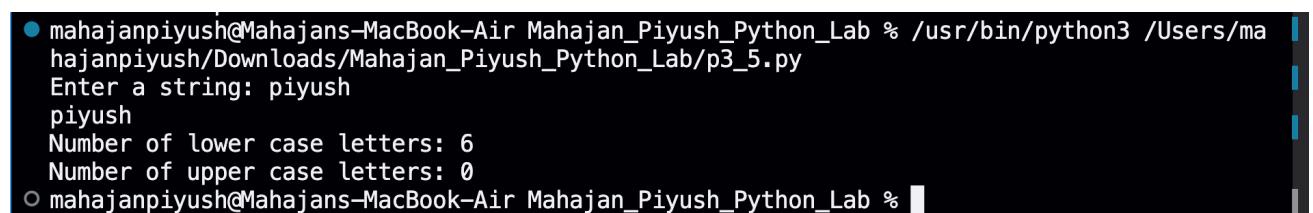

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_5.py
Enter a string: piyush
piyush
Number of lower case letters: 6
Number of upper case letters: 0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Test Case: Any two (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_5.py
Enter a string: MoM
MoM
Number of lower case letters: 1
Number of upper case letters: 2
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p3_5.py
Enter a string: WoWoW0ooW0
WoWoW0ooW0
Number of lower case letters: 4
Number of upper case letters: 6
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, using a for loop to iterate over each character in the string and using isupper() and islower() to check the characters and increment the counter variables value by 1 using if elif statement.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 4**

---

**Title: Write a program to Create Employee Class & add methods to get employee details & print.**

**Theory:** A class is a blueprint for objects. It contains attributes and methods which the objects can access and use. An object is an instance of a class. Each class has its own copy of attributes and share the methods of the class.

**Code:**

```
class Employee:  
    __name=""  
    __age=0  
    __salary=0  
    __post=""  
    def setData(self):  
        name=input("Enter employee name: ")  
        self.__name=name  
        age=int(input("Enter age of employee: "))  
        self.__age=age  
        salary=float(input("Enter salary of employee: "))  
        self.__salary=salary  
        post=input("Enter post of employee: ")  
        self.__post=post  
    def getData(self):  
        print("\nEmployee Data:")  
        print("Name:", self.__name)  
        print("Age:", self.__age)  
        print("Salary:", self.__salary)  
        print("Post:", self.__post)  
a=Employee()  
a.setData()  
a.getData()
```

## Output(Screenshot):

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_1.py
Enter employee name: Piyush
Enter age of employee: 21
Enter salary of employee: 1222222
Enter post of employee: manageer

Employee Data:
Name: Piyush
Age: 21
Salary: 1222222.0
Post: manageer
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Test Case: Any two (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_1.py
Enter employee name: Athrav
Enter age of employee: 21
Enter salary of employee: 0
Enter post of employee: postman

Employee Data:
Name: Athrav
Age: 21
Salary: 0.0
Post: postman
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_1.py
Enter employee name: Athrav
Enter age of employee: 21
Enter salary of employee: 0
Enter post of employee: postman

Employee Data:
Name: Athrav
Age: 21
Salary: 0.0
Post: postman
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, using get and set data functions to take values from the user and then assigning the attributes of the object these values and printing them to the user.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 4.2**

---


**Title:** Write a program to take input as name, email & age from user using combination of keywords argument and positional arguments (\*args and \*\*kwargs) using function.

**Theory:** While defining a function, we use \*args and \*\*kwargs as parameters when we don't know how many arguments the user will pass during function call. \*args will take a tuple of positional arguments as parameter and work on it. \*\*kwargs will take a dictionary of keyword arguments as parameter and assign the keys to keywords in arguments and the values as the values passed by the user in the arguments.

**Code:**

```
def kbfunction(*args, **kwargs):
    for i in args:
        print("Name:", i)
    for i in kwargs:
        print(i, ":", kwargs[i])
b=input("Enter your name: ")
c=int(input("Enter your age: "))
a=input("Enter your email: ")
kbfunction(b, age=c, email=a)
```

**Output(Screenshot):**

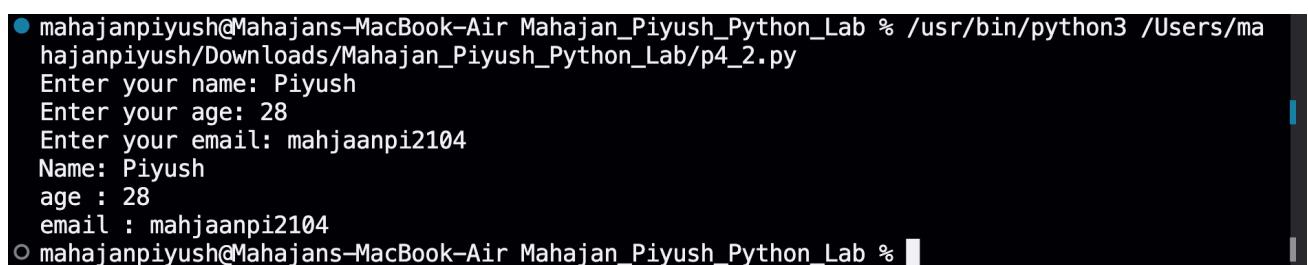

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_2.py
Enter your name: Piyush
Enter your age: 28
Enter your email: mahjaanpi2104
Name: Piyush
age : 28
email : mahjaanpi2104
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Test Case: Any two (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_2.py
Enter your name: Patil
Enter your age: 80
Enter your email: ishfbjsgfh
Name: Patil
age : 80
email : ishfbjsgfh
○ mahaiannivush@Mahaians-MacBook-Air Mahajan_Piyush_Python_Lab %

● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_2.py
Enter your name: Patil
Enter your age: 80
Enter your email: ishfbjsgfh
Name: Patil
age : 80
email : ishfbjsgfh
○ mahaiannivush@Mahaians-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, using dynamic argument passing(\*args and \*\*kwargs) to take multiple arguments from the user in a combination of positional and keyword arguments and printing them using a user defined function.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 4.3**

---

**Title: Write a program to admit the students in the different Departments(pgdm/btech) and count the students. (Class, Object and Constructor).**

**Theory:** A constructor is automatically called when an object is created for a class. It is defined by `__init__(self)`. It is used to initialise all the attributes of a class and `self` is a pointer which is used to tell the program to make changes only in a particular object and not access data or modify other objects.

**Code:**

```
class ITM:
    count=0
    bcount=0
    pcount=0
    def __init__(self):
        self.count=0
        self.bcount=0
        self.pcount=0
    def getData(self):
        a=input("Enter student name: ")
        b=int(input("Enter age: "))
        c=input("Enter address: ")
        d=int(input("Select department(1/2):\n1.BTECH\n2.PGDM\n"))
        while not(d==1 or d==2):
            print("Invalid choice\n")
            d=int(input("Select department(1/2):\n1.BTECH\n2.PGDM\n"))
        if d==1:
            self.dep="BTECH"
            ITM.bcount+=1
        elif d==2:
            self.dep="PGDM"
            ITM.pcount+=1
        self.name=a
        self.age=b
        self.address=c
        ITM.count+=1
    def setData(self):
```

```


print("Student Details:\n")
print("Name:", self.name)
print("\nAge:", self.age)
print("\nAddress:", self.address)
print("\nDepartment:", self.dep)
a=int(input("Welcome to ITM. Press:\n1.Enter Student Data\n2.Number of admissions\n3.Display students data\n4.Exit\n"))
objs=list()
while a!=4:
    if a==1:
        d=int(input("Enter number of students: "))
        for i in range(d):
            objs.append(ITM())
        for i in range(d):
            objs[i].getData()
        a=int(input("\nPress\n1.Enter another data\n2.Number of admissions\n3.Display student details\n4.Exit\n"))
    elif a==2:
        b=int(input("Press\n1.BTECH admissions\n2.PGDM admissions\n"))
        while not (b==1 or b==2):
            print("Invalid choice\n")
            b=int(input("Press\n1.BTECH admissions\n2.PGDM admissions\n"))
        if b==1:
            print("Admissions of BTECH Done:",ITM.bcount)
            print("Total admissions:",ITM.count)
            a=int(input("\nPress\n1.Enter student data\n2.Number of admissions\n3.Display student details\n4.Exit\n"))
        elif b==2:
            print("Admissions of PGDM Done:",ITM.pcount)
            print("Total admissions:",ITM.count)
            a=int(input("\nPress\n1.Enter student data\n2.Number of admissions\n3.Display student details\n4.Exit\n"))
    elif a==3:
        b=int(input("\nPress\n1.For BTECH students data\n2.For PGDM students data\n"))
        if b==1:
            for i in range(d):
                if objs[i].dep=="BTECH":
                    objs[i].setData()
            a=int(input("\nPress\n1.Enter student data\n2.Number of admissions\n3.Display student details\n4.Exit\n"))
        elif b==2:
            for i in range(d):
                if objs[i].dep=="PGDM":
                    objs[i].setData()
            a=int(input("\nPress\n1.Enter student data\n2.Number of admissions\n3.Display student details\n4.Exit\n"))

```

```

        else:
            print("Invalid choice")
            a=int(input("\nPress\n1.Enter student data\n2.Number of
admissions\n3.Display student details\n4.Exit\n"))
        elif a==4:
            break
        else:
            print("Invalid choice")
            break
    
```

### Output(Screenshot):

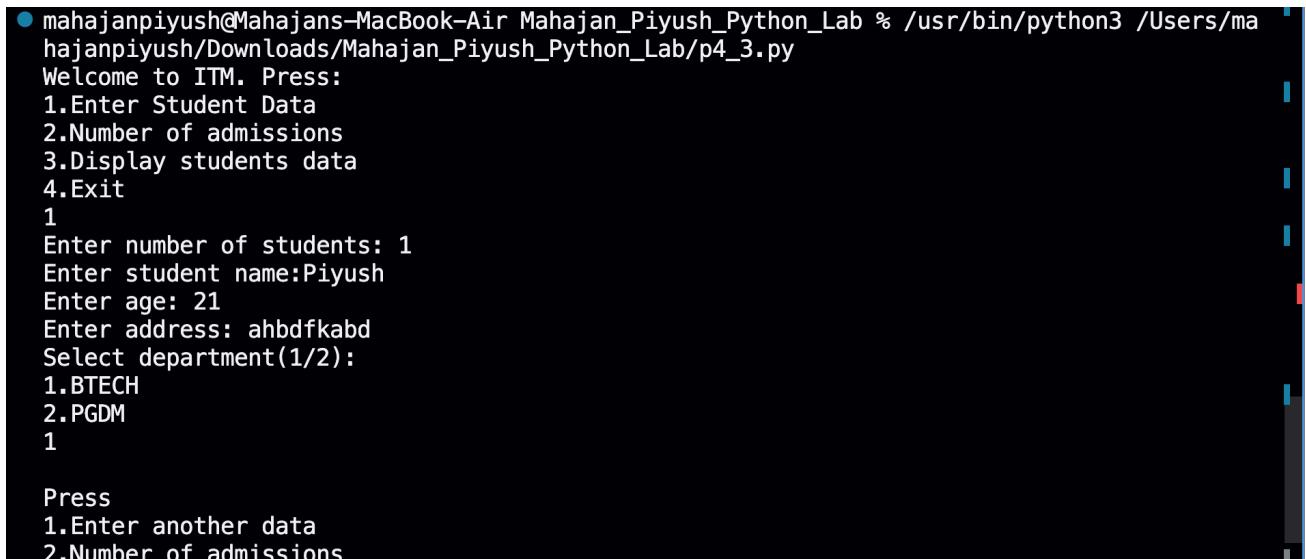

```

mahajanpiyush@Mahajan-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_3.py
Welcome to ITM. Press:
1.Enter Student Data
2.Number of admissions
3.Display students data
4.Exit
1
Enter number of students: 1
Enter student name:Piyush
Enter age: 21
Enter address: ahbdfkabd
Select department(1/2):
1.BTECH
2.PGDM
1

Press
1.Enter another data
2.Number of admissions

```

**Conclusion:** Hence, using constructors and get and set functions and using while loop to print a menu to the user and call functions as per the user's need and making a list of objects to store information of multiple students of different branches.

**Name of Student:** Mahajan Piyush Dnyaneshwar

**Roll Number:** 35

**Experiment No:** 4.4

---

**Title:** Write a program that has a class store which keeps the record of code and price of product display the menu of all product and prompt to enter the quantity of each item required and finally generate the bill and display the total amount.

**Theory:** Using constructor to print a menu of items to the user and getting quantity of the product and printing the bill with total amount at the end.

**Code:**

```
class Store:  
    __itemCode=0  
    __price=0  
    __total=0  
    product=[]  
    quantity=[]  
    price=[]  
    def __init__(self):  
        print("Welcome to ABC Store!")  
        while True:  
            a=int(input("Select a product:  
\n1.Sap\n2.Toothbrush\n3.Toothpaste\n4.Comb\n5.Book\n"))  
            c=("Soap","Toothbrush","Toothpaste","Comb","Book")  
            if a==1:  
                self.__itemCode=1  
                self.__price=50  
            elif a==2:  
                self.__itemCode=2  
                self.__price=100  
            elif a==3:  
                self.__itemCode=3  
                self.__price=200  
            elif a==4:  
                self.__itemCode=4  
                self.__price=150  
            elif a==5:
```

```

        self.__itemCode=5
        self.__price=500
print("Product:",c[a-1],"\\nPrice:",self.__price)
self.product.append(c[a-1])
self.price.append(self.__price)
b=int(input("Enter the quantity: "))
while b<=0:
    print("Invalid quantity")
    b=int(input("Enter the quantity: "))
self.quantity.append(b)
self.__total+=self.__price*b
print("Total:",self.__total)
d=input("Do you want to add more items?(y/n): ")
if d.lower()=='n':
    break
print("\t\tBill\\n\\nProduct\t\tPrice\t\tQuantity")
for i in range(len(self.product)):

print(self.product[i],"\t\t",self.price[i],"\t\t",self.quantity[i],
      "")
      print("Total:",self.__total)
obj=Store()

```

### Output(Screenshot):

```

mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_4.py
Welcome to ABC Store!
Select a product:
1.Sap
2.Toothbrush
3.Toothpaste
4.Comb
5.Book
1
Product: Sap
Price: 50
Enter the quantity: 1
Total: 50
Do you want to add more items?(y/n): n
Bill

Product      Price      Quantity
Soap          50           1
Total: 50

```

### Test Case: Any two (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_4.py
Welcome to ABC Store!
Select a product:
1.Soap
2.Toothbrush
3.Toothpaste
4.Comb
5.Book
4
Product: Comb
Price: 150
Enter the quantity: 2
Total: 300
Do you want to add more items?(y/n): n
Bill

Product      Price      Quantity
Comb          150           2
Total: 300
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_4.py
Welcome to ABC Store!
Select a product:
1.Soap
2.Toothbrush
3.Toothpaste
4.Comb
5.Book
5
Product: Book
Price: 500
Enter the quantity: 12
Total: 6000
Do you want to add more items?(y/n): n
Bill

Product      Price      Quantity
Book          500           12
Total: 6000
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion: Hence, using constructor, printing a bill with total amount at the end.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 4.5**

---

**Title: Write a program to take input from user for addition of two numbers using (single inheritance).**


**Theory:**

**Single inheritance is when there is a single parent class and a single child class which inherits the attributes and methods of the parent class. It reduces lines of code as instead of writing the same attributes and methods again in a new class, we can simply inherit them.**

**Code:**


```
class Addition:  
    def add(a,b):  
        print("Sum:",a+b)  
class Numbers(Addition):  
    def getNumbers(self):  
        c=float(input("Enter a number: "))  
        d=float(input("Enter another number: "))  
        Addition.add(c,d)  
e=Numbers()  
e.getNumbers()
```

**Output(Screenshot):**

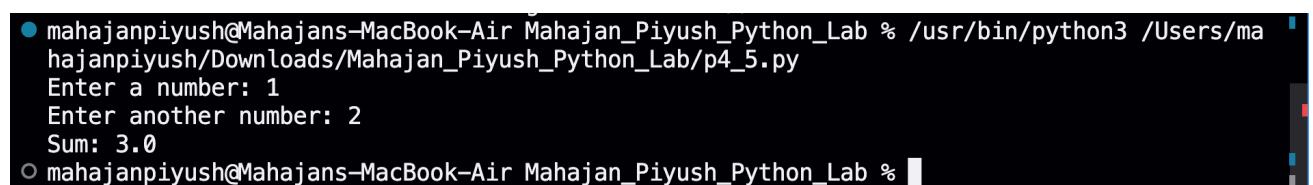

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_5.py  
Enter a number: 1  
Enter another number: 2  
Sum: 3.0
```

**Test Case: Any two (screenshot)**

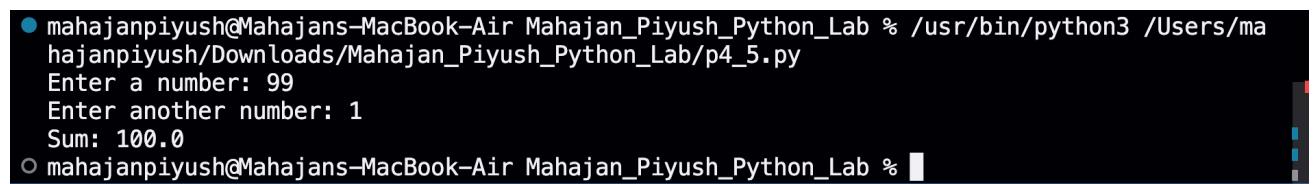

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_5.py  
Enter a number: 99  
Enter another number: 1  
Sum: 100.0
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_5.py
Enter a number: 999
Enter another number: 1
Sum: 1000.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, using single inheritance to take values from the user from method of child class and adding and printing the sum from method of parent class.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 4.6**

---

**Title: Write a program to create two base classes LU and ITM and one derived class. (Multiple inheritance).**

**Theory: Multiple inheritance is when a single child class inherits methods and attributes from multiple parent classes.**

**Code:**

```
class LU:
    subjects=["AI/ML","AR/VR","Cloud Computing","Full Stack Developer"]
    teachers=["Sai Sir","Swapnil Sir","ABC","XYZ"]
    duration=["60 days","30 days","50 days","55 days"]
class ITM:
    subjects=["Hotel management","BTECH CSE","Design","Business"]
    teachers=["abc","Sumit sir","xyz","qwer"]
    duration=["90 days","120 days","60 days","30 days"]
class Btech(LU,ITM):
    print("LetsUpgrade courses are:\n")
    a=LU.subjects
    j=1
    for i in range(len(a)):

print(j,LU.subjects[i],"by",LU.teachers[i],"for",LU.duration[i])
    j+=1
    c=[]
    d=int(input("How many subjects you want to select: "))
    if d>4:
        print("Invalid number of subjects")
    else:
        for i in range(d):
            e=int(input("Select your interested course: "))
            c.append(e)
    print("\nITM courses are:\n")
    j=1
    b=ITM.subjects
    for i in range(len(b)):
```

```

print(j,ITM.subjects[i],"by",ITM.teachers[i],"for",ITM.duration[i])
    j+=1
f=[]
d=int(input("How many subjects you want to select: "))
if d>4:
    print("Invalid number of subjects")
else:
    for i in range(d):
        e=int(input("Select your interested course: "))
        f.append(e)
j=1
print("\nYour selected courses are:\n")
for i in c:

print(j,LU.subjects[i-1],"by",LU.teachers[i-1],"for",LU.duration[i-1])
    j+=1
for i in f:

print(j,ITM.subjects[i-1],"by",ITM.teachers[i-1],"for",ITM.duration[i-1])
    j+=1
obj=Btech()

```

## Output(Screenshot):

```

hajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_6.py
LetsUpgrade courses are:

1 AI/ML by Sai Sir for 60 days
2 AR/VR by Swapnil Sir for 30 days
3 Cloud Computing by ABC for 50 days
4 Full Stack Developer by XYZ for 55 days
How many subjects you want to select: 1
Select your interested course: 2

ITM courses are:

1 Hotel management by abc for 90 days
2 BTECH CSE by Sumit sir for 120 days
3 Design by xyz for 60 days
4 Business by qwer for 30 days
How many subjects you want to select: 1
Select your interested course: 1

Your selected courses are:

1 AR/VR by Swapnil Sir for 30 days
2 Hotel management by abc for 90 days

```

## Test Case: Any two (screenshot)

```
LetsUpgrade courses are:
```

```
1 AI/ML by Sai Sir for 60 days
2 AR/VR by Swapnil Sir for 30 days
3 Cloud Computing by ABC for 50 days
4 Full Stack Developer by XYZ for 55 days
How many subjects you want to select: 1
Select your interested course: 1
```

```
ITM courses are:
```

```
1 Hotel management by abc for 90 days
2 BTECH CSE by Sumit sir for 120 days
3 Design by xyz for 60 days
4 Business by qwer for 30 days
How many subjects you want to select: 1
Select your interested course: 1
```

```
Your selected courses are:
```

```
1 AI/ML by Sai Sir for 60 days
2 Hotel management by abc for 90 days
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
hajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_6.py
```

```
LetsUpgrade courses are:
```

```
1 AI/ML by Sai Sir for 60 days
2 AR/VR by Swapnil Sir for 30 days
3 Cloud Computing by ABC for 50 days
4 Full Stack Developer by XYZ for 55 days
How many subjects you want to select: 1
Select your interested course: 2
```

```
ITM courses are:
```

```
1 Hotel management by abc for 90 days
2 BTECH CSE by Sumit sir for 120 days
3 Design by xyz for 60 days
4 Business by qwer for 30 days
How many subjects you want to select: 1
Select your interested course: 1
```

```
Your selected courses are:
```

```
1 AR/VR by Swapnil Sir for 30 days
2 Hotel management by abc for 90 days
```

## Conclusion:

Hence, using multiple inheritance to show courses from multiple classes(LU and ITM) and print courses and their details which the user chooses.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 4.7**

---

**Title: Write a program to implement Multilevel inheritance, Grandfather->Father->Child to show property inheritance from grandfather to child.**

**Theory:** Multilevel inheritance is when there is a parent class which has a child class which in turn has a child class of its own. The last child class inherits all the methods and attributes from its parent class as well as from the grandfather class.

**Code:**

```
class Grandfather:
    def __init__(self):
        self.name="ABC"
        self.inherit=10000
        self.purchase=1000
class Father(Grandfather):
    def __init__(self):
        super().__init__()
        self.name=" XYZ "+self.name
        self.inherit=self.inherit
        self.purchase=10000+self.purchase
class Child(Father):
    def __init__(self,name):
        super().__init__()
        self.name=name+self.name
        self.inherit=self.inherit
        self.purchase=self.purchase
        print("Hello",self.name)
        print("Inherited property: Rs",self.inherit)
        print("Purchased property: Rs",self.purchase)
        print("Total property:",self.inherit+self.purchase)
a=input("Enter your name: ")
obj=Child(a)
```

**Output(Screenshot):**

```
mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_7.py
Enter your name: Piyush
Hello Piyush XYZ ABC
Inherited property: Rs 10000
Purchased property: Rs 11000
Total property: 21000
```

## **Conclusion:**

**Hence, using multilevel inheritance to take name from the user and calculate inherited and purchased property from grandfather and father for the child and their full name using methods and attributes from the grandfather and father class.**

**Name of Student:** Mahajan Piyush Dnyaneshwar

**Roll Number:** 35

**Experiment No:** 4.8

---

**Title:** Write a program Design the Library catalogue system using inheritance take base class (library item) and derived class (Book, DVD & Journal) Each derived class should have unique attribute and methods and system should support Check in and check out the system. (Using Inheritance and Method overriding)

**Theory:** Method overriding is when there is a method of same name in both base class and derived class and when an object is created of derived class and method is called, derived class object is called and base class method is overridden.

**Code:**

```
class Library_item:
    _bookCount=0
    _dvdCount=0
    _journalCount=0
    quantity=[]
    cart=[]
class Book(Library_item):
    def __init__(self):
        super().__init__()
    def check_out_book(self):
        d=int(input("How many books you want to select?: "))
        if d>4:
            print("Invalid choice")
        else:
            for i in range(d):
                c=int(input("Select a book: "))
                f=int(input("Enter quantity: "))
                Library_item.quantity.append(f)
                self.cart.append(a[c-1])
                Library_item._bookCount+=1
            print(self.cart)
            print("Books selected:",Library_item._bookCount)
```

```

        a=["C programming by Ritchie-Cunningham","C++ by
Balaguruswamy","R.D. Sharma","Class 12 CS by NCERT"]
        b=1
        for i in range(len(a)):
            print(b,a[i])
            b+=1
        check_out_book(self)
class Dvd(Library_item):
    def __init__(self):
        super().__init__()
    def check_out_dvd(self):
        d=int(input("How many DVD's you want to select?: "))
        for i in range(d):
            if d>4:
                print("Invalid choice")
            else:
                c=int(input("Select a DVD: "))
                f=int(input("Enter quantity: "))
                Library_item.quantity.append(f)
                self.cart.append(a[c-1])
                Library_item._dvdCount+=1
        print(self.cart)
        print("DVDs selected:",Library_item._dvdCount)
a=["Avengers","Justice League","Conjuring","ABC"]
b=1
for i in range(len(a)):
    print(b,a[i])
    b+=1
    check_out_dvd(self)
class Journal(Library_item):
    def __init__(self):
        super().__init__()
    def check_out_journal(self):
        d=int(input("How many Journal you want to select?: "))
        if d>4:
            print("Invalid choice")
        else:
            for i in range(d):
                c=int(input("Select a journal: "))
                f=int(input("Enter quantity: "))
                Library_item.quantity.append(f)
                self.cart.append(a[c-1])
                Library_item._journalCount+=1
            print(self.cart)
            print("Journals
selected:",Library_item._journalCount)
            a=["A Journal","XYZ Journal","ABC Journal","QWERTY
Journal"]
            b=1

```

```

        for i in range(len(a)):
            print(b,a[i])
            b+=1
    check_out_journal(self)
class Checkout(Library_item):
    def __init__(self):
        super().__init__()
        print("\nCheckout")
        j=1
        for i in range(len(self.cart)):
            print(j,self.cart[i],"-",self.quantity[i])
            j+=1
        print("\nBooks selected:",self._bookCount)
        print("Journals selected:",self._journalCount)
        print("DVDs selected:",self._dvdCount)

print("Total:",self._bookCount+self._journalCount+self._dvdCount)
objs=list()
print("Welcome to ABC Library!")
for i in range(100):
    a=int(input("\nPress:\n1.Book Catalogue\n2.DVD
Catalogue\n3.Journal Catalogue\n4.Checkout\n5.Exit\n"))
    if a==1:
        objs.append(Book())
    elif a==2:
        objs.append(Dvd())
    elif a==3:
        objs.append(Journal())
    elif a==4:
        objs.append(Checkout())
    elif a==5:
        print("Thank You!")
        break
    else:
        print("Invalid choice")
        break

```

## Output(Screenshot):

```
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_8.py
Welcome to ABC Library!

Press:
1.Book Catalogue
2.DVD Catalogue
3.Journal Catalogue
4.Checkout
5.Exit
1
1 C programming by Ritchie-Cunningham
2 C++ by Balaguruswamy
3 R.D. Sharma
4 Class 12 CS by NCERT
How many books you want to select?: 1
Select a book: 1
Enter quantity: 1
['C programming by Ritchie-Cunningham']
Books selected: 1

Press:
1.Book Catalogue
2.DVD Catalogue
3.Journal Catalogue
4.Checkout
5.Exit
4

Checkout
1 C programming by Ritchie-Cunningham - 1
```

## Test Case: Any two (screenshot)

```
1
1 C programming by Ritchie-Cunningham
2 C++ by Balaguruswamy
3 R.D. Sharma
4 Class 12 CS by NCERT
How many books you want to select?: 1
Select a book: 2
Enter quantity: 3
['C programming by Ritchie-Cunningham', 'C++ by Balaguruswamy']
Books selected: 2

Press:
1.Book Catalogue
2.DVD Catalogue
3.Journal Catalogue
4.Checkout
5.Exit
4

Checkout
1 C programming by Ritchie-Cunningham - 1
2 C++ by Balaguruswamy - 3

Books selected: 2
Journals selected: 0
DVDs selected: 0
Total: 2
```

```
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p4_8.py
Welcome to ABC Library!

Press:
1.Book Catalogue
2.DVD Catalogue
3.Journal Catalogue
4.Checkout
5.Exit
1
1 C programming by Ritchie-Cunningham
2 C++ by Balaguruswamy
3 R.D. Sharma
4 Class 12 CS by NCERT
How many books you want to select?: 1
Select a book: 1
Enter quantity: 1
['C programming by Ritchie-Cunningham']
Books selected: 1

Press:
1.Book Catalogue
2.DVD Catalogue
3.Journal Catalogue
4.Checkout
5.Exit
4

Checkout
1 C programming by Ritchie-Cunningham - 1
```

**Conclusion:** Hence, using single inheritance and method overriding, made a library catalogue system having checkout system for books, movies, and journals.

**Name of Student:** Mahajan Piyush Dnyaneshwar

**Roll Number:** 35

**Experiment No:** 5.1

---


**Title:** Write a program to create my\_module for addition of two numbers and import it in main script.

**Theory:** Module is a collection of functions. Its functions can be used in another program by importing the module.

## Code:


```
import my_module
a=my_module.Addition()
b=float(input("Enter a number: "))
c=float(input("Enter another number: "))
a.add(b,c)
```

## Output(Screenshot):

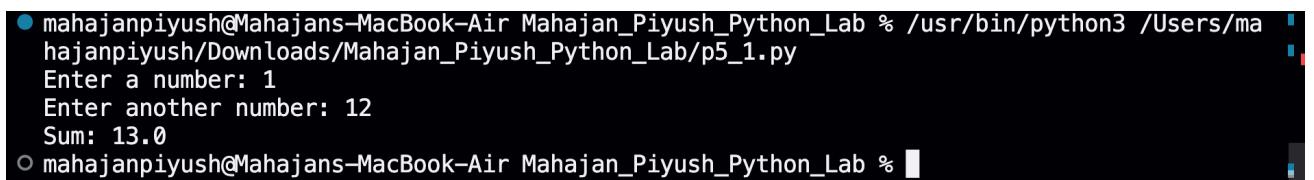


```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p5_1.py
Enter a number: 1
Enter another number: 12
Sum: 13.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Test Case: Any two (Screenshot)

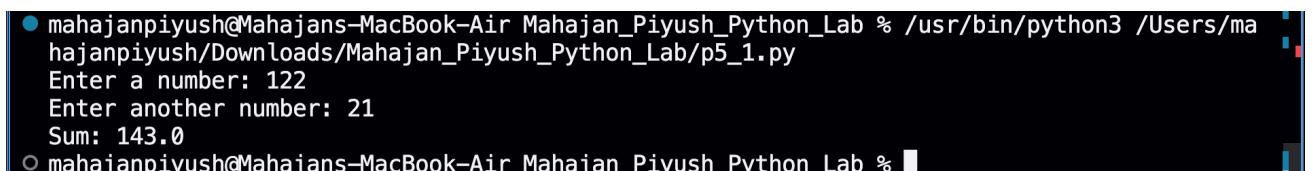

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p5_1.py
Enter a number: 122
Enter another number: 21
Sum: 143.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

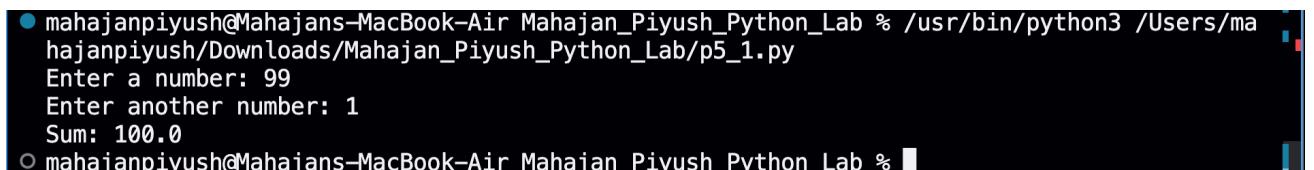

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p5_1.py
Enter a number: 99
Enter another number: 1
Sum: 100.0
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion: Hence, creating a module for addition of two values given by the user and printing it by importing the module in main program.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 5.2**

---

**Title: Write a program to create the Bank Module to perform the operations such as check the Balance, withdraw and deposit the money in bank account and import the module in main file.**

**Theory:**

**Code:**

```
from bank_module import ATM
b=ATM()
while True:
    a=int(input("Press 1 to deposit\nPress 2 to withdraw\nPress 3
to check balance\nPress 4 to Exit\n"))
    if a==1:
        b.deposit()
    elif a==2:
        b.withdraw()
    elif a==3:
        b.check()
    elif a==4:
        print("Thank You")
        break
    else:
        print("Invalid choice\n")
```

## Output(Screenshot):

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p5_2.py
Welcome to ABC Bank
Enter your PIN: 213
Enter your name: Piyush
Press 1 to deposit
Press 2 to withdraw
Press 3 to check balance
Press 4 to Exit
1
Enter amount to deposit: 2110
Successfully deposited Rs 2110.0 cash

Press 1 to deposit
Press 2 to withdraw
Press 3 to check balance
Press 4 to Exit
3
Balance: Rs 52110.0
Your Account Number XXXXXXXX213

Press 1 to deposit
Press 2 to withdraw
Press 3 to check balance
Press 4 to Exit
4
Thank You
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## Test Case: Any two (screenshot)

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p5_2.py
Welcome to ABC Bank
Enter your PIN: 21021
Enter your name: hjdbahjd
Press 1 to deposit
Press 2 to withdraw
Press 3 to check balance
Press 4 to Exit
4
Thank You
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p5_2.py
Welcome to ABC Bank
Enter your PIN: 21212
Enter your name: kio
Press 1 to deposit
Press 2 to withdraw
Press 3 to check balance
Press 4 to Exit
1
Enter amount to deposit: 3131
Successfully deposited Rs 3131.0 cash

Press 1 to deposit
Press 2 to withdraw
Press 3 to check balance
Press 4 to Exit
2
Enter amount to withdraw: 1212
Successfully withdrew Rs 1212.0 cash

Press 1 to deposit
Press 2 to withdraw
Press 3 to check balance
Press 4 to Exit
3
Balance: Rs 51919.0
Your Account Number XXXXXXXX21212

Press 1 to deposit
Press 2 to withdraw
Press 3 to check balance
Press 4 to Exit
4
Thank You
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, creating a module for bank ATM with functions for deposit, withdraw, and checking bank balance and asking the user for deposit, withdraw or check bank balance and calling the user specified function using while loop.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 5.3**

---

**Title: Write a program to create a package with name cars and add different modules (such as BMW, AUDI, NISSAN) having classes and functionality and import them in main file cars.**

**Theory:** A package is a collection of modules. It is a folder containing modules and `__init__.py` file to let python treat the folder as a package. Each module has methods for drive and start engine.

**Code:**

```
from cars.bmw import BMW
from cars.audi import Audi
from cars.nissan import Nissan

bmw_car = BMW(model="X5")
bmw_car.start_engine()
bmw_car.drive()
print()
audi_car = Audi(model="A4")
audi_car.start_engine()
audi_car.drive()
print()
nissan_car = Nissan(model="Altima")
nissan_car.start_engine()
nissan_car.drive()
```

**Output(Screenshot):**

The terminal window shows the command `python3 p5_3.py` being run, followed by the execution of three print statements from the code. The first statement prints the message "BMW X5 engine started. Driving the BMW X5.", the second prints "Audi A4 engine started. Driving the Audi A4.", and the third prints "Nissan Altima engine started. Driving the Nissan Altima." The terminal prompt at the bottom right indicates the session is still active.

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p5_3.py
BMW X5 engine started.
Driving the BMW X5.

Audi A4 engine started.
Driving the Audi A4.

Nissan Altima engine started.
Driving the Nissan Altima.
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

## **Conclusion:**

Hence, creating a package containing modules for different car models, with each module containing methods for each car model.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 6**

---

**Title: Write a program to implement Multithreading. Printing “Hello” with one thread & printing “Hi” with another thread.**

**Theory:** Multithreading is used for multitasking as multiple processes are run in parallel at the same time. Each process is given a thread to run on and all the threads are joined together to create a main thread at the end of execution. Sleep is a function in time module which is used to suspend the execution of a thread for a specified number of seconds.

**Code:**

```
from threading import Thread  
from time import sleep  
def hi():
```

```
for i in range(10):
    print("Hi")
    sleep(0.5)

def hello():
    for i in range(10):
        print("Hello")
        sleep(0.5)

t1=Thread(target=hi)
t2=Thread(target=hello)
t1.start()
t2.start()
t1.join()
t2.join()
print("End of execution")
```

## **Output(Screenshot):**

```
● mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab % /usr/bin/python3 /Users/mahajanpiyush/Downloads/Mahajan_Piyush_Python_Lab/p6.py
Hi
Hello
End of execution
○ mahajanpiyush@Mahajans-MacBook-Air Mahajan_Piyush_Python_Lab %
```

**Conclusion:** Hence, by using multithreading module in python to run multiple processes at once in parallel with each process getting their own threads to run on and joining them all at the end of execution of program. Also using sleep function from time module to let the processes on the threads run after a specified interval of time.

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 7.1**

---

**Title: Write a program to use ‘weather API’ and print temperature of any city, also print the sunrise and sunset times for the same humidity of that area.**

**Theory:**

**Requests module is used to connect a website with our program and an API key is required to get information from any website. API key is used for authentication of a user for getting any information from a website. Datetime module is used to convert Unix Epoch time to IST time for user convenience.**

**Code:**

```
api_key="e8988573483b036cc946ddde037c0de6"
import requests
import datetime
city=input("Enter city: ")
response=requests.get(f"https://api.openweathermap.org/data/2.5/weather?q={city}&APPID={api_key}&units=Metric")
a=response.json()
if 'message' in a:
    print("City not Found!")
else:
    print("\nCity:",city)
    print("Temperature:",a['main']['temp'], "C")
    print("Humidity:",a['main']['humidity'])
    print("Sunrise(IST):",datetime.datetime.fromtimestamp(a['sys']['sunrise']))
    print("Sunset(IST):",datetime.datetime.fromtimestamp(a['sys']['sunset']))
```

**Output(Screenshot):**



```
Enter city: london
City: london
Temperature: 11.72 C
Humidity: 93
Sunrise(IST): 2023-12-25 13:35:20
Sunset(IST): 2023-12-25 21:25:15
```

## **Test Case: Any two (screenshot)**

```
Enter city: london
City: london
Temperature: 11.72 C
Humidity: 93
Sunrise(IST): 2023-12-25 13:35:20
Sunset(IST): 2023-12-25 21:25:15
```

```
Enter city: mumbai
City: mumbai
Temperature: 28.99 C
Humidity: 42
Sunrise(IST): 2023-12-25 07:08:45
```

## **Conclusion:**

**Hence, using API of openweather to get weather details of user given city and printing the weather details with the help of requests module and date time module to convert Unix epoch time to IST time.**

**Name of Student: Mahajan Piyush Dnyaneshwar**

**Roll Number: 35**

**Experiment No: 7.2**

---

**Title: Write a program to use the ‘API’ of crypto currency.**

**Theory:** Requests module is used to connect a website with our program and an API key is required to get information from any website. API key is used for authentication of a user for getting any information from a website.

**Code:**

```
import requests
api_id="CG-f2wXaQ33YUiT55jWb7AzSgvu"
while True:
    coin=input("Enter cryptocoin: ")
    response = requests.get(f"https://api.coingecko.com/api/v3/
simple/price?ids={coin}&vs_currencies=usd,inr&x_cg_demo_api_key={api_id}")
    a=response.json()
    if coin in a:
        print("\nCrypto:",coin)
        print("Price:",a[coin]['usd'],"USD")
        print("Price:",a[coin]['inr'],"INR")
    else:
        print("Invalid cryptocoin!")
    b=input("Want to see more cryptocurrencies?(y/n): ")
    if b.lower() == "n":
        break
```

**Output(Screenshot):**

```
Enter cryptocoin: ethereum
Crypto: ethereum
Price: 2271.57 USD
Price: 188933 INR
Want to see more cryptocurrencies?(y/n): y
Enter cryptocoin: abc
Invalid cryptocoin!
Want to see more cryptocurrencies?(y/n): n
```

## Test Case: Any two (screenshot)

```
Enter cryptocoins: bitcoin
Crypto: bitcoin
Price: 43481 USD
Price: 3616407 INR
Want to see more cryptocoins?(y/n): n
```

```
Enter cryptocoins: ethereum
Crypto: ethereum
Price: 2271.57 USD
Price: 188933 INR
Want to see more cryptocoins?(y/n): y
Enter cryptocoins: abc
Invalid cryptocoins!
Want to see more cryptocoins?(y/n): n
```

## Conclusion:

Hence, using API of CoinGecko to get price of cryptocurrency given by the user and printing INR and USD price and asking for more crypto till the user chooses the option to terminate the program using while loop.