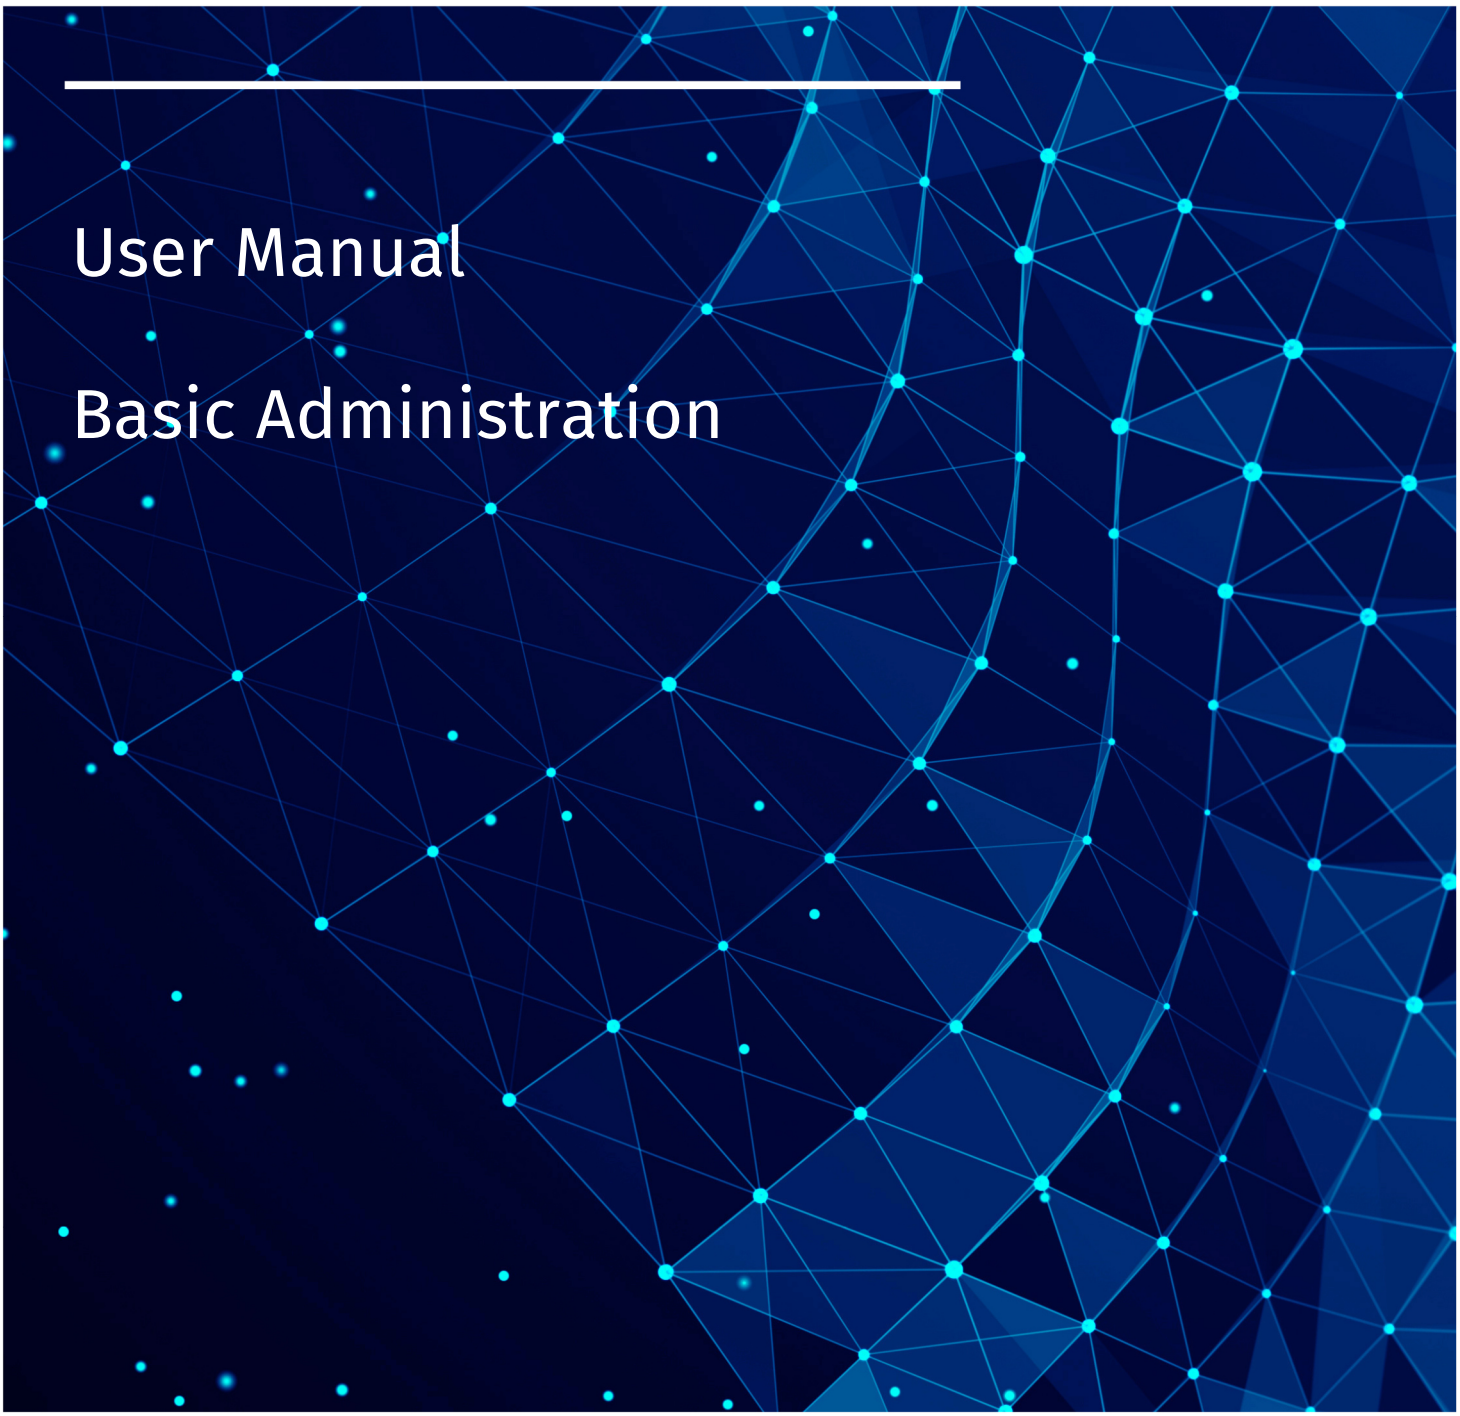


User Manual

Basic Administration

This manual provides an overview of the CCH Tagetik multidimensional data model and shows how users can "organize" the elements of a given dimension.

Version: 5.3.24

Wolters Kluwer

wolterskluwer.com

Latest update: May 2023

Table of contents

The data model 7

Multidimensional data model ... 7
CCH Tagetik dimensions ... 7
Aggregation structures ... 9
How to work with dimensions ... 9
Dimensions page ... 10
New dimensionsettings ... 11
Account dimension settings ... 11
Entity dimension settings ... 12
Category dimension settings ... 13

Dimensions: Entity 15

Entity: basic concepts ... 15
How to work with entities ... 16
Entity elements page ... 19
Entity elements ... 20
How to manage the company dimension with a time dependency ... 23
Time dependent entity elements page ... 23
Time-dependent entity elements ... 25
Copies between original scenarios ... 26
Archive entity data ... 27
Input data for original scenario ... 27
Input data for consolidation scenario ... 27
Control chart page ... 28
Control chart ... 29
Control type page ... 29
Control type ... 31
CTP dynamic groups page ... 31
Counterparty dynamic groups ... 32

Dimensions: Account 35

The Account: basic concepts ... 35
Calculation rules: result accounts ... 37

How to create accounts ... 38
How to work with accounts ... 39
Account elements table page ... 40
Account elements table ... 42
Create Variations, Control groups, Calculation logics ... 48
Create Details, Control groups, Calculation logics ... 50
Recode account page ... 51
Recode account ... 52
Result accounts page ... 52
Result accounts ... 54
Creation of calculation logics to generate result accounts ... 54
Creation of control groups to generate result accounts ... 55

Dimensions: Period 58

Periods: basic concepts ... 58
How to work with periods ... 60
Period list page ... 60
Period list ... 62

Dimensions: Scenario 63

The Scenario: basic concepts ... 63
Original scenario ... 64
Consolidation scenario ... 66
How to work with scenarios ... 67
Scenarios list page ... 68
Scenarios list ... 70
Scenario periods page ... 71
List of scenario periods ... 72
Snapshot scenarios page ... 72
Snapshot scenarios ... 74

Dimensions: Category 75

Category: basic concepts ... 75
How to work with categories ... 77
Categories list page ... 79
Categories list ... 80

Journal models page 81

Dimensions: Currency 85

Currencies: basic concepts 85
How to work with currencies 86
Currencies list page 87
Currencies list 88

Variation/detail types 89

Variation/Detail types: basic concepts 89
How to work with variation/detail types 90
Variation/detail types list page 92
Variation/Detail types list 94

Control groups 97

Control groups: basic concepts 97
How to define control groups 100
How to create different types of control groups 101
How to work with control groups 103
Control groups page 105
Control groups 106
Definition of Set 1 accounts 109
Definition of Set 2 accounts 110
Recode - Control groups page 111
Recode - Control groups attributes 112

Hierarchies 113

Hierarchies: basic concepts 113
How to work with hierarchies 115
Structure and relationships for accounts page 116
Structure and relationships page for entities 118
New hierarchy 119
Node creation 120
Account hierarchies page 120
Account hierarchy attributes 121
Entity hierarchies page 122

Entity hierarchy attributes ... 123

Groupings 124

Groupings ... 124
How to work with groupings ... 125
Scenario - Grouping page ... 126
Scenario - Grouping ... 127
Variation/Detail types Grouping page ... 128
Var. - Det. types grouping ... 130
Control group - Structure and relationships page ... 134
Control groups grouping ... 135
Category - Grouping page ... 138
Categories grouping ... 139

Financial statement templates 141

Financial Statement Templates: basic concepts ... 141
Formulas for financial statement template (FST) items ... 142
How to work with financial statement templates and items ... 144
FST & KPI ... 145
FST & KPI page ... 147
FST items page ... 147
FST items ... 149
Relationships page ... 149
Relationships ... 151

Glossary 152

The data model

Contents

This section covers the following topics:

Multidimensional data model 7
CCH Tagetik dimensions 7
Aggregation structures 9
How to work with dimensions 9
Dimensions page 10
New dimensionsettings 11
Account dimension settings 11
Entity dimension settings 12
Category dimension settings 13

Multidimensional data model

What a data model consists of

Every Tagetik application is based on a multidimensional data model. This is mainly defined by the following dimensions:

- system dimensions
- custom dimensions
- extended dimensions
- analytical dimensions

In turn, the dimensions can be linked and organised into aggregation structures, allowing them to be analysed in a functional way. In Tagetik, there are two types of aggregation structures:

- hierarchies
- groupings

CCH Tagetik dimensions

System dimensions

These dimensions are mandatory and are always present for all data.

Name	Function
Company	This identifies the entities for which the data are collected.
Scenario	This represents the time dimension.

Name	Function
Period	This defines the basic unit of time; this is normally 12 months, but may be customised.
Account	This identifies any measurements or metrics subject to analysis.
Category	This classifies and segments the data and keeps track of how they are generated.
Currency	This manages the currencies of the transactions, financial statements and consolidation processes.

Custom dimensions

These dimensions are known as Custom Dimensions and they are necessary to meet the specific configuration requirements of a business. It is possible to define up to five custom dimensions and, once enabled, they are used in the same way as system dimensions. Once enabled, they are mandatory and are present for all data.

They can be used both in the Financial Layer and in the Analytical Layer.

Extended dimensions

***IMPORTANT**: extended dimensions are still available, but they will be replaced by analytical dimensions.*

These dimensions allow you to increase the level of detail for the data inserted and to use CCH Tagetik like a data warehouse, i.e. to collect and aggregate structured data. These dimensions may only be created if the CCH Tagetik Analytics module is present.

***Note**: these dimensions are not present in the tables of amounts and journals.*

Analytical dimensions

These dimensions are used to manage a large number of elements. An unlimited number of them may be used, but only if the Analytical Workspaces module is enabled.

Custom dimensions

The various custom dimensions are linked to specific financial criteria:

Custom dimension	Description
Custom Dimension 1	Mandatory to manage draft bank budgeting
Custom Dimension 2	This is the only dimension that can be used as a counterparty dimension, other than the Company dimension.
Custom Dimension 3	Mandatory to manage assets when processing asset amortisation/depreciation.
Custom Dimension 5	Mandatory to manage the products of the Production Cost Control module.

Custom attributes

For the various dimensions, the elements table allows for a certain number of predefined attributes. It is possible to create custom attributes to form special classifications, for style formatting, or to meet other specific requirements. During the reporting phase, these allow for information to be displayed that is not otherwise manageable with the default attributes. These attributes may be defined for the following elements:

- company dimension
- account dimension
- custom dimensions
- scenarios
- forms

***Note**: for dimensions and forms, it is possible to manage up to five custom attributes; for scenarios, up to ten.*

Aggregation structures

What aggregation structures are

Tagetik dimension elements may be grouped in different ways, by defining different aggregation structures. These structures have a tree format: the dimension elements are the leaves and the intermediate aggregation elements are the nodes.

In Tagetik, there are two types of aggregation structures: hierarchies and groupings.

Hierarchies relate elements in hierarchical order by creating rigid parent-child relationships, where a child may only be related to one parent. Groupings, on the other hand, create more versatile parent-child relationships, where the same child may be related to several parents.

What aggregation structures are used for

Aggregation structures have different functions:

- They define grouping logics in order to create useful reports. For example, it is possible to create a report by selecting a node, thereby obtaining the data for all the companies related to that node.
- To quickly select a set of elements from a given dimension. By selecting a node, all the related elements are automatically selected.
- To define rules in a dynamic way. All the rules using a node are automatically updated whenever the node aggregation structure is modified.

***IMPORTANT**: the data are not saved on the aggregation structure nodes, but on the dimension elements. To save data on a node, it is necessary to create a dummy element inside it where the data can be saved.*

How to work with dimensions

Concept Information

Multidimensional data model 7

How to create a new dimension

Dimensions > ⊕ > New dimension

This procedure allows you to create both the five custom dimensions and analytical dimensions.

***IMPORTANT**: Only create custom dimensions if you really need them. Once inserted, the new custom dimension will have to be declared for all data entered into the system.*

1. Select the type of dimension to create, and then define all the relative characteristics.
2. Click **OK** to create the new dimension.

How to define the characteristics of the company dimension

Dimensions > Entity > ⋮ > Settings

Set the characteristics of the company dimension, and then click **OK**.

How to define the characteristics of the account dimension

Dimensions > Account > ⋮ > Settings

Set the characteristics of the account dimension, and then click **OK**.

How to define the characteristics of the scenario dimension

Dimensions > Scenario > ⋮ > Settings

Set the characteristics of the scenario dimension, and then click **OK**.

How to define the characteristics of the category dimension

Dimensions > Category > ⋮ > Settings

Set the characteristics of the category dimension, and then click **OK**.

How to define the characteristics of a custom dimension

Dimensions > choose custom dimension > ⋮ > Settings

Set the characteristics of the custom dimension, and then click **OK**.

How to define a custom attribute

Dimensions > choose dimension > ⋮ > Settings

Assign a name to the custom attributes you wish to create.


Dimensions page

Set-up and Administration > Dimensions

Purpose of the page

This page allows you to set all the dimensions provided for by Tagetik and to create new ones, if necessary.

What it looks like

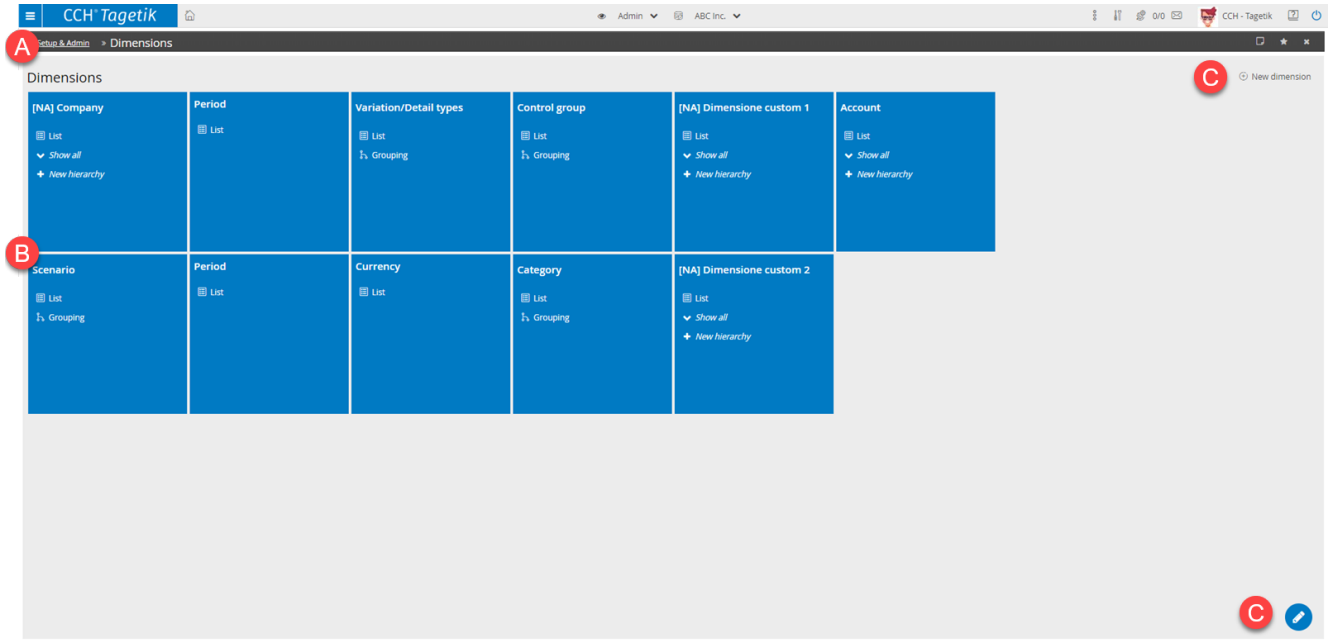

Element	Description
A	Navigation bar
B	List of existing dimensions
C	Action buttons on this page

Action buttons on this page

Element	Description
	This runs certain actions on the specific dimension.
	This adds a new dimension.
	This selects the panes to be shown and allows you to alter their appearance and position. It also allows you to block them so that they cannot be modified by unauthorised users.

New dimensionsettings

Dimensions > ⊕ > New dimension

Field description

Please find below the most important fields.

Field	Description
Type	Type of dimension to be created (custom or analytical)
Analytical dimension label	Label to be attributed to the dimension, if analytical
Default element	
Code/Description	Code and description of the default element generated together with the new dimension
Sorting	
Code	This sorts the elements by code.
Description	This sorts the elements by description.
Custom sorting in hierarchies	This allows you to freely sort the elements in the hierarchy, not necessarily on the basis of the code or description.
CTP dynamic groups management	This allows you to specify certain CTP groups for each combination of accounts and elements of the dimension that you are creating.

Account dimension settings

Dimensions > Account > ⋮ > Settings

Field description

Please find below the most important fields.

Field	Description
Name	Name of the dimension. This may be inserted in any of the languages available.
Accounting class signs	Signs used by the accounting classes (e.g. payables, revenues, costs...) in the reporting forms

Field	Description
Custom sorting in groupings	This allows you to define custom sorting of the nodes and 'child' elements in the structure of the dimension hierarchies.
Separator	Character used as a separator to automatically create variation or detail accounts
Custom attributes	Attributes that can be related to the account dimension (max. 5).

Entity dimension settings

Dimensions > Entity > ⋮ > Settings

Field description

Please find below the most important fields.

Field	Description
Name	Name of the dimension. This may be inserted in any of the languages available.
Time Dependent elements	This enables time-dependent management of the dimension and the relationships between its elements and the reclassification variables.
Multilanguage management	This enables the multi-language management of the description of dimension elements.
Cod.	This sorts the elements included in the reports by code.
Default element	Allows you to define a generic element for the dimension. Until now, in traditional processes, the Entity was always mandatory; this condition does no longer apply in multidimensional processes. In a multidimensional process, when an Entity is omitted, the default element specified here is used. As of today, the definition of the non-mandatory generic element for the entity is used by the reporting in the following cases: • Data entry in a multi-organisation process at a step where the company is not the organisational element • Using a multidimensional form • On a dataset with the Entity dimension • The Entity dimension is omitted in the dataset
Description	This sorts the elements included in the reports by description.
Custom sorting in hierarchies	This allows you to define custom sorting of the nodes and 'child' elements in the structure of the dimension hierarchies.
Entity management by control types	This allows you to define the financial statement templates depending on the type of entity control.
Custom attributes	Attributes that can be related to the Entity dimension (max. 5).

Category dimension settings

Dimensions > Category > ⋮ > Settings

Field description

Please find below the most important fields.

Field	Description
Code	This sorts the elements by code.
Description	This sorts the elements by description.
Custom sorting in hierarchies	This allows you to customise the sorting of the nodes and 'child' elements in the structure of the dimension hierarchies.

Dimensions: Entity

Contents

This section covers the following topics:

Entity: basic concepts 15
How to work with entities 16
Entity elements page 19
Entity elements 20
How to manage the company dimension with a time dependency 23
Time dependent entity elements page 23
Time-dependent entity elements 25
Copies between original scenarios 26
Archive entity data 27
Input data for original scenario 27
Input data for consolidation scenario 27
Control chart page 28
Control chart 29
Control type page 29
Control type 31
CTP dynamic groups page 31
Counterparty dynamic groups 32

Entity: basic concepts

Definition

The entity dimension is the element that guides the data collection process and the approval/submission process. It is normally made up of the legal entity, or company, or of one of its parts. However, in some cases, it may be identified as a different organisational element, such as a cost center, a work order, a division or another element.

Control chart

For each scenario and period, the control chart allows you to specify the type of relationship between pairs of entities. The type of relationship is defined by original scenario, or by consolidation scenario.

Original scenario set-up

The original scenario set-up allows you to define the relationships for a scenario/period and to reclassify the original amounts. It is possible to generate reports on an entity using the original scenario.

In this case, the entity is the one for which the report is being generated.

Consolidation scenario set-up

The consolidation scenario set-up allows you to define the relationships for a consolidation scenario/period and to reclassify the consolidated amounts. Reports on 'consolidation' amounts can be generated using the consolidation scenario.

In this case, the entity is normally the holding for the consolidation in question.

Control types

The control type identifies the relationship between two entities and may therefore be used to differentiate the relationships between an account and the FST items. An account used for reporting to the owned entities can thus be linked to different FST items depending on the defined control type, and on the scenario/period.

Typically, the control types are as follows:

- Parent
- Subsidiary
- Affiliate
- Third party, for entities not belonging to the group

***Note**: for 'third party' control types, the system automatically creates the default type $TERZ.*

Counterparty (CTP) dynamic groups

When declaring intercompany entries, it may be useful to only identify certain entities in the elements table as counterparties. For example, for a bank credits account, it may be useful to only take banking counterparties into consideration. To do this, it is useful to create a CTP dynamic group.

Once the CTP dynamic group has been defined, it is then necessary to relate it to the desired accounts and custom dimension elements.

Time-dependent management of the company dimension

For some projects, especially for banking consolidations, it may be useful to store the company's elements table attributes and the relationships between companies and classifiers, by scenario and period. This means that, over time, the data processing will take into consideration any changes to said relationships.

This type of management must be enabled by the Administrator, via the entity dimension settings.

How to work with entities

Concept Information

CCH Tagetik dimensions 7
Hierarchies: basic concepts 113

How to create an entity

Dimensions > Entity > List

Please find below the basic procedure for creating a new entity.

1. In the entity elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new entity.
3. Set all the characteristics for the entity in the various configuration tabs, then click **Save**: the new entity will be listed in the data table.

How to inherit settings from another entity

Dimensions > Entity > List

This procedure is useful to create a company that is similar to an existing one, as it speeds up the set-up process.

1. In the entity elements table, select the entity to be defined and then click ⋮ > **Relate as similar company**: the relationship window will open.
2. In **Reference Company**, select the entity from which to inherit the settings: all the "inheritable" characteristics for that entity will be displayed.
3. Select the characteristics to be inherited, then click **Run**: the entity selected in the elements table will inherit all the selected characteristics.

How to relate an entity to time-dependent hierarchies

Dimensions > Entity > List

This is useful for managing entities that belong to different nodes and hierarchies at different moments in time.

1. In the entity elements table, select the desired entity and go to the **Relationships** tab, then click **TD hierarchies relationships**: the**TD hierarchies relationships** page will open.
2. Click ⊕: an empty row will be added, allowing you to define a new relationship.
3. In the **Attributes** tab, set the reference scenario, the relationship period and the hierarchy node with which to create the relationship, then click **Save**.

How to relate counterparties to an entity

Dimensions > Entity > List

This is useful when an entity has frequent relations with certain counterparties, and you would like to facilitate data entry.

1. In the entity elements table, select the desired entity and go to the **Counterparties** tab; select a counterparty from those available.
2. Click ⊕ to add other counterparties.

How to create a CTP dynamic group

Dimensions > Entity > ⋮ > CTP dynamic groups

1. In the CTP dynamic groups elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, define the SQL rule that allows you to select the desired counterparties, then click **Save**: the new dynamic group will be listed in the data table.
3. To view a list of all the elements selected by the SQL rule, click**Definition result**.
4. To apply the rule and fill the group, click : a window will open, allowing you to limit the process to a specific scenario and period.
5. Set the desired restrictions and then click **OK**: the group will be filled in.

How to recode an entity

Dimensions > Entity > List

1. In the entity elements table, select the entity whose code needs to be changed.
2. Select > **Recode**: the **Recode - Company Dimension** page will open.
3. Click ⊕: an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the entity.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to relate an entity to a node in a hierarchy

Dimensions > Entity > List

This procedure is useful for creating groupings to which specific rules and configurations may be applied.

1. In the entity elements table, select one or more entities to be related to the same node.
2. In the **Relationships** tab, select the node with which to create the relationship, then click **Save**.

How to define custom dimension restrictions for an entity

Dimensions > Entity > List

For each control group, it is possible to define restrictions, i.e. to exclude data from specific custom dimensions from being collected.

1. In the entity elements table, select the entity for which to create restrictions.
2. In the **Restrictions** tab, set the desired type of restriction for each custom dimension shown.
3. Click **Save**: for custom dimensions for which a restriction has been set, the **Define** command will be displayed together with the ⊗ symbol, indicating that there are elements for which the entity is to be restricted.
4. Click **Define**: the specific page will open allowing you to define the restrictions.
5. Click ⊕ to add an element.
6. In the **Attributes** tab, set whether to include or exclude the element, and select the single custom dimension elements or nodes of a non-time-dependent hierarchy defined for the custom dimension.
7. To enable a hierarchy node, but exclude an element from it, you must first set the node and then the exception on the next line.

   ***IMPORTANT**: The system implements restrictions based on the order in which they are inserted in the definition window. If two restrictions are in conflict, the one implemented last in the sequence will prevail.*

8. Click **Save**.
9. To view a list of all the selected elements, click **Definition result**.

How to set relationships between entities for the control chart

Dimensions > Entity > ⋮ > Control type

This procedure creates relationships between companies so you can then use them in the control chart.

1. In the control types list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert a code and a name for the control type and then click **Save**: the new type of relationship will be listed in the data table.

How to define the relationship between group entities based on the scenario in the control chart

Dimensions > Entity > ⋮ > Control chart

1. In the control chart elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, select the reference scenario and the period for which the relationship is valid.
3. Select the two entities and the control type, then click **Save**: the new relationship will be listed in the data table.

How to generate a report on the entity's custom dimension restrictions

Dimensions > Entity > List

This is useful for creating reports containing information about specific custom dimensions managed for the entities listed.

1. Select 📄 > **Restrictions on custom dimensions report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the filters to define the entities that will be included in the report.
3. In the **Output** section, define how to break down and group information in the report. For each type

of output selected, a dedicated tab will be created in the report.
4. Click **OK**: the requested report will be generated in Excel format.


Entity elements page

Dimensions > Entity > List

Purpose of the page

This page allows you to view all the existing entities and to define new ones.

What it looks like

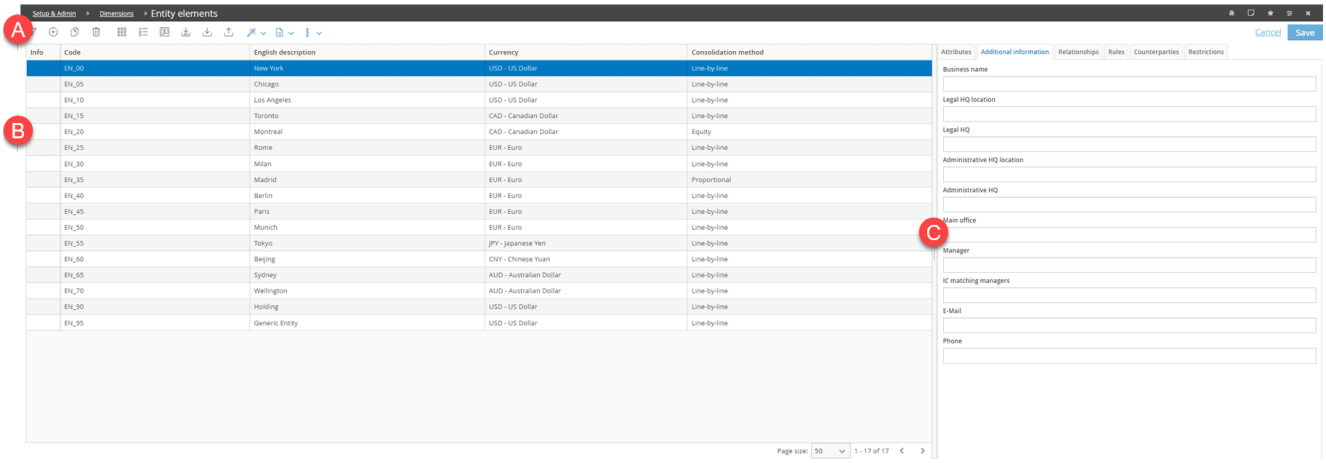

Element	Description
A	Tool bar
B	Entity elements table
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new entity.
	This duplicates an entity with the same characteristics as the one selected, with the exception of the code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.

Element	Description
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
	This shows different ancillary functions. For example, it allows you to access the **Recode** function and to modify the code related to an entity.
	This sets the parameters to generate Excel reports. **Restrictions on custom dimensions report**: this generates reports on the restrictions of the different entities.
	**Relate as similar company**: this allows you to create a new entity, using a number of characteristics from an existing entity.

Entity elements

Dimensions > Entity > List

Attributes tab

Please find below the most important fields.

Field	Description
Currency	Currency used to insert the original data for the entity.
Advanced	
Validity	Validity period for the entity
Sorting	Inserts any custom sorting for the entity dimension in the system reports.

Additional information tab

This tab allows you to insert additional information about the entity that is useful for reporting purposes.

Relationships tab

This tab allows you to create relationships between entities using hierarchies and nodes.

Field	Description
Hierarchy	Hierarchies to which the entity may be related
Node	Node within the specific hierarchy to which the entity may be related
TD hierarchies relationships	Create relationships with time-dependent hierarchies.

Rules tab

This tab allows you to set rules to be applied to the entity.

Please find below the most important fields.

Field	Description	Value
Tax regime	Tax regime used to calculate taxes (direct and deferred).	-
Consolidation		
Consolidation method	The consolidation method used for the entity	Cost Equity Line-by-line Proportional
Deconsolidation method	The deconsolidation method used for the entity	**Do not deconsolidate**: No data is cancelled. **Deconsolidate only initial balances**: only data from carry-forward operations from the previous period are cancelled. **Deconsolidate from previous period**: this keeps the information relative to the company for consolidation purposes in the next period and this is then deconsolidated. **Deconsolidate from current period**: the original scenario data processed as normal and are then deconsolidated.
% consolidation	Percentage of the entity to be consolidated	-
Generate CTP eliminations	This modulates the creation of counterparty eliminations for companies that do not require such entries, based on the consolidation method or by choice.	All elimination logics Exclude IC elimination logics Never
Only CTP	The entity can only be used as a counterparty in intercompany declarations.	-
Only consolidator's data	Only inserts data on the consolidator's categories.	-
Listed	Indicates whether the entity is listed.	-
IC matching	This sets the type of IC matching.	Mandatory Optional Automatic
Use Ref. company in the O.S.R. and Intragroup assets assignment	In the case of sub-companies, this indicates the reference company to be used when the consolidation scope is deployed.	-
Reference entity	Entity used in the deployment step of the entities in the consolidation scope, to calculate the percentages.	-

Field	Description	Value
Taxes and Cash Management		
Run as company	This indicates that the entity is a legal entity.	-
Run as sub-company	This indicates whether notional data processing must be carried out for this entity (e.g. direct taxes, indirect taxes, cash management).	-
Default dimensions for Data Entry		
default <custom dimension>	This is a default element of the custom dimension where financial planning operations are carried out.	-

Counterparties tab

This tab allows you to insert counterparties with whom the entity has frequent dealings; these parties will be auto-suggested in the data entry phase.

Restrictions tab

This tab allows you to set the custom dimensions accepted by the entity.

It is possible to set these restrictions for each enabled custom dimension (cost centers, products, employees etc.).

Restriction	Description
None	All custom dimensions are accepted.
Restricted	It is possible to apply restrictions to the accepted custom dimensions.

Banking data tab

This tab allows you to set the characteristics of the data collected for banking supervision purposes.

Please find below the most important fields.

Field	Description
ABI code	ABI code without check code
Bankit reporting code	This code identifies the entity in bank reporting
Individual data reporting	The entity's original data are included in the statistical reporting to the supervisory authorities as subsystems 14 and 16.
Intragroup reporting	The entity is included in intercompany statistical reporting to the supervisory authorities (item 36381).
Exclude 'Financial investments type' automatic input	The entity is not taken into consideration in the automatic definition of the relationship with the 'Financial investments type' classifier.

How to manage the company dimension with a time dependency

Concept Information

CCH Tagetik dimensions 7
Entity: basic concepts 15
Periods: basic concepts 58
The Scenario: basic concepts 63

How to enable time-dependent management of a company entity

Dimensions > Entity > ⋮ > Settings

***Note**: only users with admin rights can carry out this procedure.*

Select the option **Time-dependent management**.

How to manage a company with a time dependency

Dimensions > Entity > List > ⋮ > Time-dependent entity elements

Dimensions > Entity > Time dependant elements

1. In the time-dependent entity elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, select the desired company and then select the scenario and period to be combined in order to create the time dependency.
3. In the **Advanced** section, set a time interval to limit the duration of the time dependency, if necessary.
4. In the **Rules** tab, set the rules to be applied to the company for which the time dependency is being created, then click **Save**: time-dependency management will be created for the selected company and the scenario-period combination will be set.

Time dependent entity elements page


Dimensions > Entity > List > ⋮ > Time-dependent entity elements

Dimensions > Entity > Time dependant elements

Purpose of the page

This page allows you to view all the time-dependent relationships between the entities that manage this type of relationship and to define new ones. In particular, it allows you to enable the time-dependent management of companies, relating them to scenarios and specific periods.

What it looks like

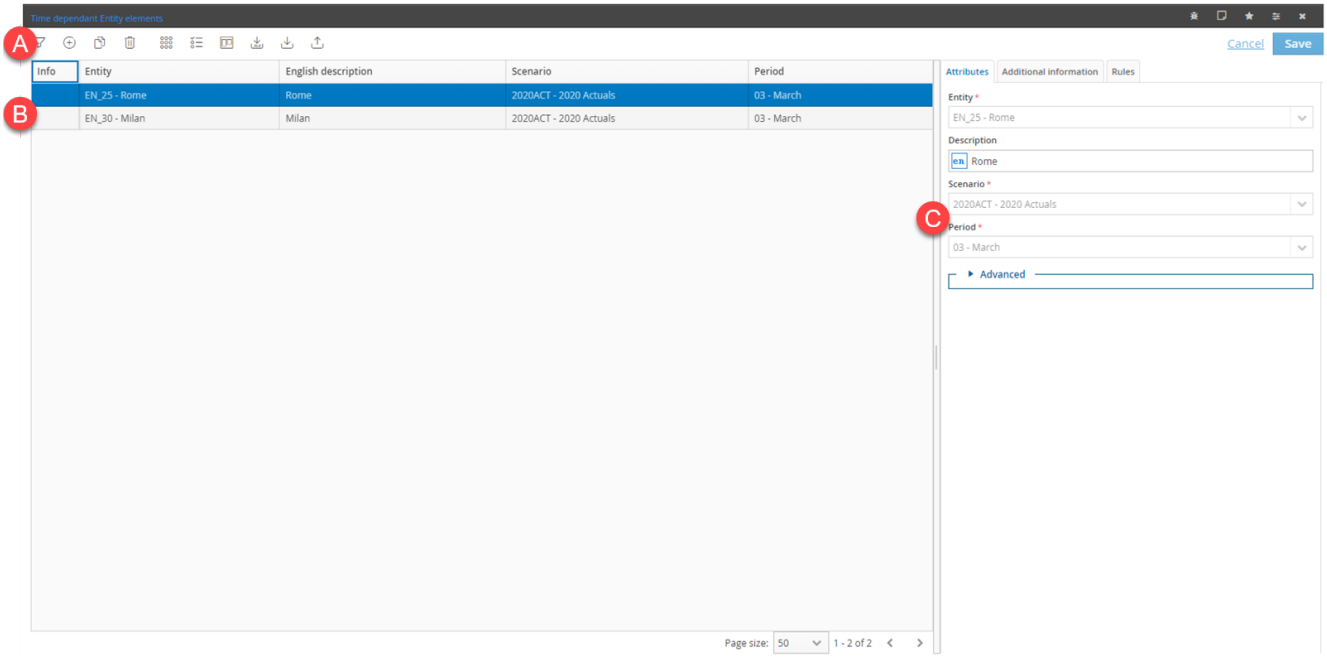

Element	Description
A	Tool bar
B	Time dependent entity elements table
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to relate a company to a scenario and period combination.
	This duplicates the selected row with all the information inserted.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.

Element	Description
	This imports data from a previously prepared Excel file.
	This shows the following ancillary functions: • **Copies between original scenarios**: to copy the values from one original scenario/period to another. • **Archive entity data**: to move an entity's elements attributes in the offline tables. • **Input data for original scenario**: to copy the values of a time-dependent entity onto an original scenario. • **Input data for consolidation scenario**: to copy the values of a time-dependent entity onto a consolidation scenario.

Time-dependent entity elements

Dimensions > Entity > List > ⋮ > Time-dependent entity elements

Dimensions > Entity > Time dependant elements

Attributes tab

Please find below the most important fields.

Field	Description
Scenario	Scenario to which the time dependency is to be applied
Period	Period to which the time dependency is to be applied
Advanced	
Validity	Start date and end of the time dependency

Additional information tab

This tab allows you to insert additional information about the entity, valid for the scenario and period for which the time dependency is created. This information is useful for reporting purposes.

Rules tab

This tab allows you to set the rules to be related to the entity, valid for the scenario and period for which the time dependency is created.

Please find below the most important fields.

Field	Description	Value
Consolidation		
Consolidation method	The consolidation method used for the entity	Cost Equity Line-by-line Proportional

Field	Description	Value
Deconsolidation method	The deconsolidation method used for the entity	**Do not deconsolidate**: No data is cancelled. **Deconsolidate only initial balances**: only data from carry-forward operations from the previous period are cancelled. **Deconsolidate from previous period**: this keeps the information relative to the company for consolidation purposes in the next period and this is then deconsolidated. **Deconsolidate from current period**: the original scenario data are subject to standard data processing and are then deconsolidated.
% consolidation	Percentage of the entity to be consolidated	-
Generate CTP eliminations	This restricts the creation of counterparty eliminations for companies that do not require such entries, based on the consolidation method or by choice.	All elimination logics Exclude IC elimination logics Never
Only CTP	The entity can only be used as a counterparty in intercompany declarations.	-
Only consolidator data	Only inserts data on the consolidator's categories.	-
Listed	Indicates whether the entity is listed.	-
IC matching	This sets the type of IC matching.	Mandatory Optional Automatic

Copies between original scenarios

Dimensions > Entity > Time dependant elements > > Copies between original scenarios

Field description

Please find below the most important fields.

Field	Description
Entity – scenario/period data	This copies the company's elements table attributes from the scenario/period selected.
Entity - TD hierarchy relationships	This copies the entities' relationship with the entity hierarchy nodes for the selected scenario/period, from a source hierarchy.
TD Entity - Classifiers relationships	This copies all the relationships between entities and reclassification variables for the scenario/period selected.

Archive entity data

Dimensions > Entity > Time dependant elements > > Archive entity data

Field description

Please find below the most important fields.

Field	Description
Add only	This only copies the selected values into the offline tables for new companies, without updating existing companies.
Entity elements table	This copies the entity elements for the scenario/period selected.
TD Entity - Classifiers relationships	This copies all the relationships between entities and reclassification variables for the scenario/period selected.
Entity - TD hierarchy relationships	This copies the entities' relationship with entity hierarchy nodes, from a source hierarchy to a target hierarchy, for the scenario/period selected.

Input data for original scenario

Dimensions > Entity > Time dependant elements > > Input data for original scenario

Field description

Please find below the most important fields.

Field	Description
Consolidation method	This copies the consolidation method from the selected scenario to the scenario to fill in.
Financial investment type	This copies the financial investment type from the selected scenario to the scenario to fill in.
Financial statement geographic area	This copies the **Country**/**Geographic area** values relating to the entity to the scenario to fill in.
Listed	This copies the entities' **Listed** status setting to the scenario to fill in.

Input data for consolidation scenario

Dimensions > Entity > Time dependant elements > > Input data for consolidation scenario

Field description

Please find below the most important fields.

Field	Description
Filter	This selects the scenario/period based on a specific criterion: • **Based on the elements to consolidate**: for entities forming part of the elements to consolidate in the scenario/period to fill in. • **Based on the ownership structure register**: for entities forming part of the ownership structure register in the scenario/period to fill in.


Control chart page

Dimensions > Entity > ⋮ > Control chart

Purpose of the page

This page allows you to view and create new relationships between entities and counterparties in specific scenarios and periods.

What it looks like

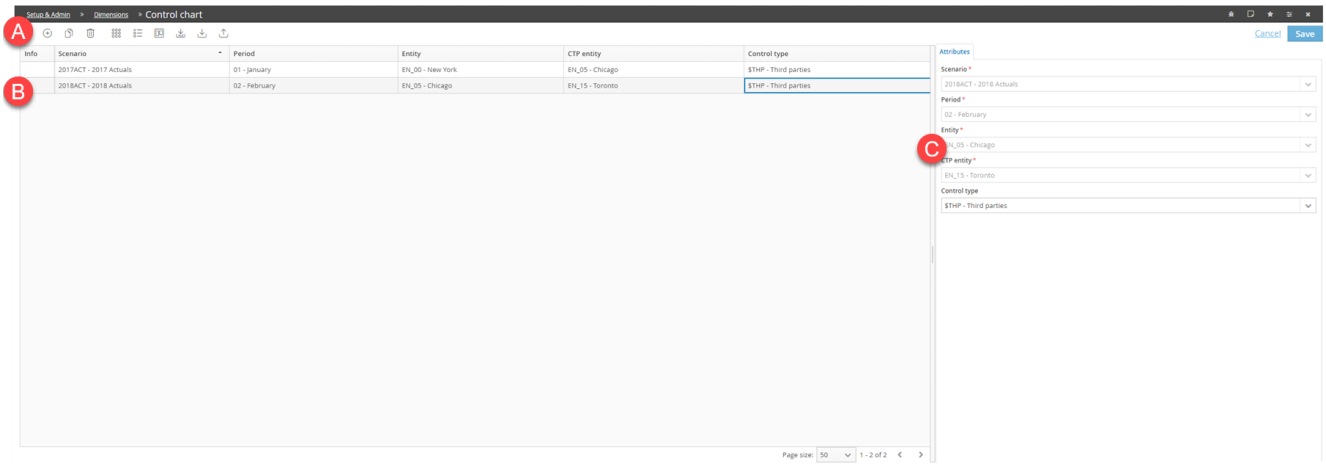

Element	Description
A	Tool bar
B	List of relationships between entities
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new relationship.
	This duplicates the selected row.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
XLS	This exports data in Excel format. This file cannot be re-imported into Tagetik.

Element	Description
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Control chart

Dimensions > Entity > ⋮ > Control chart

Attributes tab

This tab allows you to define the characteristics of the relationship between entities and counterparties. Please find below the most important fields.

Field	Description
Scenario	Scenario for which the relationship is valid
Period	Period belonging to the selected scenario, for which the relationship is valid
Entity	Holding entity or owner entity
CTP entity	Owned entity
Control type	Type of relationship between the owner entity and the owned counterparty


Control type page

Dimensions > Entity > ⋮ > Control type

Purpose of the page

This page allows you to view and create relationship types between entities and counterparties.

What it looks like

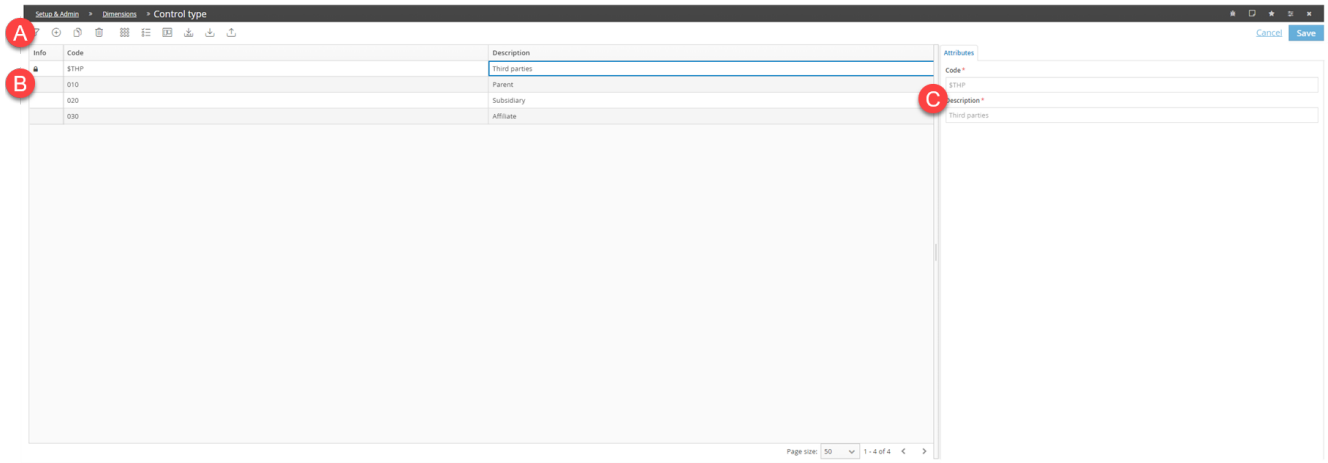

Element	Description
A	Tool bar
B	List of control types
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new relationship.
	This duplicates the selected row.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Control type

Dimensions > Entity > ⋮ > Control type

Attributes tab

Field	Description
Code	This identifies the type of control. It begins with $, if it is a system control type.
Description	Control type description


CTP dynamic groups page

Dimensions > Entity > ⋮ > CTP dynamic groups

Purpose of the page

This page allows you to view and create dynamic groups of counterparties.

What it looks like

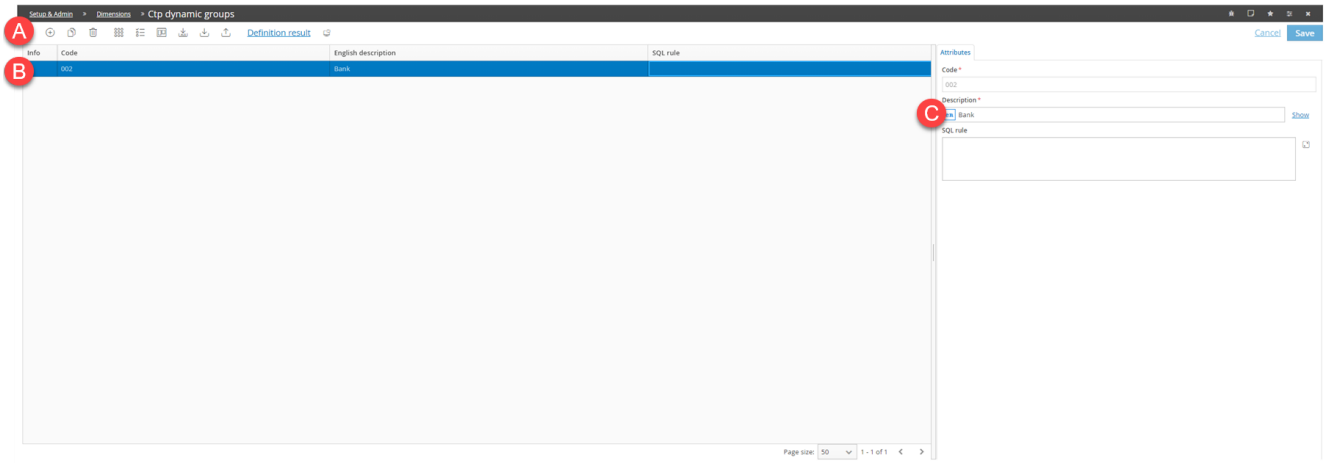

Element	Description
A	Tool bar
B	List of existing dynamic groups
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new relationship.
	This duplicates the selected row.

Element	Description
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table, and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
Definition result	This displays and expands the result of applying the defined SQL rule.
	This generates the dynamic group based on the defined SQL rule.

Counterparty dynamic groups

Dimensions > Entity > ⋮ > CTP dynamic groups

Attributes tab

Field	Description
Code	Dynamic group code
Description	Description of the dynamic group
SQL rule	SQL rules for the dynamic extraction of counterparties

SQL rule conventions

The following conventions apply to the composition of SQL rules:

Convention	Description
{AZI}.NOME_CAMPO	Entity elements field: • COMPANY table • SCENARIO_PERIOD_COMPANY table (only for time-dependent management)
{AZIV}.NOME_CAMPO	Classifiers field managed for the entity dimension: • COMPANY_CLASSIFIER table • COMPANY_CLASSIFIER_TD (only for time-dependent management)

Convention	Description
{AZIR}.NOME_CAMPO	Field from the SCENARIO_PERIOD_CONS table which stores the parameters used by consolidation data processing on original scenarios for the process/scenario/period/company (only counterparty company, consolidator company, deconsolidation method on the original scenario, optional intercompany matching and generation of counterparty eliminations)
{SCE}.NOME_CAMPO	Scenario elements field

Dimensions: Account

Contents

This section covers the following topics:

The Account: basic concepts 35
Calculation rules: result accounts 37
How to create accounts 38
How to work with accounts 39
Account elements table page 40
Account elements table 42
Create Variations, Control groups, Calculation logics 48
Create Details, Control groups, Calculation logics 50
Recode account page 51
Recode account 52
Result accounts page 52
Result accounts 54
Creation of calculation logics to generate result accounts 54
Creation of control groups to generate result accounts 55

The Account: basic concepts

Definition

The account is a mandatory dimension for identifying the data. In this dimension, it is possible to define any measurement or metric in order to carry out statistical or financial analysis.

Nature of the account

Account	Function
Profit & Loss	This collects the P&L data.
Balance Sheet	This collects the balance sheet data.
Memorandum	This collects data and quantities recorded in the financial statements despite not belonging to the P&L or balance sheet.
Other variations	This collects statistical data, where the cumulative value is the sum of the values of each month. *For example: quantities sold that are added together month by month.*
Other stocks	This collects statistical data, where the cumulative value is the value of the month. *For example: the number of employees of the company.*

Account types

Account	Description
Normal account	Account included in the financial statements.
Detail account	This provides more detailed information than a normal reference account. *For example: it may break down the purchasing data by product category (food, detergents, stationery etc.).*
Variation account	This shows the variation over time of the amounts included in an account. This is particularly useful in statutory consolidated financial statements. *For example: in the explanatory notes for a financial statement account, it is necessary to explain how the final value of the current financial year was reached from the closing amount of the previous year.*

Example of a detail account

In this example, a number of detail accounts have been related to a trade receivables account in order to break down the amounts that will be paid with different due dates (30-60 days, 60-90 days, etc.).

Account name	Amount	Account type
Trade receivables	**€ 100**	**Normal account**
Trade receivables: 0-30	€ 60	**Detail account**
Trade receivables: 30-60	€ 20	**Detail account**
Trade receivables: 60-90	€ 20	**Detail account**

The sum of the detail account values is always equal to the value of the reference normal account.

Example of a variation account

In this example, variation accounts are related to the tangible assets account; these variation accounts are identified by variation/detail types showing the entries that led from the initial balance amount to the final balance amount.

Account name	Amount	Account type
Tangible assets: initial balance	€ 100	**Variation account**
Tangible assets: investments	€ 80	**Variation account**
Tangible assets: disinvestments	€ 0	**Variation account**
Tangible assets: depreciation	€ - 10	**Variation account**
Tangible assets: other variations	€ 30	**Variation account**
Tangible assets (final balance)	**€ 200**	**Normal account**

Account class

An account may also be related to a class. This is useful to check the sign with which the amounts are inserted in the forms. In fact, depending on requirements, it may be necessary to view the amounts with their original sign or as an absolute value.

- Original sign: all the values are displayed with a sign. This is "-" for negative values.
- Absolute value: all values are displayed without a sign, and are therefore positive.

If the accounts are displayed with a sign, this is due to the combination of the class attributed to the account and the sign of the classes set during configuration.

The following classes are available:

- Revenue
- Cost
- Asset

- Liability
- Asset increase
- Asset decrease
- Liability increase
- Liability decrease

Calculation rules: result accounts

Definition

The result accounts are calculated automatically, based on the balance sheet net result and the P&L net result. Dedicated control groups and calculation logics are used to complete this calculation.

***IMPORTANT**: balance sheet (BS) control groups and calculation logics are only generated if the system is set to manage the BS net result balanced with the P&L net result.*

***Note**: the generic result accounts shown in the Result accounts page are used by default.*

Control groups for result accounts

To calculate the result accounts, the system generates the following system control groups:

Control group	Function
$PL_"Rule set code"	This checks that the profit and loss is balanced, i.e. that the result account is the sum of all the normal P&L, with a changed sign.
$RESFLOW_ "Rule set code"	This checks that the balance sheet result accounts and the balance sheet result variation (including the effect of the current year) contain the same amounts.
$RESULT_ "Rule set code"	This checks that the balance sheet result accounts and the P&L result are the same.
$BS_codice set	This checks that the balance sheet is balanced, i.e. that the balance sheet result account is the same as the sum of all the normal balance sheets, with a changed sign.

For further details about how these control groups are generated, please refer to "Creation of control groups to generate result accounts" on page 55.

Calculation logics for result accounts

To calculate the result accounts, the system generates the following calculation logics:

Calculation logic	Function
$PL_RESULT_"Rule set code"	This calculates the P&L result account as the sum of all the P&L.
$BS_RESULT_"Rule set code"	This calculates the balance sheet result account, the amount of which is the same as the P&L result account.
$BS_RESULT_FLOW_ "Rule set code"	This copies the amount of the effect of the year from the balance sheet result account amount to the variation account.

For further details about how these calculation logics are generated, please refer to "Creation of calculation logics to generate result accounts" on page 54.

How result accounts are used in processes

The generic result accounts shown on the **Result accounts** page are used by default. To use other sets of result accounts for specific processes, the override must be enabled when the calculation logics are being defined.

How to create accounts

Concept Information

CCH Tagetik dimensions 7
Creation of calculation logics to generate result accounts 54
Creation of control groups to generate result accounts 55

How to create an account manually

Dimensions > Account > List

This procedure is useful when it is necessary to create a limited number of accounts; it allows for a new account to be created manually.

1. In the account elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new account.
3. In the **Relationships** tab, the new account will be automatically related to a default hierarchy ($) which organises the accounts by nature and type. If necessary, replace this hierarchy or update with others.
4. Set all of the characteristics for the account in the various configuration tabs, then click **Save**: the account created will be listed in the data table.

How to create a variation account

Dimensions > Account > List

It is possible to create variation accounts in order to monitor the changes of a reference account (parent account).

To create this type of account, it is possible to follow the manual procedure ("How to create an account manually" above), or the following steps. In this case, you must also define the variation/detail types necessary to create the control groups and their groupings.

1. In the account elements table, select the normal account for which a variation needs to be created, then click ⋮ > **Create Variations**: the **Create Variations, Control groups, Calculation logics** window will open.
2. Set the parameters in the **Variation Accounts** section in order to define the account to be created.
3. Set any other useful parameters, then click **OK**: the new account will be created and listed in the account element table.

How to create a detail account

Dimensions > Account > List

It is possible to create detail accounts to provide details of financial statement accounts for which it is useful to have more granular information.

To create this type of account, it is possible to follow the manual procedure ("How to create an account manually" above), or the following steps. In this case, you must also define the variation/detail types necessary to create the control groups.

1. In the account elements table, select the normal account for which details need to be created, then click ⋮ > **Create Details**: the **Create Details, Control groups, Calculation logics** window will open.
2. Set the parameters in the **Detail Accounts** section in order to define the account to be created.
3. Set any other useful parameters, then click **OK**: the new account will be created and listed in the account element table.

How to create a result account

Dimensions > Account > ⋮ > Result accounts

This procedure must be completed during initial configuration.

1. In the account elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the set of result accounts.
3. Set all the characteristics of the result accounts and balancing, then click **Save**.

How to work with accounts

Concept Information

CCH Tagetik dimensions 7
The Account: basic concepts 35
Creation of calculation logics to generate result accounts 54
Creation of control groups to generate result accounts 55

How to delete an account

Dimensions > Account > List

***IMPORTANT**: This procedure is irreversible. Only run if there is a real need to do so.*

1. In the account elements table, select the account to delete, then click : in the **Info** column, the symbol will appear, indicating that the account is about to be deleted.
2. Click **Save**: a window will open explaining the consequences of the deletion.
3. Select the desired options, then click **Confirm**: the account will be deleted.

***IMPORTANT**: this operation may take a long time, as the account has to be removed from all the tables within Tagetik.*

How to recode an account

Dimensions > Account > List

This is useful for changing account codes individually. This is a time-consuming procedure and is therefore only recommended for changing a limited number of codes at a time.

To make massive updates, use the Standard import function and work on the Recoding page.

1. In the account elements table, select the account whose code needs to be changed.
2. Select > **Recode**: the **Recode - Code Dimension** page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the account.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to define custom dimension restrictions for an account

Dimensions > Account > List

This is useful for excluding data from specific custom dimensions from being collected.

1. In the account elements table, select the account for which to create restrictions.
2. In the **Restrictions** tab, set the desired type of restriction for each custom dimension shown.
3. Click **Save**: for custom dimensions for which a restriction has been set, the **Define** command will be displayed together with the symbol, indicating that there are elements for which the account is to be restricted.
4. Click **Define**: the specific page will open allowing you to define the restrictions.
5. Click to add an element.
6. In the **Attributes** tab, set whether to include or exclude the element, and select the single custom dimension elements or nodes of a non-time-dependent hierarchy defined for the custom dimension.

7. To enable a hierarchy node, but exclude an element from it, you must first set the node and then the exception on the next line.

   ***IMPORTANT**: The system implements restrictions based on the order in which they are inserted in the definition window. If two restrictions are in conflict, the one implemented last in the sequence will prevail.*

8. Click **Save**.
9. To view a list of all the selected elements, click **Definition result**.

How to inherit settings from another account

Dimensions > Account > List

1. In the account elements table, select the account to be defined and then click ⋮ > **Relate as similar account**: the relationship window will open.
2. In **Reference Account**, select the account from which to inherit the settings: all of the characteristics for that account that may be inherited will be displayed.
3. Select the characteristics to be inherited, then click **Run**: the account selected in the elements table will inherit all of the selected characteristics.

How to generate a report with the characteristics of an account

Dimensions > Account > List

This is useful for creating reports in Excel format that contain specific attributes extracted from the accounts.

1. In the accounts list, select ☰ > **Report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the characteristics of the accounts to be included in the report.
3. In the **Output** section, define how to break down and group the accounts in the report. For each type of output selected, a dedicated tab will be created in the report.
4. Click **OK**: the requested report will be generated in Excel format.

How to generate a report on account restrictions

Dimensions > Account > List

It is possible to create reports in Excel format containing information about specific custom dimensions managed for the entities listed. To define the data to be included in the report, follow the below procedure:

1. Select ☰ > **Restrictions on custom dimensions report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the filters to define the accounts that will be included in the report.
3. In the **Output** section, define how to break down and group the information in the report. For each type of output selected, a dedicated tab will be created in the report.
4. Click **OK**: the requested report will be generated in Excel format.

How to define the characteristics of the account dimension

Dimensions > Account > ⋮ > Settings

Set the characteristics of the account dimension, and then click **OK**.


Account elements table page

Dimensions > Account > List

Purpose of the page

This page allows you to view all the existing accounts and to insert new ones, defining all the relative characteristics.

What it looks like

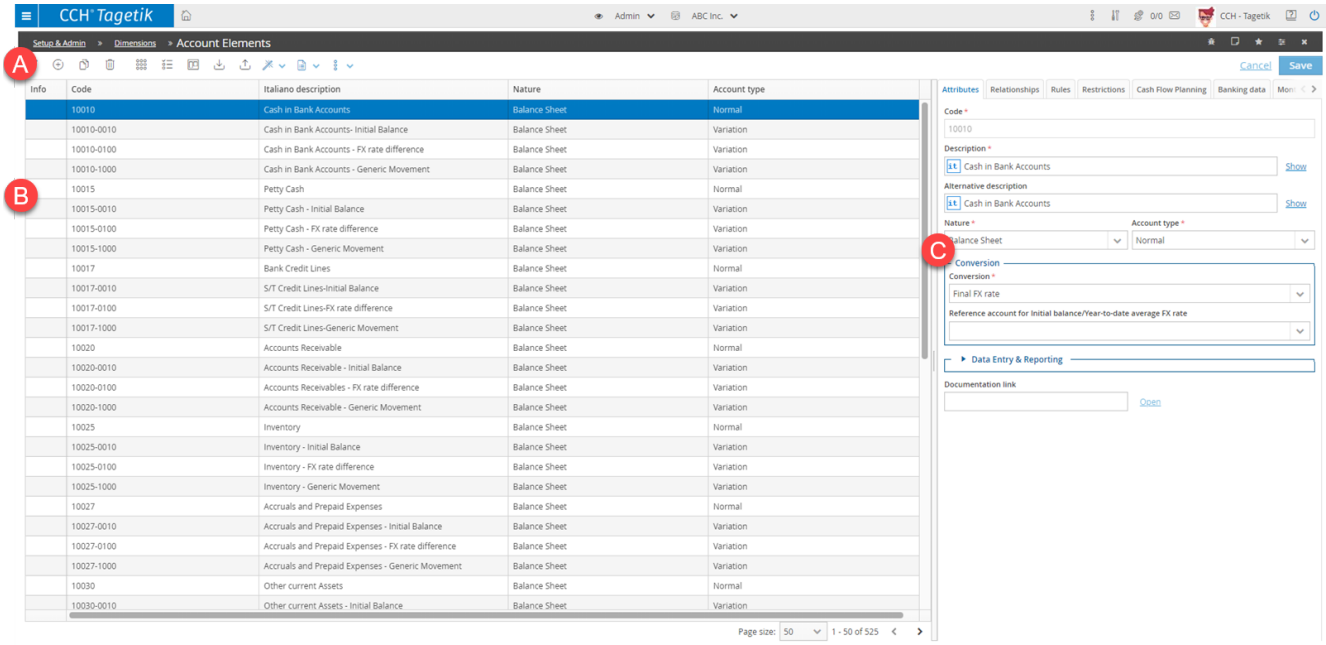

Element	Description
A	Tool bar
B	Account elements table
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new account.
	This duplicates an account with the same characteristics as the one selected, with the exception of the code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Account elements table

Dimensions > Account > List

Attributes tab

Please find below the most important fields.

Field	Description	Values
Alternative description	Account description used in the reports.	-
Nature	Nature of the account	Balance Sheet Profit & Loss Memorandum Other variations Other stocks
Account type	Account type	Normal: main accounts, neither variation accounts nor detail accounts. Variation: the account is part of a variation. Details: the account collects detail values.

Field	Description	Values
Conversion	FX rate to be applied when converting into the consolidation currency.	**P&L FX Rate**: This overrides the settings of the default conversion rule and replaces them with the chosen FX rate (average FX rate/period average FX rate/year-end FX rate). Used for the P&L, detail accounts and other variation accounts. **Average FX rate**: This converts the cumulative amounts to the average FX rate present in the FX rates table. **Period average FX rate**: This converts the amount for the period to the period average FX rate present in the FX rates table and then adds it to the converted data of the previous period. **Final FX rate**: This converts cumulative amounts to the final FX rate present in the FX rate table. Used for the balance sheet, detail accounts and 'other stock' accounts. Equity accounts are excluded, as these are normally converted at the historical FX rate. **Historical FX rate**: This stratifies the conversion based on the period FX rate. There is no FX rate numeric value. In order to obtain the final converted value, the system adds the converted variations to the initial balance, each based on the type of FX rate indicated in the relative table. Used for equity accounts. **Prev. P&L FX rate**: Applied to the reserve variations that receive the distribution of profit and the balance sheet net result for the previous year. Only used for variation accounts and detail accounts. **Prev. Final FX rate**: Applied to the accounts representing the initial balances. However, these accounts are actually calculated on the basis of the carryforward processing operations, and are not the result of conversions. Only used for variation accounts and detail accounts. **Initial balance FX rate**: this converts incoming area variations or percentage variations in the case of a decrease of accounts converted at the historical FX rate, when the entry or reduction occur at the start of the period, or when the amount refers to carrying forward. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the **Reference account for Initial balance/Year-to-date average FX rate** which allows you to calculate the conversion coefficient. **Year-to-date average FX rate**: this converts outgoing area variations or the percentage variance in the case of a decrease of accounts converted at the historical FX rate, i.e. when the exit or reduction occur during the period and other operations alter the value of the account. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the conversion coefficient in **Reference account for Initial balance/Year-to-date average FX rate**. **None**: This is applied to accounts that are not subject to currency conversion. This is used for 'other variation', 'stock' and 'initial balance variation' accounts.
Reference account for Initial balance/Year-to-date average FX rate	Account used to calculate the conversion coefficient.	Only Normal or Detail Balance Sheet accounts. If not specified, the parent account of the control group to which the account belongs is used.
Validity	Account validity period	-

Field	Description	Values
Class	Account class to which the account belongs. This defines the sign for the amounts in the forms.	-
Manage transaction currency	This defines if the account allows for transaction currency or only company currency.	-
IC management	The account may receive intercompany values.	-
Manage maximum number of decimals	This allows for 9 decimals to be used also for 'other stock' and 'other variations' accounts.	-
Documentation link	This opens a page that is external to Tagetik with additional information.	-

tab Relationships

This tab allows you to create relationships between accounts, hierarchies and nodes.

Rules tab

Please find below the most important fields.

Field	Description
Gross amount equal to the IC sum	The gross amount for the account is automatically calculated by summing the IC declarations for said account.
Accrual	
Debit accrual	The account used to generate the counterpart entry for the P&L rows inserted manually (if a debit sign).
Credit accrual	The account used to generate the counterpart entry for the P&L rows inserted manually (if a credit sign).
Consolidated	
Use account for set-up	Use the account to set up the financial investments or equity of the ownership structure register.
Exclude from proportional calculation	Account not to be calculated proportionally, in the presence of proportional companies. Mandatory for 'other variations' or 'other stock' accounts.
Validation checks	
Standard sign check	Sign that may be used to insert amounts. Used by diagnostic checks to detect any violations of the configured standard. This check can be set as blocking.

Field	Description
FX rates check	This indicates whether the IC FX rate diagnostic check is run on the account.
Notes check	This indicates whether the diagnostic check into the presence of notes regarding amounts is run on the account. Notes can be set as mandatory and the check can be blocking for data submission.
IC capacity check	Diagnostic check on the capacity between IC amounts and gross amounts.
IC sign check	Diagnostic check on the sign of IC entries. The sign must be consistent with the gross amount. Mandatory for accounts that allow IC.

Restrictions tab

This tab allows you to set the custom dimensions accepted by the account.

Please find below the most important fields.

Field	Description
<Custom dimensions enabled in the environment>	Restrictions for the specific custom dimension.
CTP restriction	This uses rules to define the counterparties accepted by the account for the IC.

It is possible to set these restrictions for each enabled custom dimension (cost centers, products, employees etc.).

Restriction	Description
None	All custom dimensions are accepted.
Restricted	It is possible to define the accepted custom dimensions.
Restricted on the company's default custom dimension	The account inherits the restrictions on the associated company's custom dimensions.
Restricted based on the account/classifiers relationships	The possible custom dimensions are automatically generated depending on the relationships between the custom dimension accounts and classifiers inserted in the table.

Cash Flow Planning tab

This tab allows you to set the data for financial planning.

Please find below the most important fields.

Field	Description
Variation	
Debit	Variation account to be used to define the accounting models. This is normally used on balance sheet accounts to specify the variation account with which to perform the initial disinvestment, or, for accounts linked to asset-type objects, to specify the variation accounts linked to events. It must be a variation account.
Credit	

Field	Description
Receivable/Payable	
Debit	Variation account to be used to define the accounting models. This is usually used on P&L accounts to specify the variation account of adjusted credits or debits. It must be a variation account.
Credit	
Liquidity	
Debit	Bank account variation account that records cash flow account entries (payment or collection) for the account. To be used to define the accounting models. It must be a variation account.
Credit	
Accrual	
Debit	The account used to generate the counterpart entry for the P&L rows inserted manually.
Credit	
Others	
Debit	Additional account to define the accounting models.
Credit	
Additional debit accrual account	The account to generate a balance sheet counterpart entry for accounts that have no entries; or to generate the reference entry of a cost/revenue in the case of deferred invoicing.
Additional credit accrual account	
Revaluation/Write-down	
Enable	Specifies whether or not the valuation at the period-end FX rate is performed for that account at the end of each period. Only mandatory for balance sheet accounts.
Debit	The account to which the FX rate difference relating to the period-end FX rate valuation is booked. It must be a P&L account. If not defined, the account present in the configuration will be used.
Credit	

tab Banking data

This tab allows you to set the characteristics of the data collected for banking supervision purposes. In particular, it relates accounts to specific supervisory items.

Please find below the most important fields.

Field	Description
Bankit reporting M sub-item	Supervisory sub-item that the account will feed for statistical reporting.
Bankit reporting M sub-item - IC Group	Supervisory sub-item to be fed by the financial statement accounts of 36381 for direct production (IC relationships between entities of the banking group).
Bankit reporting 1 sub-item	Supervisory sub-item that the account will feed for the common reporting framework.
Bankit reporting EP sub-item	Supervisory sub-item that the account will feed for Bankit EP reporting.

Field	Description
EBA reporting sub-item	Supervisory sub-item that the account will feed for Bankit EBA reporting.
Bankit reporting M sub-item (OLD)	Supervisory sub-item that the account will feed for statistical reporting.
IC sub-item (OLD)	Supervisory sub-item to be fed by the financial statement accounts of 36381 for direct production (IC relationships between entities of the banking group) up until 30/06/2009.

Monthly splitting rules tab

This tab allows you to set the criteria based on which data are registered within a period.

Field	Description	Value
Monthly splitting type	Monthly splitting type to be allocated to the account	**No**: no monthly splitting (default) **Flat**: the value of the account is allocated in equal parts to each defined period. **Coefficient 445**: the value of the account is allocated based on the 4+4+5 progression of weeks in the months. Considering that a year is made up of 52 weeks and that each quarter has 13 weeks, for the 445 coefficient, the "weights" of the weeks in the quarter will be 4/52, 8/52, 13/52, 17/52, ... 47/52, 52/52. This is only applicable in the case of 12 periods. **Coefficient 454**: the value of the account is allocated based on the 4+5+4 progression of weeks in the months. The "weights" of the weeks in the quarter will be 4/52, 9/52, 13/52, 17/, ... 48/52, 52/52. This is only applicable in the case of 12 periods. **Coefficient 544**: the value of the account is allocated based on the 5+4+4 progression of weeks in the months. The "weights" of the weeks in the quarter will be 5/52, 9/52, 13/52, 18/52, ... 48/52, 52/52. This is only applicable in the case of 12 periods. **Advanced Management**:Monthly splitting is defined using a specific driver. This enables the subsequent reference fields.
Reference		
Reference account	Account used to calculate the monthly splitting driver. If this is not specified, the system uses the account defined in the elements table. In the case of monthly splitting with **Advanced Management**, it must be a P&L account, 'other variations' account or a variation account.	
Reference account hierarchy	The hierarchy of accounts used to calculate the monthly splitting driver. Only for monthly splitting with **Advanced Management**.	
Reference scenario	Reference scenario used to calculate the monthly splitting driver, obtained by defining a time sequence to apply to the data processing scenario. Only for monthly splitting with **Advanced Management**.	

Field	Description	Value
Filter custom dimension 1	This specifies whether the driver is filtered on the custom dimension. Only for monthly splitting with **Advanced Management**.	**Do not filter**: No partialization applied to the driver. **Filter on lowest level element**: Data are monthly split with a driver filtered on the same elements of the target custom dimension. **<hierarchy node>**: Data are monthly split with a driver filtered on all elements related to the same node to which the target element is related.
Filter custom dimension 2		
Filter custom dimension 3		
Filter custom dimension 4		
Filter custom dimension 5		
Filter category	This specifies whether or not the driver is filtered on the category based on the data to handle.	
Filter CTP company	This specifies whether or not the driver is filtered on the CTP company based on the data to handle.	
Filter CTP custom dimension2	This specifies whether or not the driver is filtered on the CTP custom dimension 2 based on the data to be handled	

Create Variations, Control groups, Calculation logics

Dimensions > Account > List > ⋮ > Create Variations

Variation accounts section

Please find below the most important fields.

Field	Description	Values
Type nodes of variation accounts	Grouping of the variation types that define the variation generated	-
Restrictions on dimensions	Restriction to be applied to the variation accounts generated	**As Parent Account**: inherits the same restrictions as the parent account. **On Default Entity**: inherits the restrictions defined at entity level. **Based on"Dimensions Checks"**: the restrictions depend on how the dimension checks have been defined. **None**: there are no restrictions on dimensions.

Control groups section

Please find below the most important fields.

Field	Description
One for each Parent Account/One for all Parent Accounts	Number of control groups to be created for the parent accounts selected.
Code format and Description	Criteria with which the control group inherits the code and description from the parent account.
Balance automatically	The control group is made to be balanced automatically. ***Note**: any unbalanced amounts are reported in a dedicated variation account (Balancing variation).*

Diagnostics section

Please find below the most important fields.

Field	Description
Severity	This defines whether or not any errors detected by the diagnostic process have to be block the data submission process.
Data types to check	The types of data to be checked during the diagnostic process.
Check original data on	This indicates whether the diagnostic process for original data has to use the local currency or the transaction currency.

Calculation logics section

In this section, it is possible to define one or more calculation strategies to be applied to the control group.

Please find below the most important fields.

Field	Description	Values
Calculate	The criteria used to calculate the account balance	**Parent account as sum**: the balance of the normal account (parent account) is calculated by adding together the detail accounts or variation accounts. The data are inserted in the detail accounts or variation accounts. **Variation/detail as difference**: the detail account or variation account is calculated as the difference between the balance of the parent account and the balance of the remaining detail accounts or variation accounts.
Data to calculate	Data to be taken into consideration in the calculation.	**Gross** **Intercompany** **Journals**
Suffix	The common suffix for codes, when several rules are generated.	-

Create Details, Control groups, Calculation logics

Dimensions > Account > List > ⋮ > Create Details

Detail accounts section

Please find below the most important fields.

Field	Description	Values
Type nodes of detail accounts	Grouping of the detail types that define the details generated	-
Restrictions on dimensions	Restriction to be applied to the detail accounts generated	**As Parent Account**: inherits the same restrictions as the parent account. **On Default Company**: inherits the restrictions defined at entity or company level. **Based on"Dimensions Checks"**: the restrictions depend on how the dimension checks have been defined. **None**: there are no restrictions on dimensions.

Control groups section

Please find below the most important fields.

Field	Description
One for each Parent Account/One for all Parent Accounts	Number of control groups to be created compared with the parent accounts selected.
Code format and Description	Criteria with which the control group inherits the code and description from the parent account.
Balance automatically	The control group is made to be balanced automatically. ***Note**: any unbalanced amounts are reported in a dedicated child account.*

Diagnostics section

Please find below the most important fields.

Field	Description
Severity	This defines whether or not any errors detected by the diagnostic process have to be block the data submission process.
Data types to check	The types of data to be checked during the diagnostic process.
Check original data on	This indicates whether the diagnostic process for original data has to use the local currency or the transaction currency.

Calculation logics section

In this section, it is possible to define one or more calculation strategies to be applied to the control group. Please find below the most important fields.

Field	Description	Values
Calculate	The criteria used to calculate the account balance	**Parent account as sum**: the balance of the normal account (parent account) is calculated by adding together the detail accounts or variation accounts. The data are inserted in the detail accounts or variation accounts. **Variation/detail as difference**: the detail account or variation account is calculated as the difference between the balance of the parent account and the balance of the remaining detail accounts or variation accounts.
Data to calculate	Data to be taken into consideration in the calculation.	**Gross** **Intercompany** **Journals**
Suffix	The common suffix for codes, when several rules are generated.	-


Recode account page

Dimensions > Account > List > > Recode

Purpose of the page

This page allows you to change the existing account codes on an individual basis.

What it looks like

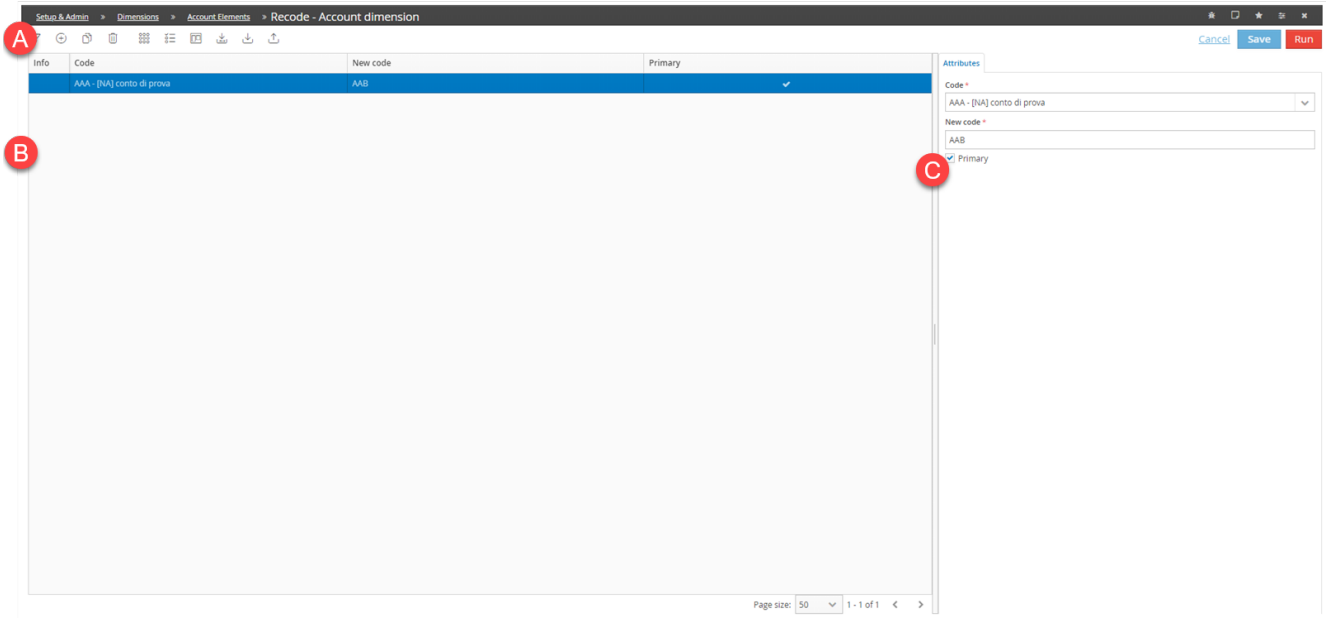

Element	Description
A	Tool bar
B	List of codes in the process of being recoded
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new account.
	This adds a new row with the same recoding code as the one selected. This is useful to merge several accounts into one.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Recode account

Dimensions > Account > List > > Recode

Attributes tab

Please find below the most important fields.

Field	Description
Code	Original code
New code	New code to be assigned to the account
Primary	This indicates that the new code must prevail in case of any conflict with other previously defined codes.


Result accounts page

Dimensions > Account > > Result accounts

Purpose of the page

This page allows you to define the calculation logics in order to automatically generate result accounts.

What it looks like

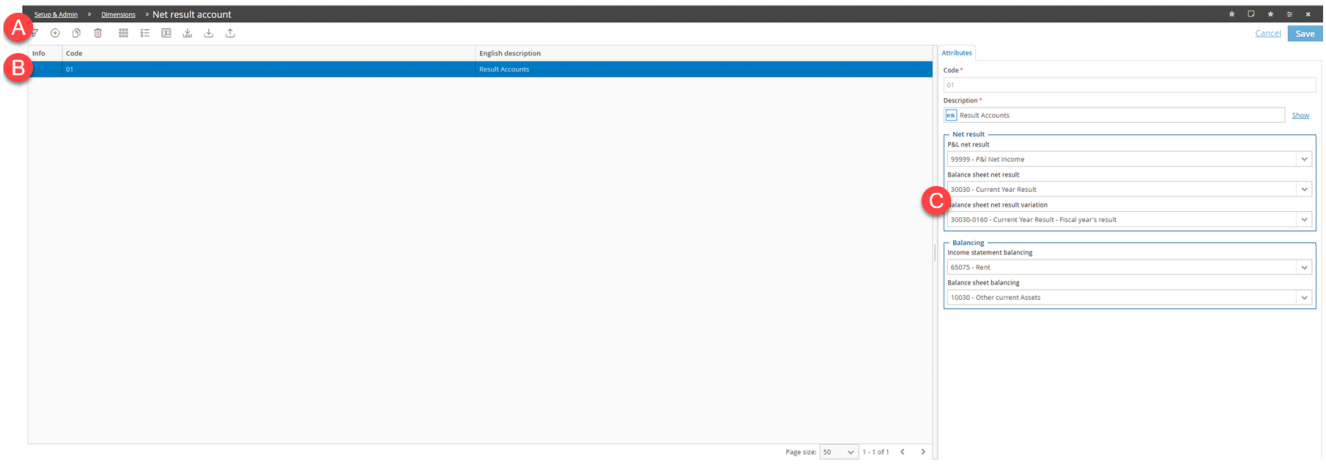

Element	Description
A	Tool bar
B	List of result accounts
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new account.
	This adds a new row with the same recoding code as the one selected. This is useful to merge several accounts into one.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table, and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
XLS	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Result accounts

Dimensions > Account > ⋮ > Result accounts

Attributes tab

Please find below the most important fields.

Field	Description
Result	
P&L result	Normal P&L calculated as the sum of the P&L accounts
Balance sheet result	Normal balance sheet calculated based on the P&L
Balance sheet result variation	Variation account that records the balance sheet entries for the year
Balancing	
Balancing P&L	P&L used by balancing data processing, with an amount equal to the difference between the P&L result and the sum of the P&L accounts.
Balancing balance sheet	Used by the Balancing processing, with an amount equal to the difference between the balance sheet result and the sum of the balance sheet accounts.

Creation of calculation logics to generate result accounts

Introduction

This section describes the process followed by the system to create the calculation logics required to generate the result accounts.

Process of creating calculation logics

This process involves the following main steps:

1. If the $PL_RESULT, $BS_RESULT, $BS_RESULT_FLOW calculation logics are already present, deletion of the addenda they are made up of.
2. Creation of the following sets of rules, if not already present:
   - $PL_RESULT
   - $BS_RESULT
   - $BS_RESULT_FLOW
3. The calculation logics generated are connected to the node of the calculation logic grouping set as default for new calculation logics.
4. Deployment.

Creation of $PL_RESULT set of rules

If the P&L result account is defined in the result accounts, the system will create a 'sum' calculation logic with the following characteristics:

Element	Value
Code	$PL_RESULT + code for set of result accounts
Description	$PL_RESULT + description of set of result accounts
Set	Accounts, with the P&L result account
Run	(**Run on gross amounts** option) Run on gross amounts. (**Run on journals**) Run on journals.

Once the set of rules has been created, insert the accounts relating to the "PL_OT - Profit & Loss - Others" node of the system account hierarchy, with the opposite sign, as the addenda for the calculation logic.

Creation of $BS_RESULT set of rules

If the balance sheet result account is defined in the result accounts, the system will create a 'sum' calculation logic with the following characteristics:

Element	Value
Code	$BS_RESULT + code for set of result accounts
Description	$BS_RESULT + description of set of result accounts
Set	Accounts, with the balance sheet result account
Run	(**Run on gross amounts** option) Run on gross amounts. (**Run on journals**) Run on journals.

Once the set of rules has been created, insert the P&L result account, with the opposite sign, as the addenda for the calculation logic.

Creation of $BS_RESULT_FLOW set of rules

If the balance sheet result account and the balance sheet result variation are defined in the result accounts, the system will create a 'sum' calculation logic with the following characteristics:

Element	Value
Code	$BS_RESULT_FLOW + code for set of result accounts
Description	$BS_RESULT_FLOW + description of set of result accounts
Set	Accounts, with the balance sheet result variation
Run	(**Run on gross amounts** option) Run on gross amounts. (**Run on journals**) Run on journals.

Once the set of rules has been created, insert the balance sheet result account as the addenda for the calculation logic.

Creation of control groups to generate result accounts

Introduction

This section provides a detailed description of the process that the system runs to create the control groups necessary to generate the result accounts.

Process to create control groups

This process involves the following main steps:

1. Cancellation of the accounts that make up the definition of the system control groups, if these already exist.
2. Creation of the following control groups, if not already present:
   - $RESULT
   - $PL
   - $BS
   - $RESFLOW
3. The control groups generated are linked to the nodes of the control group grouping defined by default for new control groups.
4. Deployment.

Creation of the $RESULT control group

If both the P&L result and the balance sheet result are defined in the set of result accounts, the system will create a balancing control group with a "=" control operator, with the following characteristics:

Element	Value
Code	$RESULT + code for set of result accounts
Description	Balancing result + result accounts
Notes	Balancing result + description of result accounts
Blocking error	The balancing between accounts belonging to the control group is blocking for data submission.
Diagnostic	(**Journals - Check by single company** option) Carried out by journal number/company on the consolidation journals. (**Gross amount type check**) Carried out on gross amounts.
Balancing	During the diagnostic phase: on the gross amounts in the financial statement currency.
Custom dimensions	• Check lowest level elements: if the balance sheet result account is restricted for the dimension **Based on Company**. • Total: in the other cases.

Once the control group has been created, it inserts the P&L result account present in the set as the parent account and the balance sheet result account as the child account, with the opposite sign.

Creation of the $PL control group

If the P&L result is defined in the set of result accounts, the system will create a balancing control group with a "=" control operator, with the following characteristics:

Element	Value
Code	$PL + code for set of result accounts
Description	P&L balancing + description of set of result accounts
Notes	P&L balancing + description of set of result accounts
Blocking error	The balancing between accounts belonging to the control group is blocking for data submission.
Diagnostic	(**Journals - Check by single company** option) Carried out by journal number/company on the consolidation journals. (**Gross amount type check**) Carried out on gross amounts.
Balancing	(**Enable automatic balancing**) Automatic During the diagnostic phase: on gross amounts in financial statement currency.
Custom dimensions	• Check lowest level elements: if the P&L result account is restricted for the dimension **Based on Company**. • Total: in the other cases.

Once the control group has been created, it inserts the P&L result account present in the set as the parent account and the accounts of the "PL_OT - Profit & Loss - Others" node from the system account hierarchy as child accounts, with the opposite sign.

Furthermore, if the P&L balancing account is set up in the set, the system will insert it as a child account (with the opposite sign), allocating to it any unbalanced amounts due to rounding for currency conversion or for changes in unit measures between the parent accounts and child accounts.

Creation of the $BS control group

If the balance sheet result is defined in the set of result accounts, the system will create a balancing control group with a “=” control operator with the following characteristics:

Element	Value
Code	$BS + code for set of result accounts
Description	BS balancing + description of set of result accounts
Notes	BS balancing + description of set of result accounts
Blocking error	The balancing between accounts belonging to the control group is blocking for data submission.
Diagnostic	(**Gross amount type check**) Carried out on gross amounts.
Balancing	(**Enable automatic balancing**) Automatic During the diagnostic phase: on gross amounts in financial statement currency.

Once the control group has been created, it inserts the balance sheet result account present in the set as the parent account and the accounts of the “BS_OT - Balance Sheet - Others” node from the system account hierarchy as child accounts, with the opposite sign.

Furthermore, if the balance sheet balancing account is set-up in the set, the system will insert it as a child account (with the opposite sign), allocating to it any unbalanced amounts due to rounding for currency conversion or for changes in unit measures between the parent accounts and child accounts.

Creation of the $RESFLOW control group

If the balance sheet result accounts and the balance sheet result variation are defined in the set of result accounts, the system will create a balancing control group with a “=” control operator, with the following characteristics:

Element	Value
Code	$RESFLOW + code for set of result accounts
Description	Result variation balancing + description of set of result accounts
Notes	Result variation balancing + description of set of result accounts
Blocking error	The balancing between accounts belonging to the control group is blocking for data submission.
Diagnostic	(**Journals - Check by single company** option) Carried out by journal number/company on consolidation journals. (**Gross amount type check**) Carried out on gross amounts.
Balancing	(**Enable automatic balancing**) Automatic During the diagnostic phase: on gross amounts in financial statement currency.
Custom dimensions	• Check lowest level elements: if the P&L result account is restricted for the dimension **Based on Company**. • Total: in the other cases.

Once the control group has been created, it inserts the balance sheet result account present in the set as the parent account and the balance sheet result variation account as the child account.

Dimensions: Period

Contents

This section covers the following topics:

Periods: basic concepts 58
How to work with periods 60
Period list page 60
Period list 62

Periods: basic concepts

Definition

The period is a time dimension representing the basic unit used to break down the tax year. Periods normally represent months.

Subdivision into periods

In addition to the default subdivision into 12 periods, it is also possible to create custom periods. For example, it may be useful to create the following periods:

- 13 periods for companies that complete periodic reporting every four weeks
- single weeks
- quarters
- half-years

In Tagetik, it is possible to create up to 99 periods.

Period length

It is not possible to define aggregation structures in the period dimension. However, it is possible to define reports that aggregate data in quarters or four-month periods using the 'period length' attribute. To do this, it is necessary to set a "monthly" period length. The report displays the monthly data calculated based on the cumulative figures present in the database.

***IMPORTANT**: 'period length' is not a mandatory attribute. If this is not specified, 'LUN_0' - cumulative in the CPM and 'LUN_1'- Monthly in the Analytical Workspace will be set by default.*

Example of how 'period length' may be used

In this example, it is necessary to insert monthly data:

Quarter		Months	Value
Q1	January-March		€ 100
Q2	April-June		€ 150
Q3	July-September		€ 250
Q4	October-December		€ 300

The user may calculate and manually insert cumulative data.

Month	Four months	Cumulative value calculated
March	Q1	€ 100
June	Q1+Q2	€ 250
September	Q1+Q2+Q3	€ 500
December	Q1+Q2+Q3+Q4	€ 800

However, this method is liable to calculation errors or data entry errors.

Alternatively, it is therefore possible to use the 'LUN 3 - Quarter' period length attribute. This allows you to insert quarterly data and the system will automatically calculate the cumulative figures.

Period length values

Please find below the period length values that may be used. The period *n* indicates the period defined as a filter in the template.

Length	Description	Notes
LUN_0 cumulative	Default value in the CPM. The system does not carry out any calculation and the amount shown coincides with the amount in the database. In the Analytical Workspace (AW), the cumulative data are calculated by taking into account the figures from the end of the previous period to the current period.	In both the CPM and Analytical Workspace (AW) multidimensional matrices, the cumulative data are calculated by taking into account the figures from the end of the previous period to the current period.
LUN_1 Monthly	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-1.	Used for scenarios whose open periods are from 01 to 12.
LUN_2 Bimonthly	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-2.	Used for scenarios whose open periods are 02, 04, 06, 08, 09 and 12.
LUN_3 Quarterly	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-3.	Used for scenarios whose open periods are from 03, 06, 09 and 12.
LUN_4 Every four months	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-4.	Used when weeks are managed as part of the periods.
LUN_5 Every five months	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-5.	Used when weeks are managed as part of the periods.
LUN_6 Half-yearly	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-6.	Used for scenarios whose open periods are 06 and 12.
LUN_12 Annual	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-12.	Used for scenarios that only have period 12.
LUN_QTD Quarter to date	cumulative data are calculated from the end of the previous quarter to the current period.	-

Length	Description	Notes
LUN_STD Semester to date	The cumulative data are calculated from the end of the previous half-year period to the current period.	-
LUN_LYD Life to date	The cumulative data are calculated from minus infinity to the current period.	Useful for multi-year projects.

Relationship between periods and scenarios

To create the Tagetik time dimension, a period must be related to a scenario. For example, if the 2018 tax year is subdivided into 12 periods, the scenario 2018ACT / Period 01 may indicate the first period of the final figures for the 2018 tax year, the scenario 2018ACT / Period 02 may indicate the second period and so on.

How to work with periods

Concept Information

CCH Tagetik dimensions 7
The Scenario: basic concepts 63

How to create a period

Dimensions > Period > List

1. In the period list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new period and define its characteristics, then click **Save**: the period will be listed in the data table.

How to relate a period to a specific scenario

Dimensions > Period > List

1. In the scenarios list, select the scenario to which a period needs to be added, then click ⋮ > **Periods**: the window will open containing the period list for the selected scenario.
2. In the period list, click ⊕: an empty row will be added.
3. In **Period**, select an existing period from the period list that has not yet been related to this scenario.
4. In the **Attributes** tab, select the code for the new period from those present in the list that have not yet been related to the scenario, and define the relative characteristics, then click **Save**: the period will be listed in the period list for the scenario.


Period list page

Dimensions > Period > List

Purpose of the page

This page allows you to view and create periods, which can then be used in the various scenarios.

What it looks like

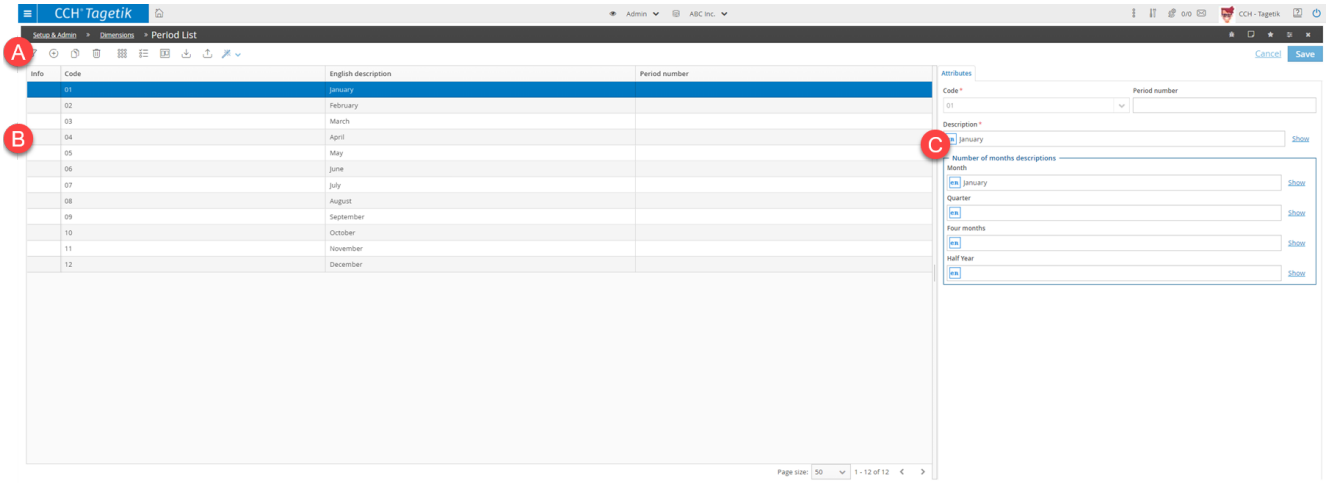

Element	Description
A	Tool bar
B	Period list
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new period.
	This duplicates a period with the same characteristics as the one selected, with the exception of the code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table, and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
	This shows any ancillary functions.

Period list

Dimensions > Period > List

Attributes tab

Please find below the most important fields.

Field	Description
Period number	Free label used to identify the period.
Number of months descriptions	Descriptions used in the reports if data are displayed on a monthly, quarterly or other basis

Dimensions: Scenario

Contents

This section covers the following topics:

The Scenario: basic concepts 63
Original scenario 64
Consolidation scenario 66
How to work with scenarios 67
Scenarios list page 68
Scenarios list 70
Scenario periods page 71
List of scenario periods 72
Snapshot scenarios page 72
Snapshot scenarios 74

The Scenario: basic concepts

Definition

Together with the period, the scenario represents the Tagetik time dimension. This also allows you to define the version of the data.

Scenario types

There are three types of scenario:

- original scenario
- consolidation scenario
- snapshot scenario

Original scenario

This scenario is used for data entry: amounts, consolidation journals and entity journals. This allows you to manage the tax year and the version of the data. Please find below some examples of original scenarios:

- 2018ACT, actual data for the 2018 tax year
- 2018BDG, budget data for the 2018 tax year
- 2018F6, forecast data for the 2018 tax year, after the month of June is closed.

An original scenario may be related to and may feed one or more consolidation scenarios.

Consolidation scenario

This scenario allows you to define the entities in the scope of consolidation: holding company, companies to be consolidated, currency and consolidation method, original scenario from which to read the data etc. A consolidation scenario is always linked to one - and only one - original scenario, and it stores consolidated

data that cannot be edited manually. If the same original scenario is linked to several consolidation scenarios, the same data may be processed differently as long as the different consolidation perimeters and rules are respected. For example, based on the original data for 2018 for companies A, B, C and D, it is possible to create the following consolidation scenarios:

- two different consolidation scenarios, one for companies A and B and one for companies C and D
- hypothesizing that company A owns 70% of company B and 40% of company C, and that company B owns 30% of company C and 40% of company D, it is possible to create two consolidation scenarios. One for company B's consolidation, in which company C is consolidated using the equity method, and one for company A's consolidation, in which company C is consolidated using the line-by-line method.

Snapshot scenario

This scenario allows you to take a snapshot of data before making any changes. For example, when it is useful to keep different versions of a budget in place before deciding upon the final one.

Snapshot scenarios are particularly useful for data processing linked to financial planning.

Scenario groupings

Tagetik allows you to create groupings of scenarios based on different criteria, for example based on the version of the data (actual, budget, forecast), on the type of scenario (consolidation, original) or on the sub-holdings; this simplifies the selection process during the reporting phase.

Tagetik has a default aggregation structure ($) and two default nodes:

- $ORIGINAL, related to each new original scenario by default
- $CONSOLIDATION, related to each new consolidation scenario by default.

The grouping structure may be customised, indicating the nodes to which each new original scenario will be related by default, and the nodes to which each new consolidation scenario will be related by default.


The scenario grouping nodes are used:

- during the reporting phase
- to simplify the management of user rights for the scenario dimension
- to simplify the selection of a group's scenarios.

However, data are never saved on the nodes. All data (amounts, adjustments, etc.) are saved on the individual scenarios.

Example of a grouping of scenarios

The following scenarios have been defined: 2017BDG, 2018BDG, 2017ACT and 2018ACT. These may be grouped in two ways: based on the year or based on the version of the data. The two classification types may co-exist within the same grouping.

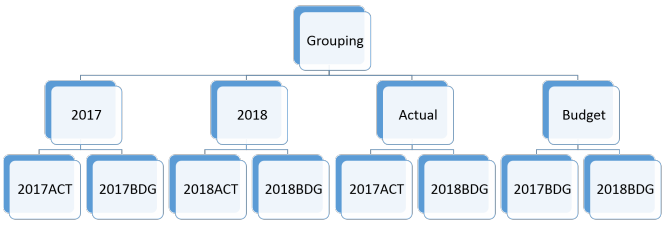

Original scenario

Characteristics of a scenario

The original scenario is used to insert data such as amounts, journals and consolidation data. Data may be inserted manually or automatically with massive data entry functions. Each scenario is identified by the

following characteristics:


- code
- description
- type
- previous and next scenario

It is fundamental to indicate the previous and next scenario in order to link the various reporting periods and to allow for carrying forward over two reporting periods.

Certain scenarios may be made inactive. This allows you to record and store a lot of data, but to only view and select the original scenarios containing the data of most interest.


Several consolidation scenarios and snapshots may be related to an original scenario.

Example of an original scenario linked to more than one consolidation scenario

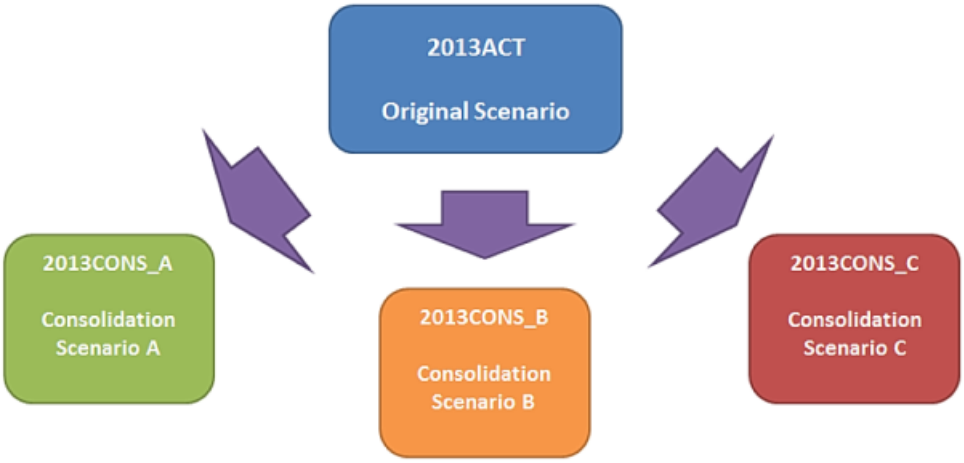

This example shows how a scenario containing original data for 2013 can be used to create various consolidation scenarios:

- several sub-consolidations
- two consolidation scenarios, one consolidating 10 companies and another consolidating 100 companies
- if company A owns 70% of company B and 40% of company E, and company B owns 30% of company E and 40% of company F, it is possible to create two consolidation scenarios, one for company B's consolidation, in which company E is consolidated using the equity method, and another for company A's consolidation, in which company E is consolidated using the line-by-line method.

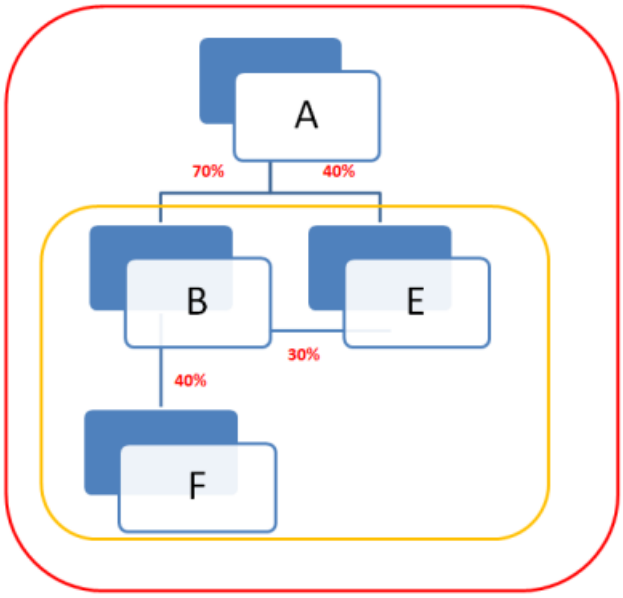

Correlations between scenarios

Correlations may be created between original scenarios in order to achieve different results:

- To compare data in current, previous and following scenarios, according to a time-based logic.
- To compare budget data or forecasts against actual data, for example during the reporting phase. These correlations are known as “reference scenarios”; up to five reference scenarios are permitted.

For reporting purposes, it is possible to give each original scenario the following attributes:

- year, i.e. the tax period to which the scenario refers
- version, i.e. the version of the data to which the original scenario refers

Original scenario periods

The Tagetik time dimension is always made up of the combination of the two physical ‘scenario’ and ‘period’ dimensions. In order to insert data, it is therefore necessary to relate at least one period to an original scenario. For example, in order to collect budget data for 2018, it is necessary to specify a specific period of interest, whether that be 2018BDG 03, or 2018BDG 06, or 2018BDG 09.

When a new scenario is created, it is sufficient to define what kind of ‘number of months’ set-up is required (monthly, quarterly, annual, etc.) and the start date; using the wizard, the necessary periods will then be created and related automatically.

Period characteristics

Each period of an original scenario is identified by the following characteristics:

- a code, which must be an existing value in the period table
- a description, which is filled in automatically but can be changed afterwards
- a start date
- an end date

An original scenario period may be given the following statuses:

- **Locked**. In this case, it cannot be modified by adding new data. This status is useful to control the moment when it becomes possible to begin inserting data.
- **Filled**. In this case, it is possible to exclude data belonging to a particular scenario/period from the reports. This status may be useful to hide periodic data for the periods created but for which data have still not been collected, or to reduce the list of scenarios that may be selected and to simplify operations.

Consolidation scenario

Characteristics

A consolidation scenario has the following attributes:

- the original scenario that feeds the consolidation scenario, i.e. the scenario containing the data that will be processed during the consolidation process
- the holding
- the currency in which the consolidation must be generated This does not necessarily have to be the currency of the holding and, in this case, the holding is also subject to the consolidation process.
- any filter on the categories that feed the consolidation. This filter is defined through a node of the category grouping.
- any filter on the accounts that feed the consolidation
- any reference scenario for FX rates, otherwise the same FX rate will be applied as for the original scenario
- a prefix to create the journal number in the financial investment reclassification journals.

Consolidation scenario periods

To define a consolidation scenario period, it is sufficient to select one of the periods of the original scenario that feeds it. Tagetik automatically gives the following attributes to the new period:

- start and end date, equal to those of the original scenario period
- a description, which is filled in automatically but can be changed afterwards

- a process, equal to the one of the original scenario period
- a period length, to define the previous reference period

The period length is useful to carry out the following actions:

- to convert at the period average FX rate
- to retrieve the previous period for deconsolidation operations from the previous period.

A consolidation scenario period may be given **Locked** status. This means that it cannot be processed or edited.

How to work with scenarios

Concept Information

CCH Tagetik dimensions 7
Periods: basic concepts 58
The Scenario: basic concepts 63

How to create a scenario

Dimensions > Scenario > List

1. In the period list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new scenario and define its characteristics.
3. In the **Relationships** tab, the new scenario is automatically related to a default node ($). If necessary, replace this node or add others.
4. Set all the characteristics for the scenario, then click **Save**: the scenario will now be listed in the elements table.

How to create an original scenario from an existing scenario

Dimensions > Scenario > List

1. In the scenarios list, click > **Add scenarios from existing**: a window will open allowing you to select the scenario to be used as a model.
2. Select a reference year and a model scenario.
3. Select the years for which the new scenarios need to be created, then click **OK**: a new original scenario will be created with the same number of periods as the source original scenario. The start and end date for each period depend on the new tax year.

How to relate a period to a specific scenario

Dimensions > Period > List

1. In the scenarios list, select the scenario to which a period needs to be added, then click ⋮ > **Periods**: the window will open containing the period list for the selected scenario.
2. In the period list, click ⊕: an empty row will be added.
3. In **Period**, select an existing period from the period list that has not yet been related to this scenario.
4. In the **Attributes** tab, select the code for the new period from those present in the list that have not yet been related to the scenario, and define the relative characteristics, then click **Save**: the period will be listed in the period list for the scenario.

How to create a scenario snapshot

Dimensions > Scenario > List

1. In the scenarios list, select the scenario for which a snapshot scenario needs to be created, then click ⋮ > **Snapshot**: the window will open allowing you to create the snapshot.
2. In **Version number**, assign a number to the snapshot.
3. In **Snapshot scenario**, insert the code of the snapshot scenario.

***IMPORTANT**: The original scenario selected must be enabled.*

How to recode a scenario

Dimensions > Scenario > List

1. In the scenarios list, select the scenario whose code needs to be changed.
2. Select > **Recode original scenarios**/**Recode consolidation scenarios**: the recode page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the scenario.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to create scenario groupings

Dimensions > Scenario > Grouping

1. In the list of scenario groupings, select the point where the new grouping is to be inserted.
2. Click on ; a row will be added in the table for the new node.
3. In the **Attributes** tab, define the characteristics of the grouping, and then click **Save**.

How to add scenarios to a grouping

Dimensions > Scenario > Grouping

1. In the list of scenario groupings, select the desired grouping and open it.
2. Select the point where the scenario needs to be inserted.
3. Click ; a row will be added in the table for the new scenario.
4. In the **Attributes** tab, define the characteristics of the scenario.
5. In the **Relationships** tab, define the relationship with any other nodes, then click **Save**.


Scenarios list page

Dimensions > Scenario > List

Purpose of the page

This page allows you to view and create original and consolidation scenarios. It also allows you to manage the subdivision into periods for each scenario, and to define the relative duration.

What it looks like

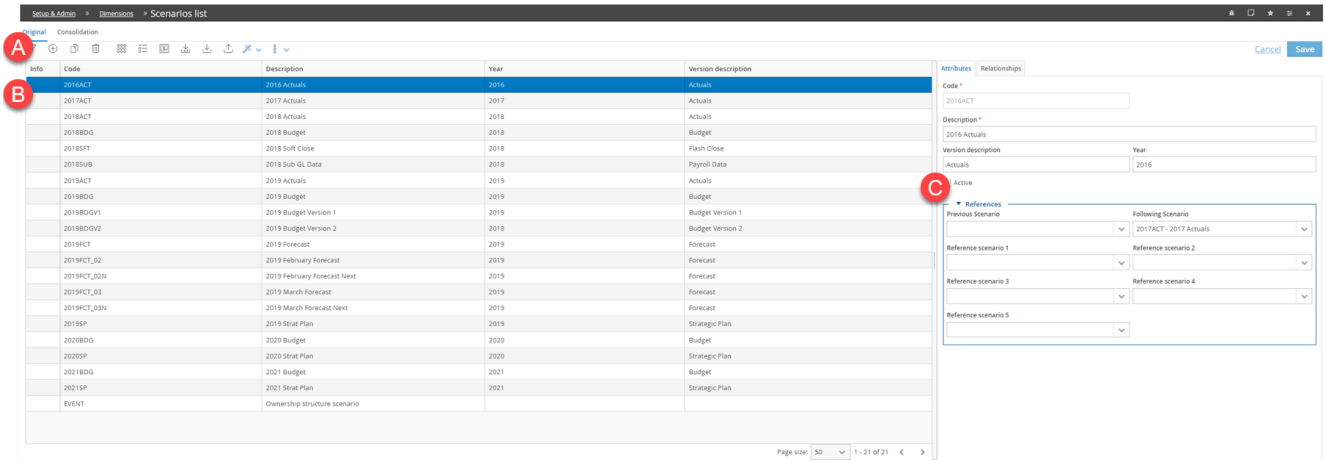

Element	Description
A	Tool bar
B	Scenarios list
C	Configuration tab

Actions on this page

Element	Description
Original	This displays the list of original scenarios.
Consolidation	This displays the list of consolidation scenarios.
	This filters the data shown on the page.
	This adds a row in order to insert a new scenario.
	This duplicates a scenario with the same characteristics as the one selected, with the exception of the code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Element	Description
	This shows different ancillary functions. **Recode original scenarios**: this modifies the code related to an original scenario. **Add scenarios from existing**: this creates an original scenario using an existing one as a model.
	**Periods**: this allows you to manage the periods related to each scenario. **Snapshot**: this allows you to manage the snapshot scenarios created for the original scenarios.

Scenarios list

Dimensions > Scenario > List

Attributes tab

This tab allows you to define the attributes of a scenario. These may vary depending on whether it is an original scenario or a consolidation scenario.

Please find below the most important fields.

Field	Description	Scenario type
Version description	Scenario version. Information used in the reporting phase.	All
Year	The year to which the scenario refers. Information used in the reporting phase.	All
Enabled	This allows you to view the scenario in the selection lists on the various pages.	All
References		
Previous scenario	The scenario used to complete carry forwards and to compare data from the current scenario.	All
Following scenario	The scenario used to compare data from the current scenario.	All
Reference scenario <n>	Scenarios that are useful for comparisons during the reporting phase.	All
Consolidation settings		
Original scenario	The scenario that feeds the consolidation scenario	Consolidation
Holding	The holding company in the consolidation	Consolidation
Currency	The currency used for the consolidation	Consolidation
Exceptions		
Category filter	Category grouping node to be used to filter the data that feed the scenario	Consolidation
Account filter	Account hierarchy node to be used to filter the data that feed the scenario.	Consolidation
Ref. FX rate scenario	This allows you to use an original scenario to read FX rates that is different from the scenario that you are using for the consolidation.	Consolidation
Prefix for FI reclass. journals	The prefix for the journals generated by the reclassification of financial investments.	Consolidation

Scenario Relationships **tab**

This tab allows you to create relationships between scenarios and the dedicated hierarchies.

Field	Description
Node	Node within the specific hierarchy to which the scenario may be related


Scenario periods page

Dimensions > Scenario > List > choose scenario > ⋮ > Periods

Purpose of the page

This page allows you to define the periods related to a scenario.

What it looks like

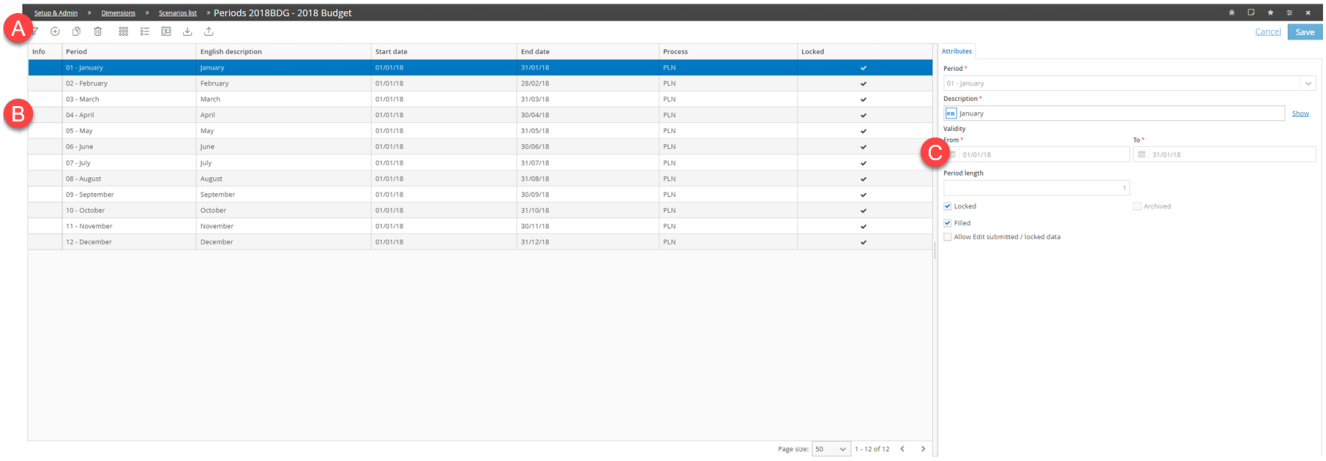

Element	Description
A	Tool bar
B	List of periods for the selected scenario
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new period.
	This duplicates a period with the same characteristics as the one selected, with the exception of the code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.

Element	Description
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

List of scenario periods

Dimensions > Scenario > List > choose scenario > ⋮ > Periods

Attributes tab

Please find below the most important fields.

Field	Description
Validity	Only for original scenarios. Time interval within which the period is valid.
Period length	This allows aggregated data to be displayed based on methods other than the 'cumulative' method.
Locked	It is not possible to insert other data for the period.
Archived	This identifies the data from the period as archived.
Filled	This enables data from the period to be viewed in the reports.
Allow editing of submitted/locked data	This allows data that have already been submitted or locked in the period to be edited.


Snapshot scenarios page

Dimensions > Scenario > List > choose a scenario > ⋮ > Snapshot

Purpose of the page

This page allows you to create snapshot scenarios for specific original scenarios.

What it looks like

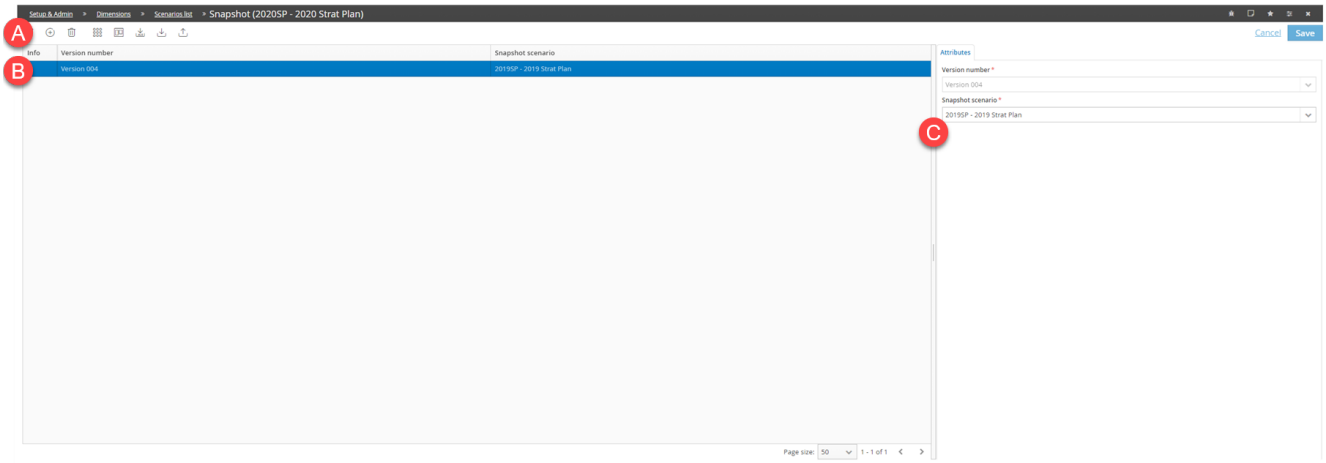

Element	Description
A	Tool bar
B	List of snapshot scenarios
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new snapshot scenario.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Snapshot scenarios

Dimensions > Scenario > List > choose a scenario > ⋮ > Snapshot

Attributes tab

Field	Description
Version number	Number of the snapshot scenario
Snapshot scenario	Original scenario of which the snapshot is taken

Dimensions: Category

Contents

This section covers the following topics:

Category: basic concepts 75
How to work with categories 77
Categories list page 79
Categories list 80
Journal models page 81

Category: basic concepts

Definition

The category is the dimension that allows data, especially journals, to be classified and segmented. It also allows you to keep track of the way in which data are generated. In fact, classifying the data into different categories allows you to:

- treat them differently during processing
- view them separately in the forms.

Classification by data source

A given amount may be the result of several operations; each operation can be classified with a category. This allows you to analyse the figures separately in order to understand where to intervene.

Category types

Category	Description
Amount	This identifies the original data, gross amounts and intercompany entries. Generally speaking, only one amount category is necessary, but it is possible to create more in the following cases: • when it is necessary to manage adjustments as amounts and therefore to be able to modify them from the forms • when it is necessary to store data coming from different information systems, for example, the general ledger, analytical accounts, etc.
Company journals	This identifies the journals that describe changes to the original data for each company. By default, this has the same currency as the company for which it has been inserted; in a consolidation process, it is used to align the financial statements to the holding company's accounting standards.

Category	Description
Consolidation journals	This identifies the manual and automatic consolidation journals. This allows for the evolution of each figure to be analysed, from the original figure to the consolidated figure. The more complex the consolidation process, the more useful it is to segment the data. In this case, it is useful to create several categories of this type.
Consolidator amount	This classifies the original data, gross amounts and intercompany entries, by consolidator.
Consolidator Company Journals	This classifies the entity journals, i.e. the journals with the changes to the general data of the company, by consolidator.

Journal example for statutory consolidation

For statutory consolidation purposes, it may be useful to create the following consolidation journals:

- Elimination of dividends
- Revaluations/write-downs of financial investments
- Elimination of financial investments
- Equity valuation
- Equity reclassification
- Intercompany eliminations
- Minorities calculation

Category groupings

Categories can also be grouped together in order to better organise and analyse the data. For example, data can be grouped according to the type of processing (minorities, equity reclassification, equity), or by the type of figures to be shown (adjusted, aggregated, consolidable).

Default category aggregation structure


The default aggregation structure is indicated with the $ code, and contains three default nodes:

Node	Description
$AMOUNT	All new amount categories are related to this category by default.
$PRECO	All new company journal categories are related to this category by default.
$CONSO	All new consolidation journal categories are related to this category by default.

The grouping structure can be customised and it is possible to define the nodes to which each new category will be related by default.

Example of a category grouping

In this example, the default $AMOUNT category and two other categories allow for the classification of changes to the original data. Category R1 classifies the data based on the IFRS, while category R2 classifies it according to the national accounting standards. The categories can therefore be grouped based on two views: the “IFRS View” and the “Italian View”. These two classifications can coexist within the grouping.

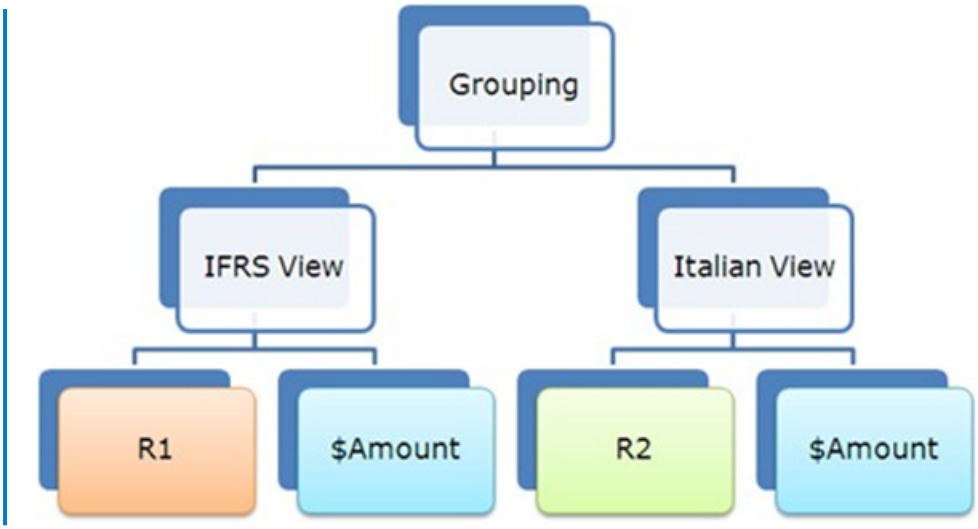

Journal models

It is possible to define a journal model for each 'Company Journal' and 'Consolidation Journal' category, i.e. a list of accounts that are normally contained in the journal. When these models are used when inserting the journal, the required accounts will open automatically.

How to work with categories

Concept Information

CCH Tagetik dimensions 7
Groupings 124

How to create a category

Dimensions > Category> List

1. In the categories list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new category and define the relative type.

   ***Note**: it is necessary to define different attributes depending on the type of category selected.*

3. In the **Relationships** tab, the new category is automatically related to a default node ($). If necessary, replace this node or update with others.
4. Set all the characteristics for the category, then click **Save**: the category will now be listed in the elements table.

How to inherit settings from another category

Dimensions > Category> List

1. In the category elements table, select the category to be defined and then click ⋮ > **Relate as similar category**: the relationship window will open.
2. In **Reference Category**, select the category from which to inherit the settings: all the "inheritable" characteristics for that category will be displayed.
3. Select the characteristics to be inherited, then click **Run**: the category selected in the elements table will inherit all the selected characteristics.

How to relate a category to a node in a hierarchy

Dimensions > Category> List

1. In the categories list, select one or more categories to be related to the same node.
2. In the **Relationships** tab, select the node with which to create the relationship, then click **Save**.

How to recode a node

Dimensions > Category > List > ✨ > Recode Nodes

1. In the categories list, select the category whose code needs to be changed.
2. Select ✨ > **Recode Nodes**: the **Recode Nodes** page will open.
3. Click ⊕: an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the node.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to recode an element

Dimensions > Category > List > ✨ > Recode Elements

1. In the categories list, select the category whose code needs to be changed.
2. Select ✨ > **Recode Elements**: the **Recode Elements** page will open.
3. Click ⊕: an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the element.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to define a journal model

Dimensions > Category> List

***Note**: only users with admin rights can carry out this procedure.*

1. In the categories list, select the 'Company Journal' and 'Consolidation Journal' category for which to create a model.
2. In the **Attributes** tab, under **Advanced**, click **Journal model definition**: the **Journal models** page will open.
3. Click ⊕: an empty row will be added.
4. In the **Attributes** tab, under **Account**, select an account to be inserted into the model, then set all the relative characteristics (e.g. cost centers).
5. To add other accounts to the model, repeat from step 3 onwards.
6. Click **Save** to save the model.


Categories list page

Dimensions > Category> List

Purpose of the page

This page allows you to view all the existing categories and to insert new ones.

What it looks like

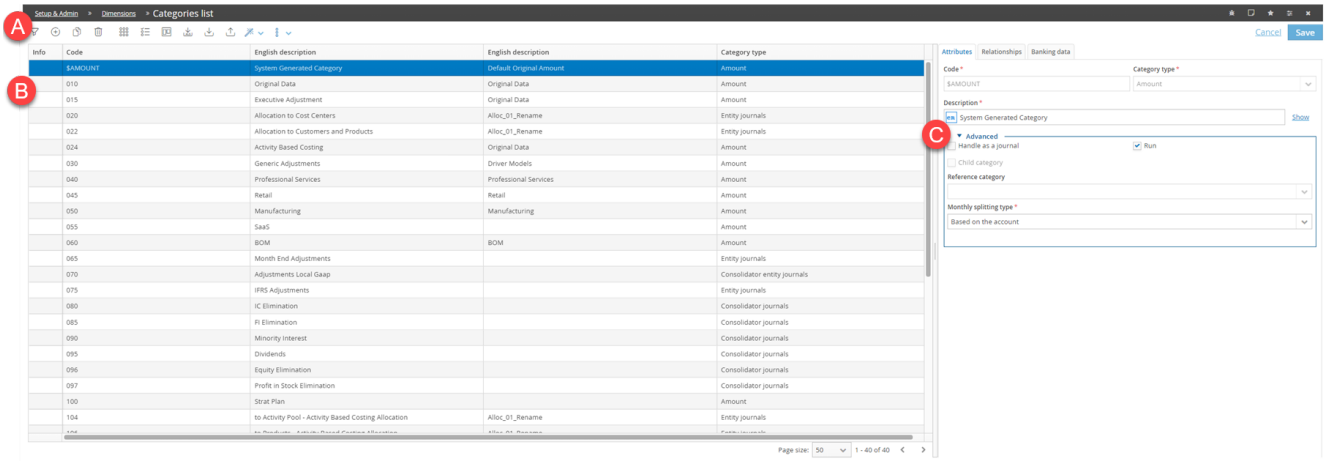

Element	Description
A	Tool bar
B	Categories list
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new category.
	This duplicates a category with the same characteristics as the one selected, with the exception of the code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.

Element	Description
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
	This shows different ancillary functions. For example, it allows you to recode nodes and elements.
	**Relate as similar category**: this creates a new category, using a number of characteristics from an existing category.

Categories list

Dimensions > Category> List

Attributes tab

This tab allows you to define the attributes of a category. They may vary depending on the category.

Please find below the most important fields.

Field	Description	Category type
Default for manual journals		
Periodic journal	This specifies that the journal is periodic and not cumulative.	Only Company Journals
Enable carry-forward	This enables the carrying forward of journals for the year or the next scenario.	Only Company Journals
Exclude Reclassifications and ER	This indicates whether equity reclassification and account reclassification must be carried out for the category.	Only Company Journals
Tax calculation method	This specifies how deferred taxes are calculated.	Only Company Journals
Reverse type	This indicates if and how a journal is reversed automatically by the system in the carry-forward step.	Only Company Journals
Consolidation		
Override CTP for segment set equal to Entity	In the consolidation journals, the counterparty entity segment with the same value as the entity is overridden.	Only Consolidation Journals
Proportional calculation method	This indicates how to determine the proportional calculation percentage.	Only Consolidation Journals
Equity valuation method	This defines what the system should do during the equity valuation step where there is an investee company.	Only Consolidation Journals
Minorities calculation method	This defines how to calculate the minorities.	Only Consolidation Journals
Minorities calculation on <Entity>	This defines how to calculate the minorities for company 1 and company 2 in a relationship.	Only Consolidation Journals
Advanced		
Handle as a journal	The category is handled like a journal category for the calculation of formulas.	Amount only

Field	Description	Category type
To run	Data processing is run on the category.	All
Child category	For this category, diagnostics and data processing are carried out together with another reference category.	All
Reference category	Reference category for the child category used to carry out diagnostics and data processing.	All
Monthly splitting type	Method used to process the data.	All
Journal model definition	This allows for a journal model to be created. : a journal model already exists for the category.	Only Consolidation Journals and Company Journals

Relationships tab

This tab allows you to create relationships between categories using groupings.

Field	Description
Nodes	Nodes to which the category is to be related

Banking data tab

This tab allows you to set the characteristics of the data collected for banking supervision purposes.

Field	Description
Notify on individual data	The category is included in the reporting of individual data.
Notify on 36381	The category is included in the reporting of item 36381.
Notify on other intragroup items	The category is included in the reporting of other intragroup items.


Journal models page

Dimensions > Category> List> Attributes > Journal models

Purpose of the page

This page allows you to create journal models by selecting all the accounts to be inserted therein.

What it looks like

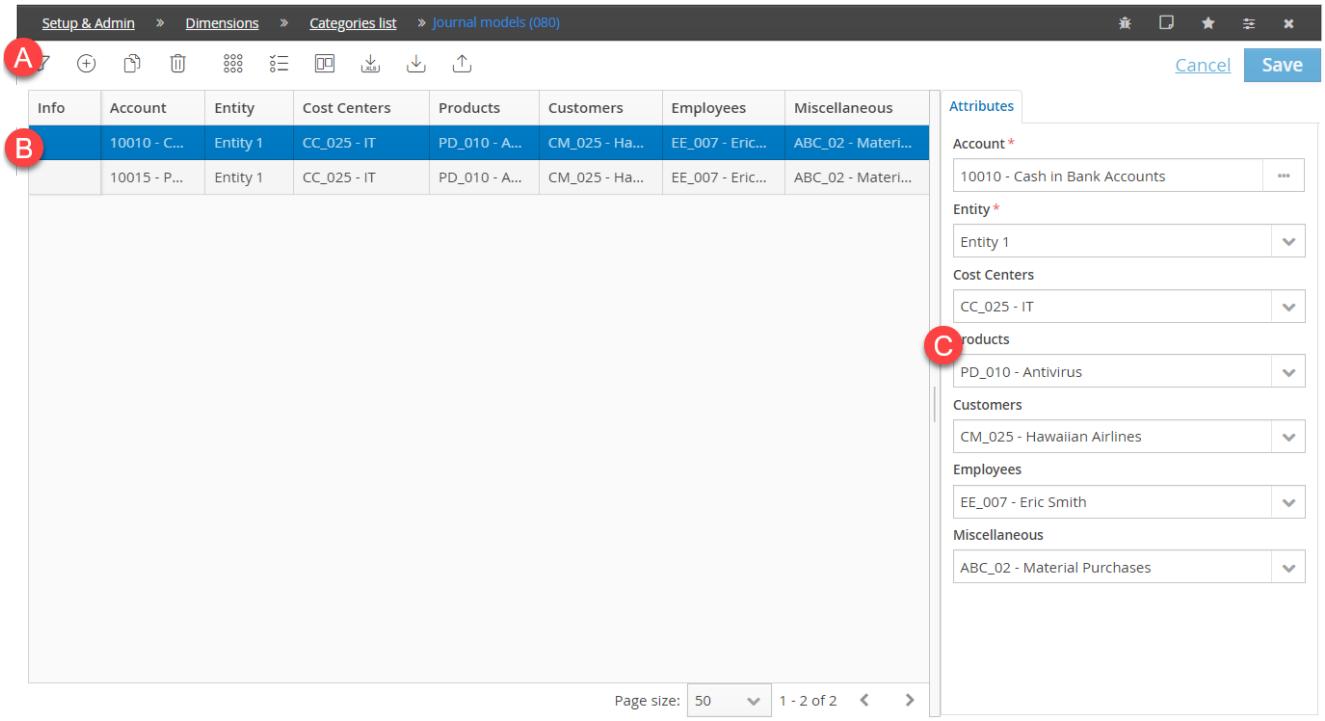

Element	Description
A	Tool bar
B	List of accounts included in the journal
C	Configuration tab for the attributes of the account included in the journal

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert an account inside the model.
	This duplicates the selected row with the same attributes, with the exception of the account code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.

Element	Description
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Dimensions: Currency

Contents

This section covers the following topics:

Currencies: basic concepts 85
How to work with currencies 86
Currencies list page 87
Currencies list 88

Currencies: basic concepts

Definition

The currency is the national currency used to execute the transactions and draw up the financial statements.

Currency types

Tagetik is a multi-currency system that can manage amounts with different types of currency.

Type	Description
Transaction currency	This is the currency in which the transaction is executed. It may be different from the currency of the company that executed the transaction.
Company currency	This is the currency used by the company to draw up and publish its financial statements.
Consolidation currency	This is the currency used to produce the consolidated financial statements. This normally coincides with the holding's company currency.

Company and transaction currencies are used to insert financial statement amounts, intercompany journals or adjustments. The consolidation currency, on the other hand, is used to convert all the amounts from their original currency during the consolidation process.

Each data item thus always has two amounts:

- Transaction/company amount for the original data
- Company/consolidation amount for the consolidation data.

FX rate types

Different types of FX rates may be managed for each currency.

FX rate type	Description
Final FX rate	Year-end FX rates, used for the balance sheet accounts, excluding the equity accounts, which are normally converted at the historical FX rate.
Average FX rate	These FX rates are normally used for the P&L accounts.
Period average FX rate	A different FX rate for each period of the year. This ensures more precise conversions compared with the average FX rate.

Currency conversion method

To convert an amount from currency A to currency B, the system divides the amount by the FX rate for currency A and multiplies the result by the FX rate for currency B.

Preferred currency

The 'preferred currency' has the following functions:

- it is the default currency used to display data in the IC matching cockpit
- it is the currency in relation to which FX rates are inserted.

Reference currency

Using a 'reference currency' allows you to manage data with different units of measurement (for example, thousands and millions) or with a different number of decimal placess, creating 'derived' currencies. The derived currencies are all based on a shared reference currency. To calculate the derived currencies, multiply the FX rate of the reference currency by the reference coefficient.

How to work with currencies

Concept Information

CCH Tagetik dimensions 7

How to create a currency

Dimensions > Currency > List

1. In the Currencies list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new currency and define its characteristics, then click **Save**: the currency will be listed in the data table.

How to recode a currency

Dimensions > Currency > List

1. In the Currencies list, select ✨ > **Recode**: the **Recode - Currency dimension** page will open.
2. Click ⊕: an empty row will be added.
3. In the **Attributes** tab, under **Code**, select the code to be replaced.
4. Under **New Code**, insert the new code to be assigned to the scenario.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

5. Select **Primary** if the code inserted must prevail in case of any conflict.
6. Click **Save** to save the new code.
7. Repeat from step 3 in order to change other codes.
8. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*


Currencies list page

Dimensions > Currency > List

Purpose of the page

This page allows you to view all the currencies used by Tagetik and to insert new ones.

What it looks like

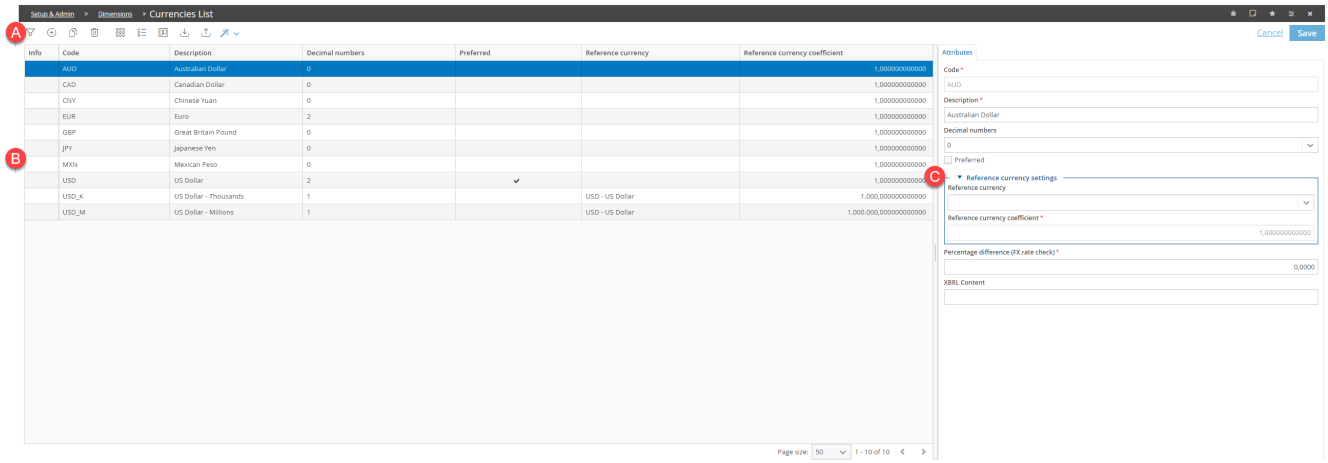

Element	Description
A	Tool bar
B	Currencies list
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new currency.
	This duplicates a currency with the same characteristics as the one selected, with the exception of the code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.

Element	Description
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
	This shows any ancillary functions. **Recode**: this changes the code related to a currency.

Currencies list

Dimensions > Currency > List

Attributes tab

Please find below the most important fields.

Field	Description
Decimals	Number of decimals permitted for data entry
Preferred	The currency is indicated as the preferred currency. Only one currency can be set as 'preferred'.
Alternative codes	
Alternative code <n>	Another code that may identify the currency
Reference currency settings	
Reference currency	The currency to use in order to manage data expressed in a different way (e.g. different units of measurement, or a different number of decimal places)
Coeff. Reference currency	Transformation coefficient to convert from the currency indicated to the reference currency
Percentage difference (FX rate check)	Percentage used in diagnostics to check that the FX difference between the amount in the document currency and the amount in the financial statement currency does not exceed a certain percentage
XBRL Content	Value to assign to the measure sub-element in order to specify the unit of measurement used for the value of a 'monetary' item in the creation of an XBRL instance template

Variation/detail types

Contents

This section covers the following topics:

Variation/Detail types: basic concepts 89
How to work with variation/detail types 90
Variation/detail types list page 92
Variation/Detail types list 94

Variation/Detail types: basic concepts

Definition

Variation and Detail types classify the variation accounts and detail accounts, and also identify the type of variation in the variation accounts.

Var. - Det. types

Type	Description
Variation	This shows the variations over time for a normal account (e.g. initial balance, investments, etc.)
Detail	This shows a detail of a normal account (e.g. revenue breakdown by geographic area, product type, etc.)

The role of variation/detail types

The variation/detail types have the following roles:

- They simplify the set-up of the chart of accounts and the control groups. In fact, they allow for control groups to be automatically generated and updated; the control groups link a normal account with the variation accounts or detail accounts generated by the variation/detail types.
- They create data entry forms in a simple way and allow for reports to be generated based on the control group structure.

Var. - Det. types grouping

Variation/detail types can also be grouped together. For example, it is possible to create a node that groups the variation/detail types representing a variation of the financial investment variation accounts and another that groups those of the equity variations. These nodes are useful for a number of purposes:

- to generate reports including or excluding the nodes
- to select several variation/detail types included in the same grouping

How to work with variation/detail types

Concept Information

CCH Tagetik dimensions 7
Groupings 124

How to create a variation/detail type

Dimensions > Variation/Detail types > List

1. In the variation/detail types list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new variation/detail type and define all the relative characteristics, then click **Save**: the variation/detail type created will be listed in the data table.

How to recode a variation/detail type

Dimensions > Variation/Detail types > List

This procedure allows you to quickly modify the code attributed to one or more variation/detail types.

1. In the variation/detail types list, select > **Recode**: the **Recode - Var. - det. types** page will open.
2. Click ⊕: an empty row will be added.
3. In the **Attributes** tab, under **Code**, select the code to be replaced.
4. Under **New Code**, insert the new code to be assigned to the scenario.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

5. Select **Primary** if the code inserted must prevail in case of any conflict.
6. Click **Save** to save the new code.
7. Repeat from step 3 in order to change other codes.
8. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to relate variation/detail types to nodes

Dimensions > Variation/Detail types > List

1. In the variation/detail types list, select one or more variation/detail types to be related to the same node.
2. In the **Relationships** tab, select the node with which to create the relationship, then click **Save**.

How to create variation/detail type nodes

Dimensions > Variation/Detail types > Grouping

1. In the list of variation/detail type groupings, select the point where the node is to be inserted.
2. Click ; a row will be added in the table for the new node.

3. In the **Attributes** tab, define the characteristics of the node, respecting the following conditions:

If...	Then...
the node contains Detail accounts	do not include more than one element for which one of the following options is selected: • **Balancing** • **Calculated Amount**
the node contains Variation accounts	do not include more than one element for which one of the following options is selected: • **Balancing** • **Initial balance** • **Cancel** • **Calculated amount**

*IMPORTANT: for fields with several options (e.g. **Merger** or **Modify %**), each option may only be used by a single variation. For example, the **Entry** option cannot be selected in the **Merger** field if, in another field, the **Entry/Exit** merger option has already been selected.*

4. Click **Save**.

How to add variation/detail types to a node

Dimensions > Variation/Detail types > Grouping

1. In the list of variation/detail type groupings, select the point where the variation/detail type is to be inserted.
2. Click and a row will be added in the table for the new variation/detail type.
3. In the **Attributes** tab, define the characteristics of the variation/detail type.
4. In the **Relationships** tab, define the relationship with any other nodes, then click **Save**.


Variation/detail types list page

Dimensions > Variation/Detail types > List

Purpose of the page

This page allows you to view all the existing variation/detail types and to insert new ones.

What it looks like

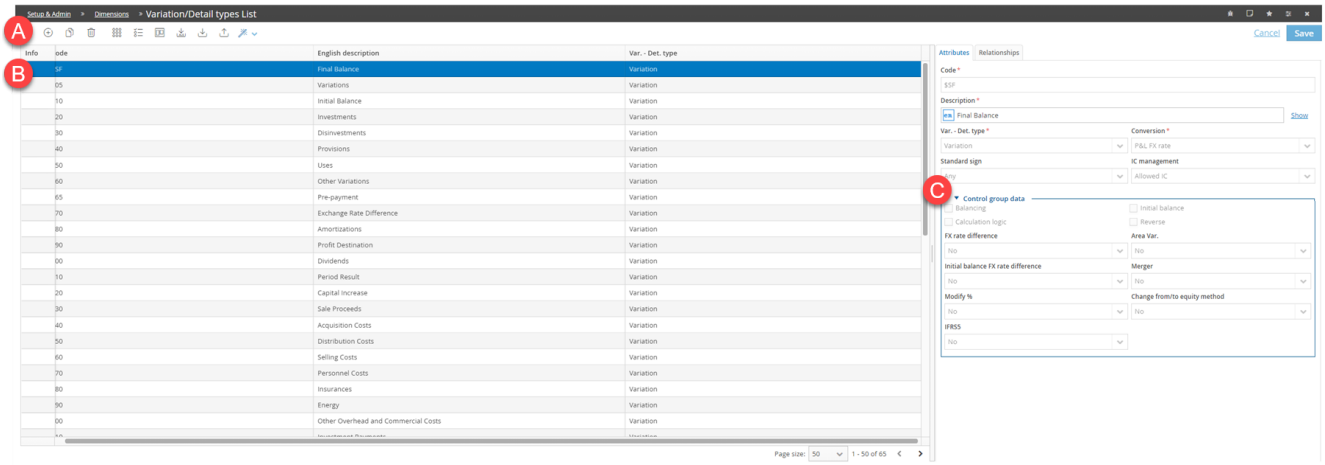

Element	Description
A	Tool bar
B	Variation/Detail types list
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new category.
	This duplicates a category with the same characteristics as the one selected, with the exception of the code.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
XLS	This exports data in Excel format. This file cannot be re-imported into Tagetik.

Element	Description
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
	This shows any ancillary functions. **Recode**: changes the code related to a variation/detail type.

Variation/Detail types list

Dimensions > Variation/Detail types > List

Attributes tab

Please find below the most important fields.

Field	Description	Values
Var. - Det. type	Var. - Det. type	**Detail**: detail of a normal account **Variation**: variation of a normal account
Conversion	FX rate to be applied when converting into the consolidation currency.	**P&L FX Rate**: This overrides the settings of the default conversion rule and replaces them with the chosen FX rate (average FX rate/period average FX rate/year-end FX rate). Used for the P&L, detail accounts and other variation accounts. **Average FX rate**: This converts the cumulative amounts to the average FX rate present in the FX rates table. **Period average FX rate**: This converts the amount for the period to the period average FX rate present in the FX rates table and then adds it to the converted data of the previous period. **Final FX rate**: This converts cumulative amounts to the final FX rate present in the FX rate table. Used for the balance sheet, detail accounts and 'other stock' accounts. Equity accounts are excluded, as these are normally converted at the historical FX rate. **Historical FX rate**: This stratifies the conversion based on the period FX rate. There is no FX rate numeric value. In order to obtain the final converted value, the system adds the converted variations to the initial balance, each based on the type of FX rate indicated in the relative table. Used for equity accounts. **Prev. P&L FX rate**: Applied to the reserve variations that receive the distribution of profit and the balance sheet net result for the previous year. Only used for variation accounts and detail accounts. **Prev. Final FX rate**: Applied to the accounts representing the initial balances. However, these accounts are actually calculated on the basis of the carryforward processing operations, and are not the result of conversions. Only used for variation accounts and detail accounts. **Initial balance FX rate**: this converts incoming area variations or percentage variations in the case of a decrease of accounts converted at the historical FX rate, when the entry or reduction occur at the start of the period, or when the amount refers to carrying forward. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the **Reference account for Initial balance/Year-to-date average FX rate** which allows you to calculate the conversion coefficient. **Year-to-date average FX rate**: this converts outgoing area variations or the percentage variance in the case of a decrease of accounts converted at the historical FX rate, i.e. when the exit or reduction occur during the period and other operations alter the value of the account. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the conversion coefficient in **Reference account for Initial balance/Year-to-date average FX rate**. **None**: This is applied to accounts that are not subject to currency conversion. This is used for 'other variation', 'stock' and 'initial balance variation' accounts.

Field	Description	Values
Standard sign	This determines the sign with which data can be inserted into the account	**Equal to the parent account sign** **Opposite to the parent account sign** **Any**
IC management	The account may receive intercompany values.	-
Control group data		
Balancing	The detail/variation account used to allocate any unbalanced amounts caused by rounding for currency conversion between detail/variation accounts and parent accounts.	-
Initial balance	The account that represents the initial balance; carry forward data processing feeds this account with the final balance of the previous scenario.	-
Calculation rule	The account used by the system to generate the calculation rule, if the rule for creating the calculation rule is “Calculate variation/detail as difference”.	-
Cancel	This identifies the account used by the system to cancel the journal; carry forward data processing feeds this account with an amount equal to the initial balance, but with the opposite sign.	-
FX rate difference	Variation account(s) to which to allocate the FX rate difference generated by the currency conversion of variations, if the relative parent account is not converted at the historical FX rate.	-

Field	Description	Values
Var. Area	Variation account(s) to which to allocate the amounts created for the automatic management of entry and exit variations regarding the consolidation area.	-
Initial Balance FX rate difference	Variation account to which to allocate the FX rate difference generated by the currency conversion of initial balance variations, if the relative parent account is not converted at the historical FX rate.	-
Merger	Variation account(s) to which to allocate the amounts created for the automatic management of mergers.	-
Modify %	Variation account(s) to which to allocate the amounts deriving from the variation of the proportional calculation percentage.	-
Change to equity method	Variation account(s) to which to allocate the amounts originating from the change to the equity method and from the equity calculation in the transition from the line-by-line/proportional to the equity method.	-
IFRS5	Variation account(s) used to allocate the reclassification amounts from IFRS5 data processing.	-

Relationships tab

This tab allows you to create relationships between variation/detail types using the nodes.

Field	Description
Nodes	Nodes to which the variation/detail type is to be related

Control groups

Contents

This section covers the following topics:

Control groups: basic concepts 97
How to define control groups 100
How to create different types of control groups 101
How to work with control groups 103
Control groups page 105
Control groups 106
Definition of Set 1 accounts 109
Definition of Set 2 accounts 110
Recode - Control groups page 111
Recode - Control groups attributes 112

Control groups: basic concepts

Definition

A control group is a set of accounts between which a relationship is created in order to achieve two objectives:

- to check the balancing or coherence for the data inserted
- to calculate detail accounts or variation accounts

Comparisons are carried out between data of accounts belonging to two groups:

- **Set 1**, i.e. the accounts for which the detail or variation is provided.
- **Set 2**, i.e. the detail accounts or variation accounts representing the entries of Set 1 accounts.

***Note**: for the Variation and Detail control groups, Set 1 identifies the parent accounts and Set 2 identifies the child accounts.*

Calculation rules generated by the control groups

Through the control groups, it is possible to generate calculation rules and obtain the following results:

- calculate the parent account as the sum of the detail/variation accounts. In this case, the data are inserted in the detail or variation accounts, and the amount of the normal account is obtained as the sum of its entries or details.
- calculate a detail/variation account as the difference between parent accounts and the remaining detail/variation accounts.

Example control group for coherency check

In this example, four child accounts refer to one parent account. The sum of the detail accounts corresponds to the parent account amount.

Account name	Amount	Account type
Trade receivables	**€ 100,000**	**Normal parent account**
Trade receivables: 0-30 days	€ 10,000	Detail child account
Trade receivables: 30-60 days	€ 10,000	Detail child account
Trade receivables: 60-90 days	€ 80,000	Detail child account
Σ Detail accounts	**€ 100,000**	**Sum of detail accounts**

Example of control group to automatically calculate an account

In this example, a number of detail accounts have been related to a trade receivables account in order to break down the amounts that will be paid with different due dates (30-60 days, 60-90 days, etc.).

Account name	Amount	Account type
Trade receivables: 0-30 days	€ 10,000	Detail child account
Trade receivables: 30-60 days	€ 10,000	Detail child account
Trade receivables: 60-90 days	€ 80,000	Detail child account
Total trade receivables = Σ Detail accounts	**€ 100,000**	**Parent account calculated as the sum of the detail accounts**

Control group type

It is possible to create the following types of control groups:

Type	Description
Detail	This relates the accounts to the relative details. *For example: revenue breakdown by geographic area, product type, etc.*
Variation	This relates balance sheet accounts, memorandum accounts or 'other stock' accounts to the respective entries made over the course of the year. *For example: purchases, sales, equity, etc.*
Balancing	This defines free balancing rules between accounts, details and variations. *For example: the rule that checks that the depreciation detail included in the variation form of tangible asset variations, segmented by asset type, corresponds to the row of the P&L account that contains the depreciation of tangible assets at global level.*
Coherence	This defines rules that check, if there is an amount, whether there is another amount or another account. *For example: if there are financial debts, there must also be the relative interest expenses.* Coherency may be mono-directional, i.e. the presence of amount A implies the presence of amount B, or bi-directional, i.e. the presence of amount B may also imply the presence of amount A.

System control groups

The following system control groups are predefined; they cannot be deleted, but rather only some of their details may be modified:

Name	Description
$PL	This checks that the P&L is balanced, i.e. that the P&L result account is equal to the sum of all the other normal P&L accounts, with the sign changed.
$RESFLOW	This checks that the balance sheet result accounts have the same amounts as the balance sheet result variation accounts.
$RESULT	This checks that the balance sheet result account is the same as the P&L result account.
$BS	This checks that the balance sheet is balanced, i.e. that the balance sheet result account is equal to the sum of all the normal balance sheet accounts, with the sign changed.

Control operators

In order to create calculation and checking rules within the control groups, more complex operators are also available compared with the basic ones (>, <, =, ...).

Operator	Description
Coherence	If the algebraic sum of the values in the **parent accounts** is not zero, then also the algebraic sum of the values present in the **child accounts** must be different to zero.
Bi-directional coherence	• If the algebraic sum of the values in the **parent accounts** is not zero, then also the algebraic sum of the values present in the **child accounts** must be different to zero. • If the algebraic sum of the values in the **parent accounts** is zero, then the algebraic sum of the values present in the **child accounts** must also be zero.
Coherence by element	If the algebraic sum of the values in at least one of the **parent accounts** is not zero, then also the algebraic sum of the values present in at least one of the **child accounts** must be different to zero.
Bi-directional coherence by element	• If the algebraic sum of the values in at least one of the **parent accounts** is not zero, then also the algebraic sum of the values present in at least one of the **child accounts** must be different to zero. • If the algebraic sum of the values in all the **parent accounts** is zero, then the algebraic sum of the values present in all the **child accounts** must also be zero.

Groupings of control groups

It is possible to organise control groups in groupings. These groupings are useful:

- in reporting
- to select all the control groups belonging to the same group at the same time

Example of the creation of a control group

In this example, starting from the following normal accounts:

- Tangible assets
- Intangible assets


and from three variation types:

- Initial balance
- Amortisation/Depreciation
- Other variations

The **Create details and variations** function generated, at the same time:

- six new variation accounts
- two variation control groups

The two normal accounts will be the parent accounts for each control group.

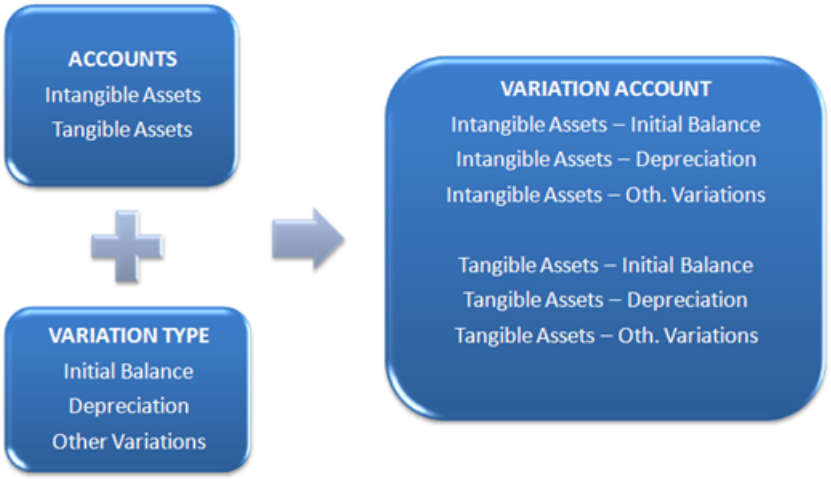

Updating control groups

The control groups need to be updated in the following cases:

- when new variation/detail types are added to the variation/detail types grouping node used to generate the control group
- when changes are made to the attributes of the variation/detail types related to the variation/detail types grouping node used to generate the control group

How to define control groups

Concept Information

CCH Tagetik dimensions 7
The Account: basic concepts 35
Groupings 124

Sequence of procedures to create a control group

1. "How to create a control group" below
2. "How to define the Set 1 accounts of a control group" on the facing page
3. "How to define the Set 2 accounts of a control group" on the facing page.

How to create a control group

Dimensions > Control groups > List

1. In the table listing existing control groups, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert a code for the new control group and define all of its other characteristics.
3. In the **Diagnostics** tab, define the characteristics of the checks to be run on the accounts.
4. In the **Relationships** tab, the new account will be automatically related to a default hierarchy ($) which organises the accounts by nature and type. If necessary, replace this hierarchy or update with others.
5. In the **Restrictions** tab, set the custom dimensions that the control group must take into consideration.
6. In the **Calculation Logics** tab, define the calculation logics that must generate the result accounts.
7. Click **Save**: the control group created will be listed in the data table.

How to define the Set 1 accounts of a control group

Dimensions > Control groups > List

***Note**: for Variation and Detail control groups, this group of accounts is called 'parent accounts'.*

1. Select the control group for which to define the Set 1 accounts.
2. In the **Attributes** tab, in the **Accounts Definition** section, click **Define Set 1**, and the page will open to define the Set 1 accounts.
3. Click ⊕: an empty row will be added.
4. In the **Attributes** tab, select whether or not to include the account, or the accounts making up a node, in the control group, and then select the account or the node to be considered as a Set 1 account; then click **Save**.
5. Repeat for all the Set 1 accounts to be defined.
6. To view the list of Set 1 accounts and the relative Set 2 accounts contained in any nodes, click **Definition result**.

***IMPORTANT**: be careful with the order in which accounts are inserted or excluded, as Tagetik will carry out the operations in exactly the same order in which they are listed, with the next operation prevailing over the previous one.*

How to define the Set 2 accounts of a control group

Dimensions > Control groups > List

***Note**: for Variation and Detail control groups, this group of accounts is called 'child accounts'.*

1. Select the control group for which to define the Set 2 accounts.
2. In the **Attributes** tab, in the **Accounts Definition** section, click **Define Set 2**, and the page will open to define the Set 2 accounts.
3. Click ⊕: an empty row will be added.
4. In the **Attributes** tab, select whether or not to include the account, or the accounts making up a node, in the control group, and then select the account or the node to be considered as a Set 2 account.
5. If necessary, define the variation/detail type for which to run the check, and then click **Save**.
6. Repeat for all the Set 2 accounts to be defined.
7. To view the list of Set 1 accounts and the relative Set 2 accounts contained in any nodes, click **Definition result**.

***IMPORTANT**: be careful with the order in which accounts are inserted or excluded, as Tagetik will carry out the operations in exactly the same order in which they are listed, with the next operation prevailing over the previous one.*

How to create different types of control groups

Concept Information

CCH Tagetik dimensions 7
The Account: basic concepts 35
Groupings 124

How to create a variation control group from the control groups list table

Dimensions > Control groups > List

1. In the table listing existing control groups, click ⊕: an empty row will be added.
2. In the **Control type** section, select **Variation**.
3. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**: the control group created will be listed in the data table.

How to create a variation control group from the account elements table

Dimensions > Account > List

1. In the account elements table, select the parent account, and then click ⋮ > **Create Variations**: the**Create Variations, Control groups, Calculation logics** window will open.
2. In the **Control Groups** section, define the characteristics of the control group, and then click **OK**.

How to create a detail control group from the control groups list table

Dimensions > Control groups > List

1. In the table listing existing control groups, click ⊕: an empty row will be added.
2. In the **Control type** section, select **Detail**.
3. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**: the control group created will be listed in the data table.

How to create a detail control group from the account elements table

Dimensions > Account > List

1. In the account elements table, select the parent account, and then click ⋮ > **Create Details**: the**Create Details, Control groups, Calculation logics** window will open.
2. In the **Control Groups** section, define the characteristics of the control group, and then click **OK**.

How to create a balancing control group

Dimensions > Control groups > List

1. In the table listing existing control groups, click ⊕: an empty row will be added.
2. In the **Control type** section, select **Balancing**.
3. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**: the control group created will be listed in the data table.

How to create a coherence control group

Dimensions > Control groups > List

1. In the table listing existing control groups, click ⊕: an empty row will be added.
2. In the **Control type** section, select **Coherence**.
3. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**: the control group created will be listed in the data table.

How to create a single control group for a set of accounts

Dimensions > Account > List

This allows you to create a new control group starting from a set of parent accounts and to insert all new child accounts into the same group. This is useful in the case of several accounts that form a financial statement item, relating them to details or variations that regard said financial statement item in its entirety.

1. Click ⋮☰ to enable multiple selection, and then, in the account elements table, select the accounts for which to create the control group.
2. Click ⋮ > **Create Details**: the **Create Details, Control groups, Calculation logics** window will open.
3. In **Control groups**, select **One for all Parent Accounts**.
4. Define all the characteristics of the control group in the various sections, and then click **OK**: the control group will be created with the relative calculation logics.

How to create a control group for each account in a set of accounts

Dimensions > Account > List

This allows you to create a separate control group for each account considered as a parent account. This is useful to create a series of control groups in order to analyse the detail or variation of several accounts.

1. Click to enable multiple selection, and then, in the account elements table, select the accounts for which to create the control group.
2. In the account elements table, select the parent account, and then click > **Create Details**: the**Create Details, Control groups, Calculation logics** window will open.
3. In **Control groups**, select **One for each Parent Account**.
4. Define all the characteristics of the control groups in the various sections, and then click **OK**: for each parent account selected, a control group will be created with the relative calculation logics.

How to work with control groups

Concept Information

CCH Tagetik dimensions 7
The Account: basic concepts 35
Groupings 124

How to modify a control group

Dimensions > Control groups > List

1. In the control groups list table, select the group to modify.
2. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**.

How to recode a control group

Dimensions > Control groups > List

1. In the control groups list table, select the group whose code needs to be modified.
2. Select > **Recode**: the **Recode - Control groups** page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the control group.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to relate a control group to a node in a hierarchy

Dimensions > Control groups > List

1. In the control groups list table, select one or more groups to be related to the same node.
2. In the **Relationships** tab, select the node with which to create the relationship and then click **Save**.

How to update control groups

Dimensions > Control groups > List

This procedure allows you to update control groups, which have been automatically created using variation/detail types, when it is necessary to add variation accounts or detail accounts for a parent account that is already inserted in a control group. This is done after having created a dedicated variation/detail type and after this has been added to the grouping used for the control group.

1. In the control groups list table, select the group to update.
2. Select ⋮ > **Update control groups**: the **Update control groups** page will open.
3. Define the update mode and any custom dimension restrictions.
4. Click **OK** to start the update process.

   ***Note**: this operation may take several minutes.*

How to exclude data for specific custom dimensions

Dimensions > Control groups > List

For each control group, it is possible to exclude data for specific custom dimensions from being collected.

1. In the control groups list table, select the group for which to create restrictions.
2. In the **Restrictions** tab, set the desired type of restriction for each custom dimension shown.
3. Click **Save**: for custom dimensions for which a restriction has been set, the **Define** command will be displayed together with the ⊗ symbol, indicating that there are elements for which the control group is to be restricted.
4. Click **Define**: the specific page will open allowing you to define the restrictions.
5. Click ⊕ to add an element.
6. In the **Attributes** tab, set whether to include or exclude the element, and select the single custom dimension elements or nodes of a non-time-dependent hierarchy defined for the custom dimension.
7. To enable a hierarchy node, but exclude an element from it, you must first set the node and then the exception on the next line.

   ***IMPORTANT**: The system implements restrictions based on the order in which they are inserted in the definition window. If two restrictions are in conflict, the one implemented last in the sequence will prevail.*

8. Click **Save**.
9. To view a list of all the selected elements, click **Definition result**.

How to copy custom dimension exclusions from another control group

Dimensions > Control groups > List

1. In the control groups list table, select the group from which to copy custom dimension restrictions.
2. Select ⋮ > **Copy Custom Dimension Restrictions from**: the **Copy Custom Dimension Restrictions from** page will open.
3. Select the control group from which to copy custom dimension restrictions.
4. Select the desired custom dimensions, and then click **Run**.

How to generate a report with the characteristics of a control group

Dimensions > Control groups > List

It is possible to create reports in Excel format that contain specific attributes extracted from the control groups. To define the characteristics to be included in the report, follow the below procedure:

1. In the control groups list, select 📄 > **Control groups report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the control groups to be included in the report.
3. In the **Output** section, select the information from the control groups to be included in the report.
4. Click **OK**: the requested report will be generated in Excel format.

How to generate a report on custom dimension restrictions

Dimensions > Control groups > List

It is possible to create reports containing information about specific custom dimensions managed for the control groups listed. To define the data to be included in the report, follow the below procedure:

1. Select > **Restrictions on custom dimensions report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the filters to define the control groups that will be included in the report.
3. In the **Output** section, define how to break down and group the information in the report. For each type of output selected, a dedicated tab will be created in the report.
4. Click **OK**: the requested report will be generated in Excel format.


Control groups page

Dimensions > Control groups > List

Purpose of the page

This page allows you to create and modify control groups.

What it looks like

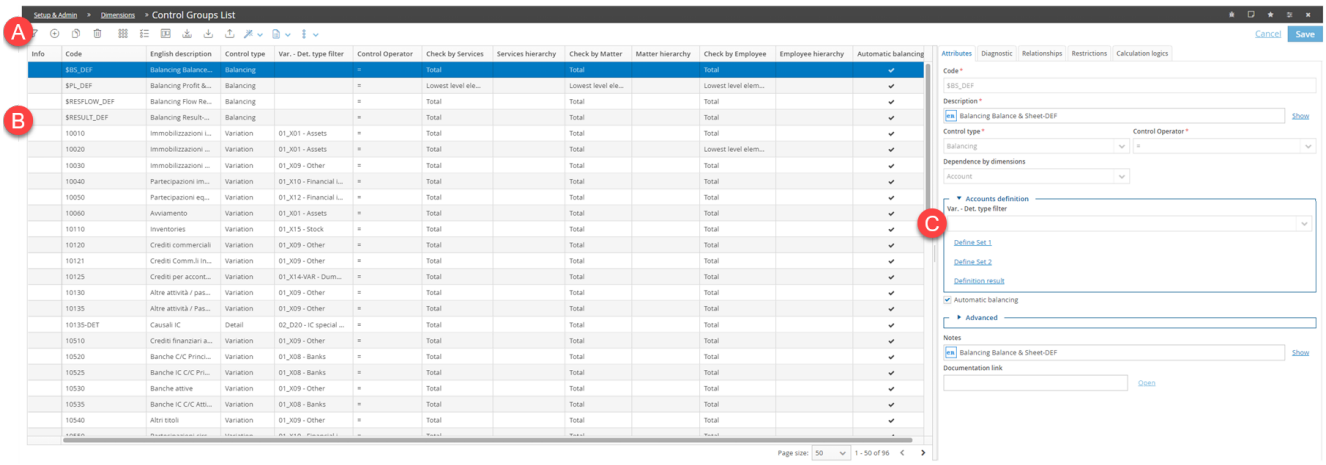

Element	Description
A	Action buttons
B	Data table
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new control group.
	This duplicates a control group with the same characteristics as the one selected, except for the code and the relationships of the underlying Set 1 and Set 2 accounts.

Element	Description
	This deletes the control group contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
	This shows any ancillary functions. **Recode**: this modifies the code related to a control group.
	This sets the parameters to generate Excel reports. **Restrictions on custom dimensions report**: this generates reports on the restrictions applicable to the different accounts. **Control groups report**: this generates reports on the different types of control groups.
	This shows a number of functions that can be run on the selected control groups. **Update control groups**: this updates the control groups with the latest changes made to the associated accounts. **Copy Custom Dimension Restrictions from**: this copies the exclusions for specific custom dimensions from another control group. Duplicate control groups: this duplicates a control group with the same characteristics as the one selected, with the exception of the code.

Control groups

Dimensions > Control groups > List

Attributes

Please find below the most important fields.

Field	Description	Values
Control type	Type of control group created.	Detail Variation Balancing Coherence
Control operator	Operator used for balancing check	Coherence Equality and relational operators

Field	Description	Values
Dependence by dimensions	Any relationships between accounts and the various custom dimensions.	**Account**: the control group is only defined for the account. **Account/ <Custom Dimension>**: the control group is defined in relation to the account and the custom dimension indicated.
Accounts definition		
Var. - Det. type filter	Only if the Dependence by dimensions field is set to Account. Node of the var. - det. types grouping with which to generate the control group.	-
Define Set 1	This defines the accounts or account nodes to be considered as Set 1 accounts (parent).	-
Define Set 2	This defines the accounts or account nodes to be considered as child accounts.	-
Definition result	This displays the lists of parent accounts and child accounts.	-
Balance automatically	The control group is made to be balanced automatically. ***Note**: any unbalanced amounts are reported in a dedicated variation account (Balancing variation).*	-
Advanced		
Validity	This defines a time interval within which the control group may be used.	-
Include in the process if	This defines the conditions for the control group to be used, for data collection purposes.	-
Documentation link	This opens a page that is external to Tagetik with additional information.	-

Diagnostics tab

This tab allows you to define the checks to be run through the control group.

Please find below the most important fields.

Field	Description	Values
Severity	Consequences triggered by a balancing error.	**Blocking**: the error blocks the submission process. **Non-Blocking**: the error is flagged up but does not block the submission process.
Data types to check	Type of data checked by the diagnostics carried out on the control group.	**Gross**: runs diagnostics on gross amounts. **Net**: runs diagnostics on net amounts. **Intercompany**: runs diagnostics on intercompany data.
Advanced		
Check original data on	Currency used to carry out the control group balancing check.	**Local currency**: this uses the financial statement currency. **Transaction currency**: this uses the transaction currency.
Check original data for	The level at which the control group checks the 'amount' type categories.	**Company**: the check is carried out for each individual company. **Contributor node**: the check is carried out on the total of the amounts for the companies belonging to a contributor node. **Company and contributor node**: the check is carried out both at company level and at contributor node level.
Check consolidation journals by Company	For 'consolidation journal' categories, this states whether the control group is to be checked only by the journal number or by the combination of journal number/company.	-
Dimensions check		
Check by <custom dimension>	Level of detail of the check carried out within the custom dimension indicated.	Total Lowest level elements Hierarchy nodes
<Custom dimension> hierarchy	This allows you to specify a hierarchy node if the custom dimension check is enabled and the 'Hierarchy nodes' mode is selected.	-

Relationships tab

This tab allows you to create relationships between the selected control groups and nodes of control group hierarchies.

Field	Description
Nodes	Node within a control group hierarchy.

Restrictions tab

This tab allows you to set the custom dimensions excluded by the control group.

Please find below the most important fields.

Field	Description	Value
<Custom dimension> restrictions	Restrictions for the specific custom dimension	**None**: all custom dimensions are accepted. **Restricted**: it is possible to define restrictions on enabled custom dimensions.
Counterparty rule for IC checks	This allows you to enable counterparty dynamic groups in IC checks.	-

Calculation Logics tab

This tab allows you to define the operations carried out through the control group in order to generate calculation rules.

Please find below the most important fields.

Field	Description
Create	This defines whether the control group generates one or more calculation rules.
Calculate	This indicates the criteria used to generate the calculation rule.
Data to calculate	
Run on Gross amounts	The account generated is calculated based on gross amounts.
Run on IC amounts	The account generated is calculated based on intercompany amounts.
Run on journals	The account generated is calculated based on journals.
Other options	
Compensate Company on journals	In a costs/revenues elimination journal, this avoids the system generating two rows with an opposite sign. Only enabled if the account generated is calculated based on journals.
Keep CTP on journals	The counterparty is kept in the account calculation based on journals. Only enabled if the account generated is calculated based on journals.
Keep original currency	The company currency amount and the transaction currency amount are managed separately,

Definition of Set 1 accounts

Dimensions > Control groups > List > select control group > Accounts definition > Define Set 1

Attributes tab

Field	Description
Action	This defines whether to include or exclude the account, or the node of accounts, from the control group.
Account	Account or node of accounts to be defined as a Set 1 account.

Definition of Set 2 accounts

Dimensions > Control groups > List > select control group > Accounts definition > Define Set 2

Attributes tab

Field	Description
Action	This defines whether to include or exclude the account, or the node of accounts, from the control group.
Account	Account or node of accounts to be defined as a Set 2 account.
Variation / Detail type	Var. - Det. Type used to define the Set 2 account.
Change sign	This indicates that the diagnostic check has to consider the account or node with the accounting sign or opposite sign.
Balancing	This account is used to allocate any unbalanced amounts caused by rounding between Set 1 and Set 2 accounts. If none are selected, the system uses the account with the highest amount in absolute terms. ***Note**: A control group may only have one Set 2 account with this function. It is not possible to select a node.*
Initial balance	The account is to be considered as the initial balance. In this case, the account is filled in automatically. It cannot be a node. ***Note**: A control group may only have one Set 2 account with this setting.*
Cancel	The account is used to cancel the journal. ***Note**: A control group may only have one Set 2 account with this setting.*
Calculation rule	The account is used to generate the calculation logic, if there is a “Calculate variation/detail as difference” creation rule for the calculation rule.
FX rate difference	The account is used to insert the FX rate differences generated by variations currency conversion.
Var. Area	The account is used to insert the amounts originating from the automatic management of variations to the consolidation area.
Initial balance FX rate difference	The account is used to insert the FX rate differences generated by the currency conversion of initial balance variations. If the relative parent account is not converted at the historical FX rate.
Merge	The account is used to insert the amounts originating from the automatic management of mergers.
Modify %	The account is used to insert the amounts originating from the variations to the proportional calculation percentage.
Change to equity method	The account is used to insert amounts originating from the change to the equity method and from the equity calculation in the transition from the line-by-line/proportional to the equity method.
IFRS5	The account is used to insert the reclassification amounts from application of IFRS5.
Reclassification for changed account with equity valuation method	The account is used if the financial investment account changes and it is necessary to reclassify the initial balance of the equity valuation journal.


Recode - Control groups page

Dimensions > Control groups > List > > Recode

Purpose of the page

This page allows you to modify control group codes.

What it looks like

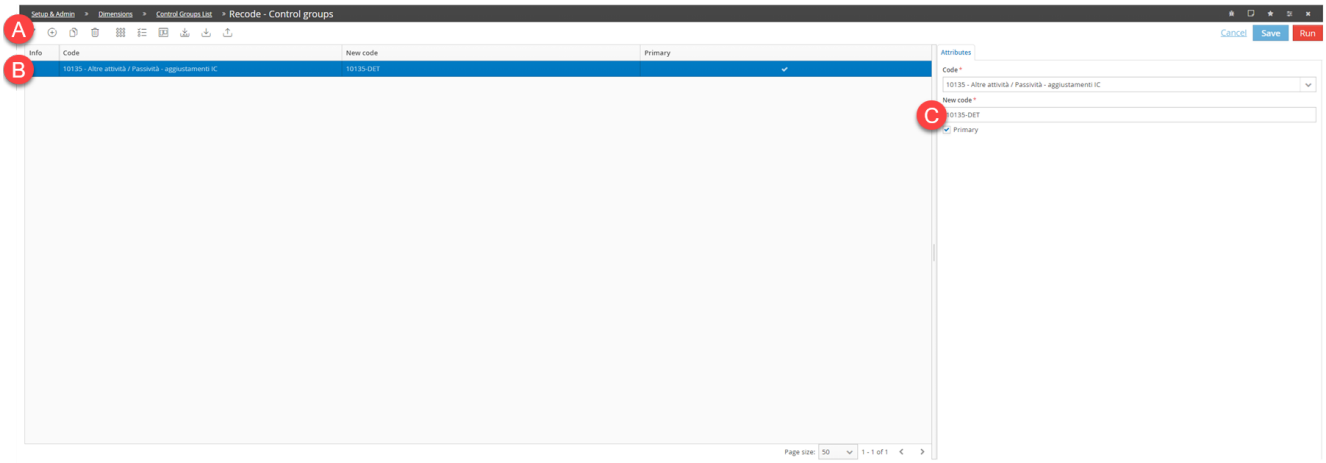

Element	Description
A	Tool bar
B	List of codes in the process of being recoded
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new code.
	This adds a new row with the same recoding code as the one selected. This is useful to merge several accounts into one.
	This deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.

Element	Description
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Recode - Control groups attributes

Dimensions > Control groups > List > > Recode

Attributes tab

Please find below the most important fields.

Field	Description
Code	Original code
New code	New code to be assigned to the control group
Primary	This indicates that the new code must prevail in case of any conflict with other previously defined codes.

Hierarchies

Contents

This section covers the following topics:

Hierarchies: basic concepts 113
How to work with hierarchies 115
Structure and relationships for accounts page 116
Structure and relationships page for entities 118
New hierarchy 119
Node creation 120
Account hierarchies page 120
Account hierarchy attributes 121
Entity hierarchies page 122
Entity hierarchy attributes 123

Hierarchies: basic concepts


Definition

The hierarchy is a multi-level structure that allows you to aggregate and organise several elements. Hierarchies have the following characteristics:

- multi-level structure with unlimited depth, i.e. the elements may be aggregated to different levels.
- single-parent structure, i.e. each child element in the hierarchy may be related to a single parent element.
- unlimited alternative hierarchies, i.e. it is possible to create an unlimited number of different hierarchies for each dimension.

***Note**: alternative hierarchies for the same dimension may be crossed during the reporting stage.*

Example hierarchy

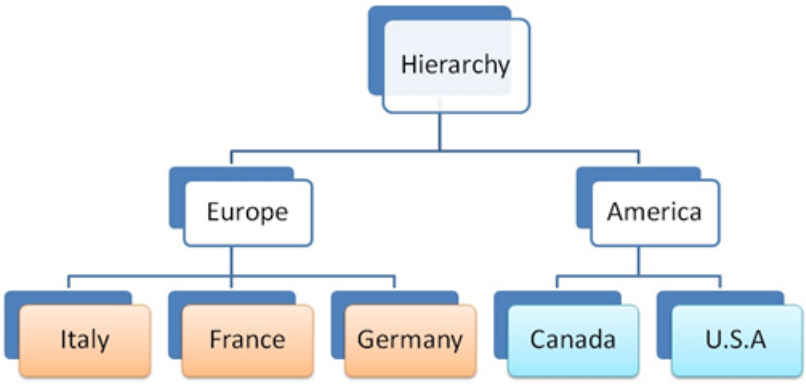

In this example, the elements are grouped together based on geographic area, on three levels. The Italy node is related to the Europe node and cannot be related to the America node at the same time.

Restrictions on the creation of hierarchies

The following restrictions exist on the creation of hierarchies:

- It is only possible to define hierarchies for the Entity, Account, Custom and Analytical dimensions.
- The Account and Entity dimensions always have a default hierarchy ($), to which the new elements are related.

***Note**: the "$" hierarchy collects all the accounts created, including non-related accounts, i.e. those that have not been inserted in any hierarchy or grouping.*

Hierarchy types

The type of hierarchy is marked by a symbol.

Symbol	Name	Description
	Basic	Generic relationships that can be used for any type of hierarchy.
	Geographical	The relationships reflect global regions, nations and departments.
	Organisation	The relationships represent the group's organisational structure.
	Time-dependent	The relationships between elements and nodes are not fixed, but depend on the scenario and period.

Example of a time-dependent hierarchy

In this example, the hierarchy groups the companies based on the number of employees:



N01: Entity with less than 5 employees
N02: Entity from 5 to 50 employees
N03: Entity from 50 to 100 employees
N04: Entity from 100 to 500 employees
N05: Entity with more than 500 employees

If a company has 40 employees in 2011C/December and 55 employees in 2012C/January, it must be classified in the N02 node for the 2011C Scenario and Period 12, and in the N03 node for the 2012C Scenario and Period 01. The hierarchical structure does not change, but the relationships between the company and the hierarchy nodes alter depending on the scenario and the period.

How to work with hierarchies

Concept Information

CCH Tagetik dimensions 7
Aggregation structures 9
Groupings 124

How to view and modify existing hierarchies

Dimensions > choose dimension > ⋮ > Hierarchies

1. Select the hierarchy to modify.
2. In the **Attributes** tab, make the changes and then click **Save**: the hierarchies for which changes have not yet been saved will be highlighted ( ).

How to create a hierarchy

Dimensions > choose dimension > New hierarchy

1. Insert a code to attribute to the new hierarchy.
2. Define the characteristics of the hierarchy, and then click **OK**: the hierarchy will be created inside the dimension hierarchy.

How to create a new element inside a hierarchy

Dimensions > choose dimension > Show all > choose hierarchy

1. In the hierarchy structure, select the node within which to add the element, and then click : a new row will appear in the table.
2. In the configuration tabs, add all the data for the element, and then click **Save**: the element will be created and will be related to the node and to the hierarchy at the same time.

How to relate an element to a hierarchy

Dimensions > choose dimension > Show all > choose hierarchy

1. In the hierarchy structure, select the node to which the element is to be related, and then click : a new row will appear in the table.
2. In the **Attributes** tab, insert the code of the element to be related, and then click **Save**: the element data will be reported in the table and the element will be related to the selected node in the hierarchy.

How to relate several elements to a hierarchy

Dimensions > choose dimension > List

1. In the elements table, click : it is now possible to select several elements.
2. In the elements table, select all the dimension elements to be related to the same hierarchy,
3. In the **Relationships** tab, click ⊕: a new hierarchy selection box will be added.
4. Select the desired hierarchy from those available.

   | *Note: only the hierarchies to which it is possible to relate the element will be shown.*

5. If necessary, select a node from those available within the hierarchy, and then click **Save**: the relationships created now apply to all selected elements.

How to add a node to a hierarchy

Dimensions > choose dimension > Show all > choose hierarchy

1. In the hierarchy structure, select the root or the node within which to create a new node, and then click : a new node row will appear in the table.
2. In the **Attributes** tab, insert the code of the node to be created, and then click **Save**: the node data are reported in the table and the node is related to the selected element in the hierarchy.

How to relate unrelated elements to a node

Dimensions > choose dimension > Show all > choose hierarchy

1. In the hierarchy structure, select **Unrelated elements**: all the dimension elements that have not yet been related to any node will be shown in the table.
2. Select the desired element and use your mouse to drag it to the desired node in the hierarchy structure.
3. Click **Save**.

How to define hierarchy levels

Dimensions > choose dimension > Show all > choose hierarchy

1. Click **Hierarchy levels**: the **Hierarchy levels** page will open.
2. Click ⊕ to add a new level: a new row will appear in the table.
3. In the **Attributes** tab, insert the information about the new level, and then click **Save**: the new level will be created.


Structure and relationships for accounts page

Dimensions > Account > Show all > select hierarchy

Purpose of the page

This page allows you to view the details of all the hierarchies created to group the existing accounts. It also allows you to change existing hierarchies, to insert additional nodes within each and to relate accounts to nodes and hierarchies.

What it looks like

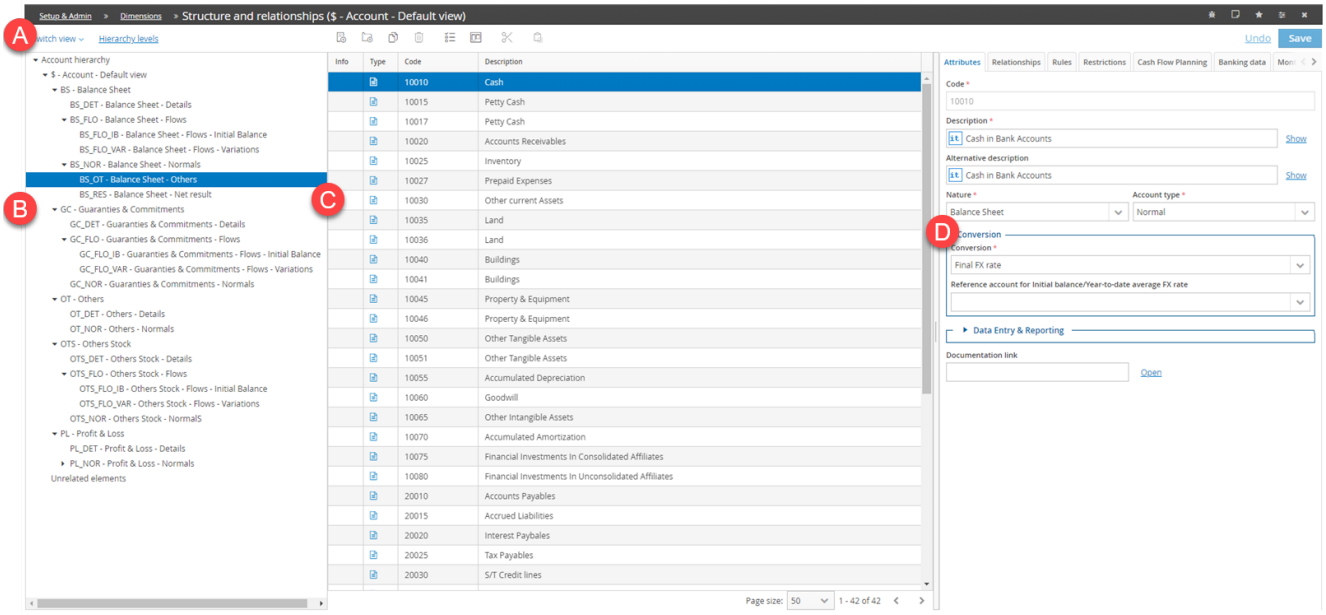

Element	Description
A	Tool bar
B	Hierarchy structure and elements
C	Details of the selected hierarchy node
D	Configuration tabs for the element of the selected hierarchy

Actions on this page

Element	Description
Switch view	This displays the hierarchy in two different ways. • **Element/node relationships**: the accounts are displayed in alphabetical order with the reference node. Non-related elements are not shown. • **Structure**: the nodes are displayed in alphabetical order and the name of the parent node is shown.
Hierarchy levels	This inserts a description for the hierarchy levels, which is useful for data analysis.
	This adds an account element to the hierarchy.
	This adds a node element to the hierarchy.
	This adds an identical element to the one selected.
	This deletes the selected element from the hierarchy.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.

Element	Description
	This deletes a node or an account from the hierarchy.
	This moves a node or an account that has been cut to another position in the hierarchy.


Structure and relationships page for entities

 *Dimensions > Entity > Show all > select hierarchy*

Purpose of the page

This page allows you to view the details of all the hierarchies created to group existing entities. It also allows you to change existing hierarchies, to insert additional nodes within each one, and to relate entities to nodes and hierarchies.

What it looks like

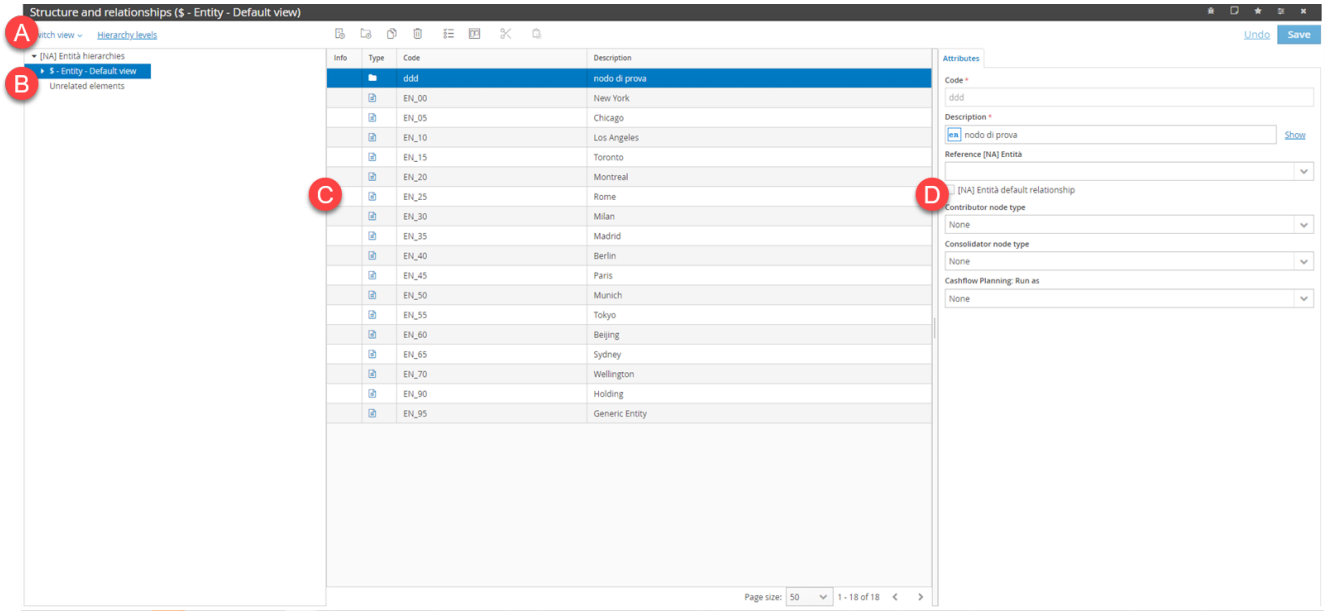

Element	Description
A	Tool bar
B	Hierarchy structure and elements
C	Details of the selected hierarchy node
D	Configuration tabs for the element of the selected hierarchy

Actions on this page

Element	Description
Switch view	This displays the hierarchy in two different ways. • **Element/node relationships**: the accounts are displayed in alphabetical order with the reference node. Non-related elements are not shown. • **Structure**: the nodes are displayed in alphabetical order and the name of the parent node is shown.
Hierarchy levels	This inserts a description for the hierarchy levels, which is useful for data analysis.
	This adds an account element to the hierarchy.
	This adds a node element to the hierarchy.
	This adds an identical element to the one selected.
	This deletes the selected element from the hierarchy.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an account from the hierarchy.
	This moves a node or an account that has been cut to another position in the hierarchy.

New hierarchy

Dimensions > choose dimension > New hierarchy

Add new hierarchy window

Please find below the most important fields.

Data	Description
Hierarchy code	Unique ID of the new hierarchy
Description	Meaningful name to identify the hierarchy and its content
Convert to flat structure	The hierarchy created will not have several levels; all related elements will be on the same level.
Exclude from reporting	The hierarchy created will not be included in the reports.
Root	Node of the first level to which the hierarchy is connected

Node creation

Dimensions > Account > Show all > select hierarchy

Attributes tab

Please find below the most important fields.

Data	Description
Code	Unique ID of the node
Description	Meaningful name to identify the node and its content
Reference account	Node account used to load the amounts inserted in the node.
Account default relationship	The node is automatically related to each company. Each new account created will be inserted in this node.
Class	Account class to which the node belongs.


Account hierarchies page

Dimensions > Account > ⋮ > Hierarchies

Purpose of the page

This page allows you to view and create hierarchies for existing accounts. It also allows you to change the attributes of each hierarchy.

What it looks like

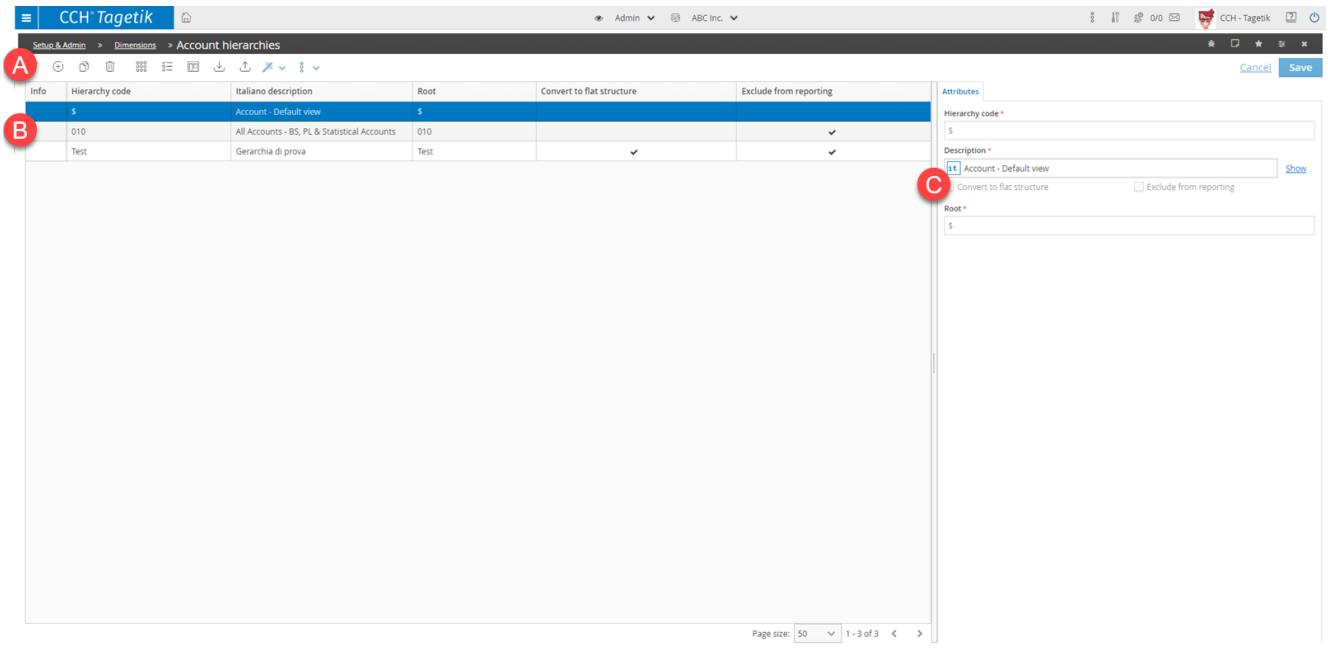

Element	Description
A	Action buttons
B	List of hierarchies to which the account is related
C	Configuration tab for the attributes of the selected hierarchy

Action buttons on this page

Element	Description
	This filters the data displayed on the page.
	This adds a row in order to insert a new hierarchy.
	This adds a hierarchy with the same characteristics as the one selected, with the exception of the code.
	This cancels the hierarchy contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
	This allows you to access the **Recode** function and to change the code related to a node.
	Structure and relationships: this opens the page to view all the hierarchies and to change the relationships. **Copy from**: this attributes the characteristics of another hierarchy of choice to the selected hierarchy.

Account hierarchy attributes

Dimensions > Account > > Hierarchies

Attributes tab

Please find below the most important fields.

Field	Description
Convert to flat structure	This also keeps the flat structure of the hierarchy aligned. Only for non-time-dependent hierarchies.
Exclude from reporting	This excludes this hierarchy from the reporting. This is useful for hierarchies that have only been created to set-up the system and are no longer significant.
Root	Hierarchy root


Entity hierarchies page

Dimensions > Entity > ⋮ > Hierarchies

Purpose of the page

This page allows you to view and create entity hierarchies. It also allows you to change the attributes of each hierarchy.

What it looks like

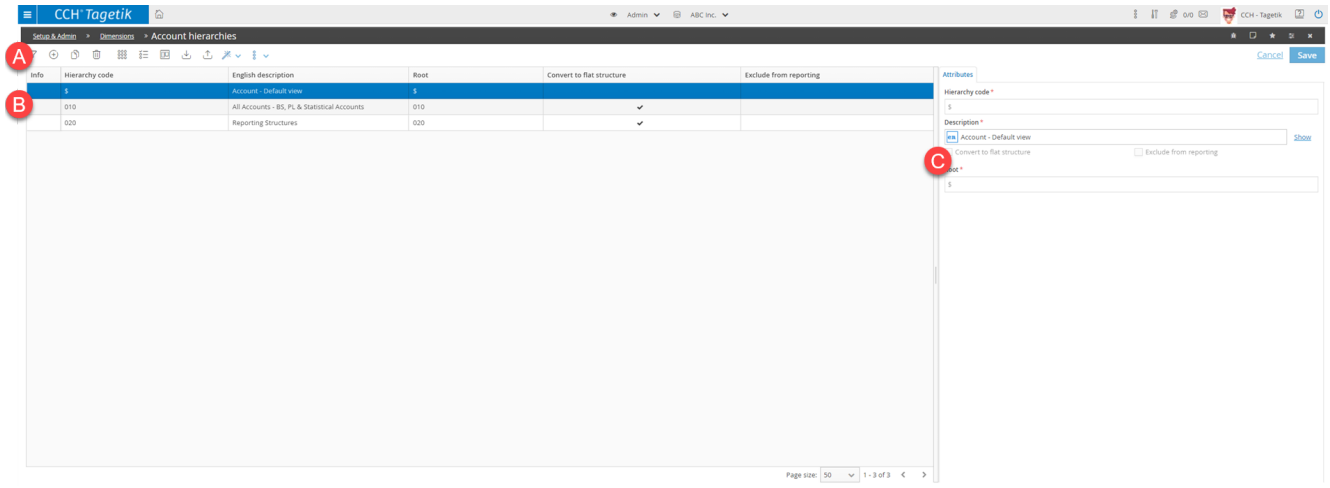

Element	Description
A	Action buttons
B	List of hierarchies to which an entity is related
C	Configuration tab for the attributes of the selected hierarchy

Action buttons on this page

Element	Description
	This filters the data displayed on the page.
	This adds a row in order to insert a new hierarchy.
	This adds a hierarchy with the same characteristics as the one selected, with the exception of the code.
	This cancels the hierarchy contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.

Element	Description
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.
	This allows you to access the **Recode** function and to change the code related to a node.
	Structure and relationships: this opens the page to view all the hierarchies and to change the relationships. **Copy from**: this attributes the characteristics of another hierarchy of choice to the selected hierarchy.

Entity hierarchy attributes

Dimensions > Entity > > Hierarchies

Attributes tab

Please find below the most important fields.

Field	Description
Organisation	The type of hierarchy is 'organization'.
Geographical	The type of hierarchy is 'geographical'. The code must start with $G.
Exclude from reporting	This excludes this hierarchy from the reporting. This is useful for hierarchies that have only been created to set-up the system and are no longer significant.
Time dependent	The hierarchy is time-dependent, i.e. relating the element to the node depends on the scenario/period.
Convert to flat structure	This creates a flat copy of the hierarchy in the database, allowing for quick consultation for reporting purposes or for business intelligence.
Root	Hierarchy root

Groupings

Contents

This section covers the following topics:

Groupings 124
How to work with groupings 125
Scenario - Grouping page 126
Scenario - Grouping 127
Variation/Detail types Grouping page 128
Var. - Det. types grouping 130
Control group - Structure and relationships page 134
Control groups grouping 135
Category - Grouping page 138
Categories grouping 139

Groupings


What groupings are

Groupings are aggregation structures with the following characteristics:

- multi-level structures with unlimited depth, i.e. the elements may be aggregated to different levels.
- multi-parent structures, i.e. each child element in the hierarchy may be related to several parent elements.
- unique structures, i.e. it is possible to create just one grouping for each dimension.

Groupings allow for Category and Scenario dimensions to be aggregated.

Example of a grouping

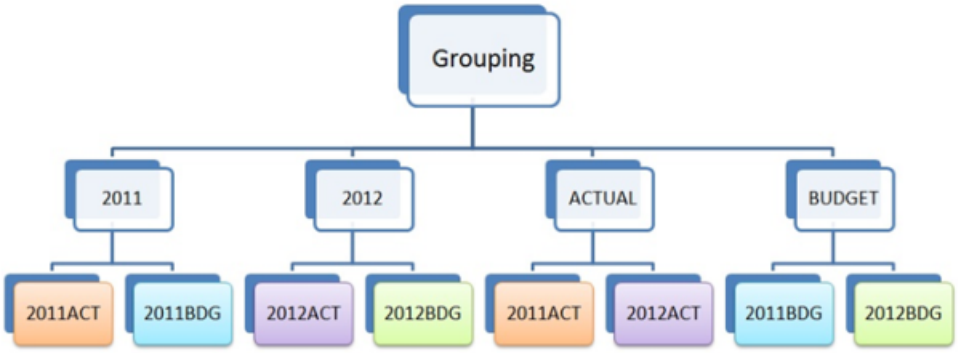

In this example, the same scenario 2011ACT is related to both the 2011 node and the ACTUAL node.

Principles for the creation of groupings

Groupings are created in the same way for all dimensions: by creating a tree structure and creating the relationships between dimension elements and nodes. It is also possible:

- To specify several nodes to which each new dimension element will be automatically related.
- To exclude (without deleting) certain grouping nodes from reports, as they may not be useful for reporting purposes.

How to work with groupings

Concept Information

CCH Tagetik dimensions 7
Aggregation structures 9
Hierarchies: basic concepts 113

How to view and modify existing groupings

Dimensions > choose dimension > ⋮ > Grouping

1. Select the grouping to be modified.
2. In the **Attributes** tab, make the changes and then click **Save**: the groupings for which changes have not yet been saved will be highlighted ( ).

How to add a node to a grouping

Dimensions > choose dimension > ⋮ > Grouping

1. In the grouping structure, select the node within which to create a new node, and then click : a new node row will appear in the table.
2. In the **Attributes** tab, insert the code of the node to be created, and then click **Save**: the node data are reported in the table and the node is related to the selected element in the grouping.

How to add a new element inside a grouping

Dimensions > choose dimension > ⋮ > Grouping

1. In the grouping structure, select the node within which to add the element, and then click : a new row will appear in the table.

2. In the configuration tabs, add all the data for the element, and then click **Save**: the element will be created and will be related to the node and to the grouping at the same time.

How to relate an element to a grouping

Dimensions > choose dimension > ⋮ > Grouping

1. In the grouping structure, select the node to which the element is to be related, and then click : a new element row will appear in the table.
2. In the **Attributes** tab, insert the code of the element to be related, and then click **Save**: the element data will be reported in the table and the element will be related to the selected node in the grouping.


Scenario - Grouping page

Dimensions > Scenario > Grouping

Purpose of the page

This page allows you to view and create scenario groupings. It also allows you to change the attributes of each grouping.

What it looks like

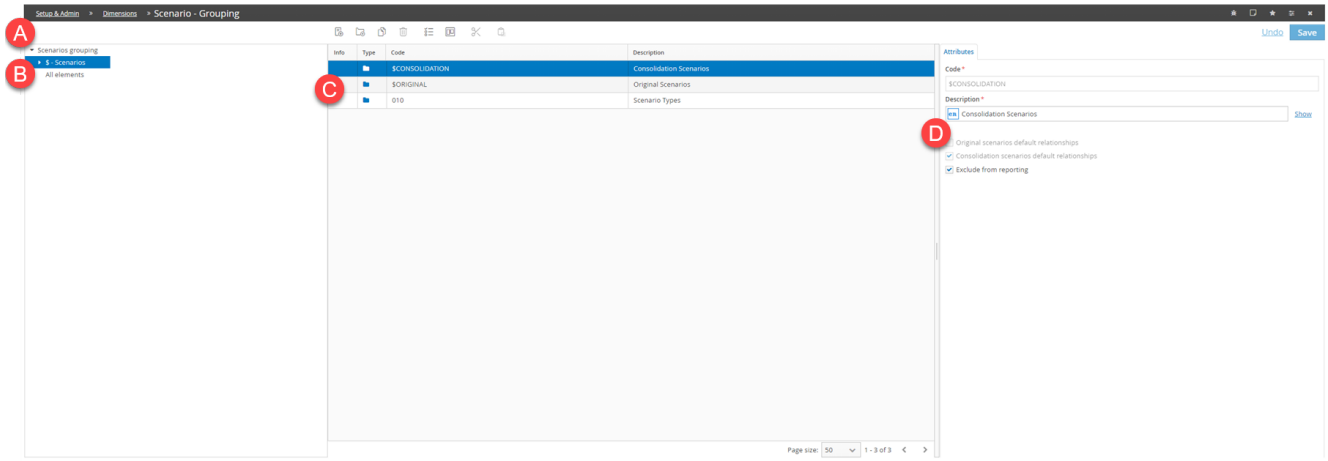

Element	Description
A	Action buttons
B	Hierarchical structure of grouping elements
C	Content of the element selected in the list
D	Configuration tab for the selected element

Action buttons on this page

Element	Description
	This adds a scenario element to the grouping.
	This adds a node element to the grouping.

Element	Description
	This adds a grouping with the same characteristics as the one selected, with the exception of the code.
	This cancels the grouping contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an element from the grouping.
	This moves a node or an element that has been cut to another position in the grouping.

Scenario - Grouping

Dimensions > Scenario > Grouping

Node Attributes tab

Please find below the most important fields.

Field	Description
Original scenarios default relationships	The node is automatically related to each original scenario created.
Consolidation scenarios default relationships	The node is automatically related to each consolidation scenario created.
Exclude from reporting	This relationship is not included in the reports.

Attributes tab

This tab allows you to define the attributes of a scenario. These may vary depending on whether it is an original scenario or a consolidation scenario.

Please find below the most important fields.

Field	Description	Scenario type
Version description	Scenario version. Information used in the reporting phase.	All
Year	The year to which the scenario refers. Information used in the reporting phase.	All
Enabled	This allows you to view the scenario in the selection lists on the various pages.	All
References		
Previous scenario	The scenario used to complete carry forwards and to compare data from the current scenario.	All

Field	Description	Scenario type
Following scenario	The scenario used to compare data from the current scenario.	All
Reference scenario <n>	Scenarios that are useful for comparisons during the reporting phase.	All
Consolidation settings		
Original scenario	The scenario that feeds the consolidation scenario	Consolidation
Holding	The holding company in the consolidation	Consolidation
Currency	The currency used for the consolidation	Consolidation
Exceptions		
Category filter	Category grouping node to be used to filter the data that feed the scenario	Consolidation
Account filter	Account hierarchy node to be used to filter the data that feed the scenario.	Consolidation
Ref. FX rate scenario	This allows you to use an original scenario to read FX rates that is different from the scenario that you are using for the consolidation.	Consolidation
Prefix for FI reclass. journals	The prefix for the journals generated by the reclassification of financial investments.	Consolidation

Scenario Relationships **tab**

This tab allows you to create relationships between scenarios and the dedicated hierarchies.

Field	Description
Node	Node within the specific hierarchy to which the scenario may be related


Variation/Detail types Grouping page

Dimensions > Variation/Detail types > Grouping

Purpose of the page

This page allows you to view and create variation/detail type groupings. It also allows you to change the attributes of each grouping.

What it looks like

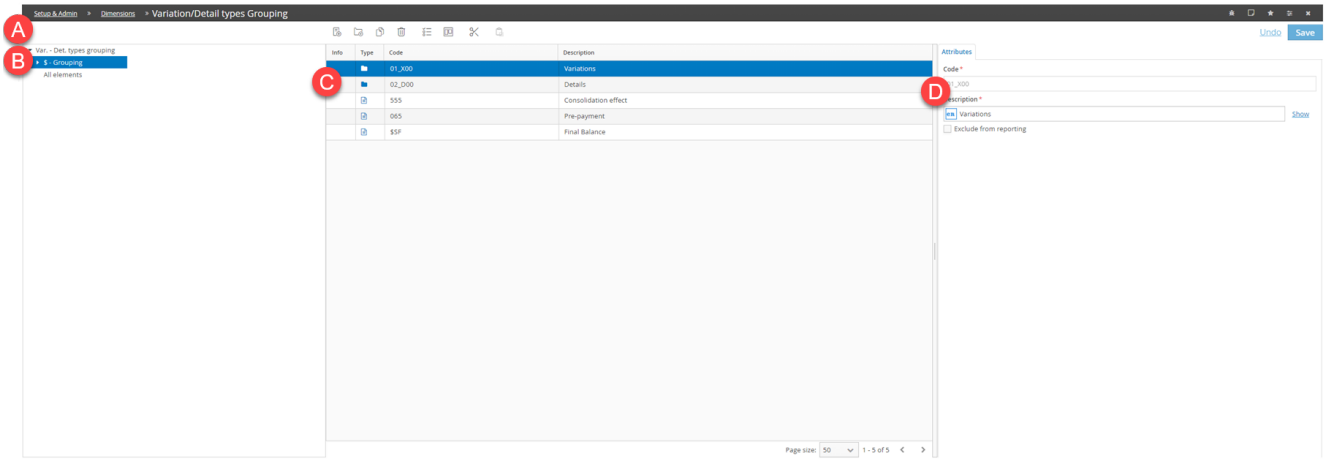

Element	Description
A	Action buttons
B	Hierarchical structure of grouping elements
C	Content of the element selected in the list
D	Configuration tab for the selected element

Action buttons on this page

Element	Description
	This adds a variation/detail type element to the grouping.
	This adds a node element to the grouping.
	This adds a grouping with the same characteristics as the one selected, with the exception of the code.
	This cancels the grouping contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an element from the grouping.
	This moves a node or an element that has been cut to another position in the grouping.

Var. - Det. types grouping

Dimensions > Variation/Detail types > Grouping

Node Attributes tab

Please find below the most important fields.

Field	Description
Exclude from reporting	This excludes this node from the reporting.

Var. - Det. types Attributes tab

Please find below the most important fields.

Field	Description	Values
Var. - Det. type	Var. - Det. type	**Detail**: detail of a normal account **Variation**: variation of a normal account
Conversion	FX rate to be applied when converting into the consolidation currency.	**P&L FX Rate**: This overrides the settings of the default conversion rule and replaces them with the chosen FX rate (average FX rate/period average FX rate/year-end FX rate). Used for the P&L, detail accounts and other variation accounts. **Average FX rate**: This converts the cumulative amounts to the average FX rate present in the FX rates table. **Period average FX rate**: This converts the amount for the period to the period average FX rate present in the FX rates table and then adds it to the converted data of the previous period. **Final FX rate**: This converts cumulative amounts to the final FX rate present in the FX rate table. Used for the balance sheet, detail accounts and 'other stock' accounts. Equity accounts are excluded, as these are normally converted at the historical FX rate. **Historical FX rate**: This stratifies the conversion based on the period FX rate. There is no FX rate numeric value. In order to obtain the final converted value, the system adds the converted variations to the initial balance, each based on the type of FX rate indicated in the relative table. Used for equity accounts. **Prev. P&L FX rate**: Applied to the reserve variations that receive the distribution of profit and the balance sheet net result for the previous year. Only used for variation accounts and detail accounts. **Prev. Final FX rate**: Applied to the accounts representing the initial balances. However, these accounts are actually calculated on the basis of the carryforward processing operations, and are not the result of conversions. Only used for variation accounts and detail accounts. **Initial balance FX rate**: this converts incoming area variations or percentage variations in the case of a decrease of accounts converted at the historical FX rate, when the entry or reduction occur at the start of the period, or when the amount refers to carrying forward. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the **Reference account for Initial balance/Year-to-date average FX rate** which allows you to calculate the conversion coefficient. **Year-to-date average FX rate**: this converts outgoing area variations or the percentage variance in the case of a decrease of accounts converted at the historical FX rate, i.e. when the exit or reduction occur during the period and other operations alter the value of the account. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the conversion coefficient in **Reference account for Initial balance/Year-to-date average FX rate**. **None**: This is applied to accounts that are not subject to currency conversion. This is used for 'other variation', 'stock' and 'initial balance variation' accounts.
Standard sign	This determines the sign with which data can be inserted into the account	**Equal to the parent account sign** **Opposite to the parent account sign** **Any**

Field	Description	Values
IC management	The account may receive intercompany values.	-
Control group data		
Balancing	The detail/variation account used to allocate any unbalanced amounts caused by rounding for currency conversion between detail/variation accounts and parent accounts.	-
Initial balance	The account that represents the initial balance; carry forward data processing feeds this account with the final balance of the previous scenario.	-
Calculation rule	The account used by the system to generate the calculation rule, if the rule for creating the calculation rule is “Calculate variation/detail as difference”.	-
Cancel	This identifies the account used by the system to cancel the journal; carry forward data processing feeds this account with an amount equal to the initial balance, but with the opposite sign.	-
FX rate difference	Variation account(s) to which to allocate the FX rate difference generated by the currency conversion of variations, if the relative parent account is not converted at the historical FX rate.	-

Field	Description	Values
Var. Area	Variation account(s) to which to allocate the amounts created for the automatic management of entry and exit variations regarding the consolidation area.	-
Initial Balance FX rate difference	Variation account to which to allocate the FX rate difference generated by the currency conversion of initial balance variations, if the relative parent account is not converted at the historical FX rate.	-
Merger	Variation account(s) to which to allocate the amounts created for the automatic management of mergers.	-
Modify %	Variation account(s) to which to allocate the amounts deriving from the variation of the proportional calculation percentage.	-
Change to equity method	Variation account(s) to which to allocate the amounts originating from the change to the equity method and from the equity calculation in the transition from the line-by-line/proportional to the equity method.	-
IFRS5	Variation account(s) used to allocate the reclassification amounts from IFRS5 data processing.	-

Var. - Det. types Relationships tab

This tab allows you to create relationships between variation/detail types using the nodes.

Field	Description
Node	Node within the specific hierarchy to which the variation/detail type may be related


Control group - Structure and relationships page

Dimensions > Control groups> Grouping

Purpose of the page

This page allows you to view and create control group groupings. It also allows you to change the attributes and characteristics of each grouping.

What it looks like

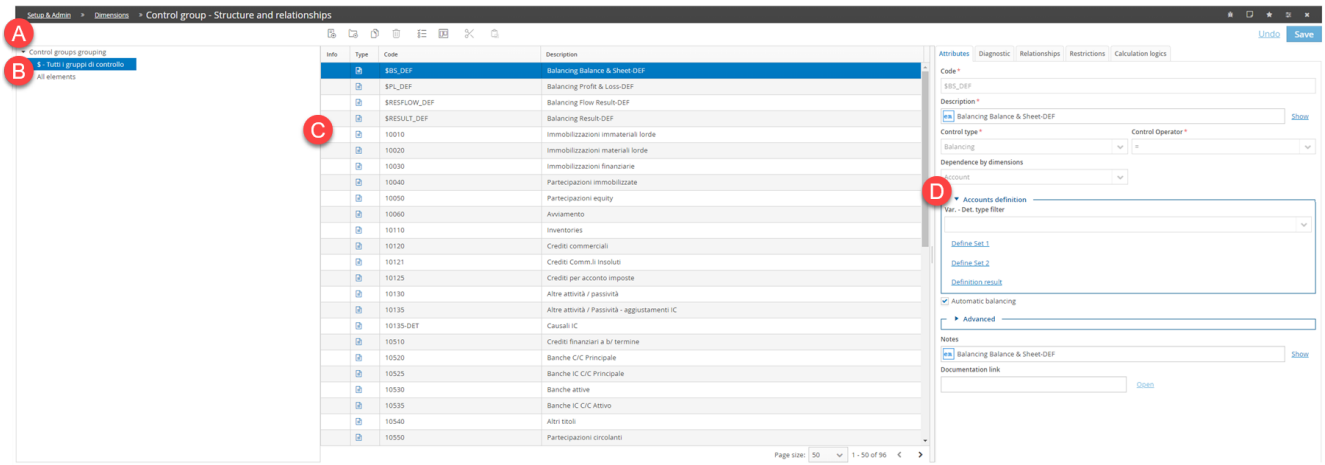

Element	Description
A	Action buttons
B	Hierarchical structure of grouping elements
C	Content of the grouping selected in the list
D	Configuration tab for the selected element

Action buttons on this page

Element	Description
	This adds a control group element to the grouping.
	This adds a node element to the grouping.
	This adds a grouping with the same characteristics as the one selected, with the exception of the code.
	This cancels the element contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.

Element	Description
	This deletes a node or an element from the grouping.
	This moves a node or an element that has been cut to another position in the grouping.

Control groups grouping

Dimensions > Control groups> Grouping

Attributes groupings tab

Please find below the most important fields.

Field	Description
Control groups default relationships	The node is automatically related to each control group created.
Exclude from reporting	This relationship is not included in the reports.

Attributes tab control groups

Please find below the most important fields.

Field	Description	Values
Control type	Type of control group created.	Detail Variation Balancing Coherence
Control operator	Operator used for balancing check	Coherence Equality and relational operators
Dependence by dimensions	Any relationships between accounts and the various custom dimensions.	**Account**: the control group is only defined for the account. **Account/ <Custom Dimension>**: the control group is defined in relation to the account and the custom dimension indicated.
Accounts definition		
Var. - Det. type filter	Only if the Dependence by dimensions field is set to Account. Node of the var. - det. types grouping with which to generate the control group.	-
Define Set 1	This defines the accounts or account nodes to be considered as Set 1 accounts (parent).	-
Define Set 2	This defines the accounts or account nodes to be considered as child accounts.	-

Field	Description	Values
Definition result	This displays the lists of parent accounts and child accounts.	-
Balance automatically	The control group is made to be balanced automatically. ***Note**: any unbalanced amounts are reported in a dedicated variation account (Balancing variation).*	-
Advanced		
Validity	This defines a time interval within which the control group may be used.	-
Include in the process if	This defines the conditions for the control group to be used, for data collection purposes.	-
Documentation link	This opens a page that is external to Tagetik with additional information.	-

Diagnostics tab

Please find below the most important fields.

Field	Description	Values
Severity	Consequences triggered by a balancing error.	**Blocking**: the error blocks the submission process. **Non-Blocking**: the error is flagged up but does not block the submission process.
Data types to check	Type of data checked by the diagnostics carried out on the control group.	**Gross**: runs diagnostics on gross amounts. **Net**: runs diagnostics on net amounts. **Intercompany**: runs diagnostics on intercompany data.
Advanced		
Check original data on	Currency used to carry out the control group balancing check.	**Local currency**: this uses the financial statement currency. **Transaction currency**: this uses the transaction currency.
Check original data for	The level at which the control group checks the 'amount' type categories.	**Company**: the check is carried out for each individual company. **Contributor node**: the check is carried out on the total of the amounts for the companies belonging to a contributor node. **Company and contributor node**: the check is carried out both at company level and at contributor node level.

Field	Description	Values
Check consolidation journals by Company	For 'consolidation journal' categories, this states whether the control group is to be checked only by the journal number or by the combination of journal number/company.	-
Dimensions check		
Check by <custom dimension>	Level of detail of the check carried out within the custom dimension indicated.	Total Lowest level elements Hierarchy nodes
<Custom dimension> hierarchy	This allows you to specify a hierarchy node if the custom dimension check is enabled and the 'Hierarchy nodes' mode is selected.	-

Relationships **tab**

Field	Description
Nodes	Node within a control group hierarchy.

Restrictions tab

Please find below the most important fields.

Field	Description	Value
<Custom dimension> restrictions	Restrictions for the specific custom dimension	**None**: all custom dimensions are accepted. **Restricted**: it is possible to define restrictions on enabled custom dimensions.
Counterparty rule for IC checks	This allows you to enable counterparty dynamic groups in IC checks.	-

Calculation Logics tab

Please find below the most important fields.

Field	Description
Create	This defines whether the control group generates one or more calculation rules.
Calculate	This indicates the criteria used to generate the calculation rule.
Data to calculate	
Run on Gross amounts	The account generated is calculated based on gross amounts.
Run on IC amounts	The account generated is calculated based on intercompany amounts.
Run on journals	The account generated is calculated based on journals.
Other options	
Compensate Company on journals	In a costs/revenues elimination journal, this avoids the system generating two rows with an opposite sign. Only enabled if the account generated is calculated based on journals.
Keep CTP on journals	The counterparty is kept in the account calculation based on journals. Only enabled if the account generated is calculated based on journals.
Keep original currency	The company currency amount and the transaction currency amount are managed separately,


Category - Grouping page

Dimensions > Category > Grouping

Purpose of the page

This page allows you to view and create category groupings. It also allows you to change the attributes of each grouping.

What it looks like

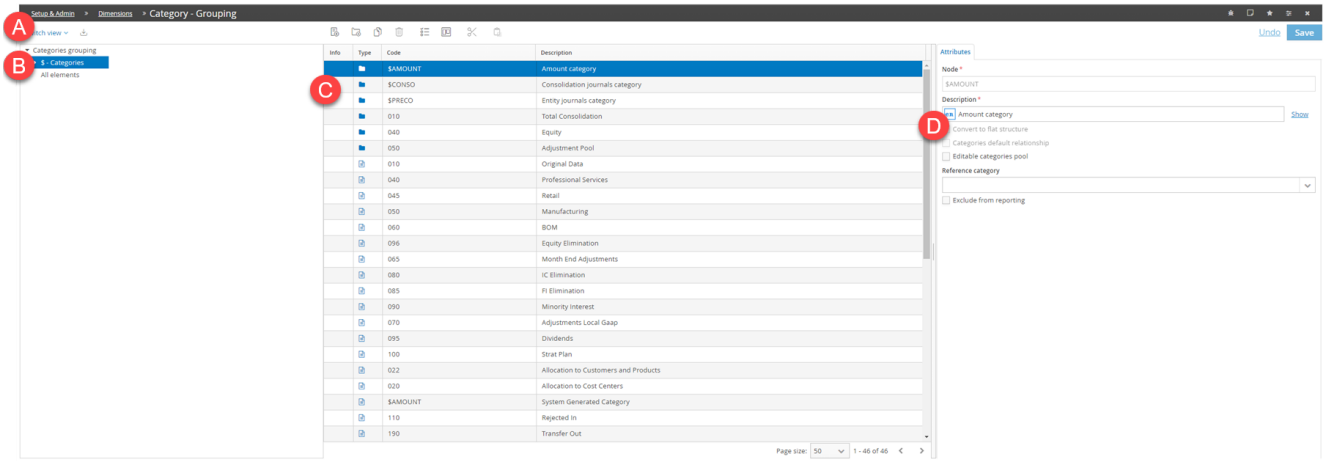

Element	Description
A	Action buttons
B	Hierarchical list of groupings
C	Content of the element selected in the list
D	Configuration tab for the selected element

Action buttons on this page

Element	Description
	This adds a category element to the grouping.
	This adds a node element to the grouping.
	This adds a grouping with the same characteristics as the one selected, with the exception of the code.
	This cancels the grouping contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.

Element	Description
	This deletes a node or an element from the grouping.
	This moves a node or a category that has been cut to another grouping position.

Categories grouping

Dimensions > Category > Grouping

Node Attributes tab

Please find below the most important fields.

Field	Description
Convert to flat structure	This also keeps the alignment flat structure aligned. This can only be enabled for root nodes.
Control groups default relationships	The node is automatically related to each category created.
Editable categories pool	A set of categories used to keep track of changes, by type of user.
Exclude from reporting	This excludes this relationship from the reporting.

Category Attributes tab

This tab allows you to define the attributes of a category. Different attributes have to be defined depending on the category being configured.

Please find below the most important fields.

Field	Description	Category type
Default for manual journals		
Periodic journal	This specifies that the journal is periodic and not cumulative.	All
Enable carry-forward	This enables the carrying forward of journals for the year or the next scenario.	All
Exclude Reclassifications and ER	This indicates whether equity reclassification and account reclassification must be carried out for the category.	All
Tax calculation method	This specifies how deferred taxes are calculated.	All
Reverse type	This indicates if and how a journal is reversed automatically by the system in the carry-forward step.	All
Consolidation		
Override CTP for segment set equal to Entity	In the consolidation journals, the counterparty entity segment with the same value as the entity is overridden.	Only Consolidation Journals
Proportional calculation method	This indicates how to determine the proportional calculation percentage.	Only Consolidation Journals
Equity valuation method	This defines what the system should do during the equity valuation step where there is an investee company.	Only Consolidation Journals

Field	Description	Category type
Minorities calculation method	This defines how to calculate the minorities.	Only Consolidation Journals
Minorities calculation on <Entity>	This defines how to calculate the minorities on company 1 or company 2 of the journal	Only Consolidation Journals
Advanced		
Handle as a journal	The category is handled like a journal category for the calculation of formulas.	Amount only
To run	Data processing is run on the category.	All
Child category	For this category, diagnostics and data processing are carried out together with another reference category.	All
Reference category	Reference category for the child category used to carry out diagnostics and data processing.	All
Monthly splitting type	Method used to process the data.	All
Journal model definition	This allows for a journal model to be created.	All

Relationships tab

This tab allows you to create relationships between categories using nodes.

Field	Description
Nodes	Nodes to which the category is to be related

Banking data tab

This tab allows you to set the characteristics of the data collected for banking supervision purposes.

Field	Description
Notify on individual data	The category is included in the reporting of individual data.
Notify on 36381	The category is included in the reporting of item 36381.
Notify on other intragroup items	The category is included in the reporting of other intragroup items.

Financial statement templates

Contents

This section covers the following topics:

Financial Statement Templates: basic concepts 141
Formulas for financial statement template (FST) items 142
How to work with financial statement templates and items 144
FST & KPI 145
FST & KPI page 147
FST items page 147
FST items 149
Relationships page 149
Relationships 151

Financial Statement Templates: basic concepts

Definition

A financial statement template (FST) is a structure used to aggregate accounts or custom dimensions; FSTs are used to create standard financial statement formats, but also KPIs and other indices that are useful for reporting purposes.

Characteristics of a financial statement template

A financial statement template is a hierarchy with two levels:

- the first level includes elements, called FST items; there are three types of FST item:
  - **parent item**, i.e. this can be related to one or more accounts, as is the case for a hierarchy node. This item shows the sum of the amounts of the relative accounts.
  - **formula**, defined based on a parent item or on other formulas.
  - **description**, this does not represent an account but a 'description' custom header.
- the second level consists of the accounts related to the parent items.

Unlike the case for hierarchies, for financial statement templates it is possible:

- to have 'formula' and 'description' FST items in addition to parent items (which define the concept of grouping nodes)
- to recall FST items from other financial statement templates.

***Note**: the latter functionality is very useful for building KPIs, as FST items from various templates can be used as components.*

CAUTION! It is not possible to use financial statement templates for matrices designed in the Analytical Workspace.

Elements of a financial statement template

A financial statement template is made up of the following elements:

- a header
- the FST items in the template, with specific properties
- the relative accounts/custom dimensions/control types relationships

Formulas for financial statement template (FST) items

Standard formulas

A standard formula is a combination of FST items or accounts defined with the following syntax:

<input element> <operator> <input element> [<operator> <input element>...]

Element	Description
Input element	• current FST items • items from other FSTs, if of the same type • accounts, in the financial statement templates based on the Account dimension only
Operators	arithmetical: +, -, *, / logical: IF, OR, AND, NOT, ||, && comparisons: >, <>, <, >=, <=, = classifiers: TRUE, FALSE

The following syntax must be used to refer to an FST item:

[V,,'<FST item code>']

The following syntax must be used to refer to an item in another FST of the same type:

[V,'<FST code>','<FST item code>']

***IMPORTANT**: before saving the formula, the system will detect and flag up any errors regarding use of the operators, allowing the user to correct them.*

Example

To define a Formula item by adding together the item 50010 (from the current FST) and 90010 from another FST (code 020), the following formula must be used:

[V,'','50010'] + V,'020','50010']

Other syntax examples

It is often useful to calculate KPIs by referring to different scenarios and periods from those included in the form in which the FST is used. For this reason, the input elements may be enriched with the specific time shifts required, using the following syntax.

Requirement	Syntax
FST item V01 relating to previous periods of the current scenario	*[V,,'V01'].onScenarioPeriod(-1)*
FST item V01 relating to the current scenario/period	*[V,,'V01'].onScenarioPeriod($Scenario.code, $Period.code)*
FST item V01 relating to a specific scenario (e.g. 2014BDG), period (e.g. 12)	*[V,,'V01'].onScenarioPeriod("2014BDG","12")*

Requirement	Syntax
Account ‘‘00010' relating to the last period of the current quarter	*[C,'00010'].onScenarioPeriod(quarter().lastSP())*
Account ‘‘00010' relating to the last period of the third last quarter 3	*[C,'00010'].onScenarioPeriod(quarter().offsetSP(-3).lastSP())*

The *onScenarioPeriod()* utility can be applied to FST items and accounts, and accepts the following:

- a positive or negative number that indicates a difference
- two strings that specify the scenario code and the period code
- a scenario / period directly, through the use of cell fields

The reference to the scenario or period may be used to guide the logical conditions.

Example of an IF condition

Account 00010 relating to the current period if we are in period 01, otherwise Account 00010 relating to the previous period:

IF($Pe- riod.code == "01", [C, '00010'], [C, '00010'].onScenarioPeriod(-1))

TGKML MD formulas

A TGKML MD formula is a multi-dimensional formula written with syntax belonging to Tagetik TGKML, deriving from the MultiDimensional eXpressions (MDX) language for OLAP (online analytical processing) on the SQL Server.

These formulas may be defined using a dedicated editor and by respecting the following syntax:

- TGKML 1.0 header at the beginning of the script, which is mandatory in an MD calculation logic, except for MD FST formulas.
- The element resulting from the calculation and displayed on the cell making the reference is identified by the reserved element @output. This is a standard temporary account, the result of which is displayed in the cell that makes reference to the MD formula.

For example: @output :=[010, 50010]+[010, 50020];

- Only parent FST items may be referred to and not for the custom dimension (advanced financial statement templates) of the current financial statement template or of other templates.
- It is not possible to use temporary accounts as entire parameters of the ‘time skip’ or ‘number of months’ functions, for example *Lag(), Span()*, etc.
- An MD financial statement template can also be used on reporting forms, which are therefore not linked to a specific process; it is therefore not possible to omit the company hierarchy when reference is made to a company node (*Entity.[NN]* syntax), i.e. the organisational hierarchy specified in the definition of the process.
- Conversion functions cannot be used (*ConvertOriginal*).
- In an MD FST formula, it is not possible to define assignments to physical accounts to perform DB writing. It is instead possible to use assignments to temporary accounts, which can then be reused to calculate the final result (identified by the @output specification – reserved and case-sensitive). If, at the end of the script, several records exist in the @output temporary account, the amounts will be added up.
- Since the final result is always a dimensionless number, it is pointless to specify the output Pro directive (periodic result year-to-date calculation).

Use of TGKML MD formulas in the forms

These formulas can be used in the forms, respecting the following conditions:

- Forms that use the in-memory engine.
- The MD script is run cell by cell, filtering every run with the filters working on the cell.
- The currency is always the one identified by the cell in the form to which the calculation is being applied. The amount in the company currency coincides with the amount in the original currency.
- Data are always read from the “cube” identified by the definition of the form (matrix) in which the

financial statement template is being used. The result is always a number shown on the relative cell of the report, and not an n-tuple saved in the DB.

How to work with financial statement templates and items

Concept Information

Financial Statement Templates: basic concepts 141

How to create a financial statement template

Dimensions > Account > ⋮ > FST & KPI

1. Click ⊕: an empty row will appear in the table.
2. In the **Attributes** tab, assign a code to the new template and define all the relative characteristics.
3. Select the options **Account**, **Control type** and **Custom Dimension** in order to define the relationships based on which to create the financial statement template.
4. Click **Save**: the header of the new financial statement template will appear in the table and can be related to the FST items.

How to create an FST item

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items

1. Click ⊕: an empty row will appear in the table.
2. In the **Attributes** tab, assign a code to the new item and define all the relative characteristics.
3. Click **Save**: the header of the new FST item will appear in the table and can be related to accounts and hierarchies.

How to copy a financial statement template

Dimensions > Account > ⋮ > FST & KPI

1. Create a financial statement template and select it, then click ⋮ > **Copy from**.
2. In the **source FST**, select the template from which to copy the structure.
3. Select **Copy accounts mapping also** to also copy the accounts mapping and the FST items, then click **OK**.

How to relate an account to an FST item

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

1. Click ⊕: an empty row will appear in the table.
2. In the **Attributes** tab, in **Account**, select the account to be added from the **Account elements table** root.
3. Select the FST item to which the account is to be related.
4. Click **Save**.
5. To view all of the accounts included within a related node, click **Deployment**: all the consequent relationships will be calculated.
6. To view all the related accounts, click on **Definition results**.

How to relate a node or a hierarchy to an FST item

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

1. Click ⊕: an empty row will appear in the table.
2. In the **Attributes** tab, in **Account**, select the node or the hierarchy to add.
3. Select the FST item to which the node or hierarchy is to be related.
4. Click **Save**.

5. To view all of the accounts included within a related node, click **Deployment**: all the consequent relationships will be calculated.
6. To view all the related accounts, click **Definition results**.

How to exclude individual items from a financial statement template

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

Normally, all the accounts that belong to the nodes inserted in an FST item will be included in the relative financial statement template. To exclude some specific items, proceed as follows:

1. In the table, select the account not to be included.
2. In the **Attributes** tab, select the **Exclude** action, then click **Save**: the account is no longer related to the FST item.

How to check the accounts present in the FST items

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

To check which accounts have been inserted in an FST item after a formula has been applied, it is useful to follow the procedure below.

Select the desired relationship, then click **Definition result**: the **Definition results** page will open, showing all the accounts that have actually been inserted in the FST item.

How to change the header of a financial statement template

Dimensions > Account > ⋮ > FST & KPI

1. Select the financial statement template to be changed.
2. Change the values in the **Attributes** tab, then click **Save**.

How to view the FST items related to a financial statement template

Dimensions > Account > ⋮ > FST & KPI

Select the desired financial statement template, then select ⋮ > **FST items**: the FST items page will open.


FST & KPI

Dimensions > Account > ⋮ > FST & KPI

Purpose of the page

This page displays, modifies and creates financial statement templates.

What it looks like

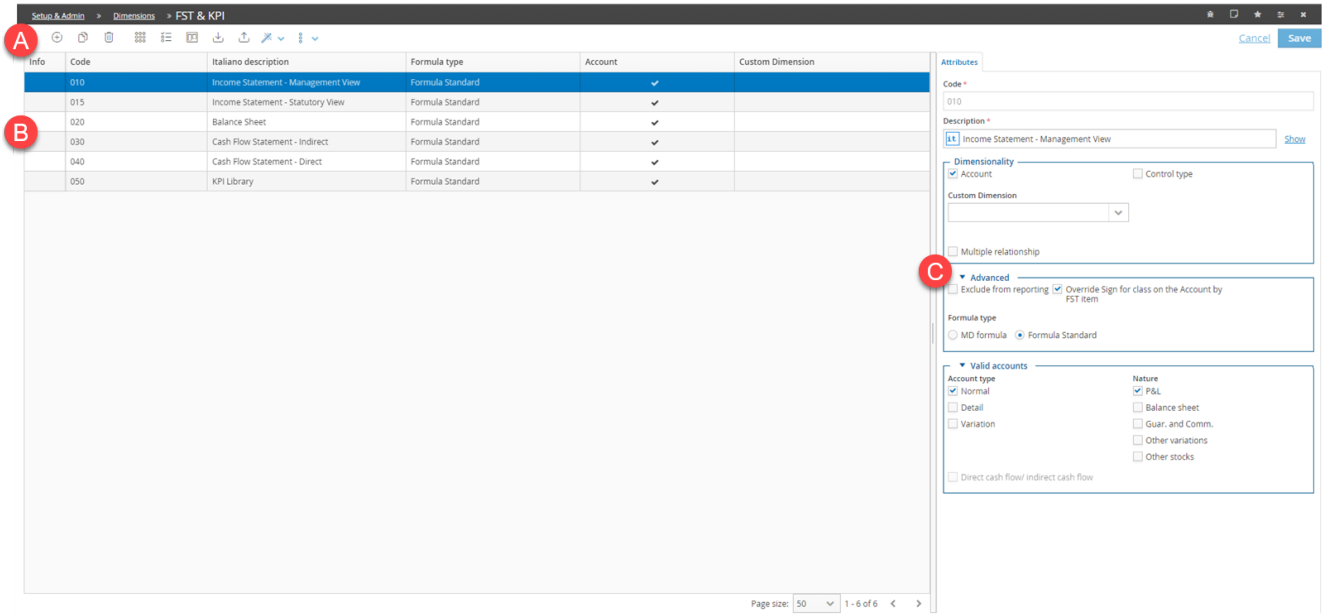

Element	Description
A	Action buttons
B	Data table
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new financial statement template.
	This adds a financial statement template with the same characteristics as the one selected, with the exception of the code.
	This cancels the financial statement template contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
XLS	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Element	Description
	**Recode**: this modifies the code related to the FST items.
	**FST items**: this opens the page in order to work on the FST items. **Copy from**: this copies the structure of an FST item in order to create a new one. **Diagnostic**: this displays a report of the accounts or elements that have still not been related to any financial statement template.

FST & KPI page

Dimensions > Account > ⋮ > FST & KPI

Attributes tab

Please find below the most important fields.

Field	Description
Dimensionality	
Account	This indicates that FST items are calculated as the sum of the accounts related to them.
Control type	Relationships based on the type of control between the reference company and the counterparty company.
Custom Dimension	Any dimension used for the calculations of FST items.
Multiple relationship	The account can be related to more than one FST item in the same template.
Advanced	
Exclude from reporting	This excludes this hierarchy from the reporting. This is useful for hierarchies that have only been created to set-up the system and are no longer significant.
Override sign for class on the account by FST item	For accounts related to the FST item, this sets the sign for class assigned to the same FST item.
Formula type	Formulas that can be used within the template **MD Formula**: only multi-dimensional formulas **Standard Formula**: only standard formulas
Valid accounts	
Account type	Types of accounts that can be related to the financial statement template
Nature	Nature of the accounts that can be related to the financial statement template
Direct cash flow/Indirect cash flow	Specific financial statement templates for direct cash flow and indirect cash flow. Used as an alternative to account type and nature.


FST items page

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items

Purpose of the page

This page allows you to view, modify and create FST items that are related to a specific FST template.

What it looks like

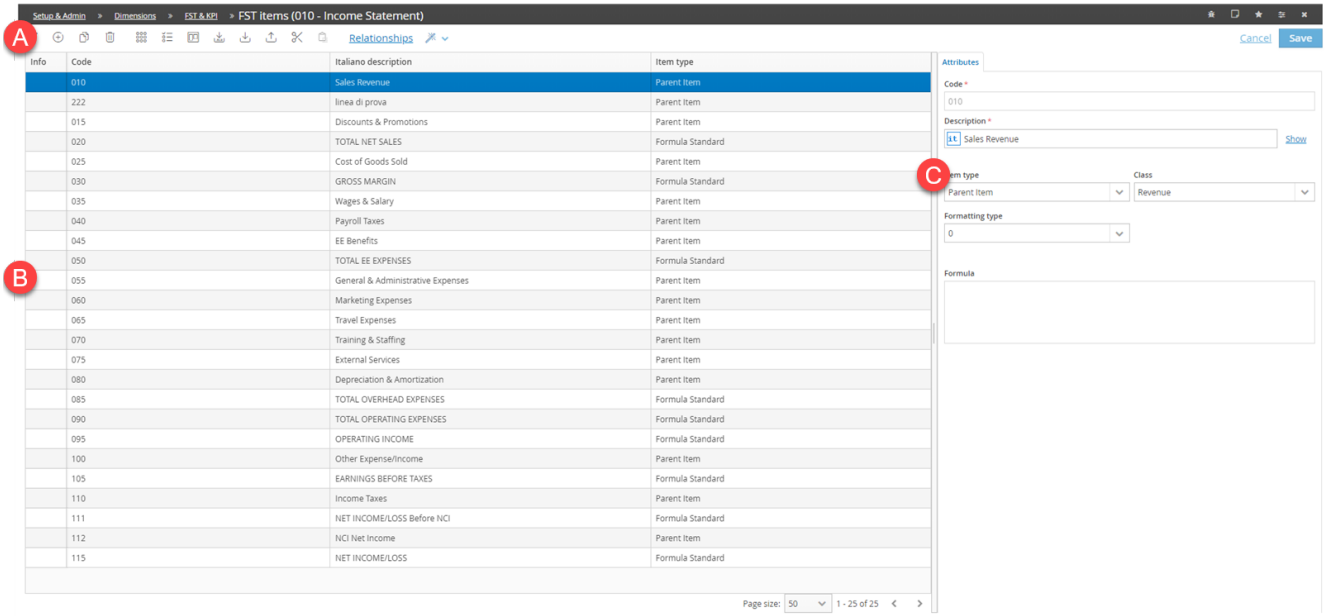

Element	Description
A	Action buttons
B	Data table
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new item.
	This adds an item with the same characteristics as the one selected, with the exception of the code.
	This cancels the item contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Element	Description
	This cuts a financial statement item in order to move it to a different position.
	This pastes a cut item underneath the selected item.
Relationships	This opens the **Relationships** page and shows the account items related to the various FST items.

FST items

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items

Attributes tab

Please find below the most important fields.

Field	Description
Item type	**Parent item**: the item may be related to one or more accounts. **Description**: header line. The purpose of this is to make the content of the template clearer; it cannot be related to accounts. **Formula**: the FST item is calculated through a formula (standard or multidimensional).
Class	Sign with which the amounts are displayed in the reports.
Formatting type	Report formatting, applying specific templates or style sheets.
Formula	
Add item from	Source to be used to add elements to the FST item, based on a specific formula (only for **Standard Formula** FST items).
Guide	This provides instructions for creating the rule.


Relationships page

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

Purpose of the page

This page shows the relationships between accounts and financial statement template items. It allows you to create relationships for account nodes and to set which single accounts of the node to include or exclude from the definition.

What it looks like

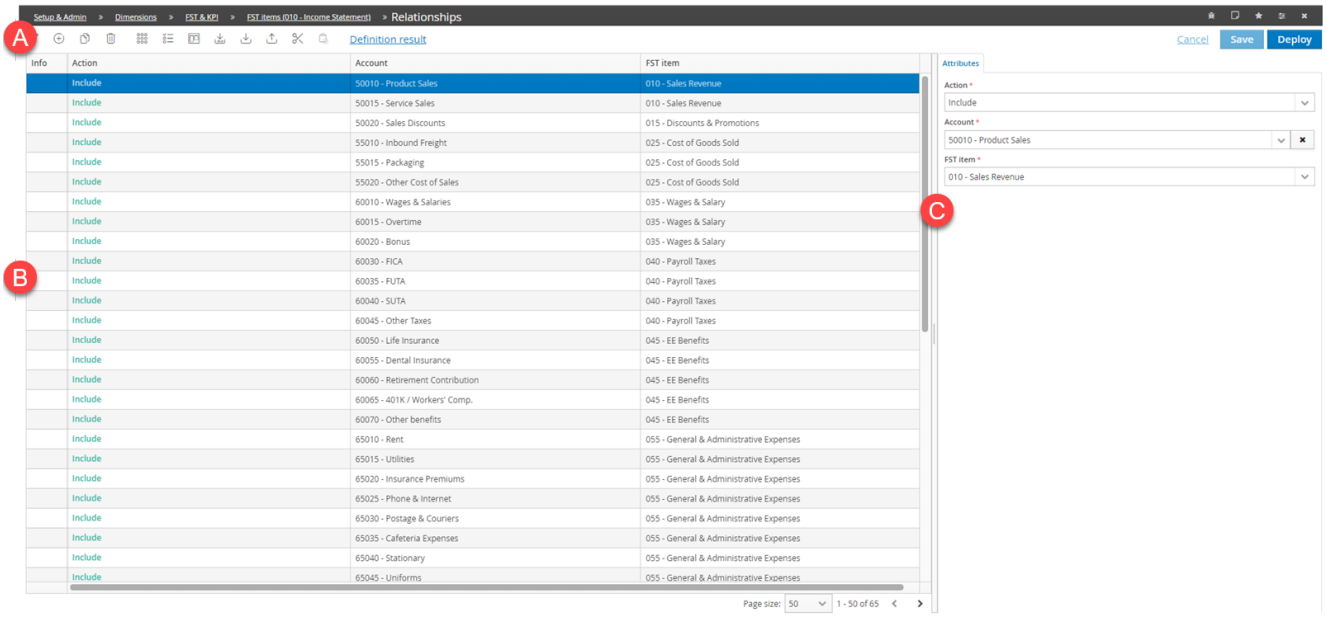

Element	Description
A	Action buttons
B	Data table
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to create a new relationship.
	This adds a financial statement template with the same characteristics as the one selected, with the exception of the code.
	This cancels the financial statement template contained in the selected row.
	This shows/hides the configuration tabs.
	This enables multi-row selection, so you can make mass changes.
	This selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This exports data in Excel format. This file cannot be re-imported into Tagetik.
	This exports data in Excel format. This file may be modified and then re-imported into Tagetik.
	This imports data from a previously prepared Excel file.

Element	Description
	This cuts a financial statement item in order to move it to a different position.
	This pastes a cut item underneath the selected item.
Definition result	This opens the **Definition results** page, which shows the detailed result of applying the selected relationship formula.
Deployment	This calculates all the relationships triggered by the insertion of a new account or node in an FST item.

Relationships

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

Attributes tab

Please find below the most important fields.

Field	Description
Action	Action to be run on the account or selected node: **Include**: include in the FST item, default setting. **Exclude**: exclude from the FST item
Account	Account or node
FST item	FST item to which the element belongs

Glossary

A

actual

Set of information about events that have already happened and relate to a period that has elapsed.

B

balance sheet

Account that lists the value of the assets held by the company.

BI

Business Intelligence

C

CAPEX

(Capital Expenditure) the amount of cash flow that a company uses to buy, maintain or implement its operational assets such as buildings, land, plant or equipment.

chart of accounts

List of all the accounts to be taken into consideration.

consolidated financial statements

Document presenting the P&L, balance sheet and financial position of an entire group, considered as a single company.

counterparty (CTP) dynamic group

SQL query that extracts from the data table a sub-group of entities or companies from those listed in the table.

CPM

Corporate Performance Management, i.e. the methods, valuation criteria, processes and systems used to monitor and manage a company's performance.

CTP

Counterparties, i.e. the opposite parties in a transaction described in a journal.

custom dimension

custom dimension.

D

detail account

Account that indicates the detail items for the normal account of reference.

details

Sub-elements within an account that allow for items to be classified in a meaningful way.

E

entity

Tagetik dimension that normally indicates the company in whose name the financial statements are produced.

event

Event that leads to a change in the shareholding relationship between two companies in a group, and which must be recorded by Tagetik as it affects the consolidation journals.

F

FCPM

Financial Corporate Performance Management, a specialist area of CPM designed to control the accounting and financial closing cycles.

financial statement template (FST)

Aggregation structure for accounts or dimensions that is primarily used to create the financial statements. FSTs may also be used to define other indices (e.g. KPIs).

financial statements

Document presenting the P&L, balance sheet and financial position of a company at the end of a given accounting period.

forecast

Update to budget data. Forecasts are prepared over the course of the year, when the company closes its first set of actual figures. Comparing the actual figures with budget figures may reveal differences that give rise to new forecasts.

form

Excel sheet that Tagetik uses within its reporting and data entry system in order to directly interact with the application database and to extract/insert data.

G

GAAP

(Generally Accepted Accounting Principles) Standards accepted as guidelines.

H

holding

Company that controls all the other companies in a group through the ownership of shareholdings. This is the company that prepares the consolidated financial statements.

I

IC

Intercompany - relating to companies belonging to the same group.

IFRS

(International Financial Reporting Standards) the international accounting standards used to standardise the global rules on accounting.

M

memorandum account

Account that allows you to insert values into the system that are not recorded in the financial statements but that may be useful for the company. These are normal accounts that do not generate variations.

N

notional data processing

Data processing relating to taxes or cash flows which is applied to entities that are not companies but that refer to a group company.

O

OPEX

(Operating Expenses) Costs needed to manage a product, business or system. Also known as overheads.

owned entity

Company whose shares are held by another company.

owner entity

Company that owns shares in another company.

P

profit and loss

Account that lists all the company's costs and revenues.

R

result account

Balance sheet result account or P&L result account. This is calculated automatically.

S

SCPM

Strategic Corporate Performance Management, a specialist area of CPM designed to improve strategies and returns.

T

tax year

Accounting period to which the company management refers. It normally runs from 1 January to 31 December.

TCO

(Total Cost of Ownership) Total cost of ownership or possession. Represents a company's total cost of owning a technology.

V

variation

This represents the variation (increase or decrease) in a balance sheet element over a given period of time, following an investment, divestment or loan. Variation accounts are used to describe and analyse variations.

variation account

Account that records the variation of a value over time.



Tagetik Software S.r.l.
Via Roosevelt 103
(Undefined variable: Company/Company.Operational_Address_line2)
Italia

https://www.wolterskluwer.com/en/solutions/cch-tagetik
info@tagetik.com
+39 058396811

CCH Tagetik
User ManualData Model
TK5-OLH-INtASS-EN
EN May 2023
© 2023 Tagetik Software S.r.l.