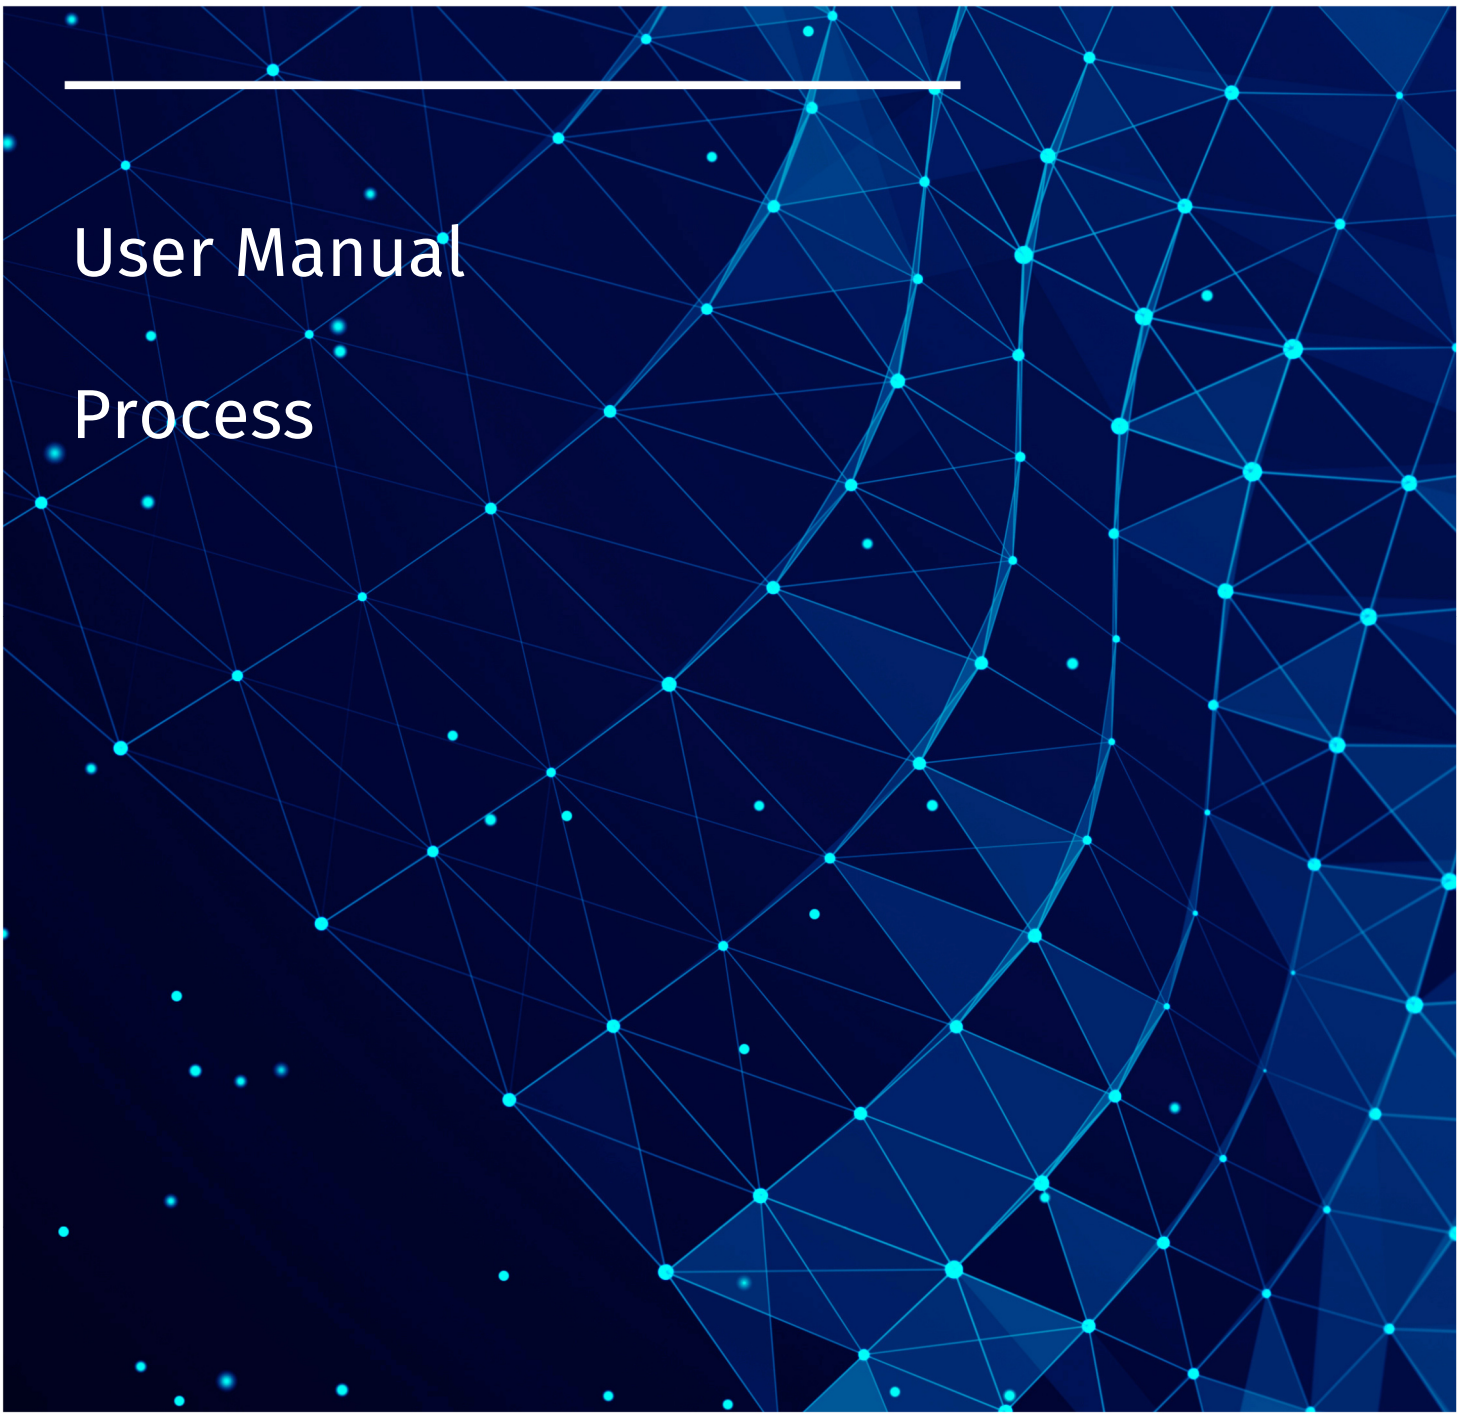


User Manual

Process

This manual provides a detail description of the steps to follow to parametrize a Process in order to manage the data entry activities, the automatic data processes and data submissions.

Version: 5.3.24

Wolters Kluwer

wolterskluwer.com

Latest update: May 2023

Table of contents

Processes in CCH Tagetik 10

Processes: basic concepts 10
Process page 12
Process definition page 14
Clone Process window 16
Lock setup window 16
Process configuration and deployment 17
Create processes 17
Managing processes 17
Deploy processes 19
Archiving process data 19
Create backup on offline tables window 20
The Data isn't consistent with the process window 20
Copy Requirements and Rules From window 21
Copy Override Rules on Generic Rules window 21

Business Workflow 22

Business Workflow concepts 22
Business Workflow page 24
Business Workflow icons 25
Steps page 28
Task workflow page 28
Task workflow for a Collaborative Office document 30
Define a Business Workflow 32

The entity's business cycles 37

Business cycles 37
Define Cycles window 37
Manage Status window 38
Set Business Cycles 39

Entity organisation and workflow 40

Organisation and workflow 40
Exceptions page 41

Definition results page (organisational hierarchy) 42
Mapping task workflow page 42
Definition result: Mapping task workflow page 44
Examples of mapping 45
Deadline dates page 46
Settings submission window 48
Advanced definition page 48
Shift dates window 49
Set deadline window 50
Organisation and Workflow setup 50

The Process Data Model 53

Introduction to the Process Data Model 53
Process Data Model definition 54
Data management for the Process Data Model 55
Process Data Model examples 56
Define Process Data Model page 58
Process Data Model/Entity Relationships page 60
Definition result: Process Data Models related to entities page 61
Definition result: Process Data Model page 61
Process Data Model setup 62

Data entry and submission 65

Data entry and processing in processes 65
Data entry modes 65
Data entry and submission rules 66
Data Entry & Submission Rules section 67
Amount & Intercompany rules page 67
Delete IC error signs algorithm 71
Journal rules and settings page 72
Categories for draft journals page 73
Submission rules page 74
Execution plan of jobs to run on submission and rejection page 76
Override Entity parameters on Original scenarios page 76
Define data entry and submission rules 78

Data Processing: introduction 79

Introduction to data processing 79
The process's data processing execution order 80
Data Processing section 82
ETL execution plan page 83
Define the Data Processing 84

Data Processing: carry forward 87

Carry forward data processing 87
Carry forward rules page 88
Carry forward rules - Accounts definition page 89
Override Carry Forward Categories page 89
Normal and Detail accounts/Categories to exclude page 90
Exclude Scenarios from Carry forward page 90

Data Processing: calculation logics 91

Calculation Logics 91
Calculation logic requirements page 92
Calculation logics graph page 92
Calculation logics overrides page 93
Overrides definition page 93

Data Processing: validation and balancing 95

Validations 95
Balancing data processing 97
Diagnostic Rules page 97
Plausibility diagnostic 99

Data Processing: consolidation 101

Consolidation Data Processing 101
Basic consolidation data processing 103
Consolidation Requirements page 106
Define Consolidation Area page 107
Periods page 108
Define consolidation area by period page 109
Define relationships between entities and classifiers for the period page 110

IC Elimination and Matching Requirements page 111
Generate proportional page 111
Generate converted page 112
Override FX rate difference accounts page 113
Customise account conversion type page 114
Generate consolidable and Equity evaluation page 114
Minorities page 116
Mergers page 117
Account reclassification and NER Requirements page 117
Rules Engine Designer requirements page 118
Advanced consolidation data processing 119
Advanced consolidation page 120
Financial investments reclassification page 121
Equity pick-up Requirements page 121
Pick-up percentages page 122
Override Pick-up percentages page 123
Pick-up rules page 123
IC Spreading Requirements page 124
Override IFRS5 rules page 124
Consolidation procedures 125

Data Processing: allocation and closing 127

Allocations and Closing Requirements page 127
Allocations & Closing rules page 129

Data Processing: Cash Flow Planning 130

Cash Flow Planning 130
Cash Flow Planning Requirements page 131
Cash Flow Planning Rules page 132
Copy actual data page 133
Dimensions/Financial Rules Mapping page (Create derived events and entries) 134
Cash management rules page (Financial simulation) 135

Data Processing: taxes 137

Data Processing related to taxes 137
Tax rules page 138

Taxes setup page 138
Deferred and prepaid taxes - Input accounts page 141
Direct taxes - Input accounts page 141
Deferred and prepaid taxes - Override output accounts page 142
Direct taxes requirements page 143

Data Processing: other data processing 144

Other data processing 144
Assets depreciation rules page 145
Customers/Asset categories attribution page 145
Dividend Requirements page 146

Notification emails 147

Notification emails 147
Send email events 148
Email templates page 150
Parametric e-mail elements 151
Manage the sending of emails 152

Snapshot scenarios 154

Snapshot scenarios 154
Snapshot - Requirements page 155
Manage snapshot scenarios 155

The processes cockpit 157

Process cockpit function 157
Process data management 157
Cockpits: common elements 158

The contributor cockpit 159

Contributor Cockpit 159
Contributor Cockpit page 160
Summary tab 161
Working in the Summary tab 163
Detail summary tab 164
Working in the Detail summary tab 166
Step tab 166

Organisation section of the <step> tab ... 168
Workflow section of the <step> tab ... 169
Working in the step tab ... 170
Performance Dashboard ... 171
Performance dashboard tab ... 171
Working in the Performance Dashboard tab ... 174
Working on process reports (contributor) ... 175
Actions section of Detail summary and step tabs ... 176
Partition data details window ... 182
Journals book window (for the contributor) ... 182
Drill down parameters page (ad-hoc analysis) ... 185
Pick-up check report window (contributor) ... 186
Copy amounts and journals window ... 186
Submission status window (contributor) ... 189
Entities submission status window ... 189
Lock data and Unlock data windows ... 190

The consolidator cockpit 192

Consolidator cockpit ... 192
Consolidator cockpit page ... 195
Summary tab ... 196
Step tab ... 198
Organisation section of the <step> tab ... 199
Workflow section of the <step> tab ... 200
Consolidation scenarios tab ... 201
Customising the consolidator cockpit ... 203
Working in the Consolidation Scenarios tab ... 203
Working on process reports (consolidator) ... 203
Actions section of the Summary and Step tabs ... 204
Actions section of the Consolidation scenarios tab ... 209
Copy Consolidation window ... 210
Drill down parameters page (ad-hoc analysis) ... 212
FX rate difference reserves analysis window ... 213
Financial investments - Net equity analysis window ... 214
Pick-up check report window (consolidator) ... 214

Journals book window (consolidator) 215
Change consolidation scope report window 217
Entity/Classifier Relationship page 218
Consolidation area scope page 219
Copy amounts and journals window 221
Copy amounts and journals task window 224
Net Result and Reserves Group Evolution analysis 227
Net Result and Reserves Group Evolution analysis window 227
Lock data and Unlock data windows 228
Copy consolidation on original 228
Copy consolidated on original window 230
Submission status window (for the consolidator) 231

Glossary 234

Processes in CCH Tagetik

Contents

This section covers the following topics:

Processes: basic concepts 10
Process page 12
Process definition page 14
Clone Process window 16
Lock setup window 16
Process configuration and deployment 17
Create processes 17
Managing processes 17
Deploy processes 19
Archiving process data 19
Create backup on offline tables window 20
The Data isn't consistent with the process window 20
Copy Requirements and Rules From window 21
Copy Override Rules on Generic Rules window 21

Processes: basic concepts

What are processes

A *process* is the component that CCH Tagetik uses to acquire, submit, process and log data on the customer's activity, allowing them to take control of the quality of their data, reporting and planning. It consists of a workflow, or a sequence of activities, in which authorised users insert, submit and approve data in accordance with a finite logical/functional flow of work.

Working with processes in CCH Tagetik means recreating on the system your actual workflow used to collect and submit data in house, processing that data accurately and generating valid documentation for said data that meets your business's short- and long-term needs.

Function

CCH Tagetik Processes can be used both to enter and process data in a centralised and accurate manner to produce reports, and to collaboratively manage data in order for it to be submitted and in order to monitor and plan business activities.

Based on their configuration, process workflows can be used to guide the collection and processing of all the data of an individual entity or entity (entity workflow) or for the submission of an entity's individual journals (journal workflow).#

Process structure

To create data collection and processing logics specific to the entity's business requirements, there must be the following structures:

- the *time dimension* of the activities documented by the process
- the *entity* authorised to enter and submission data
- the *logical steps* of the process
- the *accounts* on which to collect data
- the *rules* for data entry
- the *processing modes* for specific data or groups of data.

These structures are defined in the *Business Workflow*, *Data model*, *Data entry and submission rules* and *Data Processing* modules and used by processes according to the logics defined at the level of the individual process.

The management of data within processes

Data is managed according to the following steps:

- *data entry*, i.e. entering data in the application database.
- *submission*, i.e. the validation and locking of original collected data or calculated data for each individual entity.
- *processing* data according to the system rules and logics and/or rules and logics defined by the user.
- *consolidation*, i.e. the calculation of data at the group level as if it were a single entity for legal and reporting purposes.

The necessary elements for these steps are configured on the following pages of CCH Tagetik:

Configuration	Page
Data entry	Data Entry & Submission tile (see "Data entry and submission" on page 65)
Submission	
Data Processing	Data Processing tile (see Data Processing: le elaborazioni)
Consolidation	

These general configurations are applied automatically to all processes set up in CCH Tagetik. The generic rules can be overridden to adapt them to a specific process. See "Data Entry & Submission Rules section" on page 67 and "Data Processing section" on page 82.

Process configuration

CCH Tagetik has a default process ($Process) which allows you to use CCH Tagetik as a *data mart*, or a container for a subset of data and for reporting. This process is therefore predefined, but it still requires *Process Data Model* configuration (see "Introduction to the Process Data Model" on page 53).

***IMPORTANT**: like all system elements ($), the default $Process must not be deleted. However, it may be modified by configuring the PDM.*

When CCH Tagetik is used as a collaborative tool, a dedicated process must be created according to the entity's needs.

This requires intervening on several separate aspects in the various sections of "Process definition page" on page 14.

Process deployment

In CCH Tagetik, running deployment means applying to the system the parameters configured by the user in the interface, or updating the database tables with those parameters.

When deployment is run on processes, the system updates the database tables that manage the data entry rules in the various steps of the process and the checks on data prior to submission.

Deployment can be run on the **Process definition** page by the administrator user. Deployment can be run on all of the process's parameters by clicking the **Deploy** button, or some of the process's parameters by clicking the button corresponding to the configuration sections.

The parameters included in the last deployment, and therefore already applied within the system, can be consulted on the **Definition result** pages (e.g. **Definition result: Mapping task workflow**).

The order in which the records are inserted in the definition tables is important, since this determines the order in which the deployment processes the rows.

Individual processes can also be deployed from the application's general deploy page (see II Deployment).

Process page


Admin

Application database > Processes tile

Purpose of the page

This page shows the list of processes defined in CCH Tagetik; it allows you to configure them and create new ones.

What it looks like

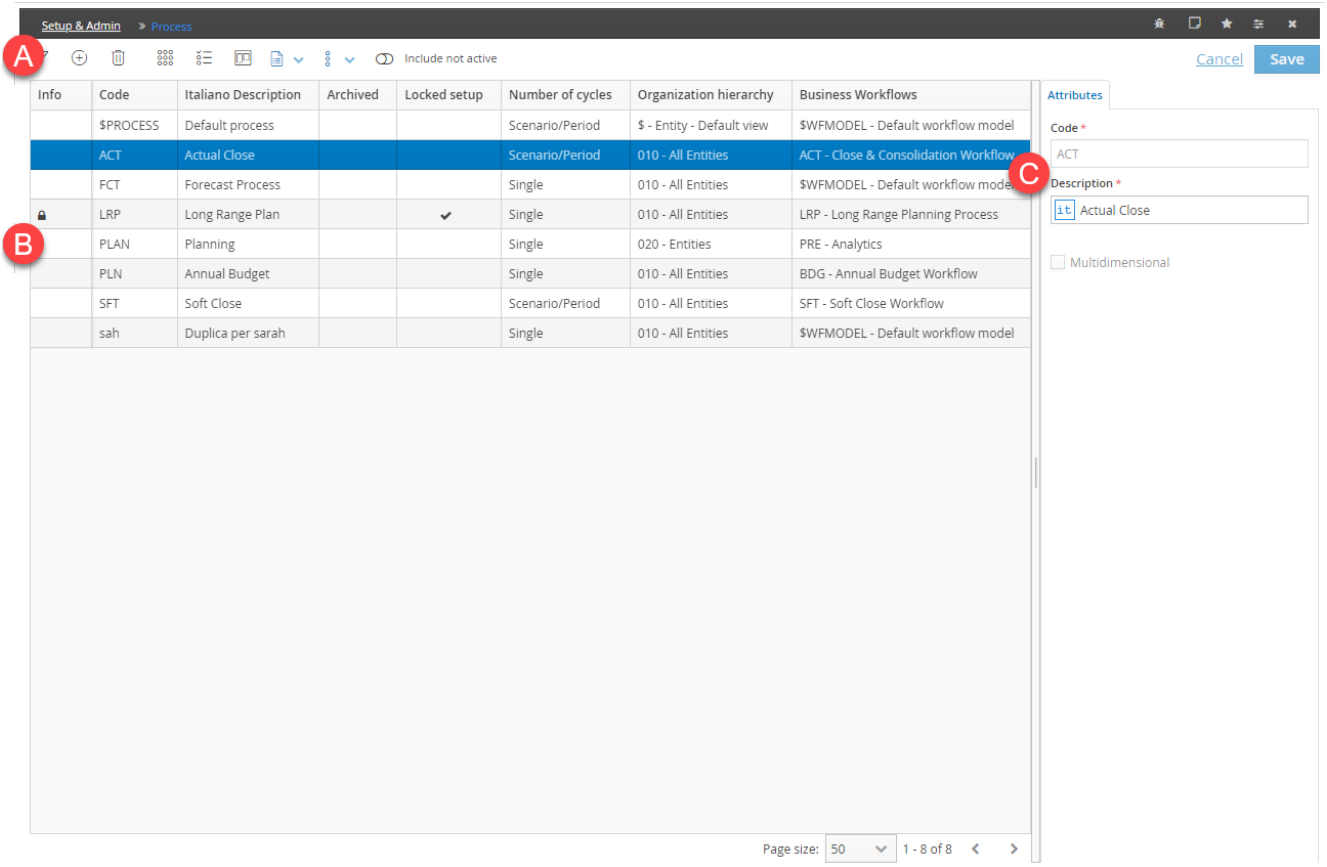

Element	Description
A	Tool bar
B	List of processes
C	Configuration tab

Commands on the page

Element	Description
	**Excluded Control groups**: allows you to generate a report in Excel format containing a list of the control groups excluded from the selected process.
	• **Process definition**: opens a page to configure the selected process. • **Clone process**: opens a window to create a new process based on the selected process. • **Lock setup**: opens a window to lock the setup of the selected process and of one or several rules or logics linked to the process that cannot be overridden directly on the process itself but are called via nodes. • **The Data isn't consistent with the process**: opens a window to delete any data related to dimensions that are no longer used or dimensions not present in the selected process. It also allows you to generate reports on that data. • **Copy Requirements and Rules From**: opens a window to copy one or several **data processing** rules from another process onto the selected process. • **Copy Override Rules on General Rules**: opens a window to copy the override rules for the selected process onto the general rules of the environment.
 **Include not active**	Show/hide archived processes.
	Shows the number of changes not yet saved.

Page fields

Please find below the most important fields.

Field	Description
Archived	✔: the process has been archived and can no longer be defined.
Locked setup	✔: the modification of one or several of the process's parameters or logics is locked.
Number of cycles	• **Single**: submission/rejection takes place at the same time on all scenarios/periods linked to the process. • **Scenario/period**: submission/rejection takes place by scenario/period.
Organization hierarchy	Hierarchy of entities contributing to the process's data collection.
Business Workflow	Flow of activities associated with the process.
Origin	Origin of the data. The data may originate from data processing or be entered by a user.
Process with dimension by step	This allows you to define a specific dimension and the relative administrative hierarchy for every step of the process, to then associate the process with a multi-dimensional Business Workflow. ***IMPORTANT**: this field can only be selected during the creation of a new process. Once the process is saved, this setting can no longer be changed.* ***IMPORTANT**: allows you to manage company processes developed entirely on the Analytical Workspace.*

Process definition page


Admin

Application database > Processes tile > ⋮ > Process setup

Purpose of the page

This page allows you to define the characteristics of the selected process.

What it looks like

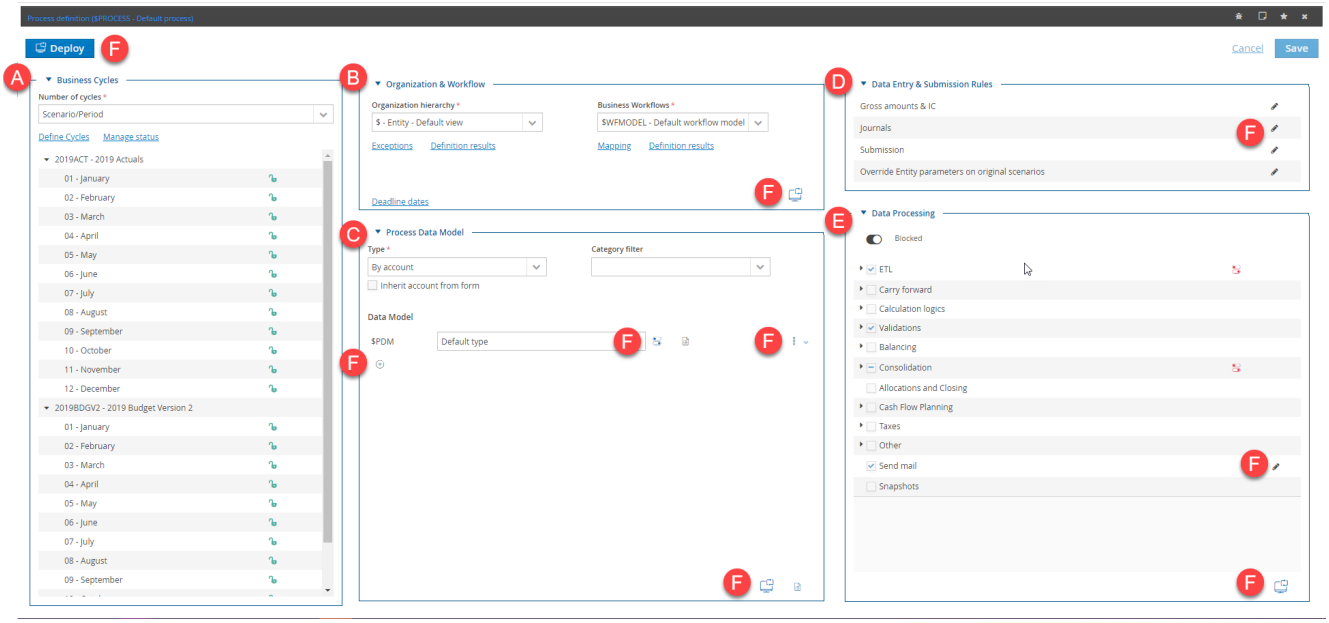

Element	Description
A	Business Cycles section
B	Organisation and Workflow section
C	Process Data Model section
D	Data Entry & Submission Rules section
E	Data Processing section
F	Action buttons on this page

Page sections

Section	Description
"Business cycles" on page 37	Defines the product's submission type (single submission, or submission by period/scenario). Period status: • : locked. Data cannot be loaded for that period. • : unlocked. Data can be loaded for that period.
"Organisation and workflow" on page 40	Defines the process's organisational hierarchy and business workflow.

Section	Description
"Introduction to the Process Data Model" on page 53	Defines the subset of accounts or accounts/categories on which to collect, submit and process data of the process for each individual step.
"Data entry and submission rules" on page 66	Defines the specific data processing and submission rules for the process based on the processing and submission rules defined in CCH Tagetik.
"Introduction to data processing" on page 79	Defines the data processing to be run on the process, the relative requirements and any overrides to be applied to the basic rules.

Actions in the Business Cycles section

Element	Description
Define Cycles	Opens the "Define Cycles window" on page 37
Manage status	Opens the "Manage Status window" on page 38

Actions in the Organisation and Workflow section

Element	Description
Exceptions	Opens the "Exceptions page" on page 41
Definition result	Opens the "Definition results page (organisational hierarchy)" on page 42"Manage Status window" on page 38
Mapping	Opens the "Mapping task workflow page" on page 42
Definition result	Opens the "Definition result: Mapping task workflow page" on page 44
Deadline dates	Opens the "Deadline dates page" on page 46

Actions in the Process Data Model section

Element	Description
Inherit account from form	(only for Process Data Models by account) Includes in the process the accounts specified in the related forms.
	Opens the "Define Process Data Model page" on page 58
	• (in the section pane) Allows you to view the **Definition result: Process Data Model** page. • (next to Data Model code and description) Allows you to view the **Definition result: Process Data Model** page for the relative data model.
	• **Copy from**: allows you to copy the Process Data Model configurations of an existing process onto the same row of the Process Data Model. • **Cancel**: allows you to cancel the Process Data Model from the process.
	Deploys the section's settings.

Actions in the Data Entry & Submission Rules section

See "Data Entry & Submission Rules section" on page 67.

Actions in the Data Processing section

See "Data Processing section" on page 82.

Clone Process window

Admin

Application database > Processes tile > select process > ⋮ > Clone process

Purpose of window

This window allows you to create a new process based on the selected process.

Options in window

Element	Description
Also clone Scenarios	Allows you to set up extra scenarios in addition to the existing scenarios, which are copies with a new code.
Copy the submission status	(only if **Also Clone Scenarios** is enabled) Copies the submission status of source scenarios onto the newly created scenarios.
Keep original user's details on data	Copies the user, date and origin of the original process's data. otherwise, the code of the user that ran the clone, the date on which the clone was made and INPUT_WEB, as the origin, will be entered.
Copy Time Dependent Datamodel	Copies the Time Dependent Datamodel of the original process.
Copy Rates & Events	Copies the Rates & Events of the original process.
Copy data	Copies the data of the original process.

Lock setup window

Admin

Application database > Processes tile > select process > ⋮ > Lock setup

Purpose of window

This window allows you to lock rules that cannot be overridden directly on the process because they are called during the process via a node of calculation rules or a node of IC elimination rules associated with the process. Thus, all the rules used by the process in the data processing are overridden in the process and stored offline.

Options in window

Element	Description
Control groups	Locks editability on the control groups called during the process.
Calculation logics	Blocks editability on the account calculation logics called in the process.
IC elimination logics	Blocks editability on the intercompany elimination logics called in the process.
Account reclassification logics and NER	Blocks editability on the account and NER reclassification logics called in the process.
Multidimensional reclassification logics	Blocks editability on the multidimensional reclassification logics and NERs called in the process.

Process configuration and deployment

Sequence of procedures

Process configuration and deployment require the following procedures to be run in the specified order:

1. "Set Business Cycles" on page 39
2. "Organisation and Workflow setup" on page 50
3. "Process Data Model setup" on page 62.
4. "Define data entry and submission rules" on page 78
5. "Define the Data Processing" on page 84.
6. "Deploy processes" on page 19.

Create processes

Pagine di lavoro

Process page 12
Process definition page 14

Concept Information

Processes: basic concepts 10

Application database > Processes tile

Create a process

1. Click ⊕: a new row will appear.
2. In the **Attributes** section, enter the process code and a description.
3. (Optional) For the process to be able to use dimensions other than the standard ones, including Analytical Information Hub dimensions, select the **Process with dimension by step** option, then select the desired multi-organisation Business Workflow.
4. Click **Save**.

Create a process based on an existing process

1. Select the source process.
2. Select ⋮ > **Clone process**: the **Clone process** window will open.
3. Enter the code and description of the new process.
4. To customise scenarios that have been created, click ⧉ **Also clone Scenarios**.

Managing processes

Pagine di lavoro

Process definition page 14

Concept Information

Processes: basic concepts 10

Application database > Processes tile

Introduction

The procedures for managing and modifying processes are listed below.

Change the description of a process

1. Select the desired process.
2. In **Attributes**, change the process description.
3. Click **Save**.

Clone a process

1. Select the source process.
2. Select > **Clone process**: the **Clone process** window will open.
3. Enter the code and description of the new process.
4. To customise scenarios that have been created, click **Also clone Scenarios**.

Lock the editing of certain process logics or rules

1. Select the process to lock
2. Select > **Lock setup**.
3. Select the desired items.
4. Click **OK**.

Create backup on offline tables

This procedure can only be run on processes where submission is set to by scenario/period.

1. Select the desired process.
2. Select > **Create backup on offline tables**: the relative window will open.
3. Click : the **Items selection** window will open.
4. Select the scenarios/periods of which you want to create a backup and click **OK**: the corresponding scenario row will appear in the **Create backup on offline tables** window.
5. Enter a code and description for every scenario.
6. Click **Run**.

Delete from the process data that is no longer of use in relation to the scenarios/periods

This procedure allows you to remove data related to dimensions that are no longer used or involved in the selected process from the scenarios/periods.

1. Select the desired process.
2. Select > **The Data isn't consistent with the process**: the relative window will open.
3. Click : the **Items selection** window will open.
4. Select the scenarios/periods from which to delete superfluous data, then click **OK**.
5. Select the types of data to delete.
6. (optional) To view the details window showing the deleted data at the end of the procedure, click **Show the number of data that will be deleted (Procedure is slower).**
7. Click **Run** to delete the selected data from the process and potentially view the details window showing the deleted data.

Copy data processing requirements and rules from other processes

1. Select the desired process.
2. Select > **Copy Requirements and Rules From**: the **Copy Requirements and Rules From** window will open.
3. In **Process**, select the process containing the data processing from which to copy the requirements and rules: the data processing appears in the window.
4. Select the desired data processing.
5. Click **Run**.

Copy Override Rules on generic rules

1. Select the desired process.
2. Select > **Copy Override Rules on Generic Rules**: the relative window will open.
3.
4. Select the logics and/or data processing from which to copy the override rules.

5. Click **Run**.

Deploy the process

Application database > Processes tile > select process > ⋮ > Process setup

Click **Deploy**: the full deployment of the process will be run.

Deploy processes

Pagine di lavoro
Process definition page 14
Concept Information
Process configuration and deployment 17

Application database > Processes tile > select process > ⋮ > Process setup

Perform full deployment of the process

Click **Deploy**: the full deployment of the process will be run.

Perform partial deployment of the process

Click in a specific section: deployment is only run for data related to the section in question.

Archiving process data

Create backup on offline tables

In CCH Tagetik, collected data can be archived in dedicated database tables, called *offline tables*, which have the same information content as the original data tables. The *offline storage* of data is useful to limit the size of database tables when working with a large volume of data.

When offline data storage is performed, the system moves scenario/period data from the data entry tables, called *original tables*, to the offline tables. Special scenarios onto which to copy the original scenario/period data are then created on the offline tables.

After the data has been stored offline, the original scenarios/periods are blocked: if all the scenarios/periods of a process are stored offline then the process is blocked and stored offline.

Data shifted into offline tables remain available for reporting, but not for data entry or processing.

Offline tables are identified by the prefix H_ followed by the original name of the table.

The offline storage operation can be reversed, but restoring data does not automatically unblock the original scenarios/periods.

Deletion of data that is no longer used by the process

The creation and processing of process data is based on the use of CCH Tagetik's Entity, Account, Scenario, Category dimensions, etc. However, some data linked to a given dimension may be superfluous for the purposes of the data processing inherent to the process.

The **Data isn't consistent with the process** functionality allows you to detect superfluous data on the Entity, Account and Category dimensions and delete it from the process, to facilitate data processing.

Deleting data no longer in use from the process does not delete it from the relevant CCH Tagetik dimension.

Create backup on offline tables window

Admin

Application database > Processes tile > select process > ⋮ > Create backup on offline tables

Purpose of window

This window allows you to copy data from scenarios/periods of the process, onto backup scenarios/periods created in the tables stored offline.

Options in window

Element	Description
Scenario /Period	Opens a window to select original scenarios/periods from which you want to create the backup.
Source scenario	Shows the scenario from which data can be copied.
New Scenario code	Allows you to insert a code for the backup scenario to be created on the offline tables.
New Scenario description	Allows you to insert a description of the backup scenario to be created on the offline tables.

The Data isn't consistent with the process window

Admin

Application database > Processes tile > select process > ⋮ > The Data isn't consistent with the process

Purpose of window

This window allows you to delete, from the process's scenarios/periods, data related to dimensions that are no longer used or not present in the process.

Options in window

Element	Description
Scenario/period	Allows you to select the scenarios/periods associated with the process from which to delete data.
Data on entities that don't belong to the process	Deletes data on entities, defined for the selected scenarios/periods, that are not associated with the process.
Data on the accounts that don't belong to the process	Deletes data on accounts, defined for the selected scenarios/periods, that are not associated with the process.
Data on the categories that don't belong to the process	Deletes data on the categories, defined for the selected scenarios/periods, that are not associated with the process.
Shows the number of data that will be deleted	Shows details of the number of data to be deleted and search queries of data to be deleted when the operation is run.

Copy Requirements and Rules From window

Admin

Application database > Processes tile > select process > ⋮ > Copy Requirements and Rules From

Purpose of window

This window allows you to copy requirements and override rules from another process's data processing onto the process.

Options in window

Fields	Description
Process	Selects the process containing the data processing from which to copy requirements and override rules.
Rows in the Parameters & Rules Management table	These select the data processing from which you want to copy requirements and override rules.

Copy Override Rules on Generic Rules window

Admin

Application database > Processes tile > select process > ⋮ > Copy Override Rules on Generic Rules

Purpose of window

This window allows you to select the override rules related to the data processing of the process onto the corresponding genericCCH Tagetik rules.

Options in window

Fields	Description
Rows in the Parameters & Rules Management table	These select the override rules of the process to be copied onto the generic rules of the domain.

Business Workflow

Contents

This section covers the following topics:

Business Workflow concepts 22
Business Workflow page 24
Business Workflow icons 25
Steps page 28
Task workflow page 28
Task workflow for a Collaborative Office document 30
Define a Business Workflow 32

Business Workflow concepts

What is Business Workflow

A Business Workflow is an entity's specific workflow. It is prepared in CCH Tagetik in such a way that users responsible for entering and processing data can do it in an order that matches the entity's own way of working.

Business Workflow structure

The Business Workflow is made up of various logical and temporal steps, called *steps*. All logical steps can be preparatory to the next step and parallel to other steps. They are identified by a code and contain one or several activity flows, called *task workflows*. Every activity flow is made up of several activities (*tasks*) which must be run in a certain order.

Examples of steps

In a statutory consolidation process, it may be necessary to collect and submit data from financial statements and journals at different times and, subsequently, in a different step, collect data from a supplementary note.

In a budget process, however, it may be useful to separate the collection of revenue data from the collection of fixed cost data, as well as data on investments and staff costs.

Examples of tasks

In a Payroll data collection task workflow, the completion of each data entry form constitutes a different task.

Default Business Workflow

CCH Tagetik provides a default Business Workflow by Entity based on Entity dimension with code $WFModel, containing a single $STEP step. This Business Workflow can be used where there is no need to manage

separate steps or specific activities other than submission.

Characteristics of the steps and task workflows


Steps and task workflows can be completed in series or in parallel. Steps are submitted once and how they correspond to each other defines the chronological order of submission. Steps completed in parallel can be submitted independently from each other and task workflows can be run simultaneously.

It is also possible to specify whether to allow certain steps to be submitted only after all the entities in the previous step have been submitted. This is useful for steps in which one entity attributes transversal costs to other entities. Accordingly, in the subsequent step the entities receiving those costs can submit the total of their own costs and those received from the previous step only after the previous step has been submitted in full, i.e. on the other entities as well.

The task workflows of contributor steps and consolidator steps may contain only tasks that concern the contributor user or consolidator, respectively.


Example with two steps and task workflows in series

This image shows an extract from a Business Workflow graph made up of two steps. The first step contains one task workflow and the second step contains two in series.

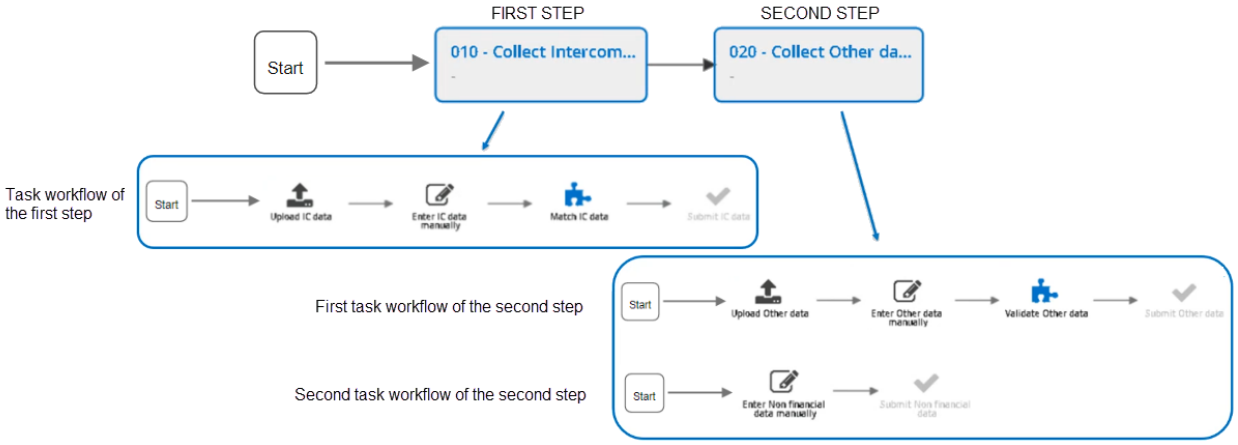

Example with three steps and with the steps' first activities in parallel

This example shows a Business Workflow in which the first two tasks of each task workflow can be run in parallel. The next task can only be run after both tasks have been completed. You can only move to the next step once the previous step's task workflow has been completed.

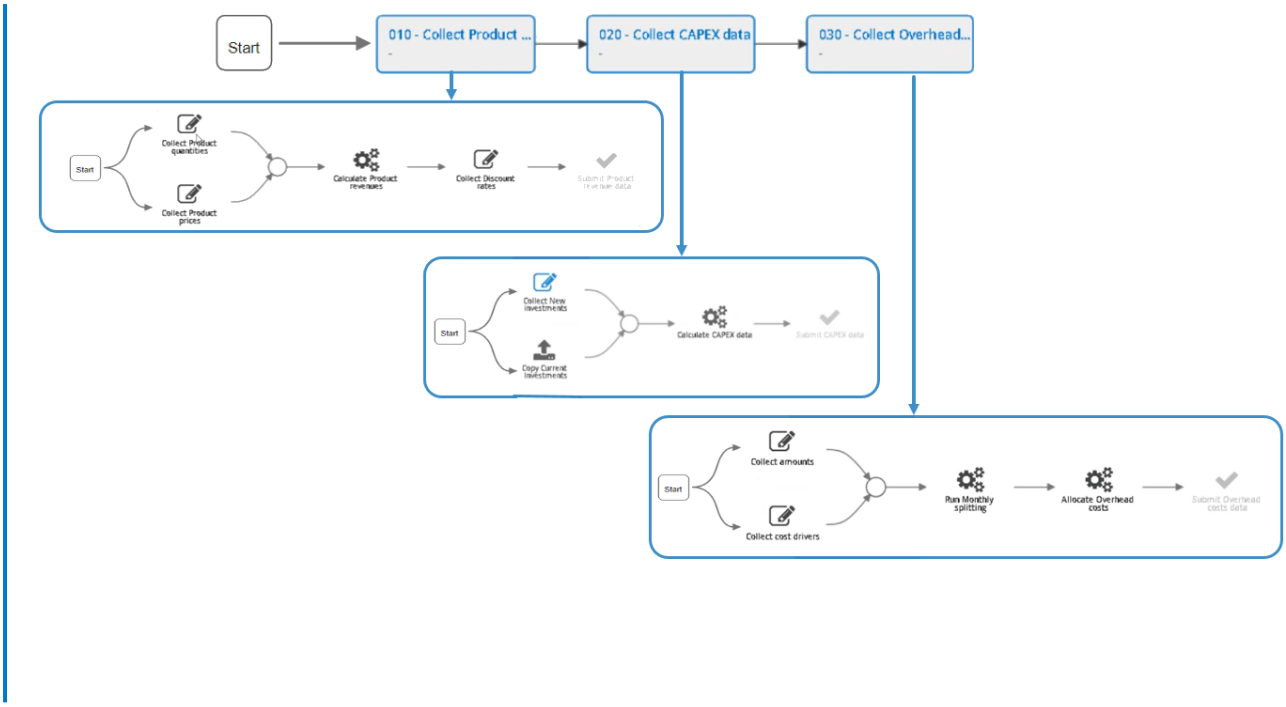

Particular features of task workflows

Several task workflows can be created, depending on the calculation models or needs of the various entities in the group. By default, CCH Tagetik provides two task workflows for every step; these are not visible in the task workflow definition, but are available during the process setup:

- **$ - Task Workflow**: to insert a submission only task for a process.
- **$$. Task Workflow**: to insert a step where no significant tasks are run for the entity in a process.

Task labels

The activities run by tasks can be identified by labels attributed to those tasks. Several tasks can therefore be grouped under the same label. These labels can be referred to to assign tasks to several specific users.

Task groups

Individual tasks can be grouped, so the user can run the corresponding data processing with a single click, e.g. for consolidated data processing. Grouped tasks can be viewed as a single task and expanded later or run all together.

Completing task workflows

Every task workflow must be completed with a submission task. If necessary, one or more data approval tasks can be added later. This is useful when different people are responsible for submission and approval.

Business Workflow page

Admin

Application database > Business Workflows

Purpose of the page

This page allows you to configure Business Workflows.

Specific actions on the page

Element	Description
	• **Steps**: allows you to set the contents of the Business Workflow. • **Clone business workflow**: creates a copy of the selected Business Workflow.

Page fields

Please find below the most important fields.

Field	Description
Multidimensional	Allows you to assign an organisational dimension (Entity or analytical dimension) to each step. At present, it can be used for operational budget processes on Analytical Workspace

Business Workflow icons

Data integration

Element	Description
	ETL dictionary
	ETL lookup table
	Run ETL
	Quick Data Loader
	Loading to Analytical Workspaces
	• Update Financial Workspaces • Export from Analytical Workspaces - XBRL format • Export from Analytical Workspaces - Bank of Italy Matrix format • Export Analytical Workspaces - XML format • Export Analytical Workspaces - File format
	Data Export Service
	DTP
	Join node

Data entry & Reporting

Element	Description
	• Form • List of forms
	Gross amount

Element	Description
	IC amounts
	Entity journals
	Consolidation journals
	Ownership structure register
	Cash Flow Planning
	Access partition
	Join node

Core Data Processing

Element	Description
	• Entity and Group preliminary, Preliminary on consolidation area • Entity Data Processing
	Consolidation
	Calculation Logics
	Allocations & Closing
	Cash Flow Planning
	Join node

Validations

Element	Description
	Diagnostics
	IC cockpit
	Join node

Submission

Element	Description
	Submission
	Approval
	Join node

Other data processing

Element	Description
	Monthly splitting
	• Process cube • Update QlinkView
	Stored procedure
	Jobs
	Transaction matching
	Join node

Other activities

Element	Description
	Collaborative Office
	Info
	Bookmark
	Checkpoint
	Deployment
	Production control
	• Machine Learning Training • Machine Learning Execute • Machine Learning Dashboard Wizard
	Join node

Steps page

Admin

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

Purpose of the page

This page allows you to add steps to the selected Business Workflow.

Step window fields

This window will appear in the modify Business Workflow step, after the **Step** icon has been dragged into the work panel.

Please find below the most important fields.

Field	Description
Description	Description of the step in the application language. If there are several languages, you can add a description for every enabled language.
Step type	• **Contributor**: step visible on the contributor user's cockpit with their typical activities. • **Consolidator**: step visible on the consolidator's cockpit with their typical activities. • **Contributor / Consolidator**: step visible on the cockpits of the contributor user and consolidator, with both users' typical activities (only for Business Workflows by Entity). ***IMPORTANT**: the last option is applied by default when migrating from previous versions. Do not use in a new domain.*
Advanced	• **Allow Submission only if the previous step is submitted**: only allows the entity to be submitted in this step if the previous step has been submitted for all entities of the data collection process (only for Business Workflows by Entity).
Dimension	Dimension that will be used in the submission of the step in the process. It is possible to specify either the Entity dimension or one of the analytical dimensions. . **IMPORTANT**: only for Business Workflows with "dimension by step" enabled.

Task workflow page


Admin

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step

Purpose of the page

This page allows you to create task workflows for the selected step.

What it looks like

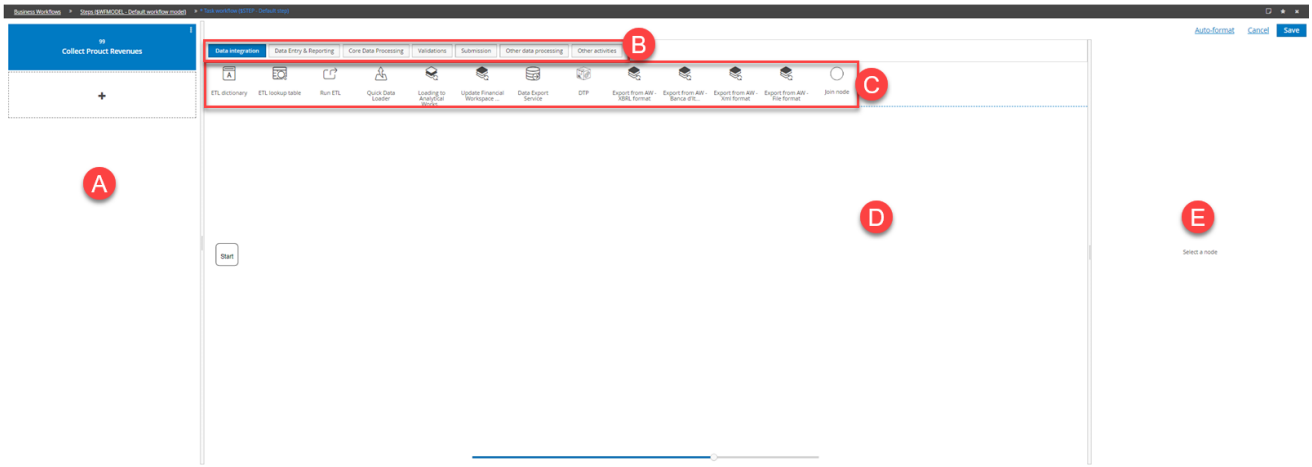

Element	Description
A	List of task workflows created and button for adding a new task workflow
B	Activities tab
C	Activities related to the selected tab
D	Work panel
E	Information related to the activity selected in the work panel

Activities tab

For multidimensional workflows, only some of these tabs appear.

Tab	Contents	Business Workflow with dimension by Step
Data integration	Activities for integrating data en masse from external sources.	x
Data entry & Reporting	Activities related to entering and consulting data present in CCH Tagetik.	x
Core data processing	Application data processing that allows you to transform and add data present in Tagetik in different ways according to your needs.	-
Validations	Diagnostics and IC cockpit	-
Submission	Submission and approval activities to complete the task workflow.	x

Fields in window to create a task workflow

This window will appear after you have clicked on ✚ to create a new task workflow.

Please find below the most important fields.

Field	Description
Enable alternative approval paths	Makes some approval activities that may have been entered optional. • **No**: alternative approval paths not enabled. All approval activities entered are mandatory. • **Manual rows effect on the main accounts**: approval activities can only be run if the value of the main accounts is within the threshold specified as a parameter for the relative tasks. • **Effect on the specific account**: approval activities can only be run if the value of the account for calculating the alternative approval paths is within the threshold specified as a parameter for the relative tasks. Enable the **Account for the calculation of alternative approval paths** field.
Account for the calculation of alternative approval paths	Only with **Effect on the specific account** selected. Account used for calculating the alternative approval paths.

IMPORTANT: *Both fields are only valid for Business Workflows by Entity.*

Fields in window to add a task

This window will appear after a task icon has been dragged into the work panel.
Please find below the most important fields.

Field	Description
Optional	Make the task optional. It will then be possible to submit task workflow data even without having run the task.
Read-only	For forms, this allows you to open the form in navigation mode rather than data entry mode. If the form is in navigation mode, the task will automatically become optional. The user must in any case declare that the task has been completed to continue to the next one.
Enable e-mail notification	Only if the process send email rule **Completion: Process task workflows** is active. Sends the task managers an notification email reporting that the previous task has been completed.
Manually declare task completed	Allows you to select the mode for declaring the task complete.
Parameters	Allows you to indicate the parameters for running the task. The displayed parameters will depend on the type of task that has been selected. For example, for **Submission** and **Diagnostics** activities, underlying nodes and entities can also be submitted en masse and diagnostics can be run on them. The **Forms** option allows you to indicate the report in the list of preconfigured reports that the user can use.
Label	Assigns a label to the task.

Task workflow for a Collaborative Office document

Background

In addition to numbers and amounts, CCH Tagetik allows you to submit Collaborative Office documents containing text, charts and tables.

How to manage document submission

CCH Tagetik allows you to link the submission of a document created using Collaborative Office to the desired step of a specific Business Workflow. To do this, a specific task workflow must be created within

that step, made up of as many Collaborative Office tasks as there are *document parts* in the document to be submitted.

Task workflow structure

The task workflow must mirror the structure of the document to be submitted. The Collaborative Office tasks within it must be arranged according to the sequential order of the parts, which in this document will be referred to as specified in the following example of the document parts tree:

1. paragraphs
2. chapters
3. document (*master document*)

Prerequisites for creating a task workflow


To create the task workflow for a Collaborative Office document, you must:

- Know the structure of the document in question.
- Have activated the **Relate to the process** property in the specific additional component of the Word file in document properties. Under the same parameters (Entity, Scenario, Period and Document language) the option can be activated for one document only.

***Note**: task workflows related to the process can only be managed from the web interface.*

Example of a task workflow with Collaborative Office tasks

Document comprising two chapters of two paragraphs each.

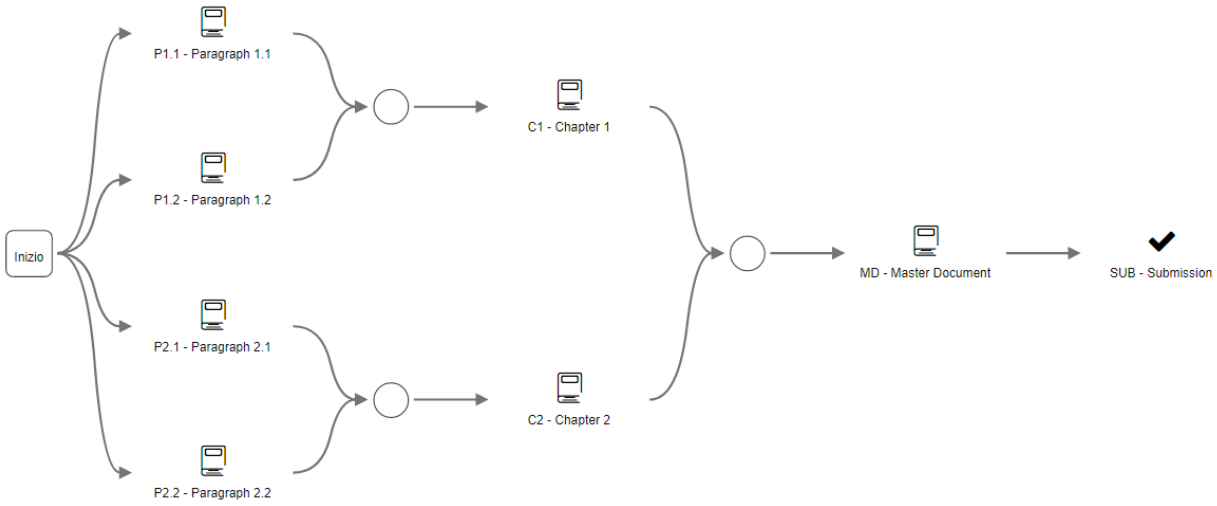

Utility for the user

For task workflows with Collaborative Office tasks, the user can access the process cockpit, open the various parts of the desired document in order and, if required, declare them to be complete.

The **Task is complete** option allows you to submit the document part, or run the submission/approval tasks once only, if the user is authorised to do so. If the **Open as PDF** option is active in the task definition step, it will not be possible to submit it from the cockpit.

***Note**: to enable the **Task is complete** menu and therefore submit the document part, the Manually declare task completed option must be activated when the task is created.*

Document submission

A document can only be submitted when the document parts of which its comprised have been declared complete. Parts can only be declared complete when all of their sub-parts have been declared complete.

Define a Business Workflow

Pagine di lavoro

Business Workflow page 24
Task workflow page 28
Steps page 28

Concept Information

Business Workflow concepts 22

Sequence of core procedures

The following procedures are essential for defining a Business Workflow and must be performed in the specified order.

1. "Create a Business Workflow" below.
2. "Add steps to a Business Workflow" below.
3. "Create a task workflow and the relative tasks" below or "Create a task workflow for a Collaborative Office document" on the facing page.

Create a Business Workflow

Application database > Business Workflows

1. Click ⊕: a new row will appear in the table.
2. In the **Attributes** tab, complete the fields as desired.
3. If you want to define a dimension for every step, select **Process with dimension by step**.
4. Click **Save**.

Add steps to a Business Workflow

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

1. If the Business Workflow has already been prepared, click **Edit**.
2. Drag the **Step** icon into the work panel.
3. Complete the fields as desired and click **OK** to save.
4. To add another step, repeat steps 2 and 3, considering the following:

If you want to arrange the steps...	Then...
in series	position the step next to the previous one.
in parallel	position the step below the one to be completed in parallel.

5. After two or more steps in parallel, drag a join node into the work panel.
6. Link the elements of the Business Workflow. See "Link two elements of the chart" on page 34for details.
7. To organise the Business Workflow formatting automatically, click **Auto-format**.
8. Click **Save**.

Create a task workflow and the relative tasks

This procedure allows you to select and order the tasks that the user has to complete.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step

1. Click ✚: the **Task workflow** window will open.
2. Complete the fields and click **OK** to confirm.
3. Click the desired task tab.
4. Drag the desired task into the work panel.
5. Complete the fields and click **OK** to confirm.

6. To add more tasks, repeat steps 3 to 5, considering the following:

If you want to arrange the tasks...	Then...
in series	position the task next to the previous one.
in parallel	position the task below the one to be completed in parallel.

7. After two or more tasks in parallel, drag a join node into the work panel.
8. Click the **Submission** tab and drag the **Submission** task to the bottom of the task workflow. If necessary, also drag the **Approval** task.
9. Complete the fields and click **OK** to confirm.
10. Link the elements of the task workflow. See "Link two elements of the chart" on the next page for details.
11. To organise the task workflow formatting automatically, click **Auto-format**.
12. Click **Save**.

Create a task workflow for a Collaborative Office document

This procedure allows you to create a task workflow containing one task per document part of the Collaborative Office document to be submitted/closed.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step

1. Click ✚: the **Task workflow** window will open.
2. Complete the fields and click **OK** to confirm.
3. Click the **Other activities** tab.
4. For each document part of the document to be submitted, drag a **Collaborative Office** task into the work panel, complete the fields and press **OK** to confirm.

   ***Note**: selecting **Open as PDF** will open the document in PDF format.*

5. Link the first document part to the **Start** task.
6. Link the tasks together.
7. Drag a join node into the work panel to link several document parts in parallel.
8. Join the tasks attributable to document parts of the same document chapter to the same node.
9. For each chapter, drag a **Collaborative Office** task into the work panel, complete the fields and press **OK** to confirm.
10. Drag a join node into the work panel.
11. Link the related chapter and tasks via the node you have just dragged over.
12. Drag a **Collaborative Office** task into the work panel for the master document, complete the fields and press **OK** to confirm.
13. Click the **Submission** tab and drag the **Submission** task to the bottom of the task workflow.
14. Complete the fields and click **OK** to confirm.
15. Use the nodes to link the chapters to the master document task and the master document task to the **Submission** task.
16. To organise the task workflow formatting automatically, click **Auto-format**.
17. Click **Save**.

Other procedures

The following procedures are additional and may be useful for managing the Business Workflow.

- "Modify a Business Workflow" on the next page.
- "Link two elements of the chart" on the next page.
- "Modify/duplicate/delete a task workflow" on the next page.
- "Modify a task workflow task" on the next page.
- "Create and edit labels" on the next page.
- "Group tasks together" on page 35.

Modify a Business Workflow

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

1. Click **Edit**.
2. Do the following:

If you want to...	Then...
delete a step or link (arrow)	1. Right click on the desired step/arrow. 2. Click **Delete**.
modify a step	1. Right click on the desired step. 2. Click **Edit**. 3. Edit the fields as desired and click **OK** to save.

3. Click **Save**.

Link two elements of the chart

1. Position the cursor in the centre of the first element to link.
2. Drag the arrow to the second element to link.

Modify/duplicate/delete a task workflow

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

1. Click on the desired step.
2. Do the following:

If you want to...	Then...	and...
modify a task workflow	In the desired task workflow pane, click ⋮.	1. Click **Edit**. 2. Edit the fields as desired and click **OK** to save. 3. Click **Save**.
duplicate a task workflow		1. Click **Clone**. 2. Complete the fields as desired and click **Run** to save. 3. Click **Save**.
delete a task workflow		click**Cancel**.

Modify a task workflow task

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

1. In the work panel, select the desired task: complete the relevant information.
2. Click **Edit**.
3. Edit the fields as desired and click **Save**.
4. To create or edit a label, follow the "Create and edit labels" below procedure from step 2.

Create and edit labels

This procedure allows you to work on labels of the selected Business Workflow.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

1. Select the desired task: the relative information will appear on the right.
2. Click **Manage labels**.

3. Do the following:

If you want to...	Then...
create a label	1. Click ⊕ 2. In **Attributes** complete the fields as desired.
edit the description of a label	1. Click on the desired row of the label. 2. In **Attributes** edit the description as desired.
change the colour of a label	1. Click on the desired row of the label. 2. In **Attributes** click on the pane of colours. 3. Select the desired colour and click **OK**.

4. Click **Save**.

Group tasks together

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

1. Press CTRL and click on the tasks to group together.
2. Right click one of the desired tasks and click **Create group**.

The entity's business cycles

Contents

This section covers the following topics:

Business cycles 37
Define Cycles window 37
Manage Status window 38
Set Business Cycles 39

Business cycles

What are business cycles

In process settings, business cycles define the type of submission (single submission or submission by scenario/period). They are based on scenarios and periods, and so these dimensions must already be prepared in CCH Tagetik's Data Model.

Function

Setting the business cycles allows you to define the time interval over which the data must be submitted.

There are two types of business cycle:

- Submission by scenario/period: submission is completed for every scenario/period of the cycle. The cycle data are then locked when all scenarios/periods have been submitted.
- Single submission: data submission is completed for a group of periods, e.g. every 12 periods for an annual process. Data for the entire cycle are locked when the last scheduled period has been submitted.

***IMPORTANT**: if you change the type of business cycle, data related to the Analytical Information Hubs linked to the process will be lost.*

Define Cycles window

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Define Cycles

Purpose of window

This window allows you to set the necessary business cycles to define the time interval over which the data must be submitted.

Window sections

Element	Description
Available scenarios/periods	Displays scenario/period pairs that are not related to any process.
Related to another process	Displays the list of processes to which scenario/period pairs are related. The current process, archived processes and processes with locked setup are excluded.
Process scenarios/periods	Displays scenario/period pairs already related to the current process.

Options in window

Element	Description
>	Adds the selected scenario/period to the process.
<	Removes the selected scenario/period from the process.

Manage Status window

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Manage status

Purpose of window

This window allows you to lock or unlock data collection for specific scenarios/periods.

Options in window

Element	Description
Lock	Lock data collection for the selected scenario/period.
Unlock	Unlock data collection for the selected scenario/period.
Archive	• For single submission processes, this archives and locks all periods of the process simultaneously. • For submission by scenario/period processes, this locks and archives the data for the selected scenario/period and for the consolidation scenarios/periods associated with it. ***IMPORTANT**: if all process scenarios/periods are archived and locked, the process is also archived and locked. See "Create backup on offline tables" on page 19.*
Restore	Restores data for the selected scenario/period. ***Note**: restoring does not unlock scenarios/periods.*
Original scenario/period	Selects the entire scenario/period structure.

Set Business Cycles

Pagine di lavoro
Define Cycles window 37
Manage Status window 38

Concept Information
Business cycles 37

Sequence of procedures

To define the business cycles, the following procedures must be followed:

1. "Set the scenarios/periods to be inserted into the process" below
2. "Define actions on process scenarios/periods" below

1. Set the scenarios/periods to be inserted into the process

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Define Cycles

This procedure allows you to define the process submission type (single submission or submission by scenario/period) and the process scenarios/periods.

1. In **Number of cycles** select the desired type of submission and click **Save**.
2. To select the desired scenarios/periods, click **Define Cycles**: the **Define Cycles** window will open.
3. In the **Available Scenarios/Periods** column, select one or several scenarios/periods.
4. Click > or drag the selected items into the **Process Scenarios/Periods** column.
5. Click **Save**.

1. Define actions on process scenarios/periods

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Manage status

This procedure allows you to lock, unlock, archive or restore scenarios/periods.

1. Click on the desired action, then select the desired scenarios/periods. and click **OK**.
2. Repeat step 1 for every action to be defined.
3. Click **OK**.

Entity organisation and workflow

Contents

This section covers the following topics:

Organisation and workflow 40
Exceptions page 41
Definition results page (organisational hierarchy) 42
Mapping task workflow page 42
Definition result: Mapping task workflow page 44
Examples of mapping 45
Deadline dates page 46
Settings submission window 48
Advanced definition page 48
Shift dates window 49
Set deadline window 50
Organisation and Workflow setup 50

Organisation and workflow

Background

In the process settings, the organization and workflow section allows you to define the process's organisational hierarchy and workflow.

Function

Setting the organization and workflow means bringing an entity's real organisation and workflow into CCH Tagetik, i.e. defining:

- the *organisational hierarchy*, or the entities or companies enabled to enter and approve process data
- the process's *business workflow*, or the logical steps of the process's workflow.

The following actions can also be run:

- Include in the process specific entities or nodes of an entity hierarchy chosen from among the non-time-dependent hierarchies not related to the process, provided they are involved on an exceptional basis in the same process.
- Override the currency of the included entities in relation to the currency indicated in the entity's elements table.
- Exclude from the process specific entities or nodes of a group of entities related to the process.
- Perform the entity/task workflow *mapping*, or relate entities/nodes to specific task workflows for specific steps of the selected Business Workflow. This limits data entry on task workflows to the entities that are actually responsible for that data.

For every entity, it is also possible to define submission start and end dates and start dates for sending e-mails reminding authorised users to enter data.

***Note**: the recipients of the reminder e-mail and the e-mail wording are defined in the send email rule associated with the "Reminder on Entity submission" event (see "Send email events" on page 148).*

Example or Organisation and workflow settings

This example describes a budget process with the following characteristics:

- the organisational hierarchy used is called Regional view
- data is entered by individual entities
- approval and submission takes place at the geographic regional level

Case 1: excluding an entity from the administrative hierarchy

Entity X00, contained in Regional view, does not collect data on the budget process. It is therefore not necessary to consider this entity in the process's data processing and it can be excluded, using the *Exclude* action.

Case 2: override the currency of a USD entity in a EUR process

Entity B00 uses the USD currency. That entity is involved on an exceptional basis in the entry of data for the budget process using the Global view hierarchy, for which the currency is EUR. In this case, it is necessary to override the entity's exclusion from the process and override its currency, changing it from USD to EUR, to adjust the entity's amounts to the currency of the process's administrative hierarchy.

Particularities of entity/task workflow mapping

When entity/task workflow mapping is performed, entities and specific task workflows are related to specific phases of the selected Business Workflow.

If no mapping is managed, by default the system only associates submission with all entities in the process (task $ - default workflow).

When a *lowest level element* entity, or an entity contained in a node, is related to a task workflow, the relationship is not automatic for the parent node. To relate the parent node to a task workflow, it will be necessary to create a specific relationship.

Exceptions page


Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Exceptions

Purpose of the page

This page allows you to include/exclude specific entities or nodes of entities in/from the process's organisational hierarchy.

What it looks like

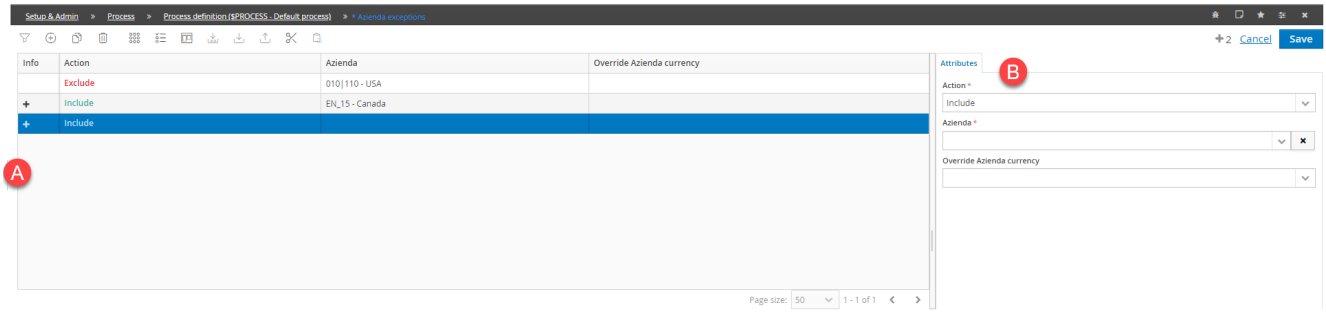

Element	Description
A	List of exceptions
B	Exceptions configuration tab

Page fields

Please find below the most important fields.

Field	Description
Action	Includes/excludes the entity selected in **Entity** in/from the process's organisational hierarchy.
Entity	Selects an entity or a node of entities.
Override entity currency	Set the currency of the selected entity to a different currency from the one indicated in the entity elements table.

Definition results page (organisational hierarchy)

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow, Administrative hierarchy section) Definition result

Purpose of the page

This page shows the list of entities or nodes of entities included/excluded in/from the process' organisational hierarchy.

Page tabs

Element	Description
Entity	Shows entities on which to collect data in the process and the currencies associated with them.
Nodes	Shows the nodes of entities and activities enabled for contributor nodes and consolidator nodes.

Mapping task workflow page


Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Mapping

Purpose of the page

This page allows you to relate entities, nodes and/or journals to specific task workflows, and specific steps of the selected Business Workflow.

What it looks like

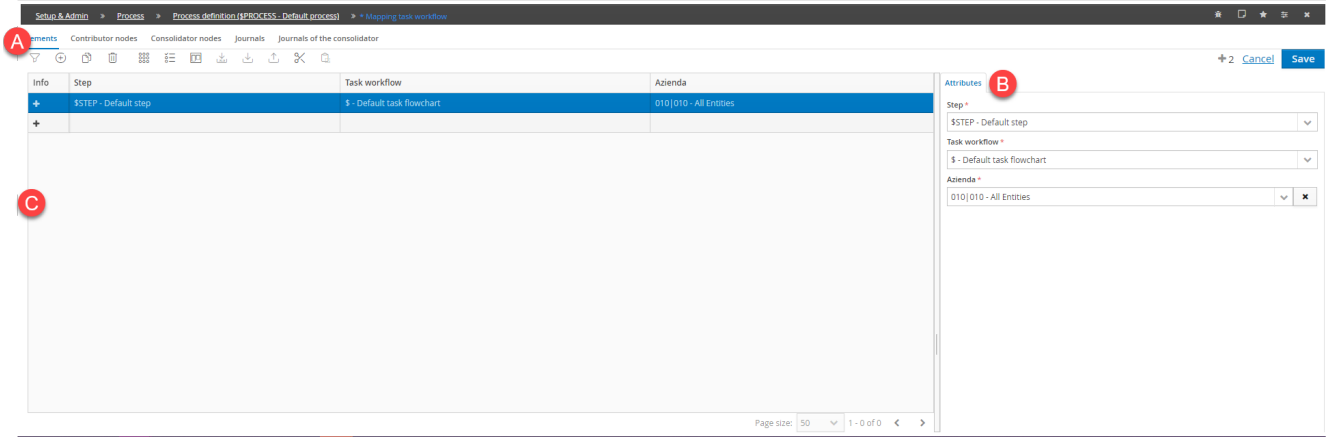

Element	Description
A	Relationship details tabs
B	Relationship configuration tab
C	Relationships table

Details tab

Element	Description
Elements	Entity/Step/Task workflow relationships
Contributor nodes	Contributor node/Step/Task workflow relationships
Consolidator Nodes	Consolidator node/Step/Task workflow relationships
Journals	Entity journal/Step/Task workflow relationships
Consolidator journals	Consolidator node journal/Step/Task workflow relationships

Elements tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity	Entity or organisational hierarchy node of the process

Contributor nodes tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy
Node type	Node, child nodes or level of the node with which the task workflow is to be associated

Consolidator nodes tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's administrative hierarchy
Node type	Node, child nodes or level of the node with which the task workflow is to be associated

Journals tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy

Consolidator journals tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy
Node type	Node, child nodes or level of the nodes with which the task workflow is to be associated

Definition result: Mapping task workflow page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow, Business Workflow section) Definition result

Purpose of the page

This page shows the list of relationships between entities and/or journals, phases and specific task workflows run on the Mapping task workflow page, and which have been deployed.

Page tabs

Element	Description
Entity mapping	Relationships between entities (entities, contributor nodes, consolidator nodes), steps and task workflows.
Journals mapping	Relationships between journals (entity journals and consolidator node journals), steps and task workflows.

Data in the table

Element	Description
	The entity is related to default task workflow $ of the Business Workflow step.
Empty cell	The entity is not authorised to work on the step (e.g. a contributor entity is not authorised to work on consolidator type steps).
<Task workflow>	Task workflow to which the entity is related.

Examples of mapping

Introduction

Some specific examples of entity/node, step and task workflow mapping are provided below.

Entity/node, step and task workflow mapping

In this example, two steps of a budget process, called Payroll planning and IT Costs, are mapped in order to achieve specific functional objectives, such as:

- setting the Payroll planning step to run the planning on the individual employee for American entities, and on the headcount for all other entities.
- enable only submission for contributor and consolidator nodes.
- enable the Corporate entity as the only entity authorised to enter data on the IT Costs step.

In CCH Tagetik, these objectives correspond to the following settings, developed in the procedures in this module:

Settings	Procedure
Diversify the task workflow of a step depending on the entity	"Step (Payroll planning)/Entity mapping" below
Enable only submission for contributor and consolidator nodes	"Step (Payroll planning)/Node mapping" on the next page
Enable only the Corporate node (organisational hierarchy parent) to enter data in the IT costs step , excluding all other entities.	"Step (IT Costs)/Entity mapping" on the next page

Step (Payroll planning)/Entity mapping

In this example, the Payroll planning step must run the planning on the individual employee for American entities, and on the headcount for all other entities. To do this, the following operations are necessary:

- Create a step/entity relationship that defines the general behaviour to be applied to the entire organisational hierarchy. To do this, the PPA task workflow of the payroll planning by headcount is related to the Payroll planning step and the entity is the parent (or root) 000 Entities node of the process's organisational hierarchy.
- Create a step/entity relationship that defines the specific behaviour to be applied to an individual entity of the organisational hierarchy. To do this, the PPU task workflow of the payroll planning by employee is related to the Payroll planning phase and the entity is the USA node to which the American entities in the organisational hierarchy are related.

Procedure

***IMPORTANT**: the order in which the relationships are added to the table determines the order in which they are read by the system, which manages subsequent rows as exceptions to the previous rows. If there are both general and specific relationships (with exceptions and overrides), the specific relationships must be positioned after the general relationships.*

1. On the **Elements** tab of the **Mapping task workflow** page, click ⊕: a new row will appear.
2. Select the new row and, in the **Attributes** tab, select the **Payroll planning** phase, the **PPA** task workflow, and the **000 Entities** entity. This is the parent node of the process's organisational

hierarchy
3. Click **Save**.
4. Click ⊕.
5. Select the new row and, in the **Attributes** tab, select the **Payroll planning** phase, the **PPU** task workflow, and the **USA** entity. This is the node of American entities.
6. Click **Save**.

Step (Payroll planning)/Node mapping

For contributor and consolidator nodes, it is necessary to enable data submission only. This is automatic, since the system associates the default task workflow $STEP that contains only one submission operation to every node within the mapping.

Step (IT Costs)/Entity mapping

In this example, in the entire IT Costs phase, the Corporate entity must be the only entity in the organisational hierarchy authorised for data entry and submission. To do this, the following operations are necessary:

- Create a phase/entity relationship that prevents any behaviour on the entire organisational hierarchy. To do this, the task workflow $$ - Empty task flowchart is related to the IT Costs step and the entity is the parent node of the process' organisational hierarchy.
- Create a step/entity relationship that defines the specific behaviour to be applied to an individual entity in the organisational hierarchy. To do this, the IT Costs task workflow and the entity X00 - Corporate are related to the IT costs step.

***Note**: excluded entities are identified with a grey traffic light on the process cockpit.*

Procedure

***IMPORTANT**: the order in which the relationships are added to the table determines the order in which they are read by the system, which manages subsequent rows as exceptions to the previous rows. If there are both general and specific relationships (with exceptions and overrides), the specific relationships must be positioned after the general relationships.*

1. On the **Elements** tab of the **Mapping task workflow** page, click ⊕: a new row will appear.
2. Select the new row and, in the **Attributes** tab, select the **IT Costs** step, the Task workflow $$ - Empty task flowchart, and the **000 Entities** entity. This is the parent node of the process's organisational hierarchy
3. Click **Save**.
4. Click ⊕.
5. Select the new row and, in the **Attributes** tab, select the **IT Costs** step, the **IT Expenses** task workflow, and the **X00 - Corporate** entity.
6. Click **Save**.

Deadline dates page

Admin


Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates

Purpose of the page

This page allows you to define the following information for the entities involved in the process:

- the deadlines for submitting the process or the phases of one of the process's scenarios/periods
- the submission admissibility period
- the dates on which the submission memos are sent

What it looks like

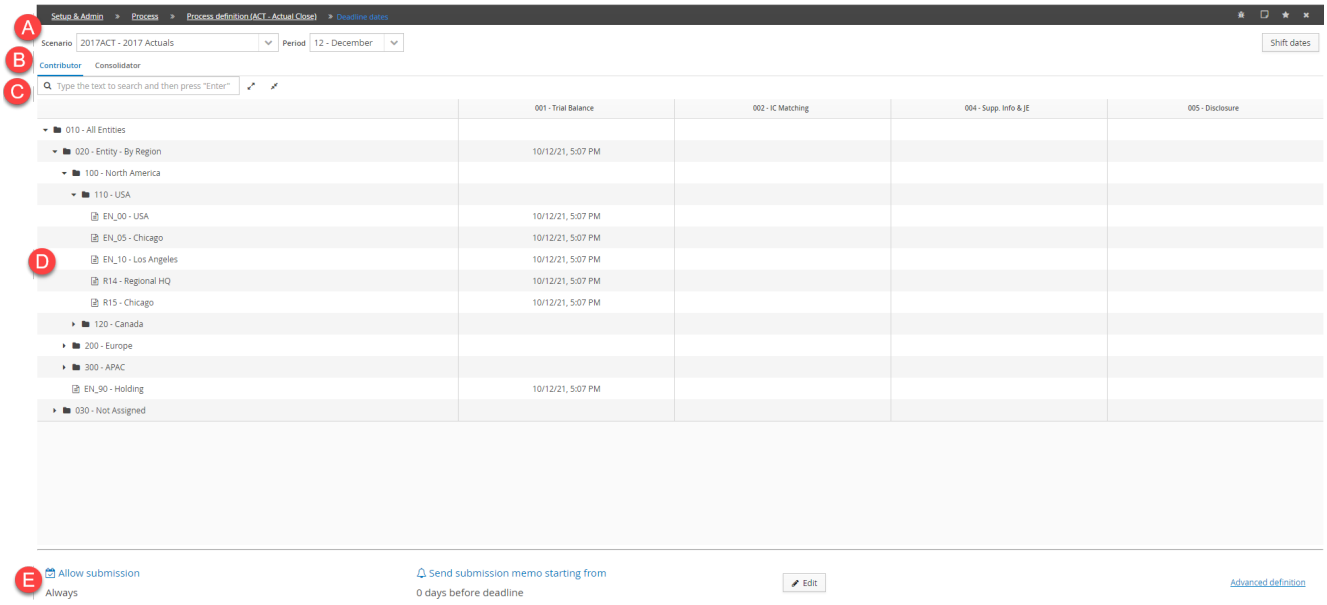

Element	Description
A	(only in processes with submission by scenario/period) Scenario/period selection bar
B	Role tabs
C	Entity search bar
D	Section for setting deadlines on entity/phase relationships.
E	Section for setting submission start dates and submission memo dates

Role tabs

Element	Description
Contributor	Details of deadlines assigned to contributor entities for submitting process phases.
Consolidator	Details of deadlines assigned to consolidator entities for submitting process phases.

Actions on this page

Element	Description
<Intersection cells>	Open a window to set the date by which the entity must submit the phase.
Shift dates	Opens a window to change the deadlines en masse at the process or scenario/period level.
Edit	Opens a window to set the submission admissibility period and the sending of submission memos.
Advanced definition	Opens a window to set submission start date overrides for the period and overridden submission memo send dates.

Settings submission window

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates > Edit

Purpose of window

This page allows you to set the process's submission period and the sending of a submission memo.

Options in window

Element	Description
Always	Makes submission always possible until the deadline.
Time period	Makes submission possible based on a certain period of days, hours and minutes prior to the deadline.
Send submission memo starting from	Enables the sending of a daily submission memo within a period of days prior to the deadline and allows you to set that period.

Advanced definition page


Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates > Advanced definition

Purpose of the page

This page allows you to set overridden submission period start dates and overridden submission memo send dates on entity/step/deadline relationships. These dates are overwrite the dates set at the process level, but are not overwritten by any deadline recalculations due to changes to the settings.

What it looks like

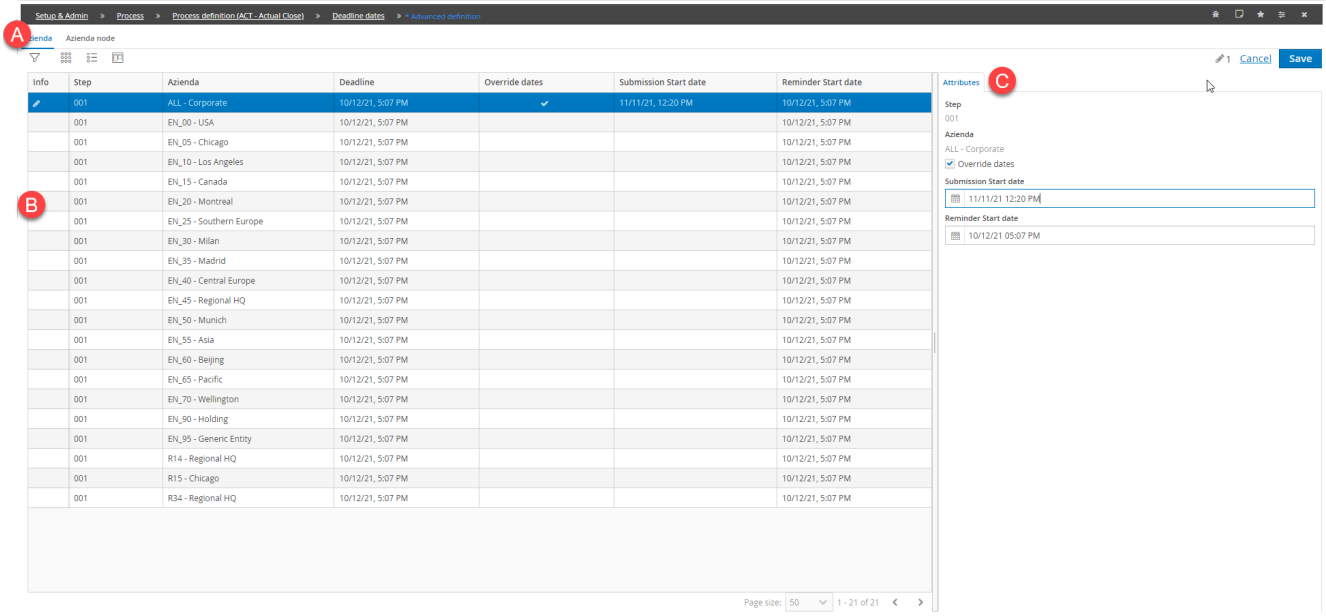

Element	Description
A	Entity tabs.
B	List of entity (or node of entities)/step/deadline/memo send date relationships
C	Overridden dates configuration tab

Actions on this page

Element	Description
Override dates	Enables insertion of overridden dates on the entity (or node of entities)/phase/deadline/memo send date relationship.
Submission start date	Selects the overridden submission period start date on the entity (or node of entities)/step/deadline relationship.
Reminder Start date	Selects the overridden reminder send date on the entity (or node of entities)/phase/deadline relationship.

Shift dates window

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates > Shift dates

Purpose of window

This page allows you to edit en masse the deadlines for the submission of a single submission process or steps of the selected scenario/period. If deadlines have not yet been defined on a process, this page allows you to copy the deadline from a scenario/period of a similar process, or a process with the same organisational hierarchy and same business workflow, and to update the deadline based on the copied date. The copied date is the last deadline, in chronological order, defined on the steps of the source scenario.

Actions in window

Element	Description
Shift current dates	Enables the insertion of a new submission date for all steps of the selected scenario/period.
Copy from Scenario/Period and shift	Enables the deadline to be copied from a selected scenario/period to processes with the same organisational hierarchy and business workflow as the process in use.
Scenario/period	Scenario/period from which to copy the deadline
Last deadline date	Shows the last known deadline date and time for the process or for the steps of the scenario/period.
New deadline date	Allows you to set a new deadline date and time for submission of the process or steps of the scenario/period.

Set deadline window

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates > click cells in table

Purpose of window

This page allows you to set the date by which the entity in question must submit the step in question. For single submission processes, the deadline is inserted on the last of the process's scenarios/periods.

Actions in window

Element	Description
Selected element	Shows the entity or node of entities and the step on which to set the deadline.
Deadline	Selects the deadline
Apply to	Only if a node of entities is selected. Determines the levels of the node in question to which to apply the deadline in relation to the step in question: • **Current selection**: the date is assigned to the node. • **Subnodes**: the date is assigned to all of the node's contributor subnodes. • **Lowest level elements**: the date is assigned to the lowest level elements.

Organisation and Workflow setup

Pagine di lavoro

Mapping task workflow page 42
Exceptions page 41

Concept Information

Organisation and workflow 40

Sequence of core procedures

The following procedures are necessary in order to set up the administrative hierarchy and workflow:

1. "Associate the organisational hierarchy and business workflow with the process" below.
2. "Include/exclude entities from the organisational hierarchy" below.
3. "Associate task workflows with entities" below

1. Associate the organisational hierarchy and business workflow with the process

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section)

1. From **Organization hierarchy**, select the hierarchy of entities involved in the process.
2. From **Business Workflows**, select the Business Workflow to be associated with the process.

1. Include/exclude entities from the organisational hierarchy

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Exceptions

This procedure allows you to include or exclude specific entities or groups of entities in/from the hierarchy involved in the process. For the data entry of the individual entity, it also allows you to use a currency other than the one defined in the entity elements table itself, by overriding it.

1. Click ⊕ to add an exception.
2. In **Entity**, select the desired non-time-dependent entity or node of entities.
3. In **Action**, set the desired type of exception.
4. If you want to change the reference currency of the selected entity or node of entities, in **Override entity currency**, set the new currency.
5. Click **Save**.

1. Associate task workflows with entities

This procedure allows you to associate task workflows with entities for the individual phases that make up the Business Workflow associated with the process.

1. Click **Mapping**: the **Mapping task workflow** window will open.
2. Click on the desired tab.
3. Click ⊕ to add an association.
4. In **Attributes**, define the fields as desired.
5. Set the entity to be associated with the task workflow in the relative menu.
6. Click **Save**.

   ***Note**: entities or nodes not associated with a specific task workflow are associated by the system with the default task workflow ($ - default workflow), which provides for submission only.*

***IMPORTANT**: the order in which the relationships are added to the table determines the order in which they are read by the system, which manages subsequent rows as exceptions to the previous rows. If there are both general and specific relationships (with exceptions and overrides), the specific relationships must be positioned after the general relationships.*

Other procedures

The following procedures are optional extras.

- "Set step submission deadline" on the next page.
- "Change the step submission deadline" on the next page.
- "Set the process submission date" on the next page.
- "Override the submission start dates and memo send dates" on the next page.

Set step submission deadline

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates

1. For submission by scenario/period steps, in the scenarios/periods selection bar, select the desired scenario and period.

2. Select the desired role tab (contributor or consolidator).
3. In the entity search bar, enter the name of the entity or select it from the list to the left.
4. Cl the desired cell at which the entities row and the steps column intersect: the **Set deadline** window will open.
5. Set a deadline and select the entity node levels to which to apply the deadline.
6. Click **OK**.

Change the step submission deadline

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates

1. Click the **Shift dates** button to open the **Shift dates** window.
2. Select the desired mode for shifting the dates (**Shift current dates**/**Copy from Scenario/Period and shift**).
3. In **New deadline date**, set the desired deadline date and time.
4. Click **OK**.

Set the process submission date

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates

1. In the memo settings section, click **Edit**: the **Settings submission** window will appear.
2. Select the submission admissibility period: if you choose the **Time period** option, set a validity period prior to the deadline.
3. (Optional) Select **Send submission memo starting from** to set the date from which to send users the submission memo then set the desired interval.
4. Select the period in which to allow submission.
5. Click **OK**.

Override the submission start dates and memo send dates

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates > Advanced definition

This procedure allows you to set, for specific entity/phase/deadline relationships, submission period start dates and customised memo send dates. These new dates are written over the dates set at the process level.

1. In the list of entity relationships or entity node/phase/deadline/memo send date relationships, click on the desired relationship.
2. In the configuration tab, select **Override dates**.
3. In **Submission Start date** and/or **Reminder Start date**, set the desired date and time.
4. Click **Save**.

The Process Data Model

Contents

This section covers the following topics:

Introduction to the Process Data Model 53
Process Data Model definition 54
Data management for the Process Data Model 55
Process Data Model examples 56
Define Process Data Model page 58
Process Data Model/Entity Relationships page 60
Definition result: Process Data Models related to entities page 61
Definition result: Process Data Model page 61
Process Data Model setup 62

Introduction to the Process Data Model

Background

In the process settings, the Process Data Model (PDM) defines a subset of accounts or accounts/categories on which to collect, submit and process the data. The PDM is based on accounts and categories, and so these structures must already be set up in CCH Tagetik's dimensions.

Elements of the Process Data Model

The **Process Data Model** is based on the following elements:

- *account*s, or the subject of data collation
- *steps* of the process on which to collect account data
- *categories* containing the classification and segmentation of the data on accounts
- *measures*, or custom dataset fields
- the process's *data model*, or the accounts/categories involved in data collection, specific behaviour and exceptions that govern the entry of data on the process.

Process Data Model definition

Setting up the process's *data model* involves defining the following elements:

- Accounts or accounts/categories that collect/do not collect data on the process (e.g. if you want to exclude accounts included in a certain node of accounts).
- The editability rights of accounts on specific types of data and on the categories associated with them, when they need to be different from the default behaviours.
- The steps on which to set, for example, any blocks on intercompany declarations for specific accounts not belonging to intercompany matching cockpits.
- The control groups included in the process and those excluded from it, from among those that the system automatically relates to the process during its deployment.
- Any custom Analytical Workspace measures to be included in the process.

Default PDM and custom data models

A default PDM, called $PDM, is related to every process. If the default PDM does not fully meet the functional needs of the project, custom PDMs can be created. In particular, this is useful for associating subgroups of accounts with specific entities/entities and consolidation scenarios/periods.

Process Data Model organisation

The order in which PDMs are inserted determines the order in which they are run within the system. If there are general PDMs and PDMs with exceptions and overrides, the order in which the PDMs is created must go from the most generic to the most specific because, if the data processing of a generic PDM follows that of a specific PDM, the rules of the specific PDM may be overwritten.

If several PDMs are managing different accounts, it is advisable to set up a custom PDM by account, rather than make changes to the $PDM.

Process Data Model definition

Introduction

To set up the PDM, the following elements must be defined:

- accounts/categories and measures (or custom dataset fields of Analytical Workspaces) involved in the process
- any overrides and/or exceptions on accounts/categories and measures

The order in which the records are inserted in the setup tables is important because deployment processes the rows in the order in which they were inserted.

1. Define the CCH Tagetik accounts to be included in/excluded from specific steps of the process.
2. Define the forms, and therefore the accounts contained in them, to be included in/excluded from specific steps of the process.
3. Define the type of data to be collected on the process, the categories, if required, and the editability properties of the accounts.
4. Define the process steps on which to set, remove or move the declarations the block of intercompany declarations for specific accounts or accounts/categories.
5. Define the control groups from among those to be included in/excluded from the process and the types of data checked by them.
6. Define the Analytical Workspace measures to be included in/excluded from the data model and/or specific steps of the process.

Exceptions on forms

By default, CCH Tagetik automatically associates a form with a step of the process when at least one account associated with the step is also contained in the forms and editable. However, a form or a node of the grouping of forms can be excluded or added manually.

> #### Example of excluded forms
>
> Two different processes, statutory and management, can manage the same accounts via different forms, in different data entry steps. In the statutory process, the node that groups management data forms can be excluded from the desired step in order to view only the forms involved in the entry of statutory data.

Exceptions for account editability

The setting of exceptions for account editability defines the changes that users can make on the accounts.

Accounts can be made editable, non-editable, only importable (e.g. via ETL import), or be set to follow the editability condition defined in the table on the individual account (*automatic* behaviour).

It is possible to set exceptions on the editability of specific types of account data (all data, gross data, intercompany data) and/or certain categories of account data (all categories, amounts, journals).

The overrides set on intercompany data do not change the account settings in the table. For example, the “Editable on intercompany values” override has no effect on an account that does not allow intercompany declarations. Vice versa, on an account that allows intercompany declarations, setting a non-editable override makes the account’s intercompany data non-editable in the specific process.

> ### Example of editable accounts
>
> When a calculated revenue account is defined as the product of price and quantity, that configuration makes the account non-editable. For it to be editable, an editability exception needs to be created on the account, to allow the user to edit the data.

Exceptions for intercompany steps

By default, for accounts belonging to an intercompany matching cockpit, the insertion of intercompany declarations is blocked when submitting the step to which the cockpit is related.

For accounts not belonging to an intercompany matching cockpit, intercompany declarations are blocked by default when submission the gross step to which the accounts are related. However, exceptions can be defined for the step in which to block intercompany declarations, or:

- Remove the intercompany account from the gross step to which it belongs, so that the declaration is never blocked.
- Move the blocking of intercompany declarations to a different intercompany step
- Set the blocking of intercompany declarations on the gross step to which said declarations belong (*Automatic* behaviour).

Exceptions for control groups

By default, CCH Tagetik includes all control groups that contain at least one account involved in the process, with the exception of control groups on which the “Include in the process if all parent accounts belong to the process” or “Include in the process if all child accounts belong to the process” option is active.

To exclude individual control groups or specific nodes of a grouping of control groups from the PDM, exceptions can be set to remove control groups.

When an exception is set to remove one or several control groups, this may have an impact on all data entered, on gross data only, or on intercompany data only.

Analytical Workspace measures

The setting of Measures allows you to define which measures belonging to the Analytical Workspace and its selected datasets to associate with the chosen step of the process.

When each association is saved, CCH Tagetik checks that every measure is associated with one step, and one step only.

Data management for the Process Data Model

Data collection modes

Data can be collected *by account*, which considers all data entered on the account, or *by account/category*, which considers the data collected, separated by category. Data is then collected in the following two modes:

- by account/step
- by account/category/step

In both cases, data collection is blocked when submitting the step to which the accounts or accounts/categories are related.

Data collection by account/step

Management by *account/step* is typically used in single step processes, or processes with several steps in which each step is related to a different account. In management by account/step, all the categories associated with the account are considered, or, if the filter on a node of categories is activated, only the categories related to said node are considered.

The accounts and forms, and therefore the control groups associated with them, defined on a contributor step, also are automatically associated with the immediately subsequent consolidator step.

> ### Example of data collection by account
>
> In the case of a budget process with three steps:

1. Collection of revenues and cost of sales data
2. Collection of operating cost data
3. Collection of fixed capital investments data

For data related to the three steps to be submitted at different times, each step must be related to the desired account. Thus, when users submit the first step, the system only blocks the reference accounts for revenue and cost of sales, when they submit the second step, the system only locks the reference accounts for operating costs, etc.

Data collection by account/category/step

Management by *account/category/step* is typically used in processes in which the accounts can be associated with several steps and submission is determined by the categories associated with the accounts.

This management mode is suitable in projects in which you intend to clearly differentiate contributor activities from consolidator activities.

In processes with data collection by account/category/step, the PDM accounts are associated with specific amount or journal categories, in their various declinations, which in turn are associated with contributor steps or consolidator steps, respectively, or with contributor/consolidator steps.

Example of data collection by account/category/step

A statutory data collection process may have two steps:

1. FS data collection
2. Collection of entity journals

In both steps, data can be entered on the same accounts, but on different categories: amount categories for the first step and entity journal categories for the second.

Process Data Model examples

Introduction

Some specific examples of settings for various types of PDM are provided below.

Example of a Process Data Model by account/step

This example describes a situation in which all entities insert and consolidate data on the same accounts and according to the following contributor/consolidator steps:

1. Collection of revenue and cost of sales data
2. Collection of OPEX data
3. Collection of CAPEX data

The default PDM ($PDM) can be used for this process.

Procedure

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

1. In the **Process Data Model** section, in **Type**, select **By Account**.
2. Click to open a page showing the details of the default PDM.
3. Select the accounts to be inserted in the various steps.

To select accounts from...	Then...
Account tab	Select the accounts individually or as a node in an accounts hierarchy.
Form exceptions tab	Select individual forms or a node from the group of forms. Selecting a form selects all the editable accounts contained in it.

4. Indicate the gross step to which the selected accounts must be related: on submitting the indicated step, the entry of gross data on all of that step's accounts is blocked, except for overrides.

***IMPORTANT**: actions are run in the order in which they are presented in the table. If **Excluded** is selected as the last action for an account, it is excluded from the whole process.*

Example of Process Data Model by account/category/step

This example describes a statutory data collection process according to the following contributor/consolidator steps:

1. Intercompany data collection
2. FS data collection
3. Collection of supplementary note details and variations data
4. Collection of entity journals

The same accounts as steps 2 and 3 are managed in step 4, but according to the entity journal categories. Whereas amount categories are considered in phases 2 and 3.

Procedure

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

1. In the **Process Data Model** section of the **Process definition** page, in **Type**, select **By account/category**.
2. Click to open the **Define Process Data Model** page.
3. In the **Account** tab of the **Define Process Data Model** page, define the account/category pairs for which data are collected and the relative step:
    1. Select the normal P&L and balance sheet accounts.
    2. For these accounts, in **Categories**, select the Amount categories and in **Step**, choose step 2, because this is the step in which you want to close the collection of gross data.
    3. Select the detail P&L accounts and the variation balance sheet accounts.
    4. For these accounts, in **Categories**, select the Amount categories and in **Step**, choose step 3, because this is the phase in which you want to close the collection of detail and variation accounts.
    5. Select normal detail accounts and variation accounts (both P&L and balance sheet).
    6. For these accounts, in **Categories**, select the Entity journal accounts and in **Step**, choose step 4, because this is the step in which you want to close the entry of entity journals.

Comments

No definition is entered for step 1 because intercompany data is submitted in this step.

In the definition of the details of accounts/categories for which data must be entered, only the gross step is considered, i.e. the step in which the entry of gross data of a certain entity must be blocked.

The intercompany step, in which the entry of intercompany data is blocked, is determined by the step in which an intercompany matching cockpit has been inserted.

The only operation required to manage the matching of intercompany entries in step 1 is therefore creating a relationship between the intercompany cockpit and step 1 in the process rules. Thus, the system blocks the entry of intercompany entries for all accounts included in the intercompany cockpit upon submission of step 1.

For accounts excluded from the cockpit, however, the entry of intercompany entries is blocked when submitting the gross step to which the account is related.

Example of a Process Data Model by account/step with contributor steps and consolidator steps

This example describes a data collection process for generating the consolidation according to the following three steps:

1. Data collection by entity - contributor step
2. Collection of supplementary note details and variations - contributor step
3. Collection of consolidation journals - consolidator step

With the contributor and the consolidator using different steps, a single PDM can be used; in this example it is the default $PDM.

Procedure

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

1. In the **Account** tab on the **Define Process Data Model** page, select the **Include** action and define the accounts on which to collect data.
2. In **Step**, indicate the gross step to which the selected accounts must be related: on submitting the indicated step, the entry of gross data on all of that step's accounts is blocked, except for overrides.

   ***Note**: consolidator steps are not included among the selectable steps.*
3. Click **Save** to return to the **Process definition** page.
4. Run deployment.
5. Click to view the accounts involved in the contributor and consolidator steps of the data model.

Define Process Data Model page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Purpose of the page

This page allows you to set up the process's data model.

Page tabs

Element	Description
Account	Defines the accounts or accounts/categories to be included in/excluded from the process and the step on which they enter data.
Form exceptions	Selects the forms to be included in/excluded from specific steps of the process.
Editability exceptions	Defines the editability of accounts (or nodes of accounts) on specific types of data for specific categories of the process.
IC step exceptions	Defines the steps in which to set the block on intercompany declarations for specific for specific accounts or accounts/categories not belonging to intercompany cockpits.
Control groups to exclude	Defines the control groups to be included in/excluded from the process.
Analytical Workspace measures	Defines the Analytical Workspace measures to be included in/excluded from the process.

Account tab

Field	Description
Action	Includes/excludes the account in/from the process.
Select from dimension	Selects an account (or a node of accounts) from CCH Tagetik's dimensions.
Select from form	Selects a form from which the editable accounts contained in it will be obtained.

Form exceptions tab

Field	Description
Action	Includes/excludes the selected form in/from the process.
Form	Selects a form or a node of forms.
Step	Selects a Business Workflow step.

Editability exceptions tab

Field	Description
Data type	Selects the type of data on which to set the editability rule (gross data, intercompany data, or both).
Category type	Selects the category on which to set the editability rule (amount, journal, or both).
General settings	Selects the editability level of the selected data (non-editable, only importable, editable, automatic).

IC Step Exceptions tab

Field	Description
Action	Selects the action to be run on the account or account/category: • **Delete**: deletes the intercompany account or account/category from the gross step. Thus, the intercompany declaration on the account is never blocked. • **Shift**: shifts the locking of intercompany declarations from the account or account/category onto an IC step. • **Automatic**: sets the gross step of the account as its IC step or the IC step of the account/category.
Account	Selects the account or account/category for which to set the block on intercompany insertions.
Step	(only with the **Shift** option in the **Action** field) Selects the IC step to which to move the block on intercompany insertions.

Control groups to exclude tab

Field	Description
Action	Selects the action to be run on the control group: • **Delete**: deletes the control group from the process. • **Automatic**: only includes the control group if it contains at least one process account, unless the “Include in process if all parent accounts exist” or “Include in process if all child accounts exist” option is active on the control group. In this case, it runs the selected rule.
Control group	Selects a control group or node of control groups.
Data type	Selects the type of data on which to run the action (**gross data**, **intercompany data**, or **both**).

Analytical Workspace Measures tab

Field	Description
Action	Includes/excludes Analytical Workspace measures in/from the process.
Analytical workspace	Selects the Analytical Workspace.
Dataset	Selects the dataset from the Analytical Workspace.
Measure	Selects an Analytical Workspace measure.
Step	Selects a Business Workflow step.

Process Data Model/Entity Relationships page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section) Process Data Model/Entity relationships

Purpose of the page

This page allows you to create specific relationships between the process's entities and data models, and between the process's existing consolidation scenarios/periods.

***Note**: the page is only available if there are several PDMs.*

Page tabs

Element	Description
Elements	Entity (from the available non-time-dependent hierarchies) and PDM relationships.
Contributor nodes	Relationships between contributor nodes and PDMs.
Consolidator Nodes	Relationships between consolidator nodes and PDMs.
Consolidation scenarios/periods relationship	Relationships between the process's consolidation scenarios/periods and the PDM.

Elements tab

Field	Description
Entity	Selects an entity or node of entities.
Process Data Model	Selects a PDM.

Contributor nodes tab

Field	Description
Contributor nodes	Selects a contributor node.
Process Data Model	Selects a PDM.
Advanced selection	Selects the contributor node levels to relate to the PDM.

Consolidator nodes tab

Field	Description
Consolidator Nodes	Selects a consolidator node.
Process Data Model	Selects a data model.
Advanced selection	Selects the consolidator node levels to relate to the data model.

Consolidation scenarios/periods relationship tab

Field	Description
Process Data Model	Selects a data model to relate to consolidation scenarios/periods.

Definition result: Process Data Models related to entities page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section) Definition result

Purpose of the page

This page shows the list of entity/data model relationships.

Page tabs

Element	Description
Entity	The list of individual entity/currency/data model relationships
Nodes	List of entity node/data model relationships divided into contributor and consolidator

Definition result: Process Data Model page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Purpose of the page

This page shows the list of accounts, control groups, categories, forms and the Analytical Workspace measures included in/excluded from the Process Data Model. Each tab shows details of the associations between those elements of the data model and the steps of the Business Workflow.

Page tabs

Element	Description
Account	Shows the list of accounts included in/excluded from the Process Data Model, the steps on which they enter data, the editability rights of the accounts on gross and IC amount categories and journal categories and the association of the accounts with IC cockpits. The system uses the contents of this table to determine the editability and importability of an account and the possibility of running data processing on the accounts.
Control groups	Shows the list of control groups included in/excluded from the business workflow steps of the process.
Form - Control groups	Shows the list of control groups originating from forms included in the Process Data Model.
Category	Shows the list of categories that can be edited by the accounts included in the Process Data Model. If the Process Data Model is by account and no filter has been set on categories, the system displays all categories included in the table which have the “To run” option active.
Form	Shows the list of forms containing accounts included in the Process Data Model and the steps on which those accounts collect data.
Analytical Workspace measures	Shows the list of Analytical Workspace measures included in the Process Data Model.

Process Data Model setup

Pagine di lavoro

Define Process Data Model page 58
Process Data Model/Entity Relationships page 60

Concept Information

Introduction to the Process Data Model 53

Sequence of procedures

The following procedures are essential for setting up the PDM.

1. "Define the data to be collected in the process" below.
2. "Set up a Process Data Model" on the facing page.

The other procedures allow you to fine tune its configuration.

1. Define the data to be collected in the process

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

To define the data to be included in the process, do the following:

To define data collection on	Then...
account	1. In **Type**, select **By account**. 2. To include accounts originating from other forms included in the process, select **Inherit account from form**. 3. Click **Save**.
account/category	1. In **Type**, select **By account/category** to collect data from accounts divided into the categories present in the environment. 2. (optional) In **Category filter**, select a node of categories to filter according to the categories present in the node. 3. Click **Save**.

2. ## Set up a Process Data Model

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

The following general procedure describes the order in which to set up the various configuration tabs with which a PDM can be defined and customised. To define the PDM, an account must be defined but the remaining configuration tabs are optional based on the needs of the project.

1. In the **Account** tab, click ⊕, then select the accounts from CCH Tagetik dimensions and/or accounts originating from forms to be included in/excluded from the process and specify the step on which they are to enter data, then click **Save**.
2. In the **Form exceptions** tab, click ⊕, then select forms to be included in/excluded from specific steps of the process, then click **Save**.
3. In the **Editability exceptions** tab, click ⊕, then set the editability of accounts on specific types of data for certain categories of the process, then click **Save**.
4. In the **IC Step Exceptions** tab, click ⊕, then select steps of the process on which to set the blocking of intercompany declarations for specific accounts or accounts/categories, then click **Save**.
5. In the **Control groups to exclude** tab, click ⊕, then select the control groups to be excluded from/included in the process, then click **Save**.
6. In the **Analytical Workspace Measures** tab, click ⊕, then select the measures from a dataset to be included in/excluded from the process, then click **Save**.

Exclude an account from a step of the process

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

This procedure allows you to exclude a specific account or node of accounts from a step of the process.

1. In the configuration section of the **Account** tab, in **Action**, select **Exclude**.
2. In **Account**, select the account or node to exclude.
3. In Step, select the step of the process from which to exclude the account, then click **Save**.

Set up a specific data model by entity

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

To set up a specific data model by entity, an account must be defined, but the remaining configuration tabs are optional based on the needs of the project. For the option to be visible, there must be several PDMs.

1. Create one or several customised data models and click **Save**.
2. Click **Process Data Model/Entity Relationships**: a page will open to define the specific PDM for the entities.
3. In the **Elements** tab, click ⊕, then select the desired entity and the PDM with which it should be associated, then click **Save**.
4. In the **Contributor nodes** tab, click ⊕, then select a contributor node and specify node levels if necessary, then select the PDM with which it should be associated, then click **Save**.
5. In the **Consolidator nodes** tab, click ⊕, then select a contributor node and specify node levels if necessary, then select the PDM with which it should be associated, then click **Save**.

6. In the **Consolidation scenarios/periods relationship** tab, click on the desired consolidation scenario/period, then select the PDM with which it should be associated, then click **Save**.

Data entry and submission

Contents

This section covers the following topics:

Data entry and processing in processes 65
Data entry modes 65
Data entry and submission rules 66
Data Entry & Submission Rules section 67
Amount & Intercompany rules page 67
Delete IC error signs algorithm 71
Journal rules and settings page 72
Categories for draft journals page 73
Submission rules page 74
Execution plan of jobs to run on submission and rejection page 76
Override Entity parameters on Original scenarios page 76
Define data entry and submission rules 78

Data entry and processing in processes

Introduction

Data can be entered on process by the *contributor user* via the *contributor cockpit*. Then, once the data has been submitted, on CCH Tagetik it is possible to launch *data processing*, which will in turn be used in calculations and processing by the *consolidator* in the *consolidator cockpit*.

To prepare data entry for processes, the following rules must exist:

- *Data entry rules* which determine whether data can be entered in the contributor cockpit.
- *Data processing rules* which define the data processing to be run on the data.

These rules can be customised or left as they have been prepared for the whole environment.

Data entry configuration varies depending on the logic on which basis the financial statements are prepared. For more details, see "Data entry and submission rules" on the next page and "Introduction to data processing" on page 79.

Data entry modes

Introduction

There are the following data entry modes:

Data entry	Description
Via Excel	Data is entered using *data entry forms*, i.e. Excel spreadsheets that allow you to extract and view information from a CCH Tagetik application database and save data entered by the user. Using Excel allows you to take advantage of Excel's normal functionalities such as formulas and charts. For more details, see Form data entry.
Via Web forms	Data is entered via an interface, i.e. a web form and data entry windows. Data is entered manually, allowing you to add to or edit the accounting values and journals already entered in the system.
ETL (Extraction Transformation and Loading)	Data is entered by running ETL routines, which facilitate the following operations: • extract data from external sources (Excel files, text files, data warehouses, ERP systems or CCH Tagetik itself) • process the extracted data, with aggregation or enrichment options • load data into the system. CCH Tagetik has functionalities for checking that the data entered are consistent with the data model and blocks the entry of data on scenarios that have already been closed, submitted data, etc. For more details, see Extraction, Transformation & Loading.
Copy tools	Data is entered using functions that allow you to automatically compile an entity's data based on data associated with the same entity on different scenarios/periods or with other entities on the same scenario/period or a different scenario/period.
Algebraic operations	The entry of data is the result of operations performed by the system on the data of a selected scenario or data belonging to several scenarios.

Based on the project's needs, data can be entered using one or several methods.

Data entry and submission rules

What are process rules

fIn CCH Tagetik, *data entry and submission* logics and rules define the data processing and submission methods to be used in processes. These logics and rules are managed in the Data entry & submission tile and in the Data Entry Rules section of the process setup. In particular, the rules defined in the Data entry & submission tile are applied by default to all processes in CCH Tagetik, while those defined in the Data Entry Rules section of the process setup allow you to fine tune the global settings with specific overrides for the process.

Function

The data entry and submission settings define the following data entry, processing and submission rules:

- Gross and IC amounts
- Journals (entity and consolidation journals)
- Submission
- (only in the Data Entry Rules section of the process setup). Override entity parameters on the original scenarios/periods

Data Entry & Submission Rules section

Admin

Application database > Processes tile > select process > ⋮ > Process setup

Introduction

This section allows you to customise the process's data entry and submission rules and to override entity parameters on predefined scenarios associated with the process. In particular, it gives access to configuration pages showing the sets of generic rules for data entry and submission defined in CCH Tagetik (see "Amount & Intercompany rules page" below), and provides the possibility to change them by overriding them only in relation to the specific process.

Elements in the section

Element	Description
Gross amounts & IC	Customises the generic rules for gross and intercompany amounts.
Journals	Customises the generic rules for journals and the specific rules for draft journals.
Submission	Customises the generic rules for submission and the jobs to be run on submission/rejection.
Override Entity parameters on original scenarios	Customises the generic parameters of the entity on the original scenarios.

Actions in this section

Element	Description
	Allows you to override the rule and shows its status: • : default rules are currently applied. • : the default rules have already been modified.

Amount & Intercompany rules page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > Data Entry & Submission Rules section) Gross & IC amounts >

Purpose of the page

This page allows you to define specific overrides for the process on the default data entry rules for gross amounts and intercompany entries.

Page sections

Section	Description
Dimensions	Defines the custom dimensions enabled on amounts, intercompany entries and reconciliation accounts.
Intercompany	Defines additional fields for the intercompany declaration and specific behaviour for the intercompany declaration methods.
Transaction currency	Defines the management mode for the currency in which the transaction was carried out, regardless of the entity that executed it.
Editability	Defines the editability options for data originating from specific sources.
Break back	Defines, for the managed dimensions, the requirements for entering data from forms at the level of hierarchy nodes.
IC Cockpit Advanced rules	Defines advanced requirements for the attribution of intercompany data to the relevant steps.
Spreading	Defines the way in which the spreading functionality is used.
Countervalue calculation	Defines the FX rate used in the countervalue calculation data processing, and the data on which it is run.

Fields in the Dimensions section

Element	Description
<Custom dimension 1>	Enables the use of custom dimension 1.
<Custom dimension 2>	Enables the use of custom dimension 2.
<Custom Dimension n>	Enables the use of custom dimension <n>.

Fields in the Intercompany section

Element	Description
Enable additional fields on IC	They both enable the collection of additional data on intercompany amounts. • **Only information for document** • **Information for document and amount type** (see Regole Saldi e IC)
Copy intercompany to gross data	Enables the automatic calculation of the gross data based on the saving of intercompany data from forms. The plausibility diagnostics will then diagnose the intercompany data and the minorities share together.
Allows intercompany declarations towards same Declaring entity	Allows you to enter intercompany declarations towards the same declaring entity. The declaring entity is therefore the same as the counterparty entity.
Defines CTP <Custom dimension 2> with default Entity element	When entering intercompany data, the CTP custom dimension 2. is automatically defined as the default element of custom dimension 2 associated with the entity.

Fields in the Transaction currency section

Element	Description
Managed on gross amount	Allows you to manage the transaction currency and the amount in the currency of the transaction on gross amounts.
Managed on ic amount	Allows you to manage the transaction currency and the amount in foreign currency of the transaction on intercompany amounts.

Element	Description
Keep transaction currency on consolidated gross amount	Keeps details of the transaction currency on consolidated amounts.
Use detail window to input gross & IC data on transaction currency	Where the transaction currency is being managed, the entry of data (gross and intercompany amounts) within the form must obligatorily be done from the relative management window and not directly from the cell.

Fields in the Editability section

Element	Description
Edit data with ETL origin	Enables the data collected by ETL procedures to be edited manually.
Save data in form incrementally	Enables changes to data in forms to be tracked. When saving a form, the system creates a database row for every change made to the individual amount. If disabled, the system sums up all the values entered, and only shows the total.

Fields in the Break back section

Element	Description
Dimensions	Allows you to select the dimensions on which to run the break back.
Editability check	With break back active, it allows you to select the mode in which the editability check is performed if break back is active. • **Automatic**: if the data is saved on a reference element, the system performs the check on the reference element itself, otherwise it does not perform any editability check. If no reference element is specified, the editability check is not performed. • **On reference lowest element**: the system always performs the editability check on the reference element. If no reference element is specified, the data will not be editable.
Always write on reference element	With break back active and enabled, for data entry from forms it automatically attributes the changes made on the node to the same node's reference entity. When disabled, changes made on a node are distributed among the lowest level elements related to the same node in proportion to the values already present.

Fields in the IC Cockpit Advanced rules section.

Element	Description
Attribute only the reconciliation account category to the cockpit step	For account/category pairs present in an intercompany matching cockpit in which the category is the one used on the IC cockpit for reconciliation accounts, this defines the step in which the cockpit currently is as the intercompany step. For the others, including those belonging to the cockpit, it also behaves as if it were not active. If not active: • for account/category pairs belonging to the intercompany matching cockpit, the intercompany step is the same as the cockpit step • for account/category pairs not belonging to any cockpit, where there are overrides the system considers the intercompany step to be the overridden step; if there are no overrides it uses the step generated by the intersection between the highest among the steps of the gross amount and the lowest step on which there is a cockpit.
Simplified calculation of the ic step	Defines the gross step, or any overridden step, as the intercompany step for accounts/categories not associated with the cockpit.

Element	Description
Allow the insertion of reconciliation accounts with IC data entry in progress	Allows you to insert reconciliation accounts even if one of the two entities has not yet finished inserting intercompany entries. Reconciliation accounts can therefore always be added, regardless of the status of the entities of the relationship on the IC matching cockpit.
Mandatory notes when inserting reconciliation accounts	Makes it mandatory to insert notes when loading reconciliation accounts.

Fields in the Spreading section

Element	Description
Intercompany Spreading display method	Tells the system how to display data related to intercompany entries in the data entry step when the intercompany spreading functionality is in use. • **All data**: the system displays the original declarations and write-off and reallocation entries. • **Original data**: the system only displays the original declarations. • **Only Reallocations**: the system only displays data related to reallocations on the counterparty custom dimension 2.
Granularity: <Custom dimension 2>	Defines the level of detail for the intercompany spreading functionality.
Reference Hierarchy <Custom dimension 2>	Only with **<Custom dimension 2> Granularity** = **By node**. Defines the custom dimension 2 hierarchy to be used.
Reference level for the <Custom dimension 2> hierarchy	Only with **<Custom dimension 2> Granularity** = **By node**. Selects the level of the custom dimension 2 hierarchy to be used to select the available nodes.
Display override type CTP <Custom dimension 2>	Enables **CTP custom dimension 2 override** information in data entry management windows for intercompany entries and entity journals.
Preferential allocation to <Custom dimension 1>	Enables the management of intercompany declarations belonging to the entity/counterparty/custom dimension 1 relationships subject to balancing as a stand-alone set of declarations.
Balancing threshold on <Custom dimension 1>	Defines the minimum threshold at which an entity/counterparty/custom dimension 1 is considered to be balanced.
Delete error signs	Enables algorithm for reallocating intercompany declarations on custom dimension 2 to the custom dimension 2 of the counterparty with the opposite sign. For details of the algorithm, see "Delete IC error signs algorithm" on the facing page.

Fields in the Countervalue calculation section

Element	Description
Conversion	Defines the type of FX rate to be used in countervalue calculation data processing to convert the following accounts with conversion type set to P&L FX rate. rate: • **Average FX rate** • **Period average FX rate** • **Final FX rate** • **Override Period average FX rate on P&L or on Variations accounts**: the system converts all P&L accounts, Other Variations accounts and Variations accounts (regardless of their Nature), ignoring the account's conversion type. Conversion takes place at the period's average FX rate and the period length is the one indicated on the scenario being processed. For more details on FX rates, see La Valuta: concetti di base.
Run also on Balance Sheet, Other Stock & Guard. and Comm. accounts	Includes balance sheet accounts and normal and detailed other stock accounts in the countervalue calculation data processing.

Buttons and/or links on the page

Element	Description
Restore default values	Restores the default configurations defined on the **Amount & Intercompany rules** page (see Regole Saldi e IC).

Delete IC error signs algorithm

Introduction

The following algorithm allows you to reallocate intercompany declarations on counterparty custom dimension 2, in IC Spreading data processing.

Algorithm properties

- On each side of a relationship between entities, the system separates the custom dimensions 2 according to whether they have a positive total, a negative total or a total of nil (typically resulting from amounts off written directly on input)
- Custom dimensions 2 with a sign are reallocated to those of the counterparty with the opposite sign following a specific allocation sequence.
- Amounts related to custom dimensions 2 with a total of nil are allocated to the default.

With regard to how the system functions when the aforementioned option is NOT active, there are the following differences:

- The step that associates custom dimensions 2 that are the same on both sides only takes place if the totals are of opposite signs on each side. Otherwise, those mini-relationships will remain empty.
- If, after that step, one of the two sides remains without custom dimensions 2 or the desired sign, the counterparty's remainder is allocated to the default custom dimension 2, ignoring the custom dimensions 2 on which the original declarations had been made.
- The step that reallocates on a proportional basis never reallocates groups of custom dimensions 2 with different signs together, and always works in conditions that prevent any risk of incorrect signs or amounts.

Allocation sequence

Custom dimensions 2 with a sign are allocated according to the following steps:

- If there are shared custom dimensions 2 on each side, the system allocates the lower module portion (comparing the declarations of the two entities) entirely to the same custom dimension 2. The remaining portion on the side of the higher module, where applicable, is dealt with in the next steps.

- If there are no custom dimensions 2 of the opposite sign on the counterparty side, or all the custom dimensions 2 to be reallocated have been entirely reallocated in the previous step, then any remaining amounts are allocated to the default custom dimension 2.
- Otherwise, the custom dimensions 2 intersect with remaining amounts in every way possible, using the counterparty declarations as weightings.

Journal rules and settings page

Admin

Operational database > Processes > select process > ⋮ > Process setup > (Data Entry & Submission Rules section) Journals > ✎

Purpose of the page

This page allows you to set specific overrides for the process on the rules for entity journals and consolidation journals.

Page sections

Element	Description
Dimensions	Defines the custom dimensions enabled on the journals.
Transaction currency	Defines the management mode for the currency in which the transaction was carried out, regardless of the entity that executed it.
Others	Defines specific behaviour for relationships, editability, journal compilation and elimination logics.

Fields in the Transaction currency section

Element	Description
Entity journals	Allows you to manage the transaction currency and the amount in the currency of the transaction on the rows of an entity journal.
Consolidation journals	Allows you to manage the transaction currency and the amount in the currency of the transaction on the rows of a consolidation journal.

Fields in the Other section

Element	Description
Relationship type	Defines the declaring entity/counterparty relationships. • **Entity**: declaring entity/counterparty relationships are entity-entity. • **Entity - custom dimension 2**. Declaring entity/counterparty relationships are entity-custom dimension 2. The system generates the automatic intercompany elimination journals based on the relationship between the entity and the custom dimension 2. • **Entity - synthetic custom dimension 2**: The headers are generated on the basis of the relationships between entities and their COD_DEST1 and COD_DEST2 fields are empty. When the entity or relationship (CTP eliminations, minorities, NER, etc.) are used to generate the journal number, custom dimension 2 is not inserted. The journal rows are generated on the basis of the entity/custom dimension 2 relationship and their COD_DEST2_CTP_SEGMENT field is defined. The system considers the Entity - custom dimension 2 relationship type both during the row creation step and during the reading/processing of the data of the same rows.
Enable financial investments editability on journals	Overrides the editability of financial investment accounts on journals.
Manages CTP entity and CTP Products regardless of the header relationship	In the consolidation journal compilation step, this allows you to set entities or custom dimensions other than those defined in the journal header as the counterparty entity and/or counterparty custom dimension 2 on the rows (regardless of the value in the **Many to many relationship** field).
Exclude intercompany capacity check on the single row of the journal	Only if the row account manages intercompany declarations and the **IC capacity check** in the process validation rules is **Check =**. When saving a journal entry row, makes the counterparty entity valuation optional.
Eliminate once the accounts present in more than one elimination logics	When the account is associated with several elimination logics, it deletes the account with the highest code in the elimination logic.

Buttons and/or links on the page

The buttons vary depending on the path taken to reach the page.

Element	Description
Categories for draft journals	Opens a page to define categories for draft journals, see "Categories for draft journals page" below.
Restore default values	Restores the default configurations defined for this page.

Categories for draft journals page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Entry & Submission Rules section) Journals > ✎ > Categories for Draft Journals

Purpose of the page

This page allows you to define overrides on categories that are valid for the process's draft journals.

Page fields

Element	Description
Category	Selects a category.

Submission rules page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Entry & Submission Rules section) Submission > ✎

Purpose of the page

This page allows you to set overrides on the following default elements:

- data submission rules
- data rejection rules
- rules for locking data editability in the rejection step
- default overrides for the incorrect data submission

Page sections

Section	Description
Submission	Defines specific behaviours for the data processing run on submission and for how to purge submission tables, run diagnostics on steps prior to the submitted step, and store diagnostic data offline.
Lock data	Defines the method that the system uses to make data that contributed to the submission of an entity or journal no longer editable, even if rejected. The origin is no longer manual and users must input new data to leave a trace of the corrections made.
Reject	Defines specific behaviour for performing rejections.
Override submission	Defines submission overrides.

Fields in the Submission section

Element	Description
Run data processing on submission	Allows you to run all data processing enabled on the processing automatically in the submission launch step (with the exception of cash flow planning and closing).
Exclude Other calculation logics from the data processing on submission	Only with **Run data processing on submission** selected. Allows you to exclude all **Other** logics enabled on the process automatically in the submission launch step.

Element	Description
Also includes the stored procedure	Only with **Run data processing on submission** selected. Allows you to choose a previously defined procedure (stored procedure) to be run automatically in the submission launch step, together with the other data processing. The system only uses procedures with names starting with the suffix CPM_SP_. Moreover, to allow the stored procedure to read the submission parameters, then must be named as follows: • PROCESS: data collection process • ENTITY_HIERARCHY: organisational hierarchy process • STEP_LIST: list of steps • ORIGINAL_SCENARIO_PERIOD_LIST: list of original scenarios/periods • ENTITY_LIST: list of entities • CONTRIBUTOR_NODE_LIST: list of contributor nodes • CONSOLIDATOR_NODE_LIST: list of consolidator nodes
Exclude Purge submission tables	Makes the carry forward of submission information, in the entity deployment step, following changes to the process's organisational hierarchy, optional.
Diagnose all the steps before the submitted step	Allows you to run the check for errors in previous steps that have already been submitted, not just non-submitted previous steps, when launching the submission of a step.
Store diagnostic result on submission	Allows you to save a PDF report with the diagnostic results when the submission of an entity is complete.

Fields in the Lock data section

Element	Description
With manual origin on the Journals submission	Places the SUB_ prefix before the original origin on the journal rows with manual origin that have been submitted.
Journal submission calculation	Places the SUB_ prefix before the original origin on the journal rows calculated by the calculated accounts data processing and submitted.
With manual origin on the submission of the Entities/nodes	Places the SUB_ prefix before the original origin on the (gross and intercompany) amount rows and manual journal when submitting the entity.
With calculation origin on the submission of the Entities/nodes	Places the SUB_ prefix before the original origin on the (gross and intercompany) amount rows and journals generated by the calculated accounts data processing when submitting the entity.

Fields in the Rejection section

Element	Description
Mandatory notes	Makes it mandatory to insert explanatory notes to be able to run the rejection of an entity's data.
Mandatory reason	Makes it mandatory to select a rejection reason to be able to run the rejection of an entity's data.
User enabled for Journals rejection	Defines the user responsible for the rejection of an entity's journals.

Fields in the Override submission section

Element	Description
By user	Allows authorised users to submit the step even if there are blocking errors. See Anagrafiche utenti.
With authorization of blocking errors	Allows you to submit the step, even if there are blocking diagnostic errors, provided they have been authorised. The **Enable detected errors trace** option must be enabled in the validation rules (see "Diagnostic Rules page" on page 97). Errors with **Blocking** severity that have been authorised will be renamed **Authorized blocking**.

Buttons and/or links on the page

Element	Description
Execution plan of jobs to run on submission and rejection	Opens a page to create and relate jobs to steps of the process. See "Execution plan of jobs to run on submission and rejection page" below.

Execution plan of jobs to run on submission and rejection page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Entry & Submission Rules section) Submission > ✎

Purpose of the page

This page allows you to create, and relate to process steps, jobs to be run on submission or rejection of the step itself.

Page fields

Element	Description
Step	Defines the process step with which to associate the job.
Submit Job	Defines the job to be run on submission of the step.
Reject Job	Defines the job to be run on rejection of the step.

Override Entity parameters on Original scenarios page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > Data Entry & Submission Rules > (Override Entity parameters on Original scenarios) > ✎

Purpose of the page

This page allows you to define overrides on entity attributes for the process's original scenarios/periods.

Page fields

Element	Description
Original scenario/periods	Allows you to select scenarios/periods on which to run the overrides for the entity. • **All**: selects all original scenarios/periods associated with the entity. • **Selected**: activates the ... button, which opens a page to select the desired original scenario/period.
Entity	Selects an entity or node from the process's non-time dependent hierarchies.
Only CTP	Allows you to use entities that are in the group but not consolidated, or entities owned by the group with negligible percentages, as the counterparty in intercompany declarations only. Choosing **From Entity elements table** tells the system to use the settings present on the entity dimension table.
Only consolidator data	Tells the system whether to enter, for the entity, data on consolidator categories only. Choosing **From Entity elements table** tells the system to use the settings present in the entity dimension table.
Deconsolidation method	Defines the entity's deconsolidation method. • **From Entity elements table**: the system uses the settings present on the entity dimension. • **Not to deconsolidate**: never runs deconsolidation. • **Deconsolidate only initial balances**: for entities on which no FS data has been entered on the original scenario (except for carry forward), on the original scenario the system only deletes data originating from carry forward operations from the previous year. Used when the deconsolidated entity merges with another entity in the group or is sold at the start of the current year. • **Deconsolidate from previous period**: data not yet consolidated is attributed to the subsequent consolidation period. Used when the entity is sold or merged during the year soon after the last interim consolidation. • **Deconsolidate from current period**: data deconsolidation follows the standard process. Used when an entity for which significant data has been entered on the original scenario is sold or merged during the year.
Generate CTP eliminations	Defines the CTP elimination mode according to the entity's consolidation settings. Its purpose is to prevent the system from generating journals in the original scenarios that will never be used and to prevent matching for entities that may not declare their own ICs. • **From Entity elements table** the system uses the settings present on the entity dimension. • **All elimination logics**: for line-by-line or proportional entities included in the intercompany matching cockpit and are not the only counterparty. • **Exclude IC elimination logic**: for entities not included in the intercompany matching cockpit, the system generates counterparty eliminations only for elimination logics with **Equity evaluation method** not set to **Delete**. See Regole equitizzazione e valutazione metodo patrimonio netto. • **Never**: the system does not generate counterparty eliminations and the entity is not included in the intercompany cockpit. This is the default value in the event that the entity is counterparty only or is at cost.
IC matching	Defines the requirements for running intercompany matching based on the entity's consolidation method. • **Mandatory**: failure to run matching blocks submission. • **Optional**: intercompany matching is not mandatory for the entity, but is run when the counterparty entity has made intercompany declarations. • **Automatic**: the system runs intercompany matching automatically when at least one of the two entities has this option activated. Relationships do not appear on the IC cockpit. Failure to run matching does not block submission. They are automatically balanced in the IC elimination journals regardless of the balancing threshold value.

Buttons and/or links on the page

Element	Description
Definition result	Opens a page to view the list of overrides set up on entity attributes for specific original scenarios/periods.
...	Opens a window to select an original scenario/period on which to create overrides on entity attributes.

Define data entry and submission rules

Pagine di lavoro

Data Entry & Submission Rules section 67

Concept Information

Data entry and submission rules 66

Application database > Processes tile > select process > ⋮ > Process setup > Data Entry & Submission Rules section

Procedure

This procedure allows you to set overrides on rules for intercompany amounts (**IC amounts**), journals (**Journals**), submission (**Submission**) and for the overriding of entity parameters regarding scenarios (**Override parameters on original scenarios**).

1. Next to the desired item, click ✎.
2. Modify the rule as desired and click **Save**.

Data Processing: introduction

Contents

This section covers the following topics:

Introduction to data processing 79
The process's data processing execution order 80
Data Processing section 82
ETL execution plan page 83
Define the Data Processing 84

Introduction to data processing

What is data processing

In CCH Tagetik, there is data processing that can be run transversally within the application. Specific executions for the process can be obtained by changing the requirements and rules of the data processing associated with the process itself.

In the process settings, data processing defines the data processing to be carried out on the process, the requirements and any override rules. The starting point is the data processing that has already been set CCH Tagetik.

Function

Setting data processing allows you to define the data processing to be associated with the process and change the relative requirements. In particular, it gives access to the configuration page for the requirements related to the following data processing:

- ETL
- Carry Forward
- Calculation Logics
- Validations
- Balancing
- Consolidated
- Allocations & Closing
- Cash flow planning
- Taxes
- Other data processing
- Send mail
- Taxes
- Other
- Snapshot

These pages show the general requirements for the data processing defined in CCH Tagetik, but only changes them for the specific process.

Data processing in CCH Tagetik

For an overall view of the existing data processing in CCH Tagetik and the run order, see "The process's data processing execution order" below.

The process's data processing execution order

Execution order details

CCH Tagetik runs the process's data processing in a pre-established non-modifiable order.
The details of the data processing execution order, divided into themes, are specified below.

***IMPORTANT**: the following list of data processing is applicable to the In Memory consolidation engine.*

Theme	Data processing order
ETL	• ETL routine for tables • ETL routine for values • ETL job for tables • ETL job for values
Carry Forward	• Preliminary data processing on Original scenarios-Carry forward • Preliminary data processing on Original scenarios-Reverse journal • Preliminary data processing on Consolidation scenarios-Carry forward
Validation and Automatic balancing	• Validation • Entity data processing-Balancing • Group consolidation data processing-Balancing • Consolidation area final data processing-Balancing
Calculation Logics	• Calculation logics • Monthly splitting

Theme	Data processing order
Consolidated	• Preliminary data processing on Original scenarios-Carry forward • Preliminary data processing on Original scenarios-Deconsolidation on Initial balances • Preliminary data processing on Original scenarios-Incoming Mergers on Initial balances • Preliminary data processing on Original scenarios-Reverse journal • Preliminary data processing on Original scenarios-Copy previous period • Preliminary data processing on Original scenarios-Deconsolidation from previous period • Preliminary data processing on Original scenarios-Incoming Mergers from previous period • Entity data processing-Incoming mergers • Entity data processing-Dividends distribution calculation • Entity data processing-Financial investments loading • Entity data processing-Bank loans depreciation calculation plan • Entity data processing-Depreciation budget • Entity data processing-Countervalue calculation • Entity data processing-Accounts reclassification • Entity data processing-Rules Engine Designer • Entity data processing-Depreciation • Entity data processing-Direct taxes calculation • Entity data processing-IC Spreading • Entity data processing-Standard Formulas • Entity data processing-Monthly splitting • Entity data processing-Equity pick-up • Entity data processing-Look Through • Entity data processing-Deferred taxes • Entity data processing-Balancing • Entity data processing-Net equity reclassification (NER) • Entity data processing-Formulas • Entity data processing-Financial investments reclassification • Entity data processing-Deconsolidation • Group consolidation data processing-Import Financial Investment data into Ownership Structure Register • Group consolidation data processing-Incoming mergers • Group consolidation data processing-Ctp eliminations • Group consolidation data processing-Eliminate Financial investments from Ownership structure register • Group consolidation data processing-Intragroup assets assignment • Group consolidation data processing-Rules Engine Designer • Group consolidation data processing-Depreciation • Group consolidation data processing-Standard Formulas • Group consolidation data processing-Deferred taxes • Group consolidation data processing-Balancing • Group consolidation data processing-Formulas • Group consolidation data processing-Financial investments reclassification • Group consolidation data processing-Deconsolidation • Preliminary data processing on Consolidation scenarios-Carry forward

Theme	Data processing order
Area consolidation data processings-Contribution	• Consolidation area basic data processing-Copy / Proportional calculation • Consolidation area basic data processing-Deconsolidation • Consolidation area basic data processing-Specific FX rate loading • Consolidation area basic data processing-Conversion • Consolidation area basic data processing-Minority • Consolidation area final data processing-Copy / Equity evaluation • Consolidation area final data processing-IFRS5 reclassification • Consolidation area final data processing-Equity pick-up • Consolidation area final data processing-Look Through • Consolidation area final data processing-Accounts reclassification • Consolidation area final data processing-Balancing • Consolidation area final data processing-Net equity reclassification (NER) • Consolidation area final data processing-Rules Engine Designer • Consolidation area final data processing-Formulas
Allocations & Closing	Closing
Cash flow planning	• Cash flow planning - Copy Actual data • Cash flow planning - Create objects, derived events and entries • Cash flow planning - Indirect taxes and Cash Pooling • Cash Flow Planning - Indirect taxes calculation • Cash flow planning - Tax balance payment • Cash flow planning - Tax down payment • Cash flow planning - Dividends calculation • Cash flow planning - Financial simulation • Cash flow planning - Revaluation and Devaluation • Cash flow planning - Direct taxes calculation • Preliminary data processing on Original scenarios - Carry forward • Entity data processing - Standard formulas
Other	• Entity data processing-Dividends distribution calculation • Entity data processing-Bank loans depreciation calculation plan • Entity data processing-Depreciation budget • Entity data processing-Direct taxes calculation • Entity data processing-Deferred taxes • Group consolidation data processing-Deferred taxes
Send mail	Send mail rule

Data Processing section

Application database > Processes tile > select process > ⋮ > Process setup

Introduction

This section allows you to select the data processing to be associated with the process and to change the relative requirements. In particular, it gives access to configuration pages showing the sets of general requirements for the data processing defined in CCH Tagetik, but only changes them in relation to the specific process.

Elements in the section

Element	Description
ETL	Enables the execution of ETL routines or jobs.
Carry Forward	Enables the execution of data processing to carry forward initial balances of BS accounts through variations that bring the previous year's final balances forward in time.

Element	Description
Calculation Logics	Enable account calculation logics on entities, groups or consolidation areas.
Validations	Enables validation with diagnostic check or plausibility diagnostics within the process.
Balancing	Enables balancing on diagnostics for control groups and on the intercompany capacity check.
Consolidated	Enables consolidation data processing.
Allocations & Closing	Enables allocation/closing data processing.
Cash Flow Planning	Enables Cash Flow Planning data processing.
Taxes	Enables tax-related data processing.
Other	Enables data processing that is not part of the main modules: monthly splitting based on the account, countervalue calculation, depreciation of assets and dividends.
Send mail	Enables the automatic sending of e-mails following pre-determined events (e.g. submission/rejection of an element, completion of a task or an approaching deadline).
Snapshots	Enables the creation of snapshot scenarios.

Actions in this section

Element	Description
Unlocked	Allows you to select and potentially override data processing.
Locked	Prevents data processing from being selected or overridden.
	Allows you to override the requirements of the relative data processing. • : default requirements applied • : default requirements incomplete or incorrect • : edited requirements
	Allows you to override the rules of the relative data processing and shows their status: • : default rules are currently applied. • : default rules have already been edited by the current user or another user with the necessary rights.
	Deploys what has been set in the section.

ETL execution plan page

Admin

Application database > Processes > select process > ⋮ > Process setup > (Data Processing section) ETC >

Purpose of the page

This page allows you to create ETL data processing execution plans. For each plan, it allows you to enable ETL routines or jobs within the specific process. These ETL routines or jobs can then be run from the processes cockpit or from a task in a task workflow for the selected entities.

The following options are available:

- **Routines on metadata**
- **Routines on amounts**

- **Jobs on metadata**
- **Jobs on amounts**

Buttons and/or links on the page

The specific actions for the page are specified below.

Element	Description
Definition result	Shows the results of the set data processing plan, i.e. the entities and relative ETL routines or jobs that can be run from the processes cockpit or from a workflow task.

Attributes tab data

Element	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Entity	Code of the entity or node of entities within the available non-time dependent hierarchies to be included or excluded from the data processing
Jobs	Jobs to be run
ETL domain	ETL domain with all the settings to define ETL routines
Routine	ETL routine belonging to the domain to be run

Define the Data Processing

Pagine di lavoro
Data Processing section 82
Concept Information
Introduction to data processing 79

Enable the running of data processing

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

1. To enable changes to settings, click **Locked**.
2. Select the data processing to be run for the selected process.
3. Click **Save**.

Customise the calculation logics to be applied

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

1. To enable changes to settings, click **Locked**.
2. Click **Calculation logics** and select the type of logics to apply.
3. To customise the logics, in the **Calculation logics** row, click : the **Calculation logics** page will open.
4. Set the fields as desired and click **Save**.

Change the validation rules for a specific process

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

1. To enable changes to settings, click **Locked**.
2. Select **Validations** and **Diagnostic**.

3. In the **Diagnostic** row, click .
4. If necessary, click **Restore default values** to restore the generic rules for the process you are working on.
5. Set the fields as desired and click **Save**.

***Note**: for page details, see Data processing > Diagnostic > Define rules > Validation.*

Change the configuration of the entities of a consolidation area

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Consolidation >

In **Consolidation area**, in the row of the desired consolidation area, click : the **Consolidation area** page will open.

Generate a report on consolidation area variations

Application database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation >

1. Click **Change in consolidation scope**.
2. In **Consolidation scenario/period**, select the desired consolidation scenario/period.
3. Select the scenario or scenario/period with which you want to compare and the data view mode.
4. Click **Run**: the report will be generated.

Change Equity pick-up requirements

Application database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up

1. Select the desired scenario/period.
2. Do the following:

If you are using this method...	Then...
progressive	In **Pick-up period length**, enter the value equal to the number of the selected period.
periodic	1. In **Pick-up period length**, enter the number of periods between the selected period and the previous one, i.e. the last period processed with equity pick-up data processing. 2. In **Pick-up account period length**, enter a value equal to the selected period.

3. To view the pick-up percentages of the selected scenario/period, click **Percentages pick-up**.
4. To override the pick-up percentages, click **Override percentages pick-up**.
5. Click **Save**.

Data Processing: carry forward

Contents

This section covers the following topics:

Carry forward data processing 87
Carry forward rules page 88
Carry forward rules - Accounts definition page 89
Override Carry Forward Categories page 89
Normal and Detail accounts/Categories to exclude page 90
Exclude Scenarios from Carry forward page 90

Carry forward data processing

Introduction

Carry forward is used to initialise the initial balances of balance sheet accounts with the final balance from the previous year. This data processing is necessary both for consolidation data processing and for Cash Flow Planning data processing, and whenever balance sheet variations are used in general.

Types of carry forward data processing

Carry forward data processing can be limited by the following options.

Type	Description
On entities and group	The carry forward data processing is run on gross amounts and IC amounts and on pre-consolidation journals on the original scenarios (entity) and consolidation scenarios on the original scenario (group).
On consolidation area	The carry forward data processing is run on Adjustment Amounts by entity and consolidation adjustments (on consolidation scenario).
Reverse journal	Only journal cancellation operations are performed. See Annullamento scritture.

Carry forward rules page

Admin

Operational database > Processes > select process > ⋮ > Process setup > (Data Processing Section) Carry forward > ✎

Purpose of the page

This page allows you to override the rules that control carry forward operations for a specific process.

Buttons and/or links on the page

Element	Description
Generic rules	
Input and ouput accounts	Opens the "Carry forward rules - Accounts definition page" on the facing page to select the accounts to be carried forward onto different accounts, duly managing the balancing of variations.
Override carry forward categories	Opens the "Override Carry Forward Categories page" on the facing page to change the data category during the carry forward.
Normal and Detail accounts/Categories to exclude	Opens the "Normal and Detail accounts/Categories to exclude page" on page 90 to exclude certain data from the carry forward.
Specific rules	
Exclude Scenarios from Carry forward	Opens the "Exclude Scenarios from Carry forward page" on page 90 to select the scenarios/period on which not to run the carry forward.

Options on page

Option	Description
Run carry forward on	Allows you to select the accounts on which to run the carry forward. **Process accounts**: all parent accounts of variation type control groups belonging to the process of the selected scenario/period and all journals indicated in the header as to be carried forward are carried forward. **All accounts**: all accounts on which data is present are carried forward, even if not included in the process.
Journals rows aggregation type	Allows you to define the type of aggregation for rows of journals on the carry forward scenario. Or not to aggregate the rows to keep the same detail as the previous year's scenario. **Aggregate according to dimensions**: aggregates the scenario rows by dimension. **Aggregate according to dimensions and notes**: aggregates the scenario rows by dimension and notes. **Don't aggregate**: maintain the same details as the previous year's scenario. ***Note**: aggregating the rows allows you to read the data more easily and reduce the number of records in the database.*
Allow preliminary data processings on data that belongs to submitted steps.	Allows you to carry forward variations and journals onto data belonging to submitted steps, normally excluded from the carry forward.
Carry forward journals: include attachments	Allows you to carry forward onto a journal any attachments to the journal itself, in the previous year.

Carry forward rules - Accounts definition page

Admin

Operational database > Processes > select process > ⋮ > Process setup > (Data Processing Section) Carry forward > ✎ > Input and output accounts

Purpose of the page

As a rule, the carry forward operation carries forward all balance sheet accounts belonging to a variation type control group, as parent accounts, and the initial balance is written on these. This page allows you to select the accounts to be carried forward onto other accounts, duly managing the balancing of variations. Or indicating the account from which to perform the download and the account onto which to perform the upload.

Buttons and/or links on the page

The specific actions for the page are specified below.

Element	Description
Definition result	Shows the result of the defined carry forwards.

Attributes tab data

Element	Description
Action	Allows you to include or exclude the carry forward accounts according to the defined characteristics.
Normal input account	Normal account on which the data to restore is present
Category	Category on which to filter the normal input account
Write off account: normal	Normal account from which to read data for the carrying forward of journals. This is normally the normal input account.
Writeoff account: variation	Variation of the account to be carried forward from which to read the data
Loading account: normal	Normal account on which to write data for the carrying forward of journals
Loading account: variation	Target account variation on which to write the data

Override Carry Forward Categories page

Admin

Operational database > Processes > select process > ⋮ > Process setup > (Data Processing Section) Carry forward > ✎ > Override carry forward categories

Purpose of the page

This page allows you to change the category of data when accounts are carried forward.

Attributes tab data

Element	Description
Category	Previous scenario category
Category for Carry forward	Category to be applied with the carry forward

Normal and Detail accounts/Categories to exclude page

Admin

Operational database > Processes > select process > ⋮ > Process setup > (Data Processing Section) Carry forward > ✎ > Normal and Detail accounts/Categories to exclude

Purpose of the page

This page allows you to exclude some data from the carry forward depending on the account, filtered by the category or control group to which it belongs.

Attributes tab data

Element	Description
Action	Allows you to exclude or include the selected data from/in the carry forward.
Account	
Account	Account to be excluded from or included in the carry forward. If not specified, all accounts are entered ($ALL).
Control group	Control group to be excluded from or included in the carry forward. If not specified, all control groups are entered ($ALL).
Category	Any category to be excluded from or included in carry forward.

Exclude Scenarios from Carry forward page

Admin

Operational database > Processes > select process > ⋮ > Process setup > (Data Processing Section) Carry forward > ✎ > Exclude Scenarios from Carry forward

Purpose of the page

This page allows you to select specific scenarios/periods associated with the process on which the carry forward is not to be run.

Options on page

Element	Description
Lock carry forwards	Does not run the carry forward for the specific scenario/period.

Data Processing: calculation logics

Contents

This section covers the following topics:

Calculation Logics 91
Calculation logic requirements page 92
Calculation logics graph page 92
Calculation logics overrides page 93
Overrides definition page 93

Calculation Logics

Available types of logic

Calculation logics can be **Basic** or **Other**.

Field	Description
Base	Logics first run by the system during consolidation data processing, see Consolidamento. All calculation logics generated automatically by the system are **Basic**. They can be enabled on entities or on the group. For example, there are logics related to result accounts (see I conti di risultato), control groups (see I gruppi di controllo: concetti di base), and plug accounts and logics that calculate the gross figure of an account based on its intercompany amount.
Other	Logics run in the second instance by the system during consolidation data processing. In turn, these can be enabled on entities, on the group, or on the consolidation area.

Logics created by users can be both **Basic** and **Other**.

Managing loops between calculation logics.

When defining the calculation logics to be used, the system checks whether there are any loops between calculation logics. If there are, it presents all calculation logics from being run.

However, it is possible to intervene on apparent loops, i.e. those generated by Multidimensional Script calculation logics, whose output accounts are also input accounts for other logics. To do this, it is necessary to override the sequence of the calculation logic when defining it (*Setup & Admin > Data Processing > Calculation logics > Elements*). In fact, the system runs the logics of every sequence sequentially and only analyses possible dependencies between logics with the same sequence number. For more details on the application of calculation logics to data processing, see Overview.

> ***Note**: to preserve performance when running calculation logics, only override the sequence in the event of apparent loops.*

Calculation logic requirements page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Calculation logics >

Purpose of the page

This page allows you to set the calculation logics to be used.

Page fields

Field	Description
Calculation logics node	Node of the group of calculation logics to be used.
Net result	Set of results accounts. The ones applied to the process can be overridden.
Display calculation logic graph	Opens a page displaying the calculation logics execution order in deployed view.

Calculation logics graph page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Calculation logics > > Display calculation logic graph

Purpose of the page

This page shows the dependencies of the various calculation logics and the execution order of those logics.

Page tabs

Field	Description
Original scenarios, Basic	Shows the **Basic** calculation logics for the original scenarios and their execution order.
Original scenarios, Others	Shows the **Other** calculation logics for the original scenarios and their execution order.
Consolidation Scenario, Basic and Others	Shows the **Basic** and **Other** calculation logics for consolidation scenarios and their execution order.

Columns in the tables

Field	Description
Sequence	Order in which the account calculation logics will be processed
Calculation Logic	Calculation logic to be processed

Field	Description
Dependencies	Calculation logics the output of which depends on the logic specified in **Calculation logics**
Level	Level of the logic on the graph. 0: logic with no dependencies ≥1: logic to be processed after a lower-level logic, on whose output it is dependent

Calculation logics overrides page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Calculation logics > ✎

Purpose of the page

This page allows you to open pages to define the desired overrides and see the results of override definition operations.

Buttons and/or links on the page

Element	Description
Overrides definition	Allows you to define the desired overrides.
Definition result	Shows the results of override definition operations.

Overrides definition page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Calculation logics > ✎ > Overrides definition

Purpose of the page

This page allows you to define overrides for calculation logics.

Attributes tab

Field	Description
Calculation Logics	Code of the logic to be overridden
Run on Original Scenarios	Allows you to define when to run the calculation logic on the original scenarios. • **From Table**: according to what is set in the calculation rules table • **No**: never • **Automatic and Submission**: when executing the (Basic and Other) formulas and submitting the data collection process • **Automatic**: when executing the (Basic and Other) formulas • **On demand**: the logic can only be run manually, via data entry forms or linked to an ETL routine.

Field	Description
Logic Type	Type of logic to be overridden • **From Table**: according to what is set in the calculation logics table • **Other**: Other logic type • **Basic**: Basic logic type
Run on Consolidation Scenarios	Allows you to define when to run the calculation logic on the consolidation scenarios. • **From Table**: according to what is set in the calculation logics table • **No**: never • **Automatic**: when executing the (Basic and Other) formulas • **On demand**: the logic can only be run manually, via data entry forms or linked to an ETL routine

Data Processing: validation and balancing

Contents

This section covers the following topics:

Validations 95
Balancing data processing 97
Diagnostic Rules page 97
Plausibility diagnostic 99

Validations

Validations option function

The **Validations** option enables, in the process. the validation of data using a standard diagnostic check or plausibility diagnostics. It also allows you to change the validation rules for the specific process.

Characteristics of the diagnostics

Diagnostics, defined using the validation rules, allows you to run diagnostics for entities and, from the relative data entry activities, diagnostics for amounts and journals. Allows you to define the checks to be carried out with the diagnostics and therefore, indirectly, to define how the automatic data balancing and data submission works.

Stored procedure and diagnostic parameters

Allows you to run, together with the other data processing to be launched with the diagnostics, a stored procedure that responds to CCH Tagetik's minimum requirements. This only makes sense if you have chosen to run data processing on diagnostics.

The name of the stored procedures that can be run directly from CCH Tagetik must start with **CPM_SP_**, beyond any potential tab. In order for the stored procedures to be able to read the diagnostic parameters, the files of those parameters must be named as follows, based on their content:

Name	File contents
PROCESS	Data collection process
ENTITY_HIERARCHY	The process's organisational hierarchy
STEP_LIST	List of steps
ORIGINAL_SCENARIO_PERIOD_LIST	List of original scenarios/periods
ENTITY_LIST	List of entities

Name	File contents
CONTRIBUTOR_NODE_LIST	List of contributor nodes
CONSOLIDATOR_NODE_LIST	List of consolidator nodes

Stored procedures are only run on the original scenarios/periods.

Validation of annual results

The validation of the annual results consists of running diagnostics on the control group **$BS_<result account code>**. The result account code to be used is the one defined in the process rules for the process subject to diagnostics.

Tracking of errors found by diagnostics

Errors found by diagnostics are only saved and added/updated on every submission or running of the diagnostic tool if the “update log” option has been activated.

Errors can only be logged for the original scenarios. It is always possible to justify errors and attach explanatory/justifying files, for scenarios that are not stored offline, by accessing the log management window. The authorisation of an error can only be added/removed if the **With authorization of blocking errors** options has been selected from among the submission override modes in the submission rules.

Reporting failed journal submission

CCH Tagetik allows you to configure the severity (*severity*) with which the failure to submit a journal is reported. To do this, journal submission needs to have been enabled. Journal submission is active on the entities/steps on which a task workflow was entered for the submission of journals in the Processes tile > Process setup > Mapping.

Submission error severity (Severity)

Severity levels are used by the submission to assess the correctness of an entity’s data. If diagnostics return results with blocking severity, then the submission of an entity’s data cannot be completed.

Characteristics of plausibility diagnostics

This type of diagnostics compares the amounts of one scenario/period with the amounts of the same collection of data from another different scenario/period. It therefore shows the results of the comparison via various error messages or warning messages.

Functioning of plausibility diagnostics

When a definition row is added or edited in plausibility diagnostics, a deployment data process is automatically run when saving, allowing you to obtain all the entities deriving from this synthetic definition. In particular, the following will happen:

- For entities: if a node of entities is selected, it is deployed in the nodes’ individual entities.

  ***Note**: the system only considers those which belong to the process.*

- For contributor nodes: nodes are deployed based on the selected node type.

  ***Note**: the system only considers nodes that are significant in the data collection process, or nodes in the entity hierarchy which, in the data collection process, are **To Approve** or **To Submit**.*

- For consolidator nodes: nodes are deployed based on the selected node type.

  ***Note**: the system only considers nodes that are significant in the consolidation process, or nodes in the entity hierarchy which, in the consolidation process, are **To consolidate**.*

Where to define the generic validation rules and the plausibility check logics

The generic validation rules and plausibility check logics are defined, respectively, in the following sections:

Setup & Admin > Data processing > Diagnostic > Validation

See Validazione.

Setup & Admin > Data processing > Diagnostic > Plausibility check logics

See Logiche controlli plausibilità.

Balancing data processing

Background

CCH Tagetik checks for the presence of any unbalanced amounts related to diagnostics for control groups and the IC capacity check.

Function

During the data processing step, balancing data processing makes it possible to automatically balance any unbalanced amounts below a certain threshold.

Types of balancing data processing

The available types of balancing data processing are detailed below:

- on entities: balancing data processing is run on data related to entities on the original scenarios, i.e. on amounts and entity journals, both contributor and consolidator.
- on the group: the balancing data processing includes the group consolidation data present on the original scenarios, i.e. the consolidation journals on the original scenarios.
- on the consolidation area: the balancing data processing is run on all data present on the consolidation scenarios, i.e. the consolidation journals on the consolidation scenarios, considering the consolidable amount type.

For more details on balancing functions, see Quadrature.

Diagnostic Rules page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Validations > Diagnostic > ✎

Purpose of the page

This page allows you to customise the generic validation rules with a diagnostic check on the process and to define overrides.

Generic rules

Field	Description
Validation	
Run data processing on diagnostic	Allows you to run all data processing enabled for the process (with the exception of cash flow planning and closing) when running the diagnostics.
Also includes the stored procedure	Only with **Run data processing on diagnostic** selected. Include a stored procedure that meets CCH Tagetik's minimum requirements in the data processing to be run when diagnostics is launched.
Diagnostic result: Show forms on row	Allows you to view, for every error on the control group or account in the diagnostic result window, the forms on which the control group accounts can be edited or the account itself. ***Note**: (non-transactional) standard forms can be edited using Excel or online.*

Field	Description
Categories for which to show the result	Allows you to manage the categories for which to display the validation of the year's result, even in the absence of unbalanced amounts. ***Note**: for control group **$BS_<result account code>**, diagnostics will show the result, even if balanced, on the categories defined here.*
Restore default values	Only if the rules have already been customised, restores the rules' default values.
Result log	
Enable detected errors trace	Allows you to log errors returned by diagnostics so you can consult, justify and authorise them. ***Note**: only logged errors are saved and can therefore be consulted over time.*
Don't propagate the authorized blocking error information	This check looks for the presence of blocking errors authorised by users responsible for the entity on which diagnostics were runs. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the presence of blocking and authorised errors is reported with blocking severity. • **Non-blocking**: the check is performed and the presence of blocking and authorised errors is reported with non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed. The prerequisites for running this check are: • the traceability of errors found by diagnostics is enabled • the submission mechanism enabled in the submission rules is via authorisation of blocking errors.
Journals submission validation	
Diagnose Manual journals submission	The check verifies that the manual journals belonging to the entity on which the diagnostics were run have been submitted. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the non-submitted manual journals are reported with blocking severity. • **Non-blocking**: the check is performed and the non-submitted manual journals are reported with non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed.
Diagnose Automatic journals submission	The check verifies that the automatic journals belonging to the entity on which the diagnostics were run have been submitted. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the non-submitted automatic journals are reported with blocking severity. • **Non-blocking**: the check is performed and the non-submitted automatic journals are reported with non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed.
IC cockpit	
IC cockpit: Balancing threshold of Compensation reconciliation accounts	Value provisionally set in the generic validation rules. The threshold, if set, is applied during the matching of relationships resent in the IC Cockpit. Specifically, it will be used by the check that verifies the balancing of amounts linked to variation/detail types used on several matching rules.

Specific rules

Field	Description
Equality control groups	Opens a page to define specific rules to be applied to balancing control groups with equality operators.
"Other" control groups	Opens a page to define specific rules to be applied to “other” control groups, or balancing control groups with non-equality equality operators. The rules are not applied to control groups with coherence operators.
Accounts	Opens a page to define specific control rules for accounts.

For further details on rules for the validation of diagnostic data, see Regole specifiche.

Plausibility diagnostic

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Validations > Plausibility diagnostic >

Purpose of the page

This page allows you to set the plausibility diagnostics requirements, or to associate a group of plausibility logics to be run during diagnostics with every entity, contributor node and consolidator node. Also allows you to override the security level to be applied to them.

Page tabs

Field	Description
Elements	Defines the plausibility logics to be applied to entities.
Contributor nodes	Defines the plausibility logics to be applied to contributor nodes.
Consolidator Nodes	Defines the plausibility logics to be applied to consolidator nodes.

Attributes tab

Field	Description
Action	• **Include** (default) • **Exclude**
Original scenarios/periods	Original scenarios/periods of the process to which to apply the overrides: • **Selected** (default) • **All**
Entity	Only for the **Elements** tab. Allows you to select an entity belonging to the process or a node of entities within the available non-time dependent entity hierarchies.
Contributor node	Only for the **Contributor nodes** tab. Allows you to select an entity node from the organisational hierarchy linked to the process.
Consolidator node	Only for the **Consolidator nodes** tab. Allows you to select an entity node from the organisational hierarchy linked to the process.
Node type	Only for the **Contributor nodes** and **Consolidator nodes** tab. Indicates the way in which to deploy the selected node.
Plausibility rules node	Allows you to select the node of logics for the plausibility checks to be applied.

Field	Description
Severity type	• **Do not run**: combinations with this option selected are not validated. It is used, for example, to exclude entities/nodes from a node to be deployed. • **Automatic**: severity is recovered from the definition of the plausibility logic, where established through specific comparison thresholds.
Definition result	Only appears after a definition has been saved. Shows the result of deployment of the definition, with a list of available combinations.

Data Processing: consolidation

Contents

This section covers the following topics:

Consolidation Data Processing 101
Basic consolidation data processing 103
Consolidation Requirements page 106
Define Consolidation Area page 107
Periods page 108
Define consolidation area by period page 109
Define relationships between entities and classifiers for the period page 110
IC Elimination and Matching Requirements page 111
Generate proportional page 111
Generate converted page 112
Override FX rate difference accounts page 113
Customise account conversion type page 114
Generate consolidable and Equity evaluation page 114
Minorities page 116
Mergers page 117
Account reclassification and NER Requirements page 117
Rules Engine Designer requirements page 118
Advanced consolidation data processing 119
Advanced consolidation page 120
Financial investments reclassification page 121
Equity pick-up Requirements page 121
Pick-up percentages page 122
Override Pick-up percentages page 123
Pick-up rules page 123
IC Spreading Requirements page 124
Override IFRS5 rules page 124
Consolidation procedures 125

Consolidation Data Processing

Definition of event scenarios for Ownership structure register

An event scenario is a fictitious original scenario used by the system to manage events to date, or events linked to a specific date. In this case, events which from a specific date bring about a change to the ownership structure. Generally, an event scenario is used to manage the actual events; one for each data process of the budget. Thus, hypothetical future events can also be included.

Management of reference FX rate scenario

These settings are defined in the**Define Consolidation Area** page. See "Define Consolidation Area page" on page 107.

To convert the data, CCH Tagetik uses the FX rates of the original scenario linked to the processed consolidation scenario. However, the system can be overridden so it reads the FX rates from another original scenario. This is useful if, with the same original scenario, you want to generate two consolidation scenarios where the only difference between them is the FX rate applied. For example, to convert an actual amount at the budget FX rate also.

Management of prefixes for financial investment reclassification journals

These settings are defined in the **Define Consolidation Area** page. See "Define Consolidation Area page" on page 107.

This prefix is used by the system to compose the journal numbers of the journals generated by the financial investment reclassification. It is essential to enter the same prefix as the source consolidation scenario/period from which the carry forward is being carried out for the following reasons:

- To allow the system to generate the same journal header every year.
- To determine the consolidation scenarios, from among those associated with a given original scenario, to be processed for the reclassification of financial investments.

Composition of consolidation data processing

Consolidation data processing is divided into basic consolidation (see "Basic consolidation data processing" on the facing page) and advanced consolidation (see "Advanced consolidation data processing" on page 119) data processing.

Account reclassification and NER execution plans

The execution plans allow you to relate a node of reclassification logics, from among those present, to a scenario/period/entity triplet. The logic can be related to an Entity or node of Entities for the chosen scenario/period.

Plug account

The plug account is used as a balancing account for the entity in the consolidation journals. It allows you to obtain a balanced BS for the entity. The general rule for the plug account is defined in the *Setup & Admin > Data Processing tile > Advanced Consolidation > Plug account rules* page (see Advanced settings). Some of the generic rule settings can then be overridden during the definition of a specific process (see "Advanced consolidation page" on page 120).

Equity pick-up

Equity pick-up (EPU) data processing is an accounting technique that allows you to revalue the value of an owner entity's financial investments based on the current value of the corresponding portion of the owned companies' net equity.

Basic consolidation data processing

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Basic Consolidation

Data processing types

Field	Description
Eliminations and IC matching	Specific elimination and IC matching logics. See "Eliminations and IC matching" below.
Load financial investments on amounts	Automatically feeds the financial investment accounts into the FS amounts based on the data present in the ownership structure register. The data processing acts on the original scenarios.
Generate contribution	Series of data processing that allows you to obtain the consolidated data based on the original data of companies included in the consolidation. See "Generate contribution" on the next page.
Merger	Operations through which two or more companies in the same group are combined into a single entity, either pre-existing the merger or created from scratch. See "Merger" on the next page.
Deconsolidation	Operations through which entities cease to contribute to the consolidation due to mergers or demergers affecting all or the majority of the entity, closures or bankruptcies. See "Deconsolidation" on page 105.
Account reclassification and N.E.R.	The purpose of account reclassification is to reclassify the values of amounts and adjustments from one account to another. The purpose of net equity reclassification (NER) is to reclassify net equity entries that must not be shown in the financial statements for the consolidated companies, in special accounts. They are performed consecutively, reclassification first and then NER. See "Account reclassification and N.E.R." on page 105.
Rules engine designer	Data processing which, based on input data, allows you to generate journals while applying rules and conditions.

Eliminations and IC matching

Field	Description
Financial investments from ownership structure register	Elimination only logics for financial investments. These are read from the ownership structure register. For example, they concern the elimination of the financial investment against the owned entity's net equity and the elimination of the financial investment's revaluation/devaluation.
by counterparty	Elimination and matching logics that take their input data from intercompany declarations. For example, these concern costs/revenue, receivables/payables, and dividends.

Generate contribution

Field	Description
Generate proportional	Generates the proportional amount type on the consolidation scenario (see Proportional calculation).
Generate converted	Calculates the converted amount type by multiplying the values of the proportional amount type by the FX rate for the consolidation currency. The proportional amount is in local currency for amounts and entity journals and in any currency for consolidation journals.
Generate consolidable and Equity evaluation	Copies data from the converted amount onto the consolidable amount type. The data is copied as is for consolidated entities using the integrated or proportional method, or by generating the equity evaluation journals for consolidated entities using the equity method (see Copy/Equity evaluation).
Minorities	Reclassifies the portion of net equity and of the year's result for minorities in specific FS entries. Specific journals are generated for amounts and entity journals; for consolidation journals, reporting is done in the context of the journal itself by generating new rows (see Minorities calculation).
Use FX rates from ownership structure register	The use FX rates on consolidation scenarios data processing generates overridden FX rates on the consolidation scenario based on the FX rates entered in the ownership structure register (see Use FX rates from ownership structure register).

Merger

Field	Description
on initial balance	If the merged entity is deconsolidated as **from initial balances**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the initial balances of the incorporated entity. The data processing precedes the original scenario data processing
from previous period	If the merged entity is deconsolidated as per **from previous period** , the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data of the incorporated entity, taking account of the previous period's entries. The data processing precedes the original scenario data processing
on entities	If the merged entity is deconsolidated as per **from current period**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data carried forward and the new entries of the incorporated entity within the processing period. The data processing acts on the contributor categories and is included in the entity data processing.
on group	If the merged entity is deconsolidated as per **from current period**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data carried forward and the new entries of the incorporated entity within the processing period. The data processing acts on the consolidator categories.

Deconsolidation

Field	Description
on initial balance	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate only initial balances**. The data processing deconsolidates both the amounts and the journals restored on those entities. Data is written off by defining the variation account identified as **outgoing area variations**. The normal account is written off, as well as the variation account.
from previous period	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate from previous period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **outgoing area variations**. The normal account is written off, as well as the variation account.
on entities	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate current period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **outgoing area variations**. The normal account is written off, as well as the variation account. The data processing acts on the contributor categories.
on group	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate current period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **outgoing area variations**. The normal account is written off, as well as the variation account. The data processing acts on the consolidator categories.
on consolidation area	Deconsolidates entities that are defined on the consolidation scenario as to be deconsolidated. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **outgoing area variations**. The normal account is written off, as well as the variation account.

Account reclassification and N.E.R.

Field	Description
on entities	By choosing the entities and periods based on the execution plan indicated on the process to be run, this creates entity journals through which to move the value from the accounts to be reclassified to the target accounts (as defined in the reclassification accounts logics). The data processing is performed on the contributor categories.
on consolidation area	By choosing the entities and periods based on the execution plan indicated on the process to be run, this creates entity journals through which to move the value from the accounts to be reclassified to the target accounts (as defined in the reclassification accounts logics).
Net equity reclassification on entities	Reclassifies, through consolidation journals, the net equity entries that should not be shown in the financial statements for the consolidated companies (e.g. **Other reserves**), in special accounts (**Undivided profits** or similar). Entities and periods are chosen based on the execution plan indicated on the process to be run. The data processing is performed on the contributor categories.
Net equity reclassification on consolidation area	Reclassifies, through consolidation journals, the net equity entries that should not be shown in the financial statements for the consolidated companies (e.g. **Other reserves**), in special accounts (**Undivided profits** or similar). Entities and periods are chosen based on the execution plan indicated on the process to be run. The data processing is run on the consolidable amount type.

Consolidation Requirements page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Consolidation >

Purpose of the page

This page allows you to set the configuration of the consolidation requirements for the selected process.

Page fields

Field	Description
Consolidation engine	Only if required by the general configuration (see General configuration). Consolidation engine to be used. It can be in memory or database.
Event Scenario	Original scenario used to define the ownership structure.
Group events	
Ownership structure register	Opens a window to define group financial investment events. See Create a F.I. event.
Mergers	Opens the mergers window containing all the scenarios/periods, even those not belonging to the selected process.
Consolidation Areas	
Status	Status for all the consolidation scenarios/periods of the process. • : unlocked • : archived • : locked

Buttons and/or links on the page

Element	Description
Group events	
Ownership structure register	Opens the **Ownership structure register** page to define group financial investment events. See Create a F.I. event.
Mergers	Opens the **Mergers** page. Displays all the scenarios/periods, even those not belonging to the selected process.
Consolidation Areas	
Define Consolidation area	Opens the **Define Consolidation area** page to define the consolidation scope of the consolidation scenarios related to the selected process.
Copy elements to consolidate	Copies the definition of the elements to be consolidated from the consolidation scenario/period to the desired consolidation scenario/period. ***Note**: the definition can also be copied from a consolidation scenario/period not belonging to the process.*
Manage status	Opens the **Manage status** window to lock/unlock consolidation scenarios/periods that have not yet been archived.

Element	Description
Change in consolidation scope	Opens the **Change consolidation scope report** window to generate a report on consolidation area changes. This report compares the consolidation criteria and entities of the two selected scenarios.
	Opens a page to define the elements to be consolidated.

Define Consolidation Area page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) Consolidation > > Define Consolidation Area

Purpose of the page

This page allows you to define the consolidation scope of the consolidation scenarios related to the selected process.

Buttons and/or links on the page

Field	Description
	Opens the **Copy Consolidation Area** window to access utilities.
Ownership structure register	Opens a page to manage the ownership structure.
	Opens the **Periods** page to configure the periods of the selected scenario when the page opens.

Attributes tab

Field	Description
Code	Unique identification code of the consolidation scenario. Mandatory field. ***Note**: if you want to create a consolidation scenario here, the generic rules for codes in CCH Tagetik are valid. See Generic activities on the pages of CCH Tagetik.*
Description	Description of the consolidation scenario
Version description	Free description of the version to which the scenario relates. Only used by reporting.
Year	Year to which the scenario relates. Only used by reporting.
Active	Indicates whether or not the scenario must be shown in the selection list of scenarios present in different windows of the system. Does not affect the locking of data.
Consolidation settings	
Original scenario	Original scenario that feeds the consolidation scenario
Holding	The holding company in the consolidation
Currency	Currency in which the consolidation must be generated. This may be different from that of the holding company. In this case, the holding company will also be subject to the conversion process.

Field	Description
References	
Previous scenario	Scenario used: • by the system, to know where it should restore from • by reporting, to compare data present in the current scenario with data in the indicated previous scenario. It must be different from the current scenario code.
Following scenario	Following scenario with which to compare the data in the selected scenario. It must be different from the scenario code.
Reference scenario 1	Scenario that can be used by reporting to specify, for example, the budget data or forecast data relating to actual data. ***Note**: an original scenario can only have original scenarios as its reference, previous or following scenario. A consolidation scenario can only have consolidation scenarios as its reference scenario.*
Reference scenario 2	
Reference scenario 3	
Reference scenario 4	
Reference scenario 5	
Exceptions	
Category filter	Filters the data categories with which to feed the consolidation scenario via a node of the categories grouping.
Account filter	Filters the data categories with which to feed the consolidation scenario via an account hierarchy node. If there is a filter account, the system only runs accounts that belong to the filter on the consolidation scenarios. This is also the case if it finds amounts defined on the original scenario. This functionality only appears in the in memory consolidation engine.
Ref. FX rate scenario	Forces the system to read the changes from an original scenario other than the one linked to the consolidation scenario being used.
Financial investments reclass. adj. prefix	Prefix for composing the journal number for journals generated by the financial investment reclassification. Insert the same prefix of the source consolidation scenario/period in order to guarantee that each year the same header is generated. For the reclassification of financial investments, CCH Tagetik only processes consolidation scenarios from among those associated with a certain original scenario with this option active. This field overrides the same setting in the consolidated scenarios table.

Relationships tab

Field	Description
Nodes	Node to which to relate the chosen scenario in a group of scenarios. Displays the nodes of scenario groupings to which the consolidation scenarios selected on the current consolidation area can be related.

Periods page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) Consolidation > ⚙ > Define Consolidation Area > ⋮ > Periods

Purpose of the page

This page allows you to configure one of the financial investment reclassification requirements.

Buttons and/or links on the page

Field	Description
⋮	**Consolidation Area Definition**: opens a page to define the consolidation area for the selected period. **Entity/classifier relationships**: opens a page to define the relationships between entities and classifiers for the selected period.

Attributes tab

Field	Description
Period	The period's unique identification code. Mandatory field. ***Note**: the generic rules for codes in CCH Tagetik are valid. See Generic activities on the pages of CCH Tagetik.*
Description	Description of the period
Validity	Period start date and end date
Period length	Period length considered for conversion at the period's average FX rate and for the consolidation and deconsolidation data processing calculation.
Locked	The scenario/period pair cannot be changed.
Archived	The scenario/period data is archived.
Filled	The data for the scenario/period is displayed in the forms produced by the reporting system.

Define consolidation area by period page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) Consolidation > ⊟ > Define Consolidation Area > ⋮ > Periods > ⋮ > Consolidation Area Definition

Purpose of the page

This page allows you to define a consolidation area, on a period, for which to specify requirements and percentages to be used in the consolidation data processing.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings.

Attributes tab

Field	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Entity	Allows you to select the entity or nodes of entities involved in consolidation.
Rules	
Consolidation method	Allows you to select the applied consolidation method. See Consolidation scenario.

Field	Description
Deconsolidation method	Allows you to select the applied deconsolidation method. See Consolidation scenario.
Include even if it isn't owned	Indicates whether the Entity must be included in the consolidation scope even if it is not owned by any Entity present in the scope. This setting is useful for management consolidation.
Period of the first Consolidation	Indicates the first consolidation period for entities that entered the consolidation scope during the year. Only for In Memory consolidation
Percentage	
Consolidation % type - Proportional	To be defined if the entity's consolidation type is "Proportional". See Consolidation scenario.
Consolidation %	Only to be set if the "Consolidation method" is "Proportional" and the "Consolidation % type - Proportional" is overridden. Must be a value between 0 and 100, inclusive.
Override Equity ratio %	Allows you to enter the equity ratio percentage manually (e.g. when the legal ownership structure is not defined).
Equity ratio %	Overridden equity ratio percentage
Equity ratio % of the period	Equity ratio percentage of the period, if the periodic minorities calculation is active

Define relationships between entities and classifiers for the period page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) Consolidation > ⚙ > Define Consolidation Area > ⋮ > Periods > ⋮ > Entity/Classifier Relationships

Purpose of the page

This page allows you to define, on a period, the relationships between entities and classifiers to be used in the financial investment reclassification data processing.

Attributes tab

Field	Description
Entity	Entity for which to run reclassification data processing
Classifier	Classifier to be considered for reclassifying the financial investment
Element	Element of the selected reclassification variable

IC Elimination and Matching Requirements page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Basic Consolidation > IC eliminations and matching >

Purpose of the page

This page allows you to customise the configuration of intercompany elimination and matching requirements.

Page fields

In **Requirements**:

Field	Description
IC elimination logics	Node of the group of IC elimination logics to be associated with the process.
IC elimination logics - Definition result	Opens a page with the elimination logics of the selected node.

In **IC cockpits**:

Field	Description
Define IC cockpits	Opens a page to define the IC cockpits.
Add IC cockpit	Allows you to relate a IC matching cockpit to the step of the process. ***Note**: only cockpits already defined by the administrator user can be related (Setup & Admin > Data Processing Tile > Basic Consolidation > IC matching and elimination logics > IC cockpits).*

Generate proportional page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate proportional >

Purpose of the page

This page allows you to override some elements of the data processing that generates proportional type data on the consolidation scenario.

Page fields

Field	Description
Periodic calculation	If enabled, the system calculates the progressive proportional figure for the current period as the sum of the following figures: • the progressive proportional figure from the previous period and • the periodic original figure multiplied by the period proportional percentage. To identify the previous period the system considers the period length set on the period of the consolidation scenario. It is used to manage the proportional percentage change compared with the previous period and the entities that entered the consolidation area during the year.
Counterparty account for BS and P&L result alignment	The difference between the proportional P&L profit account calculated on a periodic basis and the proportional Balance Sheet profit account, calculated on a progressive basis, is allocated to the reserve account defined herein. The percentage variation account defined in the variation control group is also adjusted at the same time.

Generate converted page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted >

Purpose of the page

This page allows you to override the conversion data processing in the modes and accounts that you are using.

Page fields

In **Generic rules**:

Field	Description
Conversion at historical FX rate	Tells the system if any FS entries, typically the net equity accounts, must be converted with the historical FX rate method.
P&L conversion method for the Consolidation	Strategy for currency conversion in the context of contribution data processing.
FX rate difference accounts	Allows you to override accounts that the conversion data processing must use to allocate the FX rate difference, namely the FX rate difference accounts (Credit/Debit) and the Intercompany FX rate difference accounts (Credit/Debit) for the balance sheet and P&L. See "FX rate difference accounts" on the facing page.
Advanced	Allows you to manage FX rates in particular cases. See "Advanced" on the facing page.

In **Specific rules**:

Field	Description
Customize account conversion type	Opens a page to specify for each individual account the conversion type and the reference account, if the conversion type so requires. See "Customise account conversion type page" on the next page.

For more details, see Conversion rules.

FX rate difference accounts

Field	Description
Override FX rate difference accounts	Opens a page to override the credit and debit FX rate difference account for each individual account. See "Override FX rate difference accounts page" below.

Advanced

Field	Description
Overridden Var. - Det. type for the FX rate difference on the year's net result	To highlight the FX rate effect deriving from the previous year's profit, an ad-hoc variation can be specified, on which the system will allocate the FX rate difference. The same account defined for the balance sheet FX rate difference will be used, but on a different variation/detail type.
FX rates loading mode	Tells the *Use FX rates from group structure* data processing the entities on which it must download the FX rates entered in the ownership structure register • Amounts and Entity journals • Financial investments elimination journal/Net equity • Amounts, Entity journals and Financial investments elimination/Net equity
Alternative FX rates to Initial balance FX rate when the Initial balance variation is missing	For variations to be converted at the FX rate of the initial balance, the system calculates the rate to be applied by calculating the ratio of the converted amounts to proportional amounts of the initial balance variation. If there is no variation, it is necessary to specify the alternative conversion strategy, which may consist of using the Previous final FX rate or the Previous average FX rate.
Anticipate Intercompany FX rate difference on Original Scenario	
Calculate	Anticipates the calculation of the IC FX rate differences on the original scenario to allow the minorities calculation to take place. ***Note**: this option only applies to processes that use the standard consolidation engine (Databases). The In Memory consolidation engine does not need these settings since the conversion precedes the minorities calculation.*
Reverse journal type	Defines the behaviour for the elimination journals for the anticipation of IC FX rate differences. • **As IC elimination logic**: the standard IC elimination logics are followed. • **Set BS and Variations accounts to 0 and Write off P&L impact (IC)**: the variations will also be set to 0.

Override FX rate difference accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted > ✎ > Override FX rate difference accounts

Purpose of the page

This page allows you to override, for every desired account, the accounts that the conversion data processing should use to allocate any FX rate difference.

Attributes tab

Field	Description
Action	Allows you to include or exclude the account selected by conversion operations.
FX rate difference type	FX rate difference type to which to apply the override
Account	Account for which to override the FX rate difference account
Category	Category for which to override the FX rate difference account
IC elimination logic	IC elimination logic for which to override the FX rate difference account
FX rate difference account: debit	Account on which to write the FX rate difference as a debit amount
FX rate difference account: credit	Account on which to write the FX rate difference as a credit amount

Customise account conversion type page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted > ✎ > Customise account conversion type

Purpose of the page

This page allows you to customise the conversion type and, if the conversion type requires, the reference account, for every desired account.

Attributes tab

Field	Description
Account	Account on which to override the conversion
Conversion	FX rate type to apply to the account
Reference account for Initial balance/Year-to-date average FX rate	Only with **Initial balance FX rates** or **Year-to-date average FX rate** selected. Account used to define the conversion coefficient.

Generate consolidable and Equity evaluation page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate consolidable and Equity evaluation > ✎

Purpose of the page

This page allows you to customise data processing that generates the consolidable amount. The procedure for defining the consolidable amount type works in two different ways, depending on the type of consolidation of the entities involved:

- If the entities involved are consolidated on a line-by-line or proportional basis, then the data is simply copied from the converted amount type to the consolidable amount type (disregarding the carry forward).
- If the entities involved (or even just one of them, in case of consolidation journals) are consolidated based on equity, then the converted amount type data is subject to the equity evaluation process.

Moreover, CCH Tagetik also defines the category and the consolidation journals. The category must be subject to equity evaluation, or defined in the equity evaluation rules. For consolidation journals, the equity evaluation mode must not be “None” and the “Many to many relationship” option must not be selected. Thus, journals that adjust entities other than those indicated in the header will not be subject to equity evaluation.

Page fields

Field	Description
Accounts and categories	
Net equity Accounts	Normal accounts and details that the system takes into consideration for calculating the value of the portion of the Owned entity’s net equity. The contra-entry to the variation of these accounts is allocated on the financial investment account.
Categories to evaluate with equity method	Relationships between the Net Equity variation accounts and the Variation/Detail types of the financial investment account that the system will feed as the contra-entry.
Revaluation/Devaluation accounts	
Loss account for consolidated Entity at equity	Account used as the contra-entry to the losses that make up the P&L result
Profit account for consolidated Entity at equity	Account used as the contra-entry to the profits that make up the P&L result
Generic Financial investments account	Account used by the system in the event that it cannot return to the account to be used through the (intercompany) financial statements and entity journals
Advanced	
Entity on which to generate the Equity evaluation journals	Establishes the entity for which the equity evaluation journals are entered: owner entity, entity at equity or whether they are divided between the two of them (Financial investment on owner entity, net equity and P&L result on Entity at equity)
Listed Entity ownership restriction %	Percentage ownership indicating whether or not the listed entity should be calculated at equity when the “calculated” consolidation method is being used
Unlisted Entity ownership restriction %	Percentage ownership indicating whether or not the unlisted entity should be calculated at equity when the “calculated” consolidation method is being used
Sum up *DEST2* in equity evaluation journals	For Entity/DEST2 or synthetic Entity/DEST2 process report types, this determines the custom dimension 2 on which the equity evaluation journals will be entered. • If enabled, the DEST2 code present in the **Equity Owner Entities** window will be taken into consideration in the definition of the elements to be consolidated. • If disabled, the default DEST2 code of the entity will be taken into consideration.

Field	Description
Goodwill	It is possible to retain the effect of goodwill in a specific financial investment account when the system evaluates the financial investment/net elimination journal using the equity method. The following accounts should be indicated: • Financial investment accounts dedicated to goodwill on which the goodwill effect is reclassified. • Normal, detail and variation accounts used for goodwill.
P&L accounts to keep	P&L accounts to keep in the consolidation journals in the equity evaluation step in order to keep some P&L effects on the original account (e.g. capital gains)
Financial investments accounts to exclude	Normal financial investment accounts, with the field **Use Account for setup** set to **Financial investment**, to be excluded from equity evaluation.

For further details, see Copy/Equity evalutation.

Minorities page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Minorities >

Purpose of the page

This page allows you to customise the data processing for the minority interests calculation

Page fields

In **Generic rules**:

Field	Description
Accounts	Opens a page to change the accounts adjusted by the minorities calculation for the direct and indirect minorities portion.
Categories	Opens a page to change the amount and entity journal categories on which minorities should be calculated and the corresponding category on which the minorities journal must be generated.
Periodic minorities	
Periodic minorities calculation	Allows you to customise the variation/detail types to be used to allocate the amount of the % change in minorities for the result shown on the balance sheet.
Area variation - Entrance	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the change in the consolidation area due to the entry of new entities.
Area variation - Exit	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the change in the consolidation area due to entities leaving the group.
Modify % - Increase	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the increase in percentage ownership of a controlled entity.
Modify % - Decrease	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the decrease in percentage ownership of a controlled entity.

In **Specific rules**:

Field	Description
Setup Periodic minorities calculation	Only with **Periodic minorities calculation** selected. Opens a page to override, for each scenario/period of the process, the **Reference date for periodic minorities calculation** and establish which ownership structure events to include and exclude.

For further details, see Minorities calculation.

Mergers page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Mergers >

Purpose of the page

This page allows you to customise the data processing for mergers between two entities in the group. See "Merger" on page 104.

Page fields

Field	Description
Categories to exclude	Category to be excluded from merger data processing categories

Account reclassification and NER Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Accounts reclassification and NER >

Purpose of the page

This page allows you to relate a node of account reclassification/net equity reclassification (NER) logics to a scenario/period/entity triplet.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings for the process.

Attributes tab

Field	Description
Action	Allows you to include or exclude the node of selected rules for the selected scenario/period/entity triplet.
Scenario	Allows you to select the original or consolidation scenario (depending on the tab) from among those associated with the process. If not selected, all of the process scenarios are included.
Period	Allows you to select the periods associated with the chosen scenario. If not selected, all periods are included.
Entity	Allows you to select the entity, or node of entities, from among those present in the consolidation area.
Consolidation method	Only for consolidation scenarios. Allows you to select the consolidation method for the entities to be included. This can be used as an alternative to selecting the entity individually.
Reclassification logics/NER node	Allows you to select the desired account reclassification or NER logics from among those present.

Rules Engine Designer requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Rules Engine Designer >

Purpose of the page

This page allows you to customise the execution plan or relate a node of reclassification logics, from among those present, to a scenario/period/entity triplet. The logic can be related to an Entity or node of Entities for the chosen scenario/period. See Rules Engine Designer.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings for the process.

Attributes tab

Field	Description
Action	Allows you to include or exclude the selected scenario/period/entity triplet.
Scenario	Allows you to select the original or consolidation scenario, depending on the tab, from among those associated with the process. If not selected, all of the process scenarios are included.
Period	Allows you to select the period from among those of the selected scenario. If not selected, all periods are included.
Entity	Allows you to select the entity from among those present within the consolidation area.
Consolidation method	Allows you to select the entities to be included using the consolidation method.
Rules Engine Designer node*	Allows you to select a node of Rules Engine Designer rules.

Advanced consolidation data processing

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation >

Data processing types

Field	Description
Amortisation/Depreciation	Manages the cost of a multi-year asset by distributing it among the years of the same asset's useful life. See "Amortisation/Depreciation" below.
Financial investment reclassification	Reclassifies financial investment accounts according to the owned entity's consolidation type on the various consolidation scenarios. See "Financial investment reclassification" on the next page.
Equity pick-up	Revalues the value of an owner entity's financial investments based on a current value of the corresponding portion of the owned companies' net equity. See "Equity pick-up" on the next page.
IC spreading	Specifies the node of the grouping of IC elimination logics that includes the logics to be processed. Allows you to run data processing for IC spreading, which writes off the existing IC declarations and reallocates the amounts to CTP custom dimension 2 based on the declarations made by the counterparty, maintaining the original unbalanced amounts. This information is only visible if, the declaring entity/counterparty relationships ("Relationship Type") are set to "By entity - custom dimension 2" or "By entity - synthetic custom dimension 2" in the data entry rules for journals or overridden on the process. For details of how to set data entry rules, see Journal Rules and Settings. For details of how to override these rules, see "Journal rules and settings page" on page 72.
IFRS5	This is an accounting standard which sets out accounting practices for assets held for sale, how to report discontinued operations in the financial statements, and related supplementary information. For details, see International Financial Reporting Standard 5.
Intercompany Asset Assignment	This automatically generates consolidation journals that must be made in the event that an asset is transferred within the group, eliminating the capital gain/capital loss recorded by the selling company and adjusting the acquiring company's depreciation journals in order to reconstruct the historical cost and depreciation fund of the asset within the group (return to group historical cost method). ***Note**: this operation has no effect on consolidation (see Intragroup assets assignment).*

Amortisation/Depreciation

Field	Description
on entities	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the contributor categories.
on group	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the consolidator categories.

Financial investment reclassification

Field	Description
on entities	The purpose of financial investment reclassification data processing is to reclassify FS data on the various financial investment accounts according to the consolidation type of the owned entity. The FS amount is reclassified by means of entity journals. An entity journal is created for every consolidation scenario in which the entity is present.
on group	Financial investment reclassification data processing also has the purpose of reclassifying the financial investment accounts on the relative eliminations depending on the consolidation type of the owned entity on the various consolidation scenarios. In every consolidation scenario to be fed, the system copies the adjusted elimination journal, filtering it based on the classifier indicated in the Account classifier code. ***Note**: the rule used for the deconsolidation of the current process is the general rule defined by the Data Processing > Advanced Consolidation > F.I. Reclassification tile.*

Equity pick-up

Field	Description
on entities	Generates adjustments by entity to adjust the carrying value of the financial investments on a pro-rata basis in relation to the net equity of the owned entities. The journal relates to the owner entity.
on consolidation area	Uses the same logics and setup as the original scenario data processing. However, the calculation input data are the data converted into the consolidation currency and not the original data. Entries are therefore generated on the Consolidable amount type within the entity journal generated on the original scenario.
Look through on entities	The look through data processing is run on original scenarios at the end of the pick-up data processing, if **Fair value and look through** has been selected in the pick-up rules.
Look through on consolidation area	Data processing similar to the pick-up/fair value data processing of the original scenario that acts on the consolidation journals.

Advanced consolidation page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > ✎

Purpose of the page

This page allows you to customise the advanced consolidation data processing by modifying the rules related to plug accounts (see "Plug account" on page 102).

Page fields

Field	Description
Liaison account categories	Opens a page to customise the general rule of the plug accounts for the current process.

Financial investments reclassification page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Financial investments reclassification

Purpose of the page

This page allows you to customise, for the specific process being set up, some settings of the generic rules for financial investment reclassification.

The purpose of the financial investment reclassification rule is to reclassify financial investment accounts on the FS data and on the relative eliminations, depending on the consolidation type of the owned entity in the various consolidation scenarios. To identify the correct consolidation scenario, it uses the prefix for financial investment reclassification journals related to the scenario in the **Exceptions** section of the consolidation area definition.

Page fields

Field	Description
Accounts	Opens the **Account** page to select the accounts to be used to reclassify financial investments.
Categories	Opens the **Categories** page to relate the categories used in the journals with the financial investment reclassification categories.
Account classifier code	Allows you to specify the account classifier to be used to identify the consolidated scenarios on which the reclassification should be reported. The system obtains the classifier to be applied on the basis of the scenario/period/entity/classifier relationships created on the consolidation area in the consolidation area definition.

Equity pick-up Requirements page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up >

Purpose of the page

This page allows you to customise the Equity pick-up requirements for the selected process.

Attributes tab

Field	Description
Scenario	Scenario of the selected process.
Period	Period of the selected process.
Start date	Start date of the periodic equity pick-up calculation.
End date	End date of the periodic equity pick-up calculation.
Period length	The period length defined on the consolidation scenario/period selected in the periods table. **1** indicates a monthly duration, **12** indicates an annual duration, etc.

Field	Description
Pick-up period length	This field defines whether the equity pick-up will be calculated for each selected scenario/period on a progressive or periodic basis. To calculate the equity pick-up using the progressive method, only define this field and set the **Pick-up account period length** to 0. Then enter the code of the period from which to start in this field. This defines the desired period length. In fact, the figure is calculated taking account of the progressive data up until the selected period. To calculate the equity pick-up using the periodic method, enter the number of periods between the selected period and the previous period in which the equity pick-up was run. *E.g. if the scenario is divided into 12 months and the period is set to 4, the process starts to calculate the equity pick-up from the fourth month (April), every four months.*
Pick-up account period length	Period of the consolidation process in which the accounts are updated in the accounting, including the pick-up effects. 0 = calculates the equity pick-up on a progressive basis. If defined, this calculates the equity pick-up on a periodic basis, according to the selected period. The system will copy onto this period, adding the journals of the last period in which the equity pick-up was calculated to the values present.
Override Pick-up percentages	Opens a page to override the pick-up percentages (direct and indirect ownership percentages used by the pick-up) for the selected scenario/period.
Percentages pick-up	Opens a page showing the pick-up percentages of the selected scenario/period.

Pick-up percentages page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ⚙ > Percentages pick-up

Purpose of the page

This page summarises the details of every entity subject to pick-up.

Page fields

Field	Description
Entity A	Entity subject to pick-up
Entity B	Entity that is owned by Entity A and directly or indirectly owns Entity C
Entity C	Entity that owns Entity D
Entity D	Entity directly and indirectly owned
Deployed percentage 2	Percentage obtained without considering overridden percentages. This is not used in equity pick-up calculations.
Percentage 2 for result	Percentage calculated taking account of any manual overrides. This is used in equity pick-up calculations.
Override Pick-up percentages	Overrides on percentages entered manually. Used in equity pick-up calculations.

Override Pick-up percentages page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ⚙ > Override percentages pick-up

Purpose of the page

This page allows you to run overrides on the percentages used in equity pick-up calculations.

Page fields

Field	Description
Entity A	Entity subject to pick-up
Entity B	Entity that is owned by Entity A and directly or indirectly owns Entity C
Entity C	Entity that owns Entity D
Entity D	Entity directly or indirectly owned by Entity C
Account	Account affected by the pick-up calculation
Percentage	Overridden percentage applied to pick-up calculation

Pick-up rules page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ✎

Purpose of the page

This page allows you to override the generic pick-up rules for the selected process (see Equity Pick-Up).

Page fields

Field	Description
Accounts	Financial investment and net equity accounts used in the equity pick-up calculation.
Categories	Category from which to read the amounts to be processed and the category on which to generate the equity pick-up journals. The third field contains the category for accounting pick-up journals simulation.
Use Financial investments FS	If active, for each relationship, the system uses the financial investment account indicated in the financial statements, not the one indicated in the pick-up rules.
Generate detailed information for the pick up query	Provides useful information for understanding how the equity pick-up journal was generated. The data processing of this information makes the equity pick-up data processing slower.
Fair value and look-through	Runs the look-through data processing on original scenarios at the end of the pick-up data processing.

Field	Description
Cumulated fair value and look-through	Runs the look-through data processing on original scenarios a the end of the pick-up data processing by calculating the values on a progressive basis, i.e. the amount of the generated journal rows is the progressive value as at the period to be processed, without reading data from previous scenarios/periods (not even the carry forward).
Classifier for methods	Classifier used to distinguish “investment vehicle” companies
Classifier for equivalent	Classifier used to distinguish “equivalent” companies
Classifier for sectoral	Classifier used to distinguish “sectoral” companies
Element: classifier for methods	Classifier element for selecting “investment vehicle” companies
Elements: classifier for equivalent	Classifier element for selecting “equivalent” companies
Elements: classifier for sectoral	Classifier element for selecting “sectoral” companies
Account filter to exclude from the look-through	Filter for excluding accounts or account nodes from the look-through results

IC Spreading Requirements page

Admin

Operational database > Processes > select process > > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IC spreading >

Purpose of the page

This page allows you to customise the intercompany spreading requirements for the selected process.

Only intercompany elimination logics (*Data Processing > Basic Consolidation > IC matching and elimination logics > List*) that have the **IC spreading logic** field active are visible in the list. For more details, see IC matching and elimination logics.

Page fields

Field	Description
IC elimination logics	Allows you to change the node of the grouping of IC elimination logics to be applied to the scenarios/periods of the process when the IC Spreading data processing is run.

Override IFRS5 rules page

Admin

Operational database > Processes > select process > > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IFRS5 >

Purpose of the page

This page allows you to run overrides on IFRS5 rules.

Page fields

Field	Description
Accounts	Opens the **Account** page to select the accounts from which to read and on which to write the data to be reclassified. ***Note**: the user can choose whether or not the reclassification will act on the details of the accounts involved, for both the source accounts and the reclassified accounts.*
Categories	
Categories node to reclassify	Node of categories from which to read the data to be reclassified.
Category for IFRS 5 reclassification journals	Category on which to generate the reclassification journal

Consolidation procedures

Enable consolidation data processing

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

1. To unlock the settings, click **Locked**.
2. Select **Consolidation** and the desired fields.
3. Click **Save**.

Generate a report on consolidation area variations

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation >

1. Click **Change in consolidation scope**.
2. In **Consolidation scenario/period**, enter the desired consolidation scenario/period.
3. Select the scenario or scenario/period with which you want to compare and the view mode.
4. Click **Run**: the requested report will be generated and downloaded in Excel format.

Configure the entities of a consolidation area

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Consolidation >

In **Consolidation area**, on the desired consolidation area row, click : the **Define element to consolidate** window will appear.

Set Equity pick-up requirements

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up

1. Select the desired scenario/period.
2. In **Period length** enter the chosen value and then do the following:

If you are using this method...	Then...
progressive	In **Pick-up period length**, enter the value equal to the number of the selected period.
periodic	1. In **Pick-up period length**, enter the period length, i.e. the number of periods between the period from which data processing should start and the last period in which the equity pick-up was calculated. 2. In **Pick-up account period length**, enter a value equal to the selected period.

3. To view the pick-up percentages of the selected scenario/period, click **Percentages pick-up**.
4. To override the pick-up percentages, click **Override percentages pick-up**.
5. Click **Save**.

Data Processing: allocation and closing

Contents

This section covers the following topics:

Allocations and Closing Requirements page 127
Allocations & Closing rules page 129

Allocations and Closing Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Purpose of the page

This page allows you to define an execution plan to relate a routine to the scenario/period/entity dimensions. See Allocation and closing rules.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings.

Attributes tab

Field	Description
Action	Allows you to include or exclude the scenario/period/entity when running the selected jobs/routines.
Original scenarios/periods	Allows you to indicate original scenarios/periods on which to run the data processing, from among those associated with the process. This is the scenario on which the data will be processed. • **Selected**: allows you to select the desired original scenarios/periods. • **All**: includes all original scenarios/periods associated with the process.

Field	Description
Entity	Code and description of the desired entity/node from among the available non-time-dependant entity hierarchies.
Job or Routine	Allows you to select the routine from among those defined in *Data Processing* > *Allocations & Closing* > *Routine*, or a job that groups several routines together.
Period length	Period length that the system uses for periodic-type data processing rules
Advanced setup	Only with **Jobs** selected. Allows you to set period length and configuration scenarios for individual routines.
Reference scenario for driver	
Selection	Scenario from which the system takes the allocation driver on which basis to perform the allocation. • **Fixed**: the scenario for the allocation driver is established on configuration; in this case the scenario must be specified. • **Parametric**: a scenario that can be navigated by the allocation driver will be used.
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Allows you to calculate the desired navigable scenario. See "Navigable scenario options" on the facing page.
Target Scenario	
Selection	Used for “Target Matching” routines. This is the scenario from which the system reads data to be written on the scenario to be processed • **Fixed**: target scenario • **Parametric**: navigable target scenario
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" on the facing page.
Scenario for "ratio %" calculation	
Selection	Reference scenario for calculating the ratio percentage values for data processing for calculated target matching. This is the scenario on which the percentage is calculated and on which the system reads data to be written on the scenario to be processed for calculated target matching. • **Fixed**: scenario for the ratio % calculation • **Parametric**: scenario for the navigable ratio % calculation
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" on the facing page.
Actual scenario for fast closing	
Selection	Scenario on which the system reads data to be written on the scenario to be processed for “Target Matching” with fast closing. • **Fixed**: scenario for the fast closing calculation • **Parametric**: navigable scenario for the fast closing calculation
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" on the facing page.

Navigable scenario options

Option	Description
PREV	The reference scenario for the driver is the one prior to the processed scenario.
NEXT	The reference scenario for the driver is the one after the processed scenario.
REF1...REF5	The reference scenario for the driver is reference scenario 1...5 related to the processed scenario.

Allocations & Closing rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Purpose of the page

This page allows you to customise Allocation and Closing data processing for the selected process.

Page fields

Field	Description
Traceability	
Keep source	Level of detail to be stored in the journals generated by the system. • **Detail**: tracks and shows all steps taken to generate the allocated data, including the chain of all the latest sources. ***Note**: if selected, it may slow the data processing and generate a trail that is too long for the field.* • **Last source**: only tracks and shows the last step taken to generate the allocated data. Example: rule 001 requires cost centre C01 to be allocated to cost centres C02 and C03, and C02 to be allocated to cost centre C04. In this case, for the allocated data C04, the last data that generated it is shown, i.e. C02. • **Disable**: does not track the steps taken to generate the data. • **From rule**: shows all allocation steps that generated the result, except for rules excluded from execution, e.g. excluded routines. ***Note**: if selected, it may slow the data processing and generate a trail that is too long for the field.*
Store partial result	Stores the data processing history with details of the individual elements involved (e.g. collection of data to be allocated or imposed, drivers).
Performance	
Manage thousandths	Generates the allocations in the presence of very small amounts that would otherwise be disregarded. ***Note**: if selected, it may slow data processing performance.*
Bundling	If the routine is run on the entire scenario, then the system runs it once instead of as many times as there are periods related to the scenario.

Data Processing: Cash Flow Planning

Contents

This section covers the following topics:

Cash Flow Planning 130
Cash Flow Planning Requirements page 131
Cash Flow Planning Rules page 132
Copy actual data page 133
Dimensions/Financial Rules Mapping page (Create derived events and entries) 134
Cash management rules page (Financial simulation) 135

Cash Flow Planning

Data processing types

The Cash Flow Planning data processing is as follows:

- Copy actual data
- Create financing, assets and FX hedging events
- Create objects, derived events and entries
- Indirect taxes and cash pooling
- Indirect taxes calculation
- Dividends calculation
- Tax balance payment
- Tax down payment
- Financial simulation
- Revaluation and Devaluation
- Direct taxes calculation

For more details on Cash Flow Planning, see Cash Flow Planning.

Cash Flow Planning: entry registration

Entries are registered only in the months between the estimate start date and the estimate end date. However, the estimate start date may not coincide with the calculation start date. This happens when the calculation needs to start before the simulation period.

Examples of early calculation

Example 1

Simulation calculation starts from the December before the simulation start date. This allows you to automatically obtain the effects of the initial balance sheet amounts by calculating the collection and payment methods associated with the items pertaining to **December year x-1** but which have financial manifestation in the months of the simulation.

Example 2

Forecast with simulation start date in April and calculation start date in January. For postponed semi-annual invoicing, the system begins to calculate the amounts to be aggregated in January and disposes of the accrual for the first six months of the year in June. This means you do not have to wait for the accounting of the first six months of simulation and can register the entry in October.

Asset depreciation on actual and balance

In general, to calculate depreciation, the budget data processing only considers purchase events contained in the simulation range. However, the system can be told to also include purchase events with (purchase) date prior to the simulation in that calculation. This is particularly useful when copying data between processes, since this transfers the purchase event by date. In fact, in this case, after the transfer to different periods, the purchase events may fall outside the simulation interval and the system may not calculate the relative depreciation.

Calculate Financial policy for counterparty entity

In general, during the financial policy calculation, the budget data processing does not consider the individual amounts of the counterparty entities. Regardless of those values, if the amount on the main section is greater than zero, it is moved to the active section, and if it is less, to the passive section. However, the system can be told to also consider amounts of counterparty entities during the calculation, in sorting from one section to another.

However Financial policy by counterparty entity is incompatible with *cash pooling*. In fact, in cases of cash pooling, when the system performs the Section shifts and generates interest, it always defines the counterparty entity as the parent entity. Therefore, when calculating the financial policy by counterparty, the system checks that none of the sections involved in the sorting has the **Cash Pooling** option selected. Otherwise, it will return a blocking error.

Cash Flow Planning Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Purpose of the page

This page allows you to configure Cash Flow Planning data processing for the process.

Attributes tab

Field	Description
Step	Step of the Business Workflows model associated with the selected process to which Cash Flow Planning data processing is to be related.
Event scenario	Original scenario used for storing events to date. This can be selected from among the process scenarios, but it is typically a scenario created and reserved for this purpose.
Simulation timeframe	
Start date	Simulation start date

Field	Description
End date	Simulation end date
Calculation start date	Calculation start date according to defined planning rules
Net result calculation	Calculates the result accounts during Cash Flow Planning data processing.
Carry forward of Initial actual balance sheet	Calculates the carry forwards of the initial balance sheet scenario.
Execution plan	Opens a page to define execution plans.

Cash Flow Planning Rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Purpose of the page

This page allows you to customise Cash Flow Planning data processing for the selected process.

Page fields

Field	Description
Categories	
Source / Target	Category used to do the following: • Filter data when reading initial balance sheets and projected P&Ls. • Write the Forecast BS and the integrations to the P&L account (automatic calculation of depreciation, medium-/long-term financial expenses and income and with the management of taxation).
Alternative target category	Category used for sub-entities involved in the financial planning process, in such a way that keeps the data generated on the sub-entities separate from the data generated on the entities.
Target category for direct cash flow	Category for cash flows on which the direct cash flow is based
Alternative target category for direct cash flow	Category on which to generate alternative cash flows ***Note**: the category appears if the alternative category has been set in the process rules for sections with the **Cash Flow** option selected.*
Asset depreciation on actual and balance	Allows the depreciation data processing to also process purchase events with purchase date prior to the simulation and generate depreciation for the estimate periods.
Calculate cash management for counterparty entity	Allows the budget data processing to also consider amounts of counterparty entities during the calculation, in sorting to the active section or the passive section.
Input origins setting	Opens the window for managing the input origins to be included for the projected P&L, projected flows and initial balance sheet.
Accounts	
Revaluation account for FX rate difference	Account in which to enter the revaluation generated by the FX rate difference in the conversion accounts, defined with a different currency from that used for the preparation of the financial statements

Field	Description
Devaluation account for FX rate difference	Account in which to enter the depreciation generated by the FX rate difference in the conversion accounts, defined with a different currency from that used for the preparation of the financial statements
Forecast: variation for carry forward	For forecast processes and standard balance sheet accounts, the system uses the variation account with the detail type, if defined here, to carry forward the initial balance sheet value, as defined in the last actual period, to all estimate periods of the first year. If it is not specified, the system carries forward the value on the variation account with the higher code and not the initial amount type code.
Additional dimensions in financial rules	
Custom dimensions 1-5	Indicates the dimensions that the user wants to be managed in the relating of dimensions to financial rules.
CTP entity	Indicates whether you want to manage the counterparty entity in the relationship of dimensions to the financial rules.
CTP Cust. Dim. 2	Indicates whether you want to manage the custom dimension 2 counterparty in the relationship of dimensions to the financial rules.
Currency	Indicates whether you want to manage currency in the relationship of dimensions to the financial rules.

Copy actual data page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning > Copy actual data >

Purpose of the page

This page allows you to change the requirements for running the copy of the actual initial balance sheet and P&L based on the scenarios indicated for the selected process.

Page fields

Field	Description
Category	Source amount category, or entity journal type, or category group node from which to copy data.
Source beginning balance sheet scenario	Original scenario used to copy the actual data from the initial balance sheet
Previous actual scenario (P&L)	Original scenario used to copy the actual P&L account data previous scenario at the start of the calculation
Forecast scenario: actual periods (P&L)	Original scenario used to copy P&L data from the calculation start scenario

Dimensions/Financial Rules Mapping page (Create derived events and entries)

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning > Create derived events and entries >

Purpose of the page

This page allows you to change the relationships between dimensions and financial rules that generate derived events and double entries for the selected process. For more details on data processing that generates derived events and entries, see Esecuzione elaborazione Cash flow planning.

Attributes tab data

Element	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Dimensions	
<dimension>	Allows you to select an element or node within the individual dimensions.
Financial Rules	
Accounting model	Changes the accounting model according to which the curve should be generated for the selected row.
Event rule	Changes the rule for generating events present in the accounting model associated with the row.
Credit terms	Changes the credit terms associated with the row.
Indirect Tax Policy	Changes the indirect tax policy associated with the row.
Indirect Tax rate	Changes the percentage to be applied to the amount for the indirect tax calculation.
Other Indirect tax policy	Changes any other indirect tax policies.
Other Indirect Tax rate	Changes any other indirect tax rates.
Advanced	
Payment Calendar	Changes the calendar that sets the dates on which to run collections or payment in the event that credit terms have been established.
Weight	Changes the weighting to be associated with the row to weight the values.
Non-deductible %	Changes the non-deductible percentage, if applicable to the indirect tax.

Cash management rules page (Financial simulation)

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning > Financial simulation > ✎

Purpose of the page

This page allows you to change the cash management rules to run financial simulations. For more details on financial simulations, see Elaborazione CFP - Simulazione finanziaria.

Buttons and/or links on the page

Field	Description
⋮	• **Lines of Credit/Deposits**: opens a page to change FST items and lines of credit. For details, see Linee di deposito e affidamenti. • **Shift between lines of credit/deposits**: opens a page to change the rules for shifting amounts between the various lines and the execution order, see Spostamento tra linee di deposito / affidamenti.
Entities/Cash management rules mapping	Opens a page to change the relationships between the entities and the cash management rules, see Abbinamento azienda / regola di cash management.

Data Processing: taxes

Contents

This section covers the following topics:

Data Processing related to taxes 137
Tax rules page 138
Taxes setup page 138
Deferred and prepaid taxes - Input accounts page 141
Direct taxes - Input accounts page 141
Deferred and prepaid taxes - Override output accounts page 142
Direct taxes requirements page 143

Data Processing related to taxes

Data processing types

Data processing related to taxes is divided based on the type of tax.

- Data processing on deferred and prepaid taxes: their impact is reported when there are temporary differences, due to entity and consolidation adjustments, between the values of the assets and liabilities shown in the annual financial statements and the values for tax purposes of consolidated entities. The affected accounts are those indicated in the tax rules. The deferred taxes calculation applies to the original scenario and can be run on entities or on the group. In calculations run on entities, the data processing is run on the contributor entities and categories, i.e. the amount type categories and entity journals. In calculations run on the group, however, the data processing is run on the consolidator categories and the consolidation journals are involved.
- Data processing related to direct taxes: this calculates the taxes for the year and only applies to amounts.

Monthly splitting rule for taxes for the year

A tax can be split monthly based on the statutory result or a weight. In the former case, the tax for the year is allocated to periods based on the statutory result for the period. In the latter case, however, it is allocated on the basis of the coefficient attributed to the monthly splitting of the tax (*Setup & Admin > Data processing > Cash flow planning > Advanced Financial Rules > Weight*). For more details, see Tipi Pesi e Pesi.

Tax rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎

Purpose of the page

This page allows you to customise tax-related data processing for the selected process.

Page fields

Field	Description
Taxes setup	Opens a page to override the output accounts that the system will use for taxes.
Deferred and prepaid taxes - Input accounts	Opens a page to define the input accounts that the system will use to calculate deferred and prepaid taxes and establish the percentage of the value of those accounts that should be considered.
Direct taxes - Input accounts	Opens a page to define the input accounts that the system will use to calculate direct taxes.
Deferred and prepaid taxes - Override output accounts	Opens a page to override what is defined in the **Deferred and prepaid taxes** tab on the **Taxes setup** page, for each individual output account.

Taxes setup page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Taxes setup

Purpose of the page

This page allows you to override the output accounts that the system will use for taxes.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured in the system
Set	Tax from among those configured in the system

Deferred and prepaid taxes tab

Field	Description
Deferred Taxes P&L	
Annual impact account - debit	P&L account on which the system registers the annual impact as a debit or credit amount
Annual impact account - credit	

Field	Description
% variance account - debit	P&L account on which the impact of the adjustment to the tax fund/credits for prepaid taxes, resulting from the change in the rate compared with the previous year, is registered as a debit or credit amount.
% variance account - credit	
Debits for deferred taxes	
Normal account	Balance sheet account on which the payable for deferred tax is registered
Variation annual impact - debit	Variation account of the Deferred taxes fund account, in debit or credit, on which the tax adjustment due to the impact of the year's taxes is registered. This typically coincides with a variation account of the Deferred taxes fund. To keep track of both the impact of the year and the impact of the fund adjustment due to the FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation annual impact - credit	
Variation % variance - debit	Variation account of the Deferred taxes fund account, in debit or credit, on which the tax adjustment due to the change in rate compared with the previous year is registered.
Variation % variance - credit	
Credits for prepaid taxes	
Normal account	Normal balance sheet account on which the amount receivable for tax is registered. This account may coincide with the Deferred taxes fund if no distinction needs to be made between receivables and payables.
Variation annual impact - debit	Variation account of the Credits for Prepaid taxes account, in debit or credit, on which the tax adjustment due to the impact of the year's taxes is registered. This typically coincides with a variation account of the Credits for Prepaid taxes. To keep track of both the impact of the year and the impact of the fund adjustment due to the FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation annual impact - credit	
Variation % variance - debit	Variation account, in debit or credit, of the Credits for prepaid taxes account on which the tax adjustment due to the change in rate compared with the previous year is registered.
Variation % variance - credit	

Direct Taxes tab

Field	Description
Direct taxes	
Taxes	P&L account on which the taxes are booked
Accrual - credit variation	Variation balance sheet account on which the accruals for the tax that has already accrued but has not yet been recognised are booked.
Tax loss	P&L account from which to read the negative result for the year. This may correspond to the P&L account used to book the net result for the year.
Tax loss spreading: No. of years	Specifies the number of years for which the tax loss for a specific tax period can be deducted from the taxable income in subsequent years. If set to zero, there is no spreading.
Direct taxes monthly splitting rule	Monthly splitting rule to be applied to the taxes for the year.
Accounting	

Field	Description
Accrual - debit variation	Variation balance sheet account of monthly accruals write off for the tax accounting at year end
Tax fund	Balance sheet account from which to read the tax debit/credit
Tax fund: variation account	Variation account of the **Tax fund** normal account used for the accounting at the end of the debit/credit year of reference taxes of the year
Tax credits	
Tax credit account (P&L)	P&L contra-entry on which to define the tax credit
Tax credit account (BS variation)	BS variation account on which to define the tax credit

Direct taxes - Payments tab

Field	Description
Holidays	Allows you to shift the tax payments that fall on a holiday to a work day based on what is specified in the selected holiday.
Bank - credit variation	Bank account for the down payments and tax balances
Down payment	
Credits due to down payments	Credit balance sheet account with the Tax authorities for tax down payments
Statistical account: prev. year tax	Reference tax account of the previous year used for the calculation of down payments of the first year of planning. In subsequent years, the system uses the tax account.
Credits due to down payment variation	Variation account of the **Credits due to down payments** account defined during the down payment of taxes
Bank - debit variation	Write off variation of the bank account for down payments if the balance of the tax fund is in credit.
Tax fund: down payment write off	Credit variation of the tax fund account for the down payment write off if the balance of the tax fund is in credit
Down payment %	Percentage down payment to be paid
Day	Day on which to pay the tax down payment
Period	Period in which to pay the tax down payment
Balance payment and down payment write off	
Down payment write off method	Write off method for the down payment made during the year. • **Fiscal year end**: the amount payable to the tax authority is written off with the balance of the credit due to down payments on 31/12. • **Balance payment**: the amount payable to the tax authority is written off with the balance of the credit due to down payments upon the settlement of the tax liability.
Credit write off variation for down payments	Write off variation of the credits due to down payments account that the system uses at year end or upon payment of the tax balance, in order to make a sort of account transfer and move the balance of the down payment account to the tax fund
Tax balance payment fund	Debit variation of the tax fund account entered upon the tax balance payment
Day	Day on which to pay the tax balance
Period	Period in which to pay the tax balance

Deferred and prepaid taxes - Input accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Input accounts

Purpose of the page

This page allows you to define the input accounts that the system will use to calculate deferred and prepaid taxes and establish the percentage of the value of those accounts that should be considered.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax. Identified all of the accounts that contribute to the definition of the tax base for the calculation of deferred taxes.
Taxable income %/ Deductible taxes %	Percentage of the account subject to tax

Direct taxes - Input accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Direct taxes - Input accounts

Purpose of the page

This page allows you to define the input accounts that the system will use to calculate direct taxes.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax
% not subject to	Percentage of the account not subject to tax
% subject to current year	Percentage of the account subject to tax for the current year

Field	Description
% subject to year n+1	Percentage of the account subject to tax for the specified year n+. Allows you to manage the spreading of deductible accounts over several years.
% subject to year n+2	
% subject to year n+3	
% subject to year n+4	
% subject to year n+5	
% subject to year n+6	
Threshold account	Account on which to apply the **Threshold %** value in order to get the maximum value subject to tax
Threshold %	Percentage to apply to the threshold account to get the maximum value subject to tax. This is applied, for example, if there are maintenance costs related to assets that are only deductible up to a certain percentage of the value of the asset.

Deferred and prepaid taxes - Override output accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Override output accounts

Purpose of the page

This page allows you to apply overrides for each individual output account.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax
Deferred Taxes P&L	
Annual impact account - debit	P&L account on which the system registers the annual impact as a debit or credit amount
Annual impact account - credit	
% variance account - debit	P&L account on which the impact of the adjustment to the tax fund/credits for prepaid taxes is registered, as a debit or credit amount. The impact of the adjustment is due to the rate change compared with the previous year.
% variance account - credit	
Debits for deferred taxes	
Normal account	Balance sheet account on which the payable for deferred tax is registered

Field	Description
Variation annual impact - debit	Variation account of the Deferred taxes fund account on which the tax adjustment due to the impact of the year's taxes is registered, as a debit or credit amount. This typically coincides with a variation account of the Deferred taxes fund.
Variation annual impact - credit	To track the impact of the year and the impact of the fund adjustment due to the FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation % variance - debit	Variation account of the Deferred taxes fund on which the tax adjustment due to the change in rate compared with the previous year is registered, as a debit or credit amount.
Variation % variance - credit	
Credits for prepaid taxes	
Normal account	Normal balance sheet account on which the amount receivable for tax is registered. If you do not want to distinguish between payables and receivables, this account may coincide with the Deferred taxes fund.
Variation annual impact - debit	Variation account of the Credits for Prepaid taxes account on which the tax adjustment due to the impact of the year's taxes is registered, as a debit or credit amount. This typically coincides with a variation account of the Credits for Prepaid taxes.
Variation annual impact - credit	To track the impact of the year and the impact of the fund adjustment due to the FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation % variance - debit	Variation account of the Credits for prepaid taxes on which the tax adjustment due to the change in rate compared with the previous year is registered, as a debit or credit amount.
Variation % variance - credit	

Direct taxes requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Direct Taxes > Taxes >

Purpose of the page

This page allows you to override the execution plan settings for direct taxes at the entity level.

Attributes tab

Field	Description
Entity	Entity on which to run the override
Entity Calculation	Overrides data processing managed at the entity level. • **No**: the system does not run the entity calculation on the selected entity. • **Yes**: the system runs the entity calculation on the selected entity. • **On other Entity**: the system uses the data of the selected entity for the calculation on another entity. In this case, it is necessary to specify the target entity.
Target entity	Only if **Entity Calculation** is set to **On other Entity**. Owned Entity

Data Processing: other data processing

Contents

This section covers the following topics:

Other data processing 144
Assets depreciation rules page 145
Customers/Asset categories attribution page 145
Dividend Requirements page 146

Other data processing

Section contents

This section groups together data processing that does not belong to the main modules of CCH Tagetik, namely the Consolidation, Cash flow planning, ETL, Carry forward, Allocations & Closing, Calculation logics, Validations, Balancing and Taxes modules.

Available data processing

Data Processing	Description
Monthly splitting by Account	Runs the monthly splitting in accordance with the rules defined in the **Monthly splitting rules** tab in the accounts table. The monthly splitting rules can be defined for Profit & Loss or Other Variations accounts, or for variation accounts of a Balance Sheet or Other Stocks nature. See Monthly splitting - HTML5.
Countervalue calculation	Automatically calculates the amounts field of gross amounts and intercompany amounts based on the original currency amount field. Applies the FX rates of the processed scenario/period. See Countervalue calculation.
Asset depreciation	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the contributor categories. The purpose is to calculate the depreciation plan for new investments by tax category. See Ammortamento cespiti - HTML5.
Dividends	Enables the calculation of the dividends to be distributed to entitled entities as remuneration for the capital invested. See "Dividend Requirements page" on page 146.

Assets depreciation rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Other > Assets depreciation > ✎

Purpose of the page

This page allows you to access the page on which to override relationships between categories of assets and custom dimension 3 items.

Page fields

Field	Description
Custom dimension 3/Asset categories attribution	Opens a page to override the relationships between custom dimension 3 items and asset categories. The relationships are created by entity/entity node.

Customers/Asset categories attribution page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Other > Assets depreciation > ✎ *> Attribution (Custom dimension 3)/Asset categories*

Purpose of the page

This page allows you to associate the custom dimension 3 elements (assets) with an asset category, for every entity. Thus, cases in which the same asset is depreciated for several entities can also be handled.

Buttons and/or links on the page

Field	Description
Definition result	Shows the results of the relationships created.

Relationships tab

Field	Description
Custom dimension 3	Dimension on which, within the domain, it is necessary to manage assets, such as buildings, land, etc.
Entity	Individual entity or node of an entity hierarchy. In the latter case, the system considers all the entities related to the selected node to be entities to relate to the asset.
Asset categories	Allows you to select a category of assets from among those that have been defined (*Setup&Admin > Data processing tile > Assets depreciation*)

Dividend Requirements page

Admin

Operational database > Processes tile > select process > ⋮ *> Process setup (Data Processing section) > Other > Dividends >*

Purpose of the page

This page allows you to associate specific dividend distribution rules with specific entities.

Attributes tab

Field	Description
Entity	Entity on which the dividend is calculated and booked
Dividends distribution rule	Allows you to override rules configured in the system (*Setup&Admin > Data Processing > Dividend distribution rules*)

Notification emails

Contents

This section covers the following topics:

Notification emails 147
Send email events 148
Email templates page 150
Parametric e-mail elements 151
Manage the sending of emails 152

Notification emails

Introduction

CCH Tagetik can send automatic notification emails to the user when certain events occur within the application. To set this behaviour, it is necessary to configure an *email template*, or define the rules for sending emails and email content (email content, email originating event, recipients, etc.).

Email template configuration

To create email template it is necessary to define the following data:

- the event type related to the process originating the send email event (e.g. the submission of an entity)
- the email format
- the subject and body of the email, in which place markers related to parametric elements can be inserted
- the recipients, i.e. single users or groups of users of CCH Tagetik.

For more details, see the email template configuration page. See "Email templates page" on page 150.

Parametric elements in email templates

Place markers can be inserted in the subject and body of the email template for parametric elements related to process data.

When sending the email, the system replaces the parametric elements with the specific process data that originated the send email event. For example, the string in the “StringEntity ${entity} has been submitted” email template becomes “Entity A00 has been submitted” when the email is sent.

For more details on parametric elements. See "Parametric e-mail elements" on page 151.

Tracking the sending of automatic emails

The automatic sending of emails can be tracked in CCH Tagetik‘s audit trail. See Procedure di gestione audit.

Email transmission protocol

CCH Tagetik uses the SMTP (Simple Mail Transfer Protocol) transmission protocol.

Depending on the chosen configuration, the following types of email session are possible:

Session	Configuration	Description
Mail Session Application Server	The SMTP session is configured in the application server.	The email sender is defined by the parameter of the *name mail.from* property of the configuration XML file.
Custom Mail Session	The SMTP session is configured via the repository.	The email sender is defined by the Repository's *mail from* parameter. The following types of sender are supported: • **Single**: the email's **From** field inherits the email address indicated in the Repository's *Default Mail From* field. • **User**: the email's **From** field inherits the email address indicated in the user settings.

Specific behaviour for sending by event type

Element	Description
Submission events	Either "Specific recipients" or "Recipients", or both, must be selected. The emails will not be sent to the user who originated the event, not even if they are on one of the lists of recipients.
IC matching cockpit events	"Specific recipients" must be selected. The emails will only be sent if the cockpit was opened with a relationship type other than Node. They will not be sent to the user who originated the event, not even if they are on one of the lists of recipients.
Events related to data processing	"Recipients" must be selected. Emails will also be sent to the user who originated the event if they are on the list of recipients.
Events related to the completion of tasks	When the event relates to a task included in a process, no recipient needs to be specified. The emails will be sent to those responsible for the subsequent task (if the sending of notification emails is enabled on the task) and to the user who originated the event if they are one of those responsible for the subsequent task.

Send email events

List of events that originated the sending of emails

The list of events that trigger the sending of emails is provided below:

Element	Description
Processes with approval workflows	
Entity submission	Sends the email when one of the entities is submitted.
Submission of the last entity below the Higher entity	Sends the email when the last child entity of a parent node is submitted. The email is sent to all users associated with the parent node.
Entity approval	Sends the email when any approval activities are carried out and the entity's status changes to "in submission".
Reject submitted Entity	Sends the email when an entity changes from **Submitted** to **Rejected**.
Reject "Submission in progress" entity	Sends the email when an entity changes from **In Submission** to **Rejected** (cancelling the Approval step).

Element	Description
Journal approval	Sends the email when the journal approval activities are run.
"Submitted" journals rejection	Sends the email when a journal is rejected.
"Submission in progress" journals rejection	Sends the email when the journal status changes from **In Submission** to **Rejected** (cancelling the Approval step).
Reminder on Entity submission	Sends the email on the submission reminder dates set for the process. See "Set deadline window" on page 50.
Intercompany matching cockpit	
IC insertion is Complete	Sends the email when the insertion of the entity's intercompany entries is declared complete.
Carry forward IC insertion	Sends the email upon the carry forward of the insertion of intercompany entries related to an entity for which it had already been declared complete.
IC matching	Sends the email when the relationship between the entities is submitted/blocked.
Carry forward submitted IC relationship	Sends the email when a relationship between entities that have already been submitted is carried forward.
Unlock IC relationship	Sends the email when a previously blocked relationship is carried forward.
Data processing	
Cashflow planning	Sends the email when the indicated data processing ends.
Closing	
Purge closing entries	
ETL routine for values	
ETL job for values	
ETL job for tables	
Consolidation area basic data processing	
Consolidation area final data processing	
Preliminary data processing on Consolidation scenarios	
Group consolidation data processing	
Entity data processing	
Preliminary data processing on Original scenarios	
Snapshot	
Create snapshots automatically	Sends the email when a snapshot is created automatically.
Attachment	
Replace attachments	Sends the email when the attachments to a Collaborative Office document are replaced.

Element	Description
Production control	
Copy data versions	Sends the email when the copy data versions function is performed.
List value wizard	Sends the email when the purchase lists are defined using the wizard.
Integrity check	Sends the email when the Integrity check report that checks inconsistencies within data versions linked to a CCH Tagetik process is launched.
Spreading	
Banking IC spreading	Sends the email at the end of IC Spreading data processing.

Email templates page

Admin

Application database > Data processing tile > Email templates

Purpose of the page

This page allows you to configure email templates for the sending of automatic notification emails.

Configuration tab

Element	Description
Attributes	Defines the features and contents of the template.
Recipients	Defines the recipients of the automatic email.

Fields in the Attributes tab

Element	Description
Code	Defines the template's identification code.
Email event type	Defines the event that originated the automatic sending of the email. See "Send email events" on page 148.
Email text type	Defines the email format.
Enable	Enables the sending of emails when the event defined in **Email event type** occurs.
Subject	Defines the email subject.
Body	Defines the content of the email.

Fields in the Recipients tab

Element	Description
Specific recipients	Defines the type of users who will receive the email and the contributor/submitter role of the users in the process. The options for groups of users vary based on the value defined for **Email event type**.
Recipients	Allows you to select specific users to whom to send the email. To be able to use this, sending to Contributors and/or Submitters must have been enabled in **Specific recipients**.

Element	Description
Excluded Recipients	Allows you to select specific users to be excluded from the sending of the email. If groups have been defined in **Specific recipients**, this allows you to exclude specific users from the group of users.
Specific recipients in Cc	Defines the type of users who will receive the email in carbon copy and the contributor/submitter role of users in the process. The options for groups of users vary based on the value defined for **Email event type**.
Recipients in Cc	Allows you to select specific users to whom to send the email in carbon copy. To be able to do this, sending to Contributors and/or submitters must have been enabled in **Specific recipients in CC**.
Recipients not in Cc	Allows you to select specific users to be excluded from the sending of the email in carbon copy. If groups have been defined in **Specific recipients in CC**, this allows you to exclude specific users from the group of users.
Specific recipients in Bcc	Defines groups of users who will receive the email in blind carbon copy and the contributor/submitter role of users in the process. The options for groups of users vary based on the value defined for **Email event type**.
Recipients in Bcc	Allows you to select specific users to whom to send the email in blind carbon copy. To be able to use this, sending to Contributors and/or Submitters must have been enabled in **Specific recipients in BCC**.
recipients not in BCC	Allows you to select specific users to be excluded from the sending of the email in blind carbon copy. If groups have been defined in **Specific recipients in BCC**, this allows you to exclude specific users from the group of users.

Buttons and/or links on the page

Element	Description
	Opens a window to enter the text.

Parametric e-mail elements

List of parametric elements

The list of available parametric elements for send e-mail events is provided below:

Element	Description
${process}	Process code.
${process.desc}	Description of the data collection process.
${scenario}	Scenario code.
${scenario.desc}	Scenario description.
${period}	Period code.
${period.desc}	Period description.
${entity}	Entity code (entity/node/journal).
${entity.desc}	Entity description (entity/node).
${entityname}	Value of the name assigned to the Entity dimension in the general configuration.
${rootUrl}	Address of the server with which the request that originated the event associated with the e-mail was started.
${step}	Step code.
${step.desc}	Step description.

Element	Description
${user}	Code of the user who originated the event.
${user.desc}	Description of the user who originated the event.
Submission events	
${journal}	Journal code, only for journal submission.
${journal.desc}	Journal description, only for journal submission.
${message}	Note added during an entity rejection step.
${daysBeforeExpiration}	Only with the option to send reminders for the submission of entities. Number of days before the submission deadline.
Intercompany matching events	
${cockpit}	Code of the intercompany matching cockpit.
${entityctp}	Counterparty entity code.
${entityctp.desc}	Counterparty entity description.
${customdim2}	Code of the custom dimension 2 element on the intercompany cockpits open with relationship type: by entity/custom dimension 2.
${customdim2.desc}	Description of the custom dimension 2 element on the intercompany cockpits open with relationship type: by entity/custom dimension 2.
${customdim2ctp}	Code of the counterparty custom dimension 2 element on the intercompany cockpits open with relationship type: by entity/custom dimension 2.
${customdim2ctp.desc}	Description of the counterparty custom dimension 2 element on the intercompany cockpits open with relationship type: by entity/custom dimension 2.
${customdim2name}	Value of the name assigned to custom dimension 2, used for intercompany cockpits open with relationship type: by Entity/Custom dimension 2.
Data processing events	
${*<parameter>*}	Data processing parameter chosen by the user (e.g. ${aziendaList}, ${scenarioPeriodoOriginarioList}, ${scenarioPeriodoConsolidamentoList}...).
${elaborationError}	If the data processing has failed, this is defined as *True*.
Task workflow task events	
${Usertype}	The possible values are: • 1: the entity is an entity or contributor node. • 2: the entity is a consolidator node.
${activity}	Code of the task performed.

Manage the sending of emails

Pagine di lavoro

Email templates page 150

Concept Information

Notification emails 147
Send email events 148

Application database > Data processing tile > Email templates

Sequence of procedures

To set up the sending of automatic emails regarding the process, the following procedures are necessary:

1. "Define the email recipients" below.
2. "Define the email contents" below.
3. "Enable the sending of emails on the process" below.

Define the email recipients

1. Click ⊕ to create a new email template.
2. In the **Attributes** tab, enter an identification code for the template in **Code**.
3. In **Email event type**, select the condition that triggers the automatic sending of the email.
4. In the **Recipients** tab, select the desired types of user in **Specific recipients**.
5. To send the email to specific users of the environment only, click ... in the **Recipients** field and select the desired users in the **Select elements** window.
6. To exclude specific users in the selected group from the email, click ... in the **Excluded Recipients** field and select the desired users in the **Select elements** window.
7. Repeat steps 4 to 6 to define the recipients of carbon copies (in CC) and blind carbon copies (in BCC).

Define the email contents

1. In the **Attributes** tab, select the desired format for the email text in **Email text type**.
2. Enter the subject of the email in **Subject**. To insert parametric elements. See "Parametric e-mail elements" on page 151.
3. Enter the body of the email in **Body**. To insert parametric elements. See "Parametric e-mail elements" on page 151.
4. Select **Enable** to enable the sending of the created template.
5. Click **Save**.

Enable the sending of emails on the process

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

Select the **Send email** box and click **Save**.

Snapshot scenarios

Contents

This section covers the following topics:

Snapshot scenarios 154
Snapshot - Requirements page 155
Manage snapshot scenarios 155

Snapshot scenarios

What they are

In CCH Tagetik *snapshot scenarios* are defined as scenarios for which data can be archived to be consulted and used after potential changes have been made to the original scenario from which it was generated.

For example, this functionality is useful when the user, in the budget preparation step, needs to track several versions of the data from the same original scenario before deciding which will be the definitive version. Once the definitive version has been chosen, the data from the snapshot scenario can be restored to the reference scenario through assisted copy actions.

The relating of snapshot scenarios to a data collection process is optional.

The snapshot can be run from the data processing on the process by process, scenario or period.

Snapshot scenario characteristics

All snapshot scenarios are identified by the following elements:

Element	Description
Version number	The unique identification number of every version managed for an original scenario (up to a maximum of 999 versions for a single original scenario). The *snapshot scenario* onto which the data is copied must have the same number of versions of the original scenarios involved, including the *Event scenario*
Snapshot scenario	The snapshot scenario code, or the code for an active original scenario previously created in the scenarios table (Actions > Snapshot)

For more details on the Scenario dimension, see Lo Scenario: concetti di base.

Ways to create snapshots

The data that the system copies varies depending on the user creating the snapshot. When the snapshot is created by the user, it includes the data from the original scenario in relation to entities for which the user is authorised. However, when the snapshot is created by the administrator, the system copies the data for all entities associated with the scenario, and the data for the FX rates, tax rates and interest rates defined

on the initial scenario. Thus, calculations and data processing similar to those run on the original scenario can also be run on the snapshot.

When the snapshot is run from the **Detail summary** tab, the system performs the snapshot on all datasets associated with the process. When the snapshot is run from one of the process steps, the system only performs the snapshot on datasets associated with the selected step.

Snapshot - Requirements page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data processing section) Snapshot >

Purpose of the page

This page allows you to set the requirements for copying data from an original scenario onto snapshot scenarios, and vice versa to restore data from snapshot scenarios to original scenarios.

Page fields

Section	Description
Run by	Defines the time dimension from which to copy snapshot data: • **By Process** • **By Scenario** (includes all periods of the indicated scenario) • **By Scenario/Period**
Dimensions on which to filter	Defines the data to be included in or restored to the snapshot: • **Snapshot by entity**: snapshot data filtered by entity can be copied/restored; the desired entities can then be selected in the create or restore phase. If the snapshot is not defined by entity, the data processing can only been run if positioned on the root. • **Category**: snapshot data filtered by one or more category can be copied/restored; the desired categories can then be selected in the create or restore phase. • **<Custom dimension 1, 2, 3..5>.**: snapshot data filtered by one or more custom dimensions can be copied/restored; the desired custom dimensions can then be selected in the create or restore phase. ***Note**: when this parameter is not defined, if the snapshot is run by the administrator, the data processing automatically copies the FX rates, tax rates and interest rates. When the snapshot is created by the user, that data must be copied manually by the administrator.*

Manage snapshot scenarios

Pagine di lavoro
Snapshot - Requirements page 155
Concept Information
Snapshot scenarios 154

Application database > Processes tile > select process > ⋮ > Process setup > (Data processing section) Snapshot > 

Enable snapshot scenarios for the process

This procedure allows you to select the period and dimensions on which to perform the snapshot for the desired process.

1. In **Run by**, select the time dimension on which to record the snapshot data.

   ***Note**: when the "By Process" time dimension is chosen, the snapshot scenario cannot be related to the process containing the scenarios to be copied.*

1. in **Dimensions on which to filter**, select the dimensions by which to filter the data to be copied onto the snapshot scenarios of the process.
2. Click **Save**.

If you are working on a financial planning process, you must also create a snapshot scenario for the *Event scenario*.

***Note**: Periods do not need to be opened for the Event scenario snapshot, since this is a system scenario that does not need to be loaded by the user.*

The processes cockpit

Contents

This section covers the following topics:

Process cockpit function 157
Process data management 157
Cockpits: common elements 158

Process cockpit function

Introduction

The process cockpit is the tool with which users work on processes. It has two views:

- the *contributor cockpit* which allows contributor users to perform data entry, run journals, run data processing and submit/reject data on the entities and steps of the process.
- the *consolidator cockpit* which allows consolidators to supervise the data entry activities of contributors and to proceed with data submission on nodes and steps of the process.

Users who access the process cockpit only see the entities (entities and nodes) for which they are authorised according to the user rights defined by the administrator. The cockpit is therefore structured differently depending on the user running it.

Process data management

Lock and unlock data

This function modifies the editability of data belonging to nodes and entities for specific steps. It acts on the possibility of manually entering the gross and intercompany FS balances and entity and consolidation journals into the system.

The system allows you to safely run the data processing, even during the data entry step. To prevent data from being changed while the data processing is underway, it allows you to temporarily lock the editability of an entity for several scenarios/periods, regardless of its submission status. Users cannot therefore edit that data, regardless of their rights or the submission status.

The editing of data processing data can be locked or unlocked from both the contributor cockpit and the consolidator cockpit. To do this, the following conditions must be met:

- Data processing must be enabled with the related function and for the role related to the user profile on the Repository (see I ruoli).
- For the contributor, there must be at least one of the original scenarios/periods visible to the user and belonging to the process with which the cockpit was accessed. The proposed entities are those that have been selected and/or belong to the nodes selected on the cockpit, which belong to the selected scenarios/periods, selected from the entities visible to the user that are not “only counterparty” or “consolidator’s only” in at least one of the original scenarios/periods (see "Contributor Cockpit" on page 159).

- For the consolidator, there must be at least one node to consolidate in the selection with which the data processing is run. The selected nodes to be consolidated will be prepared by the cockpit, visible to the user and belong to the process (see "Consolidator cockpit" on page 192).

Cockpits: common elements

User

Application database > Processes tile > select process > Contributor

Application database > Processes tile > select process > Consolidator

Buttons appearing on both cockpits

Button	Description
	Allows you to access the contributor or consolidator cockpit.
	Allows you to insert notes and/or attachments.  : notes and/or attachments present
	Creates a page bookmark that can be added to the **Favorites** section of the home page.  : bookmark already created
	Manage cockpit display preferences (e.g. visibility and width of columns, minimised areas of the display). The following actions are available: • **Save preferences** • **Restore preferences** Preferences remain valid for subsequent log-ins.  : preferences already set.
	Close the cockpit and return to the previous page.

The contributor cockpit

Contents

This section covers the following topics:

Contributor Cockpit 159
Contributor Cockpit page 160
Summary tab 161
Working in the Summary tab 163
Detail summary tab 164
Working in the Detail summary tab 166
Step tab 166
Organisation section of the <step> tab 168
Workflow section of the <step> tab 169
Working in the step tab 170
Performance Dashboard 171
Performance dashboard tab 171
Working in the Performance Dashboard tab 174
Working on process reports (contributor) 175
Actions section of Detail summary and step tabs 176
Partition data details window 182
Journals book window (for the contributor) 182
Drill down parameters page (ad-hoc analysis) 185
Pick-up check report window (contributor) 186
Copy amounts and journals window 186
Submission status window (contributor) 189
Entities submission status window 189
Lock data and Unlock data windows 190

Contributor Cockpit

What it allows you to do

The contributor cockpit allows contributor users to do the following:

- View summary information on data collection and submission status.
- Run actions on process steps, such as data entry, data processing, and data submission and/or rejection.

Information visible to the contributor user

In the cockpit, all contributors view the contributor steps or mixed contributor/consolidator steps of the task workflow. On the displayed steps, the user only sees the organisational hierarchy for which they are

authorised to work and, within it, all the entities not labelled as “Only CTP” or “Only consolidator data” on which they are authorised to run operation or submission activities.

The contributor cockpit is therefore structured differently depending on the user viewing it, but also depending on the process characteristics. The number and type of activities and data processing also depends on the process rule settings.

The task workflow of steps

Task workflow activities can be viewed as a chart or a list. In contrast to the list, the chart allows you to distinguish between activities to be run in parallel or in sequence. In the chart, every activity is represented by an icon coloured according to the activity’s progress status.


The list also contains details of every activity, namely the type of activity, the description, the progress status, the data the status last changed and the user who made that change. Activities can be accessed regardless of their order, but to declare one of them complete, all previous activities must have already been declared complete.

Therefore, the step cannot be submitted (submission task is grey) until all tasks have been completed.

Task workflow example

This example shows a task workflow containing both activities to be run obligatorily in sequence, and activities to be run in parallel. In particular, activities such as *Checkpoint* or *HR Analysis* cannot be run until the previous activity or group of activities is complete.

The *Expense analysis*, *Employee Transfer Management* and *Review Attrition Report* activities can be run and submitted in parallel, but only when the *Set Employee Work Hours* field has been filled.

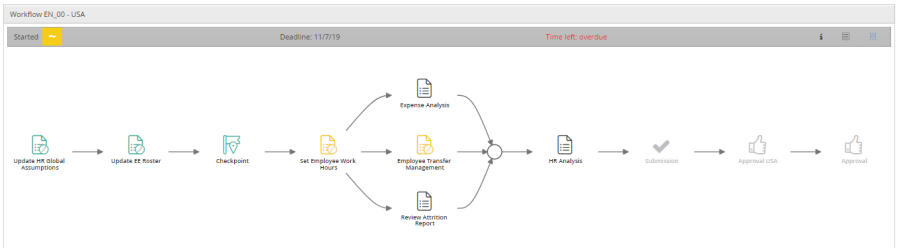

Details of the progress of individual activities.

Activity complete status can be set manually or applied automatically after the desired activity has been performed. Automatic completion takes place by default for activities that run data processing, or it can be overridden on the type of activity in the activity definition step.

Activities are considered optional when they are not significant for the purposes of submitting the entity. This rule is set by the administrator in the activity creation phase.

See "Workflow section of the <step> tab" on page 169.

Contributor Cockpit page

User


Application database > Processes tile > select process > Contributor

Purpose of the page

This page allows you to carry out all actions that are enabled on the processes, i.e.:

- enter data and journals
- run data processing and reports
- certify data

What it looks like

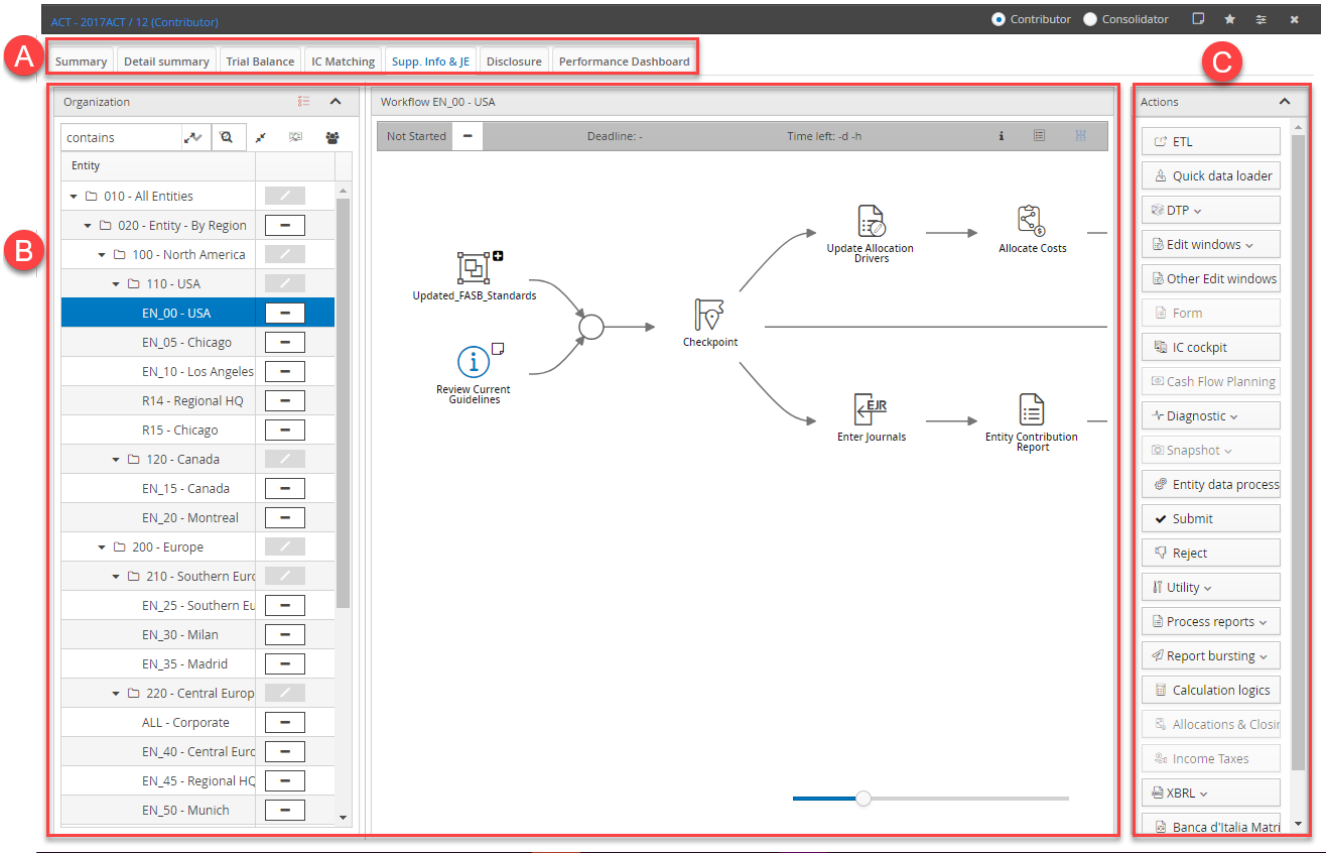

Element	Description
A	Navigation tabs
B	Specific content of the selected navigation tab
C	Actions section

Summary tab


User

Application database > Processes tile > select process > Contributor > Summary

Purpose of the tab

This tab allows you to view summary information on the submission status of data within steps of the specific process.

What it looks like

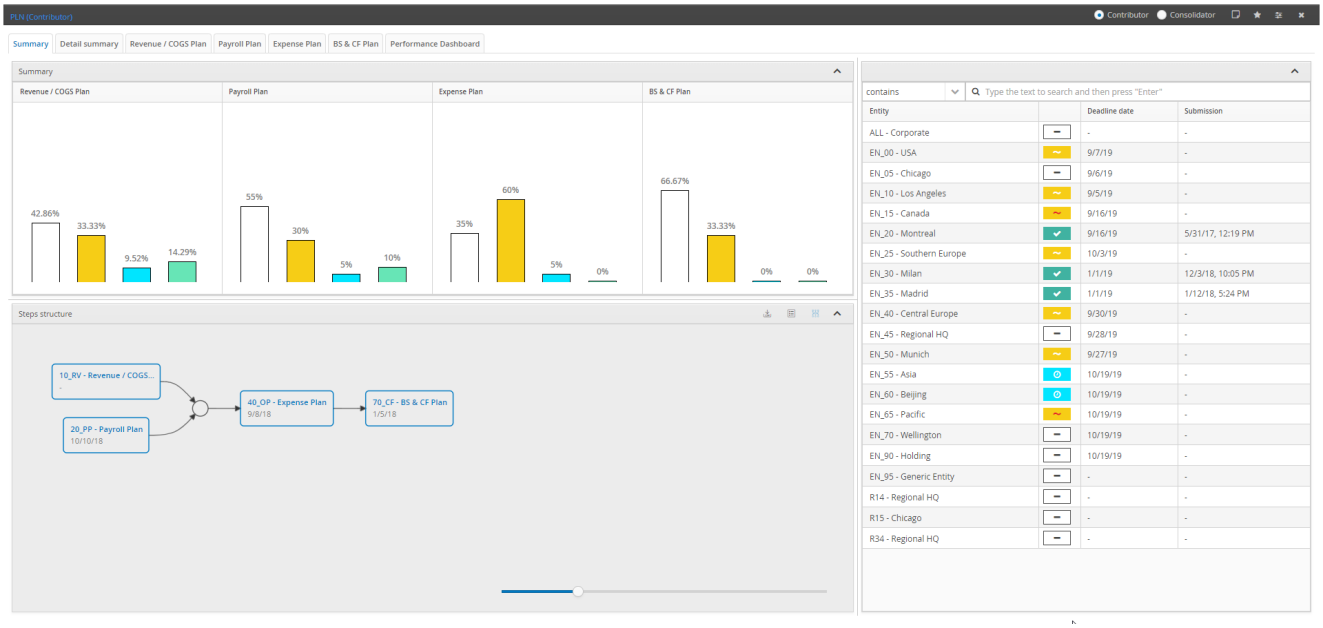

Page sections

Element	Description
Summary charts	Displays a bar chart for every step of the process. Every bar of the chart relates to a specific submission progress status and shows the percentage of entities that currently have that status. The colour of the bar shows the progress status for activities and submission: • White: activity to be started • Yellow: activity underway • Blue: submission underway • Green: submission complete
Steps structure	Displays the steps of the process as a chart or list. In contrast to the list, the chart allows you to distinguish between activities to be run in parallel or in sequence. The deadline is displayed for every step, if defined in the process settings.
List of entities	Displays the list of entities involved in the process. In particular, it displays the following: • status and percentage progress of data collection/processing/submission activities • submission deadline • date on which submission occurred When the user clicks on a submission status indicator in the step columns in the summary chart (see Progress indicators by step), the list of entities displays the entities that currently have the selected status for the selected step.

Buttons and/or links in the Steps Structure section

Element	Description
	Download steps structure in XLS format.
	Display steps structure as a list.
	Display steps structure as a chart.
	Minimises the entire lower section of the pane, leaving only the title bar visible, and resizes the other areas so as to use all available space. Allows you to hide data not of interest to the user, and makes navigation easier on mobile devices (tablets or small notebooks).

Progress indicators by step

Element	Description
	The step is not significant and does not require activities for the entity.
	No activity has been performed yet. On a node, this indicates that none of the node's entities have performed activities.
	On an entity, this indicates that data collection and submission activities are underway. On a node, this indicates that the entities belonging to the node have different statuses.
	The entity has been submitted. All data is submitted and locked, ready to be processed.
	The entity has been rejected by the higher-level node manager. Other data can be entered.
	All of the node's entities have been submitted. The node can be certified.
	The approval process for approval tasks and submission tasks has not yet been completed for the entity.

Working in the Summary tab

Pagine di lavoro

Contributor Cockpit page 160
Summary tab 161
Detail summary tab 164
Step tab 166

Concept Information

Contributor Cockpit 159
Performance Dashboard 171

User

Application database > Processes tile > select process > Contributor > Summary

Filter entities in the hierarchy

1. In the entity list section, click ⌄ and select the rule to filter.
2. Enter the word by which to filter and click 🔍: the search result will appear in a table.

View the percentage of entities with a specific status

In the summary charts section, move the mouse over the desired column: a tooltip will appear with the name of the progress status for the column and the percentage of entities that have that status.

View details of entities with a specific status

In the summary charts section, click on the desired bar: the entity list section will display the name of the step and the progress status in the header and the list of entities that have said progress status.

View the submission deadline of a step

In the step structure section, move the cursor over the desired step: a tooltip will appear with the name of the step and the relative submission deadline.

Detail summary tab

User


Application database > Processes tile > select process > Contributor > Detail summary

Purpose of the tab

This page allows you to:

- View the progress status of the submission of each node and entity over the various steps.
- Run data processing, submit and reject data, run actions on the steps of one or several entities or one or several nodes.

What it looks like

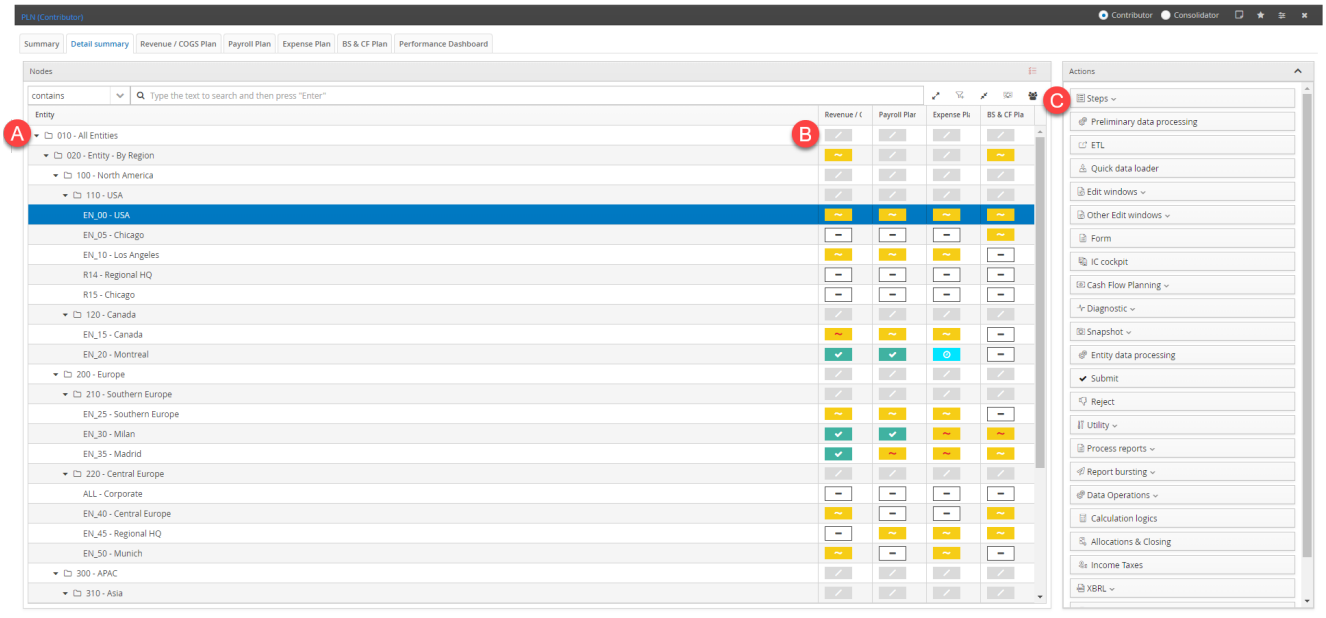

Element	Description
A	Section showing the list of nodes and entities of the process on which the user is authorised to work.
B	Section showing progress of nodes and entities for every step.
C	Section showing available actions for the selected nodes and entities.

Page sections

Element	Description
Nodes	List of the nodes underlying entities present in the organisational hierarchy associated with the process on which the user is authorised to work.
Columns <step>	Entity/node progress status by step.
Actions	Available actions for the selected entities/nodes.

Buttons and/or links in the Nodes section

Element	Description
	This enables multi-row selection, so you can make mass changes.
	Filters entities in the hierarchy based on what is set in the filter.
	Expands the organisational hierarchy's entity tree.
	Opens a window to select advanced search criteria.
	Compresses the organisational hierarchy's entity tree.
	Shows the log of submission/rejection/approval activities for the selected entities.
	Shows the users responsible for the selected entities.

Progress indicators by step

Element	Description
	The step is not significant and does not require activities for the entity.
	No activity has been performed yet. On a node, this indicates that none of the node's entities have performed activities.
	On an entity, this indicates that data collection and submission activities are underway. On a node, this indicates that the entities belonging to the node have different statuses.
	The entity has been submitted. All data is submitted and locked, ready to be processed.
	The entity has been rejected by the higher-level node manager. Other data can be entered.
	All of the node's entities have been submitted. The node can be certified.
	The approval process for approval tasks and submission tasks has not yet been completed for the entity.

Working in the Detail summary tab

Pagine di lavoro

Contributor Cockpit page 160
Summary tab 161
Detail summary tab 164
Step tab 166

Concept Information

Contributor Cockpit 159
Performance Dashboard 171

User

Application database > Processes tile > select process > Contributor > Detail summary

Filter entities in the hierarchy

1. In **Nodes**, click ⌄ and select the rule to filter.
2. Enter the word by which to filter and click 🔍: the search result will appear in **Entity**.
3. (optional) To set advanced filters, click .

Run actions on entities

1. Select one or several entities or nodes.
2. In **Actions**, click on the button for the desired action or, if the button contains a sub-list of actions, click ⌄ and select the specific desired action.
3. If the selected action requires other requirements or filters to be set, set them in the dedicated window.
4. Confirm the action.

Step tab


User

Application database > Processes tile > select process > Contributor > select step tab

Purpose of the tab

This tab allows you to view data on the activities of a single step, run data processing, submit or reject data and perform actions on the step data.

What it looks like

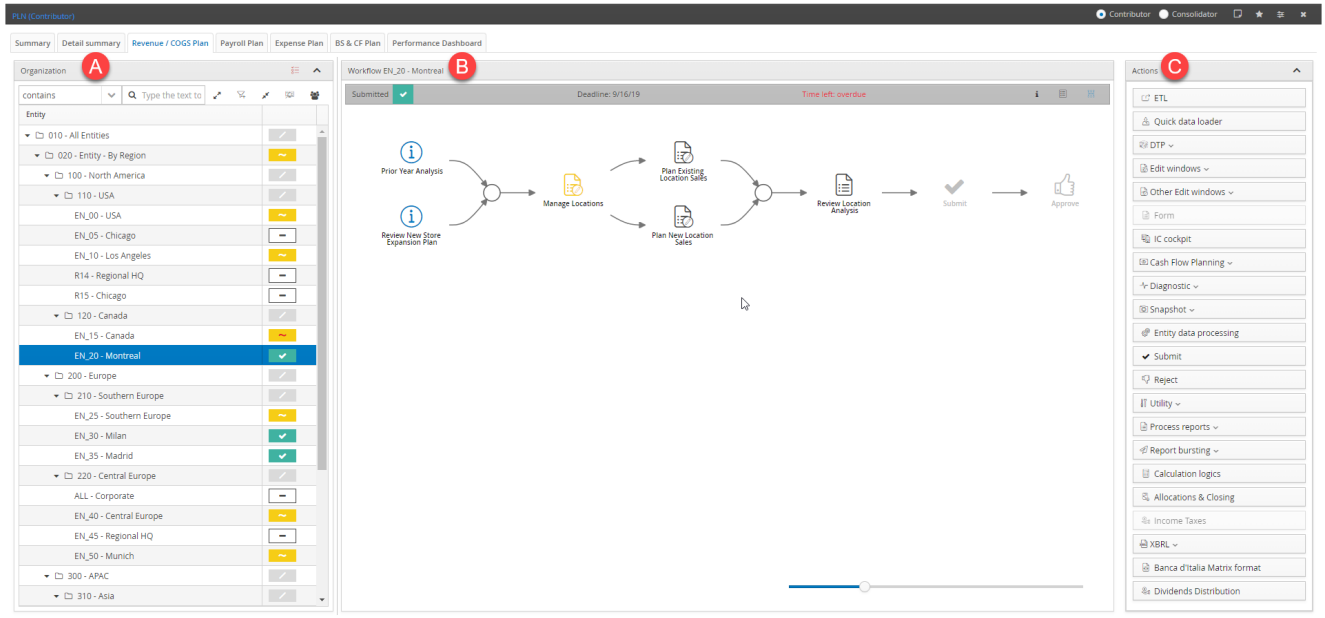

Element	Description
A	Organisation
B	Workflow/Actions
C	Actions

Elements in the tab

Element	Description
Organisation	Shows the following: • Entities present in the organization hierarchy associated with the process on which the user is authorised. • Submission progress indicators for every entity.
workflow	Only displayed if a single entity is selected. Shows the workflow chart for the tasks of the selected entity.
Common actions	Only displayed if several entities are selected. For more details on multiple selection, see "Organisation section of the <step> tab" on the next page). Shows the following: • the latest of the deadlines for submission defined in the process for the selected entities • the available actions on the group of entities, as common actions • the time remaining from today's date until the deadline • the list of individual actions by entity (from among those selected) and the status of each of them
Actions	Available actions for the selected nodes and entities. ***Note:*** *not displayed if several entities are selected.*

Organisation section of the <step> tab

User

Application database > Processes tile > select process > Contributor > select step tab

Section buttons and/or links

Element	Description
	This enables multi-row selection, so you can make mass changes.
	Minimises the **Organisation** section, leaving only the title bar visible.
	Filters for a subset of elements. ***Note**: the entities to be displayed can be filtered by code or by description.*
	Expands the organisational hierarchy's entity tree.
	Opens a window to select advanced search criteria.
	Compresses the organisational hierarchy's entity tree.
	Shows the log of submission/rejection/approval activities for the selected entities.
	Shows the users responsible for the selected entities.

Progress by entity

Element	Description
	The step is not significant and does not require activities for the selected entity.
	No activity was carried out.
	Data collection and submission activities are underway.
	The entity has been submitted. All data has been submitted and locked, and can be processed.
	The entity has been rejected by the higher-level node manager. Other data can be collected.
	Submission has still not been completed for the entity.

Workflow section of the <step> tab

User

Application database > Processes tile > select process > Contributor > select step tab

Section buttons and icons

Element	Description
	Shows the colour legend.
	Shows the activities as a list.
	Shows the activities as a chart.
	If present, this shows any notes inserted by the administrator.
	If present, this shows any attachments added by the administrator.
	Indicates that the user is not authorised to run the activity.
	Shows the grouped activities.

Progress indicators for the activity

Only with task workflow displayed in list view.

Element	Description
	Activities to be started
	• Activities in progress. • Activities to be rerun because the previous activity has been rerun.
	Activity completed
	Optional activities

Types of activity

See "Business Workflow icons" on page 25.

Actions on the task workflow activities

Element	Description
Click on the activity icon	Opens the menu of actions available on the activity. • **Open form in Web** • **Open form in Excel** • **Run** • **Task is Complete** • **Set task as not complete**

Working in the step tab

Pagine di lavoro

Contributor Cockpit page 160
Summary tab 161
Detail summary tab 164
Step tab 166

Concept Information

Contributor Cockpit 159
Performance Dashboard 171

User

Application database > Processes tile > select process > Contributor > select step tab

Filter entities in the hierarchy

1. In **Nodes**, click ⌄ and select the rule to filter.
2. Enter the code or description by which to filter and click 🔍: the search result will appear in **Entity**.
3. (optional) To set advanced filters, click .

Display the workflow of tasks of an entity in a step

1. In **Organisation**, select the desired entity: the relative task workflow will appear in **Workflow**.
2. To change the display mode, select (list) or (chart).

View details of the last change to an activity

Move the cursor over the desired activity: a tooltip will appear with the date of the last change made to the activity and the name of the user who made it.

Run actions on the step

1. Select one or several entities or nodes.
2. In **Actions**, click on the button for the desired action or, if the button contains a sub-list of actions, click ⌄ and select the specific desired action.
3. If the selected action requires other requirements or filters to be set, set them in the dedicated window.
4. Confirm the action.

Open forms for a task workflow activity

1. Select an entity from the hierarchy: the workflow of the entity's tasks on the step will appear in **Workflow**.
2. Click on the icon relating to the desired data entry form, then choose **Open Form in Web** or **Open Form in Excel**.

Run or terminate an activity in the workflow

1. Select an entity from the hierarchy. The workflow of the entity tasks on the step will appear in **Workflow**.
2. Click on the icon for the desired activity, then choose **Run** or **Task is Complete**.

Act on entity activities in multi-select mode

1. Select the desired entities simultaneously: the **Actions** section will appear.
2. Click **Detailed task list**: the list of available activities on the selected entities will appear.
3. Select one or several activities: the **Done**, **To do** and **Run selected tasks** fields will appear at the bottom of the table.
4. Select the field related to the desired activity.

Run all data processing of grouped activities (chart view)

1. Select the desired entity.
2. Click and then on **Run**: all data processing of the selected grouped activities will run. The group can be opened and individual tasks can be run if you click **+** at the top, to the right of the icon.

Performance Dashboard

What is it for

The **Performance Dashboard** tab on the contributor cockpit allows you to view *metrics*, namely the following statistical data on submission activities:

- delay days compared to the scheduled submission date
- days of activity needed for data entry
- number of rejections carried out before definitive submission
- average number of submitted records

The tab has two views:

- **Performance for process**, where it displays average statistical data calculated for all of the process's submitted entities.
- **Performance for entity**, where it displays real data for specific entities or selected nodes.

Data display options

In both views, data can be filtered by individual step, contributor type or mixed contributor/consolidator, or on all steps of the process.

In **Performance for entity** view, filters can be applied to the entities to display (e.g. level of child entities to display, or only entities that have run submission in time).

In **Performance for process** view, the metrics of the process in question can be compared with metrics of other processes. In this case, below the average calculated for the process, the following will be displayed:

- the average calculated for the compared process
- the difference between the averages of the process and the compared process, with an indication of whether the latter is higher, lower or the same as the average of the reference process.

Performance dashboard tab


User

Application database > Processes tile > select process > Contributor > Performance Dashboard

Purpose of the tab

This tab allows you to view metrics or statistical data on the submission of the process or the submission of individual steps. The statistics are only calculated on entities already submitted.

What it looks like

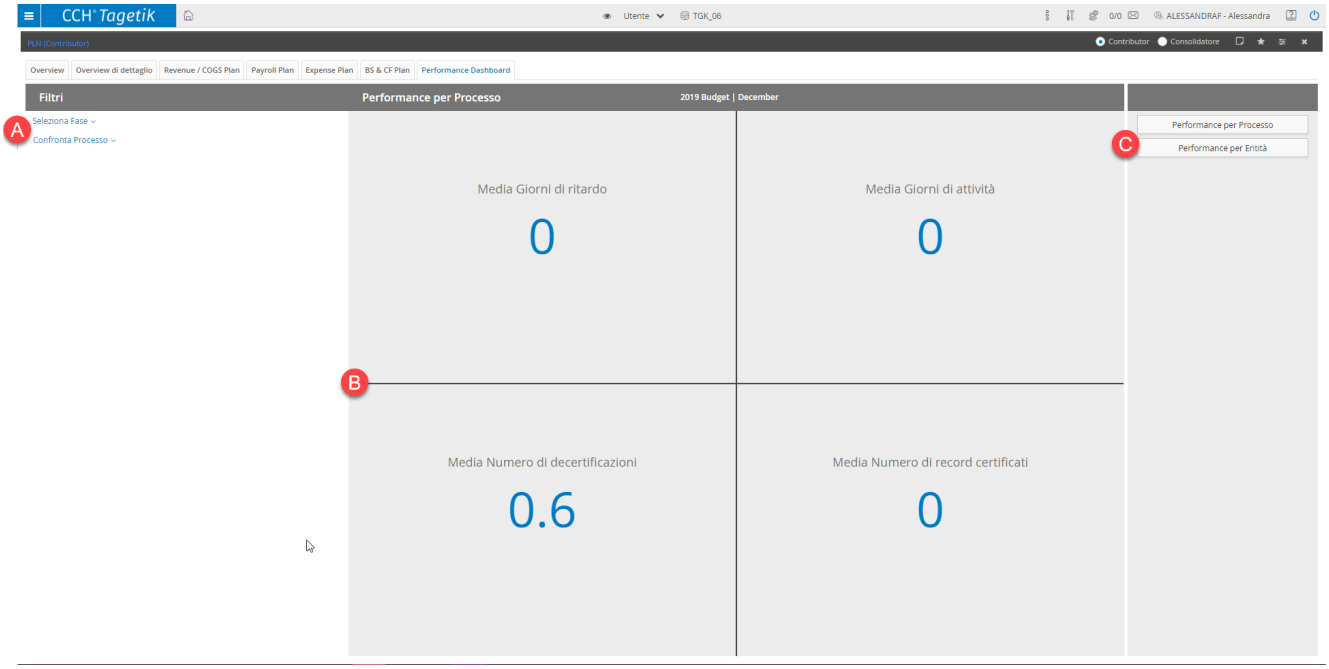

Element	Description
A	Filters
B	Display metrics section
C	Performance type selection

Elements in the tab

Element	Description
Filters	Filters on information to be displayed
Performance	Display metrics section
Performance type selection	Selection of performance type for which to display metrics
Additional information	Only displayed by selecting **Performance for Entity** and clicking on the columns in the chart of metrics by entity. Shows the following specific information for the relevant entity: • **Number of submitted records** • **Activity days** • **Number of submissions** • **Delay Days** • **Non-blocking errors**

Performance type selection options

Element	Description
Performance for process	In the **Performance** section, it displays performance metrics by process.
Performance for Entity	In the **Performance** section, it displays performance metrics by entity.

Options in the Filters section

Element	Description
Step selection	Selects the step or steps for which to display metrics. • **All the steps**: displays data on all steps of the process. • **<Step>**: displays data on the selected contributor or mixed contributor/consolidator step. selected
Compare process	Only for **Performance for process**. Selects another process with which to compare the metrics for the reference process. The following information will then be displayed in the **Performance** section: • metrics of the reference process • metrics of the compared process • difference between the metrics of the reference process and those of the compared process, with an indication of whether the average is higher, lower or the same. The comparison can only be performed with processes that manage the same number of cycles (submission by scenario/period or single submission).
Select metric	Only for **Performance for Entity**. Selects the metrics to display in the **Performance** section for the selected entity or entities. • Delay Days. See "Delay Days" on the next page. • Activity days. See "Activity days" on the next page. • Number of rejections. See "Number of rejections" on the next page. • Number of submitted records. See "Number of submitted records" on the next page.
Entity - Deploy	
Children	Only for **Performance for Entity**. Only displays data for the direct child entities of the selected node.
Lowest level	Only for **Performance for Entity**. Displays child entity data, down to the last level of the selected node. Selected by default.
On time submission	Only for **Performance for Entity**. Only displays entities that have performed submission by the deadline. Selected by default.
List of entities	Only for **Performance for Entity**. Allows you to select the node for which to display metrics according to the rules selected in **Entity - Deploy**.

Details of the Performance tab

Element	Description
Avg. Delay days	Only for **Performance for process**. Displays the average number of delay days in the submission of entities in the process. The average is calculated on the number of days between the submission deadline and the date of the last submission on the entities. The calculation only considers entities for which a submission deadline has been defined.
Avg. Activity days	Only for **Performance for process**. Displays the average number of days needed for data entry. The average is calculated from the data entry start date to the date of the last submission. The calculation only considers entities for which data entry has started.
Avg. Number of rejections	Only for **Performance for process**. Displays the average number of rejections carried out on the entities before definitive submission.
Avg. Number of submitted records	Only for **Performance for process**. Displays the average number of data submitted by the contributor on the entities (original amounts, intercompany amounts, journals).

Element	Description
Delay Days	Only for **Performance for Entity**. Displays the average number of delay days in the submission of the entity. The average is calculated on the number of days between the submission deadline and the date of the last submission on the entity. The information is only available for entities for which a submission deadline has been defined.
Activity days	Only for **Performance for Entity**. Displays the average number of days needed for data entry. The average is calculated from the data entry start date to the date of the last submission. The information is only available for entities for which data entry has started.
Number of rejections	Only for **Performance for Entity**. Displays the average number of rejections carried out on the entity before definitive submission.
Number of submitted records	Displays the number of data submitted by the contributor on the entities (original amounts, intercompany amounts, journals).
Non-blocking errors	Only for **Performance for Entity**. Average number of Non-blocking errors detected by diagnostics during submission of the entity.
Entity progress bar	Only for **Performance for Entity**. Allows you to view all available metrics for the entity. • **Number of submitted records** • **Activity days** • **Number of rejections** • **Delay Days** • **Non-blocking errors** (average calculated during submission of the entity).

Options in the Performance section

Element	Description
Order	Only for **Performance for Entity**. This allows you to select how the displayed information will be ordered: • **Top 10**: the top 10 entities to have been submitted before the deadline. • **Top 5**: the top five entities to have been submitted before the deadline. • **Show all** (default) • **Bottom 5**: the last five to have been submitted. • **Bottom 10**: the last 10 to have been submitted.

Working in the Performance Dashboard tab

Pagine di lavoro

Contributor Cockpit page 160
Summary tab 161
Detail summary tab 164
Step tab 166

Concept Information

Contributor Cockpit 159
Performance Dashboard 171

Application database > Processes tile > select process > Contributor > Performance Dashboard

View process metrics

1. In the performance types section, click **Performance for process**.
2. In **Filters** click **Step selection** and choose **All the steps**: the average of the metrics calculated on all steps of the process will appear in the **Performance for process** section.

View the metrics of a step

1. In the performance types section, click **Performance for process**.
2. In **Filters** click **Step selection** and choose the desired step: the step metrics will appear in the **Performance for process** section.

Compare the process with another process

1. In the performance types section, click **Performance for process**.
2. In **Filters** click **Step selection** and choose **All the steps**.
3. Click **Compare process**: the list of processes with which a comparison can be run will be displayed.
4. (Optional) To view non-active processes too, click **Include not active**.
5. Choose the desired process: the metrics calculated for the process in question, the metrics for the compared process, the differences between the averages of the two processes and an indication of whether the calculated differences are higher, lower or the same as the metrics of the process in question will appear in the **Performance for process** section.

View process metrics by entity

1. In the performance types section, click **Performance for Entity**.
2. In **Filters** click **Step selection** and choose **All the steps**.
3. Click **Select Metric**, then choose the desired metric.
4. In the list of entities, click on the desired entity: the metric calculated for the selected entity on all steps of the process will appear in the **Performance for Entity** section.
5. (Optional) Click on the entity's progress bar to view details of the metrics available for the entity.

View metrics of a step by entity

1. In the performance types section, click **Performance for Entity**.
2. In **Filters** click **Step selection** and choose the desired step.
3. Click **Select Metric**, then choose the desired metric.
4. In the list of entities, click on the parent node: the metric calculated for all the process's entities on the selected step will appear in the **Performance for Entity** section.
5. (Optional) To view details of the metrics available for the entity, click on the entity's progress bar.

View metrics for entity nodes

1. In the performance types section, click **Performance for Entity**.
2. In **Filters** click **Step selection** and choose the desired steps.
3. Click **Select Metric**, then choose the desired metric.
4. In **Entity - Deploy**, select the level of child entities to display for the desired node.
5. (Optional) To view entities that have run submission late, select **On time submission**.
6. In the list of entities, click on the desired node: the metric calculated on the step or steps selected for the node and any levels of child entities will appear in the **Performance for Entity** section.
7. (Optional) To view details of the available metrics, click on the progress bar if the node or entity.

Working on process reports (contributor)

Introduction

This module details some of the procedures for generating reports on data of the process open in the contributor cockpit.

Extract a report on consolidation journals

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Journals book

1. In the **Journals filter** section, select the type of journal to display, any category or node of categories by which to filter the journals and, if desired, indicate one or several journals of the selected scenario/period.

2. In the **Rows filter** section, select the accounts to be included in or excluded from the report (only main accounts, result accounts) and specify the type and/or nature of the rows to be recovered on the selected accounts (detail, variation, normal) and their origin.
3. In the **Scenario/period** section, select the desired scenario/period.
4. In **Grouping and Sorting**, define the grouping and sorting mode for the headers of journals and rows in the report table.

Generate an ad-hoc analysis report

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Ad-hoc analysis

In the ad-hoc analysis filters table, the **Scenario**, **Period**, **Entity** and **Amount type** dimensions must be defined. Do the following on every row of every dimension.

1. In **Filters**, select the type of value to be included in the analysis, then set the desired value.
2. (Optional) To make the form display all details to the highest level for the analysed data, select the **Detail** option, then select the desired display mode.
3. (Optional) To add filters from other dimensions, click ⊕ and repeat steps 1 and 2 to set a new dimension filter on the new row.
4. To obtain the analysis results in XLSX format, click **Download**, otherwise click **Next** to view them in a pivot table.

Actions section of Detail summary and step tabs

User

Application database > Processes tile > select process > Contributor > select Detail summary/step tab

Element	Description
Steps	Only on the **Detail summary** tab. Allows you to move between tabs. See "Steps" on page 178.
Preliminary data processing	Only on the **Detail summary** tab. Allows you to run, for the selected entities, preliminary data processing on original scenarios for amounts and entity journals.
ETL	Allows you to run one of the ETL jobs that have been set up for the process. See Extraction, Transformation & Loading.
Quick Data Loader	Allows you to load data via the Quick Data Loader utility, as an alternative to ETL. See Quick Data Loader Quick Data Loader.
DTP	Only on the **Step** tab. Allows you to run the Analytical Workspace's *Data Transformation Packages*. See Data Transformation Package.
Edit windows	Allows you to enter original gross amounts, intercompany entries and entity journals via the web interface. See "Edit windows" on page 178.
Other Edit windows	Allows you to enter reconciliation accounts and notes via the web interface. See "Other Edit windows" on page 179.
Form	Allows you to access data entry forms.

Element	Description
IC cockpit	Allows you to run intercompany matching from a dedicated cockpit. See IC matching process.
Cash flow planning	Allows you to access Cash Flow Planning data processing management windows. See "Cash flow planning" on page 179.
Diagnostics	Allows you to run diagnostics and access the results log. See "Diagnostics" on page 179.
Snapshot	Only with Snapshot active and set as by entity. Allows you to create and restore snapshots. ***Note**: When the snapshot is run from the detail summary tab, the system performs the snapshot on all datasets associated with the process. However, when the snapshot is run from one of the process steps, the system only performs the snapshot on the datasets associated with the selected step.*
Entity data processing	Allows you to run entity data processing enabled for the process on the original scenario. In submission by scenario/period processes, the list of scenarios to process can be edited. ***Note**: The user must select the original scenarios/periods and data processing to perform. The system only processes entities included in the scenario/period selected in the cockpit. To process entities present in process scenarios other than that from which the cockpit was opened, the cockpit must be accessed by selecting the scenario/period in which the entity is present or the data processing must be run from the consolidator cockpit.*
Submit	Manage submission and approval activities for which the user is authorised, on the selected entities. • In the **Detail summary** tab, this opens a window to select the original scenarios/periods and step up until which you want to submit. • In a step tab, this automatically sets the value of the necessary parameters and runs the submission. See Submission.
Reject	Manage the rejection of entities selected by the higher node manager. • In the **Detail summary** tab, this opens a window in which you can select the original scenarios/periods and the step up until which you want to perform the rejection and potentially insert a note and the reasons for rejection. • In a step tab, this automatically sets the value of the necessary parameters and runs the rejection. See Submission.
Utilities	Allows you to copy amounts, entity journals and notes between scenarios, lock and unlock data entry, update the submission status of entities based on the data entered, and copy CFP data and overrides. See "Utilities" on page 180.
IC spreading	Only if intercompany spreading is enabled on the process and data processing and if the process relationship type set to by entity/custom dimension 2. Allows you to run intercompany spreading data processing. See IC Spreading.
Process reports	Allows you to generate system reports, i.e. reports related to data processing and process data. See "Process reports" on page 180.
Report bursting	Allows you to manage report bursting data processing. See "Report bursting" on page 181.

Element	Description
Data Operations	Only on the **Detail summary** tab. Allows you to run operations related to the forecast and data calculation and monthly splitting on scenario data. See "Data Operations" on page 181.
Calculation logics	Allows you to run calculation logics en masse for the selected process, or filter calculation logics based on process scenarios and periods. See Processes cockpit - Contributor – Calculation logics.
Allocations & Closing	Allows you to run routines or rules of the execution plan for allocations and closing. See Allocation & Closing Overview.
Income Taxes	Allows you to calculate taxes for the year. The data processing only works on amounts, specifying deductible accounts, adjustments and tax credits.
XBRL	Allows you to select an instance to process, generate XBRL files and manage exported files. See Generate Xbrl instance.
Banca d'Italia Matrix format	Allows you to generate text files in the specific format that the Bank of Italy requires of Italian banks to produce regulatory data for supervisory purposes.
Dividends distribution	If a distribution rule is set for the entity, this allows you to run the dividend distribution for the selected entity.

Steps

Element	Description
<step name>	Opens the tab for the selected step.

DTP

Element	Description
Activity cockpit	Opens the DTP activity cockpit. See DTP Cockpit page.
Warnings report	Opens a window containing the report of the anomalies found by the data processing for Data Transformation Package tasks. See Anomalies ReportAnomaly report.
Checking rules	Opens the window containing the report of the checking rules for Data Transformation Package tasks. See Checking rules reportControl rules report.

Edit windows

Element	Description
Edit Amounts	Opens a page to enter original gross amounts from the web interface. See Gross Amounts.
Edit IC	Opens a page to enter intercompany entries from the web interface. See IC Amounts.
Edit Entity journals	Opens a page to enter entity journals from the web interface. See Entity journals.

Other Edit windows

Element	Description
Edit Reconciliation accounts	Allows you to edit reconciliation accounts via specific windows.
Edit Notes	Allows you to edit notes via specific windows.

Cash flow planning

Element	Description
Profit & Loss	Shows the (gross and intercompany) amounts of the entity's P&L accounts for the selected scenario. See The projected P&L.
Project variations	Opens the window with the list of (normal or variation) BS accounts associated with an accounting rule, with the possibility of entering overrides. See Projected Variations.
Balance sheet	Opens the window with the balances of the available initial actual balance sheet accounts (most recent balanced actual balance sheet) by entity. See Initial Actual Balance Sheet.
Accounting entries	Double-entry journals at the user's full discretion, used to manage specific or exceptional cases. See Accounting entries.
L/T Financing	Opens the window with the list of entries related to financing requests and repayment. See L/T Financing.
Assets	Opens the window with all entries related to the management of assets. See Assets.
FX rate hedging	Opens the window with the list of all entries related to the management of FX rate hedging instruments. See Fx hedging.
Weights	Opens the window with the list of available weights for weighting values on one or several entities. See Weight Types and Weights.
Calendar	Opens the list with the available payment and collection schedules for one or several selected entities. See Payment Calendar.
Show entries	Opens the window with all entries generated by the system after planning data processing. See Entries details report.

Diagnostics

Element	Description
Diagnose	Runs diagnostics for the selected entities. • In the **Detail summary** tab, this opens a window with customisable filters. The options give you the opportunity to update the results log. • In a step tab, this automatically sets the value of the necessary parameters for the relevant step and runs the diagnostics directly. See Diagnostic.
Diagnose and update log	Only in a step tab. Runs diagnostics for the selected entity and step and updates the diagnostic results log. In the Detail summary tab, you can choose to update the log in the diagnostics results window. See Diagnostic.
Diagnostic results log	Opens the diagnostic results log for the selected entities. • In the **Detail summary** tab, this opens a window to choose the step. • In a step tab, it displays the log for the selected step only. See Diagnostic results log.

Utilities

Element	Description
Copy amounts and journals	Copy amounts, notes and entity journals from one active original scenario to another. ***Note**: the source scenario must be visible to the user, while the target scenario must be editable by the user.* See "Copy amounts and journals window" on page 186.
Lock data	Prevents any user from editing the data of the selected entities/steps, regardless of their rights and regardless of submission. See "Lock data and Unlock data windows" on page 228.
Unlock data	Unlocks blocked data entry for the selected entities/steps. See "Lock data and Unlock data windows" on page 190.
Update status based on data	Updates the data entry and submission status of the selected entities. If selected for nodes, all the entities of the selected node will be updated.
Reset submission states	Resets the submission status of all entities for the selected scenario/period. The reset includes submission statuses on the contributor, consolidator and intercompany cockpits, the workflow tasks and the “task complete” declaration for data entry in the forms.
Copy CFP Data and Overrides	Copies principal data, overrides and inter-entity cash flow planning events between processes. See "Cash flow planning" on the previous page.
IC Spreading	Allows you to run data processing for intercompany spreading, which writes off the existing intercompany declarations and reallocates the amounts to CTP custom dimension 2 based on the declarations made by the counterparty, maintaining the original unbalanced amounts. See IC Spreading.

Process reports

Element	Description
Journals book	Allows you to extract a report with all the journals entered on the entities. See "Journals book window (for the contributor)" on page 182.
Ad-hoc analysis	Runs the data analysis via drill down onto the CCH Tagetik dimensions. See "Drill down parameters page (ad-hoc analysis)" on page 185.
Allocations and closing: entries detail	Displays the journal entries generated by the data processing for allocations and closing. See Allocations and closing: entries detail page.
Pick-up check report	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to control the effect generated by Equity pick-up data processing on entities. For every direct investment relationship, the report compares the value of the owner entity’s financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference. See "Pick-up check report window (contributor)" on page 186.
Pick-up query	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to analyse in detail the pick-up journals generated by the Equity pick-up data processing on entities. The report is only available if **Generate detailed information for the pick up query** has been selected in the pick-up rules for the Equity pick-up data processing. See Equity Pick-Up.

Element	Description
Entities submission status	Only on the **Detail summary** tab. Allows you to extract a report showing the following for each node: • entity submission statuses for every step of the process • the user that made the most recent status change, with the relative date If nodes are selected, the report only includes the entities belonging to the selected nodes.
Submission status	Only on the **Detail summary** tab. Allows you to extract a report showing submission statuses of the selected entities and of the nodes to which they belong, in the various steps, based on the root. See "Submission status window (for the consolidator)" on page 231.
Submission Status grouped by Entity Node	Only on the **Detail summary** tab. This allows you to extract a report showing, for each contributor node, the number of entities submitted and not submitted in the various steps, regardless of user rights. Access to the report requires the function (0001937) to be included in the user's role.
Submission Status grouped by Consolidation Method.	Only on the **Detail summary** tab. This allows you to extract a report showing, for each consolidation method, the number of entities submitted and not submitted in the various steps, regardless of user rights. Access to the report requires the function (0001937) to be included in the user's role.

Report bursting

Element	Description
Show generated files	• Shows the files generated by the report bursting data processing. • Allows you to download the generated reports. • Allows you to view the log of reports already sent to users.
Generate	Allows you to generate reports en masse based on a previously defined Collaborative Office document or a web form.
Send	Allows you to distribute the generated reports via email or FTP.
Generate and send	Allows you to generate and distribute reports simultaneously.

Data Operations

Element	Description
Forecast models	Allows you to define and run a Forecast model on the scenarios associated with the selected process. See Forecast Model.
Algebraic operations	Allows you to run sequences of operations that enter, on a scenario, data obtained by combining data from other scenarios. See Algebraic Operations.
Custom Splitting on Periods	Allows you to run a monthly splitting routine that defines the periodic data of one or several accounts based on the cumulated data for a certain period. See Custom Splitting on Periods.

Partition data details window

User

Application database > Processes tile > select process > Contributor > step tab > (Actions section) DTP > Activity cockpit >

Purpose of window

This window shows details of the data of an Analytical Workspace dataset partition populated by the activity contained in a task of the workflow associated with the process.

Window sections

Element	Description
Context information	Shows detailed dataset context information: • process • scenario • period • entity • dataset physical partition name
List of data	Shows the list of data loaded to the dataset.
Attributes	Allows you to change the editable attributes of the dataset data.

Specific instructions for editing data

Only users with the necessary rights can edit this data individually or en masse using multi-row selection in the **Attributes** section. The data in the table are only added after the changes have been saved.

The fields for which the **Personal data protection** option is selected cannot be included in a multi-row selection if the partition is in a calculation layer. The fields and terms contained in them cannot be found using the **Filter** function.

***Note**: an individual record cannot be added, removed or copied if the **Select all** option is selected.*

Journals book window (for the contributor)

User

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Journals book

Purpose of window

Allows you to extract a report with all the journals entered on the entities.

Window sections

Section	Description
Report format	Allows you to select the format of the report.
Scenario /Period	Allows you to select the desired scenario/period.

Section	Description
Journals filter	Allows you to specify any filters to be applied to journal headers, in order to extract only the desired journals and limit the volume of data extracted. ***Note**: regardless of the filters applied, the system will only extract data from journals belonging to entities or consolidator nodes selected in the cockpit and in categories visible to the user.*
Rows filter	Allows you to specify any filters to be applied to journal rows, in order to extract only the desired rows and limit the volume of data extracted. ***Note**: regardless of the filters applied, only rows with amounts other than zero and rows on accounts visible to the user will be extracted.*
Grouping and Sorting	Allows you to specify how the extracted data is grouped and sorted.

Options in the sections

Element	Description
Report format	
XLSX	Generates the report in XLSX format.
PDF	Generates the report in PDF format. This format has some limitations and must be extracted without grouping journals, but with synthetic grouping of rows with origins. This report is not available for processes with relationship type equal to **by entity - custom dimension 2** or **by entity - synthetic custom dimension 2**.
Scenario /Period	
Scenario /Period	Mandatory field. • With the **Consolidation scenarios** type selected, this allows you to choose an active consolidation scenario/period that is visible to the user and linked to the process. • With the **Original scenarios** type selected, indicate the scenario/period from which the cockpit was accessed. Can only be changed in single submission processes.
Journals filter	
Category type	Journal type to be exported. ***Note**: only Entity Journals can be selected.*
Category	Only with **Category node** not selected. Allows you to select one or several categories from among those visible to the user. ***Note**: only Entity Journals can be selected.*
Category node	Only with **Category** not selected. Allows you to select a grouping of categories from among those with at least one category visible to the user. If a value is specified, the system extracts the journal data on categories belonging to the selected node, moving through them progressively to the last level.
Journal number	Allows you to select one or several journals belonging to the selected scenario/period.
Rows filter	
Show only main accounts	Only extracts the rows on the most important accounts involved in the journal, or those which are displayed as **Main accounts on Journals** in the data model. See .

Element	Description
Exclude Result accounts and Variation	Selected by default. The extraction excludes rows on accounts that belong to the set of result accounts specified from among the requirements of the process's calculation logics. In particular, the P&L result account, the BS result account and their variations (determined taking account only of control groups belonging to the process) are excluded.
Account type	If specified, this only allows you to recover the rows on the indicated account type: • **Detail** • **Variation** • **Normal** (default)
Account nature	If specified, this only allows you to recover rows on accounts of the indicated nature: • **Profit & Loss** • **Balance Sheet** • **Memorandum** • **Other Variations** • **Other stocks**
Show Counterparty	Enters information related to the counterparty (counterparty entity, CTP custom dimension 2, transaction currency, transaction currency amount, total CTP amounts) in the reports.
Hide rows set to 0	The extraction excludes rows that balance equally, custom dimensions and counterparty.
Origin	Allows you to select one or several origins from among those that are consistent with the selected **Scenario Type**.
Grouping and Sorting	
Journals grouping	Ways in which journal headers must be grouped: • <empty field>: grouping by journal number • **Journals grouping**: grouping based on the **Grouping for Journals book** label set manually on the journal headers ***Note**: only Journals grouping can be selected.* • **Entity 2**: grouping for Entity 2 and extraction of consolidation journals only
Journals order	Ways in which journal headers can be ordered: • **Journal number** (default) • **Category / Journal number**
Rows grouping	Ways in which journal rows can be grouped: • **Analytic** (default): no grouping • **Synthetic**: grouping by account, custom dimensions and counterparty • **Synthetic with origin**: grouping by account, custom dimensions, counterparty and origin
Rows order	Ways in which journal rows can be ordered: • **Account/Origin** (default) • **Origin/Account**

Buttons in the window

Element	Description
Run	Runs the report. Once complete, the system displays a log window and downloads the report in XLSX format.
Cancel	Closes the window.

Drill down parameters page (ad-hoc analysis)

User

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Ad-hoc analysis

Purpose of the page

This page allows you to run an analysis of the data, or extract numerical data of the financial model from the database and analyse it in the interface, using a pivot table, or in Excel, by downloading an XLSX file.

Page sections

Element	Description
Drill down parameters (or ad-hoc analysis filters)	Allows you to define the data on which to run the ad-hoc analysis. Every row identifies a dimension/hierarchy on which to filter the data.
Data processing management buttons	These allow you to view data from the analysis and/or download them in an XLSX file.

Details of the drill down parameters table

Element	Description
	Adds a row.
	Deletes a row.
Size	Allows you to select an element of hierarchy node of a dimension. ***Note**: for accounts, it is also possible to filter by control group, financial statement template or form.*
Filters	Allows you to define the values to be included in the analysis through search operators. • **=**: selects a specific element or node of the dimension. • **like**: selects all records for which the code is similar to the search term.
Detail	• Active: analytical data up to the highest level of detail is reported for every extracted element. • Not active: the analysed elements are filtered based on the requirement set in **Filters** and aggregated, without showing the details, at the level of the individual element.
Display mode	Only with **Detail** selected. Allows you to specify how the analysed elements are displayed. • **Code** • **Description** • **Code and description**

Data processing management buttons

Element	Description
Next	Closes the window and displays the data from the analysis in a pivot table.
Download	Downloads an XLSX file containing the analysed data. In the file, the **Pivot table** spreadsheet shows details of the analysed data in a pivot table, the **data** spreadsheet shows the list of the analysed data in a table.

Pick-up check report window (contributor)

User

Application database > Processes tile > select process > Contributor > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Pick-up check report

Purpose of window

This window allows you to download a report on the equity pick-up data processing. In particular, it allows you to check the effect generated by the equity pick-up data processing on the entities. For every direct investment relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference.

Fields in window

Element	Description
Scenario/period	Opens a window to select one or more scenarios/periods on which to define the value of the owner entity's financial investment.
Entity	Opens a window to select the owner entity.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Copy amounts and journals window

User

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select one or several entities or nodes > Utility > Copy original amount and journals

Purpose of window

This window allows you to copy the following:

- financial statement data and entity journals from one scenario/period to another and from one entity to another
- journals from one scenario/period to another and between entities and scenarios/periods

***Note**: the copying of financial statements and journals can be scheduled as a job task in the task workflow of the process steps. For more details, see "Copy amounts and journals task window" on page 224.*

Available options

Element	Description
Filter set	Allows you to select a set of filters from among those previously saved. ⋮ : allows you to update, rename or delete the set.
Gross and note	Copies Gross and notes.
Entity journals	Copies entity journals.

Element	Description
Customize	
Gross amount	Only for **Gross and note**. Copies gross amounts.
Reconciliation account	Only for **Gross and note**. Copies reconciliation accounts.
IC cockpit notes	Only for **Gross and note**. Copies the notes inserted in the IC entry matching step.
IC amounts	Only for **Gross and note**. Copies intercompany entries.
Notes	Only for **Gross and note**. Copies the notes added to cells of forms.
User's details and date of origin	If selected, this records the user and date of the source data on the copied data. If not selected, it records the user as the user code that performed the copy and the date as the date/time at which the copy was performed.
Markup	Only for **Gross and note**. To be applied to the copied amount to convert it into a different unit of measurement from the one used in **Copy From** in the scenario. 0: no coefficient to apply. For example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.
Transactional form	Copies data entered in one or more transactional forms. See .
Copy From	
Scenario	Source scenario(s) visible to the user. The copy can be performed from several scenarios at the same time, by choosing from among the active original scenarios on which the user is authorised.
Period	Source period. Only to be indicated if a single scenario has been selected in **Copy From**. If the period is not specified, the copy is performed from every period onto itself. This allows you to copy data for all open periods for the selected scenario. To copy data related to several but not all periods of the selected scenario, the copy must be repeated as any times as there are periods to be copied.
Entity	Only for **Gross and note** and **Entity journals**. One or several source Entities. If the entity is not selected or if several entities are selected, the copy is performed from all entities onto themselves.
Advanced filters (Copy From)	
Origin	Enter the origin of the source data. These origins are set by default: • **BREAK_BACK** • **INPUT_DEFORM** • **INPUT_WEB** • **MAP** • **QDL** Only for **Entity journals** and **Consolidation journals**: the origin refers to the journal rows, not the header.
Category	Category on which to filter the source data.
Account nodes	Filters source data based on the accounts associated with one or more nodes of a given hierarchy defined on the account dimension.

Element	Description
Journal number	Only for **Entity journals** and **Consolidation journals**. Allows you to select individual source journals to further filter the data.
Select accounts from form	Filters source data based on the editable accounts present in one or several forms.
Transactional forms	Only if the copy is performed from transactional forms. Filters the source data based on the transactional forms.
Copy To	
Scenario	Active and original target scenario, editable by the user. Only one can be selected.
Period	One or several target periods. Must be indicated in the following cases: • The source period has been specified, so one or several target periods must be specified. • No source period has been specified and, in the source scenario, the periods are different from those of the target scenario. It does not have to be indicated in the following cases: • No source period has been specified. • The periods of the source scenario are identical to those of the target scenario.
Entity	Only for **Gross and note** and **Entity journals**. Target entity code. To be indicated to copy data onto a single entity other than the one already indicated in **Copy From**. Not to be indicated in the following cases: • To copy data onto the same entity from which it will be read. • To copy data from several entities. In this case, the system performs the copy from all entities onto themselves.
Advanced filters (Copy To)	
Origin	Enter the origin that will be assigned to the copied data: • **COPY_GENERAL** • **COPY_ORIG**: the system keeps the source origin for the copied data. • **INPUT_WEB**
Category	Overrides the target category. If this is not specified, the copy is performed while keeping the source category the same.
Deletion policy: based on input account	If a filter is applied to the accounts, this indicates whether that filter will also be applied during the deletion of any data existing in the copy target tables. This is useful when, for example after performing the copy filtered on a number of forms, the user wants to rerun the same copy but only for one or more forms without affecting the values of other copied forms.

Buttons on the page

Element	Description
Save new filters set	Saves the filters set, to be reused later.

Submission status window (contributor)

User

Application database > Processes tile > select process > Contributor > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Submission status

Purpose of window

This window allows you to generate a record of the submission statuses of the selected entities and of the nodes to which they belong, in the various steps, based on the parent node.

Available options

Element	Description
Original scenarios/periods	Not editable. Scenario/period from which the cockpit was accessed.
Entities	By default, the field reports the entities selected in the cockpit. If nodes are selected, reports are extracted for the entities belonging to the selected nodes, moving through them progressively to the last level. If the pre-completed field is edited, entities with the following characteristics must be selected: • Belonging to the selected process and scenario/period or at least one of the scenarios/periods of the process for single submission processes. • Not only counterparty or only consolidator. • Visible to the user. If no entity is selected, the submission statuses of all entities that meet the above requirements will be displayed.
Step	Business Workflow step associated with the process. Only contributor and mixed steps can be selected in the contributor cockpit.
Status	Submission activity progress status.
Advanced filters	
Entity consolidation method	Allows you to filter entities in the report based on the following consolidation methods: • **Cost** • **Equity** • **Line-by-line** • **Proportional**
<Attributes>	Filters the entities in the report based on the value of the specific attributes enabled in the **Entity** elements table.

Entities submission status window

User

Application database > Processes tile > select process > Contributor > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Entities submission status

Purpose of window

This window allows you to generate a record of the submission statuses of the selected entities in various steps, with an indication of the user and the date on which the status was last changed.

Available options

Element	Description
Original scenarios/periods	Not editable. Scenario/period from which the cockpit was accessed.
Entities	By default, the field reports the entities selected in the cockpit. If nodes are selected, reports are extracted for the entities belonging to the selected nodes, moving through them progressively to the last level. If the pre-completed field is edited, entities with the following characteristics must be selected: • Belonging to the selected process and scenario/period or at least one of the scenarios/periods of the process for single submission processes. • Not only counterparty or only consolidator. • Visible to the user. If no entity is selected, the submission statuses of all entities that meet the above requirements will be displayed.
Step	Business Workflow step associated with the process.
Status	Submission activity progress status.
Advanced filters	
Entity consolidation method	Allows you to filter entities in the report based on the following consolidation methods: • **Cost** • **Equity** • **Line-by-line** • **Proportional**
<Attributes>	Filters the entities in the report based on the value of the specific attributes enabled in the **Entity** elements table.

Lock data and Unlock data windows

User

Application database > Processes tile > select process > Contributor > Detail summary > select one or several entities or nodes > Utility > Lock data or Unlock data

Purpose of window

This window allows you to lock or unlock data editability on nodes and entities and on specific steps.

***Note**: when editability is locked, the data cannot be edited by any user, regardless of their rights and regardless of submission.*

Available options

Element	Description
Original scenarios/periods	For processes with business cycles by scenario/period, this allows you to select the scenarios/periods that are visible to the user and belong to the process. By default, the scenario/period with which the cockpit was accessed is proposed. For processes with a single business cycle, the field is not editable and shows the list of all scenarios/periods belonging to the process on which you are working.

Element	Description
Entities	Non-editable field. Shows entities belonging to the nodes and to the selected scenarios/periods. Those nodes are the ones visible to the user, where **Only counterparty** or **Only consolidator** has not been selected in at least one of the selected original scenarios/periods.
Steps	Mandatory field. Allows you to select the steps on which to run data processing. The proposed steps are the contributor and mixed steps.

The consolidator cockpit

Contents

This section covers the following topics:

Consolidator cockpit 192
Consolidator cockpit page 195
Summary tab 196
Step tab 198
Organisation section of the <step> tab 199
Workflow section of the <step> tab 200
Consolidation scenarios tab 201
Customising the consolidator cockpit 203
Working in the Consolidation Scenarios tab 203
Working on process reports (consolidator) 203
Actions section of the Summary and Step tabs 204
Actions section of the Consolidation scenarios tab 209
Copy Consolidation window 210
Drill down parameters page (ad-hoc analysis) 212
FX rate difference reserves analysis window 213
Financial investments - Net equity analysis window 214
Pick-up check report window (consolidator) 214
Journals book window (consolidator) 215
Change consolidation scope report window 217
Entity/Classifier Relationship page 218
Consolidation area scope page 219
Copy amounts and journals window 221
Copy amounts and journals task window 224
Net Result and Reserves Group Evolution analysis 227
Net Result and Reserves Group Evolution analysis window 227
Lock data and Unlock data windows 228
Copy consolidation on original 228
Copy consolidated on original window 230
Submission status window (for the consolidator) 231

Consolidator cockpit

What it allows you to do

The consolidator cockpit allows the consolidator to do the following:

- Manage all activities associated with the data collection process concerning consolidation nodes (entry of consolidation journals, submissions, approvals, data processing) in a simple and structured

manner.
- Monitor in real time the progress of the activities of every consolidation and sub-consolidation node in order to meet deadlines.
- Monitor the status of consolidation data processing.

Information visible to the consolidator

In the cockpit, all consolidators view the consolidator steps or mixed contributor/consolidator steps of the task workflow. On the displayed steps, the user only sees the organisational hierarchy for which they are authorised to work and, within it, the entities or nodes for which the financial statements need to be consolidated. They do not see the scenarios or periods stored offline or inactive consolidation scenarios.

The consolidator cockpit is therefore structured differently depending on the user viewing it, but also depending on the process characteristics. The number and type of activities and data processing also depends on the process rule settings.

Data processing status of nodes by consolidation scenario

In the cockpit's **Consolidation scenarios** tab, a status indicator is associated with every consolidation node/scenario. The indicator shows whether or not the node of the specific consolidation scenario needs to be re-processed to obtain consistent consolidation data in the event of changes to input data (e.g. following the entry of a gross amount, or an intercompany declaration).

In some cases, the node status indicator may also remain red at the end of the data processing. This could happen in the following cases, for example:

- If a gross amount has been edited on an entity and the consolidator does not have write permissions for the entity on the original scenario.
- If the original scenario was locked immediately after the original data was edited without data processing having been run.

If necessary, the data processing may not be limited to the selected node only. In fact, the system assesses whether it is also necessary to process other nodes that have not had their data directly edited. The purpose is to create consolidated data in line with the consolidation rules set by the administrator/consolidator user. One example of this is data processing for net equity reclassification.

Consolidation data processing according to process submission type

In general, processes involve either submission by scenario/period or single submission.

For single submission processes, the node status indicator remains red until all periods of the process have been processed.

Single submission processes

In single submission processes, consolidation is performed on all the scenarios/periods by default. When a period is modified, however, the default consolidation mode (impacted mode) only reruns consolidation for the modified period. This behaviour does not consider the impact that the modification of a specific period may have indirectly on the other periods of the process.

When working in a process with periods that are interconnected for logical reasons, you can deactivate impacted mode and then rerun the consolidation on all periods without any filter on the edited data.

For details on impacted consolidation mode, see Overview Impacted.

Element	Description
Consolidation with periodic calculation	Periodic consolidation is used for accounts in which values accumulate over the year, and particularly accounts of a P&L nature. The values are copied from previous periods and the contribution of the processing period is added. Consolidation is performed systematically on the combination of periods and, even if one or a few periods are amended, the system reruns the consolidation on all periods of the process. For example, if periods 1 to 12 (or from January to December) are consolidated, but only period 5 (May) is modified, the system reruns consolidation on all the process's periods after period 5.
Consolidation with progressive calculation	Progressive consolidation is used for accounts for which it is necessary to have a photograph of the situation at the processing period closing date, and particularly those of a BS nature. In this case, to avoid mass data processing, if one or a few periods are modified, the system only reruns consolidation on the period preceding the last consolidated period.

In the interface, an indicator on the period shows whether the period has already been consolidated (green) or is to be consolidated (red). The indicator therefore varies based on the presence of modifications on significant nodes.

A node is significant when at least one of its entities is part of a consolidation scenario. Therefore, some nodes may only be significant in some periods. Non-significant nodes are shown in grey.
The system checks whether a node is significant based on the run period consolidation area and the previous one. A node may therefore be grey when in reality it is significant for previous periods. Custom data processing can be run in order to override the data processing for those nodes.

The task workflow of steps


Task workflow activities can be viewed as a chart or a list. In contrast to the list, the chart allows you to distinguish between activities to be run in parallel or in sequence. In the chart, every activity is represented by an icon coloured according to the activity's progress status.

The list also contains details of every activity, namely the type of activity, the description, the progress status, the data the status last changed and the user who made that change. Activities can be accessed regardless of their order, but to declare one of them complete, all previous activities must have already been declared complete.

Therefore, the step cannot be submitted (submission task is grey) until all tasks have been completed.

Task workflow example

This example shows the task workflow activities as a flow chart. The first three activities can be run in parallel. However, the others must be run in sequence. For example, the gross margin analysis activity cannot be run unless the previous planning activity has been completed.

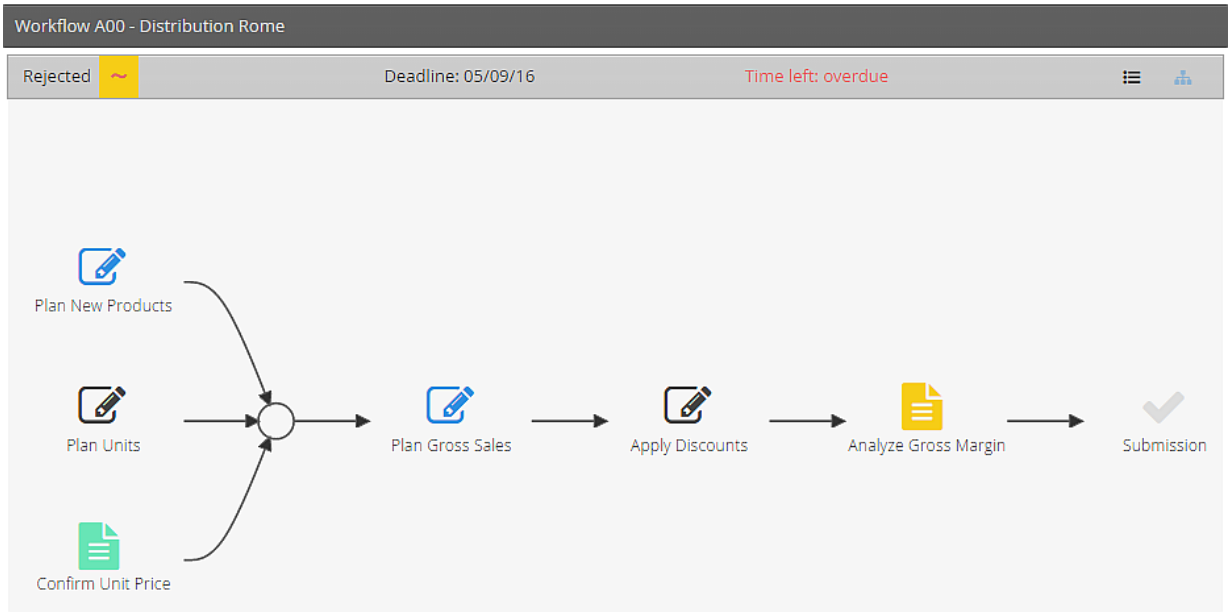

Details of the progress of individual activities.

Activities can be declared completed either manually or automatically, after the activity in question has been run. Automatic completion takes place by default for activities that run data processing, or can be overridden on any type of activity in the definition step.

Activities that are not significant for the purposes of submitting the entity are optional. This rule is set by the administrator when creating the activity.

Consolidator cockpit page


User

Application database > Processes tile > select process > Consolidator

Purpose of the page

This page allows you to monitor and manage the activities planned for groups that must submit consolidated financial statements.

What it looks like

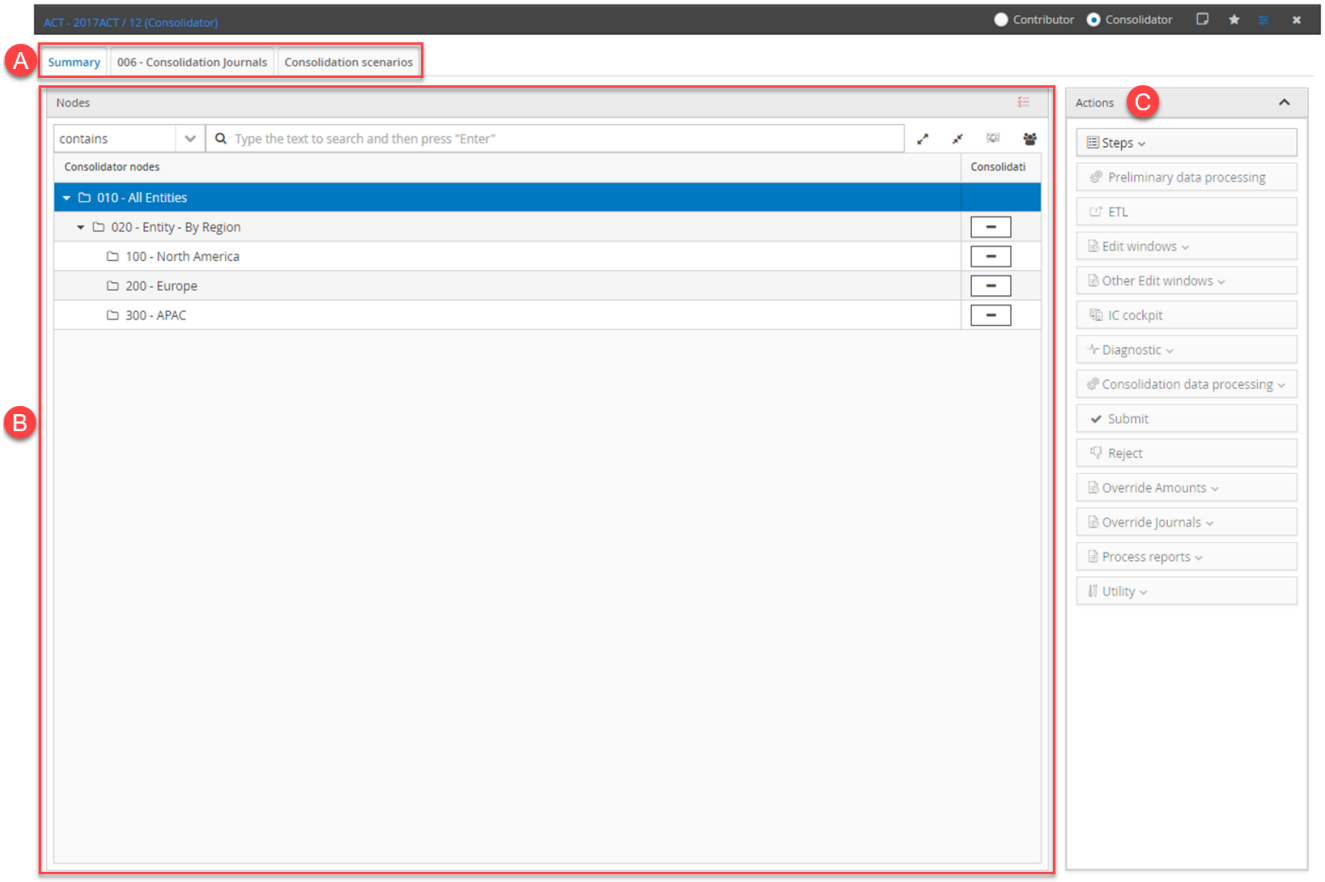

Element	Description
A	Navigation tabs
B	Specific content of the selected navigation tab
C	Actions section

Summary tab

User


Application database > Processes tile > select process > Consolidator > Summary

Purpose of the page

This page makes it possible to:

- See the summary information on data collection/submission status.
- See the overall submission progress for each consolidation node.
- Run specific actions on selected nodes.

What it looks like

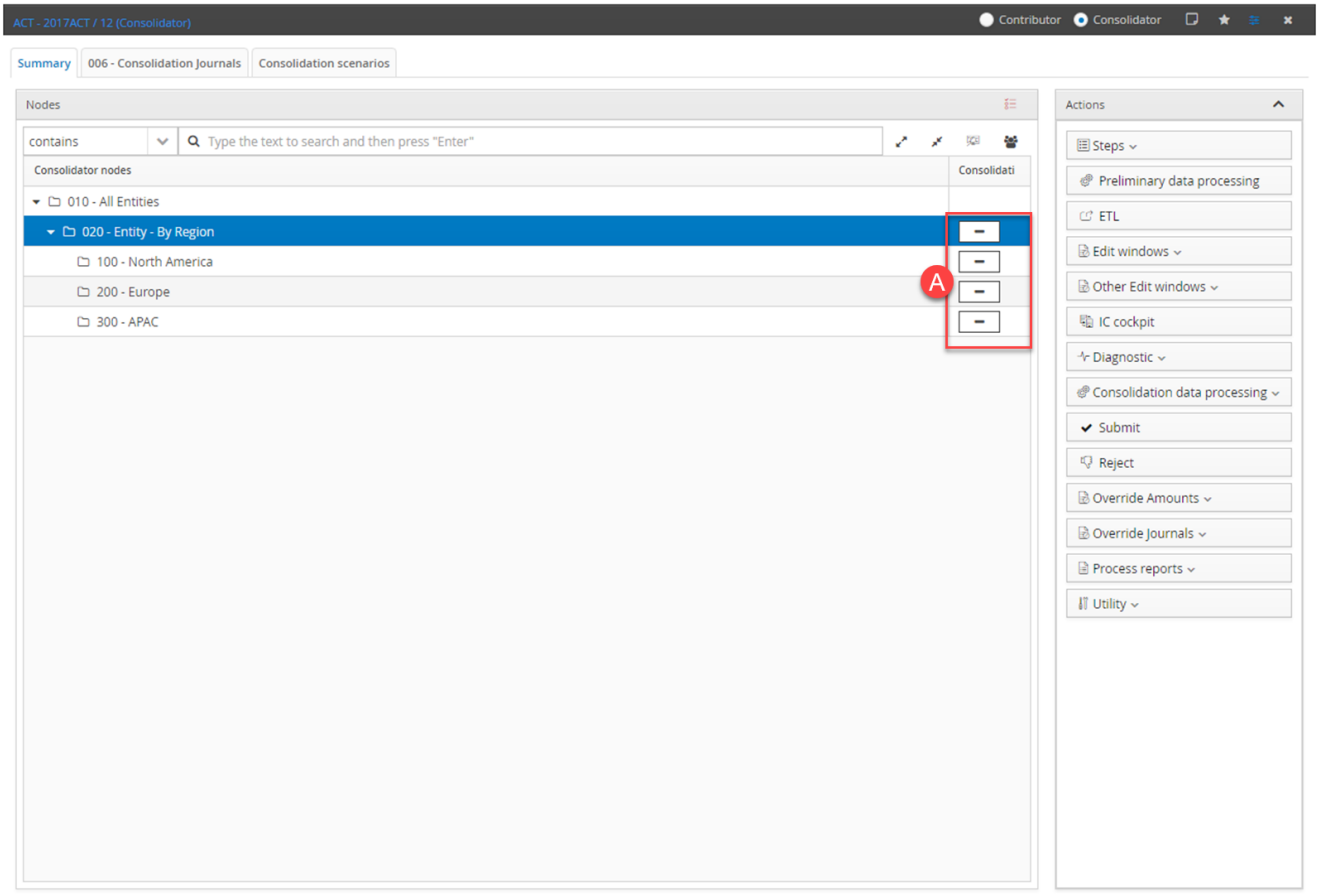

Element	Description
A	Submission progress indicators for each step.
Nodes	Elements present in the organisational hierarchy associated with the process on which the user is authorised.
Actions	Available actions for each activity that can be run on the selected nodes. See "Actions section of the Summary and Step tabs" on page 204 and "Actions section of the Consolidation scenarios tab" on page 209.

Buttons and/or links in the Nodes section

Element	Description
	This enables multi-row selection, so you can make mass changes.
	Filters entities in the hierarchy based on what is set in the filter.
	Expands the organisational hierarchy's entity tree.
	Compresses the organisational hierarchy's entity tree.
	Shows the log of submission/rejection/approval activities for the selected entities.
	Shows the users responsible for the selected entities.

Progress indicators by step

Element	Description
	Step not significant for the entity. No activity available or requested for the entity.
	No activity was carried out.
	Data collection and submission activities are underway.
	The entity has been submitted. All data is submitted and locked, ready to be processed.
	The entity has been rejected by the higher-level node manager. Data collection is available again.
	The approval process for the entity is not yet complete.

Step tab


User

Application database > Processes tile > select process > Consolidator > select step tab

Purpose of the page

This page allows you to view information on the status of submissions and the activities to be completed for the nodes of the consolidator of a specific step.

What it looks like

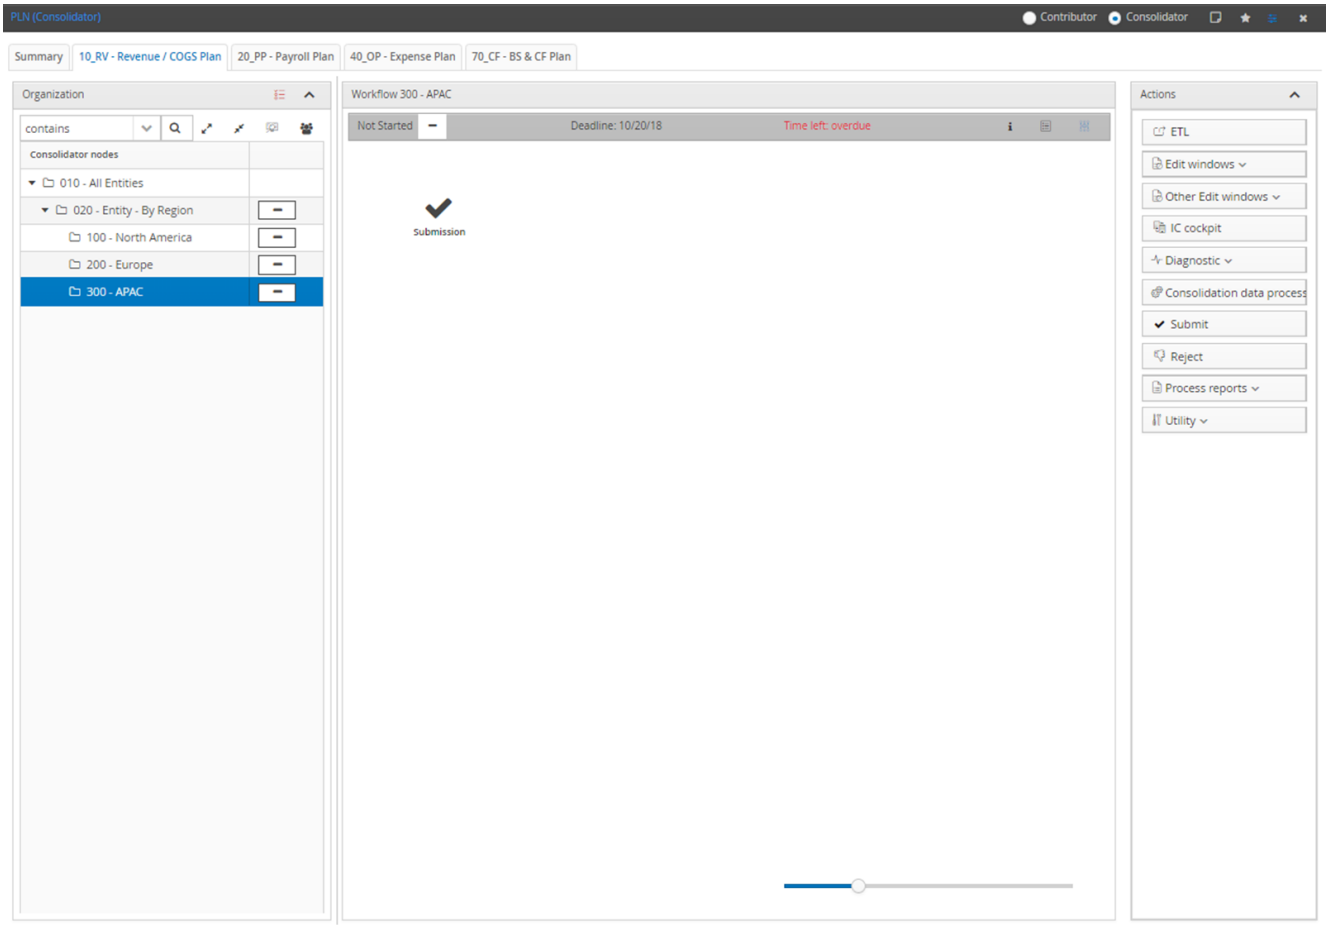

Element	Description
Organisation	Shows the following: • Entities present in the organization hierarchy associated with the process on which the user is authorised. • Submission progress indicators for every entity.
workflow	Shows the workflow chart for the tasks of the selected entity.
Actions	Available actions for each activity that can be run on the selected entities.

Organisation section of the <step> tab

User

Application database > Processes tile > select process > Consolidator > select step tab

Section buttons and/or links

Element	Description
	This enables multi-row selection, so you can make mass changes.
	Minimises the **Organisation** section, leaving only the title bar visible.

Element	Description
	Filters for a subset of elements. ***Note**: the entities to be displayed can be filtered by code or by description.*
	Expands the organisational hierarchy's entity tree.
	Compresses the organisational hierarchy's entity tree.
	Shows the log of submission/rejection/approval activities for the selected entities.
	Shows the users responsible for the selected entities.

Progress by entity

Element	Description
	The step is not significant and does not require activities for the selected entity.
	No activity was carried out.
	Data collection and submission activities are underway.
	The entity has been submitted. All data has been submitted and locked, and can be processed.
	The entity has been rejected by the higher-level node manager. Other data can be collected.
	Submission has still not been completed for the entity.

Workflow section of the <step> tab

User

Application database > Processes tile > select process > Consolidator > select step tab

Section buttons and icons

Element	Description
	Shows the colour legend.
	Shows the activities as a list.
	Shows the activities as a chart.
	If present, this shows any notes inserted by the administrator.
	If present, this shows any attachments added by the administrator.

Element	Description
	Indicates that the user is not authorised to run the activity.
	Shows the grouped activities.

Progress indicators for the activity with listed tasks

Element	Description
	Activities to be started
	• Activities in progress. • Activities to be rerun because the previous activity has been rerun.
	Activity completed
	Optional activities

Types of activity

See "Business Workflow icons" on page 25.

Actions on the task workflow activities

Element	Description
Click on the activity icon	Opens the menu of actions available on the activity. • **Open form in Web** • **Open form in Excel** • **Run** • **Task is Complete** • **Set task as not complete**

Consolidation scenarios tab


User

Application database > Processes tile > select process > Consolidator > select Consolidation Scenarios

Purpose of the tab

This tab shows information on the data processing status of consolidation nodes on the consolidation scenario and allows you to run consolidation data processing in *Impacted* mode, or only on data for which the data processing is pertinent.

What it looks like

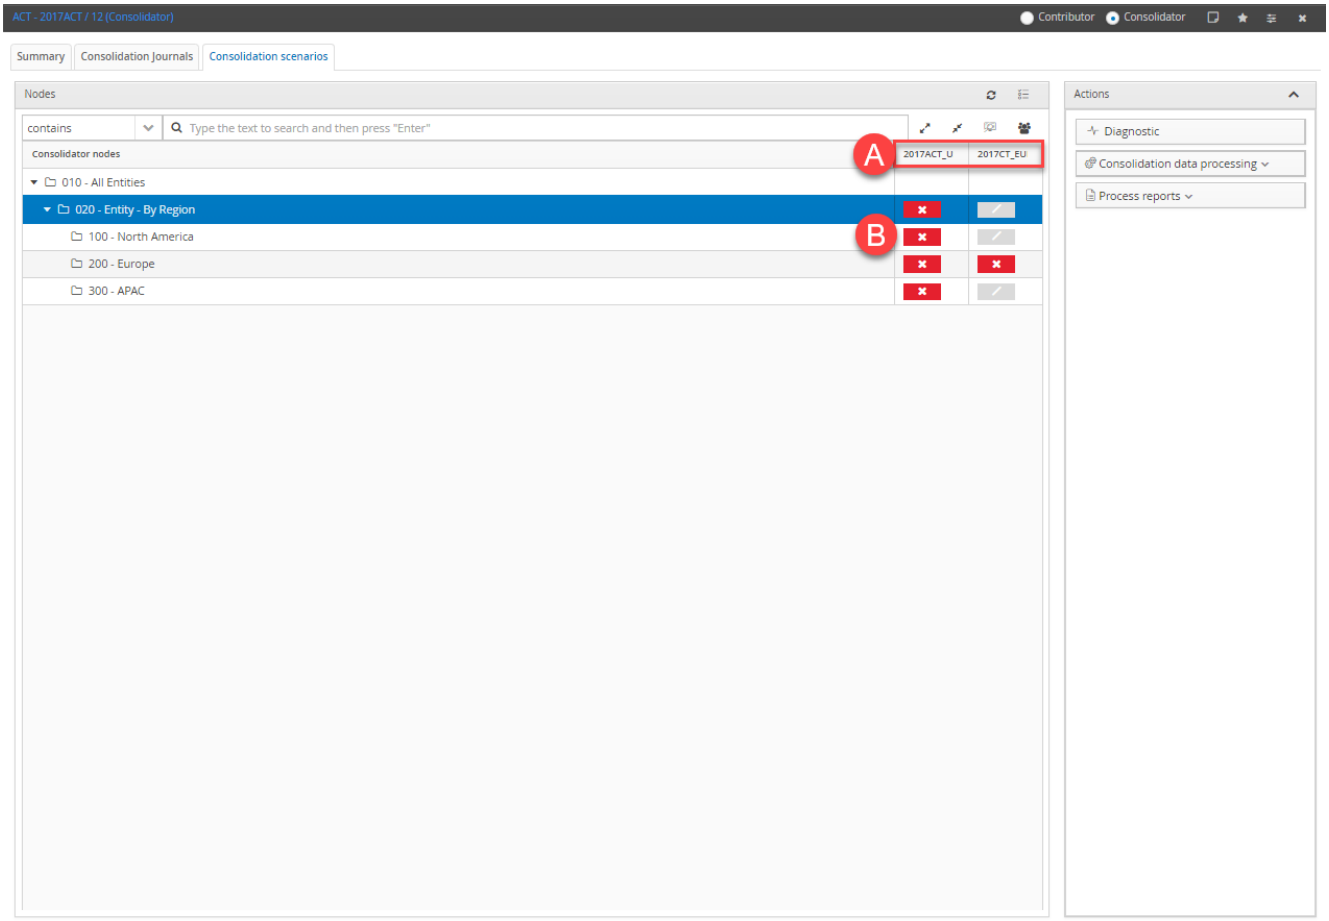

Element	Description
A	Consolidation scenarios **(B)**: in front of the scenario code, this indicates that the scenario is locked.
B	Node data processing status indicators.
Nodes	Shows the entities present in the organisational hierarchy associated with the process on which the user is authorised. : reloads Impacted status. Updates the status indicator.
Actions	Available actions for the selected node

Progress indicators by node

Element	Description
	Node not significant for the consolidation scenario. Contains no entities for a certain consolidation scenario or the entities it contains have no data to process (e.g. all entities of the node have been assessed using the at cost consolidation rule).
	Node to be reprocessed to obtain consistent data on the consolidation scenario.
	Node on which all consolidation data processing has already been run.

Customising the consolidator cockpit

Edit the header of the step tab

Main toolbar > > Settings

1. In the **Point of view** section, in **Step visualization on cockpit tabs** select the information to be booked (**Only Code**, **Only Description** or **Code and Description**).
2. Click **Save** and then on **OK**.

Working in the Consolidation Scenarios tab

Application database > Processes tile > select process > Consolidator > select Consolidation Scenarios

Update node status indicators

This procedure allows you to check whether contribution data has been edited.

In **Nodes**, click : the data processing status indicators will be updated.

Process a non-significant node

1. Select the node to process.
2. In **Actions**, click **Consolidation data processing** and select **Custom**: the **Consolidation data processing** window will appear.
3. (Optional) In **Original Scenarios/Periods**, add any desired scenarios/periods to the scenario/period with which access was gained.
4. (Optional) To only process data edited after the last consolidation data processing, select **Process only modified data**.
5. Select the data to process (entity, group, area).
6. In Consolidation scenarios/periods, select one or several consolidation scenarios/periods on which to run the data processing.
7. To start the data processing, click **Run**.

Working on process reports (consolidator)

Introduction

This module details some of the procedures for generating reports on data of the process open in the consolidator cockpit.

Extract a report on consolidation journals

Application database > Processes tile > select process > Consolidator > select Summary or step tab > select entity > (Actions section) > Process reports > Journals book

1. In the **Journals filter** section, select the type of journal to display, any category or node of categories by which to filter the journals and, if desired, indicate one or several journals of the selected scenario/period.
2. In the **Rows filter** section, select the accounts to be included in or excluded from the report (only main accounts, result accounts) and specify the type and/or nature of the rows to be recovered on the selected accounts (detail, variation, normal) and their origin.
3. In the **Scenario/period** section, specify the type of scenario/period to be included in the report (consolidation scenarios or original scenarios) and select the desired scenario/period.
4. In **Grouping and Sorting**, define the grouping and sorting mode for the headers of journals and rows in the report table.

Generate a report on the net result and reserves group evolution

Application database > Processes tile > select process > Consolidator > select tab > select entity > (Actions section) > Process reports > Net Result and Reserves Group Evolution analysis

1. In **Actions**, click **Process reports** and then on **Net Result and Reserves Group Evolution analysis**.
2. Click ... next to **Consolidation area**: the **Items selection** window will open.
3. Select one or more scenarios/periods corresponding to the process's consolidation area.
4. Click ... next to **Category node**: the **Items selection** window will open.
5. Select the node of categories on which to filter the data.
6. In **Type**, select the display mode for the consolidation journals in the report.
7. To view the detailed report of the individual adjustments with the relative journal number, select **Show journal number**.
8. Cl **Apply**: a preview of the generated report will appear.
9. To download the report in PDF format, click . To generate the report in Excel format, click .

***Note**: in the **Journal number** column, click on the desired link to view details of the entire journal.*

Generate an ad-hoc analysis report

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Ad-hoc analysis

In the ad-hoc analysis filters table, the **Scenario**, **Period**, **Entity** and **Amount type** dimensions must be defined. Do the following on every row of every dimension.

1. In **Filters**, select the type of value to be included in the analysis, then set the desired value.
2. (Optional) To make the form display all details to the highest level for the analysed data, select the **Detail** option, then select the desired display mode.
3. (Optional) To add filters from other dimensions, click ⊕ and repeat steps 1 and 2 to set a new dimension filter on the new row.
4. To obtain the analysis results in XLSX format, click **Download**, otherwise click **Next** to view them in a pivot table.

Actions section of the Summary and Step tabs

User

Application database > Processes tile > select process > Consolidator > select Summary/step tab

Actions

Element	Description
Steps	Only on the **Summary** tab. Allows you to move between tabs. See "Steps" on page 206.
Preliminary data processing	Only on the **Summary** tab. Allows you to run preliminary data processing (carry forward) on a selected scenario/period and potentially limit it by consolidator node, entity, step and category.
ETL	Allows you to run one of the ETL jobs that have been set up for the process.
Edit windows	Allows you to edit original gross amounts, intercompany entries, entity journals and consolidation journals from the web. See "Edit windows" on page 206.

Element	Description
Other Edit windows	Allows you to enter reconciliation accounts and notes via the web interface. See "Other Edit windows" on the next page.
IC cockpit	Allows you to run intercompany matching from a dedicated cockpit.
Diagnostics	Allows you to run diagnostics and access the results log. See "Diagnostics" on the next page.
Consolidation Data Processing	Allows you to run consolidation data processing on the selected nodes and node entities. ***Note**: selecting the highest-level consolidation node is not equivalent to processing all entities. For example, for data processing by counterparty, only entities directly belonging to the node and entities in pairs of entities belonging to different consolidation nodes will be generated.* To process all entities, you must select all consolidation nodes. The quickest method is to position the cursor on the highest-level consolidation node, right click and choose the “Select cascade” option. See "Consolidation Data Processing" on the next page.
Calculation logics	Allows you to do the following: • Run all calculation logics related to the selected process. • Run the logics, filtering them based on scenarios and periods present in the process. See Process cockpit - Contributor - Calculation logics.
Submit	Runs the submission activities for which it is enabled on the selected nodes. • On the **Summary** tab, this opens a window to select the original scenarios/periods and step up until which you want to submit. • In a step tab, this automatically sets the value of the necessary parameters and runs the submission directly.
Reject	Allows the higher node manager to reject the selected nodes. • On the **Summary** tab, this opens a window in which you can select the original scenarios/periods and the step up until which you want to reject and potentially insert a note and the reasons for rejection. • In a step tab, this automatically sets the value of the necessary parameters and runs the rejection directly.
Override Amounts	Only on the **Summary** tab. Integrates the final data generated by the system. This is typically needed when, as the final outcome, the amount information to be extracted from the reporting system needs to be identical to data already made public at a previous time (if the consolidation tool is changed, for example). For amounts, only carry forwards can be overridden on the original scenario. In fact, the other rows can be added from the management window for the original rows without needing to override them. See Override journals and balances.
Override journals	Only on the **Summary** tab. Integrates the final data generated by the system. This is to extract journal information identical to data officially made public at a previous time (if the consolidation tool is changed, for example). See Override journals and balances.
Process reports	Allows you to generate reports on data, entities and process configuration. See "Process reports" on page 207.
Utilities	Allows you to copy amounts, journals and consolidation data and lock and unlock data entry. See "Utilities" on page 208.

Steps

Element	Description
<step name>	Opens the tab for the selected step.

Edit windows

Element	Description
Edit Amounts	Opens a page to edit original gross amounts from the web. See Gross Amounts.
Edit IC	Opens a page to edit intercompany entries from the web. See IC Amounts.
Edit Entity journals	Opens a page to edit entity journals from the web. See Entity journals.
Edit Consolidation journals	Allows you to manually insert consolidation journals directly from the web via specific windows. See Consolidation Journals.

Other Edit windows

Element	Description
Edit Reconciliation accounts	Allows you to edit reconciliation accounts via specific windows. See Reconciliation accounts.
Edit Notes	Allows you to edit notes via specific windows.

Diagnostics

Element	Description
Diagnose	Runs diagnostics for the selected entities. If run from the **Summary** tab, a window showing the customisable filters will open. If run from a step tab, this automatically sets the value of the necessary parameters for the step in question and runs the diagnostics directly. See Diagnostic.
Diagnose and update log	**Summary** tab. Runs diagnostics for the selected entity and step and updates the diagnostic results log. See Diagnostic.
Diagnostic results log	Opens the diagnostic results log for the selected entities. In the **Summary** tab, this opens a window to choose the step. In a step tab, it displays the log for the selected step only. See Diagnostic result log.

Consolidation Data Processing

Consolidation data processing is only performed on entities belonging to the selected nodes. Selecting the highest-level consolidation node does not mean that all entities will be processed. For example, for data processing by counterparty, only entities directly belonging to the node and entities in pairs of entities belonging to different consolidation nodes will be generated.

In other words, if you want to process all entities, you must select all consolidation nodes. The quickest method is to position the cursor on the highest-level consolidation node, right click and choose the “Select cascade” option.

Element	Description
Standard	Automatically run data processing enabled for the process, on both the original scenario and the consolidation scenario.
Custom	Allows you to run data processing enabled for the process, making it possible to select the original and consolidation scenarios to process and decide the type of data processing to run (entity, group, area).

Process reports

Element	Description
Journals book	Allows you to extract a report with all the journals entered on the entities. See "Journals book window (for the contributor)" on page 182.
Ad-hoc analysis	Runs the data analysis via drill down onto the CCH Tagetik dimensions. See "Drill down parameters page (ad-hoc analysis)" on page 212.
FX rate difference reserves analysis	Analyses variations and the effects of the FX rate difference reserve in relation to the opening financial year (historic FX rate, annual net result, intercompany entries, other accounts not at the final FX rate and FX rate difference). See "FX rate difference reserves analysis window" on page 213.
Financial investments - Net equity analysis	Summarises the data for financial investments, net equity, consolidation eliminations for financial investments/net equity, minority shareholdings and net equity reclassification (NER) of entities belonging to the selected consolidation scenario/period.
Net Result and Reserves Group Evolution analysis	Allows you to analyse changes to net equity and annual net result for each entity belonging to a given consolidation area. See "Net Result and Reserves Group Evolution analysis window" on page 227.
Pick-up check report	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to control the effect generated by Equity pick-up data processing on entities. For every direct investment relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference.
Pick-up query	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to analyse in detail the pick-up journals generated by the Equity pick-up data processing on entities. The report is only available if **Generate detailed information for the pick up query** has been selected in the pick-up rules for the Equity pick-up data processing. For more details on the data processing pick-up rules, see Equity Pick-Up.
Submission status	Only on the **Summary** tab. Allows you to extract a report showing submission statuses of the selected entities and of the nodes to which they belong, in the various steps, based on the root. See "Submission status window (for the consolidator)" on page 231.
Submission Status grouped by Entity Node	Only on the **Summary** tab. This allows you to extract a report showing, for each contributor node, the number of entities submitted and not submitted in the various steps, regardless of user rights. Access to the report must be gained using the functions for the role (0001937).

Element	Description
Submission Status grouped by Consolidation Method	Only on the **Summary** tab. This allows you to extract a report showing, for each consolidation method, the number of entities submitted and not submitted in the various steps, regardless of user rights. Access to the report requires the function (0001937) to be included in the user's role.
Change consolidation scope report	Allows you to extract a report on variations in the consolidation area. The report shows the consolidation rules and entities for the two selected scenarios. The run window asks you to select a consolidation scenario/period and decide whether you want to compare it with the carry forward scenario or a specific scenario/period. The report can be displayed in full view mode or show the differences only. See "Change consolidation scope report window" on page 217.
Consolidation area scope	This shows the deployed consolidation area tables, with all information on the entities included in it (divided into line-by-line and at equity) for consolidators that are not administrators and cannot view them from the process configuration. See "Consolidation area scope page" on page 219.
Entity/Classifier Relationships	Only visible if financial investment reclassification data processing is enabled in the process. Shows the Entity/Reclassification variable relationships for consolidation scenarios belonging to the Process. See "Entity/Classifier Relationship page" on page 218.

Utilities

Element	Description
Copy amounts and journals	Copies amounts, notes, entity journals and consolidation journals from one scenario to another chosen from among the active original scenarios. ***Note**: the source scenario must be visible to the user, while the target scenario must be editable by the user.* See "Copy amounts and journals window" on page 221.
Copy Consolidation	Copies data from one scenario/period to another. Copies both the data tables and the master tables linked to them (scenarios, mergers, consolidation areas). Once complete, the consolidation area is deployed. See "Copy Consolidation window" on page 210.
Copy consolidation on original	Copies data from one consolidation scenario to the specified original scenario/period. Consolidable amount type data is copied onto the gross amounts and IC amounts of the specified original scenario/period/entity and category. See "Copy consolidated on original window" on page 230.
Lock data	Runs data processing to lock/unlock data editability for the selected entities/steps. Running the "lock" operation means that the data cannot be edited by any user, regardless of their rights and regardless of submission status. See "Lock data and Unlock data windows" on page 228.
Unlock data	Unlocks blocked data entry for the selected entities/steps. See "Lock data and Unlock data windows" on page 228.

Actions section of the Consolidation scenarios tab

User

Application database > Processes tile > select process > Consolidator > select Consolidation Scenarios

Actions

Element	Description
Diagnostics	Allows you to run diagnostics, filtering the main dimensions (e.g. consolidation scenario, steps, amount types). Diagnostics can be run on both the selected consolidator nodes and the entities/contributor nodes themselves. See Diagnostic.
Consolidation Data Processing	Allows you to run consolidation data processing on the selected nodes and node entities. ***Note**: selecting the highest-level consolidation node is not equivalent to processing all entities. For example, for data processing by counterparty, only entities directly belonging to the node and entities in pairs of entities belonging to different consolidation nodes will be generated.* To process all entities, you must select all consolidation nodes. See "Consolidation Data Processing" below.
Process reports	Allows you to generate reports on data, entities and process configuration. See "Process reports" below.

Consolidation Data Processing

Element	Description
Standard	Opens a window showing the elements for which data have been edited and allows you to run data processing on these data.
Custom	Runs data processing enabled for the process, making it possible to select the original and consolidation scenarios to process and decide the type of data processing to run (entity, group, area).

Process reports

Element	Description
Journals book	Extracts a report with all journals entered on the selected nodes and on entities belonging to the selected nodes. See "Journals book window (consolidator)" on page 215.
Ad-hoc analysis	Runs the data analysis via drill down onto the CCH Tagetik dimensions. See Ad-hoc analysis.
FX rate difference reserves analysis	Analyses variations in and the effects of the FX rate difference reserve in relation to the opening financial year (historic FX rate, annual net result, intercompany entries, other accounts not at the final FX rate and FX rate difference).
Financial investments - Net equity analysis	Summarises the data for financial investments, net equity, consolidation eliminations for financial investments/net equity, minority shareholdings and net equity reclassification (NER) of entities belonging to the selected consolidation scenario/period.

Element	Description
Net Result and Reserves Group Evolution analysis	Allows you to analyse changes to net equity and annual net result for each entity belonging to a given consolidation area. See "Net Result and Reserves Group Evolution analysis window" on page 227.
Pick-up check report	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to control the effect generated by Equity pick-up data processing on entities. For every direct investment relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference.
Pick-up query	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to analyse in detail the pick-up journals generated by the Equity pick-up data processing on entities. The report is only available if **Generate detailed information for the pick up query** has been selected in the pick-up rules for the Equity pick-up data processing. For more details on the data processing pick-up rules, see Equity Pick-Up.
Change consolidation scope report	Extracts a report on variations in the consolidation area. The report shows the consolidation rules and entities for the two selected scenarios. The run window asks you to select a consolidation scenario/period and decide whether you want to compare it with the carry forward scenario or a specific scenario/period. The report can be displayed in full view mode or show the differences only.
Consolidation area scope	This shows the deployed consolidation area tables, with all information on the entities included in it (divided into line-by-line and at equity) for consolidators that are not administrators and cannot view them from the process configuration.
Entity/Classifier Relationships	Only visible if financial investment reclassification data processing is enabled in the process. Shows the Entity/Reclassification variable relationships for consolidation scenarios belonging to the process.

Copy Consolidation window

User

Application database > Processes tile > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy Consolidation

Purpose of window

Copies data from one scenario/period to another. The utility copies both the data tables and the master tables linked to them (scenarios, mergers, consolidation areas).

Available options

Element	Description
Original and Consolidation	Copies original and consolidation scenarios.
Only Original	Copies between original scenarios.
Only Consolidation	Copies between consolidation scenarios.
Copy From	

Element	Description
Original scenario	Only for **Original and Consolidation** and **Only Original**. Source scenario
Consolidation scenario	Only for **Original and Consolidation** and **Only Consolidation**. Source consolidation scenario from among those linked to the selected original period scenario.
Period	Source period(s). If the scenario in **Copy From** is the same as the scenario in **Copy to**, the period must be specified and different; a period/scenario cannot be copied onto itself. If the period is not specified or several periods are selected, the copy is performed from a period onto itself.
Copy to	
Original scenario	Only for **Original and Consolidation** and **Only Original**. Target scenario. This is pre-completed with the scenario selected from the process cockpit. See "Cockpits: common elements" on page 158.
Consolidation scenario	Only for **Original and Consolidation** and **Only Consolidation**. Target consolidation scenario. The user can choose from among all consolidation scenarios belonging to the selected original scenario/period (for “Original and Consolidation”) or all consolidations scenarios belonging to the selected process (for “Only Consolidation”).
Period	Target period. This is pre-completed with the period selected from the process cockpit. To be set when the scenarios in **Copy From** and **Copy to** are the same. If they are, they must be different from the source period. Do not set this in the following cases: • The **Period** field in **Copy From** is not set. • Several source periods have been selected.
Data filters	
Account	Account on which to filter the source data. This can be defined by indicating individual accounts or a node of a hierarchy defined on the account dimension.
Category	Category on which to filter the source data. This can be defined by indicating individual categories or a node of group of categories.
Advanced options	
Keep user upd and date upd	If selected, this reports the user and date of the source data on the copied data. If not selected, it reports user code that ran the copy and the date/time at which the copy was performed.
Copy data model for scenario/period	If selected, the system also copies tables containing information that depends on the scenario/period. Before performing the copy, the system deletes any pre-existing data from the target scenario/period. The origin of the copied data is the one present on the source data.
Copy the submission status	Only for **Original and Consolidation** and **Only Original**. Copies tables containing submission information.

Drill down parameters page (ad-hoc analysis)

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Ad-hoc analysis

Purpose of the page

This page allows you to run an analysis of the data, or extract numerical data of the financial model from the database and analyse it in the interface, using a pivot table, or in Excel, by downloading an XLSX file.

Page sections

Element	Description
Drill down parameters (or ad-hoc analysis filters)	Allows you to define the data on which to run the ad-hoc analysis. Every row identifies a dimension/hierarchy on which to filter the data.
Data processing management buttons	These allow you to view data from the analysis and/or download them in an XLSX file.

Details of the drill down parameters table

Element	Description
	Adds a row.
	Deletes a row.
Size	Allows you to select an element of hierarchy node of a dimension. ***Note**: for accounts, it is also possible to filter by control group, financial statement template or form.*
Filters	Allows you to define the values to be included in the analysis through search operators. • **=**: selects a specific element or node of the dimension. • **like**: selects all records for which the code is similar to the search term.
Detail	• Active: analytical data up to the highest level of detail is reported for every extracted element. • Not active: the analysed elements are filtered based on the requirement set in **Filters** and aggregated, without showing the details, at the level of the individual element.
Display mode	Only with **Detail** selected. Allows you to specify how the analysed elements are displayed. • **Code** • **Description** • **Code and description**

Data processing management buttons

Element	Description
Next	Closes the window and displays the data from the analysis in a pivot table.
Download	Downloads an XLSX file containing the analysed data. In the file, the **Pivot table** spreadsheet shows details of the analysed data in a pivot table, the **data** spreadsheet shows the list of the analysed data in a table.

FX rate difference reserves analysis window

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > FX rate difference reserves analysis

Purpose of window

This window allows you to download a report with results of the FX rate difference reserves analysis. This data processing analyses variations in the FX rate difference reserves compared with the opening year, and shows the various effects (Historic FX rate, Annual net result, Intercompany, Other accounts not at the final FX rate and FX rate difference).

Fields in window

Element	Description
Consolidation scenario/period	Opens a window to select the consolidation scenario/period on which to run the analysis.
Amount Type	Allows you to select the type of amount to analyse. • **Converted** • **Consolidable**
Account to analyze	Allows you to select the account on which to run the analysis.
Entity	Allows you to select the entity on which to run the analysis.
Category	Allows you to select the category on which to run the analysis.
Analysis method	Allows you to select the type of analysis. • **Detailed analysis of reserve entries** • **Analysis of the original data in aggregated reserve entries**
Contribution by entity	The report shows details of the values that entities contribute to the consolidable amount.
Contribution by entity/category	The report shows details of the values that entities/categories contribute to the consolidable amount.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Financial investments - Net equity analysis window

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Financial investments - Net equity analysis

Purpose of window

This page allows you to download the data analysis report on financial investments, net equity, consolidation eliminations for investments/net equity, minority shareholdings and net equity reclassification (NER) of entities belonging to the selected consolidation scenario/period.

Fields in window

Element	Description
Consolidation scenario/period	Opens a window to select one or more scenarios/periods on which to run the analysis.
Child entity	Opens a window to select the child entity on which to run the analysis.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Pick-up check report window (consolidator)

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Pick-up check report

Purpose of window

This window allows you to download a report on the equity pick-up data processing. In particular, it allows you to check the effect generated by the equity pick-up data processing on the entities. For every direct investment relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference.

Fields in window

Element	Description
Scenario/period	Opens a window to select one or more scenarios/periods on which to define the value of the owner entity's financial investment.
Entity	Opens a window to select the owner entity.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Journals book window (consolidator)

User

Application database > Processes tile > select process > Consolidator > select Summary or step tab > select entity > (Actions section) > Process reports > Journals book

Purpose of window

Allows you to extract a report with all the consolidation journals on the selected nodes.

Window sections

Section	Description
Report format	Allows you to select the format of the report.
Scenario /Period	Allows you to select the desired scenario/period.
Journals filter	Allows you to specify any filters to be applied to journal headers, in order to extract only the desired journals and limit the volume of data extracted. ***Note**: regardless of the filters applied, the system will only extract data from journals belonging to entities or consolidator nodes selected in the cockpit and in categories visible to the user.*
Rows filter	Allows you to specify any filters to be applied to journal rows, in order to extract only the desired rows and limit the volume of data extracted. ***Note**: regardless of the filters applied, only rows with amounts other than zero and rows on accounts visible to the user will be extracted.*
Grouping and Sorting	Allows you to specify how the extracted data is grouped and sorted.

Options in the sections

Element	Description
Report format	
XLSX	Generates the report in XLSX format.
PDF	Generates the report in PDF format. This format has some limitations and must be extracted without grouping journals, but with synthetic grouping of rows with origins. This report is not available for processes with relationship type equal to **by entity - custom dimension 2** or **by entity - synthetic custom dimension 2**.
Scenario /Period	

Element	Description
Scenario type	Set the desired scenario type. • **Original scenarios** • **Consolidation scenarios**: extracts consolidable amount data ***Note**: field is not visible to contributor users, who can only extract data from original scenarios.*
Scenario /Period	Mandatory field. • With the **Consolidation scenarios** type selected, this allows you to choose an active consolidation scenario/period that is visible to the user and linked to the process. • With the **Original scenarios** type selected, indicate the scenario/period from which the cockpit was accessed. Can only be changed in single submission processes.
Journals filter	
Category type	Journal type to be exported. If not specified, both entity journals and consolidation journals will be extracted. The XLSX report contains one spreadsheet for entity journals and one spreadsheet for consolidation journals. In the PDF report, journals follow one another in the same file. Those journals appear on different spreadsheets in the XLSX report and in sequence in the PDF report.
Category	Only with **Category node** not selected. Allows you to select one or several categories from among those visible to the user. Allows you to select the Entity Journals, Consolidator Entity Journals and Consolidation Journals category types, in line with the value selected in **Category type**.
Category node	Only with **Category** not selected. Allows you to select a grouping of categories from among those with at least one category visible to the user. If a value is specified, the system extracts the journal data on categories belonging to the selected node, moving through them progressively to the last level.
Journal number	Allows you to select one or several journals belonging to the selected scenario/period.
Rows filter	
Show only main accounts	Only extracts the rows on the most important accounts involved in the journal, or those which are displayed as **Main accounts on Journals** in the data model. See .
Exclude Result accounts and Variation	Selected by default. The extraction excludes rows on accounts that belong to the set of result accounts specified from among the requirements of the process's calculation logics. In particular, the P&L result account, the BS result account and their variations (determined taking account only of control groups belonging to the process) are excluded.
Account type	If specified, this only allows you to recover the rows on the indicated account type: • **Detail** • **Variation** • **Normal** (default)
Account nature	If specified, this only allows you to recover rows on accounts of the indicated nature: • **Profit & Loss** • **Balance Sheet** • **Memorandum** • **Other Variations** • **Other stocks**

Element	Description
Show Counterparty	Enters information related to the counterparty (counterparty entity, CTP custom dimension 2, transaction currency, transaction currency amount, total CTP amounts) in the reports.
Hide rows set to 0	The extraction excludes rows that balance equally, custom dimensions and counterparty.
Origin	Allows you to select one or several origins from among those that are consistent with the selected **Scenario Type**.
Grouping and Sorting	
Journals grouping	Ways in which journal headers must be grouped: • <empty field>: grouping by journal number • **Journals grouping**: grouping based on the **Grouping for Journals book** label set manually on the journal headers • **Entity 2**: grouping for Entity 2 and extraction of consolidation journals only
Journals order	Ways in which journal headers can be ordered: • **Journal number** (default) • **Category / Journal number**
Rows grouping	Ways in which journal rows can be grouped: • **Analytic** (default): no grouping • **Synthetic**: grouping by account, custom dimensions and counterparty • **Synthetic with origin**: grouping by account, custom dimensions, counterparty and origin
Rows order	Ways in which journal rows can be ordered: • **Account/Origin** (default) • **Origin/Account**

Buttons in the window

Element	Description
Precedente	
Successivo	
Run	Runs the report. Once complete, the system displays a log window and downloads the report in XLSX format.
Cancel	Closes the window.

Change consolidation scope report window

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Change consolidation scope report

Purpose of window

This window allows you to extract a report on changes to the consolidation area, which shows the entities and consolidation rules of the two selected scenarios.

Fields in window

Element	Description
Consolidation scenario/period	Opens a window to select a scenario/period for which to extract the report.
Compare with	Defines the element with which to compare the consolidation scenario/period. • **Carryforward scenario** • **Specific scenario/period**: opens a window to select a specific scenario/period.
Display mode	Defines the display mode for data in the report. • **Full view**: shows all extracted data. • **Only differences**: only shows data that represents differences between the compared scenarios.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Entity/Classifier Relationship page

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Entity/Classifier Relationships

Purpose of the page

This page allows you to view the entity/reclassification relationships for consolidation scenarios belonging to the process.

For every filter set, a search operator can be defined in order to filter the data based on properties chosen by the user. The following options are available:

- contains
- does not contain
- starts with
- does not starts with
- ends with
- does not end with
- is null
- is not null
- equals
- not equals

Page sections

Element	Description
Entries search filter area	Allows you to define relationship search filters.
Results area	Displays details of an entity/classifier relationship on each row.

Details of entry search filters

Element	Description
Scenario	Allows you to select the relationship scenario or identify groups of scenarios.
Period	Allows you to select the relationship period or identify groups of periods.
Entity	Allows you to select the relationship entity or identify groups of entities.
Classifiers	Allows you to select the relationship classifiers or identify groups of classifiers.
Element	Allows you to select the relationship element or identify groups of elements.
Origin	Allows you to select the relationship origin or identify groups of origins.
User Upd	Allows you to select the user that created the relationship or identify groups of users.
Date Upd	Allows you to enter the interval in which the relationship was created.

Buttons on the page

Element	Description
Remove filters	Removes all filters.
Apply	Shows details of relationships corresponding to the selected filters.
	Allows you to add a filter.
	Removes the corresponding filter.
	Cancels the last action on the corresponding filter.

Consolidation area scope page

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Consolidation area scope

Purpose of the page

This page allows you to view the deployed consolidation area tables, with all information on the entities included in it (divided into line-by-line and at equity) for consolidators that are not administrators and cannot view them from the process configuration.

For every filter set, a search operator can be defined in order to filter the data based on properties chosen by the user. The following options are available:

- contains
- does not contain
- starts with
- does not starts with
- ends with
- does not end with
- is null
- is not null
- equals
- not equals

Page tabs

Element	Description
Deployed	Shows the outcome of the configurations and overrides run on the individual consolidation area.
Equity Owner Entities	Shows the table's deployment with details of equity owners.

Filters in Deployed

Element	Description
Scenario	Allows you to select the scenario.
Period	Allows you to select the period.
Entity	Allows you to select the entity.
Consolidation method	Allows you to select the consolidation method used.
Direct ownership %	Allows you to select the owner entity's direct ownership percentage in the owned entity.
Equity ratio %	Allows you to select the owner entity's equity ratio percentage in the owned entity.
Actual ownership %	Allows you to select the owner entity's actual ownership percentage in the owned entity.
Consolidation %	Allows you to select the consolidation percentage.
Deconsolidation method	Allows you to select the deconsolidation method used.
Period of the first Consolidation	Allows you to select the first period in which consolidation was carried out.
Origin	Allows you to select the consolidation origin.
User Upd	Allows you to select the user that originated the consolidation.
Date Upd	Allows you to select the time interval in which the consolidation was carried out.

Filters in Equity Owner Entities

Element	Description
Scenario	Allows you to select the scenario.
Period	Allows you to select the period.
Owner entity	Allows you to select the owner entity.
Owned entity	Allows you to select the owned entity.
<custom dimension 2> Financial investments	Allows you to select a financial investment value for every item of cust. dim. 2.
Consolidation method	Allows you to select the consolidation method used.
Equity ratio %	Allows you to select the owner entity's equity ratio percentage in the owned entity.
Origin	Allows you to select the consolidation origin.
User Upd	Allows you to select the user that originated the consolidation.
Date Upd	Allows you to select the time interval in which the consolidation was carried out.

Buttons on the page

Element	Description
Remove filters	Removes all filters.
Apply	Shows consolidation data corresponding to the selected filters.
	Allows you to add a filter.
	Removes the corresponding filter.
	Cancels the last action on the corresponding filter.

Copy amounts and journals window

User

Application database > Processes tile > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy amounts and journals

Purpose of window

This window allows you to copy the following:

- financial statement data and entity journals from one scenario/period to another and from one entity to another
- journals from one scenario/period to another and between entities and scenarios/periods

***Note**: the copying of financial statements and journals can be scheduled as a job task in the task workflow of the process steps. For more details, see "Copy amounts and journals task window" on page 224.*

Available options

Element	Description
Filter set	Allows you to select a set of filters from among those previously saved. ⋮ : allows you to update, rename or delete the set.
Gross and note	Copies Gross and notes.
Entity journals	Copies entity journals.
Consolidation journals	Copies consolidation journals.
Customize	
Gross amount	Only for **Gross and note**. Copies gross amounts.
Reconciliation account	Only for **Gross and note**. Copies reconciliation accounts.
IC cockpit notes	Only for **Gross and note**. Copies the notes inserted in the IC entry matching step.
IC amounts	Only for **Gross and note**. Copies intercompany entries.
Notes	Only for **Gross and note**. Copies the notes added to cells of forms.
User's details and date of origin	If selected, this records the user and date of the source data on the copied data. If not selected, it records the user as the user code that performed the copy and the date as the date/time at which the copy was performed.
Markup	Only for **Gross and note**. To be applied to the copied amount to convert it into a different unit of measurement from the one used in **Copy From** in the scenario. 0: no coefficient to apply. For example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.
Transactional form	Copies data entered in one or more transactional forms. See .
Copy From	
Scenario	Source scenario(s) visible to the user. The copy can be performed from several scenarios at the same time, by choosing from among the active original scenarios on which the user is authorised.
Period	Source period. Only to be indicated if a single scenario has been selected in **Copy From**. If the period is not specified, the copy is performed from every period onto itself. This allows you to copy data for all open periods for the selected scenario. To copy data related to several but not all periods of the selected scenario, the copy must be repeated as any times as there are periods to be copied.
Entity	Only for **Gross and note** and **Entity journals**. One or several source Entities. If the entity is not selected or if several entities are selected, the copy is performed from all entities onto themselves.
Entity 1	Only for **Consolidation journals**. Filters the source data based on the first entity of the relationship.
Entity 2	Only for **Consolidation journals**. Filters the source data based on the second entity of the relationship.
Advanced filters (Copy From)	

Element	Description
Origin	Enter the origin of the source data. These origins are set by default: • **BREAK_BACK** • **INPUT_DEFORM** • **INPUT_WEB** • **MAP** • **QDL** Only for **Entity journals** and **Consolidation journals**: the origin refers to the journal rows, not the header.
Category	Category on which to filter the source data.
Account nodes	Filters source data based on the accounts associated with one or more nodes of a given hierarchy defined on the account dimension.
Journal number	Only for **Entity journals** and **Consolidation journals**. Allows you to select individual source journals to further filter the data.
Select accounts from form	Filters source data based on the editable accounts present in one or several forms.
Transactional forms	Only if the copy is performed from transactional forms. Filters the source data based on the transactional forms.
Copy To	
Scenario	Active and original target scenario, editable by the user. Only one can be selected.
Period	One or several target periods. Must be indicated in the following cases: • The source period has been specified, so one or several target periods must be specified. • No source period has been specified and, in the source scenario, the periods are different from those of the target scenario. It does not have to be indicated in the following cases: • No source period has been specified. • The periods of the source scenario are identical to those of the target scenario.
Entity	Only for **Gross and note** and **Entity journals**. Target entity code. To be indicated to copy data onto a single entity other than the one already indicated in **Copy From**. Not to be indicated in the following cases: • To copy data onto the same entity from which it will be read. • To copy data from several entities. In this case, the system performs the copy from all entities onto themselves.
Advanced filters (Copy To)	
Origin	Enter the origin that will be assigned to the copied data: • **COPY_GENERAL** • **COPY_ORIG**: the system keeps the source origin for the copied data. • **INPUT_WEB**
Category	Overrides the target category. If this is not specified, the copy is performed while keeping the source category the same.
Deletion policy: based on input account	If a filter is applied to the accounts, this indicates whether that filter will also be applied during the deletion of any data existing in the copy target tables. This is useful when, for example after performing the copy filtered on a number of forms, the user wants to rerun the same copy but only for one or more forms without affecting the values of other copied forms.

Buttons on the page

Element	Description
Save new filters set	Saves the filters set, to be reused later.

Copy amounts and journals task window

User

Application database > Data Processing tile > Jobs > Choose Job > ⋮ > Show graph > Edit > Other activities > Copy amounts and journals

Purpose of window

This window allows you to schedule the copying of amounts and journals.

Available options

Element	Description
Gross amount	Copies gross amounts.
Entity journals	Copies entity journals.
Consolidation journals	Copies consolidation journals.

General parameters

Element	Description
Amount Type	Source data type: • **Original** • **Proportional** • **Converted** • **Consolidable**
Markup	Coefficient to be applied to the copied amount to convert it into a different unit of measurement from the one used in **Copy From** in the scenario. 0: no coefficient to apply. ***Note**: for example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.*
User's details and date of origin	If selected, this records the user and date of the source data on the copied data. If not selected, it records the user as the user code that performed the copy and the date as the date/time at which the copy was performed.
Copy From	
Scenario	Source scenario(s).
Period	Source period. If the period is not specified, the copy is performed for every period, onto itself. This allows you to copy data for all open periods for the selected scenario. To copy data for several periods, you can use multi-selection if you want to copy only some of the scenario periods onto their target scenario counterparts. If you want to copy individual periods onto periods other than the target scenario, you need to repeat the copy function as many times as there are periods to be copied.
Copy to	

Element	Description
Process	Target process.
Scenario	Active original target scenario onto which to copy user-editable data. Only one can be selected.
Period	Target period. To be indicated in the following cases: • If the source period has been specified then that and the target periods should be specified. • If the source period has not been specified and the open periods for the source scenario are different from those of the target scenario. This does not need to be indicated if the source period has not been specified and the open periods for the source scenario are the same as those of the target scenario.
Advanced filters (Copy From)	
Origin	Enter the origin of the source data. These origins are set by default: • **BREAK_BACK** • **INPUT_DEFORM** • **INPUT_WEB** • **MAP** • **QDL**
Account hierarchy	Filters the source data according to the indicated hierarchy.
Account node	Filters source data based on one or more accounts related to the nodes of a given hierarchy defined on the account dimension.
Form	Filters source data based on the accounts present in the form or in the specified forms.
Advanced filters (Copy to)	
Origin	Enter the origin of the copied data: • **COPY_GENERAL** • **COPY_ORIG**: the system keeps the source origin for the copied data. • **INPUT_WEB**
Origin to delete	• **COPY_GENERAL** • **COPY_ORIG**: the system keeps the source origin for the copied data. • **INPUT_WEB**
Deletion policy: based on input account	If a filter is applied to the accounts, this indicates whether that filter will also be applied during the deletion of any data existing in the copy target tables. This is useful when, for example after performing the copy filtered on a number of forms, the user wants to rerun the same copy but only for a certain form without affecting the values of other copied forms.

Gross amounts & Entity journals

Element	Description
Gross amount customisation	
Gross amount	Copies gross amounts.
Reconciliation account	Copies reconciliation accounts.
IC cockpit notes	Copies the notes inserted in the IC entry matching step.
IC amounts	Copies intercompany amounts.
Notes	Copies the notes inserted in the cells of a form.
Transactional form	Copies data entered in one or more transactional forms.

Element	Description
Copy From	
Entity	Source entity(ies). If the entity is not selected or if several entities are selected, the copy is performed from an entity onto itself.
Copy to	
Entity	Copy target entity code. This must be indicated to copy data onto a different entity from the one previously indicated in **Copy From**. This does not need to be indicated in the following cases: • if you want to copy data onto the same entity from which it will be read • if you want to copy data from several entities. In this case, the system performs the copy from an entity onto itself.
Gross amounts: advanced filters (Copy From)	
Category	Category on which to filter source data
Note - Category	Category on which to filter source notes
Transactional form - Category	Category on which to filter source data entered in transactional forms
Form	The system filters the data entered in the accounts contained in the selected forms
Gross amounts: advanced filters (Copy to)	
Category	Overrides the target category. If this is not specified, the data is copied onto the same category.
Note - Category	Overrides the category onto which to copy notes. If this is not specified, notes are copied onto the same category.
Transactional form - Category	Overrides the category onto which to copy data entered in transactional forms. If this is not specified, the data is copied onto the same category.
Entity journals: advanced filters (Copy From)	
Category	Overrides the category for which to filter the source journals.
Journal number	Filter journals based on journal number code.
Entity journals: advanced filters (Copy to)	
Category	Overrides the category onto which to copy journals. If this is not specified, the copy is performed while keeping the source category the same.

Consolidation journals

Element	Description
Copy From	
Entity 1	Filters the source data based on the first entity of the relationship.
Entity 2	Filters the source data based on the second entity of the relationship.
Copy to	
Advanced filters (Copy From)	
Category	Category on which to filter the source data.
Journal number	Allows you to select individual source journals to further filter the source data.
Advanced filters (Copy to)	
Category	Overrides the target category. If this is not specified, the copy is performed while keeping the source category the same.

Net Result and Reserves Group Evolution analysis

Report contents

For every entity, the system shows the impacts on net equity and on the annual results for the amount and entity adjustment categories. This is done both in local currency for the original scenario and in the consolidation currency for the consolidation area selected at the start.

The impact of consolidation journals can be shown in **Aggregated and Consolidated** mode or in **Contribution** mode. In **Aggregated and Consolidated** mode, the report shows the following:

1. entity data, i.e. amounts and adjustments by entity
2. total of all entities, equivalent to the aggregated figure
3. consolidation journals
4. grand total showing the consolidated figure

In **Contribution** mode, the consolidation journals in the report are attributed in part to the various entities for which entries have been made in the same rows. The same journal can appear several times based on the number of entities involved in the journal itself.

Columns relating to equity show the sum of the impacts on the balance sheet accounts and normal accounts which, in the chart of accounts, have **Net Equity** entered in the **Use for setup** field.

Net Result and Reserves Group Evolution analysis window

User

Application database > Processes tile > select process > Consolidator > select tab > select entity > (Actions section) > Process reports > Net Result and Reserves Group Evolution analysis

Purpose of window

This window allows you to analyse changes to net equity and the annual results for each entity of a given consolidation area.

Available options

Element	Description
Consolidation Areas	Allows you to choose the consolidation area belonging to the process from among those visible to the user.
Category node	Optional. Allows you to choose the node of categories according to which the displayed data should be filtered.
Type	Display mode for the consolidation journals in the report: • **Aggregated and Consolidated**: the report shows the entity data (amounts and adjustments by entity) before the total of all entities. The total is equal to the aggregated figure. After the aggregated figure, the system shows all the consolidation journals and a grand total showing the consolidated figure. • **Contribution**: With the “Contribution” option enabled consolidation journals are attributed in part to the various entities for which entries have been made in the same rows.
Show journal number	If selected, the report shows the individual changes, with journal numbers. It also allows you to open a window from the report to view details of the entire journal. If not selected, the report shows changes grouped by category.

Buttons on the page

Element	Description
Apply	Generates the report according to the settings.
	Downloads the report in PDF format with data relating to the selected run parameters. ***Note**: it may take several minutes to generate reports in PDF format.*
	Downloads the report in Excel format with data relating to the run parameters selected the last time the **Apply** button was pressed in the application.

Lock data and Unlock data windows

User

Application database > Processes tile > select process > Consolidator > Summary > select one or several nodes > (Actions section) > Utility > Lock data > Unlock data

Purpose of window

This window allows you to lock or unlock data editability on nodes and entities and on specific steps.

***Note**: when editability is locked, the data cannot be edited by any user, regardless of their rights and regardless of submission.*

Available options

Element	Description
Original scenarios/periods	For processes with business cycles by scenario/period, this allows you to select the scenarios/periods that are visible to the user and belong to the process. By default, the scenario/period with which the cockpit was accessed is proposed. For processes with a single business cycle, the field is not editable and shows the list of all scenarios/periods belonging to the process on which you are working.
Consolidator Nodes	Mandatory non-editable field. Shows selected nodes that are to be consolidated by the cockpit and visible to the user.
Run also on entities	Also runs data processing on entities belonging to the selected consolidation nodes and on contributor steps. Selected by default.
Entities	Non-editable field. Shows entities belonging to the consolidation nodes and to the selected scenarios/periods. Those nodes are the ones visible to the user, where **Only counterparty** or **Only consolidator** has not been selected in at least one of the selected original scenarios/periods. The data processing is also run on entities (belonging to the selected consolidation nodes and on the contributor steps) which only have **Run also on entities** selected.
Steps	Mandatory field. Allows you to select the steps on which to run data processing. With **Run also on entities** selected, the proposed steps are all those associated with the process. Otherwise, the proposed steps are the consolidator and mixed contributor/consolidator steps.

Copy consolidation on original

When to use the copy function

It is useful to use the copy function in the following situations:

- When you want to copy a sub-holding's consolidation from the consolidation scenario to the original of a fictitious entity representing that sub-consolidate. This allows you not to consolidate all entities together.
- When you want to change the unit of measurement of a processed consolidation. In fact, the result of the consolidation can be copied onto a fictitious entity or a fictitious scenario using a specific coefficient and then running balancing on the original scenario.

How data are copied

Before copying data, the system deletes any original gross amounts and IC amounts, as applicable, from the target scenario/period/entity/category. IC amounts are only deleted if the **Keep CTP** option has been selected. Deletion takes place according to the value entered in the **Deletion Policy** field.

When performing the copy, the system defines the gross amounts and intercompany entries. To do this, it reads the consolidated data tables, filtering on the **Consolidable** amount type and adds those data under the same **Scenario**, **Period**, **Account**, **Custom dimension 1, ... 5**, **CTP Entity** and **CTP Custom dimension 2**.

Currency and amounts

The currency of the copied data is the currency indicated for the entity in the target data collection process. The copied data amounts are obtained according to the following rules:

When...	Then the system...
The account **Conversion type** is **None**	copies the account.
the source declaring entity currency is different from that of the target	copies the account amount, converts it at the final FX rate for the target currency and multiplies it by the coefficient indicated in the run window.
both values are the same	copies the account amount and multiplies it by the coefficient indicated in the run window.

For intercompany entries, the system defines the **Invoice Currency** and **Document currency amount** as follows:

- With the values of the corresponding fields on the source data, if the source data are consolidated amounts or consolidated rows of entity journals.
- With the journal currency and the amount expressed in the journal currency, if the source data are consolidated rows of consolidation journals.

All copied data is marked with **COPY_CONSOLIDATED**.

Copy IC data onto entities of the sub-consolidate

Selecting the **Copy IC to entities on the sub-consolidate** field has the following effects:

- The matching cockpit, which only works on the original category, is not affected by these intercompany operations.
- The declared intercompany operations to entities of the sub-consolidate are cloned and written off. This prevents capacity problems for entities that have declared intercompany operations to entities of the sub-consolidate.
- Eliminations, which function on the basis of the global consolidation scenario, are run with the system reading the sum of the original category and the IC category.

Copy consolidated on original window

User

Application database > Processes tile > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy consolidation on original

Purpose of window

This window allows you to copy data from one consolidated scenario/period onto an original scenario/period.

Available options

Element	Description
Custom dimension	
Scenario /Period	Target scenario/period. For processes to be submitted by scenario/period, the field reports the scenario/period selected in the process cockpit.
Category for Gross Amounts	Target category onto which to copy gross amounts
Category for IC Amounts	Target category onto which to copy intercompany amounts
Consolidation Scenario to Entity mapping	
Consolidation Scenario to Entity mapping	Consolidation scenarios linked to the selected target original scenario/period. For consolidation scenarios from which you want to copy data onto the original, you must indicate the target entity.
Options	
Deletion Policy	Deletion policy to be applied to rows of data that may be present on the target original scenario/period/entity/category. See "Deletion Policy" on the facing page.
Apply Coefficient	Coefficient to be applied to the copied amount to convert it into a different unit of measurement from the one used in the source scenario. Only valid if the conversion type of the target account is not equal to **None**. 0: no coefficient to apply. ***Note**: for example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.*
Category	Source category. Allows you to specify a node from the group of categories to further filter the source data.

Element	Description
Keep CTP	If selected, this copies the information related to the counterparty entity and the counterparty custom dimension 2 for the copied data.
Copy IC to the entities on the sub-consolidate	Only enabled when **Keep CTP** is selected. Specifies whether intercompany data should be processed. See "Copy IC data onto entities of the sub-consolidate" on page 229. If selected: • The system copies non-deleted intercompany transactions declared by entities of the sub-consolidate onto a fictitious entity and onto the specified IC category. • Writes off and declares intercompany transactions that had been declared as being made to entities of the sub-consolidate as being made to the fictitious entity. These entries are performed on the specified IC category. If not selected, the system acts as follows: • It copies non-eliminated intercompany transactions of the sub-consolidate onto the fictitious entity. • It does not copy intercompany transactions declared as being made to entities of the sub-consolidate since the individual entities of the sub-consolidate do not belong to the “global” consolidation scenario.

Deletion Policy

Element	Description
All	Copies all data present in the consolidation scenario, regardless of their origin. Before doing this, the system deletes the existing data from the target original scenario/period/entity/category.
All excluding carry forward	Copies all data present in the consolidation scenario, except for data with origin **PRCO_RESTORE - Consolidation - Carry forward**. Before doing this, the system deletes, for the same scenario/period/entity/category, all data except for data with origin **PREL_RESTORE - Original - Carry forward** that may be present in the target original scenario. Data related to initial balances are not copied.
Only from the copy	Before copying, the system deletes, for the same scenario/period/entity/category, all data with origin **COPY_CONSOLIDATED - Copy consolidated amount on original amount** that may be present in the target scenario. This data are generated by a previous consolidated copy on the original. Therefore, all the data entered in the target original scenario with origin other than **COPY_CONSOLIDATED - Copy consolidated amount on original amount** remain. Data related to initial balances are not copied.

Submission status window (for the consolidator)

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Submission status

Purpose of window

This window allows you to generate a record of the submission statuses of the selected entities and of the nodes to which they belong, in the various steps, based on the parent node.

Available options

Element	Description
Original scenarios/periods	Not editable. Scenario/period from which the cockpit was accessed.
Entities	By default, the field reports the entities selected in the cockpit. If nodes are selected, reports are extracted for the entities belonging to the selected nodes, moving through them progressively to the last level. If the pre-completed field is edited, entities with the following characteristics must be selected: • Belonging to the selected process and scenario/period or at least one of the scenarios/periods of the process for single submission processes. • Not only counterparty or only consolidator. • Visible to the user. If no entity is selected, the submission statuses of all entities that meet the above requirements will be displayed.
Step	Business Workflow step associated with the process.
Status	Submission activity progress status.
Advanced filters	
Entity consolidation method	Allows you to filter entities in the report based on the following consolidation methods: • **Cost** • **Equity** • **Line-by-line** • **Proportional**
<Attributes>	Filters the entities in the report based on the value of the specific attributes enabled in the **Entity** elements table.

Glossary

A

actual

Set of information about events that have already happened and relate to a period that has elapsed.

B

balance sheet

Account that lists the value of the assets held by the company.

BI

Business Intelligence

C

CAPEX

(Capital Expenditure) the amount of cash flow that a company uses to buy, maintain or implement its operational assets such as buildings, land, plant or equipment.

chart of accounts

List of all the accounts to be taken into consideration.

consolidated financial statements

Document presenting the P&L, balance sheet and financial position of an entire group, considered as a single company.

counterparty (CTP) dynamic group

SQL query that extracts from the data table a sub-group of entities or companies from those listed in the table.

CPM

Corporate Performance Management, i.e. the methods, valuation criteria, processes and systems used to monitor and manage a company's performance.

CTP

Counterparties, i.e. the opposite parties in a transaction described in a journal.

custom dimension

custom dimension.

D

detail account

Account that indicates the detail items for the normal account of reference.

details

Sub-elements within an account that allow for items to be classified in a meaningful way.

E

entity

Tagetik dimension that normally indicates the company in whose name the financial statements are produced.

event

Event that leads to a change in the shareholding relationship between two companies in a group, and which must be recorded by Tagetik as it affects the consolidation journals.

F

FCPM

Financial Corporate Performance Management, a specialist area of CPM designed to control the accounting and financial closing cycles.

financial statement template (FST)

Aggregation structure for accounts or dimensions that is primarily used to create the financial statements. FSTs may also be used to define other indices (e.g. KPIs).

financial statements

Document presenting the P&L, balance sheet and financial position of a company at the end of a given accounting period.

forecast

Update to budget data. Forecasts are prepared over the course of the year, when the company closes its first set of actual figures. Comparing the actual figures with budget figures may reveal differences that give rise to new forecasts.

form

Excel sheet that Tagetik uses within its reporting and data entry system in order to directly interact with the application database and to extract/insert data.

G

GAAP

(Generally Accepted Accounting Principles) Standards accepted as guidelines.

H

holding

Company that controls all the other companies in a group through the ownership of shareholdings. This is the company that prepares the consolidated financial statements.

I

IC

Intercompany - relating to companies belonging to the same group.

IFRS

(International Financial Reporting Standards) the international accounting standards used to standardise the global rules on accounting.

M

memorandum account

Account that allows you to insert values into the system that are not recorded in the financial statements but that may be useful for the company. These are normal accounts that do not generate variations.

N

notional data processing

Data processing relating to taxes or cash flows which is applied to entities that are not companies but that refer to a group company.

O

OPEX

(Operating Expenses) Costs needed to manage a product, business or system. Also known as overheads.

owned entity

Company whose shares are held by another company.

owner entity

Company that owns shares in another company.

P

profit and loss

Account that lists all the company's costs and revenues.

R

result account

Balance sheet result account or P&L result account. This is calculated automatically.

S

SCPM

Strategic Corporate Performance Management, a specialist area of CPM designed to improve strategies and returns.

T

tax year

Accounting period to which the company management refers. It normally runs from 1 January to 31 December.

TCO

(Total Cost of Ownership) Total cost of ownership or possession. Represents a company's total cost of owning a technology.

V

variation

This represents the variation (increase or decrease) in a balance sheet element over a given period of time, following an investment, divestment or loan. Variation accounts are used to describe and analyse variations.

variation account

Account that records the variation of a value over time.



Tagetik Software S.r.l.
Via Roosevelt 103
(Undefined variable: Company/Company.Operational_Address_line2)
Italy

https://www.wolterskluwer.com/en/solutions/cch-tagetik
info@tagetik.com
+39 058396811

CCH Tagetik
User ManualProcesses
TK5-OLH-INtASS-EN
EN May 2023
© 2023 Tagetik Software S.r.l.