

Users, Roles, User Rights


1 In the Repository, it is necessary to: 1. Add the users , 2. Add any custom roles and 3. Assign the roles to the users

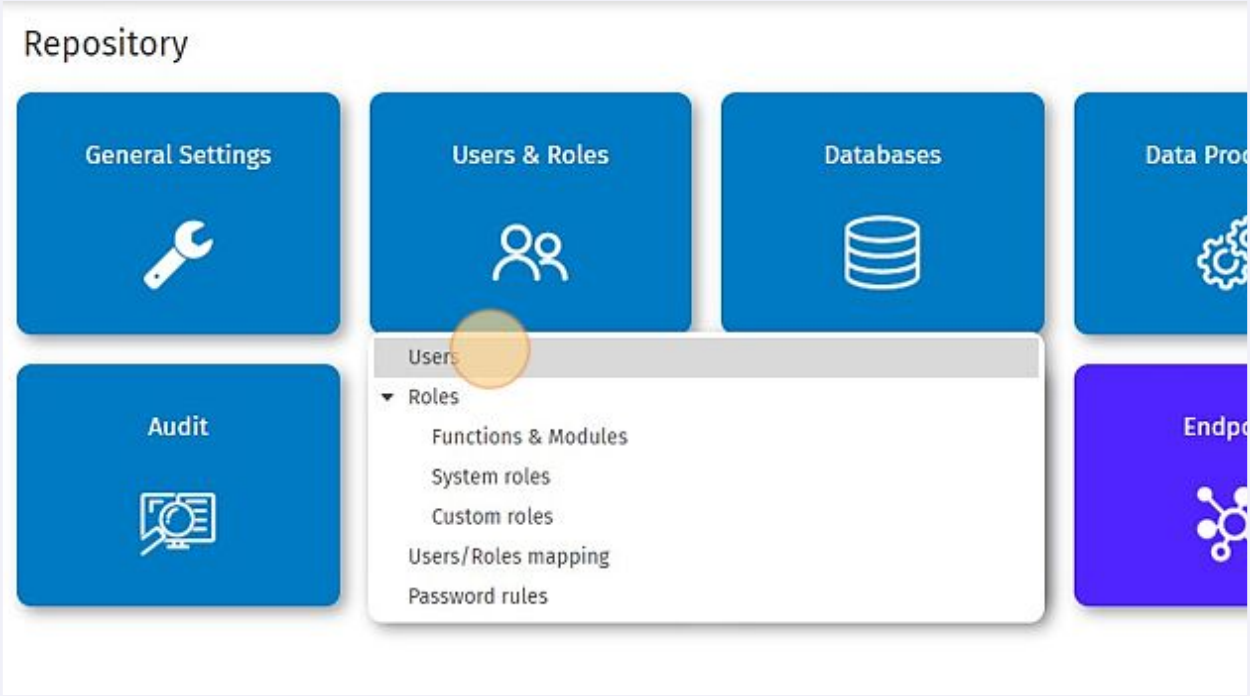


2 In "Users" we can add new users, or restrict access to the DB to some existing users.

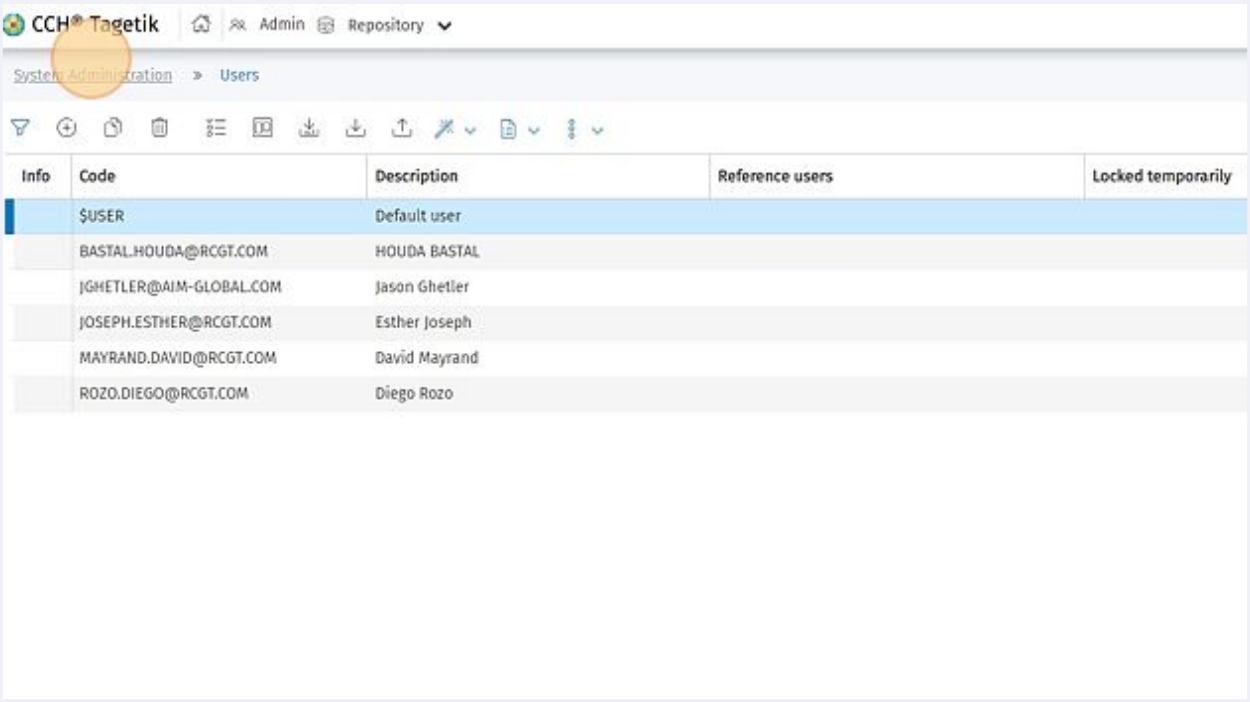


3 Click here.

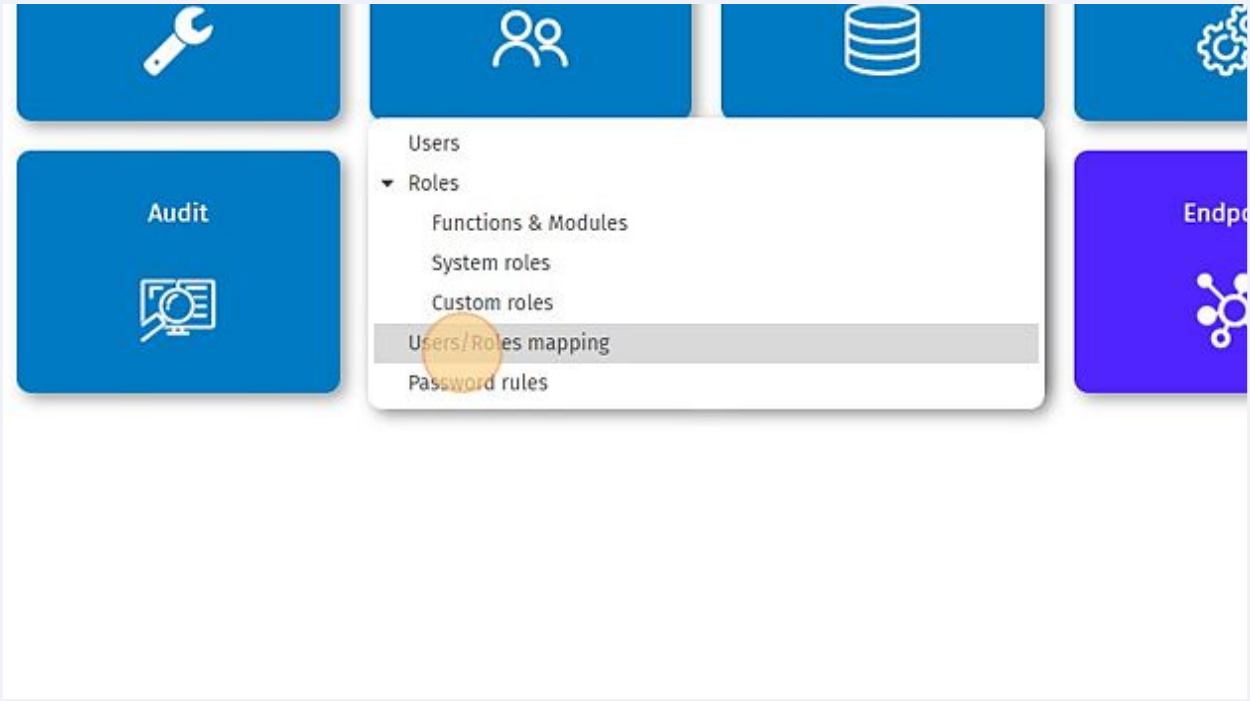


4 There are "System roles" and "Custom roles". "System roles" are default roles provided by Tagetik. For each role, the licence type used is listed. It is possible to set up "Custom roles" that will better fit the requirements of a client.

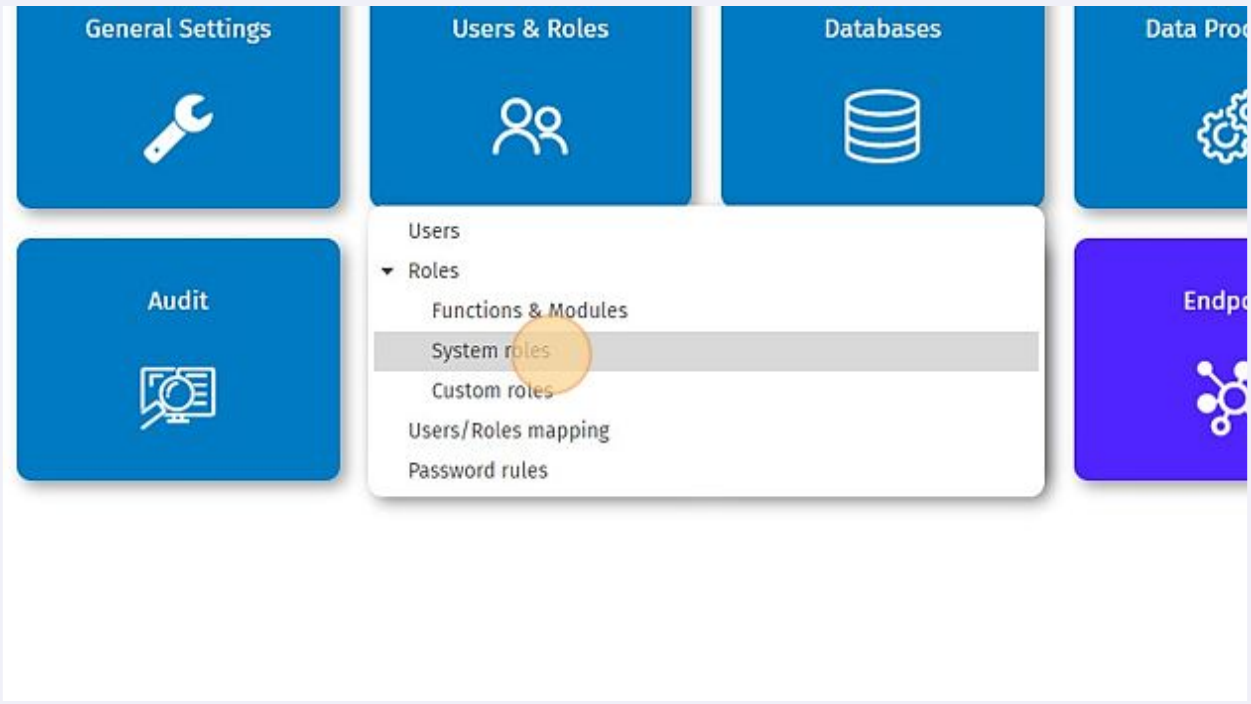


5 List of the "System roles"

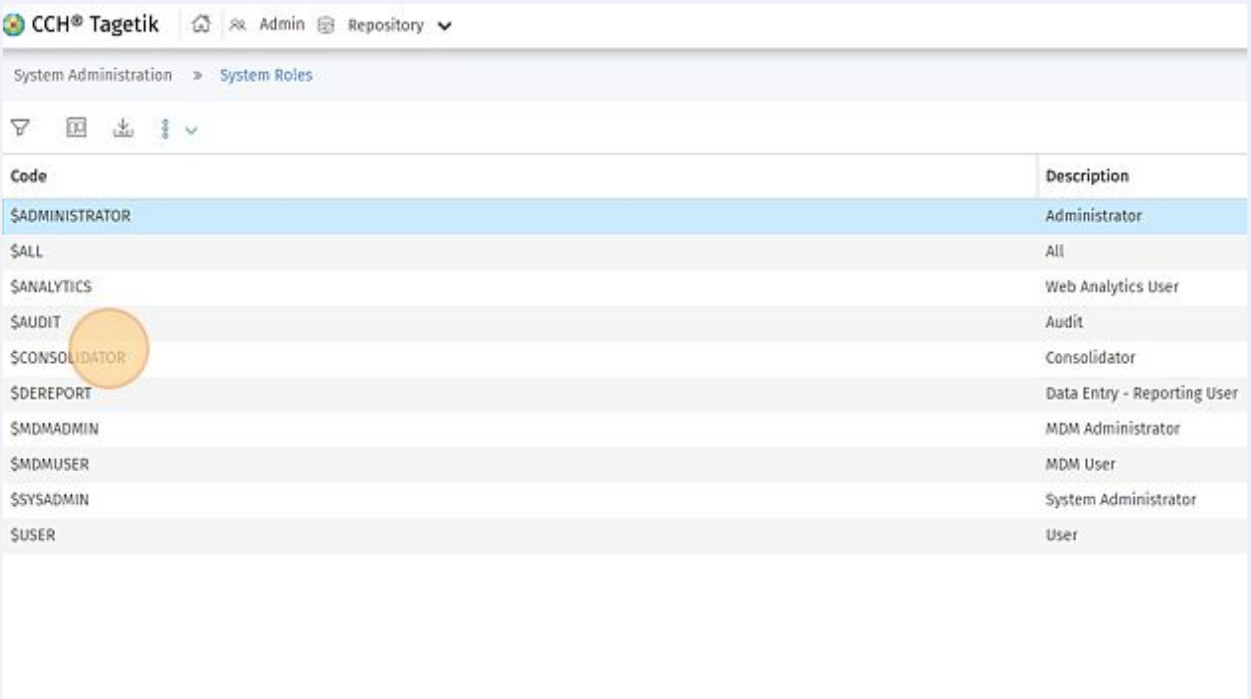


6 Click "Enabled functions" to see of the functionalities visible and active for that role. Each function list the type of Tagetik license used.

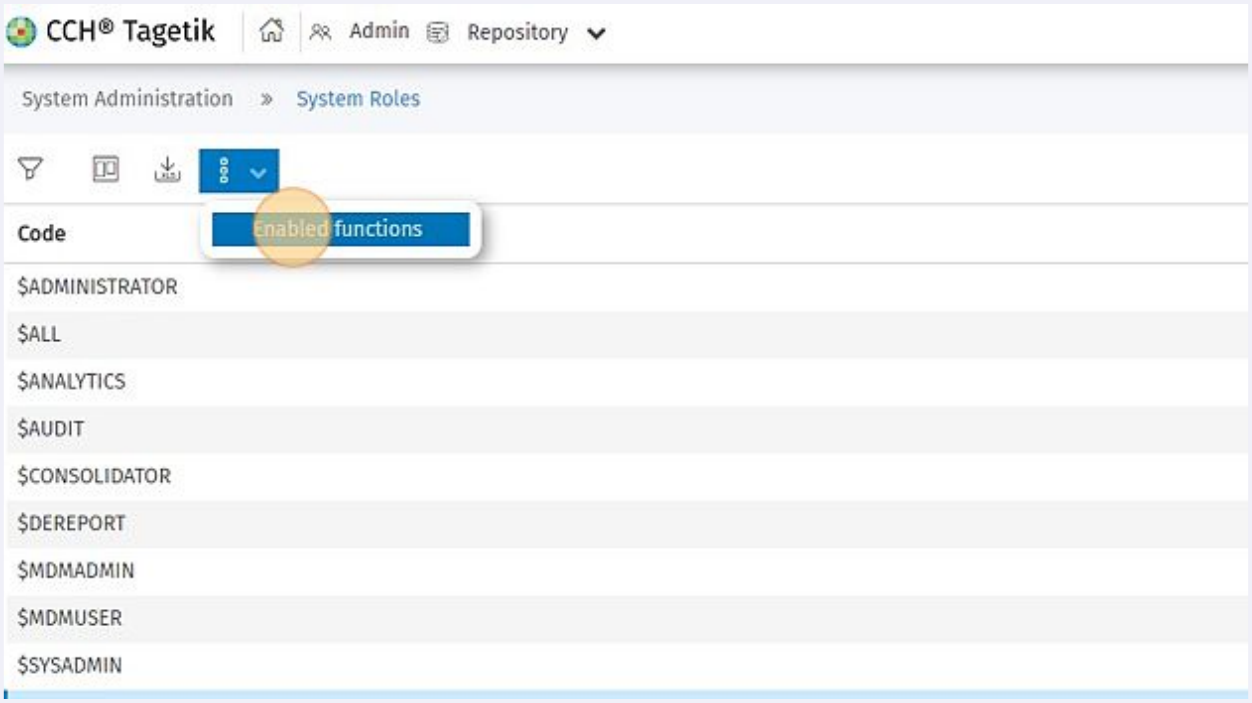


7 Each function list the type of Tagetik license used.

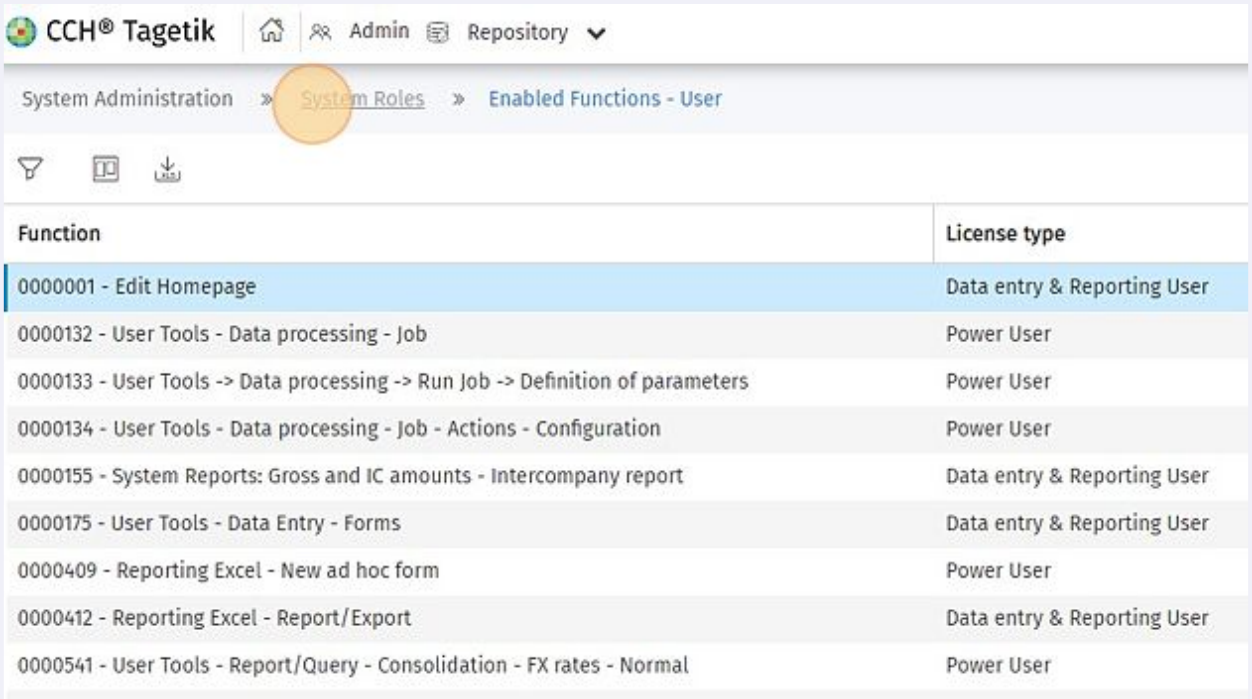


8 Once a custom role has been set-up, it can be assigned to a user. This is done via the "User/Roles Relationships".

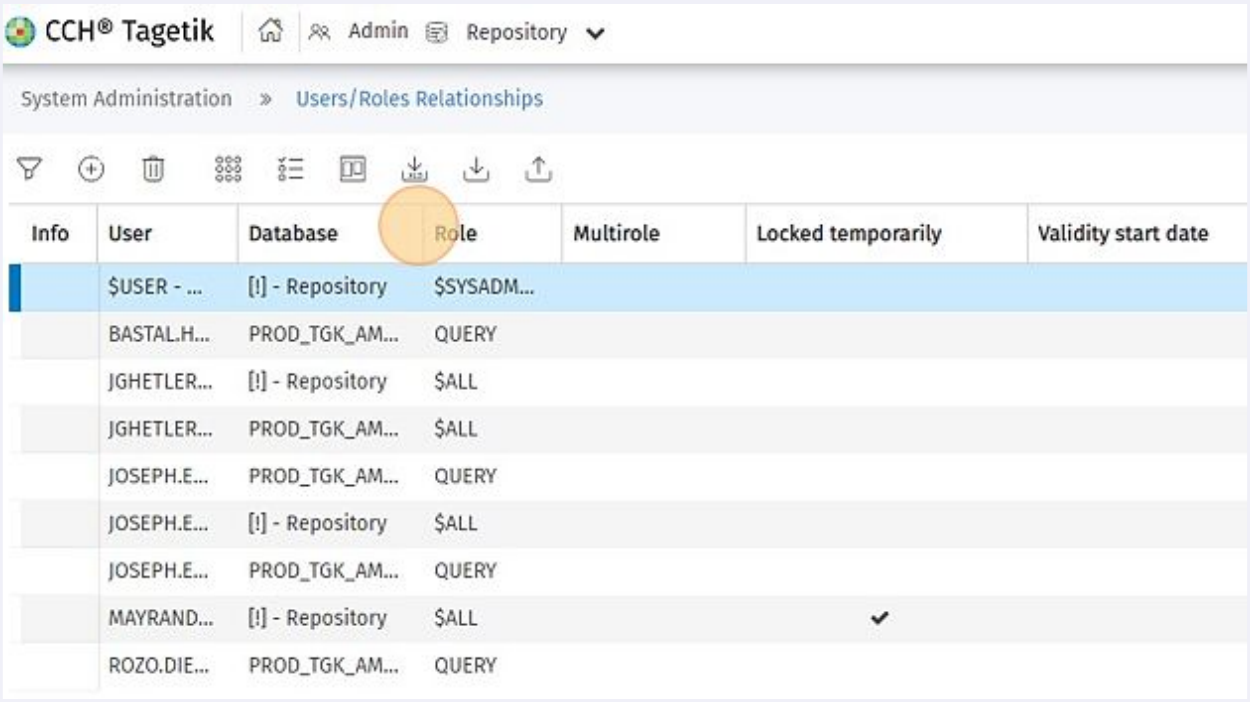

9 The modules & functions refer to all the icons, functionalities of Tagetik. They will have an impact to what the end-user sees when they navigate Tagetik in the web interface and also the excel add-in.

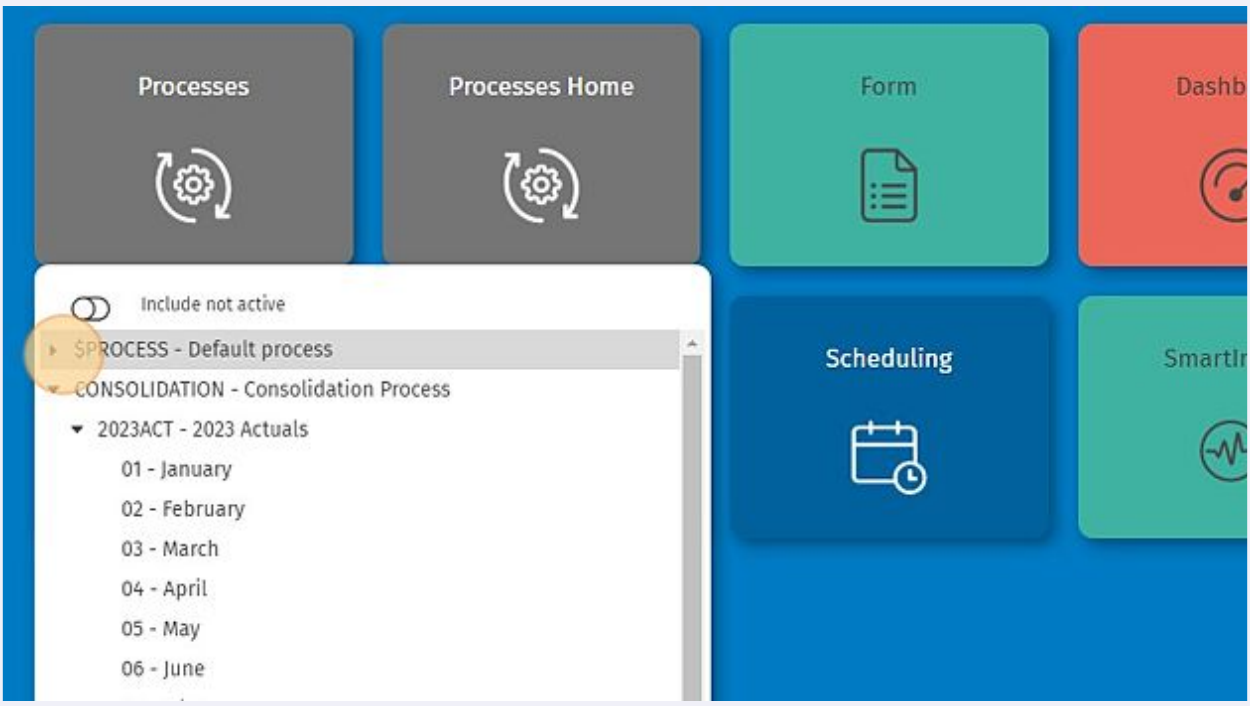


10 The roles created in the repository do not impact the user's access to dimensions. For example the entities, the workflow.

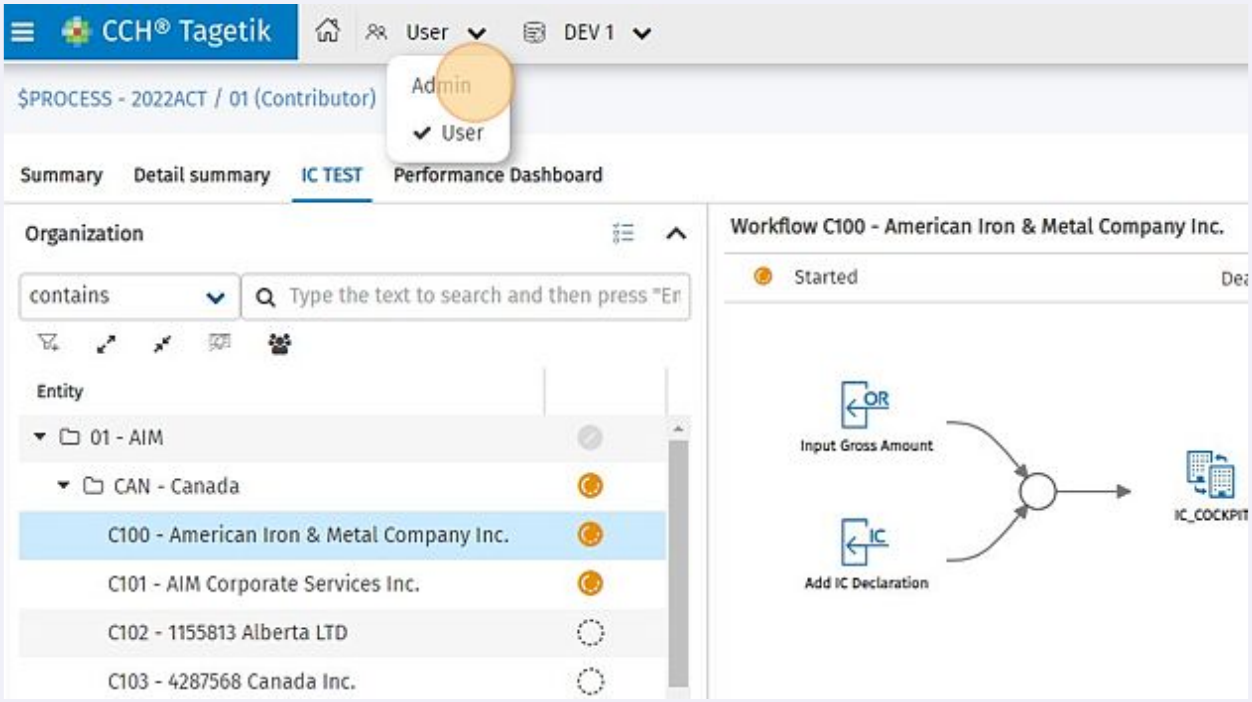

11 To limit the user access in the application, it is necessary to connect to the DB, in this case, DEV1 and go to "User Rights".



12 For each user, it then possible to restrict access on dimension, workflow, ETL, forms etc(...)

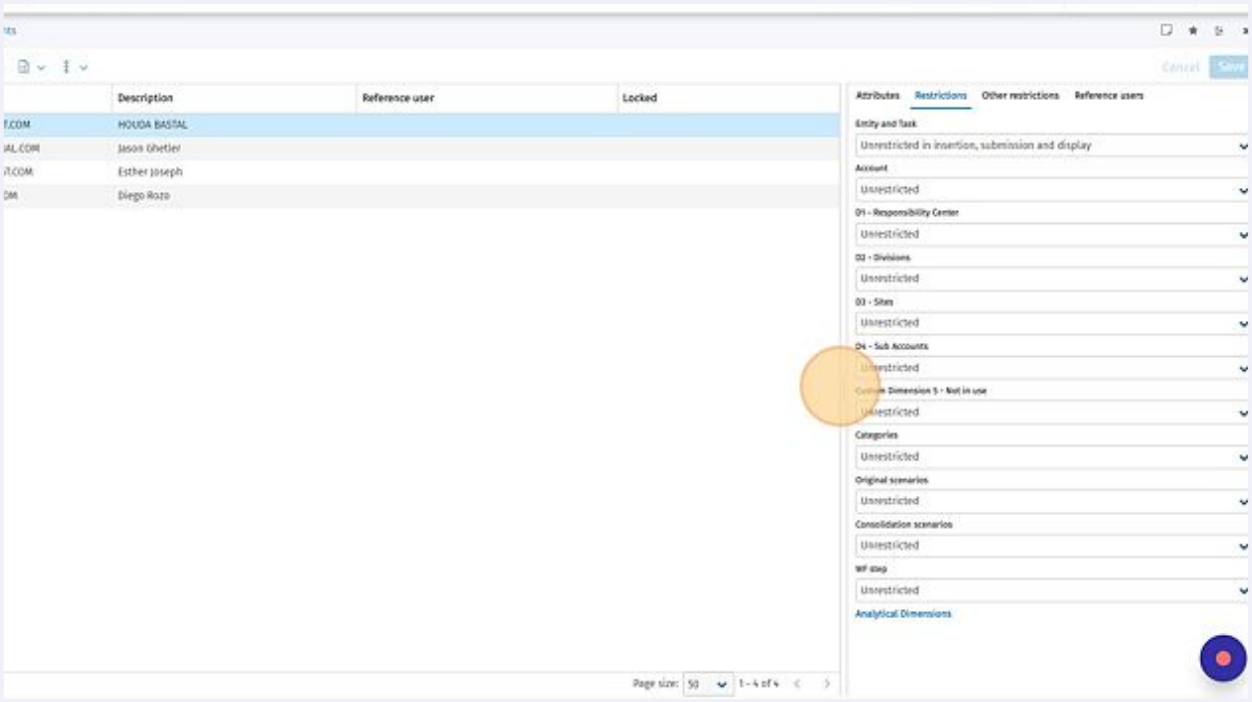

13 It is possible to create "Reference users", this is topic will be detailed in a different document.

