User Manual

Application Programming Interface

CCH Tagetik provides a wide range of APIs for reading or writing data and for performing several operations without having to access the graphical interface.

Version: 5.3.SP37

Wolters Kluwer

CCH® Tagetik

wolterskluwer.com

Table of contents

API 1

List of available API sets 2

Reference API 2

API for Data Exposure 4

Analytical Workspace data extraction API 4

API to retrieve formatted text 9

Api for Data Model Management 12

API Entity Dimension 12

API Entity Hierarchy 32

Prerequisites 32

URL 33

Supported Fields in Request 34

Additional Fields in Response 35

Examples of requests 35

API Entity Hierarchy Structure 40

Prerequisites 40

URL 41

Supported Fields in Request 42

Additional Fields in Response 43

Examples of requests 43

API Entity hierarchy relationships 50

Consolidation Scenario elements API 57

Prerequisites 58

URL 58

Supported Fields in Request 60

Additional Fields in Response 61

Examples of requests 61

Scenario/Periodo original API 78

Prerequisites 78

URL 79

Supported Fields in Request 80

Additional Fields in Response 81
Examples of requests 81
Scenario/Periodo consolidation API 87
Prerequisites 87
URL 88
Supported Fields in Request 90
Additional Fields in Response 90
Examples of requests 90
API Account 96

API Analytical Dimension 133

API Custom Dimension 135

API Currency Dimension 136
API Category Dimension 145
API Account 160
Analytical Workspace Management API 197
Dataset Management API 205
Dataset Fields Management API 207
Datasource Management API 216
Virtual Dataset Management API 225
Virtual Dataset Field Management API 237
Prerequisites 237
Partition Management API 244
Dictionary Management API 249
API Set Online Dataset 256
API Set Online Dataset V2 259
Datasource Fields Management API 261
API Set Offline Dataset 268
API Set Offline Dataset V2 270
Data Model REST APIs 272
API for extracting Analytical Workspace data model elements 275
API extraction of runtime parameters in a DTP 276

Api Data Processing 277

API on data processing in Analytical workspaces 277

API to export a dataset to file 289
Data processing APIs for loading data onto Analytical Workspaces 291
Financial Workspace update processing API 293
API for directly loading Quick Data Loader data 295
DTP run data processing APIs 298
API Machine Learning Execute 301
Dataset comment extraction data processing API 305
ETL via APIs 310
Access to Master Data Management functions via APIs 311
Application Job exposure with RESTful API 315
Access to audit data via API 316
Filter audit data through API 319

User Provisioning 323

User provisioning SCIM API 323
User endpoints 323
Groups Endpoint 327
Schemas endpoint 330
Bulk endpoint 331

Other APIs (uso interno) 336

Configuration and Reporting languages - API 336
Database Lock API 336
Access to Endpoint functions via API 337
Access to the database import and export functions via APIs 343
Financial Workspace Comments Exposure with RESTful APIs 347
Dataset comment extraction data processing API 349

API: Technical information 355

Enabling REST API 355
API Root URL 355
Authentication - On Premises 356
Authentication - Cloud 356
Common HTTP errors 359

API

Introduction

CCH Tagetik provides several sets of APIs that allow you to read or write data and perform numerous operations without requiring access to the graphical interface. This enables integration with third-party software and allows for the automation of various processes..

The API documentation is divided into two main sections:

- **Functional section** presents the list of available API sets, a description of the features offered, and the main use cases, see API: catalog of available sets
- **Technical section** includes technical specifications such as enablement, authentication, response codes, and best practices for integration, see API: Technical information

List of available API sets

Below is the list of currently supported API sets and the link to the relevant documentation.

API	Typology	Standard	Documentation
Analytical Information Hub - Data	Read only	REST / OData 4.0	User manual
Analytical Information Hub - Metadata	Read only	REST / OData 4.0	User manual
Analytical Information Hub - Data processing	Read only	REST / OpenAPI	User manual
Analytical Information Hub - Comments	Read only	REST / OpenAPI	User manual
Master Data Management - Data processing	Read only	REST / OpenAPI	User manual
ETL - Data processing	Read only	REST / OpenAPI	User manual
Job	Read only	REST / OpenAPI	User manual
Repository Database Lock API	Read/Write	REST/OpenAPI	
Repository Configuration and Reporting Languages API	Read only	REST / OpenAPI	User Manual
Repository Export/Import - Data processing	Read only	REST / OpenAPI	User manual
Repository Endpoint	Read/Write	REST / OpenAPI	User manual
Audit	Read only	REST / OData 4.0	User manual
Data Model (experimental)	Read/Write	REST/OpenAPI	
Data Model - Hierarchies	Read/Write	REST / OData 4.0 / OpenAPI	User manual
.Financial Workspace- Comments	Read only	REST / OpenAPI	User Manual
User Provisioning	Read/Write	REST / SCIM 2.0	User manual
Analytical Information Hub - Analytical Workspace	Read/Write	REST/OpenAPI	User manual
Analytical Information Hub - Dataset	Read/Write	REST/OpenAPI	
Analytical Information Hub - Dataset Fields	Read/Write	REST/OpenAPI	
Analytical Information Hub - Datasource	Read/Write	REST/OpenAPI	
Analytical Information Hub - Datasource Field	Read/Write	REST/OpenAPI	
Analytical Information Hub - Virtual Dataset	Read/Write	REST/OpenAPI	
Analytical Information Hub - Virtual Dataset Fields	Read/Write	REST/OpenAPI	
Analytical Information Hub - Set Online	Read/Write	REST/OpenAPI	
Analytical Information Hub - Set Offline	Read/Write	REST/OpenAPI	
Analytical Information Hub - Dataset Partitions List	Read/Write	REST/OpenAPI	
Analytical Information Hub - Dictionaries	Read/Write	REST/OpenAPI	
Data Model - Currency	Read/Write	REST/OpenAPI	
Data Model - Entity	Read/Write	REST/OpenAPI	
Data Model - Account	Read/Write	REST/OpenAPI	User manual
Data Model - Custom Dim1-5	Read	REST/ OpenAPI	User manual
Analytical Dimension	Read	REST/ OpenAPI	User manual

Reference API

Introduction

CCH Tagetik exposes RESTful API interfaces that allow external systems to extract data and launch data processing in CCH Tagetik. The following APIs are available:

- Analytical Workspace data extraction APIs: extract data from Analytical Workspace tables.
- Analytical Workspace data model element extraction APIs: extract elements of the data model from Analytical Workspace module tables.
- API on import/export data processing (AW, DTP) , update, clone in the Analytical workspaces: start/stop data processing in the Analytical workspace module.
- API on export data processing of a dataset to a file,
- APIs for loading data onto Analytical Workspaces: run/stop data processing for the updating of Analytical Workspace datasets (Quick Data Loader/Datasource Mapping)
- Financial Workspace update APIs: run/stop data processing for the updating of Financial Workspaces based on Analytical Workspace data. (Quick Data Loader/Datasource Mapping)
- API for directly loading data onto Analytical or Financial Workspaces using Quick Data Loader
- API to launch a Data Transformation Package (DTP).
- API for extracting runtime parameters present in a Data Transformation Package (DTP): returns the list of required runtime parameters present in the configuration of the given DTP.
- Tagetik Comment Exposure API: exposes form comments, both system and AIH, as an .xlsx file contained in a .zip, together with any attachments.
- API to retrieve formatted text: retrieves formatted text referenced within a partition field of a dataset

Access

The public RESTful APIs are disabled by default. To enable them, from the interface (Homepage Repository) > **General Settings** tile > **Security**, select "**Enable public REST APIs**". The various sets of APIs cannot be enabled individually.

APIs can be used with both *http* and *https* protocols. By default, RESTful APIs require "Basic Authentication".

If access to CCH Tagetik is gained via a reverse proxy, for OData APIs to function correctly the base URL must be set to one of the following configurations:

<table>
<tr><th>Element</th><th>Description</th></tr>
<tr><td>Reverse proxy</td><td>Depending on the configuration in use, set the specific base URL.

<table>
<tr><th>Configuration</th><th>Settings</th></tr>
<tr><td>HTTP protocol</td><td>Add the custom header x-tagetik-cpm-publicurl</td></tr>
<tr><td>Application server</td><td>Add the system property it.grupposervizi.easy.rest.api.reverseproxy to the application server configuration file</td></tr>
</table>

For example:
Service URL: https://example.com/prod/api/aih/data/v1/TGK_APP/001/Dataset_000001()
Base URL: https://example.com/prod</td></tr>
</table>

***IMPORTANT**: In order to use the RESTful API of the Analytical workspace with regard to data and the data model, the function 0004077 - Analytical workspace: OData services must be enabled in the user role.*

API for Data Exposure

Analytical Workspace data extraction API

Function

Extracts data from Analytical Workspace partitions.

URL

```
<api-root>/aih/data/v1/database_id/workspace_code/
```

If the application is configured to manage the **GDPR/DAC6**regulations, the Analytical Workspace data values on which the *Personal Data Protection*option is active will be exported in encrypted form.

Functions

- Physical datasets
- Virtual Dataset
- Datasource

All functions relate to data from the *Reporting Layer* of the specified Analytical Workspace.

For each function, the system may ask for filter parameters to be specified for the Process, Scenario, Period and Entity, in order to limit the volume of data returned. The request will depend on the presence of the following elements in the dataset:

- the type of partitioning
- the presence of columns for the Scenario, Period and Entity dimensions.

The data returned are subject to the user's visibility restrictions for the Scenario, Period and Entity dimensions.

Parameters

Non-partitioned Dataset/Virtual Dataset or Datasource

Data are read from the only existing partition and are potentially filtered on the basis of the presence of fields related to the Scenario, Period and Entity dimensions.

Parameter	Required	Description
Process	Optional	If defined, it must always be with a code (e.g. $PROCESS).
Scenarios	Only required if a column for the Scenario dimension is defined in the dataset. Only required if the Dataset has a column for the Scenario dimension defined.	Can be defined with: • a code (e.g. 001) • a list of codes separated by commas (e.g. 001,002,003) • the value *$ALL* to tell the system to select all values

Parameter	Required	Description
Period	Only required if a column for the Period dimension is defined in the dataset. Only required if the Dataset has a column for the Period dimension defined.	Can be defined with: • a code (e.g. 001) • a list of codes separated by commas (e.g. 001,002,003) • the value *$ALL* to tell the system to select all values
Entity	Only required if a column for the Entity dimension is defined in the dataset. Only required if the Dataset has a column for the Entity dimension defined.	In datasets, it can be defined with: • a code (e.g. 001) • a list of codes separated by commas (e.g. 001,002,003) • the value *$ALL* to tell the system to select all values In virtual datasets, it can only be defined with a single code.

Datasets/Virtual Datasets partitioned by Business Cycle

The data are read from the partitions corresponding to the values assigned to the Process, Scenario and Period parameters and potentially filtered based on fields related to the Scenario, Period and Entity dimensions. If the selected process is a single submission process, the values of the Scenario and Period parameters are not used to obtain the partitions from which to read.

Parameter	Required	Description
Process	Mandatory	Must always be defined with a code (e.g. $PROCESS).
Scenarios	Mandatory	Can be defined with: • ◦ a code (e.g. 001) ◦ a list of codes separated by commas (e.g. 001,002,003) ◦ the value *$ALL* to tell the system to select all values
Period	Mandatory	Can be defined with: • ◦ a code (e.g. 001) ◦ a list of codes separated by commas (e.g. 001,002,003) ◦ the value *$ALL* to tell the system to select all values
Entity	Only required if the Dataset has a column for the Entity dimension defined.	In datasets, it can be defined with: • ◦ a code (e.g. 001) ◦ a list of codes separated by commas (e.g. 001,002,003) ◦ the value *$ALL* to tell the system to select all values In virtual datasets, it can only be defined with a single code.

Datasets and Virtual Datasets partitioned by Business Cycle and Entity

The data are read from the partitions corresponding to the values assigned to the Process, Scenario and Period parameters and potentially filtered based on fields related to the Scenario, Period and Entity dimensions. If the selected process is a single submission process, the values of the Scenario and Period parameters are not used to obtain the partitions from which to read.

Parameter	Required	Description
Process	Mandatory	Must always be defined with a code (e.g. $PROCESS).
Scenarios	Mandatory	Can be defined with: • ◦ a code (e.g. 001) ◦ a list of codes separated by commas (e.g. 001,002,003) ◦ the value *$ALL* to tell the system to select all values
Period	Mandatory	Can be defined with: • ◦ a code (e.g. 001) ◦ a list of codes separated by commas (e.g. 001,002,003) ◦ the value *$ALL* to tell the system to select all values
Entity	Mandatory	In datasets, it can be defined with: • ◦ a code (e.g. 001) ◦ a list of codes separated by commas (e.g. 001,002,003) ◦ the value *$ALL* to tell the system to select all values • In virtual datasets, it can only be defined with a single code.

Request to check parameters by Function

Returns the list of mandatory parameters of a dataset's *Functions*:

```
<api-root>/aih/metadata/v1/database_id/workspace_code/dataset_code/Parameters
```

Examples

Examples related to physical datasets can be applied to virtual datasets by replacing the syntax **Dataset** with **VirtualDataset**.

For example, *Dataset_000001(Scenario='2020ACT',Period='12',Entity='001')* becomes*VirtualDataset_000001 (Scenario...)*.

For **Datasources**, the syntax is similar (*Datasource_000001(Scenario...)*) but the extraction logic differs due to the absence of data partitioning.

Parameters	URL	Description
Non-partitioned datasets		
None	`<api-root>/data/v1/TGK_APP/001/Dataset_000001()`	Data are read unfiltered from the only existing partition.
Non-partitioned dataset with Scenario, Period and Entity fields		
• Scenarios • Period • Entity	`<api-root>/aih/data/v1/TGK_APP/001/Dataset_000001 (Scenario='2020ACT',Period='12',Entity='001')`	Data are read filtered by Scenario, Period and Entity from the only existing partition.
Dataset partitioned by Business Cycle in single submission Process		
• Process • Scenarios • Period	`<api-root>/aih/data/v1/TGK_APP/001/Dataset_000001 (Process='BUDGET',Scenario='2020BDG',Period='12')`	Data are read ignoring the Scenario and Period filters from the only existing partition for the selected Process.
Dataset partitioned by Business Cycle with Scenario and Period fields in single submission Process		
• Process • Scenarios • Period	`<api-root>/aih/data/v1/TGK_APP/001/Dataset_000001 (Process='BUDGET',Scenario='2020BDG',Period='12')`	Data are read filtered by Scenario and Period from the only existing partition for the selected Process.

Parameters	URL	Description
Dataset partitioned by Business Cycle with Scenario, Period and Entity fields in single submission Process		
• Process • Scenarios • Period • Entity	<api-root>/**aih/data/v1**/TGK_APP/001/Dataset_000001(Process='BUDGET',Scenario='2020BDG',Period='12',Entity='001')	Data are read filtered by Scenario, Period and Entity from the only existing partition for the selected Process.
Dataset partitioned by Business Cycle in Scenario/Period submission Process		
• Process • Scenarios • Period	<api-root>/**aih/data/v1**/TGK_APP/001/Dataset_000001(Process='ACTUAL',Scenario='2020ACT',Period='12')	The data is read unfiltered from the only existing partition for the selected Process, Scenario and Period.
Dataset partitioned by Business Cycle with Entity field in Scenario/Period submission Process		
• Process • Scenarios • Period • Entity	<api-root>/**aih/data/v1**/TGK_APP/001/Dataset_000001(Process='ACTUAL',Scenario='2020ACT',Period='12',Entity='001')	Data are read filtered by Entity from the only existing partition for the selected Process, Scenario and Period.
Dataset partitioned by Business Cycle and Entity in single submission Process		
• Process • Scenarios • Period • Entity	<api-root>/**aih/data/v1**/TGK_APP/001/Dataset_000001(Process='BUDGET',Scenario='2020BDG',Period='12',Entity='001')	Data are read ignoring the filters for Scenario and Period from the only existing partition for the selected Process and Entity.
Dataset partitioned by Business Cycle and Entity with Scenario and Period fields in single submission Process		
• Process • Scenarios • Period • Entity	<api-root>/**aih/data/v1**/TGK_APP/001/Dataset_000001(Process='BUDGET',Scenario='2020BDG',Period='12',Entity='001')	Data are read filtered by Scenario and Period from the only existing partition for the selected Process and Entity.
Dataset partitioned by Business Cycle and Entity by selecting a Scenario/Period submission Process		
• Process • Scenarios • Period • Entity	<api-root>/**aih/data/v1**/TGK_APP/001/Dataset_000001(Process='ACTUAL',Scenario='2020ACT',Period='12',Entity='001')	The data is read unfiltered from the only existing partition for the selected Process, Scenario, Period and Entity.
Datasource with Scenario, Period and Entity fields		
• Scenarios • Period • Entity	<api-root>/**aih/data/v1**/TGK_APP/001/Datasource_000003(Scenario='2016BDG',Period='12',Entity='001')	Data are read filtered by the selected Scenario, Period and Entity.
Datasource without Scenario, Period or Entity fields		
None	<api-root>/**aih/data/v1**/TGK_APP/001/Datasource_000003()	The data are read without filters.

OData query options

A list of supported OData query options is provided below.

Example	Description
$count	
http://127.0.0.1:8080/tagetikcpm/api/aih/data/v1/TGK_APP/001/Datasource_000003()?$count=true	Returns the number of records in the *@odata.count* annotation, but not the record values.

Example	Description
$top	
`http://127.0.0.1:8080/tagetikcpm/api/aih/data/v1/TGK_APP/001/Datasource_000003()?$top=100`	Returns the first 100 records.
$skip	
`http://127.0.0.1:8080/tagetikcpm/api/aih/data/v1/TGK_APP/001/Datasource_000003()?$top=100&$skip=50`	Returns only the first 100 records starting with record 51. This option cannot be used without the **$top** option.
$orderby	
`http://127.0.0.1:8080/tagetikcpm/api/aih/data/v1/TGK_APP/001/Datasource_000003()?$orderby=Account desc,Entity asc`	Returns records sorted by Account and Entity. The use of this option is advisable if the **$top** and **$skip** options (in packet transfer mode) are also being used, to indicate an order to be followed both to improve reading performance and to prevent transferring an individual record several times in different packets.
$select	
`http://127.0.0.1:8080/tagetikcpm/api/aih/data/v1/TGK_APP/001/Datasource_000003()?$select=Scenario,Period,Entity,Account,Amount`	Returns only values related to the Scenario, Period, Entity and Amount fields, for every record. This allows you to select the necessary information only, thus improving performance (transfer time and memory allocated by CCH Tagetik's application server).
$filter	
`http://127.0.0.1:8080/tagetikcpm/api/aih/data/v1/TGK_APP/001/Datasource_000003()?$filter=Account eq '001' a Amount ne 0`	Returns only values with Account = 01 and Amount ≠ 0, for every record.

$filter details

The filter value depends on the type of field to be filtered:

- for *Text* fields, the value must be delimited between single quotes (superscript),
- for *Numeric* fields, the value must not be delimited,
- for *Timestamp* fields, the value must not be delimited and must be indicated using the format *yyyy-mm-ddThh:mi:ssZ* (e.g. 2021-01-01T23:45:12Z), or *yyyy-mm-ddThh:mi:ss.fffZ* (e.g. 2021-01-01T02:08:06.123Z). The indicated value must be in UTC (Coordinated Universal Time).

Below are the details of the operators managed:

Operator	Description	Example
Eq	Equal	`/Suppliers?$filter=Address/City eq 'Redmond'`
In	In	`/Suppliers?$filter=Address/City in ('Redmond','London')`
Ne	Not equal	`/Suppliers?$filter=Address/City ne 'London'`
Gt	Greater than	`/Products?$filter=Price gt 20`
Ge	Greater than or equal	`/Products?$filter=Price ge 10`
Lt	Less than	`/Products?$filter=Price lt 20`
Le	Less than or equal	`/Products?$filter=Price le 100`
And	Logical and	`/Products?$filter=Price le 200 and Price gt 3.5`
Or	Logical or	`/Products?$filter=Price le 3.5 or Price gt 200`
Not	Logical negation	`/Products?$filter=not (Address/City eq 'Redmond')`

Other parameters

It is possible to specify a custom parameter, **numberFormat**, which controls the data type used for numeric fields: if the parameter value is **double**, the ***Double*** type will be used; if the parameter value is **decimal**, the ***Decimal*** type will be used

If the parameter is not specified, the ***Double*** type will be used.

Usage example:

http://127.0.0.1:8080/tagetikcpm/api/aih/data/v1/TGK_APP/001/Datasource_000003()?**numberFormat=decimal**

***Important**: API calls have a non-modifiable timeout of 10 minutes. To avoid reaching this timeout, you can reduce the amount of data retrieved by individual API calls by applying one or more of the following strategies:*

- If the service has input parameters (Process, Scenario, Period, Entity), it is recommended to specify one or more values rather than selecting everything via the '$ALL' syntax.
- If you do not need all the fields in the dataset, you can extract a subset using the select syntax in the query options (e.g. ?$select=OID,ACCOUNT,COST_CENTER)
- To further limit the data, you can use the filter syntax in the query options (e.g. ?$filter=Account eq '01')
- In the case of large volumes of data, client-side pagination can be used in query options (e.g. ?$top=1000&$skip=1000)

API to retrieve formatted text

API to retrieve formatted text

Retrieves the formatted text referenced within a field of a dataset partition. The field is identified by the combination of:

- *database_id*,
- *workspace_code*,
- *dataset_code*,
- *field_code*

specified in the url and the combination of:

- *process*,
- *scenario*,
- *period*,
- *entity*,
- *filters*

specified in the url and the combination of:

Method

POST

URL

```
api-root>/aih/richtext/v1/database_id/workspace_code/dataset_code/field_code
```

Property

The following properties related to the execution context can be included in JSON format in the body of the request:

Property	Description	Options
process	Process for identifying the partition. Only mandatory for partitioned datasets	Default: $
scenario	Scenario for identifying the partition. Only required for processes with submission by scenario and period.	Default: $
period	Period for identifying the partition. Only required for processes with submission by scenario and period.	Default: $
entity	Entity for identifying the partition. Mandatory only for datasets partitioned by Business Cycle and Entity	Default: $
filters	Filters to uniquely identify a record	field: name of the field on which to filter op: may be **EQUALS** or **IS_NULL** value: value of the field in the case of op=EQUALS

Examples

Extracting formatted text from an unpartitioned dataset

```
{
    "filters": [{
        "field": "ACCOUNT",
        "op": "EQUALS",
        "value": "001"
    }, {
        "field": "CATEGORY",
        "op": "IS_NULL"
    }]
}
```

Retrieving formatted text from a partitioned dataset for Business Cycle with single Submission process

```
{
    "process": "BUDGET",
    "filters": [{
        "field": "ACCOUNT",
        "op": "EQUALS",
        "value": "001"
    }, {
        "field": "CATEGORY",
        "op": "IS_NULL"
    }]
}
```

Retrieving formatted text from a partitioned dataset by Business Cycle with Submission process by scenario and period

```
{
    "process": "ACTUAL",
    "scenario": "2024ACT",
    "period": "12",
    "filters": [{
        "field": "ACCOUNT",
```

```
        "op": "EQUALS",
        "value": "001"
    }, {
        "field": "CATEGORY",
        "op": "IS_NULL"
    }]
}
```

Retrieving formatted text from a partitioned dataset for Business Cycle and Entity with single Submission process

```
{
    "process": "BUDGET",
    "entity": "001",
    "filters": [{
        "field": "ACCOUNT",
        "op": "EQUALS",
        "value": "001"
    }, {
        "field": "CATEGORY",
        "op": "IS_NULL"
    }]
}
```

Retrieving formatted text from a partitioned dataset for Business Cycle and Entity with Submission process by scenario and period

```
{
    "process": "ACT",
    "scenario": "2024ACT",
    "period": "12",
    "entity": "001",
    "filters": [{
        "field": "ACCOUNT",
        "op": "EQUALS",
        "value": "001"
    }, {
        "field": "CATEGORY",
        "op": "IS_NULL"
    }]
}
```

Data returned

The response returns the content of the formatted text

Api for Data Model Management

API Entity Dimension

This API enables the extraction of information, creation, modification and deletion of the Entity dimension elements of the Tagetik application.

API Title:	AIH Entity openapi 3.0.3
Description:	API for the Entity dimension's elements
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth

Prerequisites

In order to use these APIs, the user must authenticate through the authentication mode chosen for [CCH Tagetik].

Moreover, APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both http and https protocols.

For more details on authentication and enabling, see "Enabling REST API" on page 355.

Request format: JSON

Response format: JSON

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
POST	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements	Entity's Element		Entity's Element	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements/{id}			Entity's Element	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)

PUT	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements/{id}	Entity's Element		Entity's Element	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements		filter sort skip take (optional parameters)	List of Entity Elements	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements-count		filter sort skip take (optional parameters)	Quantity of Entity Element	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements-fetch		properties filter sort skip take (properties mandatory, other parameters optional)	List of Entity Elements	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
PATCH	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements/{id}	Entity's Element		Entity's Element	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

POST	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements-bulk	Entity Element (s)		Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
POST	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements-bulk-delete-async	IDs list of Entity Elements		Dataprocessing ID	202 (Accepted)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements-bulk-delete-async/{dataprocessingID}			Date and time of request, dataprocessing status, parameters	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
DELETE	<api-root>/api/aih/dimensions/v1/{dbID}/entity/elements-bulk-delete-async/{dataprocessingID}			Dataprocessing ID	202 (Accepted)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accepts all fields except "oid"

"properties" accepts all response fields, plus the "description" field displaying the description in the DB's default language. (mandatory)

The post-bulk call accepts post, patch and put operations.

Supported Fields in Request (fields that may be present in the body of the request)

Entity Field	Supported cardinality	Supported Values
id	-	string (mandatory)
oid	-	string
descriptions.[lingua]	-	string (one mandatory)
validity.startDate	-	date
validity.endDate	-	date
sorting	-	string
documentation	-	string
additionalInfo.businessName	-	EDITABLE, EDITABLE_ONLY_ON_NEW_ROWS, READ_ONLY
additionalInfo.legalHQLocation	-	ATTRIBUTE, CONDITION, LEVEL, FILTER
additionalInfo.legalHQ	-	string
additionalInfo.administrativeHQLocation	-	string
additionalInfo.administrativeHQ	-	string
additionalInfo.mainOffice	-	string
additionalInfo.manager		string
additionalInfo.icMatchingManagers	-	string
additionalInfo.email	-	CODE, DESCRIPTION, CODE_AND_DESCRIPTIO
additionalInfo.phone	-	string
customAttributes.[attributeDescription]	-	string
currency.id	-	string (Currency ID)
defaultCustomDimension1.id	-	string (CustomDimensionElement ID)
defaultCustomDimension2.id	-	string (CustomDimensionElement ID)
defaultCustomDimension3.id	-	string (CustomDimensionElement ID)
defaultCustomDimension4.id	-	string (CustomDimensionElement ID)
defaultCustomDimension5.id	-	string (CustomDimensionElement ID)
restrictionCustomDimension1.restriction	-	RESTRICTED, NONE
restrictionCustomDimension2.restriction	-	RESTRICTED, NONE
restrictionCustomDimension3.restriction	-	RESTRICTED, NONE
restrictionCustomDimension4.restriction	-	RESTRICTED, NONE
restrictionCustomDimension5.restriction	-	RESTRICTED, NONE
rules.fiscalPolicy.id	-	string
rules.consolidation.consolidationMethod	-	COST, EQUITY, LINEBYLINE, PROPORTIONAL
rules.consolidation.deconsolidationMethod	-	NOTTODECONSOLIDATE,ONLYINITIALBALANCE,FROMPREVIOUSPERIOD,FROMCURRENTPERIOD
rules.consolidation.percConsolidation	-	number
rules.consolidation.generateCtpElimination	-	ALLELIMINATIONLOGICS, EXCLUDECTPELIMINATIONLOGICS, NEVER
rules.consolidation.onlyCtp	-	true/false
rules.consolidation.onlyConsolidatorData	-	true/false
rules.consolidation.icMatching	-	MANDATORY, OPTIONAL, AUTOMATIC
rules.consolidation.excludeAndUseReferenceEntity	-	true/false
rules.consolidation.referenceEntity.id	-	string (Entity ID)

rules.taxAndCashManagement.runAsEntity	-	true/false
rules.taxAndCashManagement.runAsSubentity	-	true/false

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Additional Fields in Response (fields that may be present in the body of the response)

Entity Field	Supported Values
currency.description	string
defaultCustomDimension1.dimensionName	string
defaultCustomDimension1.description	string
defaultCustomDimension2.dimensionName	string
defaultCustomDimension2.description	string
defaultCustomDimension3.dimensionName	string
defaultCustomDimension3.description	string
defaultCustomDimension4.dimensionName	string
defaultCustomDimension4.description	string
defaultCustomDimension5.dimensionName	string
defaultCustomDimension5.description	string
restrictionCustomDimension1.dimensionName	string
restrictionCustomDimension2.dimensionName	string
restrictionCustomDimension3.dimensionName	string
restrictionCustomDimension4.dimensionName	string
restrictionCustomDimension5.dimensionName	string
bankingData.constitutionDate	date
bankingData.abiCode	number
bankingData.bankGroupRegistrationDate	date
bankingData.bankitReportingCode	string
bankingData.assignmentDate	date
bankingData.centralCreditRiskCode	string
bankingData.iso	string
bankingData.individualDataSignaling	true/false
bankingData.intragroupSignaling	true/false
bankingData.excludeFinInvAutomaticInput	true/false
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB,

Examples of requests

Create an Entity Element

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/entities/elements

Body


```
{
    "id": "TESTENT",
    "descriptions": {
        "it": "TESTENT-it",
        "en": "TESTENT-en"
    },
    "sorting": "Asc",
    "documentationLink": "www.documentation.com",
    "additionalInfo": {
        "businessName": "Business name",
        "legalHQLocation": "Legal HQ Location",
        "administrativeHQLocation": "Administrative HQ Location",
        "administrativeHQ": "Legal administrative HQ",
        "LegalHqLocation": "Legal HQ Location",
        "mainOffice": "main office",
        "manager": "manager",
        "email": "entity@email.com",
        "phone": "+393332215478",
        "icMatchingManagers": "ic matching managers"
    },
    "customAttributes": {
        "Country": "Italy",
        "Entering group": "1090",
        "Leaving group": "1088",
        "Other custom attribute": "Other"
    },
    "currency": {
        "id": "EUR"
    },
    "defaultCustomDimension1": {
        "id": "CC_500"
    },
    "defaultCustomDimension2": {
        "id": "PD_500"
    },
    "defaultCustomDimension3": {
        "id": "CM_500"
    },
    "defaultCustomDimension4": {
        "id": "ABC1"
    },
    "defaultCustomDimension5": {
        "id": "ABC_03"
    },
    "restrictionCustomDimension1": {
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension2": {
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension3": {
        "restriction": "NONE"
    },
    "restrictionCustomDimension4": {
        "restriction": "NONE"
    },
    "restrictionCustomDimension5": {
        "restriction": "NONE"
    }
}
```

Example of response


```
{
    "id": "TESTENT",
    "validity": null,
    "sorting": "Asc",
    "documentationLink": "www.documentation.com",
    "additionalInfo": {
        "businessName": "Business name",
        "administrativeHQLocation": "Administrative HQ Location",
        "administrativeHQ": "Legal administrative HQ",
        "legalHQLocation": "Legal HQ Location",
        "legalHQ": null,
        "mainOffice": "main office",
        "manager": "manager",
        "email": "entity@email.com",
        "phone": "+393332215478",
        "icMatchingManagers": "ic matching managers"
    },
    "customAttributes": {
        "Country": "Italy",
        "Entering Group": null,
        "Leaving Group": null,
        "SP Result DEV-82317": null
    },
    "currency": {
        "id": "EUR",
        "description": "Euro"
    },
    "defaultCustomDimension1": {
        "id": "CC_500",
        "dimensionName": "Cost Centers",
        "description": "Generic Cost Center"
    },
    "defaultCustomDimension2": {
        "id": "PD_500",
        "dimensionName": "Products",
        "description": "Generic Product"
    },
    "defaultCustomDimension3": {
        "id": "CM_500",
        "dimensionName": "Customers en",
        "description": "Generic Customer"
    },
    "defaultCustomDimension4": {
        "id": "ABC1",
        "dimensionName": "Employees",
        "description": "Generic Employee"
    },
    "defaultCustomDimension5": {
        "id": "ABC_03",
        "dimensionName": "Miscellaneous",
        "description": "Product Packaging"
    },
    "restrictionCustomDimension1": {
        "dimensionName": "Cost Centers",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension2": {
        "dimensionName": "Products",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension3": {
        "dimensionName": "Customers en",
        "restriction": "NONE"
```

```
        },
        "restrictionCustomDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "restrictionCustomDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "rules": {
            "fiscalPolicy": {
                "id": null,
                "description": null
            },
            "consolidation": {
                "consolidationMethod": "COST",
                "deconsolidationMethod": "NOTTODECONSOLIDATE",
                "percConsolidation": null,
                "generateCtpElimination": "ALLELIMINATIONLOGICS",
                "onlyCtp": false,
                "onlyConsolidatorData": false,
                "icMatching": "MANDATORY",
                "excludeAndUseReferenceEntity": false,
                "referenceEntity": null
            },
            "taxAndCashManagement": {
                "runAsEntity": true,
                "runAsSubentity": false
            }
        },
        "bankingData": {
            "constitutionDate": null,
            "abiCode": null,
            "bankGroupRegistrationDate": null,
            "bankitReportingCode": null,
            "assignmentDate": null,
            "centralCreditRiskCode": null,
            "iso": null,
            "individualDataSignaling": false,
            "intragroupSignaling": false,
            "excludeFinInvAutomaticInput": false
        },
        "updateInfo": {
            "user": "USER",
            "date": "2026-02-27T16:05:01.512+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "en": "TESTENT-en",
            "it": "TESTENT-it",
            "ja": null,
            "aa": null
        }
    }
```


specific element of the Entity

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/entities/elements/TESTENT
Body	-

Example of response


```
{
    "id": "TESTENT",
    "validity": null,
    "sorting": "Asc",
    "documentationLink": "www.documentation.com",
    "additionalInfo": {
        "businessName": "Business name",
        "administrativeHQLocation": "Administrative HQ Location",
        "administrativeHQ": "Legal administrative HQ",
        "legalHQLocation": "Legal HQ Location",
        "legalHQ": null,
        "mainOffice": "main office",
        "manager": "manager",
        "email": "entity@email.com",
        "phone": "+393332215478",
        "icMatchingManagers": "ic matching managers"
    },
    "customAttributes": {
        "Country": "Italy",
        "Entering Group": null,
        "Leaving Group": null,
        "SP Result DEV-82317": null
    },
    "currency": {
        "id": "EUR",
        "description": "Euro"
    },
    "defaultCustomDimension1": {
        "id": "CC_500",
        "dimensionName": "Cost Centers",
        "description": "Generic Cost Center"
    },
    "defaultCustomDimension2": {
        "id": "PD_500",
        "dimensionName": "Products",
        "description": "Generic Product"
    },
    "defaultCustomDimension3": {
        "id": "CM_500",
        "dimensionName": "Customers en",
        "description": "Generic Customer"
    },
    "defaultCustomDimension4": {
        "id": "ABC1",
        "dimensionName": "Employees",
        "description": "Generic Employee"
    },
    "defaultCustomDimension5": {
        "id": "ABC_03",
        "dimensionName": "Miscellaneous",
        "description": "Product Packaging"
    },
    "restrictionCustomDimension1": {
        "dimensionName": "Cost Centers",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension2": {
        "dimensionName": "Products",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension3": {
        "dimensionName": "Customers en",
        "restriction": "NONE"
```

```
        },
        "restrictionCustomDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "restrictionCustomDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "rules": {
            "fiscalPolicy": {
                "id": null,
                "description": null
            },
            "consolidation": {
                "consolidationMethod": "COST",
                "deconsolidationMethod": "NOTTODECONSOLIDATE",
                "percConsolidation": null,
                "generateCtpElimination": "ALLELIMINATIONLOGICS",
                "onlyCtp": false,
                "onlyConsolidatorData": false,
                "icMatching": "MANDATORY",
                "excludeAndUseReferenceEntity": false,
                "referenceEntity": null
            },
            "taxAndCashManagement": {
                "runAsEntity": true,
                "runAsSubentity": false
            }
        },
        "bankingData": {
            "constitutionDate": null,
            "abiCode": null,
            "bankGroupRegistrationDate": null,
            "bankitReportingCode": null,
            "assignmentDate": null,
            "centralCreditRiskCode": null,
            "iso": null,
            "individualDataSignaling": false,
            "intragroupSignaling": false,
            "excludeFinInvAutomaticInput": false
        },
        "updateInfo": {
            "user": "USER",
            "date": "2026-02-27T16:05:01.512+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "en": "TESTENT-en",
            "it": "TESTENT-it",
            "ja": null,
            "aa": null
        }
    }
```


Enter an Entity element

Method	PUT
Endpoint	/api/aih/dimensions/v1/{dbID}/entities/elements/TESTENT

Body


```
{
    "id": "TESTENT",
    "descriptions": {
        "it": null,
        "en": "Inserted"
    },
    "sorting": "Asc",
    "documentationLink": "www.documentation.com",
    "additionalInfo": {
        "businessName": "Business name",
        "legalHQLocation": "Legal HQ Location",
        "administrativeHQLocation": "Administrative HQ Location",
        "administrativeHQ": "Legal administrative HQ",
        "LegalHqLocation": "Legal HQ Location",
        "mainOffice": "main office",
        "manager": "manager",
        "email": "entity@email.com",
        "phone": "+393332215478",
        "icMatchingManagers": "ic matching managers"
    },
    "customAttributes": {
        "Country": "Italy",
        "Entering group": "1090",
        "Leaving group": "1088",
        "Other custom attribute": "Other"
    },
    "currency": {
        "id": "EUR"
    },
    "defaultCustomDimension1": {
        "id": "CC_500"
    },
    "defaultCustomDimension2": {
        "id": "PD_500"
    },
    "defaultCustomDimension3": {
        "id": "CM_500"
    },
    "defaultCustomDimension4": {
        "id": "ABC1"
    },
    "defaultCustomDimension5": {
        "id": "ABC_03"
    },
    "restrictionCustomDimension1": {
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension2": {
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension3": {
        "restriction": "NONE"
    },
    "restrictionCustomDimension4": {
        "restriction": "NONE"
    },
    "restrictionCustomDimension5": {
        "restriction": "NONE"
    }
}
```


-

Example of response


```
{
    "id": "TESTENT",
    "validity": null,
    "sorting": "Asc",
    "documentationLink": "www.documentation.com",
    "additionalInfo": {
        "businessName": "Business name",
        "administrativeHQLocation": "Administrative HQ Location",
        "administrativeHQ": "Legal administrative HQ",
        "legalHQLocation": "Legal HQ Location",
        "legalHQ": null,
        "mainOffice": "main office",
        "manager": "manager",
        "email": "entity@email.com",
        "phone": "+393332215478",
        "icMatchingManagers": "ic matching managers"
    },
    "customAttributes": {
        "Country": "Italy",
        "Entering Group": null,
        "Leaving Group": null,
        "SP Result DEV-82317": null
    },
    "currency": {
        "id": "EUR",
        "description": "Euro"
    },
    "defaultCustomDimension1": {
        "id": "CC_500",
        "dimensionName": "Cost Centers",
        "description": "Generic Cost Center"
    },
    "defaultCustomDimension2": {
        "id": "PD_500",
        "dimensionName": "Products",
        "description": "Generic Product"
    },
    "defaultCustomDimension3": {
        "id": "CM_500",
        "dimensionName": "Customers en",
        "description": "Generic Customer"
    },
    "defaultCustomDimension4": {
        "id": "ABC1",
        "dimensionName": "Employees",
        "description": "Generic Employee"
    },
    "defaultCustomDimension5": {
        "id": "ABC_03",
        "dimensionName": "Miscellaneous",
        "description": "Product Packaging"
    },
    "restrictionCustomDimension1": {
        "dimensionName": "Cost Centers",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension2": {
        "dimensionName": "Products",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension3": {
        "dimensionName": "Customers en",
        "restriction": "NONE"
```

```
        },
        "restrictionCustomDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "restrictionCustomDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "rules": {
            "fiscalPolicy": {
                "id": null,
                "description": null
            },
            "consolidation": {
                "consolidationMethod": "COST",
                "deconsolidationMethod": "NOTTODECONSOLIDATE",
                "percConsolidation": null,
                "generateCtpElimination": "ALLELIMINATIONLOGICS",
                "onlyCtp": false,
                "onlyConsolidatorData": false,
                "icMatching": "MANDATORY",
                "excludeAndUseReferenceEntity": false,
                "referenceEntity": null
            },
            "taxAndCashManagement": {
                "runAsEntity": true,
                "runAsSubentity": false
            }
        },
        "bankingData": {
            "constitutionDate": null,
            "abiCode": null,
            "bankGroupRegistrationDate": null,
            "bankitReportingCode": null,
            "assignmentDate": null,
            "centralCreditRiskCode": null,
            "iso": null,
            "individualDataSignaling": false,
            "intragroupSignaling": false,
            "excludeFinInvAutomaticInput": false
        },
        "updateInfo": {
            "user": "USER",
            "date": "2026-02-27T16:05:01.512+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "en": "Inserted",
            "it": null,
            "ja": null,
            "aa": null
        }
    }
```


List of all elements of the Entity

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/entities/elements
Body	-

Example of response


```
[
{
    "id": "TESTENT",
    "validity": null,
    "sorting": "Asc",
    "documentationLink": "www.documentation.com",
    "additionalInfo": {
        "businessName": "Business name",
        "administrativeHQLocation": "Administrative HQ Location",
        "administrativeHQ": "Legal administrative HQ",
        "legalHQLocation": "Legal HQ Location",
        "legalHQ": null,
        "mainOffice": "main office",
        "manager": "manager",
        "email": "entity@email.com",
        "phone": "+393332215478",
        "icMatchingManagers": "ic matching managers"
    },
    "customAttributes": {
        "Country": "Italy",
        "Entering Group": null,
        "Leaving Group": null,
        "SP Result DEV-82317": null
    },
    "currency": {
        "id": "EUR",
        "description": "Euro"
    },
    "defaultCustomDimension1": {
        "id": "CC_500",
        "dimensionName": "Cost Centers",
        "description": "Generic Cost Center"
    },
    "defaultCustomDimension2": {
        "id": "PD_500",
        "dimensionName": "Products",
        "description": "Generic Product"
    },
    "defaultCustomDimension3": {
        "id": "CM_500",
        "dimensionName": "Customers en",
        "description": "Generic Customer"
    },
    "defaultCustomDimension4": {
        "id": "ABC1",
        "dimensionName": "Employees",
        "description": "Generic Employee"
    },
    "defaultCustomDimension5": {
        "id": "ABC_03",
        "dimensionName": "Miscellaneous",
        "description": "Product Packaging"
    },
    "restrictionCustomDimension1": {
        "dimensionName": "Cost Centers",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension2": {
        "dimensionName": "Products",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension3": {
        "dimensionName": "Customers en",
```

```
            "restriction": "NONE"
        },
        "restrictionCustomDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "restrictionCustomDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "rules": {
            "fiscalPolicy": {
                "id": null,
                "description": null
            },
            "consolidation": {
                "consolidationMethod": "COST",
                "deconsolidationMethod": "NOTTODECONSOLIDATE",
                "percConsolidation": null,
                "generateCtpElimination": "ALLELIMINATIONLOGICS",
                "onlyCtp": false,
                "onlyConsolidatorData": false,
                "icMatching": "MANDATORY",
                "excludeAndUseReferenceEntity": false,
                "referenceEntity": null
            },
            "taxAndCashManagement": {
                "runAsEntity": true,
                "runAsSubentity": false
            }
        },
        "bankingData": {
            "constitutionDate": null,
            "abiCode": null,
            "bankGroupRegistrationDate": null,
            "bankitReportingCode": null,
            "assignmentDate": null,
            "centralCreditRiskCode": null,
            "iso": null,
            "individualDataSignaling": false,
            "intragroupSignaling": false,
            "excludeFinInvAutomaticInput": false
        },
        "updateInfo": {
            "user": "USER",
            "date": "2026-02-27T16:05:01.512+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "en": "TESTENT-en",
            "it": "TESTENT-it",
            "ja": null,
            "aa": null
        }
    }
    ][
       {
            "id": "010",
            "descriptions": "category"
        },
        {
            "id": "011",
            "descriptions": "category2"
        }
    ]
```

Number of Entity Elements

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements-count
Body	-
Example of response	12

Shows a list of Entity elements with only the ID and description fields

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/entity/elements-fetch?properties=id,description
Body	-

Example of response	[
	{
	"id": "010",
	"descriptions": "category"
	},
	{
	"id": "011",
	"descriptions": "category2"
	}
	]

Edit an Entity Element

Method	PATCH
Endpoint	/api/aih/dimensions/v1/{dbID}/entities/elements/TESTENT

Body


```
{
    "id": "TESTENT",
    "descriptions": {
        "it": null,
        "en": "Edited"
    },
    "sorting": "Asc",
    "documentationLink": "www.documentation.com",
    "additionalInfo": {
        "businessName": "Business name",
        "legalHQLocation": "Legal HQ Location",
        "administrativeHQLocation": "Administrative HQ Location",
        "administrativeHQ": "Legal administrative HQ",
        "LegalHqLocation": "Legal HQ Location",
        "mainOffice": "main office",
        "manager": "manager",
        "email": "entity@email.com",
        "phone": "+393332215478",
        "icMatchingManagers": "ic matching managers"
    },
    "customAttributes": {
        "Country": "Italy",
        "Entering group": "1090",
        "Leaving group": "1088",
        "Other custom attribute": "Other"
    },
    "currency": {
        "id": "EUR"
    },
    "defaultCustomDimension1": {
        "id": "CC_500"
    },
    "defaultCustomDimension2": {
        "id": "PD_500"
    },
    "defaultCustomDimension3": {
        "id": "CM_500"
    },
    "defaultCustomDimension4": {
        "id": "ABC1"
    },
    "defaultCustomDimension5": {
        "id": "ABC_03"
    },
    "restrictionCustomDimension1": {
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension2": {
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension3": {
        "restriction": "NONE"
    },
    "restrictionCustomDimension4": {
        "restriction": "NONE"
    },
    "restrictionCustomDimension5": {
        "restriction": "NONE"
    }
}
```


-

Example of response


```
{
    "id": "TESTENT",
    "validity": null,
    "sorting": "Asc",
    "documentationLink": "www.documentation.com",
    "additionalInfo": {
        "businessName": "Business name",
        "administrativeHQLocation": "Administrative HQ Location",
        "administrativeHQ": "Legal administrative HQ",
        "legalHQLocation": "Legal HQ Location",
        "legalHQ": null,
        "mainOffice": "main office",
        "manager": "manager",
        "email": "entity@email.com",
        "phone": "+393332215478",
        "icMatchingManagers": "ic matching managers"
    },
    "customAttributes": {
        "Country": "Italy",
        "Entering Group": null,
        "Leaving Group": null,
        "SP Result DEV-82317": null
    },
    "currency": {
        "id": "EUR",
        "description": "Euro"
    },
    "defaultCustomDimension1": {
        "id": "CC_500",
        "dimensionName": "Cost Centers",
        "description": "Generic Cost Center"
    },
    "defaultCustomDimension2": {
        "id": "PD_500",
        "dimensionName": "Products",
        "description": "Generic Product"
    },
    "defaultCustomDimension3": {
        "id": "CM_500",
        "dimensionName": "Customers en",
        "description": "Generic Customer"
    },
    "defaultCustomDimension4": {
        "id": "ABC1",
        "dimensionName": "Employees",
        "description": "Generic Employee"
    },
    "defaultCustomDimension5": {
        "id": "ABC_03",
        "dimensionName": "Miscellaneous",
        "description": "Product Packaging"
    },
    "restrictionCustomDimension1": {
        "dimensionName": "Cost Centers",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension2": {
        "dimensionName": "Products",
        "restriction": "RESTRICTED"
    },
    "restrictionCustomDimension3": {
        "dimensionName": "Customers en",
        "restriction": "NONE"
```

```
    },
    "restrictionCustomDimension4": {
        "dimensionName": "Employees",
        "restriction": "NONE"
    },
    "restrictionCustomDimension5": {
        "dimensionName": "Miscellaneous",
        "restriction": "NONE"
    },
    "rules": {
        "fiscalPolicy": {
            "id": null,
            "description": null
        },
        "consolidation": {
            "consolidationMethod": "COST",
            "deconsolidationMethod": "NOTTODECONSOLIDATE",
            "percConsolidation": null,
            "generateCtpElimination": "ALLELIMINATIONLOGICS",
            "onlyCtp": false,
            "onlyConsolidatorData": false,
            "icMatching": "MANDATORY",
            "excludeAndUseReferenceEntity": false,
            "referenceEntity": null
        },
        "taxAndCashManagement": {
            "runAsEntity": true,
            "runAsSubentity": false
        }
    },
    "bankingData": {
        "constitutionDate": null,
        "abiCode": null,
        "bankGroupRegistrationDate": null,
        "bankitReportingCode": null,
        "assignmentDate": null,
        "centralCreditRiskCode": null,
        "iso": null,
        "individualDataSignaling": false,
        "intragroupSignaling": false,
        "excludeFinInvAutomaticInput": false
    },
    "updateInfo": {
        "user": "USER",
        "date": "2026-02-27T16:05:01.512+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "en": "Edited",
        "it": null,
        "ja": null,
        "aa": null
    }
}
```


Create an element, insert another element, edit another element

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/entity/elements-bulk

Body	{
	"saveMode": "LOOSE",
	"post": [
	{
	"id": "BULPO",
	"currency": {
	"id": "EUR"
	},
	"descriptions": {
	"it": "BULPO-it",
	"en": "BULPO-en"
	}
	}
	],
	"put": [
	{
	"id": "BULPC",
	"currency": {
	"id": "EUR"
	},
	"descriptions": {
	"it": "BULPC-it",
	"en": "BULPC-en"
	}
	}
	],
	"patch": [
	{
	"key": {
	"id": "BULPA"
	},
	"data": {
	"currency": {
	"id": "AUD"
	},
	"descriptions": {
	"it": "Patchato-it",
	"en": "Patched-en"
	}
	}
	}
	]
	}

Example of response	{
	"code": "SUCCESS"
	}

Delete a list of Entity elements

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/entity/elements-bulk-delete-async

Body	<pre>[
	  {
	  "id": "012"
	  },
	  {
	  "id": "013"
	  }
	]</pre>

Example of response	<pre>{ "dataProcessingId": "2C98F135918DD37A1D4D1F84BF1B3CF8" }</pre>

Check the status of a deletion data processing

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/entity/elements-bulk-delete-async/2C98F135918DD37A1D4D1F84BF1B3CF8
Body	-
Example of response	<pre>{ "requestDateTime": "2026-03-23T11:04:46.772+0000", "status": "COMPLETED", "parameters": {} }</pre>

Abort a deletion data processing

Method	DELETE
Endpoint	/api/aih/dimensions/v1/{dbID}/entity/elements-bulk-delete-async/2C98F135918DD37A1D4D1F84BF1B3CF8
Body	-
Example of response	<pre>{ "message": "Stop on dataprocessingOid 2C98ACE49D28242F019D29C846712CA9" }</pre>

API Entity Hierarchy

API Title:	EntityHierarchy V2 REST API
Description:	CRUD, bulk and async bulk-delete REST APIs for EntityHierarchy V2.
Version:	1.0.0
Authentication:	OAuth4, API Key, JWT, Basic Auth

Prerequisites

To use these APIs, users must authenticate using the authentication method configured for [CCH Tagetik].

In addition, the APIs must be enabled in the Repository. If a reverse proxy is used, additional configuration is required. The APIs can be accessed using either the HTTP or HTTPS protocol.

For more information about authentication and API enablement, see

"Enabling REST API" on page 355 and "Authentication - On Premises" on page 356.
Request format: JSON
Response format: JSON
Base URL: <api-root>/dimensions/v2/{dbID}/entity

URL

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements	-	organization, filter, skip, take, sort	Array<EntityHierarchyV2>	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
POST	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements	EntityHierarchyV2	organization	EntityHierarchyV2	201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements/{id}	-	organization	EntityHierarchyV2	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
PUT	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements/{id}	EntityHierarchyV2	organization	EntityHierarchyV2	200 (OK), 201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
PATCH	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements/{id}	PatchData	organization	EntityHierarchyV2	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements-count	-	organization, filter	integer	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements-fetch	-	organization, properties, filter, skip, take, sort	Array<Object>	200 (OK)	400 (Bad Request), 401 (Unauthorised), 404 (Not found), 403 (Forbidden)
POST	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements-bulk	BulkRequest	organization	SaveResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements-bulk-delete-async	Array<BulkDeleteItem>	organization	AsyncOperationResult	202 (Accepted)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingPollingResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
DELETE	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/elements-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingDeleteResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Supported Fields in Request

Field	Supported Cardinality	Supported Values
id	-	string
descriptions	-	DescriptionForLanguage
nodeCode	-	string
organization	-	boolean: true/false
timeDependent	-	boolean: true/false
geographical	-	boolean: true/false
convertToFlatStructure	-	boolean: true/false
excludeFromReporting	-	boolean: true/false
updateInfo	-	UpdateInfo
updateInfo.user	-	string
updateInfo.date	-	string
updateInfo.origin	-	string
saveMode	-	SAVE_ONLY_VALID_ROWS

Field	Supported Cardinality	Supported Values
post	-	Array<EntityHierarchyV2>
put	-	Array<EntityHierarchyV2>
patch	-	Array<BulkPatchItem>
delete	-	Array<BulkDeleteItem>
id	-	string (obbligatorio)

Additional Fields in Response

Field	Supported Values
code	SUCCESS, SUCCESS_BUT_FAILED_DEPLOY, FAIL
success	Array<string>
failed	Array<SaveResult400>
dataProcessingId	string
status	RUNNING, COMPLETED, STOPPED, FAILED
progress	integer
parameters	Object
status	string
message	string

Examples of requests

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements
Query parameters	organization, filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-

Example of response	[
	  {
	  "id": "EFA01",
	  "descriptions": {
	  "it": "Descrizione gerarchia",
	  "en": "Hierarchy description"
	  },
	  "nodeCode": "EFA01",
	  "organization": true,
	  "timeDependent": false,
	  "geographical": false,
	  "convertToFlatStructure": false,
	  "excludeFromReporting": false,
	  "updateInfo": {
	  "user": "API_AI",
	  "date": "2026-06-16T14:45:00.216+0000",
	  "origin": "INPUT_WEB"
	  }
	  }
	]

Method	POST
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements
Query parameters	organization
HTTP success status	201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"id": "EFA01",
	"descriptions": {
	"it": "Descrizione gerarchia",
	"en": "Hierarchy description"
	},
	"nodeCode": "EFA01",
	"organization": true,
	"timeDependent": false,
	"geographical": false,
	"convertToFlatStructure": false,
	"excludeFromReporting": false,
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-16T14:45:00.216+0000",
	"origin": "INPUT_WEB"
	}
	}

Example of response	{
	"id": "EFA01",
	"descriptions": {
	"it": "Descrizione gerarchia",
	"en": "Hierarchy description"
	},
	"nodeCode": "EFA01",
	"organization": true,
	"timeDependent": false,
	"geographical": false,
	"convertToFlatStructure": false,
	"excludeFromReporting": false,
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-16T14:45:00.216+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements/<id>
Query parameters	organization
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-

Example of response	{
	"id": "EFA01",
	"descriptions": {
	"it": "Descrizione gerarchia",
	"en": "Hierarchy description"
	},
	"nodeCode": "EFA01",
	"organization": true,
	"timeDependent": false,
	"geographical": false,
	"convertToFlatStructure": false,
	"excludeFromReporting": false,
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-16T14:45:00.216+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	PUT
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements/<id>
Query parameters	organization
HTTP success status	200 (OK), 201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"id": "EFA01",
	"descriptions": {
	"it": "Descrizione gerarchia",
	"en": "Hierarchy description"
	},
	"nodeCode": "EFA01",
	"organization": true,
	"timeDependent": false,
	"geographical": false,
	"convertToFlatStructure": false,
	"excludeFromReporting": false,
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-16T14:45:00.216+0000",
	"origin": "INPUT_WEB"
	}
	}

Example of response	{
	"id": "EFA01",
	"descriptions": {
	"it": "Descrizione gerarchia",
	"en": "Hierarchy description"
	},
	"nodeCode": "EFA01",
	"organization": true,
	"timeDependent": false,
	"geographical": false,
	"convertToFlatStructure": false,
	"excludeFromReporting": false,
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-16T14:45:00.216+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	PATCH
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements/<id>
Query parameters	organization
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	{}

Example of response	{
	"id": "EFA01",
	"descriptions": {
	"it": "Descrizione gerarchia",
	"en": "Hierarchy description"
	},
	"nodeCode": "EFA01",
	"organization": true,
	"timeDependent": false,
	"geographical": false,
	"convertToFlatStructure": false,
	"excludeFromReporting": false,
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-16T14:45:00.216+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements-count
Query parameters	organization, filter
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-
Example of response	25

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements-fetch
Query parameters	organization, properties, filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 404 (Not found), 403 (Forbidden)
Body	-
Example of response	[{}]

Method	POST
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements-bulk
Query parameters	organization
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"saveMode": "SAVE_ONLY_VALID_ROWS",
	"post": [
	{
	"id": "EFA01",
	"descriptions": {
	"it": "Descrizione gerarchia",
	"en": "Hierarchy description"
	},
	"nodeCode": "EFA01",
	"organization": true,
	"timeDependent": false,
	"geographical": false,
	"convertToFlatStructure": false,
	"excludeFromReporting": false,
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-16T14:45:00.216+0000",
	"origin": "INPUT_WEB"
	}
	}
	],
	"put": [
	{
	"id": "EFA01",
	"descriptions": {
	"it": "Descrizione gerarchia",
	"en": "Hierarchy description"
	},
	"nodeCode": "EFA01",
	"organization": true,
	"timeDependent": false,
	"geographical": false,
	"convertToFlatStructure": false,
	"excludeFromReporting": false,
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-16T14:45:00.216+0000",
	"origin": "INPUT_WEB"
	}
	}
	],
	"patch": [
	{
	"key": {
	"id": "<string>"
	},
	"data": {}
	}
	],
	"delete": [
	{
	"id": "EDL01",
	"nodeCode": "ROOT_1"
	}
	]
	}

Example of response	{
	"code": "SUCCESS"
	}

Method	POST
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements-bulk-delete-async
Query parameters	organization

HTTP success status	202 (Accepted)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	[
	{
	"id": "EDL01",
	"nodeCode": "ROOT_1"
	}
	]

Example of response	{
	"dataProcessingId": "9fbb47b7-d0f4-43fd-9299-b77777777777"
	}

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"status": "COMPLETED",
	"progress": 100,
	"parameters": {}
	}

Method	DELETE
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/elements-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"status": "STOPPED",
	"message": "Stop on dataprocessingOid 9fbb47b7-d0f4-43fd-9299-b77777777777"
	}

API Entity Hierarchy Structure

API Title:	EntityHierarchyStructure V2 REST API
Description:	CRUD, bulk and async bulk-delete REST APIs for EntityHierarchyStructure V2.
Version:	1.0.0
Authentication:	OAuth4, API Key, JWT, Basic Auth

Prerequisites

To use these APIs, users must authenticate using the authentication method configured for [CCH Tagetik].

In addition, the APIs must be enabled in the Repository. If a reverse proxy is used, additional configuration is required. The APIs can be accessed using either the HTTP or HTTPS protocol.

For more information about authentication and API enablement, see Enabling the REST API and API Authentication.

Request format: JSON

Response format: JSON

Base URL: <api-root>/dimensions/v2/{dbID}/entity

URL

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes	-	filter, skip, take, sort	Array<EntityHierarchyStructureV2>	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes	EntityHierarchyStructureV2	-	EntityHierarchyStructureV2	201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes/{id}	-	-	EntityHierarchyStructureV2	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
PUT	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes/{id}	EntityHierarchyStructureV2	-	EntityHierarchyStructureV2	200 (OK), 201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
PATCH	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes/{id}	PatchData	-	EntityHierarchyStructureV2	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes-count	-	filter	integer	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes-fetch	-	properties, filter, skip, take, sort	Array<Object>	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes-bulk	BulkRequest	-	SaveResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes-bulk-delete-async	Array<BulkDeleteItem>	-	AsyncOperationResult	202 (Accepted)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingPollingResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
DELETE	<api-root>/dimensions/v2/{dbID}/entity/hierarchies/{hierarchyId}/nodes-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingDeleteResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Supported Fields in Request

Field	Supported Cardinality	Supported Values
id	-	string (obbligatorio)
hierarchyId	-	string
descriptions	-	DescriptionForLanguage (obbligatorio)
nodeType	-	ROOT, NORMAL
parent	-	IdDescProperty
parent.id	-	string
parent.desc	-	string
referenceEntity	-	IdDescProperty
referenceEntity.id	-	string
referenceEntity.desc	-	string
default	-	boolean: true/false
sortOrder	-	integer
entityType	-	DO_NOT_RUN, ENTITY, GROUP, SUB_ENTITY

Field	Supported Cardinality	Supported Values
contributorCertificationType	-	NONE, TO_SUBMIT, TO_APPROVE
consolidatorCertificationType	-	NONE, TO_CONSOLIDATE
updateInfo	-	UpdateInfo
updateInfo.user	-	string
updateInfo.date	-	string
updateInfo.origin	-	string
saveMode	-	SAVE_ONLY_VALID_ROWS
post	-	Array<EntityHierarchyStructureV2>
put	-	Array<EntityHierarchyStructureV2>
patch	-	Array<BulkPatchItem>
delete	-	Array<BulkDeleteItem>

Additional Fields in Response

Field	Supported Values
code	SUCCESS, SUCCESS_BUT_FAILED_DEPLOY, FAIL
success	Array<string>
failed	Array<SaveResult400>
dataProcessingId	string
status	RUNNING, COMPLETED, STOPPED, FAILED
progress	integer
parameters	Object
status	string
message	string

Examples of requests

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes
Query parameters	filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	[
	{
	"id": "EHS_FA_01",
	"descriptions": {
	"it": "Nodo FA 01",
	"en": "Node FA 01"
	},
	"nodeType": "NORMAL",
	"parent": {
	"id": "EPPFA",
	"desc": "Parent fixture"
	},
	"referenceEntity": {
	"id": "ENT_001",
	"desc": "Reference entity"
	},
	"default": false,
	"sortOrder": 5,
	"entityType": "ENTITY",
	"contributorCertificationType": "TO_SUBMIT",
	"consolidatorCertificationType": "TO_CONSOLIDATE",
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-18T14:18:22.327+0200",
	"origin": "INPUT_WEB"
	}
	}
	]

Method	POST
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes
HTTP success status	201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"id": "EHS_FA_01",
	"descriptions": {
	"it": "Nodo FA 01",
	"en": "Node FA 01"
	},
	"nodeType": "NORMAL",
	"parent": {
	"id": "EPPFA",
	"desc": "Parent fixture"
	},
	"referenceEntity": {
	"id": "ENT_001",
	"desc": "Reference entity"
	},
	"default": false,
	"sortOrder": 5,
	"entityType": "ENTITY",
	"contributorCertificationType": "TO_SUBMIT",
	"consolidatorCertificationType": "TO_CONSOLIDATE",
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-18T14:18:22.327+0200",
	"origin": "INPUT_WEB"
	}
	}

Example of response	{
	"id": "EHS_FA_01",
	"descriptions": {
	"it": "Nodo FA 01",
	"en": "Node FA 01"
	},
	"nodeType": "NORMAL",
	"parent": {
	"id": "EPPFA",
	"desc": "Parent fixture"
	},
	"referenceEntity": {
	"id": "ENT_001",
	"desc": "Reference entity"
	},
	"default": false,
	"sortOrder": 5,
	"entityType": "ENTITY",
	"contributorCertificationType": "TO_SUBMIT",
	"consolidatorCertificationType": "TO_CONSOLIDATE",
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-18T14:18:22.327+0200",
	"origin": "INPUT_WEB"
	}
	}

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes/<id>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"id": "EHS_FA_01",
	"descriptions": {
	"it": "Nodo FA 01",
	"en": "Node FA 01"
	},
	"nodeType": "NORMAL",
	"parent": {
	"id": "EPPFA",
	"desc": "Parent fixture"
	},
	"referenceEntity": {
	"id": "ENT_001",
	"desc": "Reference entity"
	},
	"default": false,
	"sortOrder": 5,
	"entityType": "ENTITY",
	"contributorCertificationType": "TO_SUBMIT",
	"consolidatorCertificationType": "TO_CONSOLIDATE",
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-18T14:18:22.327+0200",
	"origin": "INPUT_WEB"
	}
	}

Method	PUT
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes/<id>

HTTP success status	200 (OK), 201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"id": "EHS_FA_01",
	"descriptions": {
	"it": "Nodo FA 01",
	"en": "Node FA 01"
	},
	"nodeType": "NORMAL",
	"parent": {
	"id": "EPPFA",
	"desc": "Parent fixture"
	},
	"referenceEntity": {
	"id": "ENT_001",
	"desc": "Reference entity"
	},
	"default": false,
	"sortOrder": 5,
	"entityType": "ENTITY",
	"contributorCertificationType": "TO_SUBMIT",
	"consolidatorCertificationType": "TO_CONSOLIDATE",
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-18T14:18:22.327+0200",
	"origin": "INPUT_WEB"
	}
	}

Example of response	{
	"id": "EHS_FA_01",
	"descriptions": {
	"it": "Nodo FA 01",
	"en": "Node FA 01"
	},
	"nodeType": "NORMAL",
	"parent": {
	"id": "EPPFA",
	"desc": "Parent fixture"
	},
	"referenceEntity": {
	"id": "ENT_001",
	"desc": "Reference entity"
	},
	"default": false,
	"sortOrder": 5,
	"entityType": "ENTITY",
	"contributorCertificationType": "TO_SUBMIT",
	"consolidatorCertificationType": "TO_CONSOLIDATE",
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-18T14:18:22.327+0200",
	"origin": "INPUT_WEB"
	}
	}

Method	PATCH
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes/<id>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	{}

Example of response	{
	"id": "EHS_FA_01",
	"descriptions": {
	"it": "Nodo FA 01",
	"en": "Node FA 01"
	},
	"nodeType": "NORMAL",
	"parent": {
	"id": "EPPFA",
	"desc": "Parent fixture"
	},
	"referenceEntity": {
	"id": "ENT_001",
	"desc": "Reference entity"
	},
	"default": false,
	"sortOrder": 5,
	"entityType": "ENTITY",
	"contributorCertificationType": "TO_SUBMIT",
	"consolidatorCertificationType": "TO_CONSOLIDATE",
	"updateInfo": {
	"user": "API_AI",
	"date": "2026-06-18T14:18:22.327+0200",
	"origin": "INPUT_WEB"
	}
	}

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes-count
Query parameters	filter
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-
Example of response	25

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes-fetch
Query parameters	properties, filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-
Example of response	[{}]

Method	POST
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes-bulk
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body


```
{
  "saveMode": "SAVE_ONLY_VALID_ROWS",
  "post": [
   {
    "id": "EHS_FA_01",
    "descriptions": {
     "it": "Nodo FA 01",
     "en": "Node FA 01"
    },
    "nodeType": "NORMAL",
    "parent": {
     "id": "EPPFA",
     "desc": "Parent fixture"
    },
    "referenceEntity": {
     "id": "ENT_001",
     "desc": "Reference entity"
    },
    "default": false,
    "sortOrder": 5,
    "entityType": "ENTITY",
   "contributorCertificationType": "TO_SUBMIT",
    "consolidatorCertificationType": "TO_CONSOLIDATE",
    "updateInfo": {
     "user": "API_AI",
     "date": "2026-06-18T14:18:22.327+0200",
     "origin": "INPUT_WEB"
    }
   }
  ],
  "put": [
   {
    "id": "EHS_FA_01",
    "descriptions": {
     "it": "Nodo FA 01",
     "en": "Node FA 01"
    },
    "nodeType": "NORMAL",
    "parent": {
     "id": "EPPFA",
     "desc": "Parent fixture"
    },
    "referenceEntity": {
     "id": "ENT_001",
     "desc": "Reference entity"
    },
    "default": false,
    "sortOrder": 5,
    "entityType": "ENTITY",
   "contributorCertificationType": "TO_SUBMIT",
   "consolidatorCertificationType": "TO_CONSOLIDATE",
    "updateInfo": {
     "user": "API_AI",
     "date": "2026-06-18T14:18:22.327+0200",
     "origin": "INPUT_WEB"
    }
   }
  ],
  "patch": [
   {
    "key": {
     "id": "<string>"
    },
    "data": {}
   }
  ],
  "delete": [
```

	{
	"id": "EHS_DEL_01"
	}
	]
	}

Example of response	{
	"code": "SUCCESS",
	"success": [
	"<string>"
	],
	"failed": [
	{
	"id": "<string>",
	"validationResults": {
	"en": []
	}
	}
	]
	}

Method	POST
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes-bulk-delete-async
HTTP success status	202 (Accepted)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	[
	{
	"id": "EHS_DEL_01"
	}
	]

Example of response	{
	"dataProcessingId": "9fbb47b7-d0f4-43fd-9299-b77777777777"
	}

Method	GET
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"status": "COMPLETED",
	"progress": 100,
	"parameters": {}
	}

Method	DELETE
Endpoint	<api-root>/dimensions/v2/<dbID>/entity/hierarchies/<hierarchyId>/nodes-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"status": "STOPPED",
	"message": "Stop on dataprocessingOid 9fbb47b7-d0f4-43fd-9299-b77777777777"
	}

API Entity hierarchy relationships

API Title:	AziendaGerarchiaAbbiLowest REST API
Description:	CRUD and async bulk-delete APIs for AziendaGerarchiaAbbiLowest relationships.
Version:	1.0.0
Authentication:	OAuth2, API Key, JWT, Basic Auth

Prerequisites

To use these APIs, users must authenticate using the authentication method configured for [CCH Tagetik].

In addition, the APIs must be enabled in the Repository. If a reverse proxy is used, additional configuration is required. The APIs can be accessed using either the HTTP or HTTPS protocol.

For more information about authentication and API enablement, see

"Enabling REST API" on page 355 and "Authentication - On Premises" on page 356.

Request format: JSON

Response format: JSON

Base URL: <api-root>/dimensions/v1/{dbID}/entity

URL

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships	-	filter, skip, take, sort	Array<AziendaGerarchiaAbbiLowest>	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships	AziendaGerarchiaAbbiLowest	-	AziendaGerarchiaAbbiLowest	201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found), 500 (Internal Server Error)

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships/{id}	-	-	AziendaGerarchiaAbbiLowest	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
PUT	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships/{id}	AziendaGerarchiaAbbiLowest	-	AziendaGerarchiaAbbiLowest	200 (OK), 201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found), 500 (Internal Server Error)
PATCH	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships/{id}	PatchData	-	AziendaGerarchiaAbbiLowest	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
DELETE	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships/{id}	-	-	AziendaGerarchiaAbbiLowest	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships-count	-	filter	integer	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships-fetch	-	filter, skip, take, sort, properties (obbligatorio)	Array<Object>	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found), 405

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
POST	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships-bulk	BulkRequest	-	SaveResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found), 500 (Internal Server Error)
POST	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships-bulk-delete-async	Array<AziendaGerarchiaAbbiLowest>	-	AsyncOperationResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingPollingResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
DELETE	<api-root>/dimensions/v1/{dbID}/entity/hierarchies/{hId}/relationships-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingDeleteResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Supported Fields in Request

Field	Supported Cardinality	Supported Values
id	-	string
entity	-	EntityReference
nodeCode	-	EntityReference
nodeCode.id	-	string
nodeCode.description	-	string
updateInfo	-	UpdateInfo
saveMode	-	string
post	-	Array<AziendaGerarchiaAbbiLowest>
put	-	Array<AziendaGerarchiaAbbiLowest>
patch	-	Array<PatchBulkOperation>
delete	-	Array<AziendaGerarchiaAbbiLowest>

Additional Fields in Response

Field	Supported Values
code	SUCCESS, SUCCESS_BUT_FAILED_DEPLOY, FAIL

Examples of requests

Method	GET
Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships
Query parameters	filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	[
	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}
	]

Method	POST
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships
HTTP success status	201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found), 500 (Internal Server Error)

Body	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}

Example of response	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships/<id>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	-

Example of response	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}

Method	PUT
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships/<id>
HTTP success status	200 (OK), 201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found), 500 (Internal Server Error)

Body	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}

Example of response	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}

Method	PATCH
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships/<id>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"nodeCode": {
	"id": "003"
	}
	}

Example of response	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}

Method	DELETE
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships/<id>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships-count
Query parameters	filter
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-
Example of response	1

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships-fetch
Query parameters	filter, skip, take, sort, properties (obbligatorio)
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found), 405
Body	-
Example of response	[{}]

Method	POST
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships-bulk
HTTP success status	200 (OK)

HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found), 500 (Internal Server Error)

Body	{
	"saveMode": "LOOSE",
	"post": [
	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}
	],
	"put": [
	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}
	],
	"patch": [
	{
	"key": {
	"id": "A00"
	},
	"data": {
	"nodeCode": {
	"id": "003"
	}
	}
	}
	],
	"delete": [
	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}
	]
	}

Example of response	{
	"code": "SUCCESS"
	}

Method	POST

Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships-bulk-delete-async
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	[
	{
	"id": "A00",
	"nodeCode": {
	"id": "003",
	"description": "Nodo 003"
	},
	"updateInfo": {
	"user": "admin",
	"date": "2026-06-26T10:17:03Z",
	"origin": "INPUT_WEB"
	}
	}
	]

Example of response	{
	"dataprocessingId": "7ca31f0c-6fde-4ba7-a7fd-42dbf9ec5ef1"
	}

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"dataprocessingId": "7ca31f0c-6fde-4ba7-a7fd-42dbf9ec5ef1",
	"status": "RUNNING"
	}

Method	DELETE
Endpoint	<api-root>/dimensions/v1/<dbID>/entity/hierarchies/<hId>/relationships-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"dataprocessingId": "7ca31f0c-6fde-4ba7-a7fd-42dbf9ec5ef1",
	"deleted": true
	}

Consolidation Scenario elements API

API Title:	ConsolidationScenario REST API
Description:	CRUD and async-support REST APIs for ConsolidationScenario.
Version:	1.0.0
Authentication:	OAuth4, API Key, JWT, Basic Auth

Prerequisites

TTo use these APIs, users must authenticate using the authentication method configured for [CCH Tagetik].

In addition, the APIs must be enabled in the Repository. If a reverse proxy is used, additional configuration is required. The APIs can be accessed using either the HTTP or HTTPS protocol.

For more information about authentication and API enablement, see

"Enabling REST API" on page 355 and "Authentication - On Premises" on page 356.

Request format: JSON

Response format: JSON

Base URL: <api-root>/consolidation/v1/{dbID}/scenario

URL

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/consolidation/v1/{dbID}/scenario/elements	-	filter, skip, take, sort	Array<ConsolidationScenario>	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
POST	<api-root>/consolidation/v1/{dbID}/scenario/elements	ConsolidationScenario	-	ConsolidationScenario	201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/consolidation/v1/{dbID}/scenario/elements/{id}	-	-	ConsolidationScenario	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
PUT	<api-root>/consolidation/v1/{dbID}/scenario/elements/{id}	ConsolidationScenario	-	ConsolidationScenario	200 (OK), 201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
PATCH	<api-root>/consolidation/v1/{dbID}/scenario/elements/{id}	PatchData	-	ConsolidationScenario	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
DELETE	<api-root>/consolidation/v1/{dbID}/scenario/elements/{id}	-	-	-	-	501 (Not Implemented), 404 (Not found), 403 (Forbidden), 401 (Unauthorised), 400 (Bad Request)
GET	<api-root>/consolidation/v1/{dbID}/scenario/elements-count	-	filter	integer	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
POST	<api-root>/consolidation/v1/{dbID}/scenario/elements-bulk	BulkRequest	-	SaveResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/consolidation/v1/{dbID}/scenario/elements-bulk-delete-async	Array<BulkDeleteItem>	-	AsyncOperationResult	202 (Accepted)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/consolidation/v1/{dbID}/scenario/elements-fetch	-	properties (obbligatorio), filter, skip, take, sort	Array<Object>	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 405, 404 (Not found)
GET	<api-root>/consolidation/v1/{dbID}/scenario/elements-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingPollingResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
DELETE	<api-root>/consolidation/v1/{dbID}/scenario/elements-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingDeleteResult	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Supported Fields in Request

Field	Supported Cardinality	Supported Values
id	-	string (obbligatorio)
description	-	string (obbligatorio)
versionDescription	-	string
year	-	string
active	-	boolean: true/false
originalScenario	-	ScenarioReference
originalScenario.id	-	string
originalScenario.description	-	string
holding	-	ScenarioReference
holding.id	-	string
holding.description	-	string
currency	-	ScenarioReference
currency.id	-	string
currency.description	-	string
previousScenario	-	ScenarioReference
previousScenario.id	-	string
previousScenario.description	-	string
followingScenario	-	ScenarioReference
followingScenario.id	-	string
followingScenario.description	-	string
referenceScenario1	-	ScenarioReference
referenceScenario1.id	-	string
referenceScenario1.description	-	string
referenceScenario2	-	ScenarioReference
referenceScenario2.id	-	string
referenceScenario2.description	-	string
referenceScenario3	-	ScenarioReference
referenceScenario3.id	-	string
referenceScenario3.description	-	string
referenceScenario4	-	ScenarioReference
referenceScenario4.id	-	string
referenceScenario4.description	-	string
referenceScenario5	-	ScenarioReference
referenceScenario5.id	-	string
referenceScenario5.description	-	string
categoryFilter	-	CategoryFilter
categoryFilter.nodeId	-	string
categoryFilter.description	-	string
accountFilter	-	AccountFilter
accountFilter.hierarchyId	-	string
accountFilter.nodeId	-	string
accountFilter.description	-	string
fxRateScenario	-	ScenarioReference
fxRateScenario.id	-	string
fxRateScenario.description	-	string
financialInvestmentsReclassAdjPrefix	-	string
customAttributes	-	Object
updateInfo	-	UpdateInfo
updateInfo.user	-	string
updateInfo.date	-	string
updateInfo.origin	-	string
saveMode	-	SAVE_ONLY_VALID_ROWS
post	-	Array<ConsolidationScenario>
put	-	Array<ConsolidationScenario>
patch	-	Array<BulkPatchItem>
delete	-	Array<BulkDeleteItem>

Additional Fields in Response

Field	Supported Cardinality
code	SUCCESS, SUCCESS_BUT_FAILED_DEPLOY, FAIL
success	Array<string>
failed	Array<SaveResult400>
dataProcessingId	string
status	RUNNING, COMPLETED, STOPPED, FAILED
progress	integer
parameters	Object
status	string
message	string

Examples of requests

Method	GET
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements
Query parameters	filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)

Body	|-

Example of response


```
[
  {
    "id": "2021BB_CC2_USD",
    "description": "2022 Consolidation",
    "versionDescription": "FY2022 Version",
    "year": "2021",
    "active": true,
    "originalScenario": {
      "id": "EUR",
      "description": "Euro"
    },
    "holding": {
      "id": "EUR",
      "description": "Euro"
    },
    "currency": {
      "id": "EUR",
      "description": "Euro"
    },
    "previousScenario": {
      "id": "EUR",
      "description": "Euro"
    },
    "followingScenario": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario1": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario2": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario3": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario4": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario5": {
      "id": "EUR",
      "description": "Euro"
    },
    "categoryFilter": {
      "nodeId": "<string>",
      "description": "<string>"
    },
    "accountFilter": {
      "hierarchyId": "<string>",
      "nodeId": "<string>",
      "description": "<string>"
    },
    "fxRateScenario": {
      "id": "EUR",
      "description": "Euro"
    },
    "financialInvestmentsReclassAdjPrefix": "<string>",
    "customAttributes": {},
    "updateInfo": {
      "user": "API_AI",
      "date": "2025-04-10T12:59:56.246+0000",
      "origin": "INPUT_WEB"
    }
  }
]
```

Method	POST
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements
HTTP success status	201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body


```
{
  "id": "2021BB_CC2_USD",
  "description": "2022 Consolidation",
  "versionDescription": "FY2022 Version",
  "year": "2021",
  "active": true,
  "originalScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "holding": {
    "id": "EUR",
    "description": "Euro"
  },
  "currency": {
    "id": "EUR",
    "description": "Euro"
  },
  "previousScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "followingScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario1": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario2": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario3": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario4": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario5": {
    "id": "EUR",
    "description": "Euro"
  },
  "categoryFilter": {
    "nodeId": "<string>",
    "description": "<string>"
  },
  "accountFilter": {
    "hierarchyId": "<string>",
    "nodeId": "<string>",
    "description": "<string>"
  },
  "fxRateScenario": {
    "id": "EUR",
    "description": "Euro"
  },
 "financialInvestmentsReclassAdjPrefix": "<string>",
  "customAttributes": {},
  "updateInfo": {
    "user": "API_AI",
    "date": "2025-04-10T12:59:56.246+0000",
    "origin": "INPUT_WEB"
  }
}
```

Example of response


```
{
  "id": "2021BB_CC2_USD",
  "description": "2022 Consolidation",
  "versionDescription": "FY2022 Version",
  "year": "2021",
  "active": true,
  "originalScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "holding": {
    "id": "EUR",
    "description": "Euro"
  },
  "currency": {
    "id": "EUR",
    "description": "Euro"
  },
  "previousScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "followingScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario1": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario2": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario3": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario4": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario5": {
    "id": "EUR",
    "description": "Euro"
  },
  "categoryFilter": {
    "nodeId": "<string>",
    "description": "<string>"
  },
  "accountFilter": {
    "hierarchyId": "<string>",
    "nodeId": "<string>",
    "description": "<string>"
  },
  "fxRateScenario": {
    "id": "EUR",
    "description": "Euro"
  },
 "financialInvestmentsReclassAdjPrefix": "<string>",
  "customAttributes": {},
  "updateInfo": {
    "user": "API_AI",
    "date": "2025-04-10T12:59:56.246+0000",
    "origin": "INPUT_WEB"
  }
}
```

Method	GET
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements/<id>
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)

Body	-

Example of response	{
	"id": "2021BB_CC2_USD",
	"description": "2022 Consolidation",
	"versionDescription": "FY2022 Version",
	"year": "2021",
	"active": true,
	"originalScenario": {
	"id": "EUR",
	"description": "Euro"
	},
	"holding": {
	"id": "EUR",
	"description": "Euro"
	},
	"currency": {
	"id": "EUR",
	"description": "Euro"
	},
	"previousScenario": {
	"id": "EUR",
	"description": "Euro"
	},
	"followingScenario": {
	"id": "EUR",
	"description": "Euro"
	},
	"referenceScenario1": {
	"id": "EUR",
	"description": "Euro"
	},
	"referenceScenario2": {
	"id": "EUR",
	"description": "Euro"
	},
	"referenceScenario3": {
	"id": "EUR",
	"description": "Euro"
	},
	"referenceScenario4": {
	"id": "EUR",
	"description": "Euro"
	},
	"referenceScenario5": {
	"id": "EUR",
	"description": "Euro"
	},
	"categoryFilter": {
	"nodeId": "<string>",
	"description": "<string>"
	},
	"accountFilter": {
	"hierarchyId": "<string>",
	"nodeId": "<string>",
	"description": "<string>"
	},
	"fxRateScenario": {
	"id": "EUR",
	"description": "Euro"
	},
	"financialInvestmentsReclassAdjPrefix": "<string>",
	"customAttributes": {},
	"updateInfo": {
	"user": "API_AI",
	"date": "2025-04-10T12:59:56.246+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	PUT
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements/<id>
HTTP success status	200 (OK), 201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body


```
{
  "id": "2021BB_CC2_USD",
  "description": "2022 Consolidation",
  "versionDescription": "FY2022 Version",
  "year": "2021",
  "active": true,
  "originalScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "holding": {
    "id": "EUR",
    "description": "Euro"
  },
  "currency": {
    "id": "EUR",
    "description": "Euro"
  },
  "previousScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "followingScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario1": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario2": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario3": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario4": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario5": {
    "id": "EUR",
    "description": "Euro"
  },
  "categoryFilter": {
    "nodeId": "<string>",
    "description": "<string>"
  },
  "accountFilter": {
    "hierarchyId": "<string>",
    "nodeId": "<string>",
    "description": "<string>"
  },
  "fxRateScenario": {
    "id": "EUR",
    "description": "Euro"
  },
 "financialInvestmentsReclassAdjPrefix": "<string>",
  "customAttributes": {},
  "updateInfo": {
    "user": "API_AI",
    "date": "2025-04-10T12:59:56.246+0000",
    "origin": "INPUT_WEB"
  }
}
```

Example of response


```
{
  "id": "2021BB_CC2_USD",
  "description": "2022 Consolidation",
  "versionDescription": "FY2022 Version",
  "year": "2021",
  "active": true,
  "originalScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "holding": {
    "id": "EUR",
    "description": "Euro"
  },
  "currency": {
    "id": "EUR",
    "description": "Euro"
  },
  "previousScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "followingScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario1": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario2": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario3": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario4": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario5": {
    "id": "EUR",
    "description": "Euro"
  },
  "categoryFilter": {
    "nodeId": "<string>",
    "description": "<string>"
  },
  "accountFilter": {
    "hierarchyId": "<string>",
    "nodeId": "<string>",
    "description": "<string>"
  },
  "fxRateScenario": {
    "id": "EUR",
    "description": "Euro"
  },
 "financialInvestmentsReclassAdjPrefix": "<string>",
  "customAttributes": {},
  "updateInfo": {
    "user": "API_AI",
    "date": "2025-04-10T12:59:56.246+0000",
    "origin": "INPUT_WEB"
  }
}
```

Method	PATCH
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements/<id>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{}

Example of response


```
{
  "id": "2021BB_CC2_USD",
  "description": "2022 Consolidation",
  "versionDescription": "FY2022 Version",
  "year": "2021",
  "active": true,
  "originalScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "holding": {
    "id": "EUR",
    "description": "Euro"
  },
  "currency": {
    "id": "EUR",
    "description": "Euro"
  },
  "previousScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "followingScenario": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario1": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario2": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario3": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario4": {
    "id": "EUR",
    "description": "Euro"
  },
  "referenceScenario5": {
    "id": "EUR",
    "description": "Euro"
  },
  "categoryFilter": {
    "nodeId": "<string>",
    "description": "<string>"
  },
  "accountFilter": {
    "hierarchyId": "<string>",
    "nodeId": "<string>",
    "description": "<string>"
  },
  "fxRateScenario": {
    "id": "EUR",
    "description": "Euro"
  },
 "financialInvestmentsReclassAdjPrefix": "<string>",
  "customAttributes": {},
  "updateInfo": {
    "user": "API_AI",
    "date": "2025-04-10T12:59:56.246+0000",
    "origin": "INPUT_WEB"
  }
}
```

Method	DELETE
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements/<id>
HTTP success status	-
HTTP exception status	501 (Not Implemented), 404 (Not found), 403 (Forbidden), 401 (Unauthorised), 400 (Bad Request)
Body	-
Example of response	-

Method	GET
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements-count
Query parameters	filter
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-
Example of response	0

Method	POST
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements-bulk
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body


```
{
  "saveMode": "SAVE_ONLY_VALID_ROWS",
  "post": [
    {
      "id": "2021BB_CC2_USD",
      "description": "2022 Consolidation",
      "versionDescription": "FY2022 Version",
      "year": "2021",
      "active": true,
      "originalScenario": {
        "id": "EUR",
        "description": "Euro"
      },
      "holding": {
        "id": "EUR",
        "description": "Euro"
      },
      "currency": {
        "id": "EUR",
        "description": "Euro"
      },
      "previousScenario": {
        "id": "EUR",
        "description": "Euro"
      },
      "followingScenario": {
        "id": "EUR",
        "description": "Euro"
      },
      "referenceScenario1": {
        "id": "EUR",
        "description": "Euro"
      },
      "referenceScenario2": {
        "id": "EUR",
        "description": "Euro"
      },
      "referenceScenario3": {
        "id": "EUR",
        "description": "Euro"
      },
      "referenceScenario4": {
        "id": "EUR",
        "description": "Euro"
      },
      "referenceScenario5": {
        "id": "EUR",
        "description": "Euro"
      },
      "categoryFilter": {
        "nodeId": "<string>",
        "description": "<string>"
      },
      "accountFilter": {
        "hierarchyId": "<string>",
        "nodeId": "<string>",
        "description": "<string>"
      },
      "fxRateScenario": {
        "id": "EUR",
        "description": "Euro"
```

```
    },
   "financialInvestmentsReclassAdjPrefix": "<string>",
    "customAttributes": {},
    "updateInfo": {
      "user": "API_AI",
      "date": "2025-04-10T12:59:56.246+0000",
      "origin": "INPUT_WEB"
    }
  }
],
"put": [
  {
    "id": "2021BB_CC2_USD",
    "description": "2022 Consolidation",
    "versionDescription": "FY2022 Version",
    "year": "2021",
    "active": true,
    "originalScenario": {
      "id": "EUR",
      "description": "Euro"
    },
    "holding": {
      "id": "EUR",
      "description": "Euro"
    },
    "currency": {
      "id": "EUR",
      "description": "Euro"
    },
    "previousScenario": {
      "id": "EUR",
      "description": "Euro"
    },
    "followingScenario": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario1": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario2": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario3": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario4": {
      "id": "EUR",
      "description": "Euro"
    },
    "referenceScenario5": {
      "id": "EUR",
      "description": "Euro"
    },
    "categoryFilter": {
      "nodeId": "<string>",
      "description": "<string>"
    },
    "accountFilter": {
      "hierarchyId": "<string>",
      "nodeId": "<string>",
      "description": "<string>"
```

	{
	},
	"fxRateScenario": {
	"id": "EUR",
	"description": "Euro"
	},
	"financialInvestmentsReclassAdjPrefix": "<string>",
	"customAttributes": {},
	"updateInfo": {
	"user": "API_AI",
	"date": "2025-04-10T12:59:56.246+0000",
	"origin": "INPUT_WEB"
	}
	}
	],
	"patch": [
	{
	"key": {
	"id": "<string>"
	},
	"data": {}
	}
	],
	"delete": [
	{
	"id": "<string>"
	}
	]
	}

Example of response	{
	"code": "SUCCESS"
	}

Method	POST
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements-bulk-delete-async
HTTP success status	202 (Accepted)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	[
	{
	"id": "<string>"
	}
	]

Example of response	{
	"dataProcessingId": "9fbb47b7-d0f4-43fd-9299-b77777777777"
	}

Method	GET
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements-fetch
Query parameters	properties (obbligatorio), filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 405, 404 (Not found)
Body	-
Example of response	[{}]

Method	GET
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements-bulk-delete-async/<dataprocessingId>

HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"status": "RUNNING",
	"progress": 50,
	"parameters": {}
	}

Method	DELETE
Endpoint	<api-root>/consolidation/v1/<dbID>/scenario/elements-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"status": "STOPPED",
	"message": "Stop on dataprocessingOid 9fbb47b7-d0f4-43fd-9299-b77777777777"
	}

Scenario/Periodo original API

API Title:	ScenarioPeriodo API - ScenarioPeriodoOriginal
Description:	REST API for ScenarioPeriodo dimension management.
Version:	1.0.0
Authentication:	OAuth4, API Key, JWT, Basic Auth

Prerequisites

To use these APIs, users must authenticate using the authentication method configured for [CCH Tagetik].

In addition, the APIs must be enabled in the Repository. If a reverse proxy is used, additional configuration is required. The APIs can be accessed using either the HTTP or HTTPS protocol.

For more information about authentication and API enablement, see

"Enabling REST API" on page 355 and "Authentication - On Premises" on page 356.

Request format: JSON

Response format: JSON

Base URL: <api-root>/dimensions/v1/{dbID}/scenario

URL

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/elements	-	filter, skip, take, sort	Array<ScenarioPeriodoDtoV1Original>	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
POST	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/elements	ScenarioPeriodoDtoV1OriginalInput	-	ScenarioPeriodoDtoV1Original	201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/elements-count	-	filter	integer	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
GET	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/{periodId}	-	-	ScenarioPeriodoDtoV1Original	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
PUT	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/{periodId}	ScenarioPeriodoDtoV1OriginalInput	-	ScenarioPeriodoDtoV1Original	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
PATCH	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/{periodId}	Object	-	ScenarioPeriodoDtoV1Original	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
POST	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/elements-bulk	CrudBulkOperationsRequestV1Original	-	SaveResultV1	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/elements-bulk-delete-async	Array<ScenarioPeriodoDtoV1OriginalInput>	-	AsyncOperationResultV1	202 (Accepted)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/dimensions/v1/{dbID}/scenario/{scenarioId}/period/elements-fetch	-	filter, skip, take, sort, properties (obbligatorio)	Array<Object>	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
GET	<api-root>/dimensions/v1/{dbID}/scenario-periodo/elements-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingPollingResultDto	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
DELETE	<api-root>/dimensions/v1/{dbID}/scenario-periodo/elements-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingDeleteResultDto	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Supported Fields in Request

Field	Supported Cardinality	Supported Values
id	-	string
type	-	ORIGINAL
descriptions	-	Object
startDate	-	string
startMonthlyDate	-	string
endDate	-	string
process	-	string
blocked	-	boolean: true/false

Field	Supported Cardinality	Supported Values
populated	-	boolean: true/false
editSubmittedData	-	boolean: true/false
periodLength	-	integer
saveMode	-	LOOSE, STRICT, STRICT_NO_DELETION, EXTERNAL, IGNORE_VALIDATION, SAVE_ONLY_VALID_ROWS (obbligatorio)
patch	-	Array<PatchDtoV1>
post	-	Array<ScenarioPeriodoDtoV1OriginalInput>
put	-	Array<ScenarioPeriodoDtoV1OriginalInput>
delete	-	Array<ScenarioPeriodoDtoV1OriginalInput>

Additional Fields in Response

Field	Supported Values
archived	boolean: true/false
updateInfo	UpdateInfoDto
updateInfo.user	string
updateInfo.date	string
updateInfo.origin	string
code	string
success	Array<string>
failed	Array<RestApiElementValidationErrorV1>
dataProcessingId	string
requestDateTime	string
status	string
parameters	Object
message	string
skip	integer

Examples of requests

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/elements
Query parameters	filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)

Body	-

Example of response	[
	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"startMonthlyDate": 1735689600000,
	"editSubmittedData": false
	}
	]

Method	POST
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/elements
HTTP success status	201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"startMonthlyDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"blocked": false,
	"populated": false,
	"editSubmittedData": false,
	"periodLength": null
	}

Example of response	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"startMonthlyDate": 1735689600000,
	"editSubmittedData": false
	}

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/elements-count
Query parameters	filter
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-
Example of response	0

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/<periodId>
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-

Example of response	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"startMonthlyDate": 1735689600000,
	"editSubmittedData": false
	}

Method	PUT
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/<periodId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"startMonthlyDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"blocked": false,
	"populated": false,
	"editSubmittedData": false,
	"periodLength": null
	}

Example of response	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"startMonthlyDate": 1735689600000,
	"editSubmittedData": false
	}

Method	PATCH
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/<periodId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	{}

Example of response	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"startMonthlyDate": 1735689600000,
	"editSubmittedData": false
	}

Method	POST
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/elements-bulk
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"saveMode": "LOOSE",
	"patch": [
	{
	"key": {
	"id": "<string>"
	},
	"data": {}
	}
	],
	"post": [
	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"startMonthlyDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"blocked": false,
	"populated": false,
	"editSubmittedData": false,
	"periodLength": null
	}
	],
	"put": [
	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"startMonthlyDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"blocked": false,
	"populated": false,
	"editSubmittedData": false,
	"periodLength": null
	}
	],
	"delete": []
	}

Example of response	{
	"code": null,
	"success": [
	"<string>"
	],
	"failed": [
	{
	"code": null,
	"validationResults": {
	"en": []
	}
	}
	]
	}

Method	POST
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/elements-bulk-delete-async

HTTP success status	202 (Accepted)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	[
	{
	"id": null,
	"type": "ORIGINAL",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"startMonthlyDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"blocked": false,
	"populated": false,
	"editSubmittedData": false,
	"periodLength": null
	}
	]

Example of response	{
	"dataProcessingId": "<string>"
	}

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario/<scenarioId>/period/elements-fetch
Query parameters	filter, skip, take, sort, properties (obbligatorio)
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-
Example of response	[{}]

Method	GET
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario-periodo/elements-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"requestDateTime": "2026-01-01T00:00:00.000+0000",
	"status": "<string>",
	"parameters": {
	"en": "<string>"
	}
	}

Method	DELETE
Endpoint	<api-root>/dimensions/v1/<dbID>/scenario-periodo/elements-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	-

Example of response	{
	"message": null
	}

Scenario/Periodo consolidation API

API Title:	ScenarioPeriodo API - ScenarioPeriodoConsolidation
Description:	REST API for ScenarioPeriodo dimension management.
Version:	1.0.0
Authentication:	OAuth4, API Key, JWT, Basic Auth

Prerequisites

To use these APIs, users must authenticate using the authentication method configured for [CCH Tagetik].

In addition, the APIs must be enabled in the Repository. If a reverse proxy is used, additional configuration is required. The APIs can be accessed using either the HTTP or HTTPS protocol.

For more information about authentication and API enablement, see

"Enabling REST API" on page 355 and "Authentication - On Premises" on page 356.

Request format: JSON

Response format: JSON

Base URL: <api-root>/financial/consolidation/v1/{dbID}/scenario

URL

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
GET	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/elements	-	filter, skip, take, sort	Array<ScenarioPeriodoDtoV1Consolidation>	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
POST	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/elements	ScenarioPeriodoDtoV1ConsolidationInput	-	ScenarioPeriodoDtoV1Consolidation	201 (Created)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/elements-count	-	filter	integer	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
GET	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/{periodId}	-	-	ScenarioPeriodoDtoV1Consolidation	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
PUT	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/{periodId}	ScenarioPeriodoDtoV1ConsolidationInput	-	ScenarioPeriodoDtoV1Consolidation	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

HTTP Method	Endpoint	Request Body	Query Parameters	Response Body	HTTP Response Status	Response Status (Exception)
PATCH	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/{periodId}	Object	-	ScenarioPeriodoDtoV1Consolidation	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/elements-bulk	CrudBulkOperationsRequestV1Consolidation	-	SaveResultV1	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
POST	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/elements-bulk-delete-async	Array<ScenarioPeriodoDtoV1ConsolidationInput>	-	AsyncOperationResultV1	202 (Accepted)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
GET	<api-root>/financial/consolidation/v1/{dbID}/scenario/{scenarioId}/period/elements-fetch	-	filter, skip, take, sort, properties (obbligatorio)	Array<Object>	200 (OK)	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
GET	<api-root>/financial/consolidation/v1/{dbID}/scenario-periodo/elements-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingPollingResultDto	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
DELETE	<api-root>/financial/consolidation/v1/{dbID}/scenario-periodo/elements-bulk-delete-async/{dataprocessingId}	-	-	DataprocessingDeleteResultDto	200 (OK)	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Supported Fields in Request

Field	Supported Cardinality	Supported Values
id	-	string
type	-	CONSOLIDATION
descriptions	-	Object
startDate	-	string
endDate	-	string
process	-	string
processType	-	string
blocked	-	boolean: true/false
populated	-	boolean: true/false
periodLength	-	integer
saveMode	-	LOOSE, STRICT, STRICT_NO_DELETION, EXTERNAL, IGNORE_VALIDATION, SAVE_ONLY_VALID_ROWS (obbligatorio)
patch	-	Array<PatchDtoV1>
post	-	Array<ScenarioPeriodoDtoV1ConsolidationInput>
put	-	Array<ScenarioPeriodoDtoV1ConsolidationInput>
delete	-	Array<ScenarioPeriodoDtoV1ConsolidationInput>

Additional Fields in Response

Field	Supported Values
archived	boolean: true/false
updateInfo	UpdateInfoDto
updateInfo.user	string
updateInfo.date	string
updateInfo.origin	string
code	string
success	Array<string>
failed	Array<RestApiElementValidationErrorV1>
dataProcessingId	string
requestDateTime	string
status	string
parameters	Object
message	string
skip	integer

Examples of requests

Method	GET
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/elements
Query parameters	filter, skip, take, sort
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)

Body	-

Example of response	[
	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"processType": null
	}
	]

Method	POST
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/elements
HTTP success status	201 (Created)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"processType": null,
	"blocked": false,
	"populated": false,
	"periodLength": null
	}

Example of response	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"processType": null
	}

Method	GET
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/elements-count
Query parameters	filter
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-
Example of response	0

Method	GET
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/<periodId>
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-

Example of response	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"processType": null
	}

Method	PUT
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/<periodId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"processType": null,
	"blocked": false,
	"populated": false,
	"periodLength": null
	}

Example of response	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"processType": null
	}

Method	PATCH
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/<periodId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	{}

Example of response	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": 1735689600000,
	"endDate": 1735689600000,
	"process": null,
	"blocked": false,
	"populated": false,
	"archived": false,
	"periodLength": null,
	"updateInfo": {
	"user": null,
	"date": "2026-01-01T00:00:00.000+0000",
	"origin": null
	},
	"processType": null
	}

Method	POST
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/elements-bulk
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	{
	"saveMode": "LOOSE",
	"patch": [
	{
	"key": {
	"id": "<string>"
	},
	"data": {}
	}
	],
	"post": [
	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"processType": null,
	"blocked": false,
	"populated": false,
	"periodLength": null
	}
	],
	"put": [
	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"processType": null,
	"blocked": false,
	"populated": false,
	"periodLength": null
	}
	],
	"delete": [
	]
	}

Example of response	{
	"code": null,
	"success": [
	"<string>"
	],
	"failed": [
	{
	"code": null,
	"validationResults": {
	"en": []
	}
	}
	]
	}

Method	POST
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/elements-bulk-delete-async
HTTP success status	202 (Accepted)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)

Body	[
	{
	"id": null,
	"type": "CONSOLIDATION",
	"descriptions": {
	"en": "<string>"
	},
	"startDate": "2026-01-01T00:00:00.000+0000",
	"endDate": "2026-01-01T00:00:00.000+0000",
	"process": null,
	"processType": null,
	"blocked": false,
	"populated": false,
	"periodLength": null
	}
	]

Example of response	{
	"dataProcessingId": "<string>"
	}

Method	GET
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario/<scenarioId>/period/elements-fetch
Query parameters	filter, skip, take, sort, properties (obbligatorio)
HTTP success status	200 (OK)
HTTP exception status	401 (Unauthorised), 403 (Forbidden), 404 (Not found), 400 (Bad Request)
Body	-
Example of response	[{}]

Method	GET
Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario-periodo/elements-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"requestDateTime": "2026-01-01T00:00:00.000+0000",
	"status": "<string>",
	"parameters": {
	"en": "<string>"
	}
	}

Method	DELETE

Endpoint	<api-root>/financial/consolidation/v1/<dbID>/scenario-periodo/elements-bulk-delete-async/<dataprocessingId>
HTTP success status	200 (OK)
HTTP exception status	400 (Bad Request), 401 (Unauthorised), 403 (Forbidden), 404 (Not found)
Body	-

Example of response	{
	"message": null
	}

API Account

Introduction

CCH Tagetik allows you to manage the Account dimension also via OPEN RESTful APIs.

API title:	Account Dimension openapi 3.0.3
Description:	API for Account dimension management
Version:	V1
Authentication:	OAuth2, API Key, JWT, Basic Auth

Prerequisites

In order to use these APIs, the user must authenticate through the authentication mode chosen for [CCH Tagetik].

Moreover, APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both http and https protocols.

For more details on authentication and enabling, see Enabling the REST API and API Authentication.

Request format: JSON

Response format: JSON

URL

<api-root>/dimensions/v1/{dbID}/account/elements

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
GET	<api-root>/dimensions/v1/{dbID}/account/elements		filter sort skip take (optional parameters)	List of accounts	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
POST	<api-root>/dimensions/v1/{dbID}/account/elements	Accounts		Accounts	201 (Created)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
GET	<api-root>/dimensions/v1/{dbID}/account/elements-count		filter	Quantity of accounts	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
POST	<api-root>/dimensions/v1/{dbID}/account/elements-bulk	Accounts		Success	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
POST	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-asynch			dataProcessingId	202 (Accepted)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
GET	<api-root>/dimensions/v1/{dbID}/account/elements/{id}			Accounts	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
PUT	<api-root>/dimensions/v1/{dbID}/account/elements/{id}	Accounts		Accounts	200 (OK) 201 (Created)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
PATCH	<api-root>/dimensions/v1/{dbID}/account/elements/{id}	Accounts		Accounts	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
GET	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-async/{dataProcessingId}			RUNNING FAILED COMPLETED	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
DELETE	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-async/{dataProcessingId}			stop on dataprocessingOid dataprocessingId	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)

"filter' accepts fields:

- id
- descriptions
- type
- nature
- conversion-conversionType
- consolidation.rules.excludeFromProportionalCalculation
- conversion.referenceAccountForInitialBalance
- dataEntryAndReporting.validity.startDate
- restrictions.customDimension1.restriction
- restrictions.customDimension2.restriction
- restrictions.customDimension3.restriction
- restrictions.customDimension4.restriction
- restrictions.customDimension5.restriction

E.g GET <api-root>/dimensions/v1/{DBID}/account/elements?filter=id=like="value"

in this case, the API call returns all accounts that have an id containing the value 'value'

GET <api-root>/dimensions/v1/{DBID}/account/elements?filter=id=="10010";descriptions.en=like="Filter";nature=="BALANCE_SHEET"

in this case, the API call returns all accounts that have an id equal to "10010", a description in English containing "Filter" and nature equal to "BALANCE_SHEET"

Supported Fields in Request

Account field	Supported cardinality	Supported Values
id	-	string (mandatory)
descriptions.[lingua]	-	string (one mandatory)
alternativesDescriptions.[language]	-	string
customAttributes	-	string
nature	-	BALANCE_SHEET, PROFIT_AND_LOSS, GUARANTIES_AND_COMMITMENTS, OTHER_VARIATIONS, OTHER_STOCKS (mandatory)
type	-	NORMAL, DETAIL, VARIATION (mandatory)
conversion-conversionType	-	PROFIT_AND_LOSS, AVERAGE, PERIOD_AVERAGE, FINAL, HISTORICAL, PREVIOUS_PROFIT_AND_LOSS, PREVIOUS_FINAL, INITIAL_BALANCE, YEAR_TO_YEAR, NONE (mandatory)
conversion.referenceAccountForInitialBalance	-	string
documentationLink	-	string
restrictions.customDimension1.dimensionName	-	string
restrictions.customDimension1.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
restrictions.customDimension2.dimensionName	-	string
restrictions.customDimension2.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS

restrictions.customDimension3.dimensionName	-	string
restrictions.customDimension3.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
restrictions.customDimension4.dimensionName	-	string
restrictions.customDimension4.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
restrictions.customDimension5.dimensionName	-	string
restrictions.customDimension5.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
cashFlowPlanning.variation.debit.id	-	string
cashFlowPlanning.variation.debit.description	-	string
cashFlowPlanning.variation.credit.id	-	string
cashFlowPlanning.variation.credit.description	-	string
cashFlowPlanning.receivablePayble.debit.id	-	string
cashFlowPlanning.receivablePayble.debit.description	-	string
cashFlowPlanning.receivablePayble.credit.id	-	string
cashFlowPlanning.receivablePayble.credit.description	-	string
cashFlowPlanning.liquidity.debit.id	-	string
cashFlowPlanning.liquidity.debit.description	-	string
cashFlowPlanning.liquidity.credit.id	-	string
cashFlowPlanning.liquidity.credit.description	-	string
cashFlowPlanning.other.debit.id	-	string
cashFlowPlanning.other.debit.description	-	string
cashFlowPlanning.other.credit.id	-	string
cashFlowPlanning.other.credit.description	-	string
cashFlowPlanning.other.additionalCreditAccrualAccount.id	-	string
cashFlowPlanning.other.additionalCreditAccrualAccount.description	-	string
cashFlowPlanning.other.additionalDebitAccrualAccount.id	-	string
cashFlowPlanning.other.additionalDebitAccrualAccount.description	-	string
cashFlowPlanning.revaluationDevaluation.enable	-	boolean: true/ false
cashFlowPlanning.revaluationDevaluation.debit.id	-	string
cashFlowPlanningrevaluationDevaluation.debit.description	-	string
cashFlowPlanning.revaluationDevaluation.credit.id	-	string
cashFlowPlanningrevaluationDevaluation.credit.description	-	string
dataEntryAndReporting.validity.startDate	-	date
dataEntryAndReporting.validity.endDate	-	date

dataEntryAndReporting.class	-	NONE (default value), ASSET, COST, DECREASE_IN_ ASSETS, DECREASE_IN_ LIABILITIES, INCREASE_IN_ASSETS, INCREASE IN LIABILITIES, LIABILITY, REVENUE
dataEntryAndReporting.manageTransactionCurrency	-	boolean: true/ false
dataEntryAndReporting.icManagement	-	boolean: true/ false
dataEntryAndReporting.manageMaximumNumberDecimals	-	boolean: true/ false
rules.grossAmountEqualICSum	-	boolean • Yes in this case the system automatically generates upon saving an "IC on Gross amount" calculation logic that calculates the gross amount from the IC declaration • No (default value)
rules.accrual.debit.id	-	string
rules.accrual.debit.description	-	string
rules.accrual.credit.id	-	string
rules.accrual.credit.description	-	string
rules.consolidaton.useAccountForSetup	-	NO, FINANCIAL_ INVESTMENTS, NET_EQUITY
rules.consolidaton.excludeFromProportionalCalculation	-	boolean: true/ false
bankingData.consolidation.bankitReportingMItem.id	-	string
bankingData.consolidation.bankitReportingMItem.description	-	string
bankingData.consolidation.bankitReportingMItem.changeSign	-	boolean: true/false
bankingData.consolidation.bankitReportingMItemICGroup.id	-	string
bankingData.consolidation.bankitReportingMItemICGroup.description	-	string
bankingData.consolidation.bankitReportingMItemICGroup.changeSign	-	boolean: true/false
bankingData.consolidation.bankitReporting1Item.id	-	string
bankingData.consolidation.bankitReporting1Item.description	-	string
bankingData.consolidation.bankitReporting1Item.changeSign	-	boolean: true/false
bankingData.consolidation.bankitReportingEPItem.id	-	string
bankingData.consolidation.bankitReportingEPItem.description	-	string
bankingData.consolidation.bankitReportingEPItem.changeSign	-	boolean: true/false
bankingData.consolidation.ebaSignalingSubAccount.id	-	string
bankingData.consolidation.ebaSignalingSubAccount.description	-	string
bankingData.consolidation.ebaSignalingSubAccount.changeSign	-	boolean: true/false
bankingData.consolidation.bankitReportingMItemOld.id	-	string
bankingData.consolidation.bankitReportingMOld.description	-	string

bankingData.consolidation.bankitReportingMItemOld.changeSign	-	boolean: true/false
bankingData.consolidation.icItemOld.id	-	string
bankingData.consolidation.icItemOld.description	-	string
bankingData.consolidationicItemOld.changeSign	-	boolean: true/false
debitAccrual.Accrual.id	-	string
debitAccrual.Accrual.description	-	string
creditAccrual.Accrual.id	-	string
creditAccrual.Accrual.description	-	string
CtpElement.id	-	string
CtpElement.description	-	string
rules.validationChecks.standardSignCheck	-	ANY, DEBIT, CREDIT
rules.validationChecks.icCapacityCheck	-	DO_NOT_CHECK, CHECK_MINUS_EQUALS_TO, CHECK_EQUALS_TO
rules.validationChecks.fxRatesCheck	-	DO_NOT_CHECK, CHECK_ONLY_IC_AMOUNTS, CHECK_GROSS_AND_IC_AMOUNTS
rules.validationChecks.icSignCheck	-	DO_NOT_CHECK, AS_GROSS_AMOUNT, DEBIT, CREDIT
rules.validationChecks.notesCheck	-	DO_NOT_CHECK, CHECK_ONLY_IC_AMOUNTS, CHECK_GROSS_AND_IC_AMOUNTS
monthlySplittingRules.monthlySplittingType	-	NO, FLAT, COEFFICIENT_445, COEFFICIENT_454, COEFFICIENT_544, ADVANCED_MANAGEMENT
monthlySplittingRules.reference.referenceAccount.id	-	string
monthlySplittingRules.reference.referenceAccount.description	-	string
monthlySplittingRules.reference.referenceAccountHierarchy.hierarchyId	-	string
monthlySplittingRules.reference.referenceAccountHierarchy.nodeId	-	string
monthlySplittingRules.reference.referenceAccountHierarchy.descriptionId	-	string
monthlySplittingRules.reference.referenceScenario	-	string
monthlySplittingRules.reference.customDimension1Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension2Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension3Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension4Filter	-	NONE, LOWEST_LEVEL

monthlySplittingRules.reference.customDimension5Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.categoryFilter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.entityCtpFilter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension2CtpFilter	-	NONE, LOWEST_LEVEL
updateInfo.origin	-	string
updateInfo.user	-	string
updateInfo.date	-	date


The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements
Body	-

Example of response


```
[
    {
        "id": "100",
        "descriptions": {
            "en": "CashEN",
            "it": "CashIT",
            "es": "CashES",
            "fr": "CashFR"
        },
        "alternativeDescriptions": {
            "en": "TestAlternativeDescriptionEN",
            "it": "TestAlternativeDescriptionIT",
            "es": null,
            "fr": null
        },
        "customAttributes": {
            "test": "Custome Attribute"
        },
        "nature": "BALANCE_SHEET",
        "type": "VARIATION",
        "conversion": {
            "conversionType": "PROFIT_AND_LOSS",
            "referenceAccountForInitialBalance": null
        },
        "consolidation": {
            "rules": {
                "useAccountForSetup": "FALSE",
                "excludeFromProportionalCalculation": false
            },
            "bankingData": {
                "bankitReportingMItem": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "bankitReportingMItemICGroup": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "bankitReporting1Item": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "bankitReportingEPItem": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "ebaSignalingSubAccount": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "bankitReportingMItemOld": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "icIitemOld": {
                    "id": null,
                    "description": null,
```

```
                "changeSign": false
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": "2025-09-02T00:00:00.000+0000",
            "endDate": null
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": false,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": "documentationLink",
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": null,
                "description": null
            },
            "creditAccrual": {
                "id": null,
                "description": null
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": null,
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "DO_NOT_CHECK"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "NONE"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
    },
    "cashFlowPlanning": null,
    "monthlySplittingRules": {
```

```
            "monthlySplittingType": "ADVANCED_MANAGEMENT",
            "reference": {
                "referenceAccount": null,
                "referenceAccountHierarchy": null,
                "customDimension1Filter": "NONE",
                "customDimension2Filter": "NONE",
                "customDimension3Filter": "NONE",
                "customDimension4Filter": "NONE",
                "customDimension5Filter": "NONE",
                "categoryFilter": "NONE",
                "entityCtpFilter": "0013",
                "customDimension2CtpFilter": "NONE",
                "referenceSenario": null
            }
        },
        "updateInfo": {
            "user": "USER_BS",
            "date": "2026-01-22T15:12:41.062+0000",
            "origin": "INPUT_WEB"
        }
    },
...
]
```


Method	POST
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements

Body


```
{
 "id": "10010",
  "descriptions": {
    "en": "Cash in Bank Accounts",
    "it": "Cash",
    "es": null,
    "fr": null
  },
  "alternativeDescriptions": {
    "en": "Cash in Bank Accounts",
    "it": "Cash",
    "es": null,
    "fr": null
  },
  "customAttributes": {
    "test": null
  },
  "nature": "BALANCE_SHEET",
  "type": "NORMAL",
  "conversion": {
    "conversionType": "FINAL",
    "referenceAccountForInitialBalance": null
  },
  "consolidation": {
    "rules": {
      "useAccountForSetup": "FALSE",
      "excludeFromProportionalCalculation": false
    },
    "bankingData": {
      "bankitReportingMItem": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "bankitReportingMItemICGroup": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "bankitReporting1Item": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "bankitReportingEPItem": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "ebaSignalingSubAccount": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "bankitReportingMItemOld": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "icIitemOld": {
        "id": null,
        "description": null,
        "changeSign": false
```

```
      }
    }
  },
  "dataEntryAndReporting": {
    "validity": {
      "startDate": null,
      "endDate": null
    },
    "class": "NONE",
    "manageTransactionCurrency": true,
    "icManagement": true,
    "manageMaximumNumberDecimals": false
  },
  "documentationLink": null,
  "rules": {
    "grossAmountEqualICSum": false,
    "accrual": {
      "debitAccrual": {
        "id": null,
        "description": null
      },
      "creditAccrual": {
        "id": null,
        "description": null
      }
    },
    "validationChecks": {
      "standardSignCheck": "ANY",
      "icCapacityCheck": "DO_NOT_CHECK",
      "fxRatesCheck": null,
      "icSignCheck": "DO_NOT_CHECK",
      "notesCheck": "DO_NOT_CHECK"
    }
  },
  "restrictions": {
    "customDimension1": {
      "dimensionName": "Cost Centers",
      "restriction": "NONE"
    },
    "customDimension2": {
      "dimensionName": "Products",
      "restriction": "NONE"
    },
    "customDimension3": {
      "dimensionName": "Customers en",
      "restriction": "NONE"
    },
    "customDimension4": {
      "dimensionName": "Employees",
      "restriction": "NONE"
    },
    "customDimension5": {
      "dimensionName": "Miscellaneous",
      "restriction": "NONE"
    },
    "ctpRestriction": {
      "id": null,
      "description": null
    }
  },
  "cashFlowPlanning": null,
  "monthlySplittingRules": {
    "monthlySplittingType": "NO",
```

	"reference": null
	},
	"updateInfo": {
	"user": "SUE",
	"date": "2017-04-23T23:00:58.496+0000",
	"origin": "INPUT_WEB"
	}
	}

Example of response


```
{
    "id": "10010",
    "descriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash",
        "es": null,
        "fr": null
    },
    "alternativeDescriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash",
        "es": null,
        "fr": null
    },
    "customAttributes": {
        "test": null
    },
    "nature": "BALANCE_SHEET",
    "type": "NORMAL",
    "conversion": {
        "conversionType": "FINAL",
        "referenceAccountForInitialBalance": null
    },
    "consolidation": {
        "rules": {
            "useAccountForSetup": "FALSE",
            "excludeFromProportionalCalculation": false
        },
        "bankingData": {
            "bankitReportingMItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemICGroup": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReporting1Item": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingEPItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "ebaSignalingSubAccount": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "icIitemOld": {
                "id": null,
                "description": null,
                "changeSign": false
```

```
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": null,
            "endDate": null
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": true,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": null,
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": null,
                "description": null
            },
            "creditAccrual": {
                "id": null,
                "description": null
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": null,
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "DO_NOT_CHECK"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "NONE"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
    },
    "cashFlowPlanning": null,
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
```

	"reference": null
	},
	"updateInfo": {
	"user": "SUE",
	"date": "2017-04-23T23:00:58.496+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-count
Body	-
Example of response	100 (quantity of accounts)

Method	POST
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-bulk

Body


```
            {
    "saveMode": "LOOSE",
    "post": [
      {
      "id": "10010",
      "descriptions": {
          "en": "Cash",
          "it": "CUS test",
          "es": null,
          "fr": null
      },
      "alternativeDescriptions": {
          "en": "Cash",
          "it": "Cash in Bank Accounts",
          "es": null,
          "fr": null
      },
      "customAttributes": {
          "test": "Prova"
      },
      "nature": "BALANCE_SHEET",
      "type": "NORMAL",
      "conversion": {
          "conversionType": "FINAL",
          "referenceAccountForInitialBalance": null
      },
      "consolidation": {
          "rules": {
              "useAccountForSetup": "FALSE",
              "excludeFromProportionalCalculation": false
          },
          "bankingData": {
              "bankitReportingMItem": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "bankitReportingMItemICGroup": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "bankitReporting1Item": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "bankitReportingEPItem": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "ebaSignalingSubAccount": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "bankitReportingMItemOld": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "icIitemOld": {
```

```
                "id": null,
                "description": null,
                "changeSign": false
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": null,
            "endDate": null
        },
        "class": "LIABILITY",
        "manageTransactionCurrency": true,
        "icManagement": true,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": "test doc",
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": "10046-0040",
                "description": "Property & Equipment - Acc. Depreciation-Changes due to
Mergers/Incorporations "
            },
            "creditAccrual": {
                "id": "10018",
                "description": "Cus test 8"
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "CHECK_MINUS_EQUALS_TO",
            "fxRatesCheck": "DO_NOT_CHECK",
            "icSignCheck": "AS_GROSS_AMOUNT",
            "notesCheck": "CHECK_GROSS_AND_IC_AMOUNTS"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "RESTRICTED"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
```

```
    },
    "cashFlowPlanning": {
        "variation": {
            "debit": {
                "id": "10010-1000",
                "description": "Cash in Bank Accounts - Generic Movement"
            },
            "credit": {
                "id": "10010-0010",
                "description": "Cash in Bank Accounts- Initial Balance"
            }
        },
        "receivablePayable": {
            "debit": {
                "id": "10035-0100",
                "description": "Land - FX rate difference "
            },
            "credit": {
                "id": "10041-0040",
                "description":  "Buildings  -  Acc.  Depreciation- Changes  due  to
Mergers/Incorporations "
            }
        },
        "liquidity": {
            "debit": {
                "id": "10035-0035",
                "description": "Land - Disposal"
            },
            "credit": {
                "id": "10025-0010",
                "description": "Inventory - Initial Balance"
            }
        },
        "other": {
            "debit": {
                "id": "100-0100",
                "description": "CUS test -FX rate difference "
            },
            "credit": {
                "id": "100-TESTSC4",
                "description": "Test Scenario Planning4"
            },
            "additionalCreditAccrualAccount": {
                "id": "10020",
                "description": "Accounts Receivable"
            },
            "additionalDebitAccrualAccount": {
                "id": "10027",
                "description": "Accruals and Prepaid Expenses"
            }
        },
        "revaluationDevaluation": {
            "enable": false,
            "debit": {
                "id": "50021",
                "description": "Sales Intercompany"
            },
            "credit": {
                "id": "65045",
                "description": "Uniforms"
            }
        }
    },
```

```
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
        "reference": null
    },
    "updateInfo": {
        "user": "USER_BS",
        "date": "2025-10-01T14:49:53.302+0000",
        "origin": "INPUT_WEB"
        }
    }
  ],
  "put": [
    {
    "id": "10011",
    "descriptions": {
        "en": "desc enPUT",
        "it": "desc itPUT",
        "es": null,
        "fr": null
    },
    "alternativeDescriptions": {
        "en": "alternative DescriptionPUT",
        "it": null,
        "es": null,
        "fr": null
    },
    "customAttributes": {
        "test": "prova PUT"
    },
    "nature": "BALANCE_SHEET",
    "type": "NORMAL",
    "conversion": {
        "conversionType": "FINAL",
        "referenceAccountForInitialBalance": null
    },
    "consolidation": {
        "rules": {
            "useAccountForSetup": "FALSE",
            "excludeFromProportionalCalculation": false
        },
        "bankingData": {
            "bankitReportingMItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemICGroup": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReporting1Item": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingEPItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "ebaSignalingSubAccount": {
                "id": null,
```

```
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "icIitemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": null,
            "endDate": null
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": false,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": "documentationLink",
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": null,
                "description": null
            },
            "creditAccrual": {
                "id": null,
                "description": null
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": "DO_NOT_CHECK",
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "DO_NOT_CHECK"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "NONE"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
```

```
            "customDimension5": {
                "dimensionName": "Miscellaneous",
                "restriction": "NONE"
            },
            "ctpRestriction": {
                "id": null,
                "description": null
            }
        },
        "cashFlowPlanning": {
            "variation": {
                "debit": {
                    "id": "10010",
                    "description": "Cash in Bank Accounts"
                },
                "credit": {
                    "id": "10015",
                    "description": "Petty Cash"
                }
            },
            "receivablePayable": {
                "debit": {
                    "id": null,
                    "description": null
                },
                "credit": {
                    "id": null,
                    "description": null
                }
            },
            "liquidity": {
                "debit": {
                    "id": null,
                    "description": null
                },
                "credit": {
                    "id": null,
                    "description": null
                }
            },
            "other": {
                "debit": {
                    "id": null,
                    "description": null
                },
                "credit": {
                    "id": null,
                    "description": null
                },
                "additionalCreditAccrualAccount": {
                    "id": null,
                    "description": null
                },
                "additionalDebitAccrualAccount": {
                    "id": null,
                    "description": null
                }
            },
            "revaluationDevaluation": {
                "enable": false,
                "debit": {
                    "id": null,
                    "description": null
```

<table>
<tr><td></td><td><pre>
            },
            "credit": {
                "id": null,
                "description": null
            }
        }
    },
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
        "reference": null
    },
    "updateInfo": {
        "user": "USER_BS",
        "date": "2025-09-25T12:48:33.181+0000",
        "origin": "INPUT_WEB"
        }
    }
  ]
}
</pre></td></tr>
<tr><td>Example of response</td><td>200 - Created and/or updated record { "code": "SUCCESS" }</td></tr>
</table>

Method	POST
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-asynch

Body	[
	{
	"id": "10010"
	},
	{
	"id": "10011"
	}
	]

Example of response	<pre>{ "dataProcessingId": "2C982FB59C0844E5019C0A2246A42514" }</pre>

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements/{id}
Body	-

Example of response


```
{
    "id": "10010",
    "descriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash",
        "es": null,
        "fr": null
    },
    "alternativeDescriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash",
        "es": null,
        "fr": null
    },
    "customAttributes": {
        "test": null
    },
    "nature": "BALANCE_SHEET",
    "type": "NORMAL",
    "conversion": {
        "conversionType": "FINAL",
        "referenceAccountForInitialBalance": null
    },
    "consolidation": {
        "rules": {
            "useAccountForSetup": "FALSE",
            "excludeFromProportionalCalculation": false
        },
        "bankingData": {
            "bankitReportingMItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemICGroup": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReporting1Item": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingEPItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "ebaSignalingSubAccount": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "icIitemOld": {
                "id": null,
                "description": null,
                "changeSign": false
```

```
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": null,
            "endDate": null
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": true,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": null,
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": null,
                "description": null
            },
            "creditAccrual": {
                "id": null,
                "description": null
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": null,
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "DO_NOT_CHECK"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "NONE"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
    },
    "cashFlowPlanning": null,
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
```

	"reference": null
	},
	"updateInfo": {
	"user": "SUE",
	"date": "2017-04-23T23:00:58.496+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	PUT
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements/{id}

Body


```
{
                        "id": "10010",
                        "descriptions": {
                        "en": "Cash in Bank Accounts",
                        "it": "Cash",
                        "es": null,
                        "fr": null
                        },
                        "alternativeDescriptions": {
                        "en": "Cash in Bank Accounts",
                        "it": "Cash",
                        "es": null,
                        "fr": null
                        },
                        "customAttributes": {
                        "test": null
                        },
                        "nature": "BALANCE_SHEET",
                        "type": "NORMAL",
                        "conversion": {
                        "conversionType": "FINAL",
                        "referenceAccountForInitialBalance": null
                        },
                        "consolidation": {
                        "rules": {
                        "useAccountForSetup": "FALSE",
                        "excludeFromProportionalCalculation": false
                        },
                        "bankingData": {
                        "bankitReportingMItem": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "bankitReportingMItemICGroup": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "bankitReporting1Item": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "bankitReportingEPItem": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "ebaSignalingSubAccount": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "bankitReportingMItemOld": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "icIitemOld": {
                        "id": null,
                        "description": null,
                        "changeSign": false
```

```
}
}
},
"dataEntryAndReporting": {
"validity": {
"startDate": null,
"endDate": null
},
"class": "NONE",
"manageTransactionCurrency": true,
"icManagement": true,
"manageMaximumNumberDecimals": false
},
"documentationLink": null,
"rules": {
"grossAmountEqualICSum": false,
"accrual": {
"debitAccrual": {
"id": null,
"description": null
},
"creditAccrual": {
"id": null,
"description": null
}
},
"validationChecks": {
"standardSignCheck": "ANY",
"icCapacityCheck": "DO_NOT_CHECK",
"fxRatesCheck": null,
"icSignCheck": "DO_NOT_CHECK",
"notesCheck": "DO_NOT_CHECK"
}
},
"restrictions": {
"customDimension1": {
"dimensionName": "Cost Centers",
"restriction": "NONE"
},
"customDimension2": {
"dimensionName": "Products",
"restriction": "NONE"
},
"customDimension3": {
"dimensionName": "Customers en",
"restriction": "NONE"
},
"customDimension4": {
"dimensionName": "Employees",
"restriction": "NONE"
},
"customDimension5": {
"dimensionName": "Miscellaneous",
"restriction": "NONE"
},
"ctpRestriction": {
"id": null,
"description": null
}
},
"cashFlowPlanning": null,
"monthlySplittingRules": {
"monthlySplittingType": "NO",
```

<table>
<tr>
<td></td>
<td>
<pre>
"reference": null
},
"updateInfo": {
"user": "SUE",
"date": "2017-04-23T23:00:58.496+0000",
"origin": "INPUT_WEB"
}
}
</pre>
</td>
</tr>
</table>

Example of response


```
{
                                {
                                "id": "10010",
                                "descriptions": {
                                "en": "Cash in Bank Accounts",
                                "it": "Cash",
                                "es": null,
                                "fr": null
                                },
                                "alternativeDescriptions": {
                                "en": "Cash in Bank Accounts",
                                "it": "Cash",
                                "es": null,
                                "fr": null
                                },
                                "customAttributes": {
                                "test": null
                                },
                                "nature": "BALANCE_SHEET",
                                "type": "NORMAL",
                                "conversion": {
                                "conversionType": "FINAL",
                                "referenceAccountForInitialBalance": null
                                },
                                "consolidation": {
                                "rules": {
                                "useAccountForSetup": "FALSE",
                                "excludeFromProportionalCalculation": false
                                },
                                "bankingData": {
                                "bankitReportingMItem": {
                                "id": null,
                                "description": null,
                                "changeSign": false
                                },
                                "bankitReportingMItemICGroup": {
                                "id": null,
                                "description": null,
                                "changeSign": false
                                },
                                "bankitReporting1Item": {
                                "id": null,
                                "description": null,
                                "changeSign": false
                                },
                                "bankitReportingEPItem": {
                                "id": null,
                                "description": null,
                                "changeSign": false
                                },
                                "ebaSignalingSubAccount": {
                                "id": null,
                                "description": null,
                                "changeSign": false
                                },
                                "bankitReportingMItemOld": {
                                "id": null,
                                "description": null,
                                "changeSign": false
                                },
                                "icIitemOld": {
                                "id": null,
                                "description": null,
```

```
"changeSign": false
}
}
},
"dataEntryAndReporting": {
"validity": {
"startDate": null,
"endDate": null
},
"class": "NONE",
"manageTransactionCurrency": true,
"icManagement": true,
"manageMaximumNumberDecimals": false
},
"documentationLink": null,
"rules": {
"grossAmountEqualICSum": false,
"accrual": {
"debitAccrual": {
"id": null,
"description": null
},
"creditAccrual": {
"id": null,
"description": null
}
},
"validationChecks": {
"standardSignCheck": "ANY",
"icCapacityCheck": "DO_NOT_CHECK",
"fxRatesCheck": null,
"icSignCheck": "DO_NOT_CHECK",
"notesCheck": "DO_NOT_CHECK"
}
},
"restrictions": {
"customDimension1": {
"dimensionName": "Cost Centers",
"restriction": "NONE"
},
"customDimension2": {
"dimensionName": "Products",
"restriction": "NONE"
},
"customDimension3": {
"dimensionName": "Customers en",
"restriction": "NONE"
},
"customDimension4": {
"dimensionName": "Employees",
"restriction": "NONE"
},
"customDimension5": {
"dimensionName": "Miscellaneous",
"restriction": "NONE"
},
"ctpRestriction": {
"id": null,
"description": null
}
},
"cashFlowPlanning": null,
"monthlySplittingRules": {
```

	"monthlySplittingType": "NO",
	"reference": null
	},
	"updateInfo": {
	"user": "SUE",
	"date": "2017-04-23T23:00:58.496+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	PATCH
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements/{id}

Body	{
	"id": "100",
	"alternativeDescriptions": {
	"en": "Cash in Bank Accounts",
	"it": "Cash in Bank Accounts",
	"es": "Cash in Bank Accounts",
	"fr": "Cash in Bank Accounts"
	},
	"customAttributes": {
	"test": "Prova"
	},
	"nature": "PROFIT_AND_LOSS",
	"type": "NORMAL",
	"conversion": {
	"conversionType": "PROFIT_AND_LOSS",
	"referenceAccountForInitialBalance": null
	},
	"dataEntryAndReporting": {
	"validity": {
	"startDate": "2025-09-10T00:00:00.000+0000",
	"endDate": "2025-09-12T00:00:00.000+0000"
	},
	"class": "NONE",
	"manageTransactionCurrency": true,
	"icManagement": false,
	"manageMaximumNumberDecimals": false
	},
	"documentationLink": "doc"
	}

Example of response


```
{
    "id": "100",
    "descriptions": {
        "en": "Cash1",
        "it": "CUS test1",
        "es": null,
        "fr": null
    },
    "alternativeDescriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash in Bank Accounts",
        "es": "Cash in Bank Accounts",
        "fr": "Cash in Bank Accounts"
    },
    "customAttributes": {
        "test": "Prova"
    },
    "nature": "PROFIT_AND_LOSS",
    "type": "NORMAL",
    "conversion": {
        "conversionType": "PROFIT_AND_LOSS",
        "referenceAccountForInitialBalance": null
    },
    "consolidation": {
        "rules": {
            "useAccountForSetup": "FALSE",
            "excludeFromProportionalCalculation": false
        },
        "bankingData": {
            "bankitReportingMItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemICGroup": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReporting1Item": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingEPItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "ebaSignalingSubAccount": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "icIitemOld": {
                "id": null,
                "description": null,
                "changeSign": false
```

```
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": "2025-09-10T00:00:00.000+0000",
            "endDate": "2025-09-12T00:00:00.000+0000"
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": false,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": "doc",
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": "10046-0040",
                "description": "Property & Equipment - Acc. Depreciation-Changes due to
Mergers/Incorporations "
            },
            "creditAccrual": {
                "id": "10018",
                "description": "Cus test 8"
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": null,
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "CHECK_GROSS_AND_IC_AMOUNTS"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "RESTRICTED"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
    },
    "cashFlowPlanning": {
        "variation": {
```

```
            "debit": {
                "id": null,
                "description": null
            },
            "credit": {
                "id": null,
                "description": null
            }
        },
        "receivablePayable": {
            "debit": {
                "id": null,
                "description": null
            },
            "credit": {
                "id": null,
                "description": null
            }
        },
        "liquidity": {
            "debit": {
                "id": null,
                "description": null
            },
            "credit": {
                "id": null,
                "description": null
            }
        },
        "other": {
            "debit": {
                "id": null,
                "description": null
            },
            "credit": {
                "id": null,
                "description": null
            },
            "additionalCreditAccrualAccount": {
                "id": null,
                "description": null
            },
            "additionalDebitAccrualAccount": {
                "id": null,
                "description": null
            }
        },
        "revaluationDevaluation": {
            "enable": false,
            "debit": null,
            "credit": null
        }
    },
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
        "reference": null
    },
    "updateInfo": {
        "user": "USER_BS",
        "date": "2026-03-12T11:31:55.536+0000",
        "origin": "INPUT_WEB"
    }
}
```

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-async/{dataProcessingId}
Body	-
Example of response	[{ "requestDateTime": "2025-07-21T17:32:28.000Z", "status": "RUNNING", "parameters": [] }]

Method	DELETE
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-async/{dataProcessingId}
Body	-
Example of response	{ "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB" }

API Analytical Dimension

Introduction

CCH Tagetik allows you to manage the analytical dimension also via OPEN RESTful APIs.

API title:	Analytical Dimension openapi 3.0.3
Description:	API for managing analytical dimensions
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth

Prerequisites

In order to use these APIs, the user must authenticate through the authentication mode chosen for [CCH Tagetik].

Moreover, APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both http and https protocols.

For more details on authentication and enabling, see Enabling the REST API and API Authentication.

Request format: JSON

Response format: JSON

URL

<api-root>/dimensions/v1/{dbID}/{ANALYTICAL_DIM_ID}/elements/{id}

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
GET	<api-root>/dimensions/v1/{dbID}/{ANALYTICAL_DIM_ID}/elements/{id}			Analytical dimension	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)

Fields in Response

Dataset Field	Supported Values
id	string
descriptions.[lingua]	string
validity.startDate	date
validity.endDate	date
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	string

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Example of request

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/{ANALYTICAL_DIM_ID}/elements/{id}
Body	-

Example of response	{
	"id": "01",
	"descriptions": {
	"en": "Customer",
	"it": "Customer",
	"es": null,
	"fr": null
	},
	"validity": {
	"startDate": "2025-12-01T00:00:00.000+0000",
	"endDate": "2025-12-18T00:00:00.000+0000"
	},
	"updateInfo": {
	"user": "USER_BS",
	"date": "2025-12-11T16:17:48.807+0000",
	"origin": "INPUT_WEB"
	}
	}

API Custom Dimension

Introduction

CCH Tagetik allows you to manage custom dimensions also via OPEN RESTful APIs.

API title:	Custom Dimension openapi 3.0.3
Description:	API for Account dimension management
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth

Prerequisites

In order to use these APIs, the user must authenticate through the authentication mode chosen for [CCH Tagetik].

Moreover, APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both http and https protocols.

For more details on authentication and enabling, see Enabling the REST API and API Authentication.

Request format: JSON

Response format: JSON

URL

<api-root>/dimensions/v1/{dbID}/{customDimIdentifier}/elements/{id}

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
GET	<api-root>/dimensions/v1/{dbID}/{customDimIdentifier}/elements/{id}			Custom dimension	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)

Fields in Response

Dataset Field	Supported Values
id	string
descriptions.[lingua]	string
validity.startDate	date
validity.endDate	date
customAttributes	string
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	string

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Example of request

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/{customDimIdentifier}/elements/{id}
Body	-

Example of response	{
	"id": "AU",
	"descriptions": {
	"en": "Innsbruck",
	"it": "Innsbruck",
	"es": "Innsbruck",
	"fr": "Innsbruck"
	},
	"validity": {
	"startDate": "2025-11-03T00:00:00.000+0000",
	"endDate": "2025-11-26T00:00:00.000+0000"
	},
	"customAttributes": null,
	"updateInfo": {
	"user": "USER_BS",
	"date": "2025-11-24T11:29:22.561+0000",
	"origin": "INPUT_WEB"
	}
	}

API Currency Dimension

This API enables the extraction of information, creation, modification and deletion of the Currency dimension elements of the Tagetik application.

API Title:	AIH Currency openapi 3.0.3
Description:	of the Currency dimension elements
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth

Prerequisites

In order to use these APIs, the user must authenticate through the authentication mode chosen for [CCH Tagetik].

Moreover, APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both http and https protocols.

For more details on authentication and enabling, see "Enabling REST API" on page 355.

Request format: JSON

Response format: JSON

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
POST	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements	Currency Element		Currency Element	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements/{id}			Currency Element	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
PUT	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements/{id}	Currency Element		Currency Element	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements		filter sort skip take (optional parameters)	List of Currency Elements	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements-count		filter sort skip take (optional parameters)	Amount of Currency Elements	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements-fetch		properties filter sort skip take (properties mandatory, other parameters optional)	List of Currency Elements with selected properties only	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
PATCH	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements/{id}	Currency Element		Currency Element	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
POST	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements-bulk	Currency Element (s)		Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
POST	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements-bulk-delete-async	List of Currency Element IDs		Dataprocessing ID	202 (Accepted)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements-bulk-delete-async			Date and time of request, dataprocessing status, parameters	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
DELETE	<api-root>/api/aih/dimensions/v1/{dbID}/currency/elements-bulk-delete-async			Dataprocessing ID	202 (Accepted)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accepts all fields except "oid"

"properties" accepts all response fields, plus the "description" field displaying the description in the DB's default language.(mandatory)

The post-bulk call accepts post, patch and put operations.

Supported Fields in Request

Currency Field	Supported cardinality	Supported Values
id	-	string (mandatory)
oid	-	string
descriptions.[lingua]	-	string (one mandatory)
preferred	-	true/false
decimalNumbers	-	integer (mandatory)
referenceCurrency.id	-	string
referenceCurrency.coefficient	-	true/false
percentageDifference	-	string (mandatory)
xbrlContent	-	string

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Additional Fields in Response

Currency Field	Supported Values
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB,

Examples of requests

Create a Currency Element

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements

Body	{
	"id": "TEST",
	"description": "TEST",
	"preferred": false,
	"xbrlContent": "content",
	"decimalNumbers": 0,
	"referenceCurrency": {
	"id": "EUR",
	"coefficient": "1"
	},
	"percentageDifference": "0.5000"
	}

Example of response	{ "id": "TEST",
	"description": "TEST",
	"preferred": false,
	"xbrlContent": "content",
	"updateInfo": {
	"user": "USER",
	"date": "2026-03-20T15:04:44.022+0000",
	"origin": "INPUT_WEB"
	},
	"decimalNumbers": 0,
	"referenceCurrency": {
	"id": "EUR",
	"coefficient": "1"
	},
	"percentageDifference": "0.5000"
	}

Create a specific Currency Element

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements/TEST
Body	-

Example of response	{ "id": "TEST", "description": "TEST", "preferred": false, "xbrlContent": "content", "updateInfo": { "user": "USER", "date": "2026-03-20T15:04:44.022+0000", "origin": "INPUT_WEB" }, "decimalNumbers": 0, "referenceCurrency": { "id": "EUR", "coefficient": "1" }, "percentageDifference": "0.5000" }

Enter a Currency element

Method	PUT
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements/TEST
Body	{ "id": "TEST", "description": "Inserted", "preferred": false, "xbrlContent": "content", "decimalNumbers": 0, "referenceCurrency": { "id": "EUR", "coefficient": "1" }, "percentageDifference": "0.5000" }
Example of response	{ "id": "TEST", "description": "Inserted", "preferred": false, "xbrlContent": "content", "updateInfo": { "user": "USER", "date": "2026-03-20T15:04:44.022+0000", "origin": "INPUT_WEB" }, "decimalNumbers": 0, "referenceCurrency": { "id": "EUR", "coefficient": "1" }, "percentageDifference": "0.5000" }

List of all Currency Elements

Method	GET

Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements
Body	-

Example of response	[
	{
	"id": "TEST",
	"description": "Default currency",
	"preferred": false,
	"xbrlContent": null,
	"updateInfo": {
	"user": "USER",
	"date": "2024-08-12T07:31:17.686+0000",
	"origin": "INPUT_WEB"
	},
	"decimalNumbers": 2,
	"referenceCurrency": {
	"id": null,
	"coefficient": "1"
	},
	"percentageDifference": "0.0000"
	},
	{
	"id": "AUD",
	"description": "Australian Dollar",
	"preferred": false,
	"xbrlContent": null,
	"updateInfo": {
	"user": "USER",
	"date": "2023-09-19T14:30:53.038+0000",
	"origin": "INPUT_WEB"
	},
	"decimalNumbers": 0,
	"referenceCurrency": {
	"id": null,
	"coefficient": "1"
	},
	"percentageDifference": "0.0000"
	}
	]

Number of Currency Elements

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements-count
Body	-
Example of response	12

Show a list of Currency elements with only the ID and description fields

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements-fetch?properties=id,description
Body	-

Example of response	[{ "id": "010", "descriptions": "currency" }, { "id": "011", "descriptions": "currencyy2" }]

Edit a Currency Element

Method	PATCH
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements/TEST
Body	{ "id": "TEST", "description": "Edited", "preferred": false, "xbrlContent": "content", "decimalNumbers": 0, "referenceCurrency": { "id": "EUR", "coefficient": "1" }, "percentageDifference": "0.5000" }
Example of response	{ "id": "TEST", "description": "Edited", "preferred": false, "xbrlContent": "content", "updateInfo": { "user": "USER", "date": "2026-03-20T15:04:44.022+0000", "origin": "INPUT_WEB" }, "decimalNumbers": 0, "referenceCurrency": { "id": "EUR", "coefficient": "1" }, "percentageDifference": "0.5000" }

Create an element, insert another element, edit another element

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements-bulk

Body	{
	"saveMode": "LOOSE",
	"post": [
	{
	"id": "BULPO",
	"description": "BULPO-post",
	"preferred": false,
	"decimalNumbers": 2,
	"percentageDifference": "0.000",
	"xbrlContent": "string",
	"referenceCurrency": {
	"id": "USD",
	"coefficient": "500"
	}
	}
	],
	"put": [
	{
	"id": "BULPU",
	"description": "BULPU-post",
	"preferred": false,
	"decimalNumbers": 2,
	"percentageDifference": "0.000",
	"xbrlContent": "string",
	"referenceCurrency": {
	"id": "USD",
	"coefficient": "500"
	}
	}
	],
	"patch": [
	{
	"key": {
	"id": "BULPA"
	},
	"data": {
	"description": "BULPA-post",
	"preferred": false,
	"decimalNumbers": 2,
	"percentageDifference": "0.000",
	"xbrlContent": "string",
	"referenceCurrency": {
	"id": "USD",
	"coefficient": "500"
	}
	}
	}
	]
	}

Example of response	{
	"code": "SUCCESS"
	}

Delete a list of Currency elements

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements-bulk-delete-async

Body	<pre>[
	  {
	  "id": "012"
	  },
	  {
	  "id": "013"
	  }
	]</pre>

Example of response	<pre>{ "dataProcessingId": "2C98F135918DD37A1D9D1F84BF1B3CF8" }</pre>

Check the status of a deletion data processing

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements-bulk-delete-async/2C98F135918DD37A1D9D1F84BF1B3CF8
Body	-
Example of response	<pre>{ "requestDateTime": "2026-03-23T11:04:46.772+0000", "status": "COMPLETED", "parameters": {} }</pre>

Abort a deletion data processing

Method	DELETE
Endpoint	/api/aih/dimensions/v1/{dbID}/currency/elements-bulk-delete-async/2C98F135918DD37A1D9D1F84BF1B3CF8
Body	-
Example of response	<pre>{ "message": "Stop on dataprocessingOid 2C98ACE49D28242F019D29C846712CA9" }</pre>

API Category Dimension

This API enables the extraction of information, creation, modification and deletion of the Category dimension elements of the Tagetik application.

API Title:	AIH Category openapi 3.0.3
Description:	API for managing elements of the Category dimension
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth

Prerequisites

In order to use these APIs, the user must authenticate through the authentication mode chosen for [CCH Tagetik].

Moreover, APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both http and https protocols.

For more details on authentication and enabling, see "Enabling REST API" on page 355.

Request format: JSON

Response format: JSON

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
POST	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements	Category Element		Category Element	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements/{id}			Category Element	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
PUT	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements/{id}	Category Element		Category Element	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements		filter sort skip take (optional parameters)	List of Category Elements	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements-count		filter sort skip take (optional parameters)	Quantity of Category Element	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements-fetch		properties filter sort skip take (properties mandatory, other parameters optional)	List of Category Elements with only the selected properties	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
PATCH	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements/{id}	Category Element		Category Element	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
POST	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements-bulk	Category element(s)		Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
POST	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements-bulk-delete-async	List of Category Element IDs		Dataprocessing ID	202 (Accepted)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
GET	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements-bulk-delete-async/{dataprocessingID}			Date and time of request, dataprocessing status, parameters	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
DELETE	<api-root>/api/aih/dimensions/v1/{dbID}/category/elements-bulk-delete-async/{dataprocessingID}			Dataprocessing ID	202 (Accepted)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accepts all fields except "oid"

"properties" accepts all response fields, plus the "description" field displaying the description in the DB's default language. (mandatory)

The post-bulk call accepts post, patch and put operations.

Supported Fields in Request (fields that may be present in the body of the request)

Category field	Supported cardinality	Supported Values
id	string (mandatory)	
oid	string	
descriptions.[lingua]	string (one mandatory)	
categoryType	AMOUNT, CONSOLIDATOR_AMOUNT, ENTITY_JOURNAL, CONSOLIDATOR_ENTITY_JOURNAL, CONSOLIDATION_JOURNAL (mandatory)	
defaultForJournal.periodic	true/false	
defaultForJournal.enableCarryForward		
defaultForJournal.excludeReclassificationsAndNER	true/false	
defaultForJournal.taxCalculationMethod	NONE, MASTER_ENTITY, MASTER_ENTITY_INVERT_CREDIT_DEBIT, SLAVE_ENTITY, SLAVE_ENTITY_INVERT_CREDIT_DEBI	
defaultForJournal.reverseJournalType	NONE, BS_TO_0, BS_TO_0_PL_WRITE_OFF, BS_AND_VARIATION_TO_0_PL_WRITE_OFF	
advanced.handleAsAJournal	string	
advanced.runnableCategory	string	
advanced.childCategory	string	
advanced.referenceCategoryForChild.id	string	
advanced.monthlySplittingType	string	
bankingData.notifyIndividualData	true/false	
bankingData.notify36381	true/false	
bankingData.notifyOtherIntergroupItems	true/false	

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Additional Fields in Response (fields that may be present in the body of the response)

Category field	Supported Values
defaultForConsolidationJournals.overrideCtpSegmentSetEqualToEntity.	true/false
defaultForConsolidationJournals.proportionalCalculationMethod	NONE, LESSER, GREATER, ENTITY_1, ENTITY_1_X_ENTITY_2
defaultForConsolidationJournals.equityEvaluationMethod	NONE, ELIMINATE, EVALUATE_IF_SINGLE_ENTITY, EVALUATE_IF_ENTITY_2_EQUITY
defaultForConsolidationJournals.minoritiesCalculationMethod	NONE, BASED_ON_ENTITY_1, ADVANCED, NORMAL
defaultForConsolidationJournals.minoritiesCalculationMethodOnEntity1	NONE, BASED_ON_ENTITY_1, BASED_ON_ENTITY_2
defaultForConsolidationJournals.minoritiesCalculationMethodOnEntity2	NONE, BASED_ON_ENTITY_1, BASED_ON_ENTITY_2
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB,

Examples of requests

Create a Category Element

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements
Body	

```
{
   "id": "011",
        "descriptions": {
            "en": "011",
            "it": null,
            "ja": null,
            "aa": null
        },
        "categoryType": "ENTITY_JOURNAL",
        "advanced": {
            "handleAsAJournal": null,
            "runnableCategory": true,
            "childCategory": false,
            "referenceCategoryForChild": null,
            "monthlySplittingType": "BASED_ON_ACCOUNT"
        },
        "consolidation": {
            "defaultForJournal": {
                "periodicJournal": false,
                "enableCarryForward": false,
                "exludeReclassificationAndNER": false,
                "taxCalculationMethod": "NONE",
                "reverseJournalType": "NONE"
            },
            "bankingData": {
                "notifyIndividualData": false,
                "notify36381": false,
                "notifyIntragroupItems": false
            }
        }
    }
```

Example of response	{
	"id": "011",
	"descriptions": {
	"en": "011",
	"it": null,
	"ja": null,
	"aa": null
	},
	"categoryType": "ENTITY_JOURNAL",
	"advanced": {
	"handleAsAJournal": null,
	"runnableCategory": true,
	"childCategory": false,
	"referenceCategoryForChild": null,
	"monthlySplittingType": "BASED_ON_ACCOUNT"
	},
	"consolidation": {
	"defaultForJournal": {
	"periodicJournal": false,
	"enableCarryForward": false,
	"exludeReclassificationAndNER": false,
	"taxCalculationMethod": "NONE",
	"reverseJournalType": "NONE"
	},
	"bankingData": {
	"notifyIndividualData": false,
	"notify36381": false,
	"notifyIntragroupItems": false
	}
	},
	"updateInfo": {
	"user": "USER",
	"date": "2023-10-04T15:57:15.361+0000",
	"origin": "INPUT_WEB"
	}
	}

Create a specific Category Element

Method	GET
Endpoint	/api/aih/datamodel/v1/{dbID}/workspaces<api-root>/api/aih/dimensions/v1/{dbID}/category/elements/011
Body	-

Example of response


```
{
   "id": "011",
        "descriptions": {
            "en": "011",
            "it": null,
            "ja": null,
            "aa": null
        },
        "categoryType": "ENTITY_JOURNAL",
        "advanced": {
            "handleAsAJournal": null,
            "runnableCategory": true,
            "childCategory": false,
            "referenceCategoryForChild": null,
            "monthlySplittingType": "BASED_ON_ACCOUNT"
        },
        "consolidation": {
            "defaultForJournal": {
                "periodicJournal": false,
                "enableCarryForward": false,
                "exludeReclassificationAndNER": false,
                "taxCalculationMethod": "NONE",
                "reverseJournalType": "NONE"
            },
            "bankingData": {
                "notifyIndividualData": false,
                "notify36381": false,
                "notifyIntragroupItems": false
            }
        },
        "updateInfo": {
            "user": "USER",
            "date": "2023-10-04T15:57:15.361+0000",
            "origin": "INPUT_WEB"
        }
    }
```


Enter a Category element

Method	PUT
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements/011

Body


```
{
   "id": "011",
        "descriptions": {
            "en": "Inserted",
            "it": null,
            "ja": null,
            "aa": null
        },
        "categoryType": "ENTITY_JOURNAL",
        "advanced": {
            "handleAsAJournal": null,
            "runnableCategory": true,
            "childCategory": false,
            "referenceCategoryForChild": null,
            "monthlySplittingType": "BASED_ON_ACCOUNT"
        },
        "consolidation": {
            "defaultForJournal": {
                "periodicJournal": false,
                "enableCarryForward": false,
                "exludeReclassificationAndNER": false,
                "taxCalculationMethod": "NONE",
                "reverseJournalType": "NONE"
            },
            "bankingData": {
                "notifyIndividualData": false,
                "notify36381": false,
                "notifyIntragroupItems": false
            }
        }
    }
```

Example of response	


```
{
   "id": "011",
        "descriptions": {
            "en": "Inserted",
            "it": null,
            "ja": null,
            "aa": null
        },
        "categoryType": "ENTITY_JOURNAL",
        "advanced": {
            "handleAsAJournal": null,
            "runnableCategory": true,
            "childCategory": false,
            "referenceCategoryForChild": null,
            "monthlySplittingType": "BASED_ON_ACCOUNT"
        },
        "consolidation": {
            "defaultForJournal": {
                "periodicJournal": false,
                "enableCarryForward": false,
                "exludeReclassificationAndNER": false,
                "taxCalculationMethod": "NONE",
                "reverseJournalType": "NONE"
            },
            "bankingData": {
                "notifyIndividualData": false,
                "notify36381": false,
                "notifyIntragroupItems": false
            }
        },
        "updateInfo": {
            "user": "USER",
            "date": "2023-10-04T15:57:15.361+0000",
            "origin": "INPUT_WEB"
        }
    }
```


List of all Category elements

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements
Body	-

Example of response


```
[
    {
        "id": "010",
        "descriptions": {
            "en": "Original Data (En)",
            "it": "Original Data (It)",
            "ja": "Original Data",
            "aa": "Original Data"
        },
        "categoryType": "AMOUNT",
        "advanced": {
            "handleAsAJournal": false,
            "runnableCategory": true,
            "childCategory": false,
            "referenceCategoryForChild": null,
            "monthlySplittingType": "BASED_ON_ACCOUNT"
        },
        "consolidation": {
            "bankingData": {
                "notifyIndividualData": false,
                "notify36381": false,
                "notifyIntragroupItems": false
            }
        },
        "updateInfo": {
            "user": "USER2",
            "date": "2024-03-04T13:26:13.018+0000",
            "origin": "INPUT_WEB"
        }
    },
    {
        "id": "011",
        "descriptions": {
            "en": "011",
            "it": null,
            "ja": null,
            "aa": null
        },
        "categoryType": "ENTITY_JOURNAL",
        "advanced": {
            "handleAsAJournal": null,
            "runnableCategory": true,
            "childCategory": false,
            "referenceCategoryForChild": null,
            "monthlySplittingType": "BASED_ON_ACCOUNT"
        },
        "consolidation": {
            "defaultForJournal": {
                "periodicJournal": false,
                "enableCarryForward": false,
                "exludeReclassificationAndNER": false,
                "taxCalculationMethod": "NONE",
                "reverseJournalType": "NONE"
            },
            "bankingData": {
                "notifyIndividualData": false,
                "notify36381": false,
                "notifyIntragroupItems": false
            }
        },
        "updateInfo": {
            "user": "USER",
            "date": "2023-10-04T15:57:15.361+0000",
```

	<pre>"origin": "INPUT_WEB" } }]</pre>

Number of Category Elements

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements-count
Body	-
Example of response	<pre>12</pre>

Show a list of Category elements with only the ID and description fields

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements-fetch?properties=id,description
Body	-

Example of response	<pre>[
	{
	"id": "010",
	"descriptions": "category"
	},
	{
	"id": "011",
	"descriptions": "category2"
	}
	]</pre>

and

Edit a Category Element

Method	PATCH
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements/011

Body


```
{
   "id": "011",
        "descriptions": {
            "en": "Modified",
            "it": null,
            "ja": null,
            "aa": null
        },
        "categoryType": "ENTITY_JOURNAL",
        "advanced": {
            "handleAsAJournal": null,
            "runnableCategory": true,
            "childCategory": false,
            "referenceCategoryForChild": null,
            "monthlySplittingType": "BASED_ON_ACCOUNT"
        },
        "consolidation": {
            "defaultForJournal": {
                "periodicJournal": false,
                "enableCarryForward": false,
                "exludeReclassificationAndNER": false,
                "taxCalculationMethod": "NONE",
                "reverseJournalType": "NONE"
            },
            "bankingData": {
                "notifyIndividualData": false,
                "notify36381": false,
                "notifyIntragroupItems": false
            }
        }
    }
```

Example of response	


```
{
   "id": "011",
        "descriptions": {
            "en": "Modified",
            "it": null,
            "ja": null,
            "aa": null
        },
        "categoryType": "ENTITY_JOURNAL",
        "advanced": {
            "handleAsAJournal": null,
            "runnableCategory": true,
            "childCategory": false,
            "referenceCategoryForChild": null,
            "monthlySplittingType": "BASED_ON_ACCOUNT"
        },
        "consolidation": {
            "defaultForJournal": {
                "periodicJournal": false,
                "enableCarryForward": false,
                "exludeReclassificationAndNER": false,
                "taxCalculationMethod": "NONE",
                "reverseJournalType": "NONE"
            },
            "bankingData": {
                "notifyIndividualData": false,
                "notify36381": false,
                "notifyIntragroupItems": false
            }
        },
        "updateInfo": {
            "user": "USER",
            "date": "2023-10-04T15:57:15.361+0000",
            "origin": "INPUT_WEB"
        }
    }
```


Create an element, insert another element, edit another element

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements-bulk

Body	{
	"saveMode": "LOOSE",
	"post": [
	{
	"id": "BULPO",
	"currency": {
	"id": "EUR"
	},
	"descriptions": {
	"it": "BULPO-it",
	"en": "BULPO-en"
	}
	}
	],
	"put": [
	{
	"id": "BULPC",
	"currency": {
	"id": "EUR"
	},
	"descriptions": {
	"it": "BULPC-it",
	"en": "BULPC-en"
	}
	}
	],
	"patch": [
	{
	"key": {
	"id": "BULPA"
	},
	"data": {
	"currency": {
	"id": "AUD"
	},
	"descriptions": {
	"it": "Patchato-it",
	"en": "Patched-en"
	}
	}
	}
	]
	}

Example of response	{
	"code": "SUCCESS"
	}

Delete a list of Category elements

Method	POST
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements-bulk-delete-async

Body	<pre>[
	{
	"id": "012"
	},
	{
	"id": "013"
	}
	]</pre>

Example of response	<pre>{ "dataProcessingId": "2C98F135918DD37A1D9D1F84BF1B3CF8" }</pre>

Check the status of a deletion data processing

Method	GET
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements-bulk-delete-async/2C98F135918DD37A1D9D1F84BF1B3CF8
Body	-
Example of response	<pre>{ "requestDateTime": "2026-03-23T11:04:46.772+0000", "status": "COMPLETED", "parameters": {} }</pre>

Abort a deletion data processing

Method	DELETE
Endpoint	/api/aih/dimensions/v1/{dbID}/category/elements-bulk-delete-async/2C98F135918DD37A1D9D1F84BF1B3CF8
Body	-
Example of response	<pre>{ "message": "Stop on dataprocessingOid 2C98ACE49D28242F019D29C846712CA9" }</pre>

API Account

Introduction

CCH Tagetik allows you to manage the Account dimension also via OPEN RESTful APIs.

API title:	Account Dimension openapi 3.0.3
Description:	API for Account dimension management
Version:	V1
Authentication:	OAuth2, API Key, JWT, Basic Auth

Prerequisites

In order to use these APIs, the user must authenticate through the authentication mode chosen for [CCH Tagetik].

Moreover, APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both http and https protocols.

For more details on authentication and enabling, see Enabling the REST API and API Authentication.

Request format: JSON

Response format: JSON

URL

<api-root>/dimensions/v1/{dbID}/account/elements

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
GET	<api-root>/dimensions/v1/{dbID}/account/elements		filter sort skip take (optional parameters)	List of accounts	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
POST	<api-root>/dimensions/v1/{dbID}/account/elements	Accounts		Accounts	201 (Created)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
GET	<api-root>/dimensions/v1/{dbID}/account/elements-count		filter	Quantity of accounts	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
POST	<api-root>/dimensions/v1/{dbID}/account/elements-bulk	Accounts		Success	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)

Http Method	Endpoint	Body of the request	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
POST	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-asynch			dataProcessingId	202 (Accepted)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
GET	<api-root>/dimensions/v1/{dbID}/account/elements/{id}			Accounts	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
PUT	<api-root>/dimensions/v1/{dbID}/account/elements/{id}	Accounts		Accounts	200 (OK) 201 (Created)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
PATCH	<api-root>/dimensions/v1/{dbID}/account/elements/{id}	Accounts		Accounts	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
GET	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-async/{dataProcessingId}			RUNNING FAILED COMPLETED	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)
DELETE	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-async/{dataProcessingId}			stop on dataprocessingOid dataprocessingId	200 (OK)	404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Bad Request)

"filter' accepts fields:

- id
- descriptions
- type
- nature
- conversion-conversionType
- consolidation.rules.excludeFromProportionalCalculation
- conversion.referenceAccountForInitialBalance
- dataEntryAndReporting.validity.startDate
- restrictions.customDimension1.restriction
- restrictions.customDimension2.restriction
- restrictions.customDimension3.restriction
- restrictions.customDimension4.restriction
- restrictions.customDimension5.restriction

E.g GET <api-root>/dimensions/v1/{DBID}/account/elements?filter=id=like="value"

in this case, the API call returns all accounts that have an id containing the value 'value'

GET <api-root>/dimensions/v1/
{DBID}/account/elements?filter=id=="10010";descriptions.en=like="Filter";nature=="BALANCE_SHEET"

in this case, the API call returns all accounts that have an id equal to "10010", a description in English containing "Filter" and nature equal to "BALANCE_SHEET"

Supported Fields in Request

Account field	Supported cardinality	Supported Values
id	-	string (mandatory)
descriptions.[lingua]	-	string (one mandatory)
alternativesDescriptions.[language]	-	string
customAttributes	-	string
nature	-	BALANCE_SHEET, PROFIT_AND_LOSS, GUARANTIES_AND_COMMITMENTS, OTHER_VARIATIONS, OTHER_STOCKS (mandatory)
type	-	NORMAL, DETAIL, VARIATION (mandatory)

conversion-conversionType	-	PROFIT_AND_LOSS, AVERAGE, PERIOD_AVERAGE, FINAL, HISTORICAL, PREVIOUS_PROFIT_AND_LOSS, PREVIOUS_FINAL, INITIAL_BALANCE, YEAR_TO_YEAR, NONE (mandatory)
conversion.referenceAccountForInitialBalance	-	string
documentationLink	-	string
restrictions.customDimension1.dimensionName	-	string
restrictions.customDimension1.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
restrictions.customDimension2.dimensionName	-	string
restrictions.customDimension2.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
restrictions.customDimension3.dimensionName	-	string
restrictions.customDimension3.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
restrictions.customDimension4.dimensionName	-	string
restrictions.customDimension4.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
restrictions.customDimension5.dimensionName	-	string

restrictions.customDimension5.restricted	-	NONE, RESTRICTED, RESTRICTED_ON_ENTITY_DEFAULT_CUSTOM_DIMENSION, RESTRICTED_BASED_ON_ACCOUNT_CLASSIFIERS_RELATIONSHIPS
cashFlowPlanning.variation.debit.id	-	string
cashFlowPlanning.variation.debit.description	-	string
cashFlowPlanning.variation.credit.id	-	string
cashFlowPlanning.variation.credit.description	-	string
cashFlowPlanning.receivablePayble.debit.id	-	string
cashFlowPlanning.receivablePayble.debit.description	-	string
cashFlowPlanning.receivablePayble.credit.id	-	string
cashFlowPlanning.receivablePayble.credit.description	-	string
cashFlowPlanning.liquidity.debit.id	-	string
cashFlowPlanning.liquidity.debit.description	-	string
cashFlowPlanning.liquidity.credit.id	-	string
cashFlowPlanning.liquidity.credit.description	-	string
cashFlowPlanning.other.debit.id	-	string
cashFlowPlanning.other.debit.description	-	string
cashFlowPlanning.other.credit.id	-	string
cashFlowPlanning.other.credit.description	-	string
cashFlowPlanning.other.additionalCreditAccrualAccount.id	-	string
cashFlowPlanning.other.additionalCreditAccrualAccount.description	-	string
cashFlowPlanning.other.additionalDebitAccrualAccount.id	-	string
cashFlowPlanning.other.additionalDebitAccrualAccount.description	-	string
cashFlowPlanning.revaluationDevaluation.enable	-	boolean: true/ false
cashFlowPlanning.revaluationDevaluation.debit.id	-	string
cashFlowPlanningrevaluationDevaluation.debit.description	-	string
cashFlowPlanning.revaluationDevaluation.credit.id	-	string
cashFlowPlanningrevaluationDevaluation.credit.description	-	string
dataEntryAndReporting.validity.startDate	-	date
dataEntryAndReporting.validity.endDate	-	date
dataEntryAndReporting.class	-	NONE (default value), ASSET, COST, DECREASE_IN_ASSETS, DECREASE_IN_LIABILITIES, INCREASE_IN_ASSETS, INCREASE IN LIABILITIES, LIABILITY, REVENUE
dataEntryAndReporting.manageTransactionCurrency	-	boolean: true/ false
dataEntryAndReporting.icManagement	-	boolean: true/ false
dataEntryAndReporting.manageMaximumNumberDecimals	-	boolean: true/ false

rules.grossAmountEqualICSum	-	boolean • Yes in this case the system automatically generates upon saving an "IC on Gross amount" calculation logic that calculates the gross amount from the IC declaration • No (default value)
rules.accrual.debit.id	-	string
rules.accrual.debit.description	-	string
rules.accrual.credit.id	-	string
rules.accrual.credit.description	-	string
rules.consolidaton.useAccountForSetup	-	NO, FINANCIAL_ INVESTMENTS, NET_EQUITY
rules.consolidaton.excludeFromProportionalCalculation	-	boolean: true/ false
bankingData.consolidation.bankitReportingMItem.id	-	string
bankingData.consolidation.bankitReportingMItem.description	-	string
bankingData.consolidation.bankitReportingMItem.changeSign	-	boolean: true/false
bankingData.consolidation.bankitReportingMItemICGroup.id	-	string
bankingData.consolidation.bankitReportingMItemICGroup.description	-	string
bankingData.consolidation.bankitReportingMItemICGroup.changeSign	-	boolean: true/false
bankingData.consolidation.bankitReporting1Item.id	-	string
bankingData.consolidation.bankitReporting1Item.description	-	string
bankingData.consolidation.bankitReporting1Item.changeSign	-	boolean: true/false
bankingData.consolidation.bankitReportingEPItem.id	-	string
bankingData.consolidation.bankitReportingEPItem.description	-	string
bankingData.consolidation.bankitReportingEPItem.changeSign	-	boolean: true/false
bankingData.consolidation.ebaSignalingSubAccount.id	-	string
bankingData.consolidation.ebaSignalingSubAccount.description	-	string
bankingData.consolidation.ebaSignalingSubAccount.changeSign	-	boolean: true/false
bankingData.consolidation.bankitReportingMItemOld.id	-	string
bankingData.consolidation.bankitReportingMOld.description	-	string
bankingData.consolidation.bankitReportingMItemOld.changeSign	-	boolean: true/false
bankingData.consolidation.icItemOld.id	-	string
bankingData.consolidation.icItemOld.description	-	string
bankingData.consolidationicItemOld.changeSign	-	boolean: true/false
debitAccrual.Accrual.id	-	string
debitAccrual.Accrual.description	-	string
creditAccrual.Accrual.id	-	string
creditAccrual.Accrual.description	-	string
CtpElement.id	-	string
CtpElement.description	-	string
rules.validationChecks.standardSignCheck	-	ANY, DEBIT, CREDIT
rules.validationChecks.icCapacityCheck	-	DO_NOT_CHECK, CHECK_MINUS_ EQUALS_TO, CHECK_EQUALS_TO

rules.validationChecks.fxRatesCheck	-	DO_NOT_CHECK, CHECK_ONLY_IC_AMOUNTS, CHECK_GROSS_AND_IC_AMOUNTS
rules.validationChecks.icSignCheck	-	DO_NOT_CHECK, AS_GROSS_AMOUNT, DEBIT, CREDIT
rules.validationChecks.notesCheck	-	DO_NOT_CHECK, CHECK_ONLY_IC_AMOUNTS, CHECK_GROSS_AND_IC_AMOUNTS
monthlySplittingRules.monthlySplittingType	-	NO, FLAT, COEFFICIENT_445, COEFFICIENT_454, COEFFICIENT_544, ADVANCED_MANAGEMENT
monthlySplittingRules.reference.referenceAccount.id	-	string
monthlySplittingRules.reference.referenceAccount.description	-	string
monthlySplittingRules.reference.referenceAccountHierarchy.hierarchyId	-	string
monthlySplittingRules.reference.referenceAccountHierarchy.nodeId	-	string
monthlySplittingRules.reference.referenceAccountHierarchy.descriptionId	-	string
monthlySplittingRules.reference.referenceScenario	-	string
monthlySplittingRules.reference.customDimension1Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension2Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension3Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension4Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension5Filter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.categoryFilter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.entityCtpFilter	-	NONE, LOWEST_LEVEL
monthlySplittingRules.reference.customDimension2CtpFilter	-	NONE, LOWEST_LEVEL
updateInfo.origin	-	string
updateInfo.user	-	string
updateInfo.date	-	date

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements
Body	-

Example of response


```
[
    {
        "id": "100",
        "descriptions": {
            "en": "CashEN",
            "it": "CashIT",
            "es": "CashES",
            "fr": "CashFR"
        },
        "alternativeDescriptions": {
            "en": "TestAlternativeDescriptionEN",
            "it": "TestAlternativeDescriptionIT",
            "es": null,
            "fr": null
        },
        "customAttributes": {
            "test": "Custome Attribute"
        },
        "nature": "BALANCE_SHEET",
        "type": "VARIATION",
        "conversion": {
            "conversionType": "PROFIT_AND_LOSS",
            "referenceAccountForInitialBalance": null
        },
        "consolidation": {
            "rules": {
                "useAccountForSetup": "FALSE",
                "excludeFromProportionalCalculation": false
            },
            "bankingData": {
                "bankitReportingMItem": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "bankitReportingMItemICGroup": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "bankitReporting1Item": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "bankitReportingEPItem": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "ebaSignalingSubAccount": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "bankitReportingMItemOld": {
                    "id": null,
                    "description": null,
                    "changeSign": false
                },
                "icIitemOld": {
                    "id": null,
                    "description": null,
```

```
                    "changeSign": false
                }
            }
        },
        "dataEntryAndReporting": {
            "validity": {
                "startDate": "2025-09-02T00:00:00.000+0000",
                "endDate": null
            },
            "class": "NONE",
            "manageTransactionCurrency": true,
            "icManagement": false,
            "manageMaximumNumberDecimals": false
        },
        "documentationLink": "documentationLink",
        "rules": {
            "grossAmountEqualICSum": false,
            "accrual": {
                "debitAccrual": {
                    "id": null,
                    "description": null
                },
                "creditAccrual": {
                    "id": null,
                    "description": null
                }
            },
            "validationChecks": {
                "standardSignCheck": "ANY",
                "icCapacityCheck": "DO_NOT_CHECK",
                "fxRatesCheck": null,
                "icSignCheck": "DO_NOT_CHECK",
                "notesCheck": "DO_NOT_CHECK"
            }
        },
        "restrictions": {
            "customDimension1": {
                "dimensionName": "Cost Centers",
                "restriction": "NONE"
            },
            "customDimension2": {
                "dimensionName": "Products",
                "restriction": "NONE"
            },
            "customDimension3": {
                "dimensionName": "Customers en",
                "restriction": "NONE"
            },
            "customDimension4": {
                "dimensionName": "Employees",
                "restriction": "NONE"
            },
            "customDimension5": {
                "dimensionName": "Miscellaneous",
                "restriction": "NONE"
            },
            "ctpRestriction": {
                "id": null,
                "description": null
            }
        },
        "cashFlowPlanning": null,
        "monthlySplittingRules": {
```

```
            "monthlySplittingType": "ADVANCED_MANAGEMENT",
            "reference": {
                "referenceAccount": null,
                "referenceAccountHierarchy": null,
                "customDimension1Filter": "NONE",
                "customDimension2Filter": "NONE",
                "customDimension3Filter": "NONE",
                "customDimension4Filter": "NONE",
                "customDimension5Filter": "NONE",
                "categoryFilter": "NONE",
                "entityCtpFilter": "0013",
                "customDimension2CtpFilter": "NONE",
                "referenceSenario": null
            }
        },
        "updateInfo": {
            "user": "USER_BS",
            "date": "2026-01-22T15:12:41.062+0000",
            "origin": "INPUT_WEB"
        }
    },
...
]
```


Method	POST
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements

Body


```
{
 "id": "10010",
  "descriptions": {
    "en": "Cash in Bank Accounts",
    "it": "Cash",
    "es": null,
    "fr": null
  },
  "alternativeDescriptions": {
    "en": "Cash in Bank Accounts",
    "it": "Cash",
    "es": null,
    "fr": null
  },
  "customAttributes": {
    "test": null
  },
  "nature": "BALANCE_SHEET",
  "type": "NORMAL",
  "conversion": {
    "conversionType": "FINAL",
    "referenceAccountForInitialBalance": null
  },
  "consolidation": {
    "rules": {
      "useAccountForSetup": "FALSE",
      "excludeFromProportionalCalculation": false
    },
    "bankingData": {
      "bankitReportingMItem": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "bankitReportingMItemICGroup": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "bankitReporting1Item": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "bankitReportingEPItem": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "ebaSignalingSubAccount": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "bankitReportingMItemOld": {
        "id": null,
        "description": null,
        "changeSign": false
      },
      "icIitemOld": {
        "id": null,
        "description": null,
        "changeSign": false
```

```
        }
      }
    },
    "dataEntryAndReporting": {
      "validity": {
        "startDate": null,
        "endDate": null
      },
      "class": "NONE",
      "manageTransactionCurrency": true,
      "icManagement": true,
      "manageMaximumNumberDecimals": false
    },
    "documentationLink": null,
    "rules": {
      "grossAmountEqualICSum": false,
      "accrual": {
        "debitAccrual": {
          "id": null,
          "description": null
        },
        "creditAccrual": {
          "id": null,
          "description": null
        }
      },
      "validationChecks": {
        "standardSignCheck": "ANY",
        "icCapacityCheck": "DO_NOT_CHECK",
        "fxRatesCheck": null,
        "icSignCheck": "DO_NOT_CHECK",
        "notesCheck": "DO_NOT_CHECK"
      }
    },
    "restrictions": {
      "customDimension1": {
        "dimensionName": "Cost Centers",
        "restriction": "NONE"
      },
      "customDimension2": {
        "dimensionName": "Products",
        "restriction": "NONE"
      },
      "customDimension3": {
        "dimensionName": "Customers en",
        "restriction": "NONE"
      },
      "customDimension4": {
        "dimensionName": "Employees",
        "restriction": "NONE"
      },
      "customDimension5": {
        "dimensionName": "Miscellaneous",
        "restriction": "NONE"
      },
      "ctpRestriction": {
        "id": null,
        "description": null
      }
    },
    "cashFlowPlanning": null,
    "monthlySplittingRules": {
      "monthlySplittingType": "NO",
```

	"reference": null
	},
	"updateInfo": {
	"user": "SUE",
	"date": "2017-04-23T23:00:58.496+0000",
	"origin": "INPUT_WEB"
	}
	}

Example of response


```
{
    "id": "10010",
    "descriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash",
        "es": null,
        "fr": null
    },
    "alternativeDescriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash",
        "es": null,
        "fr": null
    },
    "customAttributes": {
        "test": null
    },
    "nature": "BALANCE_SHEET",
    "type": "NORMAL",
    "conversion": {
        "conversionType": "FINAL",
        "referenceAccountForInitialBalance": null
    },
    "consolidation": {
        "rules": {
            "useAccountForSetup": "FALSE",
            "excludeFromProportionalCalculation": false
        },
        "bankingData": {
            "bankitReportingMItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemICGroup": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReporting1Item": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingEPItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "ebaSignalingSubAccount": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "icIitemOld": {
                "id": null,
                "description": null,
                "changeSign": false
```

```
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": null,
            "endDate": null
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": true,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": null,
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": null,
                "description": null
            },
            "creditAccrual": {
                "id": null,
                "description": null
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": null,
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "DO_NOT_CHECK"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "NONE"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
    },
    "cashFlowPlanning": null,
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
```

	"reference": null
	},
	"updateInfo": {
	"user": "SUE",
	"date": "2017-04-23T23:00:58.496+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-count
Body	-
Example of response	100 (quantity of accounts)

Method	POST
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-bulk

Body


```
            {
    "saveMode": "LOOSE",
    "post": [
      {
      "id": "10010",
      "descriptions": {
          "en": "Cash",
          "it": "CUS test",
          "es": null,
          "fr": null
      },
      "alternativeDescriptions": {
          "en": "Cash",
          "it": "Cash in Bank Accounts",
          "es": null,
          "fr": null
      },
      "customAttributes": {
          "test": "Prova"
      },
      "nature": "BALANCE_SHEET",
      "type": "NORMAL",
      "conversion": {
          "conversionType": "FINAL",
          "referenceAccountForInitialBalance": null
      },
      "consolidation": {
          "rules": {
              "useAccountForSetup": "FALSE",
              "excludeFromProportionalCalculation": false
          },
          "bankingData": {
              "bankitReportingMItem": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "bankitReportingMItemICGroup": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "bankitReporting1Item": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "bankitReportingEPItem": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "ebaSignalingSubAccount": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "bankitReportingMItemOld": {
                  "id": null,
                  "description": null,
                  "changeSign": false
              },
              "icIitemOld": {
```

```
                "id": null,
                "description": null,
                "changeSign": false
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": null,
            "endDate": null
        },
        "class": "LIABILITY",
        "manageTransactionCurrency": true,
        "icManagement": true,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": "test doc",
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": "10046-0040",
                "description": "Property & Equipment - Acc. Depreciation-Changes due to
Mergers/Incorporations "
            },
            "creditAccrual": {
                "id": "10018",
                "description": "Cus test 8"
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "CHECK_MINUS_EQUALS_TO",
            "fxRatesCheck": "DO_NOT_CHECK",
            "icSignCheck": "AS_GROSS_AMOUNT",
            "notesCheck": "CHECK_GROSS_AND_IC_AMOUNTS"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "RESTRICTED"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
```

```
    },
    "cashFlowPlanning": {
        "variation": {
            "debit": {
                "id": "10010-1000",
                "description": "Cash in Bank Accounts - Generic Movement"
            },
            "credit": {
                "id": "10010-0010",
                "description": "Cash in Bank Accounts- Initial Balance"
            }
        },
        "receivablePayable": {
            "debit": {
                "id": "10035-0100",
                "description": "Land - FX rate difference "
            },
            "credit": {
                "id": "10041-0040",
                "description":  "Buildings  -  Acc.  Depreciation- Changes  due  to
Mergers/Incorporations "
            }
        },
        "liquidity": {
            "debit": {
                "id": "10035-0035",
                "description": "Land - Disposal"
            },
            "credit": {
                "id": "10025-0010",
                "description": "Inventory - Initial Balance"
            }
        },
        "other": {
            "debit": {
                "id": "100-0100",
                "description": "CUS test -FX rate difference "
            },
            "credit": {
                "id": "100-TESTSC4",
                "description": "Test Scenario Planning4"
            },
            "additionalCreditAccrualAccount": {
                "id": "10020",
                "description": "Accounts Receivable"
            },
            "additionalDebitAccrualAccount": {
                "id": "10027",
                "description": "Accruals and Prepaid Expenses"
            }
        },
        "revaluationDevaluation": {
            "enable": false,
            "debit": {
                "id": "50021",
                "description": "Sales Intercompany"
            },
            "credit": {
                "id": "65045",
                "description": "Uniforms"
            }
        }
    },
```

```
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
        "reference": null
    },
    "updateInfo": {
        "user": "USER_BS",
        "date": "2025-10-01T14:49:53.302+0000",
        "origin": "INPUT_WEB"
        }
    }
  ],
  "put": [
    {
    "id": "10011",
    "descriptions": {
        "en": "desc enPUT",
        "it": "desc itPUT",
        "es": null,
        "fr": null
    },
    "alternativeDescriptions": {
        "en": "alternative DescriptionPUT",
        "it": null,
        "es": null,
        "fr": null
    },
    "customAttributes": {
        "test": "prova PUT"
    },
    "nature": "BALANCE_SHEET",
    "type": "NORMAL",
    "conversion": {
        "conversionType": "FINAL",
        "referenceAccountForInitialBalance": null
    },
    "consolidation": {
        "rules": {
            "useAccountForSetup": "FALSE",
            "excludeFromProportionalCalculation": false
        },
        "bankingData": {
            "bankitReportingMItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemICGroup": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReporting1Item": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingEPItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "ebaSignalingSubAccount": {
                "id": null,
```

```
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "icIitemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": null,
            "endDate": null
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": false,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": "documentationLink",
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": null,
                "description": null
            },
            "creditAccrual": {
                "id": null,
                "description": null
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": "DO_NOT_CHECK",
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "DO_NOT_CHECK"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "NONE"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
```

```
            "customDimension5": {
                "dimensionName": "Miscellaneous",
                "restriction": "NONE"
            },
            "ctpRestriction": {
                "id": null,
                "description": null
            }
        },
        "cashFlowPlanning": {
            "variation": {
                "debit": {
                    "id": "10010",
                    "description": "Cash in Bank Accounts"
                },
                "credit": {
                    "id": "10015",
                    "description": "Petty Cash"
                }
            },
            "receivablePayable": {
                "debit": {
                    "id": null,
                    "description": null
                },
                "credit": {
                    "id": null,
                    "description": null
                }
            },
            "liquidity": {
                "debit": {
                    "id": null,
                    "description": null
                },
                "credit": {
                    "id": null,
                    "description": null
                }
            },
            "other": {
                "debit": {
                    "id": null,
                    "description": null
                },
                "credit": {
                    "id": null,
                    "description": null
                },
                "additionalCreditAccrualAccount": {
                    "id": null,
                    "description": null
                },
                "additionalDebitAccrualAccount": {
                    "id": null,
                    "description": null
                }
            },
            "revaluationDevaluation": {
                "enable": false,
                "debit": {
                    "id": null,
                    "description": null
```

```
            },
            "credit": {
                "id": null,
                "description": null
            }
        }
    },
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
        "reference": null
    },
    "updateInfo": {
        "user": "USER_BS",
        "date": "2025-09-25T12:48:33.181+0000",
        "origin": "INPUT_WEB"
        }
    }
  ]
}
```


Example of response	200 - Created and/or updated record { "code": "SUCCESS" }

Method	POST
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-asynch

Body	[
	{
	"id": "10010"
	},
	{
	"id": "10011"
	}
	]

Example of response	{ "dataProcessingId": "2C982FB59C0844E5019C0A2246A42514" }

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements/{id}
Body	-

Example of response


```
{
    "id": "10010",
    "descriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash",
        "es": null,
        "fr": null
    },
    "alternativeDescriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash",
        "es": null,
        "fr": null
    },
    "customAttributes": {
        "test": null
    },
    "nature": "BALANCE_SHEET",
    "type": "NORMAL",
    "conversion": {
        "conversionType": "FINAL",
        "referenceAccountForInitialBalance": null
    },
    "consolidation": {
        "rules": {
            "useAccountForSetup": "FALSE",
            "excludeFromProportionalCalculation": false
        },
        "bankingData": {
            "bankitReportingMItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemICGroup": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReporting1Item": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingEPItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "ebaSignalingSubAccount": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "icIitemOld": {
                "id": null,
                "description": null,
                "changeSign": false
```

```
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": null,
            "endDate": null
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": true,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": null,
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": null,
                "description": null
            },
            "creditAccrual": {
                "id": null,
                "description": null
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": null,
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "DO_NOT_CHECK"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "NONE"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
    },
    "cashFlowPlanning": null,
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
```

	"reference": null
	},
	"updateInfo": {
	"user": "SUE",
	"date": "2017-04-23T23:00:58.496+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	PUT
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements/{id}

Body


```
{
                        "id": "10010",
                        "descriptions": {
                        "en": "Cash in Bank Accounts",
                        "it": "Cash",
                        "es": null,
                        "fr": null
                        },
                        "alternativeDescriptions": {
                        "en": "Cash in Bank Accounts",
                        "it": "Cash",
                        "es": null,
                        "fr": null
                        },
                        "customAttributes": {
                        "test": null
                        },
                        "nature": "BALANCE_SHEET",
                        "type": "NORMAL",
                        "conversion": {
                        "conversionType": "FINAL",
                        "referenceAccountForInitialBalance": null
                        },
                        "consolidation": {
                        "rules": {
                        "useAccountForSetup": "FALSE",
                        "excludeFromProportionalCalculation": false
                        },
                        "bankingData": {
                        "bankitReportingMItem": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "bankitReportingMItemICGroup": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "bankitReporting1Item": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "bankitReportingEPItem": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "ebaSignalingSubAccount": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "bankitReportingMItemOld": {
                        "id": null,
                        "description": null,
                        "changeSign": false
                        },
                        "icIitemOld": {
                        "id": null,
                        "description": null,
                        "changeSign": false
```

```
}
}
},
"dataEntryAndReporting": {
"validity": {
"startDate": null,
"endDate": null
},
"class": "NONE",
"manageTransactionCurrency": true,
"icManagement": true,
"manageMaximumNumberDecimals": false
},
"documentationLink": null,
"rules": {
"grossAmountEqualICSum": false,
"accrual": {
"debitAccrual": {
"id": null,
"description": null
},
"creditAccrual": {
"id": null,
"description": null
}
},
"validationChecks": {
"standardSignCheck": "ANY",
"icCapacityCheck": "DO_NOT_CHECK",
"fxRatesCheck": null,
"icSignCheck": "DO_NOT_CHECK",
"notesCheck": "DO_NOT_CHECK"
}
},
"restrictions": {
"customDimension1": {
"dimensionName": "Cost Centers",
"restriction": "NONE"
},
"customDimension2": {
"dimensionName": "Products",
"restriction": "NONE"
},
"customDimension3": {
"dimensionName": "Customers en",
"restriction": "NONE"
},
"customDimension4": {
"dimensionName": "Employees",
"restriction": "NONE"
},
"customDimension5": {
"dimensionName": "Miscellaneous",
"restriction": "NONE"
},
"ctpRestriction": {
"id": null,
"description": null
}
},
"cashFlowPlanning": null,
"monthlySplittingRules": {
"monthlySplittingType": "NO",
```

```
"reference": null
},
"updateInfo": {
"user": "SUE",
"date": "2017-04-23T23:00:58.496+0000",
"origin": "INPUT_WEB"
}
}
```

Example of response


```
{
                                {
"id": "10010",
"descriptions": {
"en": "Cash in Bank Accounts",
"it": "Cash",
"es": null,
"fr": null
},
"alternativeDescriptions": {
"en": "Cash in Bank Accounts",
"it": "Cash",
"es": null,
"fr": null
},
"customAttributes": {
"test": null
},
"nature": "BALANCE_SHEET",
"type": "NORMAL",
"conversion": {
"conversionType": "FINAL",
"referenceAccountForInitialBalance": null
},
"consolidation": {
"rules": {
"useAccountForSetup": "FALSE",
"excludeFromProportionalCalculation": false
},
"bankingData": {
"bankitReportingMItem": {
"id": null,
"description": null,
"changeSign": false
},
"bankitReportingMItemICGroup": {
"id": null,
"description": null,
"changeSign": false
},
"bankitReporting1Item": {
"id": null,
"description": null,
"changeSign": false
},
"bankitReportingEPItem": {
"id": null,
"description": null,
"changeSign": false
},
"ebaSignalingSubAccount": {
"id": null,
"description": null,
"changeSign": false
},
"bankitReportingMItemOld": {
"id": null,
"description": null,
"changeSign": false
},
"icIitemOld": {
"id": null,
"description": null,
```

```
"changeSign": false
}
}
},
"dataEntryAndReporting": {
"validity": {
"startDate": null,
"endDate": null
},
"class": "NONE",
"manageTransactionCurrency": true,
"icManagement": true,
"manageMaximumNumberDecimals": false
},
"documentationLink": null,
"rules": {
"grossAmountEqualICSum": false,
"accrual": {
"debitAccrual": {
"id": null,
"description": null
},
"creditAccrual": {
"id": null,
"description": null
}
},
"validationChecks": {
"standardSignCheck": "ANY",
"icCapacityCheck": "DO_NOT_CHECK",
"fxRatesCheck": null,
"icSignCheck": "DO_NOT_CHECK",
"notesCheck": "DO_NOT_CHECK"
}
},
"restrictions": {
"customDimension1": {
"dimensionName": "Cost Centers",
"restriction": "NONE"
},
"customDimension2": {
"dimensionName": "Products",
"restriction": "NONE"
},
"customDimension3": {
"dimensionName": "Customers en",
"restriction": "NONE"
},
"customDimension4": {
"dimensionName": "Employees",
"restriction": "NONE"
},
"customDimension5": {
"dimensionName": "Miscellaneous",
"restriction": "NONE"
},
"ctpRestriction": {
"id": null,
"description": null
}
},
"cashFlowPlanning": null,
"monthlySplittingRules": {
```

	"monthlySplittingType": "NO",
	"reference": null
	},
	"updateInfo": {
	"user": "SUE",
	"date": "2017-04-23T23:00:58.496+0000",
	"origin": "INPUT_WEB"
	}
	}

Method	PATCH
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements/{id}

Body	{
	"id": "100",
	"alternativeDescriptions": {
	"en": "Cash in Bank Accounts",
	"it": "Cash in Bank Accounts",
	"es": "Cash in Bank Accounts",
	"fr": "Cash in Bank Accounts"
	},
	"customAttributes": {
	"test": "Prova"
	},
	"nature": "PROFIT_AND_LOSS",
	"type": "NORMAL",
	"conversion": {
	"conversionType": "PROFIT_AND_LOSS",
	"referenceAccountForInitialBalance": null
	},
	"dataEntryAndReporting": {
	"validity": {
	"startDate": "2025-09-10T00:00:00.000+0000",
	"endDate": "2025-09-12T00:00:00.000+0000"
	},
	"class": "NONE",
	"manageTransactionCurrency": true,
	"icManagement": false,
	"manageMaximumNumberDecimals": false
	},
	"documentationLink": "doc"
	}

Example of response


```
{
    "id": "100",
    "descriptions": {
        "en": "Cash1",
        "it": "CUS test1",
        "es": null,
        "fr": null
    },
    "alternativeDescriptions": {
        "en": "Cash in Bank Accounts",
        "it": "Cash in Bank Accounts",
        "es": "Cash in Bank Accounts",
        "fr": "Cash in Bank Accounts"
    },
    "customAttributes": {
        "test": "Prova"
    },
    "nature": "PROFIT_AND_LOSS",
    "type": "NORMAL",
    "conversion": {
        "conversionType": "PROFIT_AND_LOSS",
        "referenceAccountForInitialBalance": null
    },
    "consolidation": {
        "rules": {
            "useAccountForSetup": "FALSE",
            "excludeFromProportionalCalculation": false
        },
        "bankingData": {
            "bankitReportingMItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemICGroup": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReporting1Item": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingEPItem": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "ebaSignalingSubAccount": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "bankitReportingMItemOld": {
                "id": null,
                "description": null,
                "changeSign": false
            },
            "icIitemOld": {
                "id": null,
                "description": null,
                "changeSign": false
```

```
            }
        }
    },
    "dataEntryAndReporting": {
        "validity": {
            "startDate": "2025-09-10T00:00:00.000+0000",
            "endDate": "2025-09-12T00:00:00.000+0000"
        },
        "class": "NONE",
        "manageTransactionCurrency": true,
        "icManagement": false,
        "manageMaximumNumberDecimals": false
    },
    "documentationLink": "doc",
    "rules": {
        "grossAmountEqualICSum": false,
        "accrual": {
            "debitAccrual": {
                "id": "10046-0040",
                "description": "Property & Equipment - Acc. Depreciation-Changes due to
Mergers/Incorporations "
            },
            "creditAccrual": {
                "id": "10018",
                "description": "Cus test 8"
            }
        },
        "validationChecks": {
            "standardSignCheck": "ANY",
            "icCapacityCheck": "DO_NOT_CHECK",
            "fxRatesCheck": null,
            "icSignCheck": "DO_NOT_CHECK",
            "notesCheck": "CHECK_GROSS_AND_IC_AMOUNTS"
        }
    },
    "restrictions": {
        "customDimension1": {
            "dimensionName": "Cost Centers",
            "restriction": "RESTRICTED"
        },
        "customDimension2": {
            "dimensionName": "Products",
            "restriction": "NONE"
        },
        "customDimension3": {
            "dimensionName": "Customers en",
            "restriction": "NONE"
        },
        "customDimension4": {
            "dimensionName": "Employees",
            "restriction": "NONE"
        },
        "customDimension5": {
            "dimensionName": "Miscellaneous",
            "restriction": "NONE"
        },
        "ctpRestriction": {
            "id": null,
            "description": null
        }
    },
    "cashFlowPlanning": {
        "variation": {
```

```
            "debit": {
                "id": null,
                "description": null
            },
            "credit": {
                "id": null,
                "description": null
            }
        },
        "receivablePayable": {
            "debit": {
                "id": null,
                "description": null
            },
            "credit": {
                "id": null,
                "description": null
            }
        },
        "liquidity": {
            "debit": {
                "id": null,
                "description": null
            },
            "credit": {
                "id": null,
                "description": null
            }
        },
        "other": {
            "debit": {
                "id": null,
                "description": null
            },
            "credit": {
                "id": null,
                "description": null
            },
            "additionalCreditAccrualAccount": {
                "id": null,
                "description": null
            },
            "additionalDebitAccrualAccount": {
                "id": null,
                "description": null
            }
        },
        "revaluationDevaluation": {
            "enable": false,
            "debit": null,
            "credit": null
        }
    },
    "monthlySplittingRules": {
        "monthlySplittingType": "NO",
        "reference": null
    },
    "updateInfo": {
        "user": "USER_BS",
        "date": "2026-03-12T11:31:55.536+0000",
        "origin": "INPUT_WEB"
    }
}
```

Method	GET
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-async/{dataProcessingId}
Body	-
Example of response	[{ "requestDateTime": "2025-07-21T17:32:28.000Z", "status": "RUNNING", "parameters": [] }]

Method	DELETE
Endpoint	<api-root>/dimensions/v1/{dbID}/account/elements-bulk-delete-async/{dataProcessingId}
Body	-
Example of response	{ "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB" }

Analytical Workspace Management API

This API enables the extraction of information, creation, modification and deletion of the Tagetik application's Analytical Workspaces.

API Title:	AIH Analytical Workspace swagger openapi 3.0.3
Description:	API for Analytical Workspace management in the AIH database application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/datamodel/v1/{dbID}/workspaces

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	Analytical Workspaces			Analytical Workspaces	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Read	GET		Analytical Workspace ID		Analytical Workspaces	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Delete	DELETE		Analytical Workspace ID		Analytical Workspaces	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Replace	PUT	Analytical Workspaces	Analytical Workspace ID		Analytical Workspaces	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search	GET			filter sort skip take (optional parameters)	List of Analytical Workspaces	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Search Size	GET			filter sort skip take (optional parameters)	Quantity of Analytical Workspaces	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search Properties	GET			properties filter sort skip take (properties mandatory, other parameters optional)	List of Analytical Workspaces with only selected properties	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Update	PATCH	Analytical Workspaces	Analytical Workspace ID		Analytical Workspaces	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Bulk	POST	Workspace (s)			Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accepts the fields "id, descriptions.[language], online, version, updateInfo.user, updateInfo.date and updateInfo.origin"

"properties" accepts all response fields,as well as the "description" field showing the description in the default language of the DB.a (mandatory)

Supported Fields in Request

oid	-	string
descriptions.[lingua]	-	string (one mandatory)
dimensions	unlimited	string
online	-	true/false
database	-	string
distributedExecution	-	true/false

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

The 'dimension' field only accepts values that correspond to existing dimensions

The 'database' field only accepts values that correspond to existing databases

Additional Fields in Response

Analytical Workspace field	Supported Values
gdpr.checkResult	NOT_CHECKED, NOT_PROTECTED, INCORRECTLY_PROTECTED, ALL_PROTECTED
gdpr.checkResultDate	date
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB,

Examples of requests

List of all users

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces

Body	-
Example of response	


```
[
    {
        "id": "BXE",
        "oid": "ALGKYCEPHPESLCH",
        "dimensions": [],
        "online": true,
        "database": null,
        "gdpr": {
            "checkResult": "NOT_CHECKED",
            "checkResultDate": null
        },
        "distributedExecution": false,
        "updateInfo": {
            "user": "UTENTE2",
            "date": "2025-11-28T16:37:49.269+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "en": "AW Dataset",
            "it": null,
            "ja": null,
            "aa": null,
            "zh": null,
            "sq": null,
            "hy": null,
            "be": null,
            "ar": null,
            "am": null,
            "as": null
        }
    },
    {
        "id": "061",
        "oid": "MXYZPIFUFSDHUBU",
        "dimensions": [],
        "online": true,
        "database": null,
        "gdpr": {
            "checkResult": "NOT_CHECKED",
            "checkResultDate": null
        },
        "distributedExecution": false,
        "updateInfo": {
            "user": "UTENTEPROVA",
            "date": "2025-06-19T12:57:17.509+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "en": "DESC1",
            "it": "DESC2",
            "ja": null,
            "aa": null,
            "zh": null,
            "sq": null,
            "hy": null,
            "be": null,
            "ar": null,
            "am": null,
            "as": null
        }
    },
]
```

Show a specific Analytical Workspace

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/UUU
Body	-
Example of response	


```
{
    "id": "UUU",
    "oid": "SORXILAQRQKRKMQ",
    "dimensions": [],
    "online": true,
    "database": null,
    "gdpr": {
        "checkResult": "NOT_CHECKED",
        "checkResultDate": null
    },
    "distributedExecution": false,
    "updateInfo": {
        "user": "USER2",
        "date": "2026-01-15T15:18:20.792+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "it": "TEST",
        "en": "TEST",
        "ja": null,
        "aa": null,
        "zh": null
    }
}
```


Show the number of Analytical Workspaces

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces-count
Body	-
Example of response	


```
12
```


Show ids of all Analytical Workspaces

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces-fetch?properties:id
Body	-
Example of response	


```
[
    {
        "id": "UUU"
    },
    {
        "id": "UUV"
    },
    {
        "id": "UUX"
    }
]
```

Create a new Analytical Workspace

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces

Body	{
	"id": "UUU",
	"descriptions": {
	"it": "TEST2",
	"en": "TEST2"
	},
	"online": true
	}

Example of response	{
	"id": "UUU",
	"oid": "SORXILAQRQKRKMQ",
	"dimensions": [],
	"online": true,
	"database": null,
	"gdpr": {
	"checkResult": "NOT_CHECKED",
	"checkResultDate": null
	},
	"distributedExecution": false,
	"updateInfo": {
	"user": "USER2",
	"date": "2026-01-15T15:18:20.792+0000",
	"origin": "INPUT_WEB"
	},
	"descriptions": {
	"it": "TEST2",
	"en": "TEST2",
	"ja": null,
	"aa": null,
	"zh": null
	}
	}

Edit an Analytical Workspace

Method	PATCH
URL	/api/aih/datamodel/v1/{dbID}/workspaces/UUU

Body


```
{
    "id": "UUU",
    "descriptions": {
        "it": "TEST",
        "en": "TESTMODIF"
    },
    "distributedExecution": true
}
```


Example of response


```
{
    "id": "UUU",
    "oid": "SORXILAQRQKRKMQ",
    "dimensions": [],
    "online": true,
    "database": null,
    "gdpr": {
        "checkResult": "NOT_CHECKED",
        "checkResultDate": null
    },
    "distributedExecution": true,
    "updateInfo": {
        "user": "USER2",
        "date": "2026-01-15T15:18:20.792+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "it": "TEST",
        "en": "TESTMODIF",
        "ja": null,
        "aa": null,
        "zh": null
    }
}
```


Create an Analytical Workspace, edit another Analytical Workspace and delete another Analytical Workspace

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces-bulk

Body

```
{
    "saveMode": "LOOSE",
    "post": [
        {
            "id": "UUU",
            "descriptions": {
                "it": "CREA",
                "en": "CREATE"
            },
            "online": true
        }
    ],
    "patch": [
        {
            "key": {
                "id": "UUX"
            },
            "data": {
                "descriptions": {
                    "it": "MODIFICA",
                    "en": "EDIT"
                },
                "dimensions": [],
                "online": true,
                "distributedExecution": false
            }
        }
    ],
    "delete": [
        {
            "id": "UXV"
        }
    ]
}
```

Example of response

```
{
    "code": "SUCCESS"
}
```

Dataset Management API

Function

Handles basic functions related to Datasets

Filters

You can filter the result of each of the calls on this page using the following filters. Filters can be defined either with a close match (==) or with similarity (=like=). All these filters are OPTIONAL.

Source filter	Value
id	Code (ID_TABELLA) of Dataset
oid	Code (ID_OWS) of Dataset
online	True or False
distributedExecution	True or False
descriptions	Prefix of the language you wish to filter, followed by the value you wish to filter (ex.descriptions.en=like="ddd")
updateInfo.user	Modifier user code
updateInfo.origin	DB Modification Mode Code

Source filter	Value
userDataOnly	True or False
disableUserRightReadonlyCheck	True or False
disableSubmissionChecks	True or False
disableProcessConcistencyChecks	True or False
disableScenarioPeriodLockingChecks	True or False
dataUpdateMode	Determines how changes are stored after values have been changed. The available options are: • CREATE_NEW_RECORD • UPDATE_EXISTING_RECORD
partitionPolicy	The partitioning policy guides the logic for creating the physical tables (partitions) where the dataset data is stored. The available options are: • NOT_PARTITIONED - the dataset is not partitioned • BUSINESS_CYCLE - the dataset is broken down by business cycle • BUSINESS_CYCLE_AND_ENTITY - the dataset is partitioned by business cycle and entity
dtpProperties.datasetType	Specifies whether the dataset is used as the reference dataset in the dataflow. Immutable • DATASET • REFERENCE_TABLE • DEPLOY_REFERENCE_TABLE • ADVANCED_CONDITION_REFERENCE_TABLE • EXISTENCE_REFERENCE_TABLE
status	Dataset status • ONLINE - dataset is online • OFFLINE - dataset is offline • UPGRADE_IN_PROGRESS - the dataset is being updated. The dataset is locked
index.field	Index of the dataset (e.g. LABEL)
index.indexPosition	Index position (e.g. 0)
sort.field	Sorting of the dataset field (e.g. LABEL)
sort.sortPosition	Sort order (e.g.: 0)
sort.sortType	Dataset order type (e.g. ASC, DESC)

GET COUNT

URL

```
<api-root>/aih/datamodel/v1/<database_id>/workspaces/<workspaces_id>/dataset-count
```

Functions

- The API returns the number of Datasets in the database.

Request

The following parameters are allowed in the request

Classifier	Required	Value
DB_ID	Mandatory	ID of the database from which the data are to be extracted
workspaces_id	Mandatory	ID of the workspace from which the data are to be extracted
filters	Optional	The filters at the top of the page

Response

An integer that corresponds to the number of Datasets, with the required parameters, present in the database.

Dataset Fields Management API

This API enables the extraction of information, creation, modification and deletion of fields in a Tagetik application Dataset.

API title:	AIH Dataset swagger openapi 3.0.3
Description:	API for Dataset Fields Management in the AIH Database Application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/{datasetID}/fields

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	Dataset Field			Dataset Field	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Read	GET		Dataset Field ID		Dataset Field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Delete	DELETE		Dataset Field ID		Dataset Field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Replace	PUT	Dataset Field	Dataset Field ID		Dataset Field	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search	GET			filter sort skip take (optional parameters)	List of Dataset Fields	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search Size	GET			filter sort skip take (optional parameters)	Quantity of Dataset Fields	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Update	PATCH	Dataset Field	Dataset Field ID		Dataset Field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Bulk	POST	Dataset Field(s)			Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accetta i campi "id, descriptions.[language], fieldType, formatType, personalDataProtection, encoded, timeDimensionRollup, conversionType, dimensionType, hierarchyId, values.dictionary.id, mandatory, key, editability, referenceType, updateInfo.user, updateInfo.date and updateInfo.origin

Supported Fields in Request

Dataset Field	Supported cardinality	Supported Values
id	-	string (mandatory)
oid	-	string
descriptions.[lingua]	-	string (one mandatory)

Dataset Field	Supported cardinality	Supported Values
fieldType	-	TEXT_MEASURE, NUMBER_MEASURE, DATE_MEASURE, COMMENTS_AND_ATTACHMENTS_MEASURE, LEAF_DIMENSION, HIERARCHY_NODE_DIMENSION, HIERARCHY_LEVEL_DIMENSION (mandatory)
position	-	integer
mandatory	-	true/false
key	-	true/false
editable	-	EDITABLE, EDITABLE_ONLY_ON_NEW_ROWS, READ_ONLY
referenceType	-	ATTRIBUTE, CONDITION, LEVEL, FILTER
sortPosition	-	string
sortType	-	string
values.dictionary.id	-	string
values.dictionary.queryCodeField	-	string
values.dictionary.queryDescriptionField		string
values.dictionary.outOfDictionaryAllowed	-	string
values.displayMode	-	CODE, DESCRIPTION, CODE_AND_DESCRIPTIO
dimensionType	-	string
hierarchyId	-	string

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

The 'index' and 'sort' fields only accept values corresponding to fields in the dataset itself

The 'values.dictionary.id' field only accepts values that correspond to Dictionaries existing in the AW

Additional Fields in Response

Dataset Field	Supported Values
status	IDLE, IN_USE, OFFLINE, OFFLINE_IN_PROGRESS, UPDATING, VERSION_UPGRADING, INCONSISTENT
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB

Examples of requests

Show list of all Fields in a Dataset

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/123459/fields

Body -

Example of response


```
[
    {
        "id": "AAAAA",
        "oid": "IVQFZGZDRRVVVIK",
        "fieldType": "TEXT_MEASURE",
        "values": {
            "dictionary": {
                "id": null,
                "queryCodeField": null,
                "queryDescriptionField": null,
                "outOfDictionaryAllowed": false
            },
            "displayMode": "CODE"
        },
        "mandatory": false,
        "key": false,
        "position": 36,
        "editability": "EDITABLE",
        "referenceType": null,
        "sortType": "ASC",
        "sortPosition": null,
        "updateInfo": {
            "user": "USER1",
            "date": "2025-10-28T15:52:14.563+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "it": "AAAA",
            "en": null,
            "ja": null,
            "aa": null
        },
        "formatType": "PLAIN",
        "personalDataProtection": false,
        "encoded": false,
        "length": 255,
        "defaultValue": null,
        "maxDictMultiselectable": null
    },
    {
        "id": "DIMENSION",
        "oid": "SLJMNDXDZJFBFSQ",
        "fieldType": "LEAF_DIMENSION",
        "values": {
            "dictionary": {
                "id": null,
                "queryCodeField": null,
                "queryDescriptionField": null,
                "outOfDictionaryAllowed": false
            },
            "displayMode": "CODE"
        },
        "mandatory": false,
        "key": false,
        "position": 31,
        "editability": "EDITABLE",
        "referenceType": null,
        "sortType": "DESC",
        "sortPosition": "10",
        "updateInfo": {
            "user": "USER1",
            "date": "2025-08-28T13:18:21.761+0000",
            "origin": "INPUT_WEB"
```

```
        },
        "descriptions": {
            "it": "ADDEL",
            "en": "ADDEL",
            "ja": null,
            "aa": null
        },
        "dimensionType": "ADDEL"
    }
]
```


Show a specific Field in a Dataset

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/123459/fields/AAAAA
Body	-
Example of response	


```
{
        "id": "AAAAA",
        "oid": "IVQFZGZDRRVVVIK",
        "fieldType": "TEXT_MEASURE",
        "values": {
            "dictionary": {
                "id": null,
                "queryCodeField": null,
                "queryDescriptionField": null,
                "outOfDictionaryAllowed": false
            },
            "displayMode": "CODE"
        },
        "mandatory": false,
        "key": false,
        "position": 36,
        "editability": "EDITABLE",
        "referenceType": null,
        "sortType": "ASC",
        "sortPosition": null,
        "updateInfo": {
            "user": "USER1",
            "date": "2025-10-28T15:52:14.563+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "it": "AAAA",
            "en": null,
            "ja": null,
            "aa": null
        },
        "formatType": "PLAIN",
        "personalDataProtection": false,
        "encoded": false,
        "length": 255,
        "defaultValue": null,
        "maxDictMultiselectable": null
    }
```

Show the number of fields

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/123459/fields-count
Body	-
Example of response	12

Create a new Field

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/123459/fields

Body


```
{
    "id": "TESTF",
    "descriptions": {
        "it": "RFTEST-it",
        "en": "RFTEST-en"
    },
    "fieldType": "TEXT_MEASURE",
    "position": 0,
    "sortType": "ASC",
    "sortPosition": "1"
}
```


Example of response


```
{
    "id": "TESTF",
    "oid": "MDQXDUARCMZIYBX",
    "fieldType": "TEXT_MEASURE",
    "values": {
        "dictionary": {
            "id": null,
            "queryCodeField": null,
            "queryDescriptionField": null,
            "outOfDictionaryAllowed": false
        },
        "displayMode": null
    },
    "mandatory": false,
    "key": false,
    "position": 0,
    "editability": "EDITABLE",
    "referenceType": null,
    "sortType": "ASC",
    "sortPosition": "1",
    "updateInfo": {
        "user": "USERT",
        "date": "2026-01-16T16:22:30.339+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "en": "CREATED",
        "it": "CREATO",
        "ja": null,
        "aa": null
    },
    "formatType": "PLAIN",
    "personalDataProtection": false,
    "encoded": false,
    "length": 255,
    "defaultValue": null,
    "maxDictMultiselectable": null
}
```


Edit a Field

Method	PATCH
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/123459/fields/TESTF

Body


```
{
    "id": "TESTF",
    "descriptions": {
        "it": "MODIFIED",
        "en": "MODIFICATO"
    },
    "position": 0,
    "sortType": "ASC",
    "sortPosition": "1"
}
```


Example of response


```
{
    "id": "TESTF",
    "oid": "MDQXDUARCMZIYBX",
    "fieldType": "TEXT_MEASURE",
    "values": {
        "dictionary": {
            "id": null,
            "queryCodeField": null,
            "queryDescriptionField": null,
            "outOfDictionaryAllowed": false
        },
        "displayMode": null
    },
    "mandatory": false,
    "key": false,
    "position": 0,
    "editability": "EDITABLE",
    "referenceType": null,
    "sortType": "ASC",
    "sortPosition": "1",
    "updateInfo": {
        "user": "USERT",
        "date": "2026-01-16T16:22:30.339+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "en": "MODIFIED",
        "it": "MODIFICATO",
        "ja": null,
        "aa": null
    },
    "formatType": "PLAIN",
    "personalDataProtection": false,
    "encoded": false,
    "length": 255,
    "defaultValue": null,
    "maxDictMultiselectable": null
}
```


Create a Field, edit another Field and delete another Field

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/123459/fields-bulk

Body


```
{
    "saveMode": "LOOSE",
    "post": [
        {
            "id": "DFIELD4",
            "descriptions": {
                "it": "Dataset Field post created",
                "en": "Field Dataset post created"
            },
            "fieldType": "TEXT_MEASURE"
        },
        {
            "id": "DFIELD5",
            "descriptions": {
                "it": "Dataset Field post created",
                "en": "Field Dataset post created"
            },
            "fieldType": "TEXT_MEASURE"
        }
    ],
    "patch": [
        {
            "key": {
                "id": "DFIELD1"
            },
            "data": {
                "descriptions": {
                    "it": "UpdatePatchBulk",
                    "en": "PatchUpdateBulk"
                },
                "fieldType": "TEXT_MEASURE"
            }
        }
    ],
    "delete": [
        {
            "id": "DFIELD6"
        }
    ]
}
```


Example of response


```
{
    "code": "SUCCESS"
}
```


Datasource Management API

This API enables the extraction of information, creation, modification and deletion of Tagetik application's Datasources.

API title:	AIH Datasources swagger openapi 3.0.3
Description:	Datasource management API in AIH database application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	Datasource			Datasource	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Read	GET		ID Datasource		Datasource	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Delete	DELETE		ID Datasource		Datasource	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Replace	PUT	Dictionary	ID Datasource		Datasource	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search	GET			filter sort skip take (optional parameters)	List of Datasources	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Search Size	GET			filter sort skip take (optional parameters)	Quantity of Datasources	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Update	PATCH	Datasource	ID Datasource		Datasource	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Bulk	POST	Datasource (s)			Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accepts the fields "id, descriptions.[language], updateInfo.user, updateInfo.date and updateInfo.origin"

Supported Fields in Request

Datasource field	Supported cardinality	Supported Values
id	-	string (mandatory)
oid	-	string
descriptions.[lingua]	-	string (one mandatory)
customQuery.oracle	-	string
customQuery.sqlServer	-	string
customQuery.hana	-	string
customQuery.postgres	-	string
customQuery.others	-	string
sort	unlimited	string tuples
sort.field	-	string
sort.sortPosition	-	integer
sort.sortIndex	-	ASC, DESC
connection	-	string

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Additional Fields in Response

Datasource field	Supported Values
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB

Examples of requests

Shows the list of all Datasources

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources

Body	-

Example of response


```
[
    {
        "id": "133123",
        "oid": "OFWBDBIRCSYXLVC",
        "sort": [],
        "customQuery": {
            "sqlServer": null,
            "hana": null,
            "postgres": "select id_ows from ows",
            "others": null,
            "oracle": null
        },
        "connection": "Current",
        "updateInfo": {
            "user": "USERT",
            "date": "2026-01-20T15:01:54.875+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "it": "123123-it",
            "en": "123123-en",
            "ja": null,
            "aa": null,
            "zh": null
        }
    },
    {
        "id": "133125",
        "oid": "YHIZSQGRMUZTHSH",
        "sort": [],
        "customQuery": {
            "sqlServer": null,
            "hana": null,
            "postgres": "select id_ows from ows",
            "others": null,
            "oracle": null
        },
        "connection": "Current",
        "updateInfo": {
            "user": "USERT",
            "date": "2026-01-20T15:01:56.608+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "it": "123125-it",
            "en": "123125-en",
            "ja": null,
            "aa": null,
            "zh": null
        }
    }
]
```


Shows a specific Datasource

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/123123

Body	-

Example of response	{
	"id": "123123",
	"oid": "OWHYWGRCDKWSAUY",
	"sort": [],
	"customQuery": {
	"sqlServer": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2 FROM AZIENDA",
	"hana": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2 FROM AZIENDA",
	"postgres": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2 FROM AZIENDA",
	"others": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2 FROM AZIENDA",
	"oracle": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2 FROM AZIENDA"
	},
	"connection": "Current",
	"updateInfo": {
	"user": "USERT",
	"date": "2026-01-20T13:51:46.908+0000",
	"origin": "INPUT_WEB"
	},
	"descriptions": {
	"en": "Update Test of Datasource",
	"it": "Aggiornamento Test di Datasource",
	"ja": null,
	"aa": null,
	"zh": null,
	"sq": null,
	"hy": null,
	"be": null,
	"ar": null,
	"am": null,
	"as": null
	}
	}

Show the number of Datasources

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources-count
Body	-
Example of response	12

Creates a new Datasource

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources

Body


```
{
    "id": "123123",
    "descriptions": {
        "it": "Aggiornamento Test di Datasource",
        "en": "Update Test of Datasource"
    },
    "customQuery": {
        "sqlServer": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA
as AZ2 FROM AZIENDA",
        "hana": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA",
        "postgres": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA
as AZ2 FROM AZIENDA",
        "others": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA",
        "oracle": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA"
    },
    "connection": "Current"
}
```


Example of response


```
{
    "id": "123123",
    "oid": "OWHYWGRCDKWSAUY",
    "sort": [],
    "customQuery": {
        "sqlServer": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA
as AZ2 FROM AZIENDA",
        "hana": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA",
        "postgres": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA
as AZ2 FROM AZIENDA",
        "others": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA",
        "oracle": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA"
    },
    "connection": "Current",
    "updateInfo": {
        "user": "USERT",
        "date": "2026-01-20T13:51:46.908+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "en": "Update Test of Datasource",
        "it": "Aggiornamento Test di Datasource",
        "ja": null,
        "aa": null,
        "zh": null,
        "sq": null,
        "hy": null,
        "be": null,
        "ar": null,
        "am": null,
        "as": null
    }
}
```

Modifies a Datasource

Method	PATCH
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/SQL
Body	

```
{
    "id": "123123",
    "descriptions": {
        "it": "Modificato",
        "en": "Modified"
    },
    "customQuery": {
        "sqlServer": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA",
        "hana": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2
FROM AZIENDA",
        "postgres": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2
FROM AZIENDA",
        "others": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2
FROM AZIENDA",
        "oracle": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2
FROM AZIENDA"
    },
    "connection": "Current"
}
```

Example of response

```
{
    "id": "123123",
    "oid": "OWHYWGRCDKWSAUR",
    "sort": [],
    "customQuery": {
        "sqlServer": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA",
        "hana": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2
FROM AZIENDA",
        "postgres": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2
FROM AZIENDA",
        "others": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2
FROM AZIENDA",
        "oracle": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as AZ2
FROM AZIENDA"
    },
    "connection": "Current",
    "updateInfo": {
        "user": "USERT",
        "date": "2026-01-20T13:51:46.908+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "en": "Modified",
        "it": "Modificato",
        "ja": null,
        "aa": null,
        "zh": null,
        "sq": null,
        "hy": null,
        "be": null,
        "ar": null,
        "am": null,
        "as": null
    }
}
```

Create a Datasource, edit another Datasource and delete another Datasource

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources-bulk
Body	

```
{
    "saveMode": "LOOSE",
    "post": [
        {
            "id": "100012",
            "descriptions": {
                "en": "bulk-post-en",
                "it": "bulk-post-it"
            },
            "customQuery": {
                "sqlServer": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_
AZIENDA as AZ2 FROM AZIENDA",
                "hana": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA as
AZ2 FROM AZIENDA",
                "postgres": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA
as AZ2 FROM AZIENDA",
                "others": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA
as AZ2 FROM AZIENDA",
                "oracle": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA
as AZ2 FROM AZIENDA"
            },
            "connection": "Current"
        }
    ],
    "patch": [
        {
            "key": {
                "id": "EXISTS"
            },
            "data": {
                "sort": [],
                "descriptions": {
                    "it": "EXISTS-it-patch-updated",
                    "en": "EXISTS-en-patch-updated"
                },
                "customQuery": {
                    "sqlServer": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_
AZIENDA as AZ2 FROM AZIENDA",
                    "hana": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_AZIENDA
as AZ2 FROM AZIENDA",
                    "postgres": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_
AZIENDA as AZ2 FROM AZIENDA",
                    "others": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_
AZIENDA as AZ2 FROM AZIENDA",
                    "oracle": "SELECT COD_AZIENDA as AZ3, COD_AZIENDA as AZ1, COD_
AZIENDA as AZ2 FROM AZIENDA"
                },
                "connection": "Current"
            }
        }
    ],
    "delete": [
        {
            "id": "EXIST1"
        }
    ]
}
```

Example of response

```
{
    "code": "SUCCESS"
}
```

Virtual Dataset Management API

This API enables the extraction of information, creation, modification and deletion of Tagetik application's Virtual Datasets.

API title:	AIH Virtual Dataset swagger openapi 3.0.3
Description:	API for Virtual Dataset Management in the AIH database application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	Virtual Dataset			Virtual Dataset	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Read	GET		Virtual Dataset ID		Virtual Dataset	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Delete	DELETE		Virtual Dataset ID		Virtual Dataset	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Replace	PUT	Virtual Dataset	Virtual Dataset ID		Virtual Dataset	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search	GET			filter sort skip take (optional parameters)	List of Virtual Datasets	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search Size	GET			filter sort skip take (optional parameters)	Quantity of Virtual Datasets	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Update	PATCH	Virtual Dataset	Virtual Dataset ID		Virtual Dataset	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Bulk	POST	Virtual Dataset (s)			Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)


"filter" accepts the fields "id and descriptions.[language]"

Supported Fields in Request

Virtual Dataset field	Supported cardinality	Supported Values
id	-	string (mandatory)
oid	-	string
descriptions.[lingua]	-	string (one mandatory)
sort.field	-	string
sort.sortPositions	-	string
sort.sortType	-	ASC, DESC
relationships.order	-	integer
relationships.leftDataset.id	-	string
relationships.leftDataset.inculdeAllFields	-	true/false
relationships.leftDataset.id	-	string
relationships.leftDataset.inculdeAllFields	-	true/false
joinFields.leftField	-	string
joinFields.rightField	-	string

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Additional Fields in Response

Virtual Dataset field	Supported Values
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB

Examples of requests

Show list of all Virtual Datasets

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets
Body	-

Example of response


```
[
    {
        "id": "000007",
        "oid": "IHGJBNPVEYXPZAV",
        "sort": [
            {
                "field": "INTERNAL",
                "sortPosition": "20",
                "sortType": "ASC"
            },
            {
                "field": "TEXT",
                "sortPosition": "10",
                "sortType": "ASC"
            }
        ],
        "relationships": [
            {
                "order": 14,
                "leftDataset": {
                    "id": "345678",
                    "includeAllFields": false
                },
                "rightDataset": {
                    "id": "000008",
                    "includeAllFields": false
                },
                "joinFields": [
                    {
                        "leftField": "ANDIM",
                        "rightField": "CC"
                    },
                    {
                        "leftField": "DIMSW",
                        "rightField": "CC"
                    }
                ]
            }
        ],
        "updateInfo": {
            "user": "USERT",
            "date": "2025-10-28T16:11:32.762+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "it": "VirtualDataset1",
            "en": "VirtualDataset1",
            "ja": "VirtualDataset1",
            "aa": "VirtualDataset1",
            "zh": "VirtualDataset1"
        }
    },
    {
        "id": "000009",
        "oid": "RTGWVGDKWFZZLXW",
        "sort": [],
        "relationships": [
            {
                "order": 13,
                "leftDataset": {
                    "id": "000008",
                    "includeAllFields": false
                },
```

```
                "rightDataset": {
                    "id": "000006",
                    "includeAllFields": false
                },
                "joinFields": [
                    {
                        "leftField": "CC",
                        "rightField": "ENT"
                    }
                ]
            }
        ],
        "updateInfo": {
            "user": "USERT",
            "date": "2024-10-29T15:23:24.991+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "it": "VirtualDatase2",
            "en": "VirtualDatase2",
            "ja": null,
            "aa": null,
            "zh": null
        }
    }
]
```


Shows a specific Virtual Dataset

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/123459
Body	-

Example of response


```
{
    "id": "123459",
    "oid": "IHGJBNVJEYXPZAV",
    "sort": [
        {
            "field": "INTERNAL",
            "sortPosition": "20",
            "sortType": "ASC"
        },
        {
            "field": "TEXT",
            "sortPosition": "10",
            "sortType": "ASC"
        }
    ],
    "relationships": [
        {
            "order": 14,
            "leftDataset": {
                "id": "345678",
                "includeAllFields": false
            },
            "rightDataset": {
                "id": "000008",
                "includeAllFields": false
            },
            "joinFields": [
                {
                    "leftField": "ANDIM",
                    "rightField": "CC"
                },
                {
                    "leftField": "DIMSW",
                    "rightField": "CC"
                }
            ]
        }
    ],
    "updateInfo": {
        "user": "USERT",
        "date": "2025-10-28T16:11:32.762+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "it": "VirtualDataset1",
        "en": "VirtualDataset1",
        "ja": "VirtualDataset1",
        "aa": "VirtualDataset1",
        "zh": "VirtualDataset1"
    }
}
```


Show the number of Virtual Datasets

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets-count
Body	-
Example of response	12

Create a new Virtual Dataset

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets

Body	{
	"id": "00001A",
	"oid": "XYH6HH99RHHV1234",
	"descriptions": {
	"en": "Virtual Dataset",
	"it": "Dataset Virtuale"
	},
	"relationships": [
	{
	"order": 0,
	"leftDataset": {
	"id": "345678",
	"includeAllFields": false
	},
	"rightDataset": {
	"id": "000008",
	"includeAllFields": false
	},
	"joinFields": [
	{
	"leftField": "ANDIM",
	"rightField": "CC"
	}
	]
	}
	]
	}

Example of response


```
{
    "id": "00001A",
    "oid": "XYH6HH99RHHV1234",
    "sort": [],
    "relationships": [
        {
            "order": 0,
            "leftDataset": {
                "id": "345678",
                "includeAllFields": false
            },
            "rightDataset": {
                "id": "000008",
                "includeAllFields": false
            },
            "joinFields": [
                {
                    "leftField": "ANDIM",
                    "rightField": "CC"
                }
            ]
        }
    ],
    "updateInfo": {
        "user": "USERT",
        "date": "2026-01-19T13:55:08.861+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "it": "Dataset Virtuale Normale",
        "en": "Normal Virtual Dataset",
        "ja": null,
        "aa": null,
        "zh": null
    }
}
```


Edit a Virtual Dataset

Method	PATCH
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/00001A

Body


```
{
  "id": "00001A",
  "oid": "XYH6HH99RHHV1234",
  "descriptions": {
    "en": "Modified Virtual Dataset",
    "it": "Dataset Virtuale Modificato"
  },
  "relationships": [
    {
      "order": 0,
      "leftDataset": {
        "id": "345678",
        "includeAllFields": false
      },
      "rightDataset": {
        "id": "000008",
        "includeAllFields": false
      },
      "joinFields": [
        {
          "leftField": "ANDIM",
          "rightField": "CC"
        }
      ]
    }
  ]
}
```


Example of response


```
{
    "id": "00001A",
    "oid": "XYH6HH99RHHV1234",
    "sort": [],
    "relationships": [
        {
            "order": 0,
            "leftDataset": {
                "id": "345678",
                "includeAllFields": false
            },
            "rightDataset": {
                "id": "000008",
                "includeAllFields": false
            },
            "joinFields": [
                {
                    "leftField": "ANDIM",
                    "rightField": "CC"
                }
            ]
        }
    ],
    "updateInfo": {
        "user": "USERT",
        "date": "2026-01-19T13:55:08.861+0000",
        "origin": "INPUT_WEB"
    },
    "descriptions": {
        "it": "Dataset Virtuale Modificato",
        "en": "Modified Virtual Dataset",
        "ja": null,
        "aa": null,
        "zh": null
    }
}
```

Create a Virtual Dataset, edit another Virtual Dataset and delete another Virtual Dataset

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets-bulk

Body


```
{
    "saveMode": "LOOSE",
    "post": [
        {
            "id": "POSTBU",
            "oid": "UYH6HH199HHG1234",
            "descriptions": {
                "en": "Post Bulk",
                "it": "Bulk Post"
            },
            "sort": [],
            "relationships": [
                {
                    "order": 0,
                    "leftDataset": {
                        "id": "345678",
                        "includeAllFields": false
                    },
                    "rightDataset": {
                        "id": "000008",
                        "includeAllFields": false
                    },
                    "joinFields": [
                        {
                            "leftField": "ANDIM",
                            "rightField": "CC"
                        },
                        {
                            "leftField": "DIMSW",
                            "rightField": "CC"
                        }
                    ]
                },
                {
                    "order": 2,
                    "leftDataset": {
                        "id": "345678",
                        "includeAllFields": false
                    },
                    "rightDataset": {
                        "id": "000006",
                        "includeAllFields": false
                    },
                    "joinFields": [
                        {
                            "leftField": "ANDIM",
                            "rightField": "ENT"
                        },
                        {
                            "leftField": "DIMSW",
                            "rightField": "ENT"
                        }
                    ]
                }
            ]
        }
    ],
    "patch": [
        {
            "key": {
                "id": "PATCHB"
            },
            "data": {
```

```
                "descriptions": {
                    "en": "Patch Bulk",
                    "it": "Bulk Patch"
                },
                "sort": [
                    {
                        "field": "NUMB",
                        "sortPosition": "20",
                        "sortType": "ASC"
                    },
                    {
                        "field": "ENT",
                        "sortPosition": "10",
                        "sortType": "ASC"
                    }
                ],
                "relationships": [
                    {
                        "order": 0,
                        "leftDataset": {
                            "id": "345678",
                            "includeAllFields": false
                        },
                        "rightDataset": {
                            "id": "000008",
                            "includeAllFields": false
                        },
                        "joinFields": [
                            {
                                "leftField": "ANDIM",
                                "rightField": "CC"
                            },
                            {
                                "leftField": "DIMSW",
                                "rightField": "CC"
                            }
                        ]
                    },
                    {
                        "order": 2,
                        "leftDataset": {
                            "id": "345678",
                            "includeAllFields": false
                        },
                        "rightDataset": {
                            "id": "000006",
                            "includeAllFields": false
                        },
                        "joinFields": [
                            {
                                "leftField": "ANDIM",
                                "rightField": "ENT"
                            },
                            {
                                "leftField": "DIMSW",
                                "rightField": "ENT"
                            }
                        ]
                    }
                ]
            }
        }
    ],
```

	<pre>"delete": [
	{
	"id": "DELETB"
	}
	]
	}</pre>

Example of response	<pre>{ "code": "SUCCESS" }</pre>

Virtual Dataset Field Management API

This API enables the extraction of information, creation, modification and deletion of fields in the Virtual Datasets of the Tagetik application.

API title:	AIH Virtual Dataset Fields swagger openapi 3.0.3
Description:	API for managing Virtual Dataset fields in the AIH database application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/{virtualdatasetID}/fields

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	Virtual Dataset field			Virtual Dataset field	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Read	GET		Virtual Dataset Field ID		Virtual Dataset field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Delete	DELETE		Virtual Dataset Field ID		Virtual Dataset field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Replace	PUT	Virtual Dataset field	Virtual Dataset Field ID		Virtual Dataset field	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search	GET			filter sort skip take (optional parameters)	List of Virtual Dataset Fields	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search Size	GET			filter sort skip take (optional parameters)	Quantity of Virtual Dataset Fields	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Update	PATCH	Virtual Dataset field	Virtual Dataset Field ID		Virtual Dataset field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Bulk	POST	Virtual Dataset Field(s)			Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accepts the fields "id, descriptions.[language], updateInfo.user, updateInfo.date and updateInfo.origin"

Supported Fields in Request

Virtual Dataset field	Supported cardinality	Supported Values
id	-	string (mandatory)
oid	-	string
descriptions.[lingua]	-	string (one mandatory)
fieldType	-	FORMULA, DATASET_FIELD (mandatory)
formula	-	string (mandatory for fieldType=formula)
sortType	-	ASC, DESC
sortPosition	-	integer
sourceField.id	-	string
sourceField.sourceDataset.id	-	string

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Additional Fields in Response

Virtual Dataset field	Supported Values
values.dictionary.id	string
values.dictionary.queryCodeField	string
values.dictionary.queryDescriptionField	string
values.dictionary.outOfDictionaryAllowed	true/false
values.dictionary.displayMode	CODE, DESCRIPTION, CODE_AND_DESCRIPTION
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB

Examples of requests

Show list of all Virtual Datasets

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/{virtualdatasetID}/fields
Body	-

Example of response


```
[
    {
        "sortType": null,
        "sortPosition": null,
        "id": "ANDIM",
        "oid": "CGFJAHKFSYFTGLI",
        "descriptions": {
            "it": "Andim",
            "en": "Andim",
            "ja": null,
            "aa": null
        },
        "fieldType": "DATASET_FIELD",
        "updateInfo": {
            "user": "USERT",
            "date": "2024-12-18T16:45:28.900+0000",
            "origin": "INPUT_WEB"
        },
        "sourceField": {
            "id": "ANDIM",
            "sourceDataset": {
                "id": "345678"
            }
        },
        "values": {
            "dictionary": {
                "id": null,
                "queryCodeField": null,
                "queryDescriptionField": null,
                "outOfDictionaryAllowed": false
            },
            "displayMode": "CODE"
        }
    },
    {
        "sortType": null,
        "sortPosition": null,
        "id": "DAT",
        "oid": "KFJBQSDVUYKEFKO",
        "descriptions": {
            "it": "FORMULA",
            "en": "FORMULA",
            "ja": null,
            "aa": null
        },
        "fieldType": "FORMULA",
        "updateInfo": {
            "user": "USERT",
            "date": "2024-12-18T16:51:26.407+0000",
            "origin": "INPUT_WEB"
        },
        "formula": ".",
        "timeDimensionRollup": "LAST",
        "conversionType": "PERIOD_AVERAGE"
    }
]
```


Shows a specific Virtual Dataset

Method	GET

URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/{virtualdatasetID}/fields/FIELD
Body	-
Example of response	{ "sortType": "ASC", "sortPosition": "20", "id": "FIELD", "oid": "NLOLREXNRMACLOK", "descriptions": { "it": "Internal Field", "en": "Campo Interno", "ja": "Campo Interno", "aa": "Campo Interno" }, "fieldType": "FORMULA", "updateInfo": { "user": "USERT", "date": "2025-10-28T16:11:32.762+0000", "origin": "INPUT_WEB" }, "formula": ".", "timeDimensionRollup": "LAST", "conversionType": "FINAL" }

Show the number of Virtual Datasets

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/{virtualdatasetID}/fields-count
Body	-
Example of response	12

Create a new Virtual Dataset

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/{virtualdatasetID}/fields
Body	{ "id": "FIEL", "oid": "DXKZFNPRJJABH01", "descriptions": { "it": "Campo", "en": "Field" }, "fieldType": "DATASET_FIELD", "sourceField": { "id": "FIEL", "sourceDataset": { "id": "345608" } } }

Example of response	{
	"sortType": null,
	"sortPosition": null,
	"id": "FIEL",
	"oid": "DXKZFNPRJJABH01",
	"descriptions": {
	"it": "Campo",
	"en": "Field",
	"ja": null,
	"aa": null
	},
	"fieldType": "DATASET_FIELD",
	"updateInfo": {
	"user": "USERT",
	"date": "2026-01-19T14:58:21.539+0000",
	"origin": "INPUT_WEB"
	},
	"sourceField": {
	"id": "FIEL",
	"sourceDataset": {
	"id": "345608"
	}
	},
	"values": {
	"dictionary": {
	"id": null,
	"queryCodeField": null,
	"queryDescriptionField": null,
	"outOfDictionaryAllowed": false
	},
	"displayMode": "CODE"
	}
	}

Edit a Virtual Dataset

Method	PATCH
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/{virtualdatasetID}/fields/FIEL

Body	{
	"id": "FIEL",
	"descriptions": {
	"it": "Campo Modificato",
	"en": "Edited Field"
	},
	"fieldType": "DATASET_FIELD",
	"sourceField": {
	"id": "FIEL",
	"sourceDataset": {
	"id": "345608"
	}
	}
	}

Example of response	{
	"sortType": null,
	"sortPosition": null,
	"id": "FIEL",
	"oid": "DXKZFNPRJJABH01",
	"descriptions": {
	"it": "Campo",
	"en": "Field",
	"ja": null,
	"aa": null
	},
	"fieldType": "DATASET_FIELD",
	"updateInfo": {
	"user": "USERT",
	"date": "2026-01-19T14:58:21.539+0000",
	"origin": "INPUT_WEB"
	},
	"sourceField": {
	"id": "FIEL",
	"sourceDataset": {
	"id": "345608"
	}
	},
	"values": {
	"dictionary": {
	"id": null,
	"queryCodeField": null,
	"queryDescriptionField": null,
	"outOfDictionaryAllowed": false
	},
	"displayMode": "CODE"
	}
	}

Create a Virtual Dataset, edit another Virtual Dataset and delete another Virtual Dataset

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/virtualdatasets/{virtualdatasetID}/fields-bulk

Body	{
	"saveMode": "LOOSE",
	"post": [
	{
	"id": "POSTBU",
	"descriptions": {
	"en": "Post Bulk",
	"it": "Bulk Post"
	},
	"fieldType": "DATASET_FIELD",
	"sourceField": {
	"id": "ENT",
	"sourceDataset": {
	"id": "345678"
	}
	}
	}
	],
	"patch": [
	{
	"key": {
	"id": "PATCHB"
	},
	"data": {
	"descriptions": {
	"en": "Patch Bulk",
	"it": "Bulk Patch"
	},
	"fieldType": "DATASET_FIELD",
	"sourceField": {
	"id": "READONLY",
	"sourceDataset": {
	"id": "345678"
	}
	}
	}
	}
	],
	"delete": [
	{
	"id": "DELETB"
	}
	]
	}

Example of response	{
	"code": "SUCCESS"
	}

Partition Management API

This API enables the extraction of information, creation and deletion of Partitions from a Tagetik application Dataset.

API title:	AIH Dataset swagger openapi 3.0.3
Description:	API for Partition Management in the AIH database application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth

Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/{datasetID}/partitions

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	Dataset Partition			Dataset Partition	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Read	GET		Dataset Partition ID		Dataset Partition	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Search	GET			filter sort skip take (optional parameters)	List of Dataset Partitions	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Search Size	GET			filter sort skip take (optional parameters)	Quantity of Dataset Partitions	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Bulk-Delete-Async	POST	Partition ID (s) Dataset			ID Data Processing	202 (Accepted)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter' accepts the fields 'id, process.id, process.description, scenario.id, scenario.description, period.id, period.description, entity.id, entity.description, typology.id, typology.description and status'.

Supported Fields in Request

Partition Field	Supported cardinality	Supported Values
process.id	-	string
scenario.id	-	string
period.id	-	string
entity.id	-	string
typology.id	-	string

Additional Fields in Response

Partition Field	Supported Values
process.description	string
scenario.description	string
period.description	string
entity.description	string
typology.description	string
status	ONLINE, OFFLINE, UPGRADE_IN_PROGRESS
id	string
physicalTableName	string

Examples of requests

Show the list of all Partitions in a Dataset

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/000001/partitions
Body	-

Example of response


```
[
    {
        "id": "000001",
        "physicalTableName": "AW_EFG_P00003_000001",
        "status": "ONLINE",
        "process": {
            "id": "BDG",
            "description": "BDG"
        },
        "scenario": {
            "id": "$",
            "description": null
        },
        "period": {
            "id": "$",
            "description": null
        },
        "entity": {
            "id": "EN_00",
            "description": "New York xx"
        },
        "typology": {
            "id": "$",
            "description": null
        }
    },
    {
        "id": "000002",
        "physicalTableName": "AW_EFG_P00003_000002",
        "status": "ONLINE",
        "process": {
            "id": "SFT",
            "description": "Chiusura Leggera"
        },
        "scenario": {
            "id": "2019ACT",
            "description": "2019 Actuals"
        },
        "period": {
            "id": "11",
            "description": "Novembre"
        },
        "entity": {
            "id": "EN_00",
            "description": "New York xx"
        },
        "typology": {
            "id": "$",
            "description": null
        }
    }
]
```


Shows a specific Partition of a Dataset

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/000001/partitions/000001
Body	-

Example of response	{
	"id": "000001",
	"physicalTableName": "AW_EFG_000001_000001",
	"status": "ONLINE",
	"process": {
	"id": "BDG",
	"description": "BDG"
	},
	"scenario": {
	"id": "$",
	"description": null
	},
	"period": {
	"id": "$",
	"description": null
	},
	"entity": {
	"id": "EN_00",
	"description": "New York xx"
	},
	"typology": {
	"id": "$",
	"description": null
	}
	}

Show the number of Partitions

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/000001/partitions-count
Body	-
Example of response	12

Create a new Partition

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/000001/partitions

Body	{
	"process": {
	"id": "BDG"
	},
	"entity": {
	"id": "EN_00"
	},
	"typology": {
	"id": "TIP"
	}
	}

Example of response	{
	"id": "000001",
	"physicalTableName": "AW_EFG_000001_000001",
	"status": "ONLINE",
	"process": {
	"id": "BDG",
	"description": "BDG"
	},
	"scenario": {
	"id": "$",
	"description": null
	},
	"period": {
	"id": "$",
	"description": null
	},
	"entity": {
	"id": "EN_00",
	"description": "New York xx"
	},
	"typology": {
	"id": "$",
	"description": null
	}
	}

Delete a Partition

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasets/123459/partitions-bulk-delete-async

Body	[
	{
	"id": "000001"
	}
	]

Example of response	{
	"dataProcessingId": "2C980CE49BD9F03A019BDC638CE7545B"
	}

Dictionary Management API

This API enables the extraction of information, creation, modification and deletion of Tagetik application's Dictionaries.

API title:	AIH Dictionaries swagger openapi 3.0.3
Description:	API for managing Dictionaries in the AIH database application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/dictionaries

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	Dictionary			Dictionary	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Read	GET		Dictionary ID		Dictionary	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Delete	DELETE		Dictionary ID		Dictionary	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Replace	PUT	Dictionary	Dictionary ID		Dictionary	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search	GET			filter sort skip take (optional parameters)	List of Dictionaries	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Search Size	GET			filter sort skip take (optional parameters)	Quantity of Dictionaries	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Update	PATCH	Dictionary	Dictionary ID		Dictionary	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Bulk	POST	Dictionary (s)			Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accepts the fields "id, descriptions.[language], updateInfo.user, updateInfo.date and updateInfo.origin"

Supported Fields in Request

Dictionary field	Supported cardinality	Supported Values
id	-	string (mandatory)
oid	-	string
descriptions.[lingua]	-	string (one mandatory)
queryBody.oracle	-	string
queryBody.sqlServer	-	string
queryBody.hana	-	string
queryBody.postgres	-	string
queryBody.others	-	string
personalDataManagement	unlimited	string
connection	-	string

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

Additional Fields in Response

Dictionary field	Supported Values
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB

Examples of requests

Show list of all dictionaries

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/dictionaries
Body	-
Example of response	


```
[
    {
        "id": "DICT",
        "oid": "MDSFDXVAAETKQNC",
        "queryBody": {
            "oracle": null,
            "sqlServer": null,
            "hana": null,
            "postgres": "select * from TABLENAME",
            "others": null
        },
        "personalDataManagement": [],
        "connection": "DATABASE_CONNECTION",
        "updateInfo": {
            "user": "USERT",
            "date": "2025-04-03T13:44:42.279+0000",
            "origin": "MDM"
        },
        "descriptions": {
            "it": "API_DIC",
            "en": null,
            "ja": null,
            "aa": null
        }
    },
    {
        "id": "000012",
        "oid": "XMIOCXOJUXYCAPQ",
        "queryBody": {
            "oracle": null,
            "sqlServer": null,
            "hana": null,
            "postgres": "select COLUMN from TABLENAME",
            "others": null
        },
        "personalDataManagement": [],
        "connection": "Current",
        "updateInfo": {
            "user": "USERT",
            "date": "2025-04-03T13:44:38.440+0000",
            "origin": "MDM"
        },
        "descriptions": {
            "it": "API_DIC",
            "en": null,
            "ja": null,
            "aa": null
        }
    }
]
```

Show a specific Dictionary

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/dictionaries/DICT
Body	-
Example of response	{ "id": "DICT", "queryBody": { "oracle": null, "sqlServer": null, "hana": null, "postgres": "select COLUMN from TABLENAME", "others": null }, "personalDataManagement": [], "connection": null, "updateInfo": { "user": "USERT", "date": "2024-09-03T09:52:03.801+0000", "origin": "INPUT_WEB" }, "descriptions": { "it": "Dizionario", "en": "Dictionary", "ja": null, "aa": null } }

Show the number of Dictionaries

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/dictionaries-count
Body	-
Example of response	12

Create a new Dictionary

Create a new Dictionary	
Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/dictionaries

Body	{
	"id": "NEW",
	"queryBody": {
	"oracle": null,
	"sqlServer": "select * from TABLE",
	"hana": null,
	"postgres": null,
	"others": null
	},
	"personalDataManagement": [],
	"connection": "SQL_DATABASE",
	"descriptions": {
	"it": "Sequel",
	"en": null,
	"ja": null,
	"aa": null
	}
	}

Example of response	{
	"id": "NEW",
	"oid": "WCIREDPBEPXVCQD",
	"queryBody": {
	"oracle": null,
	"sqlServer": "select * from TABLE",
	"hana": null,
	"postgres": null,
	"others": null
	},
	"personalDataManagement": [],
	"connection": "SQL_DATABASE",
	"updateInfo": {
	"user": "USERT",
	"date": "2026-01-19T16:25:28.442+0000",
	"origin": "INPUT_WEB"
	},
	"descriptions": {
	"it": "Sequel",
	"en": null,
	"ja": null,
	"aa": null
	}
	}

Edit a Dictionary

Method	PATCH
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/dictionaries/SQL

Body	{
	"id": "SQL",
	"queryBody": {
	"oracle": null,
	"secured-sqlServer": "select ELEM from TABLE",
	"hana": null,
	"postgres": null,
	"others": null
	},
	"personalDataManagement": [],
	"connection": "SQL_DATABASE",
	"descriptions": {
	"it": "Sequel",
	"en": null,
	"ja": null,
	"aa": null
	}
	}

Example of response	{
	"id": "SQL",
	"oid": "JQKNFEQWHBIRVSD",
	"queryBody": {
	"oracle": null,
	"sqlServer": "select ELEM from TABLE",
	"hana": null,
	"postgres": null,
	"others": null
	},
	"personalDataManagement": [],
	"connection": "SQL_DATABASE",
	"updateInfo": {
	"user": "USERT",
	"date": "2026-01-19T16:27:01.709+0000",
	"origin": "INPUT_WEB"
	},
	"descriptions": {
	"it": "Sequel",
	"en": null,
	"ja": null,
	"aa": null
	}
	}

Create a Dictionary, edit another Dictionary and delete another Dictionary

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/dictionaries-bulk

Body


```
{
    "saveMode": "LOOSE",
    "post": [
        {
            "id": "POSTBU",
            "queryBody": {
                "oracle": null,
                "sqlServer": null,
                "hana": null,
                "postgres": "select * from TABLE2",
                "others": null
            },
            "personalDataManagement": [],
            "connection": null,
            "descriptions": {
                "it": "Bulk Post",
                "en": "Post Bulk",
                "ja": null,
                "aa": null
            }
        }
    ],
    "patch": [
        {
            "key": {
                "id": "PATCHB"
            },
            "data": {
                "queryBody": {
                    "oracle": null,
                    "sqlServer": null,
                    "hana": null,
                    "postgres": "select * from TABLE",
                    "others": null
                },
                "personalDataManagement": [],
                "connection": null,
                "descriptions": {
                    "it": "Bulk Patch Edited",
                    "en": "Edited Patch Bulk",
                    "ja": null,
                    "aa": null
                }
            }
        }
    ],
    "delete": [
        {
            "id": "DELETB"
        }
    ]
}
```


Example of response


```
{
    "code": "SUCCESS"
}
```


API Set Online Dataset

This API allows you to manage the operation for bringing a Dataset of the Tagetik application online.

API title:	AIH Dataset swagger openapi 3.0.3
Description:	API for managing the online activation of Datasets in the AIH database application.
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/setonline/v1/{dbID}

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	List of Dataset IDs	ID Analytical Workspace		Dataprocessing ID	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Read	GET		Dataprocessing ID		Dataprocessing Info	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Delete			Dataprocessing ID		Stop message for the Dataprocessing ID	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)

"filter' accepts the fields 'id, process.id, process.description, scenario.id, scenario.description, period.id, period.description, entity.id, entity.description, typology.id, typology.description and status'.

Supported Fields in Request

Partition Field	Supported cardinality	Supported Values
datasets	Quantity of Analytical Workspace datasets	string

Additional Fields in Response

Partition Field	Supported Values
dataprocessingId	string
requestDateTime	date
status	RUNNING, FAILED, COMPLETED
parameters	string

Examples of requests

Shows the status of a specific data processing

Method	GET
URL	/api/aih/setonline/v1/{dbID}/2C98FD249BDE7D25019BE12F29473052
Body	-

Example of response	{
	"requestDateTime": "2026-01-21T15:32:03.244+0000",
	"status": "COMPLETED",
	"parameters": {}
	}

Put specific datasets of an Analytical Workspace online

Method	POST
URL	/api/aih/setonline/v1/{dbID}/AWN

Body	{
	"datasets": [
	"ABC",
	"BBB"
	]
	}

Example of response	{
	"dataprocessingId": "2C98FD249BDE7D25019BE12F29473052"
	}

Stop dataprocessing

Stop dataprocessing	
Method	DELETE
URL	/api/aih/setonline/v1/{dbID}/2C98FD249BDE7D25019BE12F29473052
Body	-

Example of response	<pre>{ "message": "Stop on dataprocessingOid 2C98FD249BDE7D25019BE12F29473052" }</pre>

API Set Online Dataset V2

This API allows you to manage the operation for bringing a Dataset of the Tagetik application online.

API title:	AIH Dataset swagger openapi 3.0.3
Description:	API for managing the online activation of Datasets in the AIH database application.
Version:	2.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/setonline/v2/{dbID}

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	List of Dataset IDs	ID Analytical Workspace		Dataprocessing ID	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Supported Fields in Request

Partition Field	Supported cardinality	Supported Values
datasets	Quantity of Analytical Workspace datasets	string

Additional Fields in Response

Partition Field	Supported Values
dataprocessingId	string

Examples of requests

Shows the status of a specific data processing

Method	GET
URL	/api/aih/setonline/v1/{dbID}/2C98FD249BDE7D25019BE12F29473052
Body	-

Example of response	{
	"requestDateTime": "2026-01-21T15:32:03.244+0000",
	"status": "COMPLETED",
	"parameters": {}
	}

Put specific datasets of an Analytical Workspace online

Method	POST
URL	/api/aih/setonline/v2/{dbID}/AWN

Body	{
	"datasets": [
	"ABC",
	"BBB"
	]
	}

Example of response	{
	"dataprocessingId": "2C98FD249BDE7D25019BE12F29473052"
	}

Put specific datasets from an Analytical Workspace online, but one of them cannot be put online

Method	POST
URL	/api/aih/setonline/v2/{dbID}/AWN

Body	{
	"datasets": [
	"ABC",
	"BBB"
	]
	}

Example of response	{
	"dataprocessingId": "2C94D32597C951CC0197CB79B11266DE",
	"failed": [
	{
	"dataset": "ABC",
	"cause": "Following datasets cannot be set online: ABC"
	}
	]
	}

Datasource Fields Management API

This API enables the extraction of information, creation, modification and deletion of fields in a Tagetik application's Datasource.

API title:	AIH Dataset swagger openapi 3.0.3
Description:	API for Datasource Fields Management in the AIH Database Application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/{datasourceID}/fields

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	Datasource field			Datasource field	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Read	GET		Datasource Field ID		Datasource field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)
Delete	DELETE		Datasource Field ID		Datasource field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Replace	PUT	Datasource field	Datasource Field ID		Datasource field	200 (OK) 201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search	GET			filter sort skip take (optional parameters)	List of Datasource Fields	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Search Size	GET			filter sort skip take (optional parameters)	Quantity of Datasource Fields	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Update	PATCH	Datasource field	Datasource Field ID		Datasource field	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)
Bulk	POST	Datasource Field(s)			Success	200 (OK)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter" accepts the fields "id, descriptions.[language], fieldType, updateInfo.user, updateInfo.date and updateInfo.origin"

Supported Fields in Request

Datasource Field	Supported cardinality	Supported Values
id	-	string (mandatory)
oid	-	string
descriptions.[lingua]	-	string (one mandatory)

Datasource Field	Supported cardinality	Supported Values
fieldType	-	TEXT_MEASURE, NUMBER_MEASURE, DATE_MEASURE, LEAF_DIMENSION (mandatory)
encoded	-	true/false
sortPosition	-	string
sortType	-	string
values.dictionary.id	-	string
values.dictionary.queryCodeField	-	string
values.dictionary.queryDescriptionField		string
values.dictionary.outOfDictionaryAllowed	-	string
values.displayMode	-	CODE, DESCRIPTION, CODE_AND_DESCRIPTION
timeDimensionRollup	-	SUM, LAST
conversionType	-	NONE, AVERAGE, PERIOD_AVERAGE, FINAL

The 'descriptions' field consists of a key-value array where the key is the abbreviated wording of a language and the value is a string

The 'values.dictionary.id' field only accepts values that correspond to Dictionaries existing in the AW

Additional Fields in Response

Datasource Field	Supported Values
updateInfo.user	string
updateInfo.date	date
updateInfo.origin	INPUT_WEB

Examples of requests

Show the list of all fields in a Datasource

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/123459/fields
Body	-

Example of response


```
[
    {
        "id": "FLAG_ESECUZIONE_DISTRIBUITA",
        "oid": "ABYXJVVKAJSIXEI",
        "fieldType": "NUMBER_MEASURE",
        "values": null,
        "mandatory": false,
        "sortType": null,
        "sortPosition": null,
        "updateInfo": {
            "user": "USERT",
            "date": "2026-01-20T15:34:15.884+0000",
            "origin": "INPUT_WEB"
        },
        "timeDimensionRollup": "SUM",
        "conversionType": "NONE",
        "descriptions": {
            "it": "FLAG_ESECUZIONE_DISTRIBUITA-it",
            "en": "FLAG_ESECUZIONE_DISTRIBUITA-en",
            "ja": null,
            "aa": null
        }
    },
    {
        "id": "GDPR_CHECK_RESULT_DATE",
        "oid": "IBQKFPGJFESDSNO",
        "fieldType": "DATE_MEASURE",
        "values": null,
        "mandatory": false,
        "sortType": null,
        "sortPosition": null,
        "updateInfo": {
            "user": "USERT",
            "date": "2026-01-20T15:34:16.796+0000",
            "origin": "INPUT_WEB"
        },
        "descriptions": {
            "it": "GDPR_CHECK_RESULT_DATE-it",
            "en": "GDPR_CHECK_RESULT_DATE-en",
            "ja": null,
            "aa": null
        }
    }
]
```


Display a specific Field in a Datasource

Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/123459/fields/ID_OWS
Body	-

Example of response	{
	"id": "ID_OWS",
	"oid": "EYAWSUSMMTLMVKB",
	"fieldType": "TEXT_MEASURE",
	"values": null,
	"mandatory": false,
	"sortType": null,
	"sortPosition": null,
	"updateInfo": {
	"user": "CLAUDIO",
	"date": "2026-01-20T16:04:49.654+0000",
	"origin": "INPUT_WEB"
	},
	"encoded": false,
	"descriptions": {
	"it": "ID_OWS-it",
	"en": "ID_OWS-en",
	"ja": null,
	"aa": null
	}
	}

Show the number of fields

Show the number of fields	
Method	GET
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/123459/fields-count
Body	-
Example of response	12

Create a new Field

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/123459/fields

Body	{
	"id": "ID_OWS",
	"descriptions": {
	"it": "ID_OWS-it",
	"en": "ID_OWS-en"
	},
	"fieldType": "TEXT_MEASURE",
	"encoded": true,
	"values": {
	"dictionary": {
	"id": "DICT",
	"queryCodeField": "ID_OWS",
	"queryDescriptionField": "ID_OWS",
	"outOfDictionaryAllowed": false
	},
	"displayMode": "CODE"
	},
	"sortType": "ASC",
	"sortPosition": "1"
	}

Example of response	{
	"id": "ID_OWS",
	"oid": "PWUYEVRSTIDYTNU",
	"fieldType": "TEXT_MEASURE",
	"values": {
	"dictionary": {
	"id": "DICT",
	"queryCodeField": "ID_OWS",
	"queryDescriptionField": "ID_OWS",
	"outOfDictionaryAllowed": false
	},
	"displayMode": "CODE"
	},
	"mandatory": false,
	"sortType": "ASC",
	"sortPosition": "1",
	"updateInfo": {
	"user": "USERT",
	"date": "2026-01-20T16:26:07.382+0000",
	"origin": "INPUT_WEB"
	},
	"encoded": true,
	"descriptions": {
	"it": "ID_OWS-it",
	"en": "ID_OWS-en",
	"ja": null,
	"aa": null
	}
	}

Edit a Field

Method	PATCH
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/123459/fields/ID_OWS

Body	{
	"id": "ID_OWS",
	"descriptions": {
	"it": "Modifica",
	"en": "Modified"
	},
	"fieldType": "TEXT_MEASURE",
	"encoded": true,
	"values": {
	"dictionary": {
	"id": "DICT",
	"queryCodeField": "ID_OWS",
	"queryDescriptionField": "ID_OWS",
	"outOfDictionaryAllowed": false
	},
	"displayMode": "CODE"
	},
	"sortType": "ASC",
	"sortPosition": "1"
	}

Example of response	{
	"id": "ID_OWS",
	"oid": "PWUYEVRSTIDYTNU",
	"fieldType": "TEXT_MEASURE",
	"values": {
	"dictionary": {
	"id": "DICT",
	"queryCodeField": "ID_OWS",
	"queryDescriptionField": "ID_OWS",
	"outOfDictionaryAllowed": false
	},
	"displayMode": "CODE"
	},
	"mandatory": false,
	"sortType": "ASC",
	"sortPosition": "1",
	"updateInfo": {
	"user": "USERT",
	"date": "2026-01-20T16:26:07.382+0000",
	"origin": "INPUT_WEB"
	},
	"encoded": true,
	"descriptions": {
	"it": "Modifica",
	"en": "Modified",
	"ja": null,
	"aa": null
	}
	}

Create a Field, edit another Field and delete another Field

Method	POST
URL	/api/aih/datamodel/v1/{dbID}/workspaces/{awID}/datasources/123459/fields-bulk

Body	{
	"saveMode": "LOOSE",
	"post": [
	{
	"id": "ID_OWS",
	"descriptions": {
	"it": "ID_OWS-it",
	"en": "ID_OWS-en"
	},
	"fieldType": "TEXT_MEASURE",
	"encoded": true,
	"timeDimensionRollup": "SUM",
	"conversionType": "AVERAGE"
	}
	],
	"delete": [
	{
	"id": "GDPR_CHECK_RESULT_DATE"
	}
	],
	"patch": [
	{
	"key": {
	"id": "DESC_OWS1"
	},
	"data": {
	"descriptions": {
	"it": "DESC_OWS0-italiano",
	"en": "DESC_OWS0-english"
	},
	"fieldType": "TEXT_MEASURE",
	"encoded": true,
	"timeDimensionRollup": "SUM",
	"conversionType": "AVERAGE"
	}
	}
	]
	}

Example of response	{
	"code": "SUCCESS"
	}

API Set Offline Dataset

This API allows you to manage the offline operation of a Dataset in the Tagetik application.

API title:	AIH Dataset swagger openapi 3.0.3
Description:	API for handling the process of putting Datasets offline in the AIH database application
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/setoffline/v1/{dbID}

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	List of Dataset IDs	ID Analytical Workspace		List of Dataset IDs	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

"filter' accepts the fields 'id, process.id, process.description, scenario.id, scenario.description, period.id, period.description, entity.id, entity.description, typology.id, typology.description and status'.

Supported Fields in Request

Partition Field	Supported cardinality	Supported Values
datasets	Quantity of Analytical Workspace datasets	string

Additional Fields in Response

Partition Field	Supported Values
success	string
fail	date

Examples of requests

Set specific datasets in an Analytical Workspace to offline

Method	POST
URL	/api/aih/setffline/v1/{dbID}/AWN

Body	<pre>{ "datasets": ["ABC", "BBB"] }</pre>
Example of response	<pre>{ "success": ["ABC", "BBB"] }</pre>

API Set Offline Dataset V2

This API allows you to manage the offline operation of a Dataset in the Tagetik application.

API title:	AIH Dataset swagger openapi 3.0.3
Description:	API for handling the process of putting Datasets offline in the AIH database application
Version:	2.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

URL

<api-root>/api/aih/setoffline/v2/{dbID}

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (Exception)
Create	POST	List of Dataset IDs	ID Analytical Workspace		List of Dataset IDs	201 (Created)	405 (Method not permitted) 404 (Not found) 403 (Access to unauthorised resource) 401 (Unauthorised) 400 (Invalid request)

Supported Fields in Request

Partition Field	Supported cardinality	Supported Values
datasets	Quantity of Analytical Workspace datasets	string

Additional Fields in Response

Partition Field	Supported Values
success	string
fail	date

Examples of requests

Examples of requests

Set specific datasets in an Analytical Workspace to offline

Method	POST
URL	/api/aih/setffline/v2/{dbID}/AWN
Body	<pre>{ "datasets": ["ABC", "BBB"] }</pre>
Example of response	<pre>{ "success": ["ABC", "BBB"] }</pre>

Put specific datasets from an Analytical Workspace offline, but one of them cannot be put online

Method	POST
URL	/api/aih/setffline/v2/{dbID}/AWN

Body	<pre>{ "datasets": ["ABC", "BBB"] }</pre>

Example of response	<pre>{
	  "success": [
	  "BBB"
	  ],
	  "failed": [
	  {
	  "dataset": "ABC",
	  "cause": "Following datasets cannot be set offline: ABC"
	  }
	  ]
	}</pre>

Data Model REST APIs

CCH Tagetik exposes the hierarchies (levels and flat) of the data model's dimensions by using RESTful APIs implemented with the OData v4 (Open Data Protocol) standard.

Two additional REST OpenAPIs are available for the Entity and Account settings, with which the relevant configurations can be consulted and changed.

STATUS	SWAGGER
ACTIVE	**<api root>/datamodel/swagger-ui/index.html**
FORMAT	ROOT ENDPOINT
REST / OpenAPI **OData** (Gerarchie flat)	**<api root>/datamodel/v0**

Authorisation

To access the datamodel APIs the following functions must be enabled:

- **0000205**- ***Setup & Admin - Data model - Dimensions - Settings - General***
- **0004077** - *Analytical workspace: OData services* (For the APIs relating to flat tables).

Analytical dimensions

Flat hierarchies

The URL relating to the root of the service of the Analytical Dimensions' hierarchies is:

```
<api-root>/datamodel/v0/analyticaldimension/database_id/analytical_dimension_
                    id/hierarchies/hierarchy_code/
```

Entity

Flat hierarchies

The URL for the service root of the RESTful APIs OData hierarchies is:

```
<api-root>/datamodel/v0/entity/database_id/hierarchies/hierarchy_code/
```

Settings

The URL for the Entity settings service root of the RESTful OpenAPIs is:

```
<api-root>/datamodel/v0/entity/database_id/config/
```

With this URL, the GET and PATCH methods for the Entity dimension settings can be invoked.

Account

Hierarchies

The URL for the Account hierarchies service root of the OData RESTful APIs is:

```
<api-root>/datamodel/v0/account/database_id/hierarchies/hierarchy_code/
```

Settings

The URL for the RESTful OpenAPI Account hierarchies service root of is:

```
<api-root>/datamodel/v0/account/database_id/config/
```

With this URL, the GET and PATCH methods can be invoked for the Account dimension settings.

Custom dimensions

Hierarchies

The URL relating to the root of the service of the Custom Dimensions' hierarchies is:

```
<api-root>/datamodel/v0/customdimension/database_id/custom_dimension_
number/hierarchies/hierarchy_code/
```

Levels

Adding **Levels** to the URL, exposes, through the **levelsNumber** property, the maximum number of levels of a hierarchy.

For example, with the URL:

```
<api-root>/datamodel/v0/analyticaldimension/TGK_
APP/CUSTOMER/hierarchies/001/Levels
```

returns **levelsNumber=2**.

Flat

Adding **Flat** to the URL exposes the hierarchy in Flat format. The properties composing the result trace are:

- *analytical* dimension name/**Entity**/**Accunt**/**Custom dimension *n***: shows the element's code
- *analytical dimension name*/**Entity**/**Accunt**/**Custom dimension *n***Description: shows the description of the element
- **hierarchy**: shows the code of the hierarchy
- **hierarchyDescription**: shows the description of the hierarchy
- **level1**/*nome_livello_1*: shows the code of the hierarchy's first level (node relating to the root).
- **level1**/*nome_livello_1****Description***: shows the description of the hierarchy's first level (node relating to the root).
- **level**n/*nome_livello*_n: shows the code of the n level of the hierarchy.
- **level**n/*nome_livello*_n**Description**: shows the description of the n level of the hierarchy.

 The last level (level n+1) shows the code of the lowest level element and its description.

 The names of the properties relating to the levels and their descriptions (including level n+1) can be customized by defining from the application the names of the levels of a hierarchy.

For example, by using the hierarchy's levels as names:

- 1: Root
- 2: Node
- 3: Leaf

the URL

`<api-root>/datamodel/v0/analyticaldimension/TGK_APP/CUSTOMER/hierarchies/001/Flat`

returns:

Customer	Customer Description	hierarchy	hierarchy Description	Root	Root Description	Node	Node Descript.	Leaf	Leaf Descript.
0001	ABC Electronics	01	Customer Segments	01	Customer Segments	02_EL	Electric and Electronics	00001	ABC Electronics
0002	Elettro LTD	01	Customer Segments	01	Customer Segments			00002	Elettro LTD
0013	AIR Aviation	01	Customer Segments	01	Customer Segments	02_AV	Aviation	00013	AIR Aviation

Note

For the OData API, by adding **$metadata** to the URLs of the service roots, metadata can be displayed.

API for extracting Analytical Workspace data model elements

Function

Extracts information related to Analytical Workspace elements.

URL

```
<api root>/aih/metadata/v1
```

***IMPORTANT**: the metadata parameter CCH Tagetik ($<metadata>) can be added to the URL to obtain more detailed results.*

The data service streams the values to deal with the large volume of data that could be returned.

If the application is configured to manage the **GDPR/DAC6** regulations, the Analytical Workspace data values and descriptions for fields on which the *Personal Data Protection* option is active will be exported in encrypted form.

API for extracting datasets

Recovers a list of all datasets (physical and virtual datasets and datasources) of the selected Analytical Workspace.

URL

```
<api-root>/aih/metadata/v1/database_id/workspace_code/Datasets
```

API for extracting the fields of a physical or virtual dataset or datasource

Recovers a list of the fields of the selected physical or virtual dataset or datasource.

URL

```
<api-root>/aih/metadata/v1/database_id/workspace_code/dataset_code/Fields
```

API for checking parameters by Function

Recovers a list of mandatory parameters of the *Functions* for extracting data from a dataset.

URL

```
<api-root>/aih/metadata/v1/database_id/workspace_code/dataset_code/Parameters
```

API extraction of runtime parameters in a DTP

URL

```
http://server:port/tagetikcpm/api/aih/dtp/v1/
```

IMPORTANT: user function 0003912 must be enabled in order to use the following API.

API to extract the required parameters at runtime

Method

GET

Retrieves the list of all runtime parameters present in the specified DTP configuration.

URL

```
<api-root>/aih/dtp/v1/database_id/workspace_code/dtp_code/runtimeParameters
```

The outcome returns, in JSON format, the list of parameter codes, and their types, divided into Reporting parameters and AW parameters.

Api Data Processing

API on data processing in Analytical workspaces

Function

It launches the necessary data processing to export, import, duplicate and update Analytical workspaces.

Protocol

Open RESTful API

Data processing on Analytical Workspace

- "Analytical Workspace Export" below
- "Analytical Workspace import" on page 279
- "Analytical Workspace Duplication" on page 281
- "Analytical Workspace Update" on page 283
- "DTP export of an Analytical Workspace" on page 286
- "DTP import of an Analytical Workspace" on page 287

Analytical Workspace Export

APIs for running the export of an Analytical Workspace

Runs the export of the Analytical Workspace *workspace_code* from the environment indicated via *database_id*.

Method

POST

URL

```
<api-root>/aih/export/v1/database_id/workspace_code
```

Parameters

Parameter	type	Required	Description
date	boolean	Optional	Includes the Analytical Workspace data in the export, in addition to the setup. Values: true/false Default: false.

Examples

```
{
    "data": true
}
```

Data returned

The response returns the following ID in JSON format:

dataprocessingId = data processing ID.

```
{
    "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB"
}
```

API for checking an Analytical Workspace's export status

Returns the export process status.

Method

GET

URL

```
<api-root>/aih/export/v1/dataprocessingId
```

Data returned

The response returns the data processing status in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

exportedFileNames: produced file names

```
{
    "requestDateTime": "2021-06-25T10:56:42.850+0000",
    "status": "COMPLETED",
    "parameters": [
        {
            "exportedFileNames": "export_DB_USER_1_20230206115313820.awex"
        }
    ]
}
```

API for stopping an Analytical Workspace export

Stops the export.

Method

DELETE

URL

```
<aih-root>/aih/export/v1/dataprocessingId
```

Data returned

The response returns the following ID in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing requested to be stopped but still in progress

```
{
    "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"
}
```

Analytical Workspace import

API for running the import of an Analytical Workspace

Runs the import of the Analytical Workspace contained in an export file, indicated in the body using **filename**, on the environment identified with *database_id*.

Method

POST

URL

<api-root>/aih/import/v1/database_id

Properties in JSON format

The following properties can be included in JSON format in the body of the request.

Property	Description	Options
filename	Mandatory. Identifies the file to import.	It is possible to specify: • an individual file name • a list of file names (separator character = **;**) • all files with **.awex** extension (filename = *****)
endpoint	Endpoint to be used if the file is located in a remote directory. See Endpoint page in the System Administration module.	-
dir	Directory on which files reside	If an Endpoint is specified, it allows the sub-directory to be specified based on the Endpoint's root. If an Endpoint has not been specified, the following can be specified: • empty field = directory configured as a CCH Tagetik writable folder • relative path = writable folder sub-directory • absolute path = specified generic directory (see the Security Configurations in the System Administration module)

Examples

Import of 'export.awex' file from the Writable folder

```
{
    "filename": "export.awex",
    "endpoint": "",
    "dir": ""
}
```

Import of 'export.awex' file from the 'C:\impexp' directory

```
{
    "filename": "export.awex",
    "endpoint": "",
    "dir": "C:\impexp"
}
```

Import of 'export.awex' file via SFTP endpoint

```
{
    "filename": "export.awex",
    "endpoint": "SFTP",
    "dir": ""
}
```

Import of "export.awex" file on the "tmp" sub-directory of the SFTP endpoint

```
{
    "filename": "export.awex",
    "endpoint": "SFTP",
    "dir": "tmp"
}
```

Import of files "export_1_of_2.awex" and "export_2_of_2.awex" on the SFTP endpoint

```
{
    "filename": "export_1_of_2.awex;export_2_of_2.awex",
    "endpoint": "SFTP",
    "dir": ""
}
```

Import of all files with ".awex" extension present on the SFTP endpoint

```
{
    "filename": "*",
    "endpoint": "SFTP",
    "dir": ""
}
```

Data returned

In the response, the following ID will be returned in JSON format:
dataprocessingId = data processing ID

```
{
    "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB"
}
```

API for checking an Analytical Workspace's import status

Returns the import process status.

Method
GET

URL
```
<api-root>/aih/import/v1/dataprocessingId
```

Data returned
The response returns the data processing status in JSON format:
status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

```
{
    "requestDateTime": "2021-06-25T10:56:42.850+0000",
    "status": "COMPLETED",
    "parameters": []
}
```

API for stopping an Analytical Workspace import
Stops the import.

Method
DELETE

URL
```
<api-root>/aih/import/v1/dataprocessingId
```

Data returned
The response returns the following ID in JSON format:
message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing requested to be stopped but still in progress

```
{
    "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"
}
```

Analytical Workspace Duplication

API to duplicate an Analytical workspace
Duplicates the Analytical Workspace *source_workspace_code* from the environment indicated by *database_id*.

Method
POST

URL

```
<api-root>/aih/clone/v1/database_id/source_workspace_code
```

Parameters

Parameter	type	Required	Description
targetWorkspaceCode	text	Mandatory	Analytical Workspace code to be created.
targetWorkspaceDescriptions	***	Mandatory	List of descriptions to be assigned to the created Analytical Workspace.
date	boolean	Optional	Includes the data of the duplicated Analytical workspace in the duplication. Values: true/false Default: false.
forms	boolean	Optional	Includes in the duplication the forms related to the duplicated Analytical workspace. Values: true/false Default: false.

Examples

```
{
    "targetWorkspaceCode":"001",
    "targetWorkspaceDescriptions": {
        "it":"Nuovo AW",
        "en": "New AW"
    },
    "data":true,
    "forms":false
}
```

Data returned

The response returns the following ID in JSON format:

dataprocessingId = data processing ID.

```
{
    "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB"
}
```

API to check the duplication status of an Analytical workspace

Returns the status of duplication data processing.

Method

GET

URL

```
<api-root>/aih/clone/v1/dataprocessingId
```

Data returned

The response returns the data processing status in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

```
{
    "requestDateTime": "2021-06-25T10:56:42.850+0000",
    "status": "COMPLETED",
    "parameters": []
}
```

API for aborting the duplication of an Analytical workspace

Interrupts duplication.

Method

DELETE

URL

```
<api-root>/aih/clone/v1/dataprocessingId
```

Data returned

The response returns the following ID in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing requested to be stopped but still in progress

```
{
    "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"
}
```

Analytical Workspace Update

API to perform the update of an Analytical workspace

Updates he Analytical Workspace *target_workspace_code* from the environment indicated via *database_id*.

Method

POST

URL

```
<api-root>/aih/update/v1/database_id/target_workspace_code
```

Parameters

Parameter	type	Required	Description
sourceType	text	Mandatory	Specifies the source type of the update. Values: LOCAL, FILE
disableDataManagementAudit	boolean	Optional	Disable the 'Data Management' item in the audit Values: true/false Default: false
dtpOperationSortingType	text	Optional	Indicates how the operations of a DTP are updated. Values: REORDER_USING_CODES, APPEND Default: REORDER_USING_CODES
sourceWorkspaceCode	text	Mandatory, definable only if sourceType = LOCAL	Analytical Workspace code to update from.
date	boolean	Optional, definable only if sourceType = LOCAL	Includes data from the source Analytical workspace in the update. Values: true/false Default: false.
filename	text	Mandatory, definable only if sourceType = FILE	Identifies the file to import. It is possible to specify: • an individual file name • a list of file names (separator character = **;**) • all files with **.awex** extension (filename = *****)
endpoint	text	Optional, definable only if sourceType = FILE	Endpoint to be used if the file is located in a remote directory. See Endpoint page in the System Administration module.
dir	text	Optional, definable only if sourceType = FILE	Directory in which the files are located. If an Endpoint is specified, it allows the sub-directory to be specified based on the Endpoint's root. If an Endpoint has not been specified, the following can be specified: • empty field = directory configured as a CCH Tagetik writable folder • relative path = writable folder sub-directory • absolute path = specified generic directory (see the Security Configurations in the System Administration module)

Examples

```
{
    "sourceType": "LOCAL",
    "dtpOperationSortingType": "REORDER_USING_CODES",
    "sourceWorkspaceCode":"005",
    "data": true
}
```

```
{
    "sourceType": "FILE",
    "dtpOperationSortingType": "APPEND",
    "filename":"export.awex",
    "endpoint":"",
    "dir":"tmp"
}
```

Data returned

The response returns the following ID in JSON format:

dataprocessingId = data processing ID.

```
{
    "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB"
}
```

API to check the update status of an Analytical workspace

Returns the status of the update data processing.

Method

GET

URL

```
<api-root>/aih/update/v1/dataprocessingId
```

Data returned

The response returns the data processing status in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

```
{
    "requestDateTime": "2021-06-25T10:56:42.850+0000",
    "status": "COMPLETED",
    "parameters": []
}
```

API to interrupt the update of an Analytical workspace

Stops the update.

Method
DELETE

URL
```
<api-root>/aih/update/v1/dataprocessingId
```

Data returned
The response returns the following ID in JSON format:
message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing requested to be stopped but still in progress

```
{
    "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"
}
```

DTP export of an Analytical Workspace

API for exporting a DTP from an Analytical workspace
Runs the export of the DTP *dtp_code* belonging to the Analytical *Workspace workspace_code* from the environment indicated via *database_id*.

Method
POST

URL
```
<api-root>/aih/dtpexport/v1/database_id/workspace_code/dtp_code
```

Parameters
None

Data returned
The response returns the following ID in JSON format:
dataprocessingId = data processing ID.

```
{
    "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB"
}
```

API to check the export status of a DTP from an Analytical workspace
Returns the status of the DTP export processing.

Method
GET

URL
```
<api-root>/aih/dtpexport/v1/dataprocessingId
```

Data returned
The response returns the data processing status in JSON format:
status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

exportedFileNames: produced file names

```
{
    "requestDateTime": "2021-06-25T10:56:42.850+0000",
    "status": "COMPLETED",
    "parameters": [
        {
            "exportedFileNames": "DTP_export_DB_USER_1_20230206115313820.awex"
        }
    ]
}
```

API to abort a DTP export of an Analytical workspace

Stops DTP export.

Method

DELETE

URL

```
<aih-root>/aih/dtpexport/v1/dataprocessingId
```

Data returned

The response returns the following ID in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing requested to be stopped but still in progress

```
{
    "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"
}
```

DTP import of an Analytical Workspace

API to import a DTP from an Analytical workspace

Imports a DTP from the Analytical *workspace workspace_code*, on the environment identified with *database_id*.

Method

POST

URL

<api-root>/aih/dtpimport/v1/database_id/workspace_code

Properties in JSON format

The following properties can be included in JSON format in the body of the request.

Parameter	type	Required	Description
filename	text	Mandatory	Identifies the file to import. It is possible to specify: • an individual file name • a list of file names (separator character = **;**) • all files with **.awex** extension (filename = *****)
endpoint	text	Optional	Endpoint to be used if the file is located in a remote directory. See Endpoint page in the System Administration module.
dir	text	Optional	Directory in which the files are located. If an Endpoint is specified, it allows the sub-directory to be specified based on the Endpoint's root. If an Endpoint has not been specified, the following can be specified: • empty field = directory configured as a CCH Tagetik writable folder • relative path = writable folder sub-directory • absolute path = specified generic directory (see the Security Configurations in the System Administration module)

Examples

```
{
    "filename": "DTP_export.awex",
    "endpoint": "",
    "dir": "tmp"
}
```

```
{
    "filename": "DTP_export.awex",
    "endpoint": "SFTP",
    "dir": ""
}
```

Data returned

In the response, the following ID will be returned in JSON format:

dataprocessingId = data processing ID

```
{
    "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB"
}
```

API to check the import status of a DTP from an Analytical workspace

Returns the status of the DTP import data processing.

Method

GET

URL

```
<api-root>/aih/dtpimport/v1/dataprocessingId
```

Data returned

The response returns the data processing status in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

```
{
    "requestDateTime": "2021-06-25T10:56:42.850+0000",
    "status": "COMPLETED",
    "parameters": []
}
```

API to interrupt the import of a DTP from an Analytical workspace

Stops the import of DTP.

Method

DELETE

URL

```
<api-root>/aih/dtpimport/v1/dataprocessingId
```

Data returned

The response returns the following ID in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing requested to be stopped but still in progress

```
{
    "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"
}
```

API to export a dataset to file

Runs the Export data processing on a file of a dataset identified by the *workspace_code*/*dataset_code* pair belonging to the Analytical Workspace and the DB identified by the *database_id*.

The setup used for the export is as defined in the data target mapping file identified by the *dtm_code*, the selected type is *reporting layer ($)*.

***IMPORTANT**: APIs do not support the running of data processing for the Export of a dataset to a file in which the download of the same file to the client/browser has been configured; therefore, at runtime, the following error will be returned: { "code": 400, "message": "Invalid file location - local download is not supported" }.*

Method

POST

URL

```
api-root>/aih/dtm/v1/database_id/workspace_code/dataset_code/dtm_code
```

Property

The following properties related to the execution context can be included in JSON format in the body of the request:

Property	Description	Options
process	Mandatory. Process selected for export.	-
scenario	Only required for processes with submission by scenario and period. No scenario must be selected for export , in the case of a single submission process.	-
period	Only required for processes with submission by scenario and period. No period must be selected for export , in the case of a single submission process.	-
entity	Mandatory. Entity or node selected for export.	• To indicate the entity, send the entity code (e.g. A01) • To indicate a node, send the string made up of "GER|<node number indicated in cockpit>" (e.g. GER|01).

Examples

Export for Entity A01 with process CAV1 and scenario/period 2020sp/07

```
{
    "process": "CAV1",
    "scenario":"2020sp",
    "period":"07",
    "entity":"A01"
}
```

Export for node 01 with process CAV1 and scenario/period equal to 2020sp/07

```
{
    "process": "CAV1",
    "scenario": "2020sp",
    "period": "07",
    "entity": "GER|01"
}
```

Data returned

The response returns the following ID in JSON format:

dataprocessingId = data processing ID.

```
{
    "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB"
}
```

API for checking export status of a dataset to file

Returns the export process status.

Method

GET

URL

```
<api-root>/aih/dtm/v1/dataprocessingId
```

Data returned

The response returns the data processing status in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully


```
{
    "requestDateTime": "2021-06-25T10:56:42.850+0000",
    "status": "COMPLETED",
    "parameters": []
}
```


API for stopping the export of a dataset to file

Stops the export.

Method

DELETE

URL

```
<api-root>/aih/dtm/v1/dataprocessingId
```

Data returned

The response returns the following ID in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing still running


```
{
    "message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"
}
```


Data processing APIs for loading data onto Analytical Workspaces

URL

```
<api-root>/aih/loadtoaw/v1/_code
```

API for loading data onto an Analytical Workspace dataset

Loads the data from an external source onto the dataset defined on the Analytical Workspace identified by the *workspace_code*/*dataset_code* pair belonging to the DB identified by the *database_id*, on the type identified by the *typology* code ($ for the reporting layer). The setup used for loading corresponds to the one defined in the datasource mapping identified by the code *dsm_code*.

Method

POST

URL

```
<api-root>/aih/loadtoaw/v1/database_id/workspace_code/dataset_code/typology/dsm_code
```

Property

The following properties related to the execution context can be included in JSON format in the body of the request:

Property	Description	Options
process	Mandatory. Process selected for loading.	-
scenario	Only required for processes with submission by scenario and period, but not needed for single submission processes.	-
period	Only required for processes with submission by scenario and period, but not needed for single submission processes.	-
entity	Mandatory. Entity or node selected for loading.	• To indicate the entity, the entity code (e.g. A01) • To indicate a node, the string made up of "GER|<node number indicated in cockpit>" (e.g. GER|01).

Examples

{ "process":"CAV1", "scenario":"2020sp", "period":"07", "entity":"A01"} - load for entity A01 with process CAV1 and scenario/period equal to 2020sp/07

{ "process":"CAV1", "scenario":"2020sp", "period":"07", "entity":"GER\|01"} - loading for node 01 with process CAV1 and scenario/period equal to 2020sp/07

Data returned

In the response, the following ID will be returned in JSON format:

dataprocessingId: data processing ID.

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

API for checking the status of data loading onto an Analytical Workspace dataset

Returns the status of the loading data process.

Method

GET

URL

```
<api-root>/aih/loadtoaw/v1/dataprocessingId
```

Data returned

In the response, the data processing status will be returned in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

API for stopping the loading of data onto an Analytical Workspace dataset

Method

DELETE

URL

```
<api-root>/aih/loadtoaw/v1/dataprocessingId
```

Data returned

In the response, the following ID will be returned in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing requested to be stopped but still in progress

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

Financial Workspace update processing API

URL

```
http://server:port/tagetikcpm/api/aih/updateaw/v1/
```

API for updating the Financial Workspace

Runs an update of the Financial Workspace based on a dataset defined on the Analytical Workspace and identified by the *workspace_code* / *dataset_code* pair belonging to the DB identified by the *database_id* on the Financial Workspace.

The setup used for loading will be as defined on the dataset using the *dsm_code* functionality.

Method

POST

URL

```
<api-root>/aih/updatefw/v1/database_id/workspace_code/dataset_code
```

Property

The following properties related to the execution context can be included in JSON format in the body of the request:

Property	Description	Options
process	Mandatory. Process selected for loading.	-
scenario	Only required for processes with submission by scenario and period, but not needed for single submission processes. Scenario selected for loading.	-

Property	Description	Options
period	Only required for processes with submission by scenario and period, but not needed for single submission processes. Scenario selected for loading.	-
entity	Mandatory. Entity or node selected for loading.	• To indicate the entity, the entity code (e.g. A01) • To indicate a node, the string made up of "GER|<node number indicated in cockpit>" (e.g. GER|01).

Examples

{ "process":"CAV1", "scenario":"2020sp", "period":"07", "entity":"A01"} - load for entity A01 with process CAV1 and scenario/period equal to 2020sp/07

{ "process":"CAV1", "scenario":"2020sp", "period":"07", "entity":"GER\|01"} - loading for node 01 with process CAV1 and scenario/period equal to 2020sp/07

Data returned

In the response, the following ID will be returned in JSON format:

dataprocessingId = data processing ID.

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

API for checking the Financial Workspace update status

Returns the update data processing status.

Method

GET

URL

```
<api-root>/aih/updatefw/v1/dataprocessingId
```

Data returned

In the response, the data processing status will be returned in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

API for stopping the Financial Workspace update

Stops the update.

Method

DELETE

URL

```
<api-root>/aih/updatefw/v1/dataprocessingId
```

Data returned

In the response, the following ID will be returned in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing requested to be stopped but still in progress

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

API for directly loading Quick Data Loader data

URL

```
<api-root>/aih/qdl/v1/database_id
```

Parameters on the execution context

Parameter	Description	Options
process	Mandatory. Process selected for loading.	-
scenario	Only required for processes with submission by scenario and period, but not needed for single submission processes. Scenario selected for loading.	-
period	Only required for processes with submission by scenario and period, but not needed for single submission processes. Period selected for loading	-
entity	Mandatory. Entity or node selected for loading.	• To indicate the entity, the entity code (e.g. A01) • To indicate a node, the string made up of "<hierarchy code>|<node code>" (e.g. HIER1|NODE1).

Parameters on the target type

Parameter	Description	Options
targetType	Mandatory. Target type.	• *AW*: loaded onto the Analytical Workspace • *AMOUNTS*: loaded onto the Financial Workspace (Gross Amount Data and/or IC Amount Data)
loadingPolicy	Mandatory. Policy for loading data onto the target. If necessary, the editability and validation checks are applied both to data to be deleted and to data to be inserted.	• *ONLY_INSERT*: only inserts data, without deleting. • *DELETE_FOR_FILTER_AND_ORIGIN_AND_INSERT*: deletes for the execution context, origin and dimensions to filter as indicated in the **fieldDeletionFilter** parameter before running the insertion. • *DELETE_FOR_FILTER_AND_INSERT*: deletes for the execution context and dimensions to filter as indicated in the **fieldDeletionFilter** parameter before running the insertion.
fieldDeletionFilter	Optional. Allows you to indicate the names of the fields related to the target on which to filter the deletion of data. Only deletes records with values equal to those present in the input data to be inserted.	Depending on the selected target type, dedicated options must be specified; see "Particular features of the fieldDeletionFilter property" on the next page

Particular features of the fieldDeletionFilter property

Option	Description	Options
With type *AW*		
workspace	Mandatory. Analytical Workspace code	-
dataset	Mandatory. Dataset code	-
typology	Optional. Type code. Default: *$ - Reporting layer*	-
With type *AMOUNT*		
grossType	Optional. Method by which records must be subdivided between Gross Amounts and Intercompany Amounts. Default: *GROSS*	• *GROSS*: Rows with no counterparty are downloaded as Gross Amounts, while the others are downloaded as Intercompany Amounts. • *THIRD_PARTY*: The row totals, ignoring the counterparty value, are downloaded as Gross Amounts, while those with the counterparty are downloaded as Intercompany Amounts.
periodLength	Optional. Specifies whether the amounts loaded for the data are expressed cumulatively or by period. Default: *YEAR_TO_DATE*	• *MONTHLY*: Monthly • *BIMESTRAL*: Bimonthly • *QUARTERLY*: Quarterly • *FOURMONTHLY*: Every four months • *SEMIANNUAL*: Every six months • *ANNUAL*: Annual • *YEAR_TO_DATE*: Cumulative
carryForwardPolicy	Optional. Indicates the way in which data from the previous period is reopened in the event that the selected **process** is not *Single Submission* and the selected **periodLength** is not *YEAR_TO_DATE* - cumulative. Default *RELATED_TO_IMPORTED_DATA*	• *RELATED_TO_IMPORTED_DATA*: Reopens the data from the previous period with the same n-pla logic present in the imported data to be made cumulative, without considering the origin. • *ACCORDING_TO_DELETION_POLICY*: Reopens the data from the previous period applying the filters defined by the deletion policy specified in the **loadingPolicy** parameter.

Parameters related to data

Data can be specified both in CSV format and in JSON format.

Parameter	Description	Options
CSV format		
headerCsvFormat	Mandatory. List of field names related to the source data. There may be more or less than those of the target.	-
dataCsvFormat	Mandatory. List of records. Each record is a list of values separated by **,** sorted according to the headers defined in the **headerCsvFormat** parameter. Each data record must have the same cardinality as the specified headers.	-
JSON format		
dataJsonFormat	Mandatory. List of records. Each record is an object in JSON format in which data are represented as key-value pairs in which the key is the name of the source column and the value is the value of the field. Each data record must have the same cardinality as the others and must contain the usual field names.	

Examples

Body for loading onto Analytical Workspace for a Scenario/Period submission process, for a single entity, with data in JSON format

```
{
"process" : "ACTUAL",
"scenario" : "2022ACT",
"period" : "12",
"entity" : "001",
"targetType": "AW",
"workspace" : "001",
"dataset" : "000001",
"typology" : "$",
"loadingPolicy" : "DELETE_FOR_FILTER_AND_ORIGIN_AND_INSERT"
"fieldDeletionFilter" : [ "ACCOUNT", "COST_CENTER"]
"dataJsonFormat" : [
{ "SCENARIO" : "2022ACT", "PERIOD" : "12", "ENTITY" : "001", "ACCOUNT" : "00001", "COST_CENTER"
: "00001", "CURRENCY" : "EUR", "AMOUNT" : 100.00, "NOTE" : ""  },
{ "SCENARIO" : "2022ACT", "PERIOD" : "12", "ENTITY" : "001", "ACCOUNT" : "00002", "COST_CENTER"
: "00001", "CURRENCY" : "EUR", "AMOUNT" : 200.00, "NOTE" : ""  },
{ "SCENARIO" : "2022ACT", "PERIOD" : "12", "ENTITY" : "001", "ACCOUNT" : "00003", "COST_CENTER"
: "00001", "CURRENCY" : "EUR", "AMOUNT" : 300.00, "NOTE" : ""  }
]
}
```

Body for loading onto Analytical Workspace for a single submission process, for a node of entities, with data in CSV format

```
{
"process" : "BUDGET",
"entity" : "01|01",
"targetType": "AW",
"workspace" : "001",
"dataset" : "000001",
"typology" : "CALC",
"loadingPolicy" : "DELETE_FOR_FILTER_AND_INSERT"
"fieldDeletionFilter" : [ "ACCOUNT", "COST_CENTER"]
"headerCsvFormat" : [ "SCENARIO", "PERIOD","ENTITY","ACCOUNT","COST_
CENTER","CURRENCY","AMOUNT","NOTE"]
"dataCsvFormat" : [
[ "2022ACT", "12", "001", "00001", "00001", "EUR", 100.00, ""  ],
[ "2022ACT", "12", "001", "00002", "00001", "EUR", 200.00, ""  ],
[ "2022ACT", "12", "001", "00003", "00001", "EUR", 300.00, ""  ]
]
}
```

Body for loading onto Financial Workspace for a Scenario/Period submission process, for a single entity, with data in JSON format

```
{
"process" : "ACTUAL",
"scenario" : "2022ACT",
"period" : "12",
"entity" : "001",
"targetType": "AMOUNT",
"grossType" : "GROSS",
"periodLength" : "MONTHLY",
"carryForwardPolicy" : "RELATED_TO_IMPORTED_DATA",
"loadingPolicy" : "DELETE_FOR_FILTER_AND_ORIGIN_AND_INSERT"
"fieldDeletionFilter" : [ "COD_CONTO", "COD_DEST1"]
```

```
"dataJsonFormat" : [
{ "COD_SCENARIO" : "2022ACT", "COD_PERIODO" : "12", "COD_AZIENDA" : "001", "COD_CONTO" :
"00001", "COD_DEST1" : "00001", "COD_CATEGORIA" : "$AMOUNT", "COD_VALUTA_ORIGINARIA" : "EUR",
"IMPORTO_VALUTA_ORIGINARIA" : 100.00, "NOTE" : ""  },
{ "COD_SCENARIO" : "2022ACT", "COD_PERIODO" : "12", "COD_AZIENDA" : "001", "COD_CONTO" :
"00002", "COD_DEST1" : "00001", "COD_CATEGORIA" : "$AMOUNT", "COD_VALUTA_ORIGINARIA" : "EUR",
"IMPORTO_VALUTA_ORIGINARIA" : 200.00, "NOTE" : ""  },
{ "COD_SCENARIO" : "2022ACT", "COD_PERIODO" : "12", "COD_AZIENDA" : "001", "COD_CONTO" :
"00003", "COD_DEST1" : "00001", "COD_CATEGORIA" : "$AMOUNT", "COD_VALUTA_ORIGINARIA" : "EUR",
"IMPORTO_VALUTA_ORIGINARIA" : 300.00, "NOTE" : ""  }
]
}
```

Body for loading onto Financial Workspace for a single submission process, for a node of entities, with data in CSV format

```
"process" : "BUDGET",
"entity" : "01|01",
"targetType": "AMOUNT",
"grossType" : "GROSS",
"periodLength" : "MONTHLY",
"carryForwardPolicy" : "RELATED_TO_IMPORTED_DATA",
"loadingPolicy" : "DELETE_FOR_FILTER_AND_INSERT"
"fieldDeletionFilter" : [ "ACCOUNT", "COST_CENTER"]
"headerCsvFormat" : [ "COD_SCENARIO", "COD_PERIODO","COD_AZIENDA","COD_CONTO","COD_DEST1","COD_
CATEGORIA","COD_VALUTA_ORIGINARIA","IMPORTO_VALUTA_ORIGINARIA","NOTE"]
"dataCsvFormat" : [
[ "2022ACT", "12", "001", "00001", "00001", "$AMOUNT", "EUR", 100.00, ""  ],
[ "2022ACT", "12", "001", "00002", "00001", "$AMOUNT", "EUR", 200.00, ""  ],
[ "2022ACT", "12", "001", "00003", "00001", "$AMOUNT", "EUR", 300.00, ""  ]
]
}
```

In the response, the following will be returned in JSON format:

dataprocessingId: data processing ID.

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

To check the status of the data processing, a **GET** request can be used to invoke the URL:

<api-root>/aih/qdl/v1/dataprocessingId

In the response, the following will be returned in JSON format:

status: *RUNNING*/*FAILED*/*COMPLETED* - depending on whether the data processing is in progress, failed or successfully completed.

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

To stop the data processing, a **DELETE** request can be used to invoke the URL:

<api-root>/aih/qdl/v1/dataprocessingId

In the response, the following will be returned in JSON format:

message: "Stop on dataprocessingOid *dataprocessingId*"/"Notify on dataprocessingOid *dataprocessingId*" - depending on whether or not the data processing has finished.

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

DTP run data processing APIs

URL

http://server:port**/tagetikcpm/api/aih/dtp/v1/**

API for running the data processing of a DTP

***IMPORTANT**: The launch of DTP from the API does not support multidimensional processes; it is also necessary to have the user function 0003912 enabled in order to use the following API.*

Runs the data processing of a DTP with *dtp_code* code belonging to the DB identified by the *database_id* and defined on the Analytical Workspace identified by the *workspace_code*.

Method

POST

URL

```
<api-root>/aih/dtp/v1/database_id/workspace_code/dtp_code
```

The following properties related to the execution context must be included in JSON format in the body of the request:

Property	Description	Options
process	Mandatory. Process selected for loading.	-
scenario	Only required for processes with submission by scenario and period, but not needed for single submission processes. Scenario selected for data processing.	-
period	Only required for processes with submission by scenario and period, but not needed for single submission processes. Period selected for data processing.	-
entity	Mandatory. Entity or node selected for data processing	• To indicate the entity, the entity code (e.g. A01) • To indicate a node, the string made up of "GER|<node number indicated in cockpit>" (e.g. GER|01).
contextIndependentRun	Optional. Allows DTP to be launched in context-independent mode. If not indicated, DTP will be run in the standard mode: context-dependent.	• false: standard, context-dependent execution. • true: context-independent execution.
runtimeParameters	Optional. Allows the runtime parameters in the DTP configuration to be filled in.	• AW parameters • Reporting parameters

Examples

{ "process": "CAV1", "scenario": "2020sp", "period": "07", "entity": "A01"} - loading for company A01 with process CAV1 and scenario/period of 2020sp/07

{ "process": "CAV1", "scenario": "2020sp", "period": "07", "entity": "GER\|01"} - loading for node 01 with process CAV1 and scenario/period equal to 2020sp/07

{ "process":"CAV1", "scenario":"2020sp", "period":"07", "entity":"GER\|01", "contextIndependentRun":"true"} - caricamento per il nodo 01 con processo CAV1, scenario/periodo pari a 2020sp/07 e opzione "Indipendente dal contesto" attiva.

{ "process":"CAV1", "scenario":"2020sp", "period":"07", "entity":"A01","runtimeParameters": { "reportingParameters": {"ENTITY": "010\|110", "$SCE_P": "$\|$\|2024SCE", "$PER_P": "02"}, "AWParameters": {"AW_PARAMETER": "AW pararmeter"}}} - upload for Entity A01 with process CAV1, scenario /period equal to 2020sp/07 and runtime parameters.

***Note**: the values for the reporting parameters of dimension type organised by hierarchies or grouping must be given with the following syntax:*

- *Dimension type parameters organised by hierarchy: GER\|NODO or GER\|NODO\|ELEMENT*
- *Dimension type parameters organised by grouping: $\|NODO or $\|NODO\|ELEMENT*

- *To indicate an element that does not belong to a hierarchy/grouping: $|$|ELEMENT*
- *Dimension type parameters without organisational structure: ELEMENT*

***IMPORTANT**: they are not currently supported:*

- *User Rights*
- *for dimension type reporting parameters:*
  - *explicit restrictions*
  - *dependent parameters*
  - *the selection of only nodes or only elements*
  - *multi-selection*
  - *default value*

Data returned

The response returns the following ID in JSON format:
dataprocessingId = data processing ID.

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

API for checking DTP data processing status

Returns the DTP data processing status.

Method

GET

URL

```
<api-root>/aih/dtp/v1/dataprocessingId
```

Data returned

The response returns the data processing status in JSON format:
status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Successfully completed

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

API for stopping DTP data processing

Method

DELETE

URL

```
<api-root>/aih/dtp/v1/dataprocessingId
```

Data returned

The response returns the following ID in JSON format:
message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing in progress

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

API Machine Learning Execute

Introduction

API title:	REST API for ML Execute
Description:	Machine Learning Execute data processing run API
Version:	1.000
Authentication:	OAuth2, API Key, JWT, Basic Auth
Base URL:	https://tenantxyz.api.saastagetik.com/basic https://tenantxyz.api.saastagetik.com/jwt https://tenantxyz.api.saastagetik.com/apikey https://tenantxyz.api.saastagetik.com/oauth2

Prerequisites

The following APIs require function 0004117.

Request format: JSON

Response format: JSON

Shared headers

- **Content-Type**: application/json
- **Authorisation**: Bearer <token>.

Endpoint

Method

POST

URL

```
<api-root>/aih/ml/execute/v1/{database_id}/{workspace_code}/{aa_code}
```

Description

Runs the Execute data processing linked to Advanced analytics with code *aa_code*, belonging to the DB identified by *database_id* and defined in the Analytical Workspace indicated by *workspace_code*. Returns the data processing identifier (dataprocessingId).

The following launch context properties must be included in the body of the request:

Property	Description	Options
Process	Mandatory. Process selected for data processing launch.	
Scenarios	Optional, to be used only for scenario-period processes, and not to be present in the case of single-submission processes. Scenario selected for data processing.	
Period	Optional, to be used only for scenario-period processes, and not to be present in the case of single-submission processes. Period selected for data processing.	
Dimension code	Optional, for use with multidimensional processes only. When not present, filter by Entity dimension.	• It is the code of the analytical dimension (e.g. CHANNEL)

Property	Description	Options
Dimension Filter	Mandatory. Lowest level element or node of the Entity or of the analytical dimension from the data processing will be launched.	• Lowest level elements are specified by code (e.g. A01). • Nodes are specified by the string formed by 'GER|<node number indicated in the dashboard>' (e.g. GER|01).
Train Label	Optional, to be used only if the model to which the Execute data processing is linked includes the train phase.	
Flag delete data before to run Execute	Optional, the default value is false.	
ModelParameters	Optional, allows you to specify the model parameters present in the execute configuration.	

IMPORTANT: In some cases, the POST returns the data processing ID but the execute fails:

- Model parameters with a value greater than 330 characters; the message'The parameter value is too long for the ML data processing' will be displayed in the audit
- Model parameters with a command; the audit will display the message 'The parameters contain no allowed value'

Examples

Request

Launch of execute data processing from multidimensional process with period scenario, on the analytical dimension CHANNEL, from node, on a model with train phase.

Response

The response returns the ID:

```
{
    "process": "API_BU_MULTI",
    "scenario": "2019ACT",
    "period": "01",
    "trainLabelCode": "TL1",
    "dimensionCode": "CHANNEL",
    "dimensionFilter": "H01|01",
    "deleteBeforeRun": false,
    "modelParameters":{
        "N_LOGS": "0",
        "IS_UPDATE": "False",
        "N_OUTPUTS": "OUTPUT_IMPORTANCE, OUTPUT_IMPORTANCE2",
        "N_ROWS": "2",
        "WAIT_TIME": "1"
    }
}
```

Status of data processing

Method

GET

URL

<api-root>/aih/ml/execute/v1/{database_id}/{dataprocessingId}

Description

Returns the Execute data processing status.

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

Example answer

The response returns the ID:

```
{"status": "COMPLETED","parameters": {}}
```

Data processing interruption

DELETE URL method **<api-root>/aih/ml/execute/v1/{database_id}/{dataprocessingId}** Description Allows Execute to stop processing. In the response, the following are returned:
Table Section Outside Table:
Table Row Outside Table:

Table Cell Outside Table: Message Table Cell Outside Table: Description
Table Row Outside Table:
Table Cell Outside Table: Processing interrupted
Table Cell Outside Table: Processing interrupted
Table Row Outside Table:
Table Cell Outside Table: Processing still in progress
Table Cell Outside Table: Processing still in progress

example response

```
{ "message": "Processing interrupted" }
```

IMPORTANT:

The Delete operation indicates that data processing is still in progress in the following cases:

- data processing is in the COMPLETED status
- data processing is in the FAILED status

The delete operation returns error '401 Unauthorised' when the user requesting the interruption is not the same user who launched the data processing. The message 'The current user is not the one who started the processing' is displayed.

API Common Errors

The error cases handled are:

Error	Description
401 Unauthorized	• the user does not exist • the user authenticated with an incorrect password • the user requesting the interruption of the data processing is not the same user who launched it.
400 Bad Request	• Process does not exist • Standard process and the analytical dimension (dimensionCode) is indicated • Analytical workspace (workspace_code) does not exist • Advanced analytics (aa_code) does not exist in the analytical workspace (workspace_code) • Period or scenario indicated in a single submission process • Period or scenario not indicated in a scenario period process • Period or scenario do not belong to the indicated period scenario process. • The analytical dimension (dimensionCode) does not exist • Lowest level element or node (dimensionFilter) not existing • Lowest level element or node do not belong to the analytical dimension • In the rest of GET and DELETE the indicated dataprocessingId does not exist. • Model parameter does not exist • Model parameter with null value • Model parameter required at runtime and not defined in the body of the post
403 Forbidden	• Database (database_id) not associated with the user • the user does not have function 0004117 enabled
404 Not Found	• URL non valid.

Examples

Launch of the POST API, the process is standard but an analytical dimension is indicated

```
{
    "process": "API_BU",
    "scenario": "2020_ACTUAL",
    "period": "01",
    "trainLabelCode": "TL1",
    "dimensionCode": "CHANNEL",
    "dimensionFilter": "010|020",
    "deleteBeforeRun": false
}
```

Response

```
{
    "code": 400,
    "message": "Process is not multidimensional"
}
```

The correct POST body is:

```
{
    "process": "API_BU",
    "scenario": "2020_ACTUAL",
    "period": "01",
    "trainLabelCode": "TL1",
    "dimensionCode": "",
    "dimensionFilter": "010|020",
    "deleteBeforeRun": false
}
```

Dataset comment extraction data processing API

Function

Extracts the comments and attachments present in datasets of the Analytical Workspace. To do this, the data from which to extract the comments (process, workspace, dimensions, etc.) must be specified in the body of the request.

Once the request has been made, the system will create a compressed (.zip) folder containing an XLSX file with the extracted data and any attachments.

User requirements

To use these APIs, the user must be attributed a role for which the following functions are enabled:

- 0001836 - System Reports: Comments
- 0004152 - AIH System Reports: Comments and Attachments

Details of XLSX file contents

The XLSX file will contain the following elements.

Element	Notes
Forms	-
Custom fields	• If a field is encoded, the description will be unencoded. • The Analytical Workspace data values for fields on which the *Personal Data Protection* option is active will be exported in encrypted form.
Dimensions	• All dimensions assigned to this form are filtered on the basis of the caller's user rights. • If a dimension is filtered by a node of the same dimension, all the comments on its children will be shown. If there are further sub-nodes, all the comments on all levels will be shown. • The names of the dimensions are based on the language of the calling user's application. • The descriptions of the dimension elements are in the descriptions language of the calling user's profile, or in the fallback language if that description does not exist. • Descriptions of elements of the analytical dimensions on which the *Personal Data Protection* option is active are exported encrypted.
Value	• Numeric value of the field (if present). To the second decimal digit • Only for MULTIDIMENSIONAL forms
Comment type	Specifies the origin of the comment, or how the comment was inserted ("Navigation" or "Data Entry")
Comments	If there are multiple comments on the same form, all the necessary rows are duplicated, differing only by the Comment field.

Element	Notes
Attachment	• The Attachment field reports the file name as a hyperlink, which opens the relative file. • Attachments are included in the compressed folder returned by the API. • If there are multiple comments on the same form, these are inserted in subsequent rows, duplicating everything but leaving the fields empty up to the Comment field. • If there are several attachments with the same file name, they are differentiated by default by the operating system.
User	The last user to have edited the comment or attachment.
Date	The date of the last change.

URL

```
<api-root>/aih/comments/v1/database_id
```

Parameters

The following parameters can be entered in the body of the request:

Parameter	Description	Type	Required	Example in JSON format
process	Process from which to extract comments.	String	Optional	"process":*<string>*
aw	Analytical workspace from which to extract comments.	String	Mandatory	"aw":*<string>*
datasets	Dataset from which to extract comments.	String	Mandatory	"dataset":*<string>*

Parameter	Description	Type	Required	Example in JSON format
fields	Dimensions from which to extract comments Filters based on the values of a specific dimension. The Name field must contain the field ID, while the Values array must contain the descriptions (in the correct language) to be searched. You can filter using the following fields: • Scenario • Period • Entity • Account • Variation/Detail types • Category • Custom dimensions from 1 to 5 • Currency • CTP entity • CTP Custom Dimension 2 • Cod_Prospetto • Custom Fields (text, number and date) If the dataset is partitioned by Business Cycle or Business Cycle and Entities and does not contain a Scenario, Period and/or Entity field, the form can be filtered in any case, based on the Scenarios,	String	Mandatory	`"fields":[ { "name":<string>, "values": [<string>,<string>...] }, ...`

Parameter	Description	Type	Required	Example in JSON format
	Periods and/or Entities by which they have been partitioned.			
includeNullValues	Includes empty dimension fields in the document. Default: false.	Boolean	Optional	"includeNullValues":*<false>*
columnsAvailable	Columns visible in the document. If not present, all columns will be visible.	String	Optional	"columnsAvailable": *<string>*
Form type	formType: "LINE_BY_LINE" or "MULTIDIMENSIONAL" Specifies the type of form to be extracted. Line-by-Line is the default, but is good practice to insert it.			

Examples

API for filtering based on the Scenarios, Periods and/or Entities by which they are partitioned

```
"fields":[
{
"name":"COD_SCENARIO"/"COD_PERIODO"/"COD_ENTITY",
"values":[<string>,<string>...]
},
{
"name":"COD_SCENARIO"/"COD_PERIODO"/"COD_ENTITY",
"values":[<string>,<string>...]
}
]
```

API for extracting comments from dataset "0000002" in Analytical Workspace "00000001"

- Parameters: Analytical Workspace and Dataset
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002"
}
```

API for extracting comments from dataset "0000002" in Analytical Workspace "00000001" belonging to the "ACT" process

- Parameters: Analytical Workspace, Dataset and Process
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002",
    "process":"ACT"
}
```

API for extracting comments from dataset "0000002" in AW "00000001", belonging to process "ACT", with Scenario "2020_ACT", including empty elements.

- Parameters: Analytical Workspace, Dataset, Process and Scenario
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002",
    "process":"ACT",
    "fields":[
        {
            "name":"scenario",
            "values":["2020_ACT"],
            "includeNullsValues":true
        }
]
}
```

API for extracting comments from dataset "0000002" in AW "00000001", belonging to process "ACT", with Scenarios "2020_ACT" or "2018_ACT"

- Parameters: Analytical Workspace, Dataset, Process and Scenario
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002",
    "process":"ACT",
    "fields":[
        {
            "name":"scenario",
            "values":["2020_ACT","2018_ACT"]
        }
            ]
}
```

API for extracting comments from dataset "0000002" in AW "00000001", belonging to process "ACT", with Scenarios "2020_ACT" or "2018_ACT" and period "01", including the Period's empty fields

- Parameters: Analytical Workspace, Dataset, Process and Scenario
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002",
    "process":"ACT",
    "fields":[
        {
            "name":"scenario",
            "values":["2020_ACT","2018_ACT"]
        },
```

```
        {
            "name":"scenario",
            "values":["01"],
            "includeNullValues":true
        }
            ]
}
```

ETL via APIs

Introduction

CCH Tagetik also allows you to run ETL job data processing via OPEN RESTful APIs.

STATUS	SWAGGER
ACTIVE	-
FORMAT	ROOT ENDPOINT
REST/OpenAPI	**<api root>/etl/job/v1**

Access conditions

To be able to use these specific APIs, the user must be authenticated (Basic Auth, OAuth2).

APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both *http* and *https* protocols.

For more details on authentication and enabling, see REST API Overview.

APIs for running ETL jobs

Method

POST

URL

```
<api-root>//etl/job/v1/database_id/etl_job_code
```

http://*server*:*port*/*tagetikcpm*/*api*/*etl*/*job*/*v1*/database_id**/*etl_job_code***

Parameters

database_id = ID of the database on which to run the ETL

Property

The following property can be included in JSON format in the body of the request

Property	Description	Options
process	If the ETL job requires it, this allows you to indicate the process with which it must be run.	-
etlParameters	If the ETL job uses ETL parameters in the ETL routine tasks, their values can be indicated by specifying the concatenation between *etl_domain_code*|*etl_parameter_code* as the parameter name.	Parameter types: • From CCH Tagetik, from Dimension dictionary, Free or from Imported Data: specifies a value or a list of values separated by **,** if the parameter accepts multiselection. • From Imported data intersection: specifies a value composed of the concatenation of the values of the tuple separated by the **;** character or a list of previously described values separated by **,** if the parameter accepts multiselection.

Example

```
{"process" : "ACTUAL","etlParameters" : [{"code" : "ED1|ENTITY","value": "001"},{"code" :
"ED2|SCENARIO_PERIOD","value": "2022ACT;01"}]}
```

Data returned

In the response, the following will be returned in JSON format:

- the following data processing ID:
- **dataprocessingId**
- an error will be returned if the parameter validation has failed

```
{ "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }
```

APIs for checking ETL job data processing status

```
<api-root>/etl/job/v1/dataprocessingId
```

Method

GET

URL

Data returned

The response returns the data processing status in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully
WARNING	Completed with warnings

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

APIs for stopping ETL job data processing

Method

DELETE

URL

```
<api-root>/etl/job/v1/dataprocessingId
```

In the response, the following ID will be returned in JSON format:

message: "Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing with reported stop but currently still in progress

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

Access to Master Data Management functions via APIs

Introduction

CCH Tagetik makes it possible to run Master Data Management data processing via APIs (RESTful APIs) developed according to the OData V4.0 standard.

STATUS	SWAGGER
ACTIVE	-
FORMAT	ROOT ENDPOINT
REST / OpenAPI	**<api root>/mdm**

Certain conditions must be met to use this consultation method.

Access conditions

To be able to use these specific APIs, the user must be authenticated (Basic Auth, OAuth2).

APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both *http* and *https* protocols.

For more details on authentication and enabling, see REST API Overview.

API for running the export (DB to File)

Method

POST

URL

```
<api-root>/mdm/export/v1/routine_code
```

Parameters

routine_code = routine MDM to be exported

***IMPORTANT**: If the indicated Routine MDM is not DB to File, an error message is returned.*

Data returned

In the response, the following ID will be returned in JSON format:

dataprocessingId = data processing ID.

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

API for checking export status (DB to File)

Method

GET

URL

```
<api-root>/mdm/export/v1/dataprocessingId
```

Data returned

In the response, the data processing status will be returned in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

fileName_*[routine_name]*: name of the produced file

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED", "parameters": {"fileName_001": "tcpm_mdmTables_USER_DB_xxx_part_1_of_1.zip"}}

API for stopping the export (DB to File)

Method

DELETE

URL

```
<api-root>/mdm/export/v1/dataprocessingId
```

Data returned

In the response, the following ID will be returned in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Requests the interruption of data processing still running
Notify on dataprocessingOid	Requests the interruption of data processing that has already ended. The system responds with the end of processing message.

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

API for running the import (File to DB)

Method

POST

URL

```
<api-root>/mdm/import/v1/routine_code
```

Parameters

routine_code = routine MDM to be imported

***IMPORTANT**: If the indicated Routine MDM is not File to DB, an error message is returned.*

Property

The following properties can be included in JSON format in the body of the request.

Property	Description	Options
filename	Mandatory. Files to import.	-
endpoint	Endpoint to be used if the file is located in a remote directory. See Pagina Endpoint.	-
dir	Directory in which the files are located	If an endpoint is specified, it allows the sub-directory to be specified based on the endpoint's root. If an endpoint has not been specified, the following can be specified: • empty field = directory configured as a CCH Tagetik writable folder • relative path = writable folder sub-directory • absolute path = generic directory indicated in the Allowed Directories

Examples

{ "filename":"export.zip", "endpoint":"", "dir":""} - import of the "export.zip" file from the *Writable folder*

{ "filename":"export.zip", "endpoint":"", "dir":"tmp"} - import of the "export.zip" file from the "tmp" sub-directory of the *Writable folder*

{ "filename":"export.zip", "endpoint":"", "dir":"C:\impexp"} - import of the "export.zip" file from the "C:\impexp" directory

{ "filename":"export.zip", "endpoint":"SFTP", "dir":""} - import of the "export.zip" file via the SFTP endpoint

{ "filename":"export.zip", "endpoint":"SFTP", "dir":"tmp"} - import of the "export.zip" file present in the "tmp" sub-directory of the SFTP endpoint

Data returned

In the response, the following ID will be returned in JSON format:

dataprocessingId: data processing ID.

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

API for checking import status (File to DB)

Method

GET

URL

```
<api-root>/mdm/import/v1/dataprocessingId
```

Data returned

In the response, the data processing status will be returned in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

API for stopping the import (File to DB)

Method

DELETE

URL

```
<api-root>/mdm/import/v1/dataprocessingId
```

Data returned

In the response, the following ID will be returned in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Requests the interruption of data processing still running
Notify on dataprocessingOid	Requests the interruption of data processing that has already ended. The system responds with the end of processing message.

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

API for running the import (DB to DB)

Method

POST

URL

```
<api-root>/mdm/import/v1/routine_code
```

Parameters

routine_code = routine MDM to be imported

***IMPORTANT**: If the indicated Routine MDM is not DB to DB, an error message is returned.*

Data returned

In the response, the following ID will be returned in JSON format:

dataprocessingId = data processing ID

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

API for checking import status (DB to DB)

Method

GET

URL

```
<api-root>/mdm/import/v1/dataprocessingId
```

Data returned

In the response, the data processing status will be returned in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Completed successfully

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

API for stopping the import (DB to DB)

Method

DELETE

URL

```
<api-root>/mdm/import/v1/dataprocessingId
```

Data returned

In the response, the following ID will be returned in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Requests the interruption of data processing still running
Notify on dataprocessingOid	Requests the interruption of data processing that has already ended. The system responds with the end of processing message.

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

Application Job exposure with RESTful API

CCH Tagetik exposes the execution of application jobs using Open RESTful APIs.

STATUS	SWAGGER
ACTIVE	-
FORMAT	ROOT ENDPOINT
OData	**<api root>/dataprocessing/job/v1**

Application job

To run the Application job, you can call the following URL through a **POST** method :

http://*server*:*port*/*tagetikcpm/api/dataprocessing/job/v1/*database_id**/job_code***

the application job *job_code* will be run on the environment specified via *database_id*.

 An error will be returned if the application job code does not exist.

Currently managed tasks are:

- ETL
- Loading to Analytical Workspace
- Update Financial Workspace from Analytical Workspace
- DTP
- Stored procedures
- Calculation logics
- Preliminary data processing on Original scenarios
- Preliminary on Consolidation area
- Data processing for Legal Entities
- Consolidation

In the response, the following will be returned in JSON format:

dataprocessingId: data processing ID

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

To check the execution status of the application job, a GET request can be used to invoke the URL:

http://*server*:*port*/*tagetikcpm/api/dataprocessing/job/v1/*dataprocessingId

In the response, the following will be returned in JSON format:

status: *RUNNING*/*FAILED*/*COMPLETED* - depending on whether the data processing is running, failed or successfully completed.

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

To interrupt the execution of the application job, you can call the following URL via **DELETE** method:

http://*server*:*port*/*tagetikcpm/api/dataprocessing/job/v1/*dataprocessingId

In the response, the following will be returned in JSON format:

message: "Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*" - depending on whether or not the data processing is complete.

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

 Warning: For the job to be executed via API, all tasks must use fixed parameters set to 'From elements list'. Cases where a parameter is set to 'From Parameter' are not supported.

Access to audit data via API

Introduction

Audit logs can be accessed by specially authorised and trained users, including through APIs (RESTful APIs) developed according to the OData v4.0 standard.
By default, the elements are ordered with respect to the dateTi*meUtc property in descending order, from most recent to least recent.*

Note The service returns up to a maximum of 10,000 items.

Certain conditions are required to use this consultation mode.

Authorisation

To be able to use this specific API, the user must have the 0001286 function enabled at least in read mode.

APIs for data processing

STATUS	SWAGGER
ACTIVE	-
FORMAT	ROOT ENDPOINT
OData	**<api root>/audit/v1/dataprocessing**

The URLs for obtaining the audit data on data processing are provided below:

URL	Description
`<api-root>/audit/v1/dataprocessing/`	Service displayed
`<api-root>/audit/v1/dataprocessing/$metadata`	Returns the following metadata: • Scheme • EntityType • EntityContainer • EntitySet In particular, data types are specified for all entity properties and, in the case of changes, the additionalFields property is present
`<api-root>/audit/v1/dataprocessing/`	Returns the name and description of all the application's data processing.
`<api-root>/audit/v1/dataprocessing/<ELABORATION_CODE>`	Returns all occurrences of the selected data process (ELABORATION_CODE).

The *additionalFields* property shows the data changed during data processing; it lists a collection of values, each of which has three properties:

- field: shows the name of changed data
- old_<value> = value before editing
- new_<value> = value after editing

Contents of the data returned

By invoking the second endpoint, the following data are returned:

Element	Description
oid	Elaboration code
dateTimeUtc	Date and time performed (format: ISO 8601, UTC)
status	Data processing outcome
parts	Processing step, if divided into parts (0 = pre-run)
user	Executing user
database	Execution database
duration	Data processing duration (millisec)
client	Data processing client
ipClient	IP address of the device originating the data processing

These data are followed by the dimensional parameters, if present, together with the relative values.

APIs for managing tables and data

The URLs for obtaining audit data on the management of tables and data are provided below:

URL	Description
`<api-root>/audit/v2/datamanagement/`	Service displayed
`<api-root>/audit/v2/datamanagement/$metadata`	Returns the following metadata: • Scheme • EntityType • EntityContainer • EntitySet In particular, the data types of the columns of each table are specified, and the *additionalFields* property is present in case of changes.
`<api-root>/audit/v2/datamanagement/`	Returns the code and description of the edited tables.
`<api-root>/audit/v2/datamanagement/TABLE_CODE`	Returns all occurrences of the changes in the indicated table (TABLE_CODE)

Contents of the data returned

By invoking the second endpoint, the following data are returned:

Element	Description
oid	Operation code
dateTimeUtc	Date and time edited (format: ISO 8601, UTC)
status	Edit outcome
user	Executing user
database	Execution database
duration	Data processing duration (ms)
client	Data processing client
ipClient	IP address of the device originating the data processing
editType	Type of edit (entry, edit or deletion)
factTable	Type of table edited: • true = facts table • false = master table
key	Physical key of the edited data

This data may be followed by *additionalFields* properties for each column of the selected table if changes are made:

- field: shows the name of changed data
- old_<value> = value before editing
- new_<value> = value after editing

Multi-value properties are aggregated on the same row and separated by a comma.

APIs for database logins

STATUS	SWAGGER
ACTIVE	-
FORMAT	ROOT ENDPOINT
OData	**<api root>/audit/v1/database**

The URLs for obtaining audit data on database logins are provided below:

URL	Description
<api-root>/audit/v1/database/	Service displayed
<api-root>/audit/v1/database/$metadata	Returns the following metadata: • Scheme • EntityType • EntityContainer • EntitySet
<api-root>/audit/v1/database/CONNECT_TO_DATABASE	Returns a list of logins to the various databases.

Contents of the data returned

By invoking the second endpoint, the following data are returned:

Element	Description
oid	Operation code
dateTimeUtc	Date and time of login format: ISO 8601, UTC)
status	Operation outcome
user	Executing user
database	Execution database
duration	Data processing duration (ms)
client	Data processing client
ipClient	IP address of the device that ran the data processing

API for user logins

The URLs for obtaining audit data on user logins are provided below:

URL	Description
<api-root>/audit/v1/user/	Service displayed
<api-root>/api/audit/v1/user/$metadata	Returns the following metadata: • Scheme • EntityType • EntityContainer • EntitySet
<api-root>/audit/v1/user/LOGIN	Returns a list of user logins.

Contents of the data returned

By invoking the second endpoint, the following data are returned:

Element	Description
oid	Operation code
dateTimeUtc	Date and time of login (format: ISO 8601, UTC)
status	Operation outcome
user	Executing user
client	Client used by the user
ipClient	IP address of the device that ran the data processing
sessionDuration	Session duration (ms), terminated by logout or timed out
timedOut	Type of session interruption: • true = session timed out • false = user logout

Filter audit data through API

Introduction

To reduce the quantity of data retrieved, several types of filter can be applied:

- to header properties
- to dimensional parameters

Query parameter

$filter=()

Filter heading properties: filter by date

Property

dateTimeUtc (format: ISO 8601, UTC)

Description

Filter data based on operation date.

Operators

Operator	Net result
gt	Shows records from dates after the selected date.
lt	Shows records from dates prior to the selected date.
ge	Shows records from or after the selected date.
le	Shows records from or prior to the selected date.

Example

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/dataprocessing/SOLLECITATORE_ CERTIFICAZIONI?$filter=(dateTimeUtc lt 2020-08-21T08:01:26.758Z)

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/datamanagement/CONTO?$filter=(dateTimeUtc gt 2020- 12-21T**08**:00:00.000Z) and (dateTimeUtc lt 2020- 12-21T**12**:00:00.000Z)

Particular features of the dateTimeUtc property

The value stored in the database is more precise than can be specified in the endpoint. For this reason, the search results will be based on the level of precision of the endpoint.

Filter header properties: string-type data

Property

oid, **status**, **user**, **database**, **client**, **ipClient**, **editType** and **key**.

Description

Filter data based on header properties.

Operators

Operator	Net result
eq	Shows records for which the parameter is the same as the one reported in quotes.
ne	Shows records for which the parameter is different from the one reported in quotes.

Example

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/datamanagement/UTENTE?$filter=(clientIp eq '10.10.10.10')

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/datamanagement/UTENTE?$filter=(user eq 'UTENTEA') or (user eq 'UTENTEB')

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/datamanagement/UTENTE?$filter=(key eq '%7BTEST, GRAFFE%7D')

***Note**: if the **key** property contains braces {}, encoding must be performed as in the example.*

Filter dimensional parameters

Description

This filter is applied to the data processing APIs. It filters data by applying dimensional parameters, invoking the endpoint which returns the metadata.

Operators

Operator	Net result
eq	Shows records whose header string is the same as the one reported in quotes.
ne	Shows records with a different header string from the one reported in quotes.

Example

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/dataprocessing/ESPLOSIONE(periodo eq '10')

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/datamanagement/ESPLOSIONE(raccolta ne 'ACT')

In the following two examples, the records shown are those where the “currency” parameter has ‘no value’:

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/datamanagement/AGGIORNA_PARAM_BANCARIE(valuta eq 'no value')

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/datamanagement/AGGIORNA_PARAM_BANCARIE(valuta eq null)

***Note**: it is not possible to filter for a parameter that has not been specified (e.g. “currency” : null).*

Pagination of results

Description

Makes it possible to subdivide the data returned on pages with specific characteristics. This type of query allows retrieval of a maximum of 10,000 elements.

Parameters

Parameter	Net result
$top=N1	(N1 positive integer) Reports N results.
$skip=N2	(N2 positive integer) Omits the first N results.
?$top=N1&skip=N2	Combines the results of the two parameters.

***Note**: It is possible to use several query parameters by concatenating them with the & symbol.*

Example

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/dataprocessing/SOLLECITATORE_CERTIFICAZIONI?$top=2&$skip=5

http://127.0.0.1:8080/tagetikcpm/api/audit/v1/datamanagement/CONTO?$top=5

Results sorting

Data can be sorted by using:

Parameter	Net result
$orderby=P1 ORD,P2 ORD, ...	(P1, P2, ...) These represent the set of properties you want to sort on (you can sort by one or more properties) (ORD) This represents the *asc or* desc sorting type: for ascending and descending sorting respectively.

***Note**: By default, if no sort type is specified, the ascending sort will be applied.*

The properties on which the sorting can be performed are the header properties: oid, dateTimeUtc, status, user, database (not present for the user login api), client, ipClient.

Moreover, sorting by *key* is available for the data management APIs

Several properties can be combined by following **?$orderby=*P1 ORD,P2 ORD,P3 ORD*.**

Example

http://127.0.0.1:8080/tagetikcpm/api/audit/v2/datamanagement/CONTO?$orderby=dateTimeUtc desc

http://127.0.0.1:8080/tagetikcpm/api/audit/v2/datamanagement/CONTO?$orderby=user asc,dateTimeUtc

Caching system

To optimise the performance of the query through APIs, a caching system has been introduced through the system property **it.grupposervizi.easy.audit.odata.cache.cron**.

The cron expression contains six asterisks (*) which indicate the following fields:

- seconds
- minutes
- hour
- day
- month
- year

***Note**: without that system property, the default value is 0 30 * * * *, and therefore a refresh is performed every 30 minutes.*

The following data are saved in the cache:

- dimensional characteristics, for data processing
- all the properties of the edited table, for the management of the tables and data

Changes made after the cache has been built will only appear after the next cache update. For data processing, the header properties and parameters present in the cache are always displayed.

User Provisioning

User provisioning SCIM API

Tagetik exposes user provisioning REST API following the System for Cross-domain Identity Management (SCIM) 2.0 API. SCIM specification is designed to make managing user identities in cloud-based applications and services easier.

In this manual, we will describe what part of SCIM API has been implemented following the specification detailed in the RFC 7644.

STATUS	SWAGGER
ACTIVE	-
FORMAT	ROOT ENDPOINT
SCIM v2	**<api root>/scim/v2**

Authorisation

Users accessing SCIM APIs should also have access to the application repository database as an Admin. The default $SYSADMIN role or any roles derived from this one will satisfy this requirement.

User endpoints

This endpoint allows users to be created, modified or deleted and is visible from the path:

```
<api-root>/scim/v2/Users
```

By default, users for whom the value of the FLAG_ELIMINATED ('deleted flag') column within the REP_USER table is equal to DELETED('1'), RECODED('2') or FORGOTTEN('5') are filtered out and cannot be extracted by the SCIM API.

Operations

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (SCIM Exception)
Create	POST	User	-	-	User	201 (Created)	405 (Method not permitted) 409 (Conflict)
Read	GET	-	userId	-	User	200 (OK)	404 (Not found)
Delete	DELETE	-	userId	-	-	200 (OK)	404 (Not found)
Replace	PUT	User	userId	-	User	200 (OK)	404 (Not found)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (SCIM Exception)
Search	GET	-	-	filter sortBy sortOrder startIndex count (all parameters are optional)	User List	200 (OK)	400 (Invalid request) 405 (Method not permitted)
Update	PATCH	PatchRequest	userId	-	User	200 (OK)	400 (Invalid request) 404 (Not found)

SCIM exceptions

Examples of invocation

HTTP Status	Descriptions
400 (Invalid request)	It occurs when the request does not match the service specification, e.g. by invoking the 'search' method when the filter is not well defined (wrong parameters/syntax errors) or by invoking the 'update' method when the Patch request is invalid.
404 (Not found)	It occurs when the requested resource is non-existent; for example, if an attempt is made to replace, update, search or delete a user but there is no user matching the identification code used.
405 (Method not permitted)	It occurs when the HTTM method is not permitted for the requested endpoint or if the serialised object supplied does not correspond to the object expected by that method. For instance, when an incorrect user object is provided in the body of the request.
409 (Conflict)	This occurs when, for example, a request is made to create a new user using a user ID code already in use in the system.

Supported standard SCIM fields

The following table shows the standard SCIM user fields supported.

SCIM User Field	Supported cardinality (collection only)	Supported Values
userName	-	-
name.givenName	-	-
name.familyName	-	-
emails	only 1	*String *Formula for establishing type work
phoneNumbers	only 1	*String *Formula for establishing type work
meta.lastModified		
password		
userType		L(Local)/E(External)
groups		
preferredLanguage	only 1	*LanguageCaption - CountryCaption
active		True/False

*Note: the preferredLanguage field only supports values in the format LanguageCaption - CountryCaption (example: en-US) and only values managed by the Tagetik application are allowed

If values are used for the preferredLanguage field that do not comply with the required format or are not managed by the application during creation or update, a Status Code '400 Bad request' is sent with an error message 'Invalid Language Code' or 'Language Code Not Managed'.

Custom fields

The following table shows the custom user fields of CCH Tagetik.

SCIM User Field	Description	Supported Values
userReferences	Indicates the existing user from whom the new user will inherit roles	-
locked	user lock status	True/False (immutable, equal to the opposite of the 'active' field)
mustChangePwdAtNextLogin	Forces user to change password at next login	True/False
interactionType	Client interaction type	0 (interactive)/1 (Machine to Machine)
lastLogin	Last access in application	-
validityStartDate	Validity start date	**
validityEndDate	Validity end date	**
descriptionLanguage	Descriptions Language	-
userRoles	The list of databases the user can access and the corresponding role	-
dbAllowed	List of databases associated with the user, with ID, description and lock status	-

**Note: when creating or updating, it is possible to specify the time for the fields validityStartDate and validityEndDate. Nevertheless, any time entered is ignored and replaced with '00:00:00' for both fields.

SCIM Enterprise User Schema Extension fields

The following table shows the supported Enterprise scheme user fields.

SCIM User Field	Description	Supported Values
department	Specifies the user's department	-

Examples

Show list of all users	
Method	GET
URL	`<api-root>/scim/v2/Users`
Body	-
Note	

Get single user	
Method	GET
URL	`<api-root>/scim/v2/Users/MYUSER`
Body	-

Get single user

Example answer


```
{
 "schemas": [ "urn:ietf:params:scim:schemas:core:2.0:User", "urn:tgk:params:scim:schemas:extension:2.0:User",
"urn:ietf:params:scim:schemas:extension:enterprise:2.0:User" ],
 "id": "MYUSER",
 "externalId": "MYUSER",
 'meta':
{
 "resourceType': 'User',
 "lastModified": 1700149220782
},
 "userName": "MYUSER",
 "name':
 {
 "familyName": "My",
"givenName": "User".
 },
 "userType': 'E',
 "preferredLanguage': 'en-IT',
 "active": true,
 "emails": [ { "value": "myuser@example.com" } ],
 "partiallyBlocked': false,
 "urn:tgk:params:scim:schemas:extension:2.0:User":
{
 "userReferences": [ "REF_USER_CODE" ],
 "locked": false,
 "mustChangePwdAtNextLogin": false,
 "interactionType": "INTERACTIVE",
 "lastLogin": "2024-01-01T10:10:10.000Z",
 "validityStartDate": "2020-01-01T00:00:00Z",
 "validityEndDate": "2030-01-01T00:00:00Z",
"descriptionLanguage": "es",
```

```
"userRoles": [ { "dbId": "[!]", "role": "$ALL" }, { "dbId": "TCPM_DEMO_DEV", "role": "$ALL" } ],
"dbAllowed": [ {"id": "TCPM_DEMO_DEV", "description": "TCPM_DEMO_DEV", "locked": false}]
},
"urn:ietf:params:scim:schemas:extension:enterprise:2.0:User":
{
 "department": "User Department"
}
```


Note With this request we obtain the attributes of an existing user MYUSER with the preferredLanguage 'en-IT'.

Create new user

Method POST

URL `<api-root>/scim/v2/Users`

Body


```
{
 "schemas": [ "urn:ietf:params:scim:schemas:core:2.0:User" ],
 "externalId": "MYUSER",
 "userName": "MYUSER",
 "userType': 'E',
 "active": true,
 "preferredLanguage': 'en-IT',
 "emails":[ { "value":"myuser@example.com", "type":"work", "primary": true } ],
 "name": { "familyName": "User", "givenName": "My" },
 "urn:tgk:params:scim:schemas:extension:2.0:User": { "userReferences": [ "REF_USER_CODE" ],
"descriptionLanguage": "it" }
}
```


Note This request adds an external user MYUSER with email myuser@example.com and with preferredLanguage 'en-IT', and sets the reference user to 'REF_USER_CODE'.

Apply changes to existing users

Method PATCH

URL `<api-root>/scim/v2/Users/MYUSER`

Body


```
{
 "schemas":["urn:ietf:params:scim:api:messages:2.0:PatchOp",
"urn:tgk:params:scim:schemas:extension:2.0"],
 "Operations":[{ "op":"add",
"path":"urn:tgk:params:scim:schemas:extension:2.0:User:userReferences", "value":["REF_
USER_CODE"]}]
}
```


Note This request adds the reference user 'REF_USER_CODE' to the existing user 'MYUSER'.

To replace the existing reference user, use " `"op":"replace"` instead of `"op":"add"`.

Apply changes to user roles	
Method	PATCH
URL	<api-root>/scim/v2/Users/MYUSER

Body	{
	"schemas":["urn:ietf:params:scim:api:messages:2.0:PatchOp",
	"urn:tgk:params:scim:schemas:extension:2.0"],
	"Operations":[{"op":"add",
	"path":"urn:tgk:params:scim:schemas:extension:2.0:User:userRoles", "value":[{"dbId":"DB_
	ID", "role":"COD_RUOLO"}]}]
	}

Note	This request adds the role 'COD_RUOLO' to the existing user 'MYUSER' for the database 'DB_ID'. To replace the role, use ' "op":"replace" instead of "op":"add". Please note that, starting from SP34, for the add and replace operations involving the user–application DB association, the "Application DB Restrictions" field will be set to "Restricted" by default, in order to ensure the same behaviour as the CCH Tagetik web interface.

Assign type 'work' to email	
Method	PATCH
URL	<api-root>/scim/v2/Users/MYUSER

Body	{
	
	"schemas":["urn:ietf:params:scim:api:messages:2.0:PatchOp",
	"urn:tgk:params:scim:schemas:extension:2.0",
	"urn:ietf:params:scim:schemas:extensions:enterprise:2.0:User"],
	"Operations":[{"op":"add", "path":"emails[type eq \"work\"].value", "value":"test@test.it"}]}]
	
	}

Note	This request modifies the 'email' field to set its type to 'work'.

Delete user	
Method	DELETE
URL	<api-root>/scim/v2/Users/MYUSER
Body	-
Note	This request deletes the MYUSER user.

Groups Endpoint

This endpoint allows groups to be created, edited or deleted. In Tagetik, the concept of a group is linked to reference users: each user is a group and the users inheriting from them represent the members of the group

<api-root>/scim/v2/Groups

Operations

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (SCIM Exception)
Create	POST	Group	-	-	Group	201 (Created)	405 (Method not permitted) 409 (Conflict)
Read	GET	-	groupId	-	Group	200 (OK)	404 (Not found)
Delete	DELETE	-	groupId	-	-	200 (OK)	404 (Not found)

Operation	Http Method	Body of the request	Path variable	Query string parameters	Body of the answer	HTTP response body	Response Status (SCIM Exception)
Search	GET	-	-	filter sortBy sortOrder startIndex count excludedAttributes=members (all parameters are optional)	Group List	200 (OK)	400 (Invalid request) 405 (Method not permitted)
Update	PATCH	PatchRequest	groupId	-	Group	200 (OK)	400 (Invalid request) 404 (Not found)

SCIM exceptions

Examples of invocation

HTTP Status	Descriptions
400 (Invalid request)	It occurs when the request does not match the service specification, e.g. by invoking the 'search' method when the filter is not well defined (wrong parameters/syntax errors) or by invoking the 'update' method when the Patch request is invalid.
404 (Not found)	It occurs when the requested resource is non-existent; for example, if an attempt is made to replace, update, search or delete a group but there is no group (reference user) that matches the ID code used.
405 (Method not permitted)	It occurs when the HTTM method is not permitted for the requested endpoint or if the serialised object supplied does not correspond to the object expected by that method. For instance, when an incorrect group object is provided in the body of the request.
409 (Conflict)	This occurs when, for example, a request is made to create a new group using an ID code of a group/already in use in the system.

Supported standard SCIM fields

The following table shows the standard SCIM group fields supported.

SCIM User Field	Supported cardinality (collection only)	Supported Values
id	-	string
displayName	-	string
members	n	"value" elements
value	1	string (id user)

Response Additional fields

SCIM User Field	SCIM User Field
totalResults	integer
startIndex	integer
Resources	collection of all requested groups

Examples

Show list of all groups	
Method	GET
URL	`<api-root>/scim/v2/Groups`
Body	-
Note	

Get single group	
Method	GET
URL	<api-root>/scim/v2/Groups/MYGROUP
Body	

Example answer	{
	"schemas": [
	"urn:ietf:params:scim:schemas:core:2.0:Group"
	],
	"id": "MYGROUP",
	"displayName": "MYGROUPdesc",
	"members": [
	{
	"value": "NEW_"
	},
	{
	"value": "NEW_USER"
	}
	]
	}

Note	This request returns the members of an existing MYGROUP group

Create new group	
Method	POST
URL	<api-root>/scim/v2/Groups

Body	{
	"id": "MYGROUP",
	"displayName": "MYGROUP_desc",
	"members": [
	{
	"value": "NEW_USER"
	}
	]
	}

Note	This request adds a MYGROUP group and sets the member "NEW_USER"

Apply changes to existing group	
Method	PATCH
URL	<api-root>/scim/v2/Groups/MYGROUP

Apply changes to existing group	

Body	{
	"Operations": [
	{
	"op": "add",
	"path": "members",
	"value": [
	{
	"value": "NEW"
	},
	{
	"value": "NEW_USER"
	}
	]
	}
	]
	}

Note	This request adds the members 'NEW' and 'NEW_USER' to the existing group 'MYGROUP'. To replace existing members, use ' `"op":"replace"` instead of `"op":"add"`.

Apply changes to existing group	
Method	PATCH
URL	`<api-root>/scim/v2/GroupsUsers/MYGROUP`

Body	{
	"Operations": [
	{
	"op": "remove",
	"path": "members[value eq \"NEW\"]"
	}
	]
	}

Note	This request removes the member 'NEW' from the existing `MYGROUP` group. Supported operators are 'eq' and 'ne'. members 'NEW' and 'NEW_USER' the reference user 'REF_USER_CODE' to the existing group 'MYGROUPUSER'.

Delete group	
Method	DELETE
URL	`<api-root>/scim/v2/Groups/MYGROUP`
Body	-
Note	This request deletes the MYGROUP group.

Schemas endpoint

This endpoint allows you to retrieve the SCIM JSON schemas used by Tagetik user provisioning functionalities and it is published at the following path:

`<api-root>/scim/v2/Schemas`

Operations

The endpoint provides the following operations:

Operation	Http Method	Path Variable	Response Body	HTTP Response Status	Response Status (SCIM Exception)
Lists of all supported schemas	GET	-	Schema List	200 (OK)	-
Get schema by urn	GET	-	Scheme	200 (OK)	404 (Not Found)

SCIM Exceptions

Invocation examples

HTTP Status	Descriptions
404 (Not Found)	It occurs when trying to read a schema, but no schema with the specified URN is available

Examples

Read a list of all supported schemas	
Method	GET
URL	`<api-root>/scim/v2/Schemas`
Body	-
Notes	

Read a specific schema	
Method	GET
URL	`<api-root>/scim/v2/Schemas/urn:tgk:params:scim:schemas:extension:2.0:User`
Body	-
Notes	Retrieves the "User" schema extension provided by CCH Tagetik.

Bulk endpoint

This endpoint allows you to create, edit or delete multiple users within a single bulk request and it is exposed in the path:

`<api-root>/scim/v2/Bulk`

Operations

Operation	Http Method	Request Body	Path Variable	Query String Parameters	Response Body	HTTP Response Status	Response Status (SCIM Exception)
Bulk	POST	BulkRequest	-	-	BulkResponse	200 (OK)	400 (Bad Request)

SCIM Exceptions

Invocation examples

HTTP Status	Descriptions
400 (Bad Request)	It occurs when the bulk request does not match the service specification, for example invoking it providing the same bulk id to more than one operation inside the bulk request or missing some required attribute.

Supported BulkRequest fields

The supported standard SCIM User fields are listed in the following table.

SCIM User field	Supported cardinality (for collection only)	Supported values
Operations	1..*	-

Operations fields

The supported standard SCIM Operations fields are listed in the following table. Not all the SCIM Operations standard fields are currently supported by CCH Tagetik.

SCIM User field	Supported cardinality (for collection only)	Supported values
method	1..*	-
bulkId	-	-
path	-	-
data	-	-
location	-	-
response	-	-
status	-	-

Examples

List all users	
Method	POST
URL	`<api-root>/scim/v2/Bulk`

List all users

Body

```
{
"schemas": ["urn:ietf:params:scim:api:messages:2.0:BulkRequest"],
"Operations": [{
    "method": "POST",
    "path": "/Users",
    "bulkId": "1",
    "data": {
        "schemas": ["urn:ietf:params:scim:schemas:core:2.0:User"],
        "externalId": "testUser1",
        "userName": "testUser1",
        "name": {
            "familyName": "testUser1",
            "givenName": "testUser1"
        },
        "urn:tgk:params:scim:schemas:extension:2.0:User": {
            "userReferences": ["TAGETIK"]
        }
    }
},{
    "method": "POST",
    "path": "/Users",
    "bulkId": "2",
    "data": {
        "schemas": ["urn:ietf:params:scim:schemas:core:2.0:User"],
        "externalId": "testUser2",
        "userName": "testUser2",
```

List all users

```
            "name": {
                "familyName": "testUser1",
                "givenName": "testUser1"
            },
            "urn:tgk:params:scim:schemas:extension:2.0:User": {
                "userReferences": ["TAGETIK"]
            }
        }
    },{
        "method": "DELETE",
        "path": "/Users/testUser3"
    }]}
```

List all users

Sample Response


```
{
    "schemas": ["urn:ietf:params:scim:api:messages:2.0:BulkResponse"],
    "Operations": [
        {
            "method": "POST",
            "bulkId": "1",
            "location": "/Users/testUser1",
            "status": "201"
        },{
            "method": "POST",
            "bulkId": "2",
            "location": "/Users/testUser2",
            "status": "201"
        },{
            "method": "DELETE",
            "location": "/Users/testUser3",
            "status": "200"
        }
    ]
}
```


Notes This call combines two user creations (testUser1, testUser2) and one deletion (testUser3).

Other APIs (uso interno)

Configuration and Reporting languages - API

Introduction

STATUS	SWAGGER
ACTIVE	–
FORMAT	ROOT ENDPOINT
REST / OpenAPI	**<api root>/settings/**

CCH Tagetik allows to receive Configuration and Reporting languages via APIs (RESTful APIs).

Certain conditions are required to use this consultation mode.

Access conditions

To be able to use these specific APIs, the user must be authenticated with the authentication mode chosen for CCH Tagetik (Authentication - Cloud).

APIs must also be enabled in the Repository.

API for reading languages

Method

GET

URL

```
http://server:port/tagetikcpm/api/settings/languages/v1
```

Data returned

The response, in JSON format, returns the list, in alphabetical order, of the languages (FIELD_STRINGA) contained in the REP_CONFIGURATION table.

status: 200 OK

Ex:{"applicationLanguages": ["aa","ar","de","en","es","it","zh","zu"]}

Database Lock API

Tagetik exposes REST APIs to orchestrate database maintenance. Through administrative APIs it's possible to either lock/unlock appication databases (endpoint) or the entire application, eg. for overall or repository maintenance activities.

Functionalities supported by such APIs are described in Pagina dell'anagrafica dei database.

STATUS	SWAGGER
ACTIVE	**<api root>/admintools/swagger-ui/index.html**
FORMAT	ROOT ENDPOINT
Open API	**<api root>/admintools**

Authorisation

Users accessing SCIM APIs should also have access to the application repository database as an Admin. The default $SYSADMIN role or any roles derived from this one will satisfy this requirement.

Access to Endpoint functions via API

Introduction

CCH Tagetik also allows endpoints to be managed via APIs (RESTful APIs).

Certain conditions are required to use this consultation mode.

Access conditions

To be able to use these specific APIs, the user must be authenticated (Basic Auth, OAuth2).

APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both *http* and *https* protocols.

For more details on authentication and enabling, see REST API Overview.

API to read default Endpoints

Method

GET

URL

```
http://server:port/tagetikcpm/api/admintools/endpoint/v1/default
```

API to read all Endpoints

Method

GET

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/elements
```

API to read all Endpoints filtered by code

Method

GET

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/elements?filter=code_filter
```

API to read a single Endpoint

Method

GET

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/elements/endpoint_code
```

API to create a new Endpoint

Method

POST

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/elements
```

Property

In the body of the request it is possible to include the following properties in JSON format:

Property	Description	Options
code	Mandatory.	-
description	Mandatory.	-
endpointType	Mandatory.	Possible values: • U: URL • A: Tagetik Data Loader • P: Application • O: OData V4 • 2: OData V2 • R: REST API • S: SharePoint • B: Google Big Query • F: Snowflake • C: MS Fabric • D: Databricks

endpointType properties

Additionally, depending on the endpoint type, you can configure the following properties

URL: properties	Description	Options
url	Mandatory.	-
defaultEndpoint	-	true/false (default = false)
authenticationType	-	Possible values: • N: None (default) • B: Basic
basicUsername	Mandatory if authenticationType = B.	-
basicPassword	Defined if authenticationType = B.	-
pgpEnabled	-	true/false (default = false)
pgpPublicKey	Mandatory if pgpEnabled = true	-
pgpPrivateKey	Mandatory if pgpEnabled = true	-
pgpPassphrase	mandatory if pgpEnabled = true	-

Agent: properties	Description	Options
tdlAgentId	Mandatory.	-
tdlSourceType	Mandatory.	Possible values: • P: Path • D: Datasource
tdlPath	Mandatory if tdlSourceType = P	-
tdlDatasource	Mandatory if tdlSourceType = D	-
pgpEnabled	-	true/false (default = false)
pgpPublicKey	Mandatory if pgpEnabled = true	-
pgpPrivateKey	Mandatory if pgpEnabled = true	-
pgpPassphrase	Mandatory if pgpEnabled = true	-

Application: properties	Description	Options
url	Mandatory.	-
applicationDatasource	Mandatory.	-

Odata (V4, V2): properties	Description	Options
url	Mandatory.	-
odataPaginationSize	Mandatory.	>= 0 (default = 0)
authenticationType	Mandatory.	Possible values: • N: None (default) • B: Basic • O: OAuth2.0
basicUsername	Mandatory if authenticationType = B	-
basicPassword	Defined if authenticationType = B	-
oauth2GrantType	Defined if authenticationType = O	Possible values: • CLIENT (default) • PASSWORD
oauth2TokenEndpoint	Mandatory if authenticationType = O	-
oauth2ClientId	Mandatory if authenticationType = O	-
oauth2ClientSecret	Mandatory if authenticationType = O	-
oauth2Username	Mandatory if authenticationType = O e oauth2GrantType = PASSWORD	-
oauth2Password	Mandatory if authenticationType = O e oauth2GrantType = PASSWORD	-
oauth2Scopes	Defined if authenticationType = O	-
oauth2Resources	Defined if authenticationType = O	-
oauth2ClientAuthentication	Defined if authenticationType = O	Possible values: • HEADER(default) • BODY • JWT
oauth2Kid	The kid (Key ID) header parameter provides a hint about which key was used to protect the JWS. Defined if authenticationType = O and oauth2GrantType = CLIENT and oauth2ClientAuthentication = JWT	-
oauth2Lifetime	The duration is the number of seconds added to the iat (issued-at time) claim to determine the JWT expiration time, after which the JWT MUST NOT be accepted for data processing Defined if authenticationType = O and oauth2GrantType = CLIENT and oauth2ClientAuthentication = JWT	>= 1 and <= 3600 (default = 300)
jwtCertificateFile	Generated private key code in PEM format. Mandatory if authenticationType = O and oauth2GrantType = CLIENT and oauth2ClientAuthentication = JWT	-
oauth2UseProxy	-	true/false (default = false)
oauth2UseCertificates	-	true/false (default = false)
oauth2JwtAlgorithm	The algorithm used for JWT Signing Defined if authenticationType = O and oauth2GrantType = CLIENT and oauth2ClientAuthentication = JWT	Possible values: RS256 (default), HS256, HS384, HS512, RS256, RS384, RS512, ES256, ES256K, ES384, ES512, PS256, PS384, PS512, EdDSA.
oauth2JwtAdditionalClaims	Additional claims to be put into the payload of the JWT before signing.	-
proxyServer	-	-
proxyServerPort	-	-
proxyUsername	-	-
proxyPassword	-	-
customHeaders	-	-

REST API: properties	Description	Options
url	Mandatory.	-
restResponseType	Mandatory.	Possible values: • JSON (default) • CSV
restPath	Defined if restResponseType = JSON	-
restJsonArrayLevel	-	>= 0 (default 0)
restCsvHeader	Defined if restResponseType = CSV	true/false (default = false)
restCsvColumnSeparator	Mandatory if restResponseType = CSV	Possible values: • "," (default) • ";" • "|" • "\t" • " "
restCsvValueDelimiterMode	Mandatory if restResponseType = CSV	Possible values: • NONE (default) • MINIMAL • NON_NUMERIC • ALL
restCsvValueDelimiter	Mandatory if restResponseType = CSV	Possible values: • N (default) • " • '
restCsvRowSeparator	Mandatory if restResponseType = CSV	Possible values: • CRLF (default) • CR • LF
restPaginationUsage	Mandatory.	Possible values: • N: None (default) • H: Header • Q: Query param
restPaginationPropertyName	Mandatory only if restPaginationUsage = H or Q	-
restPaginationSize	Mandatory only if restPaginationUsage = H o Q	Must be > 0
restNextPageResponsePosition	Mandatory.	Possible values: • N: None (default) • H: Header • B: Body attribute (only if restResponseType = JSON)
restNextPageResponsePropertyName	Mandatory only if restPaginationUsage = H or B	-
restNextPageRequestPosition	Mandatory.	Possible values: • N: None (default) • H: Header • Q: Query param • U: Complete URL
restNextPageRequestPropertyName	Mandatory only if restPaginationUsage = H o Q	-
authenticationType	Mandatory.	Possible values: • N: None (default) • B: Basic • O: OAuth2.0
basicUsername	Mandatory if authenticationType = B.	-
basicPassword	Defined if authenticationType = B	-

REST API: properties	Description	Options
oauth2GrantType	Defined if authenticationType = O	Possible values: • CLIENT (default) • PASSWORD
oauth2TokenEndpoint	Mandatory if authenticationType = O	-
oauth2ClientId	Mandatory if authenticationType = O	-
oauth2ClientSecret	Mandatory if authenticationType = O	-
oauth2Username	Mandatory if authenticationType = O e oauth2GrantType = PASSWORD	-
oauth2Password	Mandatory if authenticationType = O e oauth2GrantType = PASSWORD	-
oauth2Scopes	Defined if authenticationType = O	-
oauth2Resources	Defined if authenticationType = O	-
oauth2ClientAuthentication	Defined if authenticationType = O	Possible values: • HEADER (default) • BODY • JWT
oauth2Kid	The kid (Key ID) header parameter provides a hint about the key used to protect the JWS. Defined if authenticationType = O and oauth2GrantType = CLIENT and oauth2ClientAuthentication = JWT	-
oauth2Lifetime	The duration is the number of seconds added to the iat (issued-at time) claim to determine the JWT expiration time, after which the JWT MUST NOT be accepted for data processing. Defined if authenticationType = O and oauth2GrantType = CLIENT and oauth2ClientAuthentication = JWT	>= 1 and <= 3600 (default = 300)
jwtCertificateFile	Generated private key code in PEM format. Mandatory if authenticationType = O and oauth2GrantType = CLIENT and oauth2ClientAuthentication = JWT	-
oauth2UseProxy	-	true/false (default = false)
oauth2UseCertificates	-	true/false (default = false)
oauth2JwtAlgorithm	The algorithm used for JWT Signing Defined if authenticationType = O and oauth2GrantType = CLIENT and oauth2ClientAuthentication = JWT	Possible values: RS256 (default), HS256, HS384, HS512, RS256, RS384, RS512, ES256, ES256K, ES384, ES512, PS256, PS384, PS512, EdDSA.
oauth2JwtAdditionalClaims	Additional claims to be put into the payload of the JWT before signing.	-
proxyServer	-	-
proxyServerPort	-	-
proxyUsername	-	-
proxyPassword	-	-
customHeaders	-	-

 The certificates cannot be configured via API

Sharepoint: properties	Description	Options
sharepointTenantId	**Mandatory**	-
sharepointClientId	**Mandatory**	-
sharepointSiteName	**Mandatory**	-
sharepointScope	**-**	-

sharepointAuthenticationType	**Mandatory**	Possible values: • S: Secret Note: the field can take the read-only value C (Certificate)
sharepointSecretValue	**Mandatory**	-
MS Fabric: properties	**Description**	**Options**
fabricSqlEndpoint	**Mandatory**	SQL Warehouse Endpoint
fabricWarehouse	**Mandatory**	Warehouse Name
fabricTenantId	**Mandatory**	Tenant Id
fabricClientId	**Mandatory**	Apllication Azure client id
fabricSecret	**Mandatory**	Secret generated for Application Azure.
Databricks: properties	**Description**	**Options**
databricksHost	**Mandatory**	Server hostname of the Databricks instance
databricksHttpPath	**Mandatory**	Http Path of the warehouse you want to connect to
databricksClientId	**Mandatory**	Unique identifier of the service principal, also referred to as Client ID
databricksSecret	**Mandatory**	Secret Oauth generated for the service principal
databricksVolume	**-**	Volume path used for write actions (optional if endpoint is configured for read only)

Certificate authentication is not managed via API.

Creation, replacement, update, and deletion operations for *Google BigQuery* and *Snowflake* endpoints are not allowed when using the REST API service. Executing these operations will return a '501 – Not Implemented' response.

API to replace an Endpoint

Method

PUT

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/elements/endpoint_code
```

Property

In the body of the request, in JSON format, it is possible to include the same properties as in the creation according to the type of endpoint, with the exception of 'code', which is already specified in the url.

For an endpoint with oauth2ClientAuthentication = JWT, this operation will have no effect (400 - Bad request: The following endpoint cannot be replaced: <ENDPOINT_CODE>)

API to update an Endpoint

Method

PATCH

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/elements/endpoint_code
```

Properties

In the body of the request, in JSON format, it is possible to include, as properties to be updated, the same as the creation according to the type of endpoint, with the exception of the following fields which cannot be changed:

- code
- endpointType
- tdlAgentId
- tdlSourceType
- sharepointAuthenticationType

Other non-editable fields belong to the case of an endpoint modification with oauth2ClientAuthentication = JWT:

- authenticationType
- oauth2GrantType
- oauth2ClientAuthentication
- jwtCertificateFile

API to delete an Endpoint

Method

DELETE

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/elements/endpoint_code
```

Access to the database import and export functions via APIs

Introduction

STATUS	SWAGGER
ACTIVE	-
FORMAT	ROOT ENDPOINT
REST/OpenAPI	**<api root>/admintools/**

CCH Tagetik CCH Tagetik makes it possible to run database import and export functions via APIs (RESTful APIs) developed according to the OData v.4.0 standard.

Certain conditions are required to use this consultation mode.

Access conditions

To be able to use these specific APIs, the user must be authenticated (Basic Auth, OAuth2).

APIs must also be enabled in the Repository. For reverse proxies, further settings are necessary. They can be used with both *http* and *https* protocols.

For more details on authentication and enabling, see REST API Overview.

API for running the export

Method

POST

URL

```
http://server:port/tagetikcpm/api/admintools/export/v1/database_id
```

Parameters

database_id = ID of db to export

***Note**: to export the Repository, database_id = REPOSITORY*

Property

In the body of the request it is possible to include the following properties in JSON format:

zipMaxSize = maximum size in MB of files to be produced (default = 2048)

E.g.: { "zipMaxSize":"2048" }

Returned data

The response returns the following ID in JSON format:

dataprocessingId = data processing ID.

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

API for checking export status

Method

GET

URL

```
http://server:port/tagetikcpm/api/admintools/export/v1/dataprocessingId
```

Returned data

The response returns the data processing status in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Successfully completed

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

impexp.zipFiles.produced: names of produced files

Es: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED", "parameters": {"impexp.zipFiles.produced": "tcpm_USER_DB_xxx_part_1_of_1.zip"}}

API for stopping the export

Method

DELETE

URL

```
http://server:port/tagetikcpm/api/admintools/export/v1/dataprocessingId
```

Returned data

The response returns the following ID in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing in progress

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

API for running the import

Method

POST

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/database_id
```

Parameters

database_id = ID of database to which data is exported

***Note**: to import the Repository, database_id = REPOSITORY*

Property

In the body of the request it is possible to include the following properties in JSON format:

Property	Description	Options
filename	Mandatory. File to import.	It is possible to specify: • an individual file name • a list of file names (separator = **;**) • all files with **.zip** extension (filename = *****)
endpoint	Endpoint to use when the file is located in a remote directory See Pagina Endpoint.	-
dir	Directory on which files reside	If an endpoint is specified, it allows a sub directory to be specified based on the root of the endpoint. If no endpoint has been specified, it allows the following to be specified: • empty field = directory set up as writable folder of CCH Tagetik • relative path = sub-directory of the writable folder • absolute path = generic directory
emptyDb	Indicates whether the data in the target database must be completely deleted before importing.	true/false (default = false)
deletePartitions	Indicate whether all present AIH partitions (tables with prefix AW_) are to be deleted. Not to be used if the target database is the Repository.	true/false (default = true)

Note: The dynamic:Multi File syntax can be used for the *filename* parameter. In this case, since the files to be processed are ZIP archives, the syntax will not evaluate the content of the archives, but only the ZIP files themselves as entities

Examples

{ "filename":"export.awex", "endpoint":"", "dir":"","emptyDb":"false","deletePartitions":"true"} - import of the "export.awex" file from the *Writable folder*

{ "filename":"export.awex", "endpoint":"", "dir":"tmp","emptyDb":"false","deletePartitions":"true"} - import of the "export.awex" file from the "tmp" della *Writable folder* subdirectory

{ "filename":"export.awex", "endpoint":"", "dir":"C:\impexp","emptyDb":"false","deletePartitions":"true"} - import of the "export.awex" file from the "C:\impexp" directory

{ "filename":"export.awex", "endpoint":"SFTP", "dir":"","emptyDb":"false","deletePartitions":"true"} - import of the "export.awex" file through the SFTP endpoint

{ "filename":"export.awex", "endpoint":"SFTP", "dir":"tmp","emptyDb":"false","deletePartitions":"true"} - import of the "export.awex" file lpresent in the "tmp" subdirectory of the SFTP endpoint

{ "filename":"export_1_of_2.awex;export_2_of_2.awex", "endpoint":"SFTP", "dir":"","emptyDb":"false","deletePartitions":"true"} - import of the "export_1_of_2.awex" and "export_2_of_2.awex" files present on the SFTP endpoint

{ "filename":"*", "endpoint":"SFTP", "dir":"","emptyDb":"false","deletePartitions":"true"} - import of all files with the ".awex" extension present on the SFTP endpoint

Returned data

The response returns the following ID in JSON format:

dataprocessingId = data processing ID.

E.g.: { "dataprocessingId":"FF8081817A4264E5017A42D08E3C21EB" }

API for checking import status

Method

GET

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/dataprocessingId
```

Returned data

The response returns the data processing status in JSON format:

status: RUNNING/FAILED/COMPLETED

Status	Description
RUNNING	Running
FAILED	Failed
COMPLETED	Successfully completed

E.g.: {"requestDateTime": "2021-06-25T10:56:42.850+0000", "status": "COMPLETED"}

API for stopping the import

Method

DELETE

URL

```
http://server:port/tagetikcpm/api/admintools/import/v1/dataprocessingId
```

Returned data

The response returns the following ID in JSON format:

message = Stop on dataprocessingOid *dataprocessingId*" / "Notify on dataprocessingOid *dataprocessingId*"

Message	Description
Stop on dataprocessingOid	Data Processing was stopped
Notify on dataprocessingOid	Data processing in progress

E.g.: {"message": "Stop on dataprocessingOid FF8081817A4264E5017A42D08E3C21EB"}

Financial Workspace Comments Exposure with RESTful APIs

CCH Tagetik exposes data related to comments and attachments.

STATUS	SWAGGER
ACTIVE	-
FORMAT	ROOT ENDPOINT
REST / OpenAPI	**<api root>/dataentry/comments/v1**

Authorization

In order to use the APIs, it is necessary to enable the option described above and to have the **0001836- System Reports: Comments** and **0004151 - FW System Reports: Comments and Attachments** functions enabled in the user's role.

Use

The URL relating to the root of data service is:

`<api-root>/`**`dataentry/comments/v1`**`/database_id`

The service provides a zipped folder containing a file named index.xslx showing:

- Forms
- Managed Dimensions
  - All dimensions in the system, filtered based on the caller's user rights.
  - If it is filtered by a node, all comments on its children are displayed. If one of these children is in turn a node, comments on its children are displayed, and so on.
  - The dimensions' names are based on the application language of the caller.
  - The description of the dimensions' elements are in the description language selected by the caller.
  - The description of the Analytical Dimensions' elements on which the *Personal data protection* option is enabled will be exported encrypted.
- Notes
  - In the case of multiple comments on the same report, the rows, equal to the first one up to the Comment field, are repeated.
- Attachment
  - Attachments are included in the zipped folder returned by the API.
  - The Attachment field displays the name of the file as a hyperlink to the relevant file.
  - In case of multiple comments on the same form, they will be entered in subsequent rows, with empty cells up to the Comment field.
  - In case multiple attachments have the same file name, the operating system differentiates them by default.
- User
  - The last user that modified the comment or the attachment.
- Date
  - The date of the last modification.

belonging to the *Reporting Layer*, related to the Processes.

Besides the Process, you can also specify filters related to each of these elements in the body of the call, as follows:

- **Processes**

  "process":<stringa>

  - Filters based on data related to a specific Process
- **Managed Dimensions**

  "<dimension>":{

  "values":[<string>, <string>...],

  "includeNullValues":<boolean>

}

- Filters based on the values of a specific dimension. The dimensions by which you can filter are:
- Scenarios
- Period
- Entity
- Accounts
- Variation & Detail types
- Category
- Custom dimension 1 to 5
- Unit
- CTP entity
- CTP custom dimension 2
- Cod_Prospetto

- **Null (optional)**
  - "includeNullValues":<boolean>
    - Includes the empty fields for that dimension (**false** by default)

Examples of direct calls to the service


API's filters are inserted in the request's body, thus the only difference in t he URL is the reference DB

- Example of URL: http://qa7:8280/tagetikcpm/api/dataentry/comments/v1/TGK_QC_TRUNK_INCUBATEAM

All comments

- Parameters: none
- Body:
  - {
  - }
- Data are read unfiltered.

Comments belonging to the ACT process

- Parameters: Process
- Body:
- {

"process":"ACT"
}

Comments belonging to Scenario "2017ACT_V1"

- Parameters: Scenario
- Body:
- {

"scenario":{

"values":["2017ACT_V1"]

```
}
}
```

Comments belonging to scenarios "2017ACT_V1", "2018ACT_V1" and to account "65030"

- Parameters: Scenario, Account
- Body:
- {

```
"scenario":{
        "values":["2017ACT_V1","2018ACT_V1"]
},
"account":{
        "values":["65030"]
}
}
```

Dataset comment extraction data processing API

Function

Extracts the comments and attachments present in datasets of the Analytical Workspace. To do this, the data from which to extract the comments (process, workspace, dimensions, etc.) must be specified in the body of the request.

Once the request has been made, the system will create a compressed (.zip) folder containing an XLSX file with the extracted data and any attachments.

User requirements

To use these APIs, the user must be attributed a role for which the following functions are enabled:

- 0001836 - System Reports: Comments
- 0004152 - AIH System Reports: Comments and Attachments

Details of XLSX file contents

The XLSX file will contain the following elements.

Element	Notes
Forms	-
Custom fields	• If a field is encoded, the description will be unencoded. • The Analytical Workspace data values for fields on which the *Personal Data Protection* option is active will be exported in encrypted form.
Dimensions	• All dimensions assigned to this form are filtered on the basis of the caller's user rights. • If a dimension is filtered by a node of the same dimension, all the comments on its children will be shown. If there are further sub-nodes, all the comments on all levels will be shown. • The names of the dimensions are based on the language of the calling user's application. • The descriptions of the dimension elements are in the descriptions language of the calling user's profile, or in the fallback language if that description does not exist. • Descriptions of elements of the analytical dimensions on which the *Personal Data Protection* option is active are exported encrypted.
Value	• Numeric value of the field (if present). To the second decimal digit • Only for MULTIDIMENSIONAL forms

Element	Notes
Comment type	Specifies the origin of the comment, or how the comment was inserted ("Navigation" or "Data Entry")
Comments	If there are multiple comments on the same form, all the necessary rows are duplicated, differing only by the Comment field.
Attachment	• The Attachment field reports the file name as a hyperlink, which opens the relative file. • Attachments are included in the compressed folder returned by the API. • If there are multiple comments on the same form, these are inserted in subsequent rows, duplicating everything but leaving the fields empty up to the Comment field. • If there are several attachments with the same file name, they are differentiated by default by the operating system.
User	The last user to have edited the comment or attachment.
Date	The date of the last change.

URL

```
<api-root>/aih/comments/v1/database_id
```

Parameters

The following parameters can be entered in the body of the request:

Parameter	Description	Type	Required	Example in JSON format
process	Process from which to extract comments.	String	Optional	"process":*<string>*
aw	Analytical workspace from which to extract comments.	String	Mandatory	"aw":*<string>*
datasets	Dataset from which to extract comments.	String	Mandatory	"dataset":*<string>*

Parameter	Description	Type	Required	Example in JSON format
fields	Dimensions from which to extract comments Filters based on the values of a specific dimension. The Name field must contain the field ID, while the Values array must contain the descriptions (in the correct language) to be searched. You can filter using the following fields: • Scenario • Period • Entity • Account • Variation/Detail types • Category • Custom dimensions from 1 to 5 • Currency • CTP entity • CTP Custom Dimension 2 • Cod_Prospetto • Custom Fields (text, number and date) If the dataset is partitioned by Business Cycle or Business Cycle and Entities and does not contain a Scenario, Period and/or Entity field, the form can be filtered in any case, based on the Scenarios, Periods and/or	String	Mandatory	`"fields":[ { "name":<string>, "values": [<string>,<string>...] }, ...`

Parameter	Description	Type	Required	Example in JSON format
	Entities by which they have been partitioned.			
includeNullValues	Includes empty dimension fields in the document. Default: false.	Boolean	Optional	"includeNullValues":*<false>*
columnsAvailable	Columns visible in the document. If not present, all columns will be visible.	String	Optional	"columnsAvailable": *<string>*
Form type	formType: "LINE_BY_LINE" or "MULTIDIMENSIONAL" Specifies the type of form to be extracted. Line-by-Line is the default, but is good practice to insert it.			

Examples

API for filtering based on the Scenarios, Periods and/or Entities by which they are partitioned

```
"fields":[
{
"name":"COD_SCENARIO"/"COD_PERIODO"/"COD_ENTITY",
"values":[<string>,<string>...]
},
{
"name":"COD_SCENARIO"/"COD_PERIODO"/"COD_ENTITY",
"values":[<string>,<string>...]
}
]
```

API for extracting comments from dataset "0000002" in Analytical Workspace "00000001"

- Parameters: Analytical Workspace and Dataset
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002"
}
```

API for extracting comments from dataset "0000002" in Analytical Workspace "00000001" belonging to the "ACT" process

- Parameters: Analytical Workspace, Dataset and Process
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002",
    "process":"ACT"
}
```

API for extracting comments from dataset "0000002" in AW "00000001", belonging to process "ACT", with Scenario "2020_ACT", including empty elements.

- Parameters: Analytical Workspace, Dataset, Process and Scenario
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002",
    "process":"ACT",
    "fields":[
        {
            "name":"scenario",
            "values":["2020_ACT"],
            "includeNullsValues":true
        }
]
}
```

API for extracting comments from dataset "0000002" in AW "00000001", belonging to process "ACT", with Scenarios "2020_ACT" or "2018_ACT"

- Parameters: Analytical Workspace, Dataset, Process and Scenario
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002",
    "process":"ACT",
    "fields":[
        {
            "name":"scenario",
            "values":["2020_ACT","2018_ACT"]
        }
            ]
}
```

API for extracting comments from dataset "0000002" in AW "00000001", belonging to process "ACT", with Scenarios "2020_ACT" or "2018_ACT" and period "01", including the Period's empty fields

- Parameters: Analytical Workspace, Dataset, Process and Scenario
- Body:

```
{
    "aw":"00000001",
    "dataset":"0000002",
    "process":"ACT",
    "fields":[
        {
            "name":"scenario",
            "values":["2020_ACT","2018_ACT"]
        },
```

```
        {
            "name":"scenario",
            "values":["01"],
            "includeNullValues":true
        }
            ]
}
```

API: Technical information

Enabling REST API

Public REST APIs are enabled by default.

On-Premises Use of Reverse Proxy

If an On Premises instance of CCH Tagetik is accessed via a reverse proxy, for the OData type APIs to function correctly, it is necessary to set the URL base to one of the following settings:

- addition of a custom header **`x-tagetik-cpm-publicurl`**to the http request,
- addition of a system property **`it.grupposervizi.easy.rest.api.reverseproxy`** to the configuration of the application server.

For example, if the URL sel service is `https://example.com/prod/api/aih/data/v1/TGK_APP/001/Dataset_000001()`, the base URL to be set in one of the two configurations must be: `https://example.com/prod`.

For further information, please refer to the document "Technical Architecture: CCH Tagetik Reverse Proxy configuration" in the Community.

API Root URL

All API sets have the following URL format:

`<api-root>`/**`<domain>`**/**`<version>`**/`...`(API-specific suffix)

- ***`<api-root>`*** Root endpoint of all REST APIs depends on the type of deployment of CCH Tagetik (On-Premises or Cloud) and, in the case of Cloud service, the chosen authentication mode. See the following paragraphs
- ***`<domain>`***the name of the API set, or functionality (e.g. **`aih`**, **`audit`**, ...)
- ***`<version>`*** Current version of the API set (**`v1`**, **`v2`**...). As newer versions of a set of APIs come out, older ones may be deprecated and, in later versions, discontinued. Sets with version **`v0`** are intended to be **experimental** and may be discontinued in new versions without further notice and without a deprecation period.

On-Premises Environments

The `<api-root>` has the following format

`<application url>`/api/

where:

- `<application url>` is the same url used to access the web application

Example:

https://**`mydomain`**/tagetikcpm/api/**`scim`**/**`v2`**/**`Users`**

Cloud Environments

On some regions of Tagetik Cloud, a new API access service is available that supports various authentication strategies. For information on which regions this service is enabled, please consult the release notes.

In these cases, the `<api-root>` has the following format

`<tenant>.api.saastagetik.com/<authentication strategy>/`

where:

- **<tenant>**is the name of the current tenant (e.g. *abcprod*)
- **<authentication strategy strategy>** one among **oauth2**, **basic**, **api-key** and **jwt**, depending on the authentication strategy used. For further information, see section "Authentication - Cloud" below".
- **<domain>** the name of the API set, or functionality (e.g. ***aih***, ***audit***, ...)

Example:

```
https://mytenantprod.api.saastagetik.com/oauth2/scim/v2/Users
```

Authentication - On Premises

By default, the REST APIs provide 'Basic Authentication' authentication.

To invoke the REST API using basic authentication, it is necessary to use the credentials of a user of *Local User*' type. It is not possible to use the credentials of any external authentication system (SAML, OpenID, HHC, etc.) that may be integrated with CCH Tagetik. The user must have a valid password and must not have ticked the'*Password to be changed*' option.

If you do not have a valid user, you can create one from (Repository Homepage) > **Users & Roles** File > **Users**

Create a new user by taking care to specify, in addition to the normal mandatory fields:

- **User type**: *'Local user*
- **Password to be changed**: not selected

In addition, it is necessary to set a valid password from (Actions Menu) > **Change Password** as access via API does not allow an expired password to be changed.

It will also be necessary to appropriately configure roles or reference users in order to allow access to the desired API.

Authentication - Cloud

In some regions of Tagetik Cloud, a new API access service is available, allowing for different authentication strategies, called API Gateway. Please, refer to the release notes to know which regions this service is available in.

To perform an API request via this service, log in to the application, navigate to the '*Authentication Credentials*' page, click on your user name, then click on the 'Authentication Credentials' item in the drop-down menu.

To generate credentials, specify the type required from the Type drop-down menu and complete the mandatory fields (which may vary depending on the type selected).

By clicking on the 'Generate' button, a window containing a JSON is displayed. The JSON represents the generated credential with some additional information; you can copy the contents of the JSON by clicking on the copy button on the right or the 'copy and close' button at the bottom left.

IMPORTANT: It is also possible for an administrator to generate credentials for a specific local user. The administrator must have the functions 0000016 and R000024 enabled.

By visiting the user management page from the repository, one can select a local user and click on the *'Authentication Credentials'* menu item available from the action menu ⋮, in this way the administrator is redirected to the *'Authentication Credentials'* page for the selected user.

Examples of use

After deciding which public APIs to invoke (e.g. SCIM API), open the desired REST client (e.g. Postman). The URL to be invoked must be a concatenation of 'url endpoint' from JSON and API URL.

API key

Generating an API key credential will result in a JSON like the following:

```
{
"secret key": "YOUR_SECRET",
"endpoint url": "<tenant>.api.saastagetik.com/api-key"
}
```

In the Postman authorisation area, specify the 'API key' type, then populate the following fields:

- Key: apiKey (this value is mandatory and must be written like this)
- Value: YOUR_SECRET from JSON
- Add to: Header

To invoke the SCIM API, the URL becomes:
<tenant>.api.saastagetik.com/api-key/scim/v2/Users/USER_CODE

Basic

Generating a Basic credential will result in a JSON like the following:

```
{
"username": "COD_MT-YOUR_USERNAME",
"password": "YOUR_PASSWORD",
"endpoint url": "<tenant>.api.saastagetik.com/basic"
}
```

In the Postman' authorisation area, indicate the 'Basic Auth' type, then populate the required fields:

- Username: *COD_MT-YOUR_USERNAME*
- Password: *YOUR_PASSWORD*

To invoke the SCIM API, the URL becomes:
<tenant>.api.saastagetik.com/basic/scim/v2/Users/USER_CODE

OAuth 2.0

Generating an OAuth 2.0 credential will result in a JSON like the following:

```
{
"client id": "YOUR_CLIENT_ID",
"client secret": "YOUR_CLIENT_SECRET",
"access token url": "<tenant>.api.saastagetik.com/oauth2/oauth2/token",
"endpoint url": "<tenant>.api.saastagetik.com/oauth2"
}
```

In the Postman' authorisation area, indicate the 'OAuth 2.0' type .A token can be obtained by using Postman's 'Configure New Token' functionality:

- Grant type: *Client credentials*
- *Access Tok*en URL: access token url from JSON
- Client ID: *YOUR_CLIENT_ID*
- Client Secret: *YOUR_CLIENT_SECRET*
- Client Authentication: *Send as Auth Basic Header*


To invoke the SCIM API, the URL becomes:
<tenant>.api.saastagetik.com/oauth2/scim/v2/Users/USER_CODE

JWT

Generating a JWT credential will result in a JSON like the following:

```
{
"algorithm": "HS256",
"key": "YOUR_KEY",
"secret": "YOUR_SECRET",
"endpoint url": "<tenant>.api.saastagetik.com/jwt"
}
```

A valid JWT token can be obtained using *https://jwt.io/:*

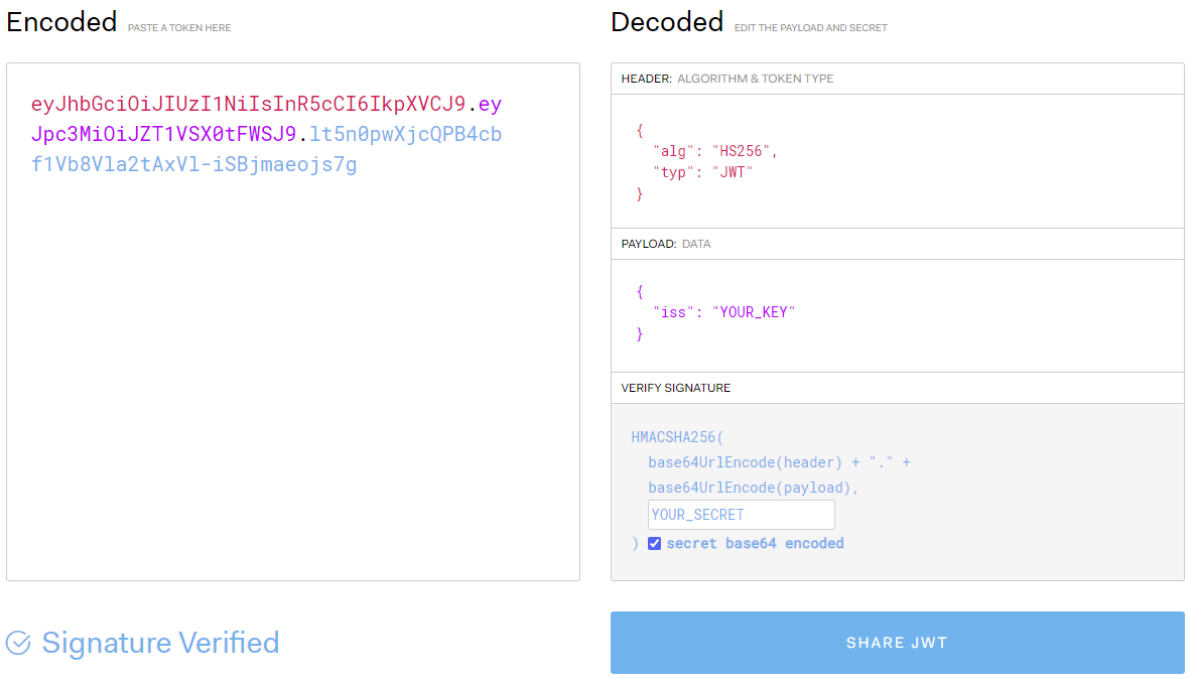

in the header section specify the HS256 algorithm (can be selected from the drop-down menu), in the payload section specify a JSON consisting of an "iss" key and the value YOUR_KEY, in the Verify Signature section fill in the empty secret space with YOUR_SECRET(tick "secret base64 encoded").

The generated secret is visible in the left section (encoded).

In the authorisation area of Postman', indicate the type 'Bearer Token', then fill in the mandatory field:

- Token:
  eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpc3MiOiJZT1VSX0tFWSJ9.lt5n0pwXjcQPB4cbf1Vb8Vla2tAxVl-iSBjmaeojs7g

To invoke the SCIM API, the URL becomes:

<tenant>.api.saastagetik.com/jwt/scim/v2/Users/USER_CODE

Common HTTP errors

Here are the most common HTTP error codes returned by the APIs in case of anomalies.
For details, please consult the documentation for each individual API

Fault code	Description
400 BAD REQUEST	A request was made with invalid parameters or message body elements, e.g: • You are trying to save a user specifying the code of an invalid reference user • You are trying to link an element to a hierarchy node that does not exist

Fault code	Description
401 UNHAUTORIZED	"*Authorization failure. The authorization header is invalid or missing.*" In the case of BASIC authentication, this occurs if: • the username or password is invalid • if the option is checked for the user In the case of OAUTH2 authentication: • If the content of the token is not recognised
403 FORBIDDEN	*"Access not granted*" or*"Access not granted for function XXX*". The user does not have the appropriate role to perform the requested operation via API. Examples: • You are trying to save a new user via the SCIM API but you have read-only access to the user database • You are trying to read the audit data via ODATA without having access to the Repository Normally, the body of the response contains the function that is required to perform that operation. • If the HTTP verb used is *DELETE*, *PATCH*, *POST* or *PUT*, **read/write** rights are required • If the HTTP verb used is *GET*, read-only rights are normally sufficient.
500 INTERNAL SERVER ERROR	This is an operational anomaly for which specific support is needed. Equivalent to error messages not handled within the application
503 SERVICE UNAVILABLE	Public APIs have been disabled in the configuration. To enable them, see Activation.