Wolters Kluwer

CCH Tagetik Application License Upload

Release Date: December 15, 2023

Protection Level: Confidential

From 5.3.SP24

Contents

Introduction 3

Prerequisites 4

License Upload Procedure 5

Step 1 – Access the Repository. 5

Step 2 – Select License information menu item. 5

Step 3 – Upload New License. 5

Step 4 – Run Roles Deployment. 6

Conclusion 7

Glossary 8

Notes and Copyright 9

Introduction

This manual describes the procedure to upload a CCH Tagetik core application license.

Beginning with version 3.0912, the application requires a valid license to enable access to the functions and modules purchased by a customer as well as validity dates. Current versions of the license also validate the number of users in various categories. The license is provided as a file which is created and provided by CCH Tagetik to the customer. After uploading the license, and running the roles deployment function, the application re-configures itself to allow access to modules, functions and types of users permitted by the parameters of the uploaded license. The application will begin checking that the project meets the license configuration permitted after the “start-up” period, usually about 6 months for new projects. The application also sends notifications for compliance and validity of the application installation with the license parameters to some users. It is possible to modify the license validation notifications within the application. This version of the manual is valid from 5.3.SP24 of the application.

Please contact CCH Tagetik concerning any questions or comments related to the contents of this document.

Prerequisites

To upload a license in the application, the following prerequisites must be satisfied.

- **Repository Access:** The user must have access to the Repository.
- **License File:** The license file must be available.


License Upload Procedure

The license upload procedure requires the steps below.

ATTENTION: Uploading the license will override the previous license settings completely.


Step 1 – Access the Repository.

For users with the relevant permissions, they will see the **License information** menu item in the three dots icon as shown in the following screenshot.

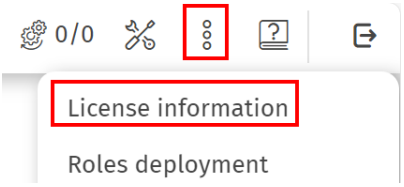

Step 2 – Select License information menu item.


After selecting the **License information** item, a license information window will open.

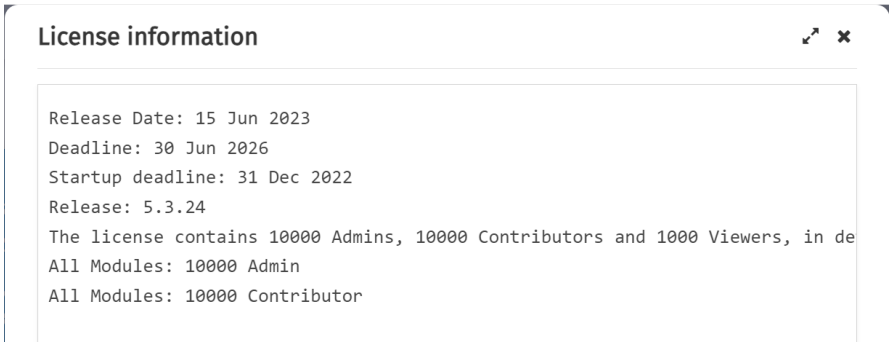

This window shows the various dates regarding license and startup period expirations. It also shows the user types available to the customer as well as the modules available.

Step 3 – Upload New License.


To upload a new license, click on the Upload New License button open a file upload window. Select the license file to upload and click on “Open”.

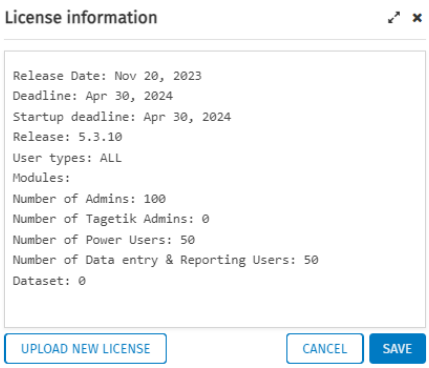

After uploading the license, check the license parameters. Then select the **Save** button to save the license in the application.

Step 4 – Run Roles Deployment.

Following the saving of the license, it is necessary to run the Roles Deployment function. In order to run the Roles Deployment function, click on the three-dot menu again and select **Roles deployment**.

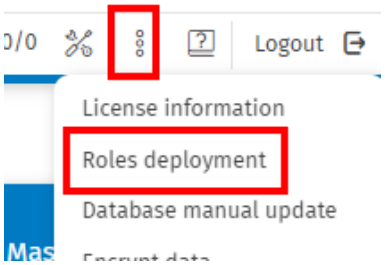

A message will appear signaling that the roles deployment has been started. Another message will appear signaling the completion of the roles deployment.

ATTENTION: A user who is entering a newly installed application before any license has been uploaded will not see all the menu items of the standard application until the roles deployment and a refresh of the browser window have been completed.

Conclusion

Once the license is successfully uploaded, saved, and the roles deployment has been run, the application can be utilized with the new license parameters. The user who uploaded the license will also receive a notification detailing if the current license has been respected by evaluating the users, roles, and database access.

Glossary

The following table provides a short glossary for the terminology used in this manual.

Startup Period	This is the date the application begins checking for compliance. It allows the customer to do the implementation of the project before the Go-live period without restrictions. This was a characteristic of older licenses and is being phased out on newer licenses.
Roles Deployment	This function takes the settings present in the license and aligns the rest of the application, i.e. custom roles, access to functions, default role definitions, etc. with the license parameters.
License file	The license file is an encrypted binary file which is uploaded into the application to set the modules and functions available to a customer.

Notes and Copyright

Tagetik Software S.r.l with a sole quota holder reserves the right to change the contents of this document without prior notice. All trademarks are the property of the trademark owners.

This document and its contents are the sole property of Tagetik Software S.r.l with a sole quota holder; and are protected by Italian Copyright Law no. 633/1941 and by any applicable international agreements and treaties concerning intellectual property rights. All rights, including the intellectual property rights, are reserved to Tagetik Software S.r.l with a sole quota holder. The user of this document is authorized by Tagetik Software S.r.l with a sole quota holder to make copies of this document for private purposes only in paper and/or electronic formats for the sole purpose of training in relation to the use of CCH® Tagetik software for the benefit of the staff/employees of the above-mentioned company. Any other use is hereby expressly forbidden.