

User Manual

Data Model & Processes

This manual provides an overview of the Data Model, including AIH-based modeling, process governance, and deployment.

Version: 5.3.SP36

Wolters Kluwer

CCH® Tagetik

wolterskluwer.com

Table of contents

Analytical Workspaces ... 1

Workspace structure 2

Dataset ... 2
Reference dataset ... 3
Fields of the dataset ... 4
Virtual datasets ... 5
Datasource ... 6
Dictionaries ... 7
Data Transformation Package (DTP) ... 9
Running the DTP ... 10
DTP reports ... 11
Parametric DTPs ... 12
Details of SQL filters in DTP operations ... 15

Workspace functionality 16

Personal Data Protection ... 16
Workspace Import/Export ... 17
Import/export workspace data ... 19
Export Analytical Workspace data via tasks ... 21
Task (Export from AW) window ... 22
Update workspace ... 23
<Workspaces> window, Update from (local) ... 24
<Workspaces> window, Update from (exported) ... 25
Analytical Workspace Partition Version Update ... 26
Analytical Workspace Partition Management Window ... 27
Analytical Workspace Partition Version Update ... 28

Analytical Workspace pages 29

Analytical Workspaces - Page structure ... 29
Analytical Workspaces page ... 30
New Workspace window ... 31
Clone window ... 32
Workspace page ... 33

Workspace settings window 33
Analytical Workspace: Export window 34
Exported files window 35
Analytical Workspace: Import window 36
Analytical Workspace: Import (Validation) window 37
Dictionaries tab 37

Dataset 39

Dataset tab 39
New dataset window 40
Dataset definition page 41
Dataset settings window 45
Limitations on Field Names 47
Personal data log label page 55
Type definition page 56
Page Dataset List 56
Partition details window 58
Partition details window 59
Datasource Mapping page 59
Data Target Mapping (XBRL) page 60
Matrix Mapping page 61
XML Mapping page 63
Data Target Mapping page: File mapping 64
See Data Target Mapping page (Update Data Model) 65
Data target mapping (Update Rules) 66
Data Target Mapping (XBRL CSV) 67
Dataset Attributes : Reporting View 69
Creating datasets 69

Virtual Datasets and Datasources 72

Virtual Datasets and Datasources tab 72
Virtual dataset definition page 73
Create virtual dataset window 73
Virtual dataset configuration window 74
Relationships tab 74

Virtual dataset fields tab ... 75
Datasource definition page ... 77
New datasource window ... 78
Datasource settings window ... 78
Custom Query Tab ... 78
Datasource fields tab ... 79

The data model 81

Multidimensional data model ... 81
The dimensions of CCH Tagetik ... 81
Aggregation structures ... 82
How to work with dimensions ... 83
Dimensions ... 84
New dimension settings ... 85
Account dimension settings ... 85
Entity dimension settings ... 86
Category dimension settings ... 86
Attributes library ... 86
Customised Attributes ... 87
Creating a custom dimensional attribute ... 88
Working on customised dimensional attributes ... 88

Dimensions: Entity 90

Entity: basic concepts ... 90
How to work with entities ... 91
Entity elements page ... 94
Entity elements ... 95
How to manage the company dimension with a time dependency ... 97
Time-dependent entity elements page ... 97
Time-dependent entity elements ... 99
Copies between original scenarios ... 100
Define generic data ... 100
Archive entity data ... 101
Input data for original scenario ... 101
Input data for consolidation scenario ... 101

Control chart page ... 102
Control chart ... 103
Control type page ... 103
Control type ... 104
CTP dynamic groups page ... 104
Counterparty dynamic groups ... 105

Dimensions: Account 106

The Account: basic concepts ... 106
Calculation rules: result accounts ... 108
How to create accounts ... 109
How to work with accounts ... 110
Account elements table page ... 111
Account elements table ... 113
Create Variations, Control groups, Calculation logics ... 118
Create Details, Control groups, Calculation logics ... 120
Recode account page ... 121
Recode account ... 122
Result accounts page ... 122
Result accounts ... 124
Creation of calculation logics to generate result accounts ... 124
Creation of control groups to generate result accounts ... 125
Dynamic groups of accounts ... 127

Dimensions: Period 129

Periods: basic concepts ... 129
How to work with periods ... 131
Period list page ... 131
Period list ... 132

Dimensions: Scenario 133

The Scenario: basic concepts ... 133
Original scenario ... 134
Consolidation scenario ... 136
How to work with scenarios ... 137
Scenarios list page ... 138

Scenarios list 139
Scenario periods page 140
List of scenario periods 141
Snapshot scenarios page 141
Snapshot scenarios 142

Dimensions: Category 143

Category: basic concepts 143
How to work with categories 145
Categories list page 146
Categories list 147
Journal models page 148

Dimensions: Currency 150

Currencies: basic concepts 150
How to work with currencies 151
Currencies list page 151
Currencies list 153

Analytical Dimensions 154

Analytical Dimension Creation Page 154
Elements window of Analytical Dimension 155

Custom Dimensions 157

Custom Dimension Creation Page 157
Custom dimensions list page 158

Variation/detail types 160

Variation/Detail types: basic concepts 160
How to work with variation/detail types 160
Variation/detail types list page 162
Variation/Detail types list 163

Control groups 167

Control groups: basic concepts 167
How to define control groups 170
How to create different types of control groups 171

How to work with control groups ... 172
Control groups page ... 174
Control groups ... 176
Definition of Set 1 accounts ... 178
Definition of Set 2 accounts ... 179
Recode - Control groups page ... 179
Recode - Control groups attributes ... 181

Hierarchies 182

Hierarchies: basic concepts ... 182
How to work with hierarchies ... 183
Structure and relationships for accounts page ... 185
Structure and relationships page for entities ... 186
New hierarchy ... 187
Node creation ... 188
Account hierarchies page ... 188
Account hierarchy attributes ... 189
Entity hierarchies page ... 189
Entity hierarchy attributes ... 191
Structure and Relationships Attributes ... 191

Groupings 193

Groupings ... 193
How to work with groupings ... 194
Scenario - Grouping page ... 194
Scenario - Grouping ... 196
Variation/Detail types Grouping page ... 197
Variation/Detail types grouping ... 198
Control group - Structure and relationships page ... 201
Control groups grouping ... 202
Category - Grouping page ... 205
Categories grouping ... 207

Financial statement templates 209

Financial Statement Templates: basic concepts ... 209
Formulas for financial statement template (FST) items ... 210

How to work with financial statement templates and items 211
FST&KPI 213
FST & KPI page 214
FST items page 215
FST items 216
Relationships page 217
Relationships 218

Deployment 219

General Deployment 219

Personal Data Protection 222

Setting an Analytical Dimension 222
Operation 222
Restrictions 222
Enforcement of the right to be forgotten of personal data 222
Data tables clean-up 223

Processes with dimension by step 227

Processes: basic concepts 227
Processes with dimension by step 228
Process creation page 229
Page for Definition of Process with dimension by step 231
Create processes 233
Managing processes 234
Deploy processes 235
Archiving process data 235

Business Workflow 237

Business Workflow concepts 237
Business workflow with dimensions per phase 239
Define a Business Workflow 239
Business Workflow page 243
Steps page 243
Step Configuration window 244
Task workflow page 245

Business Workflow task icons ... 247

The entity's business cycles 249

Business cycles ... 249
Define Cycles window ... 249
Manage Status window ... 250
Set Business Cycles ... 250

Entity organisation and workflow 252

Organisation and workflow ... 252
Mapping task workflow page ... 253
Exceptions page ... 254
Definition results page (organisational hierarchy) ... 255
Mapping task workflow page ... 256
Definition result: Mapping task workflow page ... 257
Business Workflow Deployment ... 258

The Process Data Model 259

Introduction to the Process Data Model ... 259
Process Data Model definition ... 260
Data management for the Process Data Model ... 262
Process Data Model examples ... 263
Define Process Data Model page ... 265
Process Data Model/Entity Relationships page ... 268
Definition result: Process Data Models related to entities page ... 269
Definition result: Process Data Model page ... 269
Process Data Model setup ... 270

Process submission 272

Management of submission and notifications ... 272
Submission rules page ... 274
Checking rules page ... 275
Deadline dates page ... 275
Reminder and summary emails window ... 276

Notification emails 277

Notification emails ... 277

Send email events 278
Email templates page 280
Parametric e-mail elements 281
Manage the sending of emails 282

Financial rules and data processing 284

Rules of CCH Tagetik 284
ETL execution plan page 285
Carry forward rules page 286
Calculation Logics 287
Calculation logic requirements page 288
Calculation logics graph page 288
Define overridden amounts page 289
Override calculation logics page 289
Validations 290
Diagnostic Rules page 291
Plausibility diagnostic page 293
Balancing data processing 294

Data Processing: consolidation 295

Introduction to data processing 295
Consolidation Data Processing 296
Basic consolidation data processing 297
Consolidation Requirements page 300
Define Consolidation Area page 301
Periods page 302
Define consolidation area by period page 303
Define relationships between entities and classifiers for the period page 304
IC Elimination and Matching Requirements page 305
Generate proportional amount page 305
Generate converted amount page 306
Override FX rate difference accounts page 307
Customise account conversion type page 308
Generate consolidable and Equity evaluation page 308
Minorities page 310

Mergers page ... 311
Account reclassification and NER Requirements page ... 311
Rules Engine Designer requirements page ... 312
Advanced consolidation data processing ... 312
Advanced consolidation page ... 314
Financial investments reclassification page ... 315
Equity pick-up Requirements page ... 315
Pick-up percentages page ... 316
Override Pick-up percentages page ... 317
Pick-up rules page ... 317
IC Spreading Requirements page ... 318
Override IFRS5 rules page ... 319
Consolidation procedures ... 319

Data Processing: allocation and closing 321

Allocations and Closing Requirements page ... 321
Allocations & Closing rules page ... 322

Data Processing: Cash Flow Planning 324

Cash Flow Planning ... 324
Cash Flow Planning Requirements page ... 325
Cash Flow Planning Rules page ... 326
Copy actual data page ... 327
Dimensions/Financial Rules Mapping page (Create derived events and entries) ... 327
Cash management rules page (Financial simulation) ... 328

Data Processing: taxes 329

Data Processing related to taxes ... 329
Tax rules page ... 329
Taxes setup page ... 330
Deferred and prepaid taxes - Input accounts page ... 332
Direct taxes - Input accounts page ... 333
Deferred and prepaid taxes - Override output accounts page ... 333
Direct taxes requirements page ... 334

Data Processing: other data processing 336

Other data processing 336
Asset depreciation rules page 337
Customers/Asset categories attribution page 337
Dividend Requirements page 338

Snapshot 339

Snapshot scenarios 339
Snapshot window 340
Manage thesnapshots on the process 342
Snapshot - Requirements page 343

The cockpit 344

Process cockpit 344
Process Page 345
Page for Processes with dimension by step cockpit 346
Status Report Window 353
Performance Dashboard 354
Journal book window 356
Copy Amounts and journals window 359
Report Consolidation of Investment (COI) 360
Lock / Unlock Data Window 362

Processes in CCH Tagetik 363

Processes: basic concepts 363

Process by Entity 365

Process configuration and deployment 365
Create processes 365
Managing processes 366
Deploy processes 367
Archiving process data 368
Process creation page 369
Process setup page 371
Clone Process window 373
Lock setup window 374
Create backup on offline tables window 374

The Data isn't consistent with the process window ... 375
Copy Requirements and Rules From window ... 375
Copy Override Rules on Generic Rules window ... 376
Copy and Migrate Process Window ... 376

Business Workflow 378

Business Workflow concepts ... 378
Define a Business Workflow ... 380
Business Workflow page ... 384
Business Workflow task icons ... 384
Steps page ... 387
Entity/node, step and task relationships ... 387
Task workflow page ... 388
Task workflow for a Collaborative Office document ... 389

The entity's business cycles 391

Business cycles ... 391
Set Business Cycles ... 391
Define Cycles window ... 392
Manage Status window ... 393

Entity organisation and workflow 394

Organisation and workflow ... 394
Organisation and Workflow setup ... 395
Exceptions page ... 397
Definition results page (organisational hierarchy) ... 398
Mapping task workflow page ... 399
Definition result: Mapping task workflow page ... 400
Examples of mapping ... 401
Deadline dates page ... 402
Settings submission window ... 403
Advanced definition page ... 404
Shift dates window ... 405
Set deadline window ... 405

The Process Data Model 407

Introduction to the Process Data Model 407
Process Data Model definition 408
Data management for the Process Data Model 410
Process Data Model setup 411
Process Data Model examples 413
Define Process Data Model page 415
Process Data Model/Entity Relationships page 418
Definition result: Process Data Models related to entities page 419
Definition result: Process Data Model page 419

Data entry and submission 421

Data entry and processing in processes 421
Data entry modes 421
Data entry and submission rules 422
Define data entry and submission rules 422
Data Entry & Submission Rules section 423
Amount & Intercompany rules page 423
Journal rules and settings page 427
Categories for draft journals page 428
Submission rules page 428
Reasons for rejection page 430
Execution plan of jobs to run on submission and rejection page 430
Override Entity parameters on Original scenarios page 431

Data Processing: introduction 433

Introduction to data processing 433
The process's data processing execution order 434
Define the Data Processing 436
Data Processing section 438
ETL execution plan page 439

Data Processing: carry forward 440

Carry forward data processing 440
Carry forward rules page 440
Carry forward rules - Accounts definition page 441
Override Carry Forward Categories page 442

Normal and Detail accounts/Categories to exclude page 442
Exclude Scenarios from Carry forward page 443

Data Processing: calculation logics 444

Calculation Logics 444
Calculation logic requirements page 444
Calculation logics graph page 445
Override calculation logics page 446
Define overridden amounts page 446

Data Processing: validation and balancing 448

Validations 448
Balancing data processing 450
Diagnostic Rules page 450
Plausibility diagnostic page 452

Data Processing: consolidation 453

Consolidation Data Processing 453
Basic consolidation data processing 454
Consolidation Requirements page 457
Define Consolidation Area page 458
Periods page 460
Define consolidation area by period page 460
Define relationships between entities and classifiers for the period page 461
Import financial investment data into ownership structure register 462
Page Import financial investments data on Ownership Structure Register Requirements 466
IC Elimination and Matching Requirements page 467
Generate proportional amount page 468
Generate converted amount page 468
Override FX rate difference accounts page 470
Customise account conversion type page 470
Generate consolidable and Equity evaluation page 471
Minorities page 472
Mergers page 473
Account reclassification and NER Requirements page 473
Rules Engine Designer requirements page 474

Advanced consolidation data processing 475
Advanced consolidation page 476
Financial investments reclassification page 477
Equity pick-up Requirements page 477
Pick-up percentages page 478
Override Pick-up percentages page 479
Pick-up rules page 479
IC Spreading Requirements page 480
Override IFRS5 rules page 481
Consolidation procedures 481

Data Processing: allocation and closing 483

Allocations and Closing Requirements page 483
Allocations & Closing rules page 484

Data Processing: Cash Flow Planning 486

Cash Flow Planning 486
Cash Flow Planning Requirements page 487
Cash Flow Planning Rules page 488
Copy actual data page 489
Dimensions/Financial Rules Mapping page (Create derived events and entries) 489
Cash management rules page (Financial simulation) 490

Data Processing: taxes 491

Data Processing related to taxes 491
Tax rules page 491
Taxes setup page 492
Deferred and prepaid taxes - Input accounts page 494
Direct taxes - Input accounts page 495
Deferred and prepaid taxes - Override output accounts page 495
Direct taxes requirements page 496

Data Processing: other data processing 498

Other data processing 498
Asset depreciation rules page 499
Customers/Asset categories attribution page 499

Dividend Requirements page 500

Notification emails 501

Notification emails 501
Send email events 502
Manage the sending of emails 504
Email templates page 505
Parametric e-mail elements 506

Snapshot 508

Snapshot management 508
Snapshot - Requirements page 508

The processes cockpit 510

Process cockpit function 510
Process data management 510
Cockpits: common elements 511

The contributor cockpit 512

Contributor Cockpit 512
Contributor Cockpit page 513
Overview tab 514
Detail summary tab 516
Working in the Summary tab 518
Working in the Detail summary tab 518
Step tab 519
Organisation section of the <step> tab 520
Workflow section of the <step> tab 521
Working in the step tab 522
Performance Dashboard 523
Performance dashboard tab 524
Working in the Performance Dashboard tab 526
Working on process reports (contributor) 527
Actions section of Detail summary and step tabs 528
Preliminary checks 534
Restore 534

DTP activity cockpit 535
Partition data details window 536
Journals book window (for the contributor) 536
Drill down parameters page (ad-hoc analysis) 539
Allocations and closing: entries detail page 540
Pick-up check report window (contributor) 542
Copy amounts and journals window 543
Submission status window (contributor) 545
Entities submission status window 546
Lock data and Unlock data windows 547

The consolidator cockpit 548

Consolidator cockpit 548
Consolidator cockpit page 550
Summary tab 551
Step tab 553
Organisation section of the <step> tab 554
Workflow section of the <step> tab 555
Consolidation scenarios tab 556
Customising the consolidator cockpit 558
Working in the Consolidation Scenarios tab 558
Working in the Summary and <step> tabs 558
Working on process reports (consolidator) 561
Actions section of the Overview and Step tabs 562
Actions section of the Consolidation scenarios tab 566
Copy Consolidation window 567
Interactive Entries View (IEV) 568
Drill down parameters page (ad-hoc analysis) 570
FX rate difference reserves analysis window 571
Financial investments - Net equity analysis window 572
Pick-up check report window (consolidator) 573
Journals book window (consolidator) 573
Change consolidation scope report window 575
Entity/Classifier Relationship page 576
Consolidation area scope page 577

Copy amounts and journals window ... 579
Copy amounts and journals task window ... 581
Net Result and Reserves Group Evolution analysis ... 584
Net Result and Reserves Group Evolution analysis window ... 584
Lock data and Unlock data windows ... 585
Copy consolidation on original ... 586
Copy consolidated on original window ... 587
Submission status window (for the consolidator) ... 588

The IC Cockpit 590

The matching process ... 590
The IC matching cockpit ... 591
IC cockpit opening window ... 592
IC cockpit page ... 594
IC entry management page ... 599
IC cockpit reports ... 602
Link cockpits and processes ... 604
Invoice IC matching ... 604
IC matching by invoice ... 605
Working with IC Spreading ... 606
Create IC Cockpits page ... 607

Deployment 610

General Deployment ... 610

Analytical Workspaces

Introduction

Analytical Workspaces allow you to create customised data models that can be organised into independent structures in the CCH Tagetik application database. Those data models can contain system and custom dimensions, and an unlimited number of customised dimensions. Analytical Workspaces can also be used to manage large volumes of data and obtain complex data, calculated by mass data processing.

With Analytical Workspaces, it is possible to manage typical strategic performance management processes (e.g. HR planning, sales planning), financial consolidation and regulatory reporting processes (e.g. Solvency II, IFRS etc.) and dimensional data-based processes (e.g. profitability analysis) in parallel.

Analytical Workspace data can be used both in process cockpits and in reporting.
The data management elements are defined in CCH Tagetik's web interface while report structures are created in Excel (see Designing forms in the Reporting module).

Every workspace that is created is visible to all authorised users. Even if a user who creates a workspace has restrictions that allow them to view certain workspaces only, the workspace that they created will always be added to the list of available workspaces.

Workspace structure

Contents

This section covers the following topics:

Dataset 2
Reference dataset 3
Fields of the dataset 4
Virtual datasets 5
Datasource 6
Dictionaries 7
Data Transformation Package (DTP) 9
Running the DTP 10
DTP reports 11
Parametric DTPs 12
Details of SQL filters in DTP operations 15

Dataset

What they are

Every workspace can contain one or several datasets, or logical definitions of tables containing workspace data. Datasets are organised in columns. Every column is called a *dataset field* and may contain both Financial Workspace dimensions and measure fields created directly in the dataset itself.

Every dataset defines the structure of the physical tables in the database to manage and save data in data entry mode (see "Partitioning policies" below). Moreover, datasets allow the following activities:

- configuring virtual datasets (see Virtual datasets)
- depending on the configurations, defining the input and output content of DTP data processing (see Data Transformation Package (DTP)).

> ***Note**: when used in the DTP, datasets are identified as standard datasets, to distinguish them from the reference datasets (see Reference datasets).*

Datasets can be activated or deactivated, see Buttons on the dataset tile.

Partitioning policies

It is possible to define dataset partitioning policies, or define the logic with which the tables are created in the database (*partitions*) on which the data are saved.
Partitions are defined according to the submission policies of the business cycle of the process on which the user is working (see Dataset settings window).

Types

A type is a label which identifies a logical set of data in a dataset. It is defined in order to process data and perform calculations on the same table structure of the dataset to which it refers. The type contributes to determining the creation of partitions. A dataset may have several types, defined in order to be used in a Data Transformation Package. See Type definition page.

Visibility for users

Dataset visibility depends on the rights attributed to the user profile. When an administrator creates a dataset, they must check and potentially update the rights of users on workspaces and datasets and rerun the deployment. Details on the management of user rights and deployment are provided below.

If...	Then, when a dataset is created...
the users have restrictions on datasets	the administrator must launch the deployment of user rights manually (Other restrictions > Analytical Workspace: Dataset)
the users have restrictions on workspaces	the administrator must launch the deployment of user rights manually (Other restrictions > Analytical Workspace)
specific users must have restrictions on the new dataset	the administrator must set the visibility rights on the dataset for specific users in user rights settings, then run the deployment of the user rights on the dataset manually (Other restrictions > Analytical Workspace: Dataset) (see User rights over data in the User Management module).

Reference dataset

Introduction

The reference dataset has the same structure as a standard dataset, but is used to enrich/insert DTP data. It determines the way in which the source dataset data are transformed before being added to the target dataset.

Once the reference dataset has been created, it is possible to specify the field's *reference type*, or the scope of the same field in data transformation processes.

Reference type	Function
Condition	Relates the records of the reference dataset to those of the target dataset.
Attributes	Identifies, in the target dataset, the fields to be defined using the reference dataset.
Level	Dataset field that defines a level of exception to a behaviour defined in the source dataset. Does not accept *null* values and the data is numeric.
Source filter	Filters the source dataset when entering data, or the target dataset when updating data. The data is text type. ***Note**: the filter type column supports null values. In these cases, the data involved in the enrichment operation are not filtered.*

For more details on the level and filter fields, see Enrichment with Reference dataset.

Reference dataset - Deploy

A *deploy* type reference dataset inherits all the functionalities of a reference dataset, but allows you to create relational logics between the fields of the source dataset and those of the target dataset. These logics define how the data are enriched in the target dataset. Therefore, not only can they be *one to one* or *many to one*, like for normal reference datasets, but they can also be *one to many* or *many to many* When a source field is related to several fields of the target dataset, during the operation the deploy reference dataset adds all the necessary rows to the target dataset table.

Note: If the reference has a null value for a column used as a condition, it will never be fulfilled.

Reference dataset - advanced settings

An *advanced settings* dataset inherits all the functionalities of a reference dataset, but allows you to define advanced conditions for the enrichment operations. In particular, it allows you to specify multiple comparison requirements (e.g. value of the condition: "<>X" or "=A,B,C") to be verified to satisfy the condition on the target dataset values.

The supported elements are listed below:

- Values like <>*X*, in which *X* is a fixed value
- *Null* value to indicate that all the values satisfy the condition on the target dataset
- *Filter* type field

Elements that are not supported are listed below:

- Special character %
- *Level* type fields

- Data and number type *Condition* columns

Reference dataset - Existence

An *existence* type dataset inherits all the functionalities of a reference dataset. This also allows you to perform existence checks on the target dataset data, piloted by conditions.

The supported elements are listed below:

- *M* value: stands for Mandatory, mandatory, the condition will be considered
- Value *null*: in this case the condition will NOT be considered

This type of reference dataset can only be used with theexistence check operation.

Fields of the dataset

What they are

The *dataset fields* identify the data managed by the dataset. They can be of the following types.

Field type	Description
Dimensional fields	Values of the dimensions available for the dataset. They are always synchronised with the dimension to which they refer and therefore an automatic mapping of the information on the two layers, Analytical and Financial, is created.
Custom fields	Fields defined directly in the dataset. They generally have headers and allow you to insert values according to the supported field types: • text • number • comments and attachments • date

Text field characteristics

By default, text fields have a limit of 255 characters. Regardless of the set length, the maximum supported length in any case depends on the vendor database in use, the personal data protection settings and the encoded property.

The limits set according to the type of database are listed below:

Vendor DB	Maximum length
MS SQL Server	8 000
Oracle	4 000
PostgreSQL	10 485 760
SAP Hana	5 000

The limit on the number of characters may be lower in the presence of non-ASCII characters and based on the character set configured in the database. If the *Encoding* and/or *Sensitive data protection* options are active, the permitted number of characters may be reduced to one quarter. For example, a limit of 4000 characters can be reduced to 1000, or even less if both options are active. By activating these options for a second time, the permitted number of characters for the field is reduced.

If the dataset contains data, the limit can only be increased.

If the maximum supported length is less than what is inserted, the system shows a warning message.

***IMPORTANT**: if the dataset is used in a DTP, the user must pay attention to how many large sized text fields this contains. These reduce performance.*

Rich Text Field

A rich text field does not contain the actual text, but a preview of a document in txt format, created in the programme's default endpoint. The dataset field contains JSON text for the decoding of this file.

Furthermore, this field cannot be set with Personal Data Protection, Size, or Dictionaries. Formatted fields are not visible in Partitions.

If the field type is once again changed into *Simple*, the JSON document will remain orphan. Orphan documents can be cleaned up using a special utility.

If the text field is configured as *Formatted*, the length is set to 4000, and cannot be changed.

***IMPORTANT**: for the field to be correctly formatted, an endpoint for rich text must be set. Otherwise an error will occur.*

Number field characteristics

By default, number fields have a total limit of 38 figures, of which a maximum of 9 may be decimal digits. The number of decimals can be increased at the expense of whole figures included in the number.

If the Dataset contains data, neither the permitted length nor the permitted number of decimal digits can be changed.

Number fields allow you to decide how to aggregate the data on the scenario/period dimension used by the reporting engine in multidimensional matrices.

- **Sum**: (default) the data related to the scenarios/periods identified by the chosen period length are added together.
- **Last**: only the data related to the chosen scenario/period are considered, regardless of the defined period length.

***IMPORTANT**: in reporting, if the dataset contains the Account dimension, the aggregation logic for the data on the Scenario/Period dimension is deduced from the nature and type of the account, not from the measure. For example, if the measure specifies a "Last" type logic, but the account in use is of a Profit & Loss nature with "Normal" type, the applied aggregation logic is the "Sum".*

For number fields, the conversion rate to be applied can be defined.

- **Average FX rate**: the cumulated amount is the result of the conversion at the "average FX rate" defined in the FX rates table.
- **Period average FX rate**: the amount is the result of the conversion of the period at the period average FX rate defined in the FX rates table.
- **Final FX rate**: the amounts are the result of the conversion at the "final FX rate" defined in the FX rates table. It is typically used for the Balance Sheet, Other stocks and details accounts, but not for the Net Equity accounts which are normally converted at the historical FX rate, not available on Analytical Workspaces.
- **None**: the default value is used for accounts not subject to the currency conversion process (e.g. number of employees, volume of sales, etc., as they are numbers not amounts of currency). It can be used for Other Variations/Stock accounts and initial balance variation accounts.

***Note**: when the period length is life-to-date, the on-the-fly FX rate is not supported.*

Characteristics of comment and attachment fields

When a dataset is in use in a form:

- if the form is of the Line by Line type, a field of 'comments and attachments' type must be added manually in the dataset and then the values can be entered. This type of field can only be used on reporting forms and every dataset can only contain one field of this type.
- if the form is multidimensional, nothing needs to be added to the dataset. Comments and attachments are saved on dedicated database tables

The comments and attachments are never included in workspace data exports.

Virtual datasets

What they are

Virtual datasets contain logical definitions which allow you to combine two or more physical datasets, creating relationships between their fields. The fields of virtual datasets are therefore fields called by physical datasets, or fields calculated according to formulas defined by the user.

Field type	Description
Field based on fields of a physical dataset	Field defined on the basis of fields extracted from one or several physical datasets.
Calculated field	Field based on a formula that the system solves at runtime. Formulas for calculating values at runtime can also call physical dataset fields and therefore allow you to work on complex values.

Virtual datasets allow you to combine the values of several datasets and perform calculations without running data processing. The values returned by a virtual dataset are calculated at runtime and are not saved in the database. They can be used in navigation mode by the reporting engine, as input in a DTP operation, or as data sources when loading via Quick Data Loader.

Associations between the fields of datasets

Virtual datasets are defined by relationships between physical datasets. Only *online* physical datasets are available to be selected. *Offline* datasets are not available, as it is assumed that they are undergoing changes.

An association is defined by specifying the two physical datasets and the relative fields, which must be related and combined (*Join*). The virtual dataset therefore only returns the records in which the related fields have matching values. For this reason, at least one relationship between the fields of the two Datasets must be defined.

Using the *Insert all records* option, which can be selected on each of the two related physical Datasets, it is also possible to include, in the set of records returned by the Virtual Dataset, records of the Physical Dataset in which one of the related fields is empty (*Left outer join*, *Right outer join*, *Full outer join*).

Although it is not possible to relate a physical dataset to itself, or select the same Dataset in the two fields of the Relationship, it is still possible not to select a second dataset. Thus, the fields are calculated on the basis of the fields of the only selected physical dataset and it is not possible to add further relationships to other datasets.

***Note**: it is not possible to use other virtual datasets for the definition of a virtual dataset.*

When inserting subsequent Dataset relationships, if one of the two datasets of the new relationship is contained in the previous relationships, this is equivalent to relating the second pair of datasets to the result of the previous relationships.

Example

Dataset A join Dataset B

Dataset B join Dataset C

It is solved by the system as:

(Dataset A join Dataset B) join Dataset C

The same result is obtained with the following 3 pairs of relationships:

Dataset A join Dataset B	*Dataset A join Dataset B*	*Dataset A join Dataset B*
Dataset A join Dataset C	*Dataset C join Dataset B*	*Dataset C join Dataset A*

Datasource

What they are

Datasources are logical definitions (*Views*) based on queries that retrieve data at runtime, the values of which are not therefore saved in the database. Datasource queries can refer to any data in the database, not just dataset field data. Queries can be on the database (current connection), or on other DBs if the necessary permission is possessed.

Datasources are not available for data entry. However, datasources can only be called up in read only mode in forms that modify other data, run in data entry mode.

If the query refers to dataset partitions that the user cannot view, the system does not apply the user restrictions related to the partition. Datasources which refers to a dataset will not inherit its properties.

Dictionaries

Introduction

Dictionaries are lists of elements that allow you to restrict the permitted values for a Dataset field. In particular, when a dictionary is created, its items can be defined using an SQL query. Every dictionary item therefore corresponds to a value that is available for the dataset field. Based on the selected connection, the tab to be used is identified: if the connection is primary, one of the following fields is used:

- MsSql
- Oracle
- Postgres
- Hana Whether the connection is secondary or tertiary, the query in the Other Body tab is used Secondary connections are prefixed (S) and tertiary connections are prefixed (T).

  Primary connection means a connection defined as primary in the configuration file of the standalone.xml application server.

  A secondary connection is a connection defined as secondary in the configuration file of the standalone.xml application server.

  A tertiary connection is a schemaless connection defined as primary or secondary in the configuration file of the standalone.xml application server.

When the dataset is accessed via a data entry form, if the dataset contains fields with dictionaries, a drop-down menu with the selectable values is shown for the cell of the field with the dictionary.
If multiselection is active on the dataset, it will be possible to choose more than one item in the drop-down menu.

> ***Note**: you can specify which fields used in the query contain personal data and the permitted values. When the dictionary is saved, the system validates the inserted fields with those written in the query.*

Details of the query body

The query definition defines the elements that make up the dictionary. The query may refer to one or several fields: one field to determine the code and one or more fields to identify the descriptions depending on the languages supported by the system. The order in which the elements of the SQL query are defined determines the order in which the values of the dictionary are shown in the drop-down menu for the form cell.

The query that defines the dictionary items can refer to the metadata attributes (e.g. the scenario code). These attributes are resolved at runtime based on the execution context (e.g. based on the scenario or Entity on which the DTP is being run), or based on parameters set by the user at runtime.

If the dictionary is associated with a form cell (i.e., a dictionary linked to a dataset field), these attributes are resolved at runtime using the form, sheet, and matrix filters applied to the cell as context. Row/column filters set on the cell itself are therefore excluded from the context.

The syntax for specifying attributes corresponds to the syntax used for specifying cell fields in the reporting (see and definition of an Advanced selection script in the Reporting module). To identify an Advanced selection script within the SQL query, the syntax must be enclosed between brackets like in this example: *${<...>}*.

When relating the dictionary to a field of the dataset (see Dataset definition page), it is possible to define the fields resulting from the create dictionary query to be used to determine the code (**Query field code**) and descriptions (**Query field description**).
These two properties are optional: if they are not defined, the first field of the query defines the code of the dictionary items, while the second, if present, defines their description (if absent, the first field of the query will be used to define both the code and the description).

Dependent dictionaries

To use dictionaries in reporting, it is possible to create dictionaries with selectable values in a field's drop-down menu that depend on values of other fields in the same dataset. To create these relationships, you must:

1. In dictionary settings, create a dictionary element containing a code, description and dependencies, indicating the corresponding dataset fields to be related.
2. In dataset settings, associate the dictionary with the fields involved.

Note: Dependent dictionaries are not compatible if multiselection is active and more than one value has been selected within the dictionary

Example

Given a Dataset containing a *City* field and a *Country* field, it is possible to define a dictionary that returns the following elements:

CITY_CODE	CITY_DESCR	COUNTRY_CODE	COUNTRY_DESC
01	Milan	EN	Italy
02	Rome	EN	Italy
03	London	UK	United Kingdom
04	Liverpool	UK	United Kingdom
05	New York	US	United States
06	Los Angeles	US	United States

To do this, relate the Dictionary fields to the Dataset fields as follows:

- Query field code *City*: field code **CITY_CODE**
- Query field description*City*: field description **CITY_DESCR**
- Query field code *Country*: field code **COUNTRY_CODE**
- Query field description *Country*: **COUNTRY_DESC**

In the data entry step, if the user selects the *Country* Italy, they will only have Milan and Rome available in the *City* field, while if they select United States they will only have New York and Los Angeles. The dependence works in both directions: if Liverpool is selected, the country field will only allow United Kingdom to be selected.

Dictionaries and user language

When, in defining a dataset, a dictionary is related to a text field, the **Query field description** property is defined, and the results of the dictionary contain several description fields related to several languages, the system selects the value with the description in the language of the connected user. In the absence of this correspondence, the field is searched in the query results as specified.

Example

This example shows how to use dictionaries in the presence of several system languages.

If the following languages are defined in the system:

- **Language 0**: English
- **Language 1**: Italiano
- **Language 2**: Français
- **Language 3**: Deutsch

A field of the dataset associated with the dictionary indicated above specifies the following properties:

- Query field code: **CODE**
- Query field description: **DESCR_**

The query specified in a dictionary returns the following fields:

CODE	DESCR_0	DESCR_1	DESCR_2	DESCR_
EN	Italy	Italy	Italy	Italy
UK	United Kingdom	Regno Unito	Royaume-Uni	United Kingdom
US	United States	Stati Uniti	États-Unis	United States

If the connected user uses English, the system concatenates the suffix *0* to the *DESCR_* value, and shows the descriptions in the field reported in the *DESCR_0* field of the query.

If the connected user uses German, and the field *DESCR_3* is not found among the query fields, the system shows the descriptions reported in the *DESCR_* field.

Data Transformation Package (DTP)

Introduction

The Data Transformation Package is a calculation engine that runs data transformation processing in the context of Business Workflow tasks that can be used in processes. In particular, every DTP is made up of one or several *activities* comprising one or several *operations*.

To define a DTP, it is therefore necessary to create the relative activities, divided into operations. The DTP performs calculations on dedicated physical tables identified by typologies with the logical structure defined by the dataset.

Activity details

Each DTP can contain several tasks that are executed in the order defined by the user. The following elements must be defined for every activity:

- the target dataset, or the dataset in which the operations insert, edit or check data,
- a target dataset typology
- a priority level, or the order in which the operations will be run on the reference dataset (for example, a level 3 activity is run after the level 2 activity and before the level 4 activity).

Operation types

Operation type	Description
Insertion	Inserts data from a source dataset into a target dataset.
Enrichment	Enriches a target dataset with data from a source dataset.
Check	Runs checks on the target dataset data according to criteria defined by the user
Deletion	Deletes data from the target dataset according to user-defined criteria

Based on the operation type, it is possible to define calculation criteria for specific data. The operations are run in the order in which they are listed in the DTP. For details of the available operations, see Operations.

Parametric DTPs

When defining a DTP, it is possible to use parametric elements that are resolved at runtime.

For more details, see Parametric DTPs.

Restrictions on the duplication of activities

To create activities with similar properties, it is possible to duplicate activities present in the current DTP. Below are some restrictions and behaviours:

- If there are errors in the duplication of the activity or one of the operations that it contains, the entire data processing will be cancelled.
- Operations which contain *Matching fields* cannot bring those relationships with them if the target dataset is changed in the duplication operation. In such cases, the system searches the new dataset for any columns with the same name as the original target dataset. It then only matches columns with the same name as those saved in the matching fields.
- With *Loading to Analytical Workspace* operations, the operation is only copied if the target dataset matches the source dataset.
- With *Special Method* operations, the values are not copied in the operation.
- For *Allocation* operations, the details are not copied in the operation.
- Fields containing filters or formulas such as *Target filter*, *SQL formula*, or *Run condition* are copied even if they contain references to columns of the target dataset.
- The following duplications are not supported:
  - *Enrichment with formula field* operation
  - fields matched for the *Enrichment with reference table* operation
- Field relationships related to operations will be duplicated if the target dataset matches the source dataset or if the target dataset contains a fields with the same code as a field of the source dataset.
- Relationship fields with special **N** values, which automatically relate the remaining fields, and **F** values, which apply the formula to the remaining fields, are copied in any case.
- In case of upload > *Write to another dataset* or **Export Reporting layer to file** in the activity, the upload will only be copied if the target dataset/type pair matches the source dataset/type pair.

- In case of upload > **Export to Financial Workspace** in the activity, the upload will be copied even if no Financial Workspace mapping is configured for the target dataset.

Running the DTP

Run priorities

The process for running DTPs in various execution contexts is provided below.

Element	Description
Runs several DTPs simultaneously	By default, it is not possible to run, in the same execution context (Process, Scenario, Period, Entity), at the same time DTP data processes containing at least one identical dataset/type. Any data processing started during the data processing that is already in progress will be carried out once it has ended, in the run order. ***Note**: When data processing is run from a workflow task in parallel with a data processing already in progress, containing at least one identical dataset/type, the system displays a window in which the user can choose whether to cancel the launch, retry or put the data processing in the queue. In all cases (workflow, form, API, job) the system performs a check on the resources used by the **DTP** and **Update Financial Workspace from Analytical Workspace** running data processes; if there are resources already used by the current data processes, the booking is done automatically. The waiting time will be indicated in the audit under 'Data processing started' with the heading 'Wait before the run'.*
Run DTPs with the *run independently from context* option active	A DTP containing tasks with the *run independently from context* option will never be queued, but run in parallel with any other data processing that is in progress. DTPs with the *run independently from context* option can be run in parallel with other data processing, whether or not they are associated with a task with "run independently from context".
Run DTPs simultaneously from task groups or workflows in grid	By default, concurrent data processing of the same type is not supported, whether the data processing is run from task groups or workflows in grid. Data processing by task group runs the different DTP tasks of the group in series, regardless of the order of the workflow. Launch workflow in grid: enables the simultaneous launch of different DTPs on different list elements
Run DTPs simultaneously from task groups or workflows in grid with tasks with the *run independently from context* option active and tasks on which the option is not active.	When the *run independently from context* option is only active on some workflow tasks, and several DTPs are run simultaneously, the system performs concurrency checks. Based on the outcome of the checks, run from tasks that do not have the option active, the data processing is run or added to the queue.
Run DTPs with activities or operations containing SQL scripts	Opens a window to define the parameters required at runtime. For further details on the definition of those parameters, see in the Reporting module.

In all execution contexts, if the DTP contains personal data, the DTP data processing can only be run correctly if the data are properly encrypted (see Personal Data Protection).

Run the DTP for entity nodes

The DTP data processing involves data divided by Scenario/Period and Entity. When a data process is run for entity nodes, the DTP may behave differently based on the setup:

If...	Then...
all the DTP targets are partitioned by Business Cycle and Entity.	the DTP is processed individually for each entity. The data processing can be run in parallel if all the execution conditions are satisfied. To run multiple data processing, all the entities must have the same workflow as the selected node.
the datasets are not partitioned by Business Cycle and Entity	the DTP is run just once, with a data process containing the data of all the entities present in the node.

When the system detects a case that is different from those listed, it blocks the data process and reports the error.

> ***Note**: when several entities are selected in the contributor cockpit, the DTP execution can only be completed if the tasks selected in the detailed task list do not run the same DTP for the same entity.*

To run the DTP data processing by entity node from forms, the following syntax is necessary: *<$Entity.Dimension.hierarchyCode>|<$Entity(false).code>*.

Run the DTP independently from the context

On DTP tasks it is possible, via forms, to activate the *Run independently from context* option, which allows you to run them in parallel with any other DTP data processing.

With the option active, the data on partitions with typologies other than *Reporting layer* will not be saved.

This option prevents the use of partitions with *Calculation layer* typology in read/write mode if these are the result of data processing originating from other DTPs.

Run the DTP from Jobs

When the execution of DTP data processing is run from a job, the statuses on the DTP cockpit are not updated. Both with jobs g run from the processes cockpit and with jobs run from a job's run menu, the system saves neither the anomalies deriving from the checking operations nor the operation start and end dates. The information on the last execution prior to being run from a job remains visible.

Data processing ended with anomalies

When the execution of DTP data processing involves check operations, these generate anomalies if the check fails.

Editability checks

When DTP is run, it does not apply editability checks on data.

Thus, for example, it is possible to process submitted entities, or data locked at process level (e.g. with the 'Lock Data' function).

Editability checks are applied instead, for example:

- when loading data via Datasource Mapping;
- during the Update Financial Workspace phase;
- when writing to the Reporting Layer, if the Loading operation 'Write to another dataset' is used.

DTP reports

From the contributor cockpit, the following reports can be launched from the action panel by clicking on the DTP item, but only when executed from lowest level element and if the execution is standard (i.e., context independent).

Note:

- *these reports are not accessible from the Detail summary tab.*
- *In the audit, you can review anomalies, but only the first 10 are displayed.*

Checking rules report

The DTP's *checking rules* report can be run from the contributor cockpit. In the cockpit, details of the dataset/typology paid on which the checking rules have been run are shown at the end of the activity. A list of the checking rules run by the DTP can be exported for every record, in XLSX format. The generated file name will have the following structure:

REGOLEDICONTROLLO_<COD_SCENARIO>_<COD_PERIODO>_<COD_AZIENDA>_<COD_DATASET>_<COD_TIPOLOGIA>_<TIMESTAMP>.XLSX

Warnings report

From the contributor cockpit, it is possible to run the *anomaly report* from the *Data Transformation Package* task by clicking on the DTP button in the action bar.

This report shows errors found in DTP operations. Specifically, if a task ends with anomalies, it displays the list of operations that caused those anomalies during the last run, along with the number of anomalous records found.

When an operation with anomalies has performed a *check* on a dataset, it is possible to download an XLSX file containing details of the dataset rows with anomalies.

The table columns show the following information:

- the DTP that generated the error
- the activity
- the Target dataset
- the target Type
- the n-tuple of LOOP values belonging to the activity iteration
- information on the checking operation that found the error
- the operation type
- the n-tuple of LOOP values belonging to the operation iteration
- the user that ran the data processing
- the data processing run time

The XLSX file shows all the errors found since all the DTPs present in the task workflow were last run.

In the rows above the table with the anomalous values of the operation, the following information is displayed:

- the first row of the file contains the code and description of the operation
- if the operation is part of an activity that has an associated LOOP, the n-tuple of the activity's LOOP iteration values is shown, followed by the n-tuple of the operation's LOOP iteration values if it has an associated LOOP.
- the error message defined on the operation page.

The table with all anomalous data is shown below.

Parametric DTPs

Introduction

When defining a DTP, it is possible to use parametric elements that are resolved at runtime.

Specifically:

- Attributes, which are resolved by the system automatically, based on the specifications entered in the DTP definition step.
- Parameters defined for reporting or data entry purposes, which must be defined at runtime by the user running the data processing.
- Parameters defined in the DTP, which are defined by the administrator in the DTP definition step and resolved automatically at runtime.

Attributes

In DTP fields that accept SQL formulas (e.g. filters and formulas for defining dataset fields), it is possible to refer to attributes related to CCH Tagetik lists (e.g. Scenarios).

For example, attributes can be used to filter a field based on the currency of the entity on which the DTP is being run or define a field with the description from the Previous Scenario before the run scenario.

Attributes must be defined with the syntax used in the reporting for the cell fields and applicable to all dimensional attributes.

The syntax must be between braces :${}.

> **Example**
>
> To filter the reading of data from a dataset, only for records whose CURRENCY field matches the currency of the entity, which you have selected in the process cockpit when running the DTP, you must:
>
> 1. Define an *Insert from another dataset* operation.
> 2. Specify the *CURRENCY = ${$Entity.currency.code}* clause in the *Filter* field.

> **Example**
>
> To define the PREVIOUS_SCENARIO field with the code of the previous scenario that came before the run scenario in an *Enrichment with formula* operation, you must specify the *${$Scenario.prev.code}* syntax in the *SQL formula* field.

Attributes can also be used to define query type database objects in the datasource mapping, special methods and dictionaries.

Parameters for reporting

In DTP fields that support SQL formulas, it is possible to refer to reporting parameters (see in the Reporting module).

***Note**: it is possible to refer to all types of parameters (dimensional, dictionary, text, numeric, date or flag).*

If a DTP uses reporting parameters, when it is run the system will ask you to select one of the values defined as the parameter's options. It is also possible to define a default value.

Dependencies between parameters can be defined in the DTP using advanced selection scripts. Only explicit dependencies are allowed.

Dependent parameters defined in the parameter definition window, Excel add-in side, can also be used within the DTP. Thus, when running a DTP with dependent parameters, the quick search combo box will only show the values that are consistent with the selected dimension.

> **Example**
>
> It is possible to make one or several DTP operations optional. To do this, a Flag type reporting parameter must be defined. Then, in the DTP, in the activity's *Run condition* field, define an activity that encompasses all optional Operations using the following syntax: *${@Parameter_code}*.
>
> At runtime, the user selects a flag to decide whether or not to define the parameter.

Reporting parameters return codes reported in inverted commas, with the exception of the syntax *DATASETPARTITION()*, which refers to the name of a partition. This is generally used in the *FROM* clause of a *query* to refer to the physical name of a partition.

***Note**: If the syntax DATASETPARTITION() is used in the FROM clause in a query and the body of the query contains parameters, and the parameters are not correctly defined when running, the system will show an incorrect query syntax warning. In this case, it is advisable to carry out checks on the correct use of the parameters.*

IMPORTANT: It is not possible to use reporting parameters in the default AW parameter formula and in the Analytical workspace dictionaries. If the parameter is used in dictionary queries, it will not be displayed at runtime. If the parameter is used in an object that supports it, it can be defined on the dictionary.

Parameters defined in the DTP

Parameters defined in the DTP can identify a value or an SQL formula, which will be resolved at runtime and can be used in any DTP field that accepts SQL formulas.

For example, they can be defined to use the same DTP on different processes, basing the data processing logic on the current process. Or they can be defined to determine the filters to be applied to the data processing, or to define a certain dataset field.

Element	Description
Workspace parameters	Parameters defined at the workspace level and referred to using the syntax *:@NOME_PARAMETRO@*. Its value, or the SQL formula, is defined on creation. When the DTP is run, the parameter is replaced with the value that it takes on or. based on the parametrization, its value is requested at launch.
System parameters	See "System parameters" below.
Special method parameters	Parameters defined in the special method and referred to in the SQL formula using the syntax &*NOME_PARAMETRO*&. The value or SQL formula with which to replace the parameters is defined on the operation, in the special method settings (see Special method).

***IMPORTANT**: in SQL formulas, both reporting parameters and DTP parameters can be used simultaneously. No reporting parameters can be used when defining the default formula of the AW parameters or the value to be assigned to the parameter.*

***IMPORTANT**: When the parameter refers to a dimension not belonging to the launch context, the parameter is not automatically resolved.*

For example, if the user launches a DTP or QDL with a parameter of #ENTITIES# type and the process launch phase is by analytical dimension, the parameter will not be resolved and will be left untouched.

***Note**: In the case of execution on the process cockpit with dimension by step, the same limitations apply as for the Loading to Analytical Workspace task.*

System parameters

Predefined parameters automatically resolved when the DTP is run depending on the execution context. They can be referred to using the syntax *#NOME_PARAMETRO#*. There are the following system parameters:

- *#USER#*: user who run the data processing
- *#AW_CODE#*: workspace code of the DTP run in the data processing
- *#PROCESS#*: process code on which the data processing was run
- *#ENTITIES#*: list of entities for which the request to run the DTP was made (separated by commas)
- *#ANALYTICAL_ DIMENSIONS#*: list of *analytical dimensions* on which DTP execution was requested, separated by commas;
- *#CUSTOM_DIMENSIONS#*: list of *custom dimensions* on which DTP execution was requested, separated by commas;
- *#PERIODS#*: list of periods for which the request to run the DTP was made
- *#SCENARIOS#*: list of scenarios for which the request to run the DTP was made
- *#SCENARIOPERIODS#*: scenario/period on which execution was requested (with single-submission processes, it contains the list of scenarios/periods sorted by increasing reference date)
- #REFERENCE_DATE#: *reference date of the scenario/period* of the execution or of the business cycle in case of a single submission process
- *#TARGET_PARTITION#*: target dataset partition of the activity being run
- *#ITERATION_VALUE#*: iteration value within an activity loop
- *#ITERATION_VALUE_OPERATIONS#*: iteration value within an operation loop
- *#AIV#*: returns the n-tuple of iteration values within an activity loop.
  It may refer to a field (*#AIV.FIELD#*): the value of the FIELD field of the corresponding iteration within an activity loop is returned.
  It may refer to the alias (*#AIV.ALIAS#*)
- *#OIV#*: returns the n-tuple of iteration values within a loop of the operation.
  It may refer to a field (*#OIV.FIELD#*): the value of the FIELD field of the corresponding iteration within a loop of the operation is returned.

You can refer to the alias *(#OIV.ALIAS#)*

- *#PROCESS_STEP#*: code of the step to which the running DTP belongs.

***Note**: The codes returned by system parameters are not reported in inverted commas. For the codes to be reported in inverted commas, you must specify that condition in the SQL formula that calls the parameter.*

Details of SQL filters in DTP operations

Dimensional attributed in SQL filters

It is possible to refer to CCH Tagetik dimensions in the execution conditions and SQL filters in DTP activities and operations. The references must be defined with the syntax of the cell fields used in the reporting.

Example: the syntax for checking for the presence of entity EN_00, as a condition for the execution of an activity, is as follows: ${$Entity.code} = 'EN_00'. If the outcome is positive, the result is 'EN_00' = 'EN_00' and the activity is run.

The syntax for checking, as an execution condition, for the presence of an entity EN_00 in a node, is 'EN_00' in (${$Entity.code}).

The system checks that entity EN_00 is among those present in the activity run node.

The cell field is replaced with the value resulting from the checking of the condition reported in inverted commas. If the outcome of the check is a set of values, the cell field is replaced by the set of values in inverted commas separated by commas.

The syntax *${@PARAMETRO}* can be used, in the cell field, to refer to the parameters present in the form parameters definition (see in the Reporting module).

***Note**: the outcome of the DATASETPARTITION cell field check is not reported in quotes as it is a table name.*

Syntax supported in SQL fields

In fields that support SQL language the DTP allows the following syntax, converted in the run step.

Element	Description
System parameters	See "System parameters" on the previous page.
@PARAMETRO@	Parameters defined at the workspace level, which take on the value indicated in the default formula present in the definition of the same parameter.
${@PARAMETRO}	Global parameters defined in forms, supported by SQL scripts defined at the Activity, Operation, Matching fields and Special methods level.
Unified SQL syntax	See Unified SQL syntax.

Workspace functionality

Contents

This section covers the following topics:

Personal Data Protection 16
Workspace Import/Export 17
Import/export workspace data 19
Export Analytical Workspace data via tasks 21
Task (Export from AW) window 22
Update workspace 23
<Workspaces> window, Update from (local) 24
<Workspaces> window, Update from (exported) 25
Analytical Workspace Partition Version Update 26
Analytical Workspace Partition Management Window 27
Analytical Workspace Partition Version Update 28

Personal Data Protection

Introduction

To comply with the GDPR directive on the protection of personal data, CCH Tagetik can run checks on the protection of personal data present in dataset fields. In particular, at the workspace level, it is possible to run checks on the status (protected/unprotected) of personal data and potentially run data processing to encrypt data.

For a field to be included in personal data protection checks and processing, it must have the *Personal field protection* option enabled in its properties. Only users with function *0004095 - Personal Data Protection* enabled in their own role can enable this option and run checking operations.

> ***Note**: users who do not have this function enabled will see the personal data protection options in grey, but they cannot change them.*

Personal data encoding

If the personal data protection option is active on the dataset field, the system encodes the field data on every save and decodes it to display it in the interface and in forms. All encoding and decoding activities run on the fields are recorded in the audit log files.

> ***Note**: the encoding and decoding of personal data can be overridden by the workspace settings.*

Actions on personal data contained in the workspace

The following actions can be performed on personal data individually, but never simultaneously:

Action	Description
Data protection check	Checks that the data on all reporting layer partitions (*$ - Reporting Layer* type), for datasets containing data or dimensions for which personal data protection is active, are properly encrypted. Can return the following results: • **Data protection check never executed**: the data encryption must be checked, applied or removed. • **All your personal data are properly protected**. • **Your personal data are not properly protected**: no data for which protection is active are encrypted. • **Your personal data are not protected**: some data for which protection is active are not encrypted.
Apply Data Protection	Identifies the data on all reporting layer partitions (*$ - Reporting Layer* type) for which personal data protection is active and encrypts them, if not yet properly encrypted.
Remove Data Protection	Identifies the data on all reporting layer partitions (*$ - Reporting Layer* type) for which personal data protection is active and removes the encryption if they are already encrypted.

***IMPORTANT**: to run these actions, the workspace must be offline, but the relative datasets must be online.*

Particular features of personal data protection

- The personal data protection option is only available for the text fields of a dataset.
- If the dataset is offline, or online but has no partitions, the personal data protection option can only be enabled. If the dataset contains partitions and is online, then the option is visible but cannot be changed.
- Neither default values nor dictionaries can be used on fields for which personal data protection is active.
- A label (**Personal data tracking label**) can be associated with dataset fields for which sensitive data protection is active. These labels have a maximum length of 50 characters, only accept ISO LATIN characters and cannot be reserved key words or labels already in use in the dataset. If left empty, these fields take the value of the label. Labels are tracked in the audit log files.

Workspace Import/Export

Introduction

Workspaces and their structures can be exported and subsequently reimported using specific **Export** and **Import** functions.

The export function allows you to export, to files, the setup and potentially the data of one or several online Analytical Workspaces which have all datasets online and available to the user.

In particular, the data of several partitions associated with specific datasets can be exported. Users for whom function 0004173 is enabled are also able to delete the exported partitions from the source Analytical Workspace.

The export operation generates an encrypted file (.awex) with a maximum size of 2GB.

***Note**: in import/export operations, matrices comments and attachments are not considered.*

Data validation

When the data import starts, the system checks that the selected files are correct and consistent.

If...	Then...
it finds a blocking error (e.g. if the export has been divided into several files and these have not been imported simultaneously)	it displays details of the error and stops the update.
it finds a non-blocking error	it displays details of the warning and allows you to continue the update.

There are the following possible non-blocking errors:

- The code of the Analytical Workspace present in the imported file does not match the code of the Analytical Workspace to be updated.
- The exported file was created in a different version from the one in which the import is being run.
- The exported file contains a table that is not present in the target environment.
- The exported file does not contain a table that is present in the target environment.
- The exported file contains a field that is not present in the target environment.
- The exported file does not contain a field that is present in the target environment.

In the absence of validation errors, the system displays a window summarising the validation operations.

Imports and user restrictions

When the import is performed on existing workspaces, if even one workspace is not accessible to the user due to restrictions on their user profile, the system will block the import and show a warning in the validation step.

When the import is performed on existing workspaces, if the user performing it has restrictions on datasets of the target workspace, the system will make any new datasets to be created available to the user provided that the restriction is defined at the workspace level and not directly on the individual datasets.

Where the import entails the addition of a new workspace, if the user has restrictions, the system adds the workspace to the list of workspaces available to be enabled on their profile.

For more details on restrictions, seeAnalytical Workspace in the System Administration module.

Import

When the import entails an Analytical Workspace that is already present in the system, the system deletes the following elements before importing the data:

- the entire workspace setup, and the existing partitions and datasets
- data related to partitions not shared with the import file

Data related to partitions shared with the import file are retained. The data are validated before being imported.

Imported data source

The data to be imported can have the following sources:

Source	Description
Client	The files are located in a local folder.
Application server	The files are located in a folder visible to the application server. **Directory**: folder (*Writable folder*) in which the files are located. See Location of files to be imported in the System Administration module **File name**: name of the .awex file to be imported.
Endpoint/Tagetik Data Loader	The files are located at a CCH Tagetik Endpoint. See Endpoint in the System Administration module. **Endpoint/Tagetik Data Loader**: Endpoint to be used **Directory**: sub-folder of the Endpoint at which the files are located. See Location of files to be imported into the System Administration module **File name**: name of the .awex file to be imported.

Note: the dynamic syntax can be used for the *filename* parameter: Multi File Syntax.In this case, since the files to be processed are AWEX archives, the syntax will not evaluate the contents of the ZIP/AWEX archives, but only the files themselves as entities.

Pre-import data validation

The data are validated before the import and any blocking errors are shown in the import window. If only non-blocking errors are returned, it is possible to proceed with the import. A non-blocking warning is returned if the exported file has at least one of the following characteristics:

- it was generated in a different version from the one in which the import is being run,
- it contains a table that is not present in the target environment,
- it does not contain a table that is present in the target environment,

- it contains a field that is not present in the target environment,
- it does not contain a field that is present in the target environment.

Import fields with Personal Data Protection

If the application manages GDPR/DAC6 regulations, it is possible to export the plain data from source workspace fields with the *Personal Data Protection* option active and, subsequently, recode them using the algorithm and key defined on the target environment. When the *Personal Data Protection* option is not active, the data are exported encrypted and are not visible if GDPR/DAC6 regulations are not managed in the target environment, or if the algorithm and key do not match those of the source workspace.

When the exported data is encrypted, the coding must be performed with the most recent algorithm supported by CCH Tagetik. Any data encrypted with algorithms related to less recent versions will cause problems in both the export and the import steps. In this case, data encrypted with old algorithms will be lost.

To check and encode data in a uniform manner, it is necessary to use the dedicated utilities offered by the Analytical Workspace. See Actions on personal data contained in the workspace.

Import and use of DB vendor Hana

When the work environment involves a Hana database and an analytical workspace is being imported, some partitions may occasionally become misaligned with the archive status of the scenarios/periods associated with the various processes to which the partitions belong. In this case, it is possible to realign the partitions from the process page via the 'Hot/Warm partition alignment' wizard - viewable with function code '004203' (See Archiving Process Data).

Import/export workspace data

Export the fields of a dataset

Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile

Navbar > Analytic Information Hub > workspaces tile > (Dataset tab) dataset tile

1. (Optional) To change a sub-set of elements of the table, click and set the filters on the data to be exported.
2. Click . The files will be exported in an XLSX file.

   ***Note**: after the export, remove the filter to display all the dataset data again.*

Export the field relationships of an operation

Application database > Analytical Workspaces tile > workspace tile > (Data Transformation Package tab) DTP tile > > Operations > (Operation type) Matching fields

Application database > Navigation panel > Analytic Information Hub > workspace tile > (Data transformation package tab) DTP tile > > Operations > (Operation type) Fields mapping

Click , the system will download an XLSX file called *abbinamenti_campi_DD_MM_YYYY_hh.mm.ss* with the following characteristics:

- The columns show both the source dataset fields and the target dataset fields, matched, and the specific properties of the operation being exported.
- In the presence of *Insert from another dataset* or *Insert with reference dataset* operations, any special values on the dataset target fields are indicated by the letters *N* (*Relate remaining fields automatically*) and (*F* (*Apply formula to the remaining fields*).

- Actions to edit, delete or add new relationships can be performed on the downloaded file, by completing the visible fields for a subsequent import.

Import an operation's field relationships after a change

Application database > Analytical Workspaces tile > workspace tile > (Data Transformation Package tab) DTP tile > ⋮ > Operations > (Operation type) Matching fields

Application database > Navigation panel > Analytic Information Hub > workspace tile > (Data transformation package tab) DTP tile > ⋮ > Operations > (Operation type) Fields mapping

"This procedure explains how to import a field mapping file for an operation, after optionally modifying it by editing, deleting, or adding a new field mapping, and filling in all visible fields.

It is not possible to export fields mapping related to one operation and import it into the fields mapping related to another operation.

If the dataset contains *Insert from another dataset* operations.
In the presence of *Insert from another dataset* or *Insert with reference dataset* operations, any special values on the dataset target fields can be defined with the letters *N* (*Relate remaining fields automatically*) and (*F* (*Apply formula to the remaining fields*).

***IMPORTANT**: after the relationships have been exported, it is not possible to make any changes to be applied to the table before running the import.*

Click ↑, then select the file.

Import field relationships into other operations

Application database > Analytical Workspaces tile > workspace tile > (Data Transformation Package tab) DTP tile > ⋮ > Operations > (Operation type) Fields mapping > ↓ / ↑

Application database > Navigation panel > Analytic Information Hub > workspace tile > (Data transformation package tab) DTP tile > ⋮ > Operations > (Operation type) Fields mapping> ↓ / ↑

By default, it is not possible to import a file with field relationships related to an operation in a view related to another operation.

To do this, you must:

1. Export the fields mapping XLSX file from which to copy the data (source) and the fields mapping file of the operation onto which the data are to be copied (target).
2. Select the source file cells and copy them onto the target file, excluding the row IDs.
3. Import the target file into the relevant fields mapping page in the target operations.

Export workspace setup

Application database > Analytical Workspaces tile > ↓ Export > Export

Application database > Navbar > Analytic Information Hub > > ↓ Export > Export

Application Database > Navigation Panel > Analytic Information Hub > ↓ Export > Export

This procedure allows you to export a workspace's setup using a dedicated functionality.

1. Select the workspaces from which to export data: all the data partitions associated with all the selected Analytical Workspace datasets will be displayed.
2. Select the configurations to be exported.
3. Select the desired datasets.
4. To delete the exported partitions from the source Workspace, select **Delete partitions after export**.
5. Click **Run** to export immediately, or **Schedule** to schedule the operation.

Import workspace setup

Application database > Analytical Workspaces tile > Import

Application database > Navbar > Analytic Information Hub > Import

Application Database > Navigation Panel > Analytic Information Hub > Import

This procedure allows you to import a workspace setup saved previously in specific files, using a dedicated functionality.

1. Select the source of the files.
2. Click **Select files to import** and then select the desired files.
3. Click **Run** to import it immediately, or **Schedule** to schedule the operation.

Export the DTP configuration

Application database > Analytical Workspaces tile > (workspace tile) > Export DTP configuration

Application database > Analytic Information hub > (workspace tile) > Export DTP configuration

Application Database > Navigation Panel > Analytic Information Hub > (workspace tile) > Export DTP configuration

This procedure allows you to export the setup of one or several DTPs onto files, using a dedicated functionality. The relative Analytical Workspaces and Datasets must be online.

Select the DTPs the configurations of which you want to export, then click **Run**.

Import the DTP configuration

Application database > Analytical Workspaces tile > (workspace tile) > Import DTP configuration

Application database > Navigation panel > Analytic Information Hub > (workspace tile) > Import DTP configuration

This procedure allows you to import the setup of one or several DTPs previously saved in specific files, using a dedicated functionality.

***IMPORTANT**: the DTPs contained in the file to be imported must belong to the same Analytical Workspace into which they will be imported. It is not possible to manually create a DTP in the target environment and then import a file containing a DTP with the same code.*

1. Select the source of the files.
2. Click **Select files to import** and then select the desired files.
3. Click **Run** to import it immediately, or **Schedule** to schedule the operation.

Note: In case the file source is Application Server or Endpoint, the dynamic syntax can be used for the *filename* parameter: Multi File Syntax. In this case, since the files to be processed are AWEX archives, the syntax will not evaluate the contents of the ZIP/AWEX archives, but only the files themselves as entities.

Export Analytical Workspace data via tasks

Export formats

Data can be exported from Analytical Workspace datasets in the following formats:

- XBRL
- XML
- File
- Bank of Italy Matrix

The data is exported via specific workflow tasks.

Export parameters

To run the export task, the following parameters (all mandatory) must be set:

- **Analytical workspace**: Analytical workspaces in which the partition containing the data is present.
- **Analytical Workspace Dataset**: name of the dataset containing the Data Target Mapping.
- **Analytical Workspace Dataset typology**: typology of dataset selected in **Analytical Workspace Dataset** which contains the Data Target Mapping.
- **Data Target Mapping**: name of the data target mapping that you want to use to generate the file; this must be present in the dataset selected previously in **Analytical Workspace Dataset**.

Export data to XML file

The export requires the user to define the structure of the XML file using (see XML Generator), and therefore to map the partition columns and the XML file elements (see XML Mapping page).

In order for the system to run the data processing, the selected dataset must contain the Entity dimension and the type must be Reporting Layer. For more details on export task settings, see Task (Export from AW) window).

Export data to files

This data process allows you to create a file in the format defined in the relative Data Target Mapping file, see Data Target Mapping page.

Note: the task is not visible and is not supported in the consolidator user phases. Although visible in the mixed phases, the task is only supported in the contributor phases.

Export data to Bank of Italy Matrix

The user must specify whether they want to produce a file to forward the *Report* to the supervisory body or whether it is an *Adjustment* to a previous report.

Export data to XBRL files

This data process allows you to create an XBRL file in accordance with EBA (European Banking Authority) taxonomy.

Export data to XBRL csv files

The data processing makes it possible to generate an XBRL file in the new csv format according to the EBA/Eiopa taxonomy.

.

Task (Export from AW) window

Application database > Business Workflows > select business workflow > ⋮ > Steps > select step > Edit > Data integration > Export from AW - XBRL format/Bank of Italy Matrix format/XML Format/File Format

Application database > Navbar > Processes & Workflows > Business Workflow > select business workflow > ⋮ > Steps > select step > Edit > Data integration > Export from AW - XBRL format/Bank of Italy Matrix format/XML Format/File Format

Purpose of window

This window allows you to set up a task to export Analytical Workspace data.

***Note**: the export file format will depend on the task type selected to access the window.*

To link a task to a single submission process, the following conditions must be met:

- The dataset must be partitioned by Business Cycle or by Business Cycle and Entity.
- The process must contain a single Scenario/Period pair.

Fields in window

Element	Description
Code	Task code
Description	Task description
Optional	Makes the task optional. Submission is therefore possible even if the task has not been performed. ***Note**: in process cockpits, optional tasks are shown in blue.*
Enable e-mail notification	Only if the process send email rule **Completion: Process task workflows** is active. Sends the task managers a notification email reporting that the previous task has been completed and they can start working.
Manually declare task completed	Defines how the task is declared completed. • **Manual** (default): the completion of the task is declared manually by the user. In the presence of tasks with lists of forms, the user can declare a task to be complete even if only some of the forms within it have been completed. • **Automatic**: the task is automatically declared to be complete when the data form is saved in the interface, or when the last task form has been declared to be complete.
Analytical workspace	Allows you to select the Analytical Workspace containing the partition and the relevant file format configuration.
Analytical Workspace Dataset	Allows you to select the dataset containing the data to be exported and the desired Data Target Mapping. ***Note**: the selected dataset must contain the Entity dimension. This restriction does not apply to exports in file format.*
Analytical Workspace Dataset typology	Allows you to select the typology containing the data to be exported. ***Note**: the data processing can only be run from the reporting layer typology. This restriction does not apply to exports in file format.*
Data Target Mapping	Allows you to select the desired Data Target Mapping. The mapping must be present in the dataset selected in **Analytical Workspace Dataset**.
File type	(Only for Export from AW - Bank of Italy Matrix format) Allows you to specify the generated file type.
Label	Allows you to define a label for the task; this is useful for managing user restrictions on tasks.

Update workspace

Details on updating the workspace

The update workspace utility allows you to update the workspace setup and the partitions on its datasets based on another workspace. In particular, it allows you to perform the following actions:

- update shared structural elements with the same ID code
- update, in the target workspace, any elements that are present in the source workspace

***Note**: any elements that are only present in the source workspace will not be changed.*

The following structural elements of the workspace are involved in the update:

- dataset
- dataset type
- dataset mapping (datasource and Financial Workspace)
- DTP
- DTP activities
- activity operations
- special methods
- parameters
- dimensions
- dictionaries

***Note**: comments on Line-By-Line matrices will not be processed during this data processing.*

A workspace can be updated based on the following sources:

- a local workspace (necessarily online)
- a file (with extension **.awex**) generated by exporting a workspace using a specific utility (See Workspace Import/Export)

For both update methods, the system shows a window with details on the data processing at the end of the update.

Where the user running the operation has a restriction on the datasets of the workspace to be updated, if the update entails the creation of datasets in the target workspace, the new datasets will only be visible to the user if the restriction is at the workspace level and not on the datasets.

Data validation

When the update starts, the system checks that the selected files are correct and consistent.

If...	Then...
it finds a blocking error (e.g. if the export has been divided into several files and these have not been imported simultaneously)	it displays details of the error and stops the update.
it finds a non-blocking error	it displays details of the warning and allows you to continue the update.

There are the following possible non-blocking errors:

- The code of the Analytical Workspace present in the imported file does not match the code of the Analytical Workspace to be updated.
- The exported file was created in a different version from the one in which the import is being run.
- The exported file contains a table that is not present in the target environment.
- The exported file does not contain a table that is present in the target environment.
- The exported file contains a field that is not present in the target environment.
- The exported file does not contain a field that is present in the target environment.

Update fields with Personal Data Protection

If the application manages GDPR/DAC6 regulations, it is possible to export the plain data from source workspace fields with the *Personal Data Protection* option active and, subsequently, recode them using the algorithm and key defined on the target environment. When the *Personal Data Protection* option is not active, the data are exported encrypted and are not visible if GDPR/DAC6 regulations are not managed in the target environment, or if the algorithm and key do not match those of the source workspace.

When the exported data is encrypted, the coding must be performed with the most recent algorithm supported by CCH Tagetik. Any data encrypted with algorithms related to less recent versions will cause problems in both the export and the import steps. In this case, data encrypted with old algorithms will be lost.

To check and encode data in a uniform manner, it is necessary to use the dedicated utilities offered by the Analytical Workspace. See Actions on personal data contained in the workspace.

When the *Personal Data Protection* (see Dataset definition page) and *Update existing record* (see Dataset settings window) options are enabled on a dataset field at the same time, it is not possible to open forms containing multidimensional matrices which use the field, and the system will display an error message.

<Workspaces> window, Update from (local)

Application database > Analytical Workspaces tile > (workspace tile) ⋮ > Update from local Analytical Workspace

Application database > Navbar > Analytic Information Hub > Analytical Workspaces tile > (workspace tile) ⋮ > Update from local Analytical Workspace

Application Database > Navigation Panel > Analytic Information Hub > (workspace tile) ⋮ > Update from local Analytical workspace

Purpose of window

This window allows you to set criteria to update the setup of the current workspace based on a local workspace.

Window sections

Element	Description
Update parameters	Allows you to set the data source and sort any duplicated data.
Data	Allows you to select the data partitions to be included in the update and/or select sub-groups of them using filters.

Update parameters

Element	Description
Source Analytical Workspace	Opens a window to select a source workspace from among those to which the user has access.
Disabling Data Management in the Audit	Disables the 'Data Management' item in the audit, containing the comparison of old and new values following the update of the Analytical Workspace
Duplicated order management	The system preserves the information on the order in which to run the operations within the individual DTP activities. This option allows you to set how the system defines, in the target workspace, the order of any operations which have the same sorting code as other pre-existing operations. • **Sort by "Code" field**: the system recalculates the order of all operations to make them unique by concatenating the sorting and operation code. • **Distribute in queue**: any operations only present in the target workspace are placed in a queue after the source workspace operations. ***Note**: the user can reposition operations according to the desired logic.*

Buttons in the window

Element	Description
Run	Runs the workspace update.

<Workspaces> window, Update from (exported)

Application database > Analytical Workspaces tile > (workspace tile) ⋮ > Update from exported Analytical Workspace

Application Database > Navigation Panel > Analytic Information Hub > (workspace tile) ⋮ > Update from exported Analytical workspace

Purpose of window

This window allows you to set criteria to update the setup of the current workspace based on a source file obtained from a previously exported workspace. The file must only contain the export of an Analytical Workspace with the same ID and code as the workspace to be updated.

Fields and buttons in the window

Element	Description
File location	Defines the file from which to import the workspace. • **Client**: selects a file from among those present on the user's machine. • **Application server**: selects one or several files from folders visible to the user on the application server. • **Endpoint / Tagetik Agent**: select via an Endpoint of CCH Tagetik one or more files available on remote directories (see).
Select files to import	(With **File location** set to **Client**) Opens a window to select a local file.
Directory	With **File location** set to **Application server**) Allows you to indicate the directory from which to import the workspace. • no path: uses the *writable folder* directory indicated in the CCH Tagetik configuration files. • relative path of a sub-directory of the *writable folder*. • absolute path of a directory included among the permitted directories. See) (With **File location** set to **Endpoint/Tagetik Agent**) Allows you to indicate a sub-directory in the Endpoint's root directory.
File name	(With **File location** set to **Application server** or **Endpoint/Tagetik Agent**) Allows you to indicate the names of one or several files, separated by ";". *To select all files in AWEX format, use the "*" character.*
Endpoint/Tagetik agent	(With **File location** set to **Endpoint/Tagetik Agent**) Allows you to select an Endpoint from which to import the workspace.
Disabling Data Management in the Audit	Disables the 'Data Management' item in the audit, containing the comparison of old and new values following the update of the Analytical Workspace
Schedule	Allows you to schedule the running of the import. The files will be validated when the import is run.
Run	Allows you to validate the files, and then run the import and update the workspace.
Next	Allows you to validate the selected files before running the import, or to schedule it, if the files are already present in the indicated directory.

Note: the dynamic syntax can be used for the *File name* parameter: Multi File Syntax. In this case, since the files to be processed are AWEX archives, the syntax will not evaluate the contents of the ZIP/AWEX archives, but only the files themselves as entities.

Analytical Workspace Partition Version Update

Application Database > tile Analytical Workspaces > (non-V2 workspace tile) > ⋮ > Update Version > OK on warning popup

Application Database > Navigation Panel > Analytic Information Hub > (workspace tile not V2 version) > ⋮ > Update Version > OK on warning popup

***IMPORTANT**: The functionality is only accessible if the user has enabled 0004225 - Analytical Workspace migration.*

Purpose of window

In this window, you can launch the version upgrade of an Analytical Workspace from the basic version (V0) to the version with Intelligent Analytics support (V2). This update enables the Analytical Workspace to perform reporting operations.

Unlike the other windows of CCH Tagetik, this window remains open until data processing is complete, and must be closed manually once it is finished (but, if desired, it can be closed earlier, letting the data processing continue).

Page fields

Field	Description
Dataset	Description of the dataset to which the partition belongs
Partitions	Number of migrated partitions compared to total partitions. Updated in real time during migration. Only Reporting Layer partitions are counted.
Status	Status of migration. Updated in real time during migration.

Actions on this page

Element	Description
Update Version (Retry)	Run Version Update data processing. This changes the OID field of the datasets within the AW (and their reporting layer partitions) to an incremental numeric field, as well as updating the version number. During this operation, the other functions of the Analytical Workspace are blocked. Calculation Layer partitions are excluded from this operation, and will retain the alphanumeric OID. If the operation is somehow stopped before its completion, the Analytical Workspace and one of its datasets will fail. In that case, the 'Update Version' button is replaced by 'Retry', which restarts the migration from where it was left off. If one of the AW datasets is in the 'Err!Inconsistent Partitions' status, migration is not possible.

Analytical Workspace Partition Management Window

Application Database > tile Analytical Workspace > (workspace tile) ⋮ > Partition Management

***IMPORTANT**: The functionality is only accessible if the user's role includes the function code 00004173.*

Purpose of the page

On this page, partitions of an Analytical Workspace can be managed and deleted.

Page fields

Field	Description
Status	Partition status: **'Online'** (available for data entry and modification) or **'Offline'** not accessible in either Data Entry or navigation
Dataset	code and description of the dataset to which the partition belongs
Process	code and description of the process to which the partition belongs
Scenarios	code and description of the partition scenario
Period	code and description of the partition period
Entity	code and description of the Entity to which the partition belongs
Typology	code and description of partition classification
Partition table name	name of the table containing the partition

***IMPORTANT**: In the fields Dataset, Process, Scenario, Period, Entity, Type it is possible to search by code and description.*
For partitions whose code is '$', searching by description returns no results.
When searching and selecting partitions, the previous selection is cancelled when performing a new search.

Actions on this page

Element	Description
Deletion	**Delete**: The button is activated by selecting at least one partition; it opens a window allowing the user to confirm the deletion of the partition. **Select all partitions**: All partitions to be deleted can be selected using the button at the top left of the table.
Partition status	**Offline**: before deletion, the system changes the status of the partition to Offline and performs checks that prevent a new change of status during deletion of the partition. **Online**: If the deletion of a partition whose initial status is 'Online' fails, the table is not deleted; it is restored to the 'Online' status and is therefore usable. Any comments from the multidimensional matrices attached to the deleted partitions are also deleted.

Analytical Workspace Partition Version Update

Application Database > Analytical Workspaces tile > (V2 version workspace tile) > ⋮ > Rollback to legacy version > OK on warning popup

Application Database > Navigation Panel > Analytic Information Hub > (V2 version workspace tile) > ⋮ > Rollback to Legacy Version > OK on warning popup

***IMPORTANT**: The functionality is only accessible if the user has enabled 0004225 - Analytical Workspace migration.*

Purpose of window

In this window, you can launch the version reset of an Analytical Workspace from the version with support for Intelligent Analytics (V2) to the version that does not support this version (V0). This update enables the Analytical Workspace to perform reporting operations.

Unlike the other windows of CCH Tagetik, this window remains open until data processing is complete, and must be closed manually once it is finished (but, if desired, it can be closed earlier, letting the data processing continue).

Page fields

Field	Description
Dataset	Description of the dataset to which the partition belongs
Partitions	Number of restored partitions compared to total partitions. Updated in real time during migration. Only Reporting Layer partitions are counted.
Status	Status of migration. Updated in real time during migration.

Actions on this page

Element	Description
Rollback to legacy version	Run Version Update data processing. This changes the OID field of the datasets within the AW (and its reporting layer partitions) to a random alphanumeric field, as well as the relevant version number. During this operation, the other functions of the Analytical Workspace are blocked. Calculation Layer partitions are excluded from this operation, and will retain the alphanumeric OID. If one of the AW datasets is in the 'Err!Inconsistent Partitions' state, restore is not possible.

Analytical Workspace pages

Contents

This section covers the following topics:

Analytical Workspaces - Page structure 29
Analytical Workspaces page 30
New Workspace window 31
Clone window 32
Workspace page 33
Workspace settings window 33
Analytical Workspace: Export window 34
Exported files window 35
Analytical Workspace: Import window 36
Analytical Workspace: Import (Validation) window 37
Dictionaries tab 37

Analytical Workspaces - Page structure

Admin

Application database > Analytical Workspaces tile


Application database > Navbar > Analytic Information Hub

Introduction

Analytical Workspace pages have a similar structure and allow you to configure the following elements:

- individual workspaces
- Advanced Analytics Models libraries

What it looks like

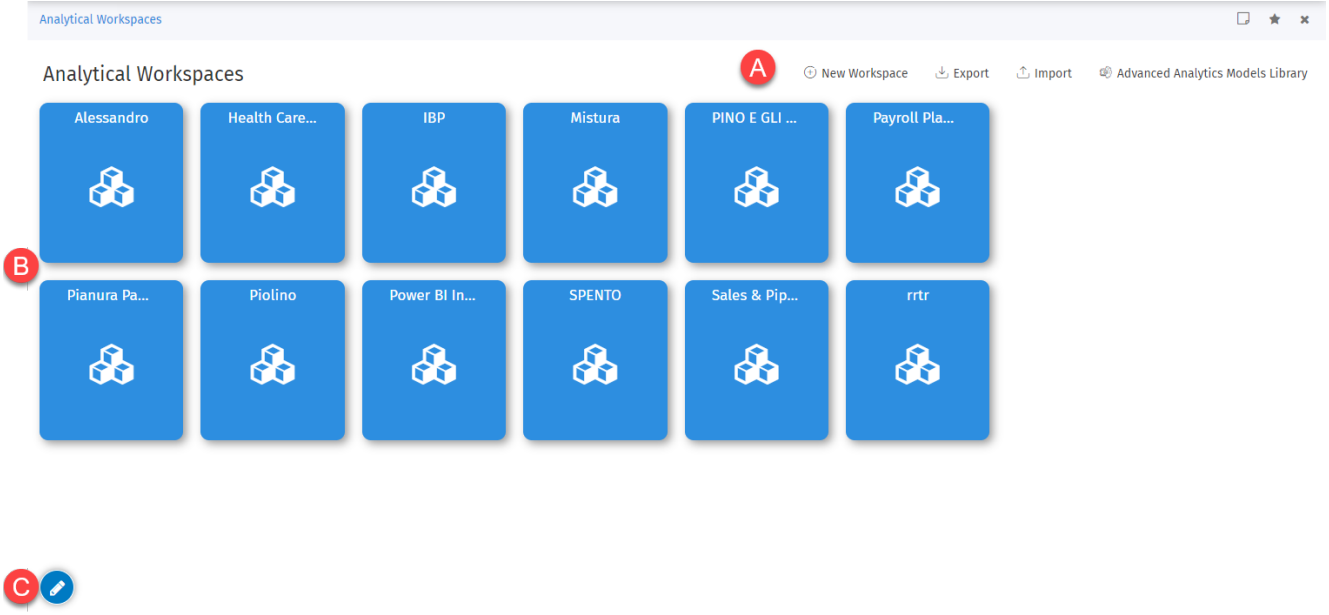

Part	Element	Description
A	Workspace element management buttons	These allow you to create and manage new elements.
B	Layout management buttons	These allow you to customise the page layout.
C	Specific tiles of individual workspaces	These allow you to access the content of the relative element. By default they are sorted by description.

Layout management buttons

The following buttons are accessible from the menu.

Element	Description
	Adds the tile of an element chosen from among those not yet present on the homepage.
	Saves the tile's current layout.
	Cancels unsaved changes to the layout.

The following buttons are only accessible in the tile in the edit layout step.

Element	Description
	Opens a window to set the tile colour and/or select an image for the tile from the system files. ***Note**: it is not possible to set an image for individual workspace tiles.*
	If selected, it becomes and prohibits the tile from being dragged elsewhere in edit mode.
	Deletes the layout tile.

Analytical Workspaces page

Admin

Application database > Analytical Workspaces tile

Application database > Navbar > Analytic Information Hub

Application Database > Navigation Panel > Analytic Information Hub

Purpose of the page

This page shows a list of workspaces on which the connected administrator user is authorised to work. It therefore allows you to create and manage workspaces and import and/or export them from other workspaces (see Analytical Workspace: Import window and Analytical Workspace: Export window.

Page structure

Element	Description
Workspace management buttons	These allow you to create, export and import workspaces.
Layout management buttons	These allow you to customise the page layout. See Layout management buttons.
Workspace tiles	These allow you to access the content of the relative workspace. By default they are sorted by description.

Workspace management buttons

Element	Description
⊕ **New Workspace**	Opens a window to add a new workspace. See Workspace settings window.
Import	Allows you to import the setup, and potentially the data, of one or several Analytical Workspaces previously exported using the Export tool. See Analytical Workspace: Import window.
Export	Allows you to export, to files, the setup and potentially the data of one or several Analytical Workspaces. • **Export**, see Analytical Workspace: Export window. • **Manage exported files**, see Exported files window.

Buttons on the workspaces tile

The following buttons are accessible from the ⋮ menu in the right-hand corner of the tile.

Element	Description
Settings	Opens the workspace settings window. See Workspace settings window.
Clone	Creates a new workspace based on an existing workspace. The created workspace inherits the settings of the existing workspace and, optionally, the dataset mapping (datasource, Financial workspace), forms and data. See Clone window.
Update from local Analytical Workspace	Updates the properties and structure of a workspace based on another workspace to which the user has access. See Workspaces page.
Update from exported Analytical Workspace	Updates the properties and structure of a workspace from a file exported from another workspace using the export tool. See Analytical Workspace: Export window.
Partition management	Allows you to manage and delete partitions in the Analytical Workspace. See Partition Management
Update Version	Allows you to access the Version update pop-up window. Only visible if the user has *0004225 - Analytical Workspace migration* enabled.

The following buttons are only accessible in the tile in the edit layout step.

Element	Description
	Opens a window to set the tile colour.
	Pins the tile in the current position.
	Deletes the layout tile.

New Workspace window

Application database > Analytical Workspaces tile > ⊕ New Workspace

Application database > Navbar > Analytic Information Hub > ⊕ New Workspace

Purpose of window

This window allows you to create a workspace.

Fields in window

Element	Description
Code	Workspace code. By default, the system uses a sequential three-figure numeric code. Cannot be edited once saved for the first time.
Description	Description of the workspace in all languages enabled on the system.
Dimensions	***Note**: if the field is defined, the system will only account for the specified dimensions in the datasets and data processing (e.g. check on personal data, operations). Otherwise, all available dimensions will be considered.*
	Places the workspace online/offline. • **Online**: the workspace can be used for data entry and navigation and can run a DTP. • **Offline**: the workspace cannot be used for data entry or navigation and cannot run a DTP.

Clone window

Application database > Analytical Workspaces tile > (workspace tile) ⋮ > Clone

Application database > Navbar > Analytic Information Hub > (workspace tile) ⋮ > Clone

Purpose of window

This window allows you to create a workspace based on an existing workspace, by duplicating the setup and potentially the mapping of datasets, forms and data.

The generated workspace is visible to users for whom the source workspace is visible.

The cloning of a workspace is subject to the following restrictions:

- If the user running the operation has restrictions with regard to Analytical Workspaces, the cloned workspace is automatically included among those available to them.
- During cloning, the report lists are not recoded (see Report lists in the Reporting module). A form deriving from the cloning of a workspace, when open in design mode, continues to use, in the form, the description for some elements deriving from the source workspace. To change it, the user must reopen the form in design mode and save its structure again.
- Comments related to Line-By-Line matrices are not processed and are not available for the operation.

Fields in window

Element	Description
Code	Code of the new workspace.
Description	Description of the new workspace. If several supported languages are enabled, at least one description is mandatory.
Form	If active, this includes forms belonging to the default node related to the source workspace in the duplication. If one of the forms contains a transactional matrix with filters on the measures that operates on a source workspace dataset, the cloned form inherits the same filters. However, filters on measures associated with dictionary parameters are not cloned. See Custom filters and Dictionaries. ***Note**: data processing that can be run on saving the form and data processing related to mapping with references to the source Analytical Workspace are copied with the definition of the Datasource and Financial workspace mapping parameters.*
List of source workspace partitions	Shows a list of source workspace partitions and allows you to select the ones to be duplicated.

Buttons in the window

Element	Description
Run	Enabled when a code and a description are inserted. Runs the data processing. At the end of the data processing, the system shows the created workspace and an audit window with the results of the data processing.

Workspace page

Application database > Analytical Workspaces tile > workspace tile

Application database > Navbar > Analytic Information hub > workspace tile

Purpose of the page

This page allows you to manage the workspace. In particular, it gives access to the elements that make up the workspace:

- datasets
- virtual datasets and datasources
- dictionaries
- DTP (data transformation packages)

This also gives access to elements that allow you to interact with Advanced Analytics to apply Machine Learning to workspaces in order to populate or enrich them:

- Advanced Analytics Train
- Advanced Analytics Execute

Page tabs

Element	Description
Dataset	Dataset management tab. See Dataset tab.
Virtual datasets and datasources	Virtual dataset and datasource management tab. See Virtual datasets and datasources tab.
Dictionaries	Dictionary management tab. See Dictionaries tab.
Data transformation package	DTP management tab. See Data transformation package tab.
Advanced Analytics Train	Tab for managing the Machine Learning data processing for running the training step of a model.
Advanced Analytics Execute	Tab to run the Machine Learning data processing with application of the created model.

Workspace settings window

Application database > Analytical Workspaces tile > (workspace tile) ⋮ > Settings

Application database > Navbar > Analytic Information Hub > (workspace tile) ⋮ > Settings

Purpose of window

This window allows you to manage the properties or eliminate a workspace.

Fields in window

Element	Description
Code	Workspace code. By default, the system uses a sequential three-figure numeric code. Cannot be edited once saved for the first time.
Description	Description of the workspace in all languages enabled on the system.
Dimensions	***Note**: if the field is defined, the system will only account for the specified dimensions in the datasets and data processing (e.g. check on personal data, operations). Otherwise, all available dimensions will be considered.*
	Places the workspace online/offline. • **Online**: the workspace can be used for data entry and navigation and can run a DTP. • **Offline**: the workspace cannot be used for data entry or navigation and cannot run a DTP.

Buttons in the window

Element	Description
Delete	Deletes the workspace. ***IMPORTANT**: once a workspace has been deleted, it will no longer be possible to recover any of the related data or settings. Any forms with references to the workspace will be invalid and must be updated manually.*

Analytical Workspace: Export window

Application database > Analytical Workspaces tile > Export > Export

Application database > Navbar > Analytic Information Hub > > Export > Export

Purpose of window

This window allows you to export, in a file, the configurations and data of one or several workspaces that contain datasets that are online and available to the user.

***Note**: comments related to Line-By-Line transactional matrices are not imported.*

Page sections

Element	Description
Analytical Workspace selection	Clicking the three dots next to the row will open a window which allows you to select one or several workspaces from which to export configurations and data.
Analytical Workspace table	Shows the data partitions related to the datasets of the selected workspaces and allows you to select the ones to be exported.

Fields in the table

Element	Description
Analytical Workspace	Allows you to select the workspaces from which to export data.
Export Advanced Analytics configuration	Exports the configurations related to the workspace that is being exported for the predictive intelligence with machine learning module.
Exports Transaction Matching configuration	Exports the configurations related to the workspace that is being exported for the module that matches, transaction by transaction, data originating from different sources.

Element	Description
Personal data protection: export uncoded data values	If the application is configured to manage GDPR/DAC6 regulations, the export window shows an option which, if activated, allows you to export the plain data of the partitions belonging to fields with the *Personal Data Protection* option enabled. The data are encrypted again with the algorithm and key defined on the target environment if the *Personal Data Protection* option is active on it. If the option is not activated, the data will be exported encrypted and will not be visible unless GDPR/DAC6 regulations are managed in the target environment and the algorithm and key are the same as in the source environment. If the exported data is encrypted, it must be encrypted using the latest algorithm managed by CCH Tagetik. Data encrypted with several algorithms (old versions) generate problems both in the export step and in the subsequent import step, where data encrypted with old algorithms will be lost.
Data	Shows the data partitions associated with the datasets of the selected workspaces and allows you to select the ones to be exported. The columns show the following information on the partitions: • **Status** • **Analytical Workspace** • **Dataset** • **Process** • **Scenario** • **Period** • **Entity** • **Type** • **Partition table name**

Buttons on the page

Element	Description
Schedule	Allows you to schedule the export for a specific date and time, or set it to run on a recurring basis.
Run	Runs the export. At the end of the data processing, the file containing the exported data can be downloaded. ***Note**: the file generated in AWEX format is encrypted. The content is decoded and becomes visible only once it has been imported into the target environment.* ***Note**: if the file content exceeds 2GB, the system will create more than one file.*

Exported files window

Application database > Analytical Workspaces tile > Export > Exported file management

Application database > Navbar > Analytic Information Hub > Export > Exported file management

Purpose of window

This window shows a list of the exported workspaces and allows you to manage them.

Fields in window

Element	Description
Show export files of all users	Shows all the exports carried out from the environment, including those not run by the current user.

Columns in window

Element	Description
File name	Name of the exported file
Date	Export date
Size	Export file dimension
Download	Downloads the export file.
Delete	Deletes the rows with the selected exports.

Analytical Workspace: Import window

Application database > Analytical Workspaces tile > Import

Application database > Navbar > Analytic Information Hub > Import

Purpose of window

This window allows you to import the configurations and data of one or several previously exported workspaces into the current workspace.

***IMPORTANT**: importing a file generated on the basis of an environment that supports fields with more than 4000 characters to an environment that supports a maximum of 4000 characters may cause an error if the file contains values exceeding that limit.*

Fields and buttons in the window

Element	Description
File location	Defines the file from which to import the workspace. • **Client**: selects a file from among those present on the user's machine. • **Application server**: selects one or several files from folders visible to the user on the application server. • **Endpoint / Tagetik Agent**: select via an Endpoint of CCH Tagetik one or more files available on remote directories (see Endpoint Page in the System Administrator module).
Select files to import	(With **File location** set to **Client**) Opens a window to select a local file.
Directory	With **File location** set to **Application server**) Allows you to indicate the directory from which to import the workspace. • no path: uses the *writable folder* directory indicated in the CCH Tagetik configuration files. • relative path of a sub-directory of the *writable folder*. • absolute path of a directory included among the permitted directories. See the Security settings page in the System Administrator module) (With **File location** set to **Endpoint/Tagetik Agent**) Allows you to indicate a sub-directory in the Endpoint's root directory.
File name	(With **File location** set to **Application server** or **Endpoint/Tagetik Agent**) Allows you to indicate the names of one or several files, separated by ";". *To select all files in AWEX format, use the "*" character.*
Endpoint/Tagetik agent	(With **File location** set to **Endpoint/Tagetik Agent**) Allows you to select an Endpoint from which to import the workspace.
Disabling Data Management in the Audit	Disables the 'Data Management' item in the audit, containing the comparison of old and new values following the update of the Analytical Workspace
Schedule	Allows you to schedule the running of the import. The files will be validated when the import is run.

Element	Description
Run	Allows you to validate the files, and then run the import and update the workspace.
Next	Allows you to validate the selected files before running the import, or to schedule it, if the files are already present in the indicated directory.

Analytical Workspace: Import (Validation) window

Application database > Analytical Workspaces tile > Import > Run

Navbar > Analytic Information hub > Import > Run

Purpose of window

This window shows a summary of the validation of the data to be imported into the workspace. In particular, it indicates:

- the source workspace and the target workspace involved in the import
- (in the presence of dimensional fields) the mapping between the dimensions of the source workspace and those of the target workspace

  ***Note**: if just one workspace is imported, and it contains dimension fields, the mapping between the dimensions can be edited in this window, but the changes are only valid for the import carried out.*

Dictionaries tab

Application database > Analytical Workspaces tile > workspace tile > Dictionaries tab

Application database > Navbar > Analytic Information hub > workspace tile > Dictionaries tab

Purpose of the tab

This tab allows you to define dictionaries.

Sub-tabs in the tab

Element	Description
Attributes	Allows the user to insert the dictionary properties.
Query Body	Allows you to run the following actions: • Define the search query for dictionary elements for supported vendor DBs. • (only with beta option enabled on the repository) Select the database on which to run the query. • Display the query preview. ***Note**: the preview does not support queries containing reporting parameters.*
Personal Data Management	Allows you to specify which fields of the query contain personal data. When the dictionary is saved, the system checks correspondence between the inserted fields of personal data and the fields indicated in the query.

Attributes tab

Element	Description
Dictionary	Dictionary code.
Description	Dictionary description.

Query Body tab

Element	Description
MsSql body **Oracle body** **Postgres body** **Hana body**	• Query insertion area: allows you to insert the syntax of the desired query. • **Connection**: allows you to select the database on which to run the query. The user sees the primary databases. • **Preview**: shows a temporary table with a preview of the query results (max 30 rows). ***Note**: in the presence of ORDER BY clauses, it is useful to view the preview to verify that the query is correct. If necessary, it is possible to add other clauses to the ORDER BY clause.*

Personal Data Management tab

Element	Description
	Adds a personal data field.
Query field name	Allows you to specify the fields from among the results of the query containing personal data.
	Selects the query field.
	Deletes the query field.

Buttons in tab

Element	Description
	Adds a row to the table to define a new dictionary.
	Deletes the selected dictionary.

Dataset

Contents

This section covers the following topics:

Dataset tab 39
New dataset window 40
Dataset definition page 41
Dataset settings window 45
Limitations on Field Names 47
Personal data log label page 55
Type definition page 56
Page Dataset List 56
Partition details window 58
Partition details window 59
Datasource Mapping page 59
Data Target Mapping (XBRL) page 60
Matrix Mapping page 61
XML Mapping page 63
Data Target Mapping page: File mapping 64
See Data Target Mapping page (Update Data Model) 65
Data target mapping (Update Rules) 66
Data Target Mapping (XBRL CSV) 67
Dataset Attributes : Reporting View 69
Creating datasets 69

Dataset tab

Application database > Analytical Workspaces tile > workspace tile

Application database > Navbar > Analytic Information hub > workspace tile

Purpose of the tab

This tab allows you to manage the workspace dataset.

Tab structure

Element	Description
Dataset management buttons	These allow you to add and manage datasets.
Layout management buttons	These allow you to customise the page layout. ***Note**: if the user has not customised the page, by default it will display up to 50 tiles, sorted by description.* See Layout management buttons.
Dataset tiles	• These allow you to access the content of the relative dataset. By default they are sorted by description. • They show the dataset status.

Dataset management buttons

Element	Description
⊕ **New dataset**	Opens a window to add a new dataset.
List of datasets	Opens the workspace dataset management window. See List of Datasets page.

Buttons on the dataset tile

The following buttons are accessible from the ⋮ menu in the right-hand corner of the tile.

Element	Description
Settings	Opens the dataset settings window. See Dataset settings window.
Set offline/online	Sets the dataset offline/online.
Typology	Opens a page to define the types. See Type definition page.

Status of the dataset in the dataset tile

Element	Description
Online, in use (green bar)	Dataset used, containing partitions.
Offline (grey bar)	Dataset not usable.
Online, idle (blue bar)	Dataset not used, not containing partitions.
Online, updating (yellow bar)	Dataset being updated to make it usable after being edited.
Inconsistent	Dataset in an inconsistent state, or the Dataset is *online* but one or more Partitions are *offline* and no update procedure is in progress. In this case, the update procedure can be run again for the datasets in question from the Partition Details pop-up.
Online, version currently being updated	Version update data processing is in progress on the dataset.
Update Error	An error occurred while processing the version update, affecting this dataset.
	This shows the details of the dataset's partitions and the relative partitioning policies.

New dataset window

Application database > Analytical Workspaces tile > click the workspace tile > ⊕ New dataset

Application database > Navbar > Analytic Information hub > click the workspace tile > ⊕ New dataset

Purpose of window

This window allows you to create a dataset.

Fields in window

Element	Description
Code	Dataset code. By default, the system uses a 6-character alphanumeric code. Cannot be edited once created. The code is unique among the physical and virtual Datasets belonging to the same Workspace.
Description	Description of the dataset in all enabled system languages.
Data Entry and Reporting properties	
User data only	When selected, every authorised user can only access their own records via the reporting engine (whether in navigation or data entry mode). The system identifies the relevance of the records using the *Userupd* (current user code) field which is automatically defined in the dataset by the system when the user creates or edits a record.

Element	Description
Disable user right (read-only) check	When selected, it disables the read-only checks on dimensions when the form is opened and saved.
Disable process consistency checks	When selected, it disables the consistency with process checks when the form is opened and saved. Data is not consistent with the process when, in relation to a process dimension, it refers to an element that does not belong to the process. ***Note**: when consistency checks are disabled, submission checks are also automatically disabled.*
Disable submission checks	When selected, this disables submission checks when the form is opened and saved. ***Note**: submission checks are automatically disabled when consistency checks are disabled.*
Disable scenario/period locking checks	When selected, this disables scenario/period locking checks when the form is opened and saved.
Data update methods	This allows you to choose how data is saved after being changed: • **Create new record** (default) • **Updates the existing record**
Partitioning policy	Defines the policy for creating the physical tables (partitions) on which the dataset data will be saved. • **By business cycle** (default): if the process in use is a submission by scenario/period process, one partition is created for every scenario/period pair. If the process is a single submission process, one partition is created for all scenarios/periods in the process, but they are different for each process. • **By business cycle & <entity>**: applies the policy by business cycle and creates a specific partition for every entity. • **None**: all dataset data are saved in a single partition.
DTP properties	
Reference dataset	Selects the reference dataset. • **Dataset** • **Reference dataset** • **Reference dataset - Deploy** • **Reference dataset - Advanced settings** • **Reference dataset - Existence** Once the Dataset has been created, its type cannot be changed. For more details on dataset types, see Reference dataset.

Type definition page

Application database > Navbar > Analytic Information hub > click the workspace tile > ⊕ New dataset
Application database > Analytical Workspaces tile > click on the workspace tile > (dataset tile) ⋮ > Type

Application database > Navbar > Analytic Information hub > click the workspace tile > ⊕ New dataset
Application database > Analytical Workspaces tile > click on the workspace tile > (dataset tile) ⋮ > Type

Purpose of window

This window allows you to define types, or the logical sets of data within a dataset.

***IMPORTANT**: Types which contain data cannot be deleted.*

Dataset definition page


Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile

Navbar > Analytic Information Hub > workspaces tile > (Dataset tab) dataset tile

Purpose of the page

This page allows you to define the fields of the dataset and the relative properties. The fields may be dimensional, and therefore defined to be dragged from the dimensions tree, or custom, and therefore created in the dataset.

What it looks like

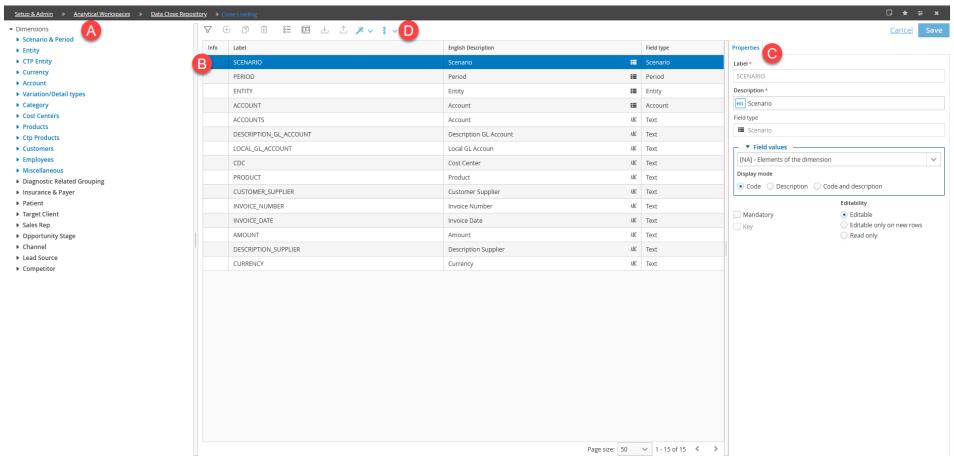

Part	Description
To	Dimensions tree
B	Fields table
C	Field properties panel
D	Action buttons

Page sections

Element	Description
Dimensions tree	Shows all usable dimensions in the dataset and allows you to add them to be dragged as dataset fields into the fields table.
Fields table	Shows the dataset fields and allows you to reorder them to be dragged. ***Note**: to reorder the fields, no changes to the fields must be in progress.*
Field properties panel	Shows the properties of the selected dataset field.

Dimensions tree details

Element	Description
	Dimensional element that can be used as a dataset field. Displayed in different ways depending on the type: • blue = financial dimensions • black = analytical dimensions
	Node of a hierarchy • First level nodes = Dimension node • Sub-node **All elements** = The dataset fields defined through this item only accept dimension elements as input values. • Sub-node **All nodes** = The dataset fields defined through this item only accept nodes of the hierarchy as input values. • Hierarchy level sub-nodes = The dataset fields defined using this item only accept nodes of the selected hierarchy level as input values.

Field properties panel

Element	Description
Label	Field ID. Alphanumeric codes are permitted (maximum 30 characters). Only ISO Latin characters are allowed and reserved keywords are not accepted (see Restrictions on Field Names).
Description	Description of the field in all languages managed in the environment.
Field type	• With dimensional fields, this allows you to select a dimension or a dimensional attribute. • With custom fields, this allows you to select the data type. • If the dataset is offline, with text type fields, the field can be replaced with a dimension type field (excluding the Scenario, Period and Entity dimensions). In this case, if the dataset has partitions, the length of the edited text type field must be shorter than or equal to the length of the chosen dimension. ***Note**: this function is not available if the encoded option is active on the field, or if the field contains personal data (see Personal Data Protection).*
Details/Hide	With **Field type** set to **Text**: • **Format**: **Simple** (selected by default) or **Formatted** (Rich Text Field) (see Text). • **Length**: maximum permitted number of characters (see Text). • **Default value**: default value when the field is not defined. With **Field type** set to **Number**: • **Length**: maximum permitted number of figures (see Number). • **Decimal Digits**: maximum permitted number of decimals (see Number). • **Default value**: default value when the field is not defined.
Field values	Allows you to associate a dictionary with the field, and therefore to select the fields of the SQL query to be used to define the code (**Query field code**) and the description (**Query field description**) of the dictionary items. ***Note**: if the Query field code and Query field description are not defined, to display the data in the forms the system uses the first two fields of the dictionary query for the code and for the description, respectively. If the dictionary query only has one field, this is used for both the code and the description.* ***Note**: in the absence of dictionaries, Field values shows the permitted values for the field (e.g. Free in case of custom fields, Elements of the dimension, Elements of all levels or Elements of the level in case of dimension fields).* **Note**: associating a dictionary with a numeric or date type measure is not supported. It is recommended to associate a dictionary with text-type measures.
Multi-selection	Enables the selection of multiple values, if the measurement is associated with a dictionary. In the **Max Items** field, you can specify the maximum number of items that can be selected, while in the **Separator** field, you can indicate the separator character that will distinguish multiple elements when reading. **Note**: If the Max Items field is empty, an indefinite number of selectable elements will be allowed on the same cell within the limits of the database **Note**: Some separator characters (such as '|' or '=') may cause display issues and are not supported
Encoded	(With **Field type** set to **Text**) Enables custom encoding to save any non-ISO Latin characters on the database, to prevent errors when the field is used in formulas or filters in DTP configurations. Cannot be edited if the dataset is online and contains partitions.

Element	Description
Display mode	Displayed content that identifies the field in the columns of forms in navigation or data entry mode. • **Code** • **Description** • **Code and Description**
Mandatory	If active, the dataset only accepts records where all mandatory fields have been defined.
Key	If a dataset "without partition" has been created, the key flag is enabled. When enabled, it defines the field as a physical key on the database, which makes it possible to insert unique values only in the dataset. In case of a dataset with a key field, multidimensional data entry is disabled. Advisable parameter for inserting table type values.
Personal Data Protection	When active, includes the field in the personal data protection checks (see Personal Data Protection). Only available if function *0004095 - Personal Data Protection* is enabled for the user. ***IMPORTANT**: once the Personal Data Protection option is selected, the checkbox is blocked.*
Editability	Manages the editability of the field when the dataset is accessed via a transactional form (Line-by-line Form). • **Editable** • **Editable only on new rows** • **Read only** ***IMPORTANT**: When the dataset contains the dimensions Scenario, Period , Entity and Account (or the Account/Category pair in the case of an Account/Category process), the editability of the data depends on the submission status of the process. Since these four dimensions determine the individual record's submission status, they are set by the system as non-editable on the existing rows, regardless of the specified editability settings.*

Buttons on the page

Element	Description
Export for Import	Runs the download of dataset data in XLSX format.
Import from Excel	Opens the window to select an XLSX file from which to import data into the dataset.

Actions on this page

Accessible via the ⋮ button in the fields table.

Element	Description	
Data Entry	**If...**	**Then...**
	the dataset is already being used in a data entry form	it allows you to select the process on which to run the form, then opens the form in data entry mode. ***Note**: during this operation, if the form has not already been associated with the selected process, the system associates the form and all the dataset measures to the process and runs the process deployment automatically.*
	the dataset is not present in a data entry form	it automatically creates a transactional data entry web form (*Line item*) with all the available fields displayed in its columns. ***Note**: the form has a code that equal to the concatenation of the workspace code and the dataset code, while the description corresponds to that of the dataset.*
Financial workspace mapping	Allows you to define the mapping between the dataset fields and the dimensions of CCH Tagetik so that the Quick Data Loader can automatically align the Financial workspace layer with the Analytical workspace layer. (seepage in the Quick Data Loader module.	
Datasources mapping	Allows you to define the types of source, the loading methods and the relationships between the dimensions in order to load data from external data sources onto the Dataset.	
Data Target Mapping XBRL	Opens the window to carry out the mapping for XBRL presentation. See Export data via task. See Data Target Mapping (XBRL) page.	
Data Target Mapping: Matrix	Opens the window to carry out the mapping for the bank supervisory reporting. See Export data via task. See the Matrix Mapping page.	
Data Target Mapping XML	Opens the window to carry out the mapping for XML reports (XML Mapping page). See Export data via task.	
Data Target Mapping: File	Opens a window to carry out mapping for loading data from an Excel file, XML or a text with separator. See Data Target Mapping page: File mapping.	
Data Target Mapping: update data model	Opens a window to define the mapping between the dataset and the table fields of the selected analytical dimension. See Data Target Mapping page (Update Data Model).	

(Only in the presence of dataset fields with the *Personal Data Protection* option active) Accessible via the ✳ button in the fields table.

Element	Description
Personal data log label	Opens a page to define the tracking labels for every field with personal data protection. See Personal Data Protection.

Dataset settings window

Application database > Analytical Workspaces tile > click the workspace tile > (dataset tile) ⋮ > Settings

Purpose of window

This window allows you to manage properties or delete a dataset.

Fields in window

Element	Description
Code	Dataset code. By default, the system uses a 6-character alphanumeric code. Cannot be edited once created. The code is unique among the physical and virtual Datasets belonging to the same Workspace.
Description	Description of the dataset in all enabled system languages.
Data Entry and Reporting properties	
User data only	When selected, every authorised user can only access their own records via the reporting engine (whether in navigation or data entry mode). The system identifies the relevance of the records using the *Userupd* (current user code) field which is automatically defined in the dataset by the system when the user creates or edits a record.
Disable user right (read-only) check	When selected, it disables the read-only checks on dimensions when the form is opened and saved.
Disable process consistency checks	When selected, it disables the consistency with process checks when the form is opened and saved. Data is not consistent with the process when, in relation to a process dimension, it refers to an element that does not belong to the process. ***Note**: when consistency checks are disabled, submission checks are also automatically disabled.*
Disable submission checks	When selected, this disables submission checks when the form is opened and saved. ***Note**: submission checks are automatically disabled when consistency checks are disabled.*
Disable scenario/period locking checks	When selected, this disables scenario/period locking checks when the form is opened and saved.
Data update methods	This allows you to choose how data is saved after being changed: • **Create new record** (default) • **Updates the existing record**
Partitioning policy	Defines the policy for creating the physical tables (partitions) on which the dataset data will be saved. • **By business cycle** (default): if the process in use is a submission by scenario/period process, one partition is created for every scenario/period pair. If the process is a single submission process, one partition is created for all scenarios/periods in the process, but they are different for each process. • **By business cycle & <entity>**: applies the policy by business cycle and creates a specific partition for every entity. • **None**: all dataset data are saved in a single partition.
DTP properties	
Reference dataset	Selects the reference dataset. • **Dataset** • **Reference dataset** • **Reference dataset - Deploy** • **Reference dataset - Advanced settings** • **Reference dataset - Existence** Once the Dataset has been created, its type cannot be changed. For more details on dataset types, see Reference dataset.

Buttons in the window

Application database > Analytical Workspaces tile > click the workspace tile > (dataset tile) ⋮ > Settings

Element	Description
Delete	Deletes the dataset. ***IMPORTANT**: to delete a dataset, it must be offline and not in use in any virtual dataset or DTP. Once a dataset has been deleted, it will no longer be possible to recover any of the related data or settings. Any forms with references to the workspace will be invalid and must be updated manually.*

Limitations on Field Names

When naming the labels that identify the dataset field names, the following terms are not allowed as they are reserved by the system.

"ABSOLUTE",
"ACTION",
"ADA",
"ADD",
"ADMIN",
"AFTER",
"AGGREGATE",
"ALIAS",
"ALL",
"ALLOCATE",
"ALTER",
"AND",
"ANY",
"ARE",
"ARRAY",
"AS",
"ASC",
"ASSERTION",
"AT",
"AUTHORIZATION",
"AVG",
"BACKUP",
"BEFORE",
"BEGIN",
"BETWEEN",
"BINARY",
"BIT",
"BIT_LENGTH",
"BLOB",
"BOOLEAN",
"BOTH",
"BREADTH",
"BREAK",
"BROWSE",
"BULK",
"BY",
"CALL",
"CASCADE",
"CASE",
"CAST",
"CATALOG",
"CHAR",
"CHAR_LENGTH",
"CHARACTER",

"CHARACTER_LENGTH",
"CHECK",
"CHECKPOINT",
"CLASS",
"CLOB",
"CLOSE",
"CLUSTERED",
"COALESCE",
"COLLATE",
"COLLATION",
"COLUMN",
"COMMIT",
"COMPLETION",
"COMPUTE",
"CONDITION",
"CONNECT",
"CONNECTION",
"CONSTRAINT",
"CONSTRAINTS",
"CONSTRUCTOR",
"CONTAINS",
"CONTAINSTABLE",
"CONTINUE",
"CONVERT",
"CORRESPONDING",
"COMMENT",
"COUNT",
"CREATE",
"CROSS",
"CURRENT",
"CURRENT_DATE",
"CURRENT_PATH",
"CURRENT_ROLE",
"CURRENT_TIME",
"CURRENT_TIMESTAMP",
"CURRENT_USER",
"CURSOR",
"CYCLE",
"DATA",
"DATE",
"DATABASE",
"DATEDIFF",
"DAY",
"DBCC",
"DEALLOCATE",
"DEC",
"DECIMAL",
"DECLARE",
"DEFAULT",

"DEFERRABLE",
"DEFERRED",
"DELETE",
"DENY",
"DEPTH",
"DEREF",
"DESC",
"DESCRIBE",
"DESCRIPTOR",
"DESTROY",
"DESTRUCTOR",
"DETERMINISTIC",
"DIAGNOSTICS",
"DICTIONARY",
"DISCONNECT",
"DISK",
"DISTINCT",
"DISTRIBUTED",
"DOMAIN",
"DOUBLE",
"DROP",
"DUMMY",
"DUMP",
"DYNAMIC",
"EACH",
"ELEMENT",
"ELSE",
"END",
"END-EXEC",
"EQUALS",
"ERRLVL",
"ERROR",
"ESCAPE",
"EVERY",
"EXCEPT",
"EXCEPOTION",
"EXEC",
"EXECUTE",
"EXISTS",
"EXIT",
"EXTERNAL",
"EXTRACT",
"FALSE",
"FETCH",
"FILE",
"FILLFACTOR",
"FIRST",
"FLOAT",
"FOR",

"FOREIGN",
"FORTRAN",
"FOUND",
"FREE",
"FREETEXT",
"FREETEXTTABLE",
"FROM",
"FULL",
"FUNCTION",
"GENERAL",
"GET",
"GLOBAL",
"GO",
"GOTO",
"GRANT",
"GROUP",
"HAVING",
"HOLDLOCK",
"HOST",
"HOUR",
"IDENTITY",
"IDENTITY_INSERT",
"IDENTITYCOL",
"IF",
"IGNORE",
"IMMEDIATE",
"IN",
"INCLUDE",
"INDEX",
"INDICATOR",
"INITIALIZE",
"INITIALLY",
"INNER",
"INOUT",
"INPUT",
"INSENSITIVE",
"INSERT",
"INT",
"INTEGER",
"INTERSECT",
"INTERVAL",
"INTO",
"IS",
"ISOLATION",
"ITERATE",
"JOIN",
"KEY",
"KILL",
"LANGUAGE",

"LARGE",
"LAST",
"LATERAL",
"LEADING",
"LEFT",
"LENGTH",
"LESS",
"LEVEL",
"LIKE",
"LIMIT",
"LINENO",
"LOAD",
"LOCAL",
"LOCALTIME",
"LOCALTIMESTAMP",
"LOCATOR",
"LOWER",
"LPAD",
"MAP",
"MATCH",
"MAX",
"MERGE",
"MIN",
"MINUTE",
"MOD",
"MODIFIES",
"MODIFY",
"MODULE",
"NAMES",
"NATIONAL",
"NATURAL",
"NCHAR",
"NCLOB",
"NEW",
"NEWOID",
"NEXT",
"NO",
"NOCHECK",
"NONCLUSTERED",
"NONE",
"NOT",
"NULL",
"NULLIF",
"NUMERIC",
"NUMBER",
"OBJECT",
"OCTET_LENGTH",
"OF",
"OFF",

"OFFSETS",
"ON",
"ONLY",
"OPEN",
"OPENDATASOURCE",
"OFFSET",
"OPENQUERY",
"OPENROWSET",
"OPENXML",
"OPERATION",
"OPTION",
"OR",
"ORDER",
"ORDINALITY",
"OUT",
"OUTER",
"OUTPUT",
"OVER",
"OVERLAPS",
"PAD",
"PARAMETER",
"PARTIAL",
"PASCAL",
"PATH",
"PERCENT",
"PIVOT",
"PLAN",
"POSITION",
"POSTFIX",
"PRECISION",
"PREFIX",
"PREORDER",
"PREPARE",
"PRESERVE",
"PRIMARY",
"PRINT",
"PRIOR",
"PRIVILEGES",
"PROC",
"PROCEDURE",
"PUBLIC",
"R",
"RAISERROR",
"READ",
"READS",
"READTEXT",
"REAL",
"RECONFIGURE",
"RECURSIVE",

"REF",
"REFERENCES",
"REFERENCING",
"RELATIVE",
"REPLICATION",
"RESOURCE",
"RESTORE",
"RESTRICT",
"RESULT",
"RET",
"RETURN",
"RETURNS",
"REVERT",
"REVOKE",
"RIGHT",
"ROLE",
"ROLLBACK",
"ROLLUP",
"ROUTINE",
"ROW",
"ROWCOUNT",
"ROWGUIDCOL",
"ROWS",
"RULE",
"SAVE",
"SAVEPOINT",
"SCHEMA",
"SCOPE",
"SCROLL",
"SEARCH",
"SECOND",
"SECTION",
"SECURITYAUDIT",
"SELECT",
"SEMANTICKEYPHRASETABLE",
"SEMANTICSIMILARITYDETAILSTABLE",
"SEMANTICSIMILARITYTABLE",
"SEQUENCE",
"SESSION",
"SESSION_USER",
"SET",
"SETS",
"SETUSER",
"SHUTDOWN",
"SIZE",
"SMALLINT",
"SOME",
"SPACE",
"SPECIFIC",

"SPECIFICTYPE",
"SQL",
"SQLCA",
"SQLCODE",
"SQLERROR",
"SQLEXCEPTION",
"SQLSTATE",
"SQLWARNING",
"START",
"STATE",
"STATEMENT",
"STATIC",
"STATISTICS",
"STRUCTURE",
"SUBSTRING",
"SUM",
"SYSTEM_USER",
"TABLE",
"TABLESAMPLE",
"TEMPORARY",
"TERMINATE",
"TEXTSIZE",
"THAN",
"THEN",
"TIME",
"TIMESTAMP",
"TIMEZONE_HOUR",
"TIMEZONE_MINUTE",
"TO",
"TOP",
"TRAILING",
"TRAN",
"TRANSACTION",
"TRANSLATE",
"TRANSLATION",
"TREAT",
"TRIGGER",
"TRIM",
"TRUE",
"TRUNCATE",
"TRY_CONVERT",
"TSEQUAL",
"UNDER",
"UNION",
"UNIQUE",
"UNKNOWN",
"UNNEST",
"UNPIVOT",
"UPDATE",

"UPDATETEXT",
"UPPER",
"USAGE",
"USE",
"USER",
"USING",
"VALUES",
"VARCHAR",
"VARIABLE",
"VARYING",
"VIEW",
"WAITFOR",
"WHEN",
"WHENEVER",
"WHERE",
"WHILE",
"WITH",
"WITHIN GROUP",
"WITHOUT",
"WORK",
"WRITE",
"WRITETEXT",
"ZONE",
"YEAR",
"MONTH",
"OID",
"OID_BK",
"PROVENIENZA",
"TGK_NI_MEAS_COUNTER",
"DATEUPD",
"USERUPD",
"AW_ROW_NUM"

Personal data log label page

Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile > > Labels for personal data tracking

Application database > Navbar > Analytic Information hub > workspace tile > (Dataset tab) dataset tile > > Labels for personal data tracking

Purpose of the page

This page allows you to associate dataset fields with personal data protection of data log labels. These labels allow you to define any empty values and view the labelled fields in the log tools.

Page fields

Element	Description
Label	Shows the code of the field in the dataset.
Personal data log label	Only supports ISO Latin characters and does not allow reserved keywords or labels that have already been used in the same dataset. Supports up to a maximum of 50 characters. If the field is marked for Personal Data Protection, then it must always contain a value. If left empty, it will be assigned the value of the **Label** field.

Type definition page

Application database > Analytical Workspaces tile > select the workspace tile > (select the dataset tile) ⋮ Types

Application database > Navbar > Analytic Information hub > select the workspace tile > (select the dataset tile) ⋮ Types

Purpose of the page

This page allows you to define the properties of types, or labels that distinguish logical sets of data in a dataset.

Page fields

Element	Description
Type	Type code. ***Note**: characters with ASCII codes from 33 to 126 are permitted, except for the following: 61, 124, 44, 39, 34, 47, 92, 58, 42, 63, 60 or 62.*
Description	Description of the type in the languages supported by the system.

Buttons in tab

Element	Description
	Adds a type.
	Duplicates the selected type.
	Deletes the selected type. ***IMPORTANT**: Types which contain data cannot be deleted.*

Page Dataset List

Application database > Analytical Workspaces tile > workspace tile > List of Datasets

Application database > Navbar > Analytic Information hub > workspace tile > List of Datasets

Purpose of the page

This window allows you to create and manage datasets. In particular, as it allows you to select several datasets (multi-selection), it allows you to make centralised edits.

Page sections

Element	Description
List of datasets	• View a list of existing datasets. • Shows the dataset status (active/inactive) and its properties on every row (see Attributes). • Allows you to select several datasets to make changes using multi-selection. • Allows you to change the order of the data (ascending/descending). • It is possible to change the status of the dataset from online to offline and vice versa
Attributes	Allows you to manage the properties of the selected dataset.

Attributes

Element	Description
Cod.	Dataset code. By default, the system uses a 6-character alphanumeric code. Cannot be edited once created. The code is unique among the physical and virtual Datasets belonging to the same Workspace.
Description	Description of the dataset in all enabled system languages.
Data Entry and Reporting properties	
User data only	When selected, every authorised user can only access their own records via the reporting engine (whether in navigation or data entry mode). The system identifies the relevance of the records using the *Userupd* (current user code) field which is automatically defined in the dataset by the system when the user creates or edits a record.
Disable user right (read-only) check	When selected, it disables the read-only checks on dimensions when the form is opened and saved.
Disable process consistency checks	When selected, it disables the consistency with process checks when the form is opened and saved. Data is not consistent with the process when, in relation to a process dimension, it refers to an element that does not belong to the process. ***Note**: when consistency checks are disabled, submission checks are also automatically disabled.*
Disable submission checks	When selected, this disables submission checks when the form is opened and saved. ***Note**: submission checks are automatically disabled when consistency checks are disabled.*
Disable scenario/period locking checks	When selected, this disables scenario/period locking checks when the form is opened and saved.
Data update methods	This allows you to choose how data is saved after being changed: • **Create new record** (default) • **Updates the existing record**
Partitioning policy	Defines the policy for creating the physical tables (partitions) on which the dataset data will be saved. • **By business cycle** (default): if the process in use is a submission by scenario/period process, one partition is created for every scenario/period pair. If the process is a single submission process, one partition is created for all scenarios/periods in the process, but they are different for each process. • **By business cycle & <entity>**: applies the policy by business cycle and creates a specific partition for every entity. • **None**: all dataset data are saved in a single partition.
DTP properties	
Reference dataset	Selects the reference dataset. • **Dataset** • **Reference dataset** • **Reference dataset - Deploy** • **Reference dataset - Advanced settings** • **Reference dataset - Existence** Once the Dataset has been created, its type cannot be changed. For more details on dataset types, see Reference dataset.

Buttons in the window

Element	Description
	Adds a dataset.
	Deletes the dataset. Datasets can only be deleted when their status is status offline. The system checks whether the Dataset is being used by a Virtual Dataset or a DTP. Therefore, these links must be removed manually before the dataset is deleted. ***IMPORTANT**: once a dataset has been deleted, it will no longer be possible to recover any of its data or settings. Any forms with references to the workspace will be invalid and must be edited manually.*
	Table fields definition: opens a page to define the fields of the table (see "Dataset definition page" on page 41). **Type**: opens a page to define the types (see "Type definition page" on page 56). **Set on-line/off-line**: brings the selected dataset online or moves it offline

Partition details window

Application database > Analytical Workspaces tile > select the workspace tile > List of Datasets > Section > (Data entry and reporting properties) Partitions

Application database > Navbar > Analytic Information hub > select the workspace tile > List of Datasets > Section > (Data entry and reporting properties) Partitions

Application database > Analytical Workspaces tile > select the workspace tile > (dataset tile)

Application database > Navbar > Analytic Information hub > select the workspace tile > (dataset tile)

Purpose of window

This window allows you to perform the following actions:

- View a list of partitions present on the dataset, and the relative partitioning policies and their status.
- Delete offline partitions.
- Depending on user rights, access details of the partition fields and data through on the rows listing the partitions (see Partition data details window).

***Note**: the icon only appears if the user has access to the dataset related to the partition.*

Buttons in the window

Element	Description
	Opens the details window for the selected partition and shows a list of the fields and data contained in it.

Partition details window

Application database > Analytical Workspaces tile > select the workspace tile > List of Datasets > Section > (Data entry and reporting properties) Partitions

*Application database > Analytical Workspaces tile > select the workspace tile > (dataset tile) > *

Purpose of window

This window shows a list of the attributes contained in the partition and the values, indicating, for each one, the last user to have edited it, the date on which it was edited, and its origin.

Buttons in the window

Element	Description
.CSV	Allows you to export data from the partition to a csv file.

Datasource Mapping page

Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile > > Datasource Mapping


Application database > Navbar > Analytic Information hub > workspace tile > (Dataset tab) dataset tile > > Datasource Mapping

Purpose of the page

This page allows you to define the mapping of datasources to dataset fields. To create the mapping, simply select a field of the datasource and drag it to elements of the dataset.

Different dataset fields will be shown according to the selected dataset.

What it looks like

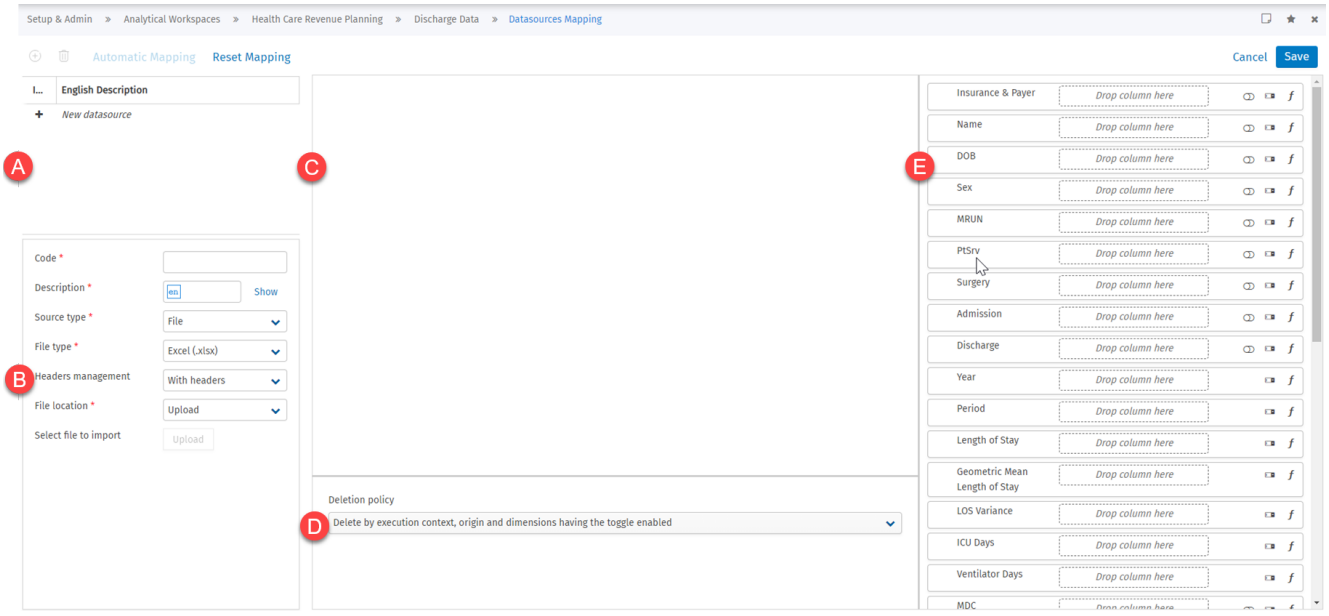

Element	Description
A	List of mapped datasources
B	Mapping details
C	Table with datasource fields
D	Selected deletion method
E	Fields of the dataset

Mapping details

Element	Description
Code	Unique mapping code for every dataset
Description	Description of the mapping in languages activated in the environment
Source type	Source type used as datasource. Different detailed information will be requested depending on the file type.
Deletion policy	This allows you to define the deletion policy for the data existing before the import For details, see the import criteria definition window in the Quick Data Loader module.

Data Target Mapping (XBRL) page


Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile > > Data Target Mapping XBRL

Application database > Navbar > Analytic Information hub > workspace tile > (Dataset tab) dataset tile > > Data Target Mapping XBRL

Purpose of the page

This page allows you to create mapping between the columns of a dataset and the elements of the export file, which can be used to produce a declaration confirming that it meets XBRL criteria. To create the mapping, simply select a dataset field and drag it to the relationship elements.

What it looks like

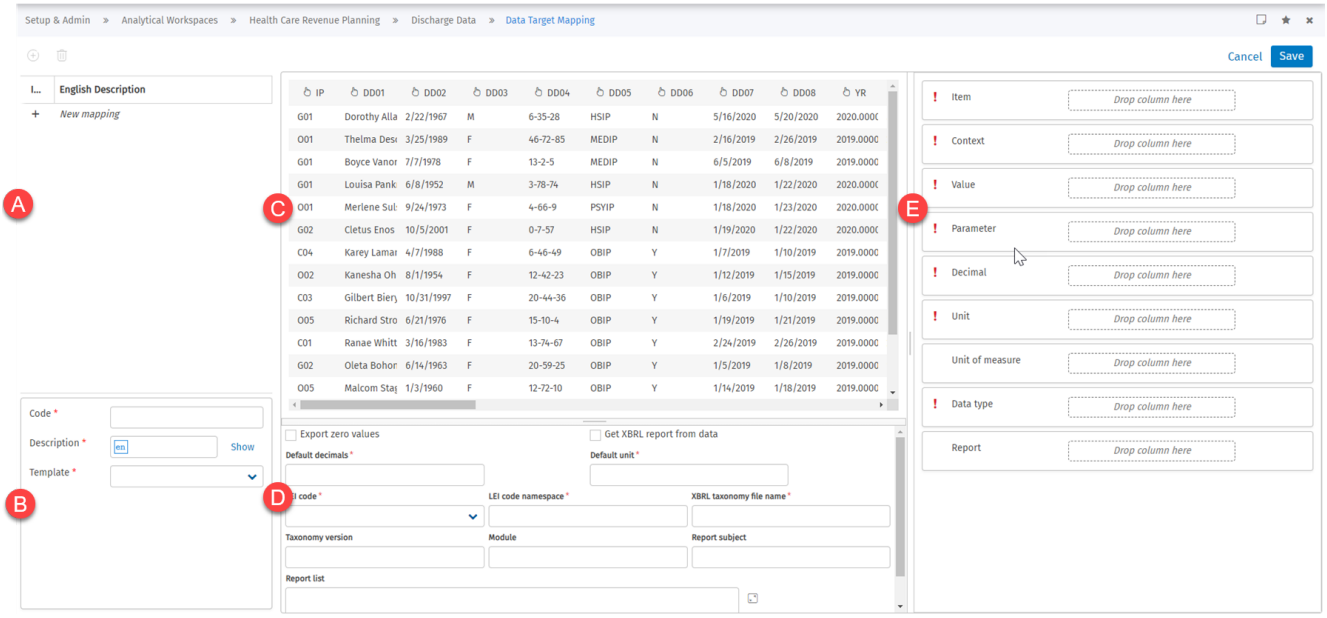

Element	Description
A	Mapping list
B	Mapping details
C	Table with dataset fields
D	Details of XBRL elements and setup
E	Elements to which to relate the dataset fields

Mapping details

Element	Description
Code	Unique mapping code for every dataset
Description	Description of the mapping in languages activated in the environment
Show/Hide	Shows or hides the descriptions in languages activated in the environment, other than the language being used by the user.
Template	List of templates to be reported
Export zero values	Enables the insertion of items with zero values.
Get XBRL report from data	Compiles the templates to be reported with *true* or *false* depending on the data present in the report. If there is no data in the template, it sets everything to *true*.
Default decimals	Default number of decimals
Default unit	Default unit of measurement
LEI code	Entity identifier
LEI code namespace	Namespaces used to organise codes into logical groups and avoid conflicts between names
XBRL taxonomy file name	Name of the file containing the XBRL taxonomy
Taxonomy version	Version of the taxonomy being used
Module	Taxonomy module
Report subject	Identifies the scope of consolidated or individual reporting.
Report list	List of the reports of that taxonomy to be included

Details of elements to be related

Element	Description	Mandatory
Item	Code of the tag set in the Bankit Reporting. If the code does not appear in the Bankit Reporting, the tag or attribute will not be added to the generated file.	Yes
Context	XBRL Context. Defines the entity, the period of time in which the fact is relevant and an optional scenario	Yes
Value	Value of the element to be inserted in the file. To set attributes, the value must be entered in key="value" form. Mandatory.	Yes
Parameter	XBRL Dimension	Yes
Decimal	Number of decimal digits. This value prevails over the default indication.	Yes
Unit	Unit used for the currencies. This value prevails over the default indication.	Yes
Unit of measure	Unit of measurement for numeric elements. This value prevails over the default indication.	No
Data type	Text, date, number field type	Yes
Report	Information on the submitted report	No

Matrix Mapping page


Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile > > Data Target Mapping: Matrix

Application database > Navbar > Analytic Information hub > workspace tile > (Dataset tab) dataset tile > > Data Target Mapping: Matrix

Purpose of the page

This page allows you to create mapping between the elements of a dataset and the mandatory fields of the Bank of Italy matrix. To create the mapping, simply select a dataset field and drag it to the relationship elements.

What it looks like

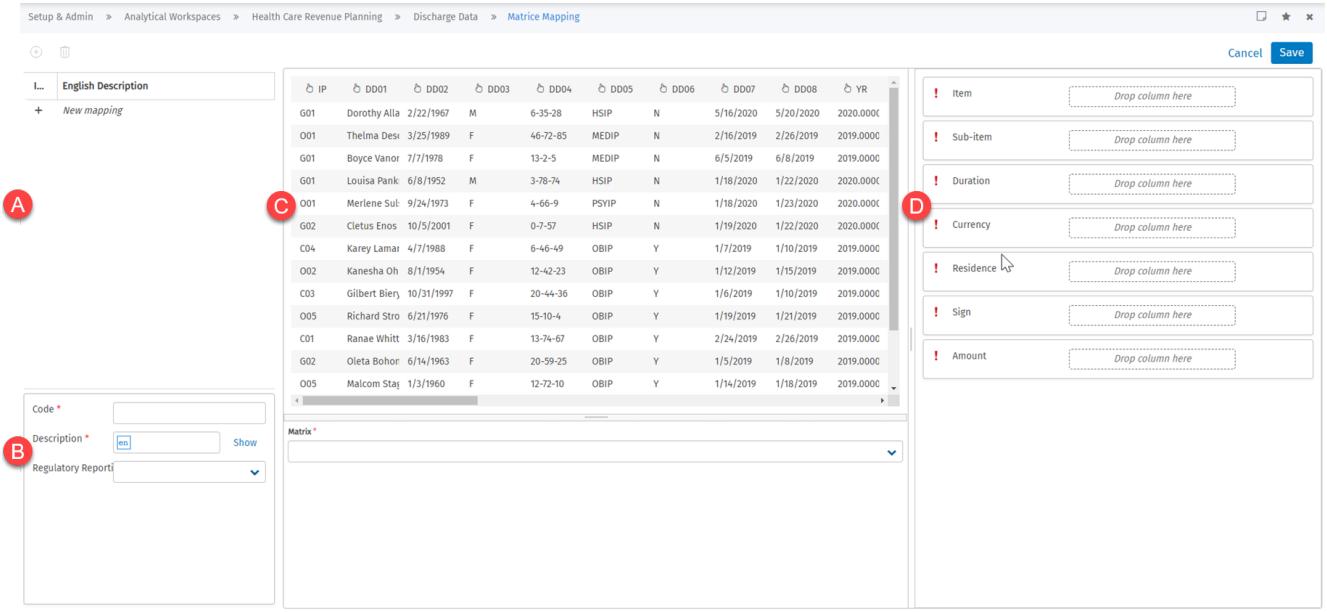

Element	Description
A	Mapping list
B	Mapping details
C	Table with dataset fields
D	Elements to which to relate the dataset fields

Mapping details

Element	Description
Code	Unique mapping code for every dataset
Description	Description of the mapping in languages activated in the environment
Show/Hide	Shows or hides the descriptions in languages activated in the environment, other than the language being used by the user.
Regulatory reporting	Allows you to select the Regulatory Reporting to which the mapping relates.
Matrix	Bankit Reporting of the existence-type reference dataset

Details of elements to be related

Element	Description	Mandatory
Item	Statistical and prudential reporting items identified in legislation corresponding to CCH Tagetik dimensions	Yes
Sub-item	Statistical and prudential reporting sub-items identified in legislation corresponding to CCH Tagetik dimensions	Yes
Length	Duration of the operation, to be generated according to the values permitted by the Bankit Reporting.	Yes
Currency	Element currency. Indicates whether the sub-item permits, for example, the values 1 (Euro), 2 (Currency) or X (Both)	Yes
Residence	Indicates wither the sub-item permits, for example, the values 1 (Resident), 2 (Not Resident) or X (Both)	Yes
Sign	Sign to be applied to the corresponding balance when the report file is created	Yes
Amount	Amount of the elements entered in the report	Yes

XML Mapping page


Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile > > Data Target Mapping: XML

Application database > Navbar > Analytic Information hub > workspace tile > (Dataset tab) dataset tile > > Data Target Mapping: XML

Purpose of the page

This page allows you to create mapping between the columns of a dataset and the elements of the export file in XML format. To create the mapping, the user must select a dataset field and drag it to elements of the XML.

What it looks like

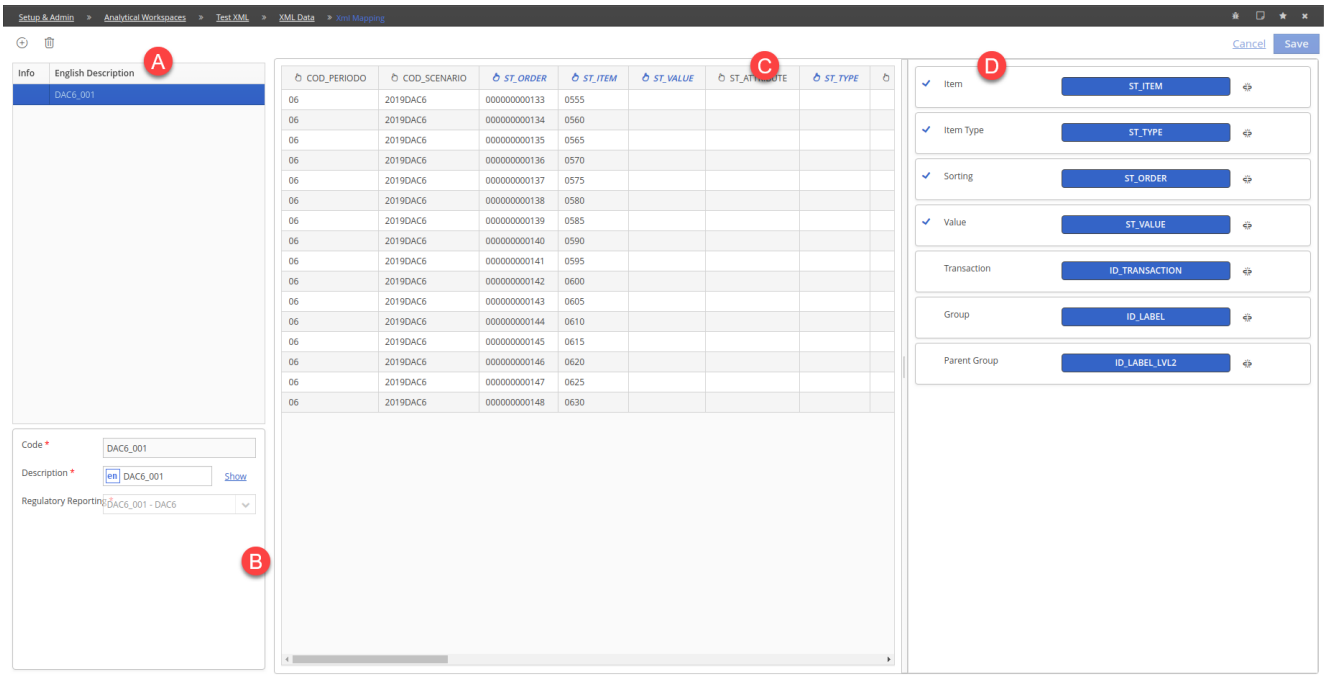

Element	Description
A	Mapping list
B	Mapping details
C	Table with dataset fields
D	XML elements to which to relate the dataset fields

Mapping details

Element	Description
Code	Unique mapping code for every dataset
Description	Description of the mapping in the supported languages
Show/Hide	Shows or hides the descriptions in languages other than the language being used by the user.
Regulatory reporting	Allows you to select the Regulatory Reporting to which the mapping relates.

Details of XML elements

Element	Description	Mandatory
Item	Code of the tag set in the Bankit Reporting. If the code does not appear in the XML Bankit Reporting, the tag or attribute will not be added to the generated XML file.	Yes
Item type	Type of element in the XML file. This may have the following values: • **A**: attribute • **V**: value If a value other than those specified is entered, the partition row will not be used to generate the XML file. Mandatory.	Yes
Value	Value of the element to be inserted in the file. To set attributes, the value must be entered in key="value" form. Mandatory.	Yes
Sorting	Sorting of the attributes or values of the generated file. Tags are sorted based on their codes. Mandatory.	Yes
Transaction	• Defined: allows you to generate an XML file for every transaction value in the partition in relation to the selected leaf or node. • Not valued: the system generates a file using the entire partition. The result is one file for every entity in the selection containing data.	No
Grouping	Group of tags that will be duplicated in the final XML file.	No
Parent Group	Code of the parent node of the group of tags.	No

Data Target Mapping page: File mapping

Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile > ⋮ > Data Target Mapping: File

Application Database > Navigation Panel > Analytic Information Hub > workspace tile > (Dataset tab) dataset tile > ⋮ > Data Target Mapping: File

Purpose of the page


This page allows you to define the format and characteristics of the files to export data present in a dataset.

If an extension is set in the **File name** field, the file will be created with the specified extension. The set file type will be respected in any case.

Where provided for, the header of the columns contains a description in the environment's default language.

If the data processing generates several files, they are inserted in a single compressed file, even if the **Zip file** option has not been selected.

What it looks like

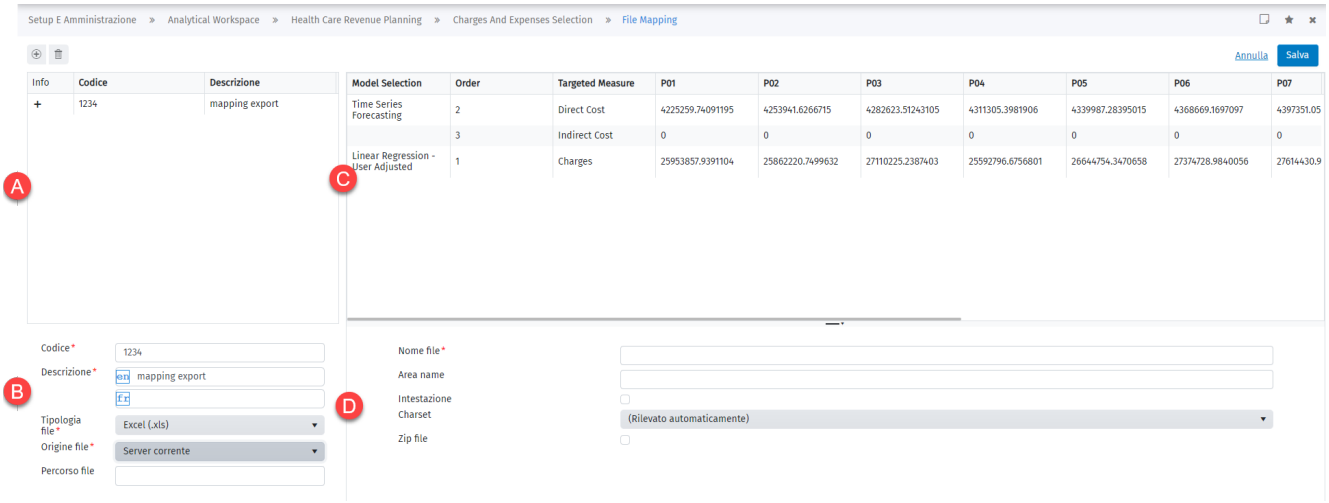

Part	Description
To	Data target mapping list to be specified for the dataset
B	Details of the selected dataset mapping
C	Preview of the dataset to export
D	Details of exported file

Data on data target mapping

Element	Description
Code	Mapping code, unique for the dataset
Description	Description in the languages enabled for the environment
File type	Format of the file to be used to export the dataset (Excel, XML, text with separator).
File location	• **Download**: Forces the download from the client. • **Current Server**: The file is saved in the writable folder of the current server, either in the path specified in the optional field **(File Path)** or in the Default Endpoint (in case it is configured). • **Endpoint**: the file will be saved at the URL specified for the selected Endpoint, or in the path specified in the optional field (**Directory**). At present, only ***URL*** type endpoints can be used.

See Data Target Mapping page (Update Data Model)

Application database > Analytical Workspaces tile > workspace tile > (Dataset tab) dataset tile > ⋮ > Data Target Mapping: update data model


Application database > Navbar > Analytic Information hub > workspace tile > (Dataset tab) dataset tile > ⋮ > Data Target Mapping: update data model

Purpose of the page

This page allows you to define the mapping between the dataset and the table fields of the selected analytical dimension.

The mapping is used by the DTP at runtime to populate the fields of the analytical dimension. When the DTP is run, the system also checks whether the indicated relationships are consistent.

What it looks like

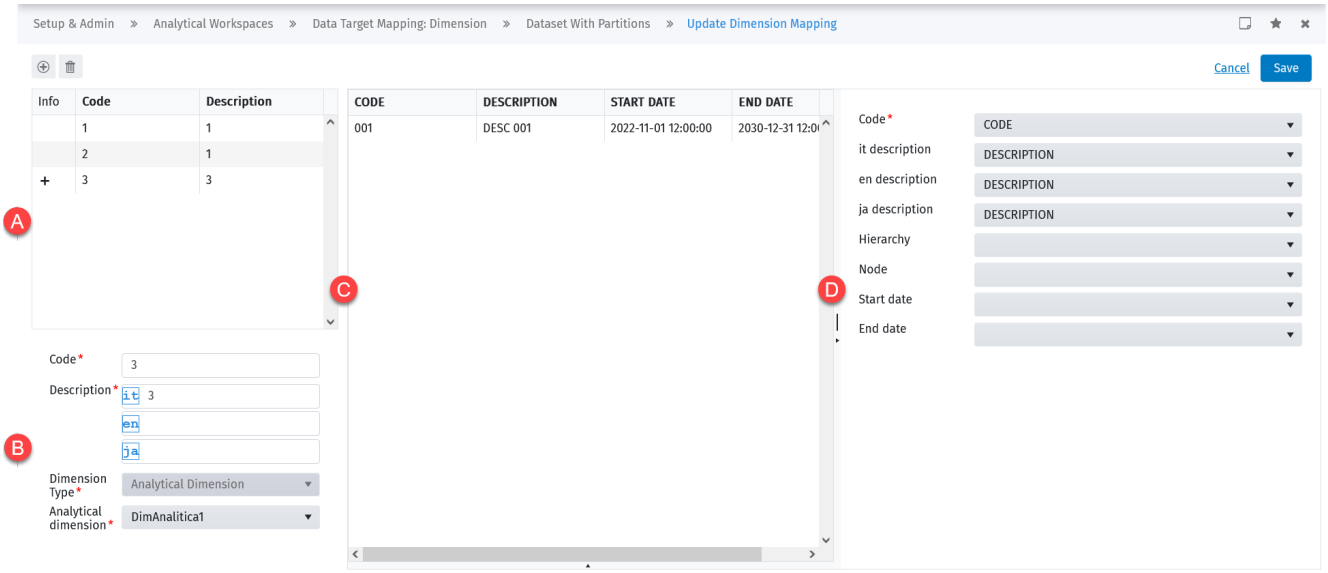

Part	Description
A	Data target mapping list to be specified for the dataset
B	Details of the data target mapping, indicating the analytical dimension to be mapped
C	Preview of the dataset fields
D	Data to relate the dataset fields, depending on the selected dimension type

Data on data target mapping

Element	Description
Code	Mapping code, unique to the partition
Description	Description in languages configured for the environment
Dimension type	Dimension for which to create mapping
Analytical dimension	If the **Dimension type** is Analytical dimension, it allows you to specify the dimension from those of the workspace.

Data for matching fields

Element	Description
Code	Dataset field the values of which will be used as codes for analytical dimension items
Description	Field to be used as description in the languages configured for the environment
Hierarchy	Dataset field the values of which will be used as the hierarchy code
Node	Dataset field the values of which will be used as the hierarchy node code
Start Date	Dataset field the value of which will be used as the start date for analytical dimension items
End date	Dataset field the value of which will be used as the end date for analytical dimension items

Data target mapping (Update Rules)

Application Database > Analytical Workspace tile > workspace tile > (Dataset tab) dataset tile > ⋮ > Data Target Mapping: update rules

Application Database > Navigation Panel > Analytic Information Hub > workspace tile > (Dataset tab) dataset tile > ⋮ > Data Target Mapping: update rules

Purpose of the page

Here you can define the mapping between the fields of the dataset and the fields of a rule.

The mapping is used when launching a DTP to populate the fields of the selected rule. When the DTP is run, the system also checks whether the indicated relationships are consistent.

***Note**: this page is only available to ESG licence holders.*

Data on data target mapping

Element	Description
Code	Mapping code, unique to the partition
Description	Description in languages configured for the environment
Rule	The type of rule for which to create the mapping
Rule type	If the rule type is 'Calculation Rule', you can choose either 'Script' or 'Logical Dimensions'

***Note**: Currently only **'Calculation Rules'** can be selected in the **'Rule'** field.*

Data for matching fields

If the selected rule type is **'Script':**

Element	Description
Code	Dataset field whose values will be used as code for the Script rule entries
Description	Dataset field to be used as description in the languages configured for the environment
Script	Dataset field whose value represents the script
Label	Dataset field whose values will be used as labels for the Script rule entries
Enable	Field in the dataset whose value represents the value of the Script's 'activate' flag
Run condition	A dataset field whose value represents an execution condition for the script
Start date	Field in the dataset whose value will be used as the start date for entries in the Script rule
End date	Dataset field whose value will be used as the end date for entries in the Script rule

If the rule type selected is **'Logical dimensions':**

Element	Description
Script operand code	Fields in the dataset whose values will be used as code for entries in the Logical Dimensions rule
Logical dimension	
Field code	A dataset field whose value is used as the field code for entries in the Logical Dimensions rule

Data Target Mapping (XBRL CSV)


Application Database > Tile Analytical Workspace > workspace tile > (Dataset tab) dataset tile > ⋮ > Data Target Mapping XBRL CSV

Application Database > Navigation Panel > Analytic Information Hub > workspace tile > (Dataset tab) dataset tile > ⋮ > Data Target Mapping XBRL CSV

Purpose of the page

This page allows you to create mapping between the columns of a dataset and the elements of the export file, which can be used to produce a declaration confirming that it meets XBRL criteria. To create the mapping, simply select a dataset field for each element you want to match.

What it looks like

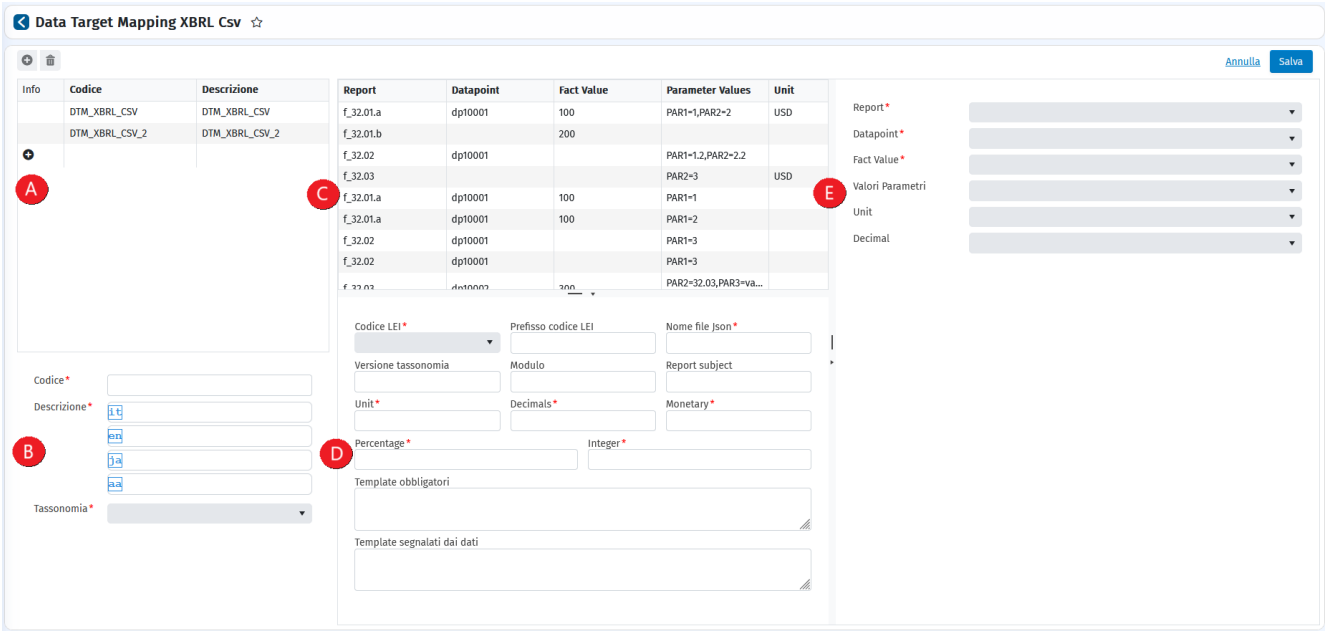

Element	Description
AA	Mapping list
B	Mapping details
C	Table with dataset fields
D	Details of XBRL elements and setup
E	Elements to which to relate the dataset fields

Mapping details

Element	Description
Code	Unique mapping code for every dataset
Description	Description of the mapping in languages activated in the environment
Taxonomy	List of taxonomies to be reported
LEI code	Entity identifier, used in the creation of the XBRL file name
Code prefix LEI	Prefix of the Entity ID code, used in the parameters.csv file
Json file name	URL used in the report.json file
Taxonomy version	Taxonomy name used for the creation of the XBRL file name
Module	Form name used to create the XBRL file name
Report subject	Identifies the scope of consolidated or individual reporting. It is used for the creation of the XBRL file name
Unit	Default unit of measurement
Decimals	Default accuracy of decimal information
Monetary	Default accuracy of monetary information
Percentage	Default accuracy of percentage information
Integer	Default accuracy of integer information
Mandatory templates	Templates to be set to *true*
Templates reported by data	Template to be reported with *true* or *false* depending on the reports in the data

Details of elements to be related

Element	Description	Mandatory
Report	Information on the submitted report	Yes
Datapoint	Fact code to be reported	Yes
Fact value	Fact value to be reported	Yes

Element	Description	Mandatory
Parameter Values	Values of additional parameters provided in the data as: parameter=value	No
Unit	Default currency in which data are reported	No
Decimals	Accuracy with which decimals are reported	No

Dataset Attributes : Reporting View

Introduction

Only in cloud environments, within the dataset list page, under the Attributes section of a selected dataset, in the “Reporting view” field — enabled with function code 0004217 — it is possible to create the reporting view for the selected dataset and, if needed, delete it. Creation or deletion can be rerun in the event of an error.

Reporting View Creation

A reporting view may only be created in the following cases:

- the dataset must be online (otherwise the 'Create' button is disabled)
- the dataset cannot contain any analytical dimension with GDPR enabled
- The dataset cannot contain only text and/or date type fields
- the dataset must be updated to version V2 of the reporting

Deleting a Reporting View

A reporting view associated with a dataset can be deleted whether the dataset is in offline or online status.

IMPORTANT: A dataset can only be deleted if the reporting view linked to the dataset has been correctly deleted. Similarly, deletion is available for a workspace containing only datasets with correctly deleted reporting views.

Changes to the fields of a dataset used as a Reporting View

In the case of a dataset used as a Reporting View, when editing fields in the dataset, the system checks that no fields that are not compatible with the reporting view are changed and/or added (see Reporting View Creation)

Offline set of datasets used as Reporting View

When a dataset is used as a Reporting View, it is possible to change its status from online to offline if the creation, updating and deletion of the reporting view and taking the dataset offline are not in progress.

Online dataset used as Reporting View

When a dataset is used as a Reporting View, it is possible to change its status from offline to online if the dataset is not being taken offline and the Reporting View is not being deleted.

Notification Management

At the end of operations on a reporting view, the system notifies the user whether the operation was successful or if it ended with error.

The information is also reported in the audit.

Creating datasets

Introduction

Datasets can be created in two ways: directly from the New Dataset window (New Dataset window) or from the list of datasets page (List of Datasets page). The particular features of the two methods are described below.

Create a dataset from the New Dataset window (Create new)

Application database > Analytical Workspaces tile > click the workspace tile > ⊕ New dataset

Application database > Navbar > Analytic Information hub > click the workspace tile > ⊕ New dataset

1. In **Dataset creation mode**, select **Create new**.
2. Set the characteristics of the new dataset, then click **OK**: the dataset will be created offline.

Create a dataset from the New Dataset window (Load file)

Application database > Analytical Workspaces tile > click the workspace tile > ⊕ New dataset

Application database > Navbar > Analytic Information hub > click the workspace tile > ⊕ New dataset

This follows a guided procedure. Only non-partitioned datasets can be created from file. It is also necessary to have one file to be loaded which contains the settings of the dataset to be created in .csv format according to Standard RFC-4180.

1. In **Dataset creation mode**, select **Load file**: all settings will be disabled.
2. Click **Next**, then **Upload** and select the file to load.
3. If the predefined setting UTF8 is selected in **Charset**, click **Next**: the file will be imported.
4. If a setting other than UTF8 is selected in **Charset**, click **Next**. The following outcome will be obtained:

If...	Then...
the file is correct	the file is imported and all columns of the file are recognised as being Text type.
the file is not correct	an error is returned because the file is considered non-interpretable.

5. Click **Next**: the **Customise dataset** window will open, showing the Preview with the first 10 rows of data from the file and the column headers, and the data type is indicated for each column.
6. To create a Form that is also linked to the dataset, select **Create Data Entry Form** and select a process from the list

   ***Note**: only active processes are shown in the page.*
7. If necessary, in **Dataset Fields**, exclude one or more columns using the dedicated button. These are also automatically removed from the Preview.

   ***Note**: at least 1 column must be included, otherwise an error message will be shown.*
8. If necessary, in **Dataset Fields**, change the data type, choosing between Text, Number and Date.

   ***Note**: when one or more rows in the loaded file contains fields with values that do not mirror the type recognised or chosen in the Preview window, on running the data processing, these rows will not be imported into the created partition and/or forms.*

Data type: Date

The following formats are recognised as Date type and when the data processing is run, datasets, partitions and forms are created successfully. Data containing these formats are correctly imported.

- "yyyy-MM-dd"
- "yyyy-MM-dd'T'HH:mm:ss.SSS'Z'"

The following formats are recognised as Text type and, by changing the type to Date, when the dataset is run, datasets, partitions and forms are created successfully and data containing these formats are correctly imported.

- "yyyy-MM-dd'T'HH:mm:ss.SSS"
- "yyyy-MM-dd HH:mm:ss.SSS"
- "yyyy-MM-dd HH:mm:ss"
- "yyyy-MM-dd HH:mm"

Create a dataset from the list of datasets

Application database > Analytical Workspaces tile > workspace tile > List of Datasets

Application database > Navbar > Analytic Information hub > workspace tile > List of Datasets

It is not possible to create several Datasets simultaneously using this procedure.

1. Click ⊕ to add a new dataset to the list.
2. Define its attributes, then click **Save**: the dataset is created offline.
3. If there are users with restrictions on the Workspace datasets, deploy the user rights on the Analytical Workspace datasets as follows:

If...	Then...
the user restrictions are defined at the workspace level and not directly on individual datasets	run deploy: the data of the new dataset become available for users with restrictions.
the restrictions were defined on individual datasets	include a new item in the definition of the user rights over the datasets and then run deploy again: the data of the new dataset become available for specific users. See the section dedicated to user rights.

Virtual Datasets and Datasources

Contents

This section covers the following topics:

Virtual Datasets and Datasources tab ... 72
Virtual dataset definition page ... 73
Create virtual dataset window ... 73
Virtual dataset configuration window ... 74
Relationships tab ... 74
Virtual dataset fields tab ... 75
Datasource definition page ... 77
New datasource window ... 78
Datasource settings window ... 78
Custom Query Tab ... 78
Datasource fields tab ... 79

Virtual Datasets and Datasources tab

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab

Purpose of the tab

This tab allows you to manage the workspace's virtual datasets and datasources.

Page structure

Element	Description
Virtual dataset and datasource management buttons	These allow you to add and manage virtual datasets and datasources.
Layout management buttons	These allow you to customise the page layout. ***Note**: by default, it displays up to 50 tiles sorted by description.* See Layout management buttons.
Virtual dataset tiles	These allow you to access the content of the relative virtual dataset. By default they are sorted by description.

Virtual dataset and datasource management buttons

Element	Description
⊕ **New virtual dataset**	Opens a window to add a new virtual dataset. See Virtual dataset/datasource settings window.
⊕ **New datasource**	Opens a window to add a new datasource. See Virtual dataset/datasource settings window.

Buttons on the virtual dataset or datasource tile

The following buttons are accessible from the ⋮ menu in the right-hand corner of the tile.

Element	Description
Settings	Opens the dataset or datasource settings window. See Dataset configuration window or Datasource definition page.

Virtual dataset definition page

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab > virtual dataset tile

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab > virtual dataset tile

Purpose of the page

This page allows you to define the fields of a virtual dataset, as well as any calculated fields.

Page tabs

Element	Description
Relationships	This allows you to define relationships between the physical datasets the records of which must be returned by a virtual dataset. Only online physical datasets are available. At runtime, the virtual dataset returns the records based on the specified relationships. See Relationships tab.
Fields	Allows you to define the properties and values of fields and calculated fields for the virtual dataset. See Fields tab.

Create virtual dataset window

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab > ⊕ New virtual dataset

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab > ⊕ New virtual dataset

Purpose of window

This window allows you to create a virtual dataset.

Fields in window

Element	Description
Code	Code of the or datasource
Description	Description of the datasource in all enabled system languages
Sort rows	Allow you to specify a sorted list of or fields to be used as sorting criteria for displaying the records in the window or in reports. ***Note**: only used if the sorting fields are also fields of the Line-by-Line report.*

Virtual dataset configuration window

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab (virtual dataset tile) ⋮ > Settings

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab (virtual dataset tile) ⋮ > Settings

Purpose of window

This window allows you to manage properties or delete the virtual dataset.

Fields in window

Element	Description
Code	Code of the or datasource
Description	Description of the datasource in all enabled system languages
Sort rows	Allow you to specify a sorted list of or fields to be used as sorting criteria for displaying the records in the window or in reports. ***Note**: only used if the sorting fields are also fields of the Line-by-Line report.*

Buttons in the window

Element	Description
Delete	Deletes the or . ***IMPORTANT:***

Relationships tab

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab > virtual dataset tile > tab

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab > virtual dataset tile > tab

Purpose of the tab

This tab allows you to create relationships between physical dataset fields or between physical dataset fields and workspace dictionaries. These relationships determine the list and values of the fields available for the virtual dataset.

Fields in the tab

Element	Description
Dataset 1, Dataset 2	Selects the fields of the workspace's physical datasets to be related.
Include all records	Allows you to include physical dataset records in the set of records returned by the virtual dataset, even if one of the fields related is empty (Left outer join, Right outer join, Full outer join).
Add the field relationships between the two datasets	Allows you to associate the individual fields of physical datasets with each other.

Virtual dataset fields tab

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab > virtual dataset tile > Fields tab


Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab > virtual dataset tile > Fields tab

Purpose of the tab

This tab allows you to define the fields of the virtual dataset and the relative properties. These fields can be fields of other physical datasets or calculated fields.

***Note**: the fields of a physical dataset can only be added to the virtual dataset once.*

What it looks like

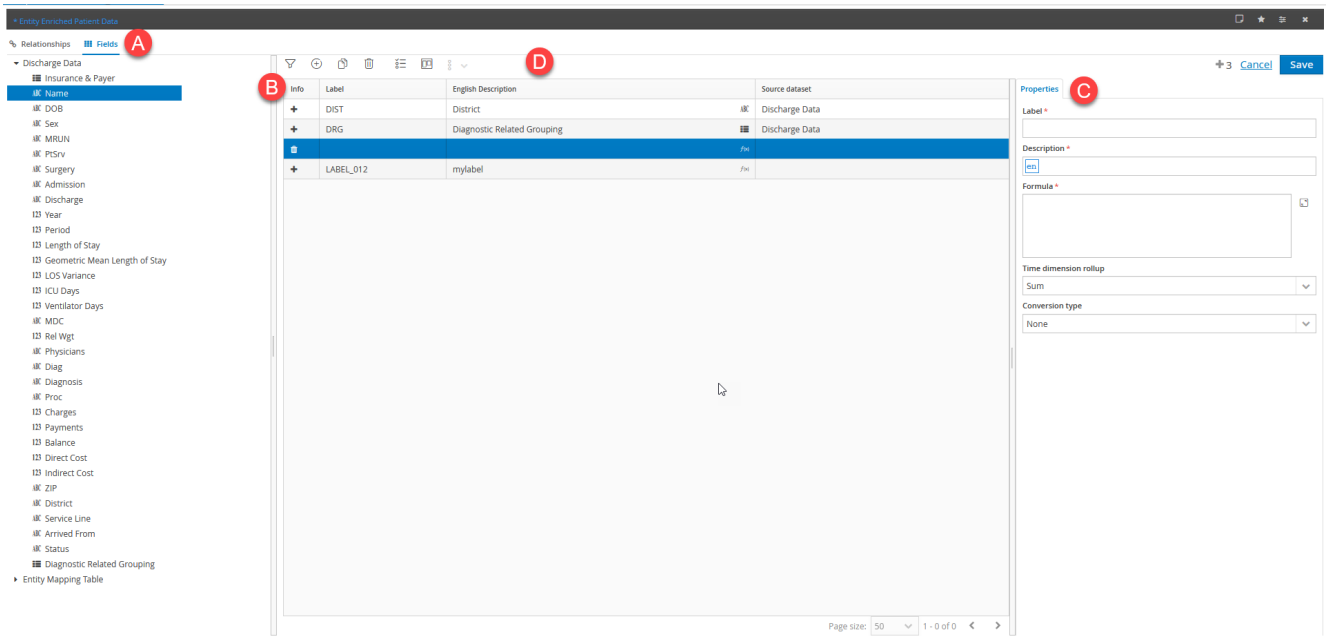

Part	Description
A	Dimensions tree
B	Fields table
C	Field properties panel
D	Action buttons

Page sections

Element	Description
Dimensions tree	Shows the fields of the physical datasets that have been related and allows you to add them, by dragging, as fields returned by the virtual dataset.
Fields table	Lists all the fields that define the virtual dataset and allows you to reorder them by dragging. ***Note**: the fields cannot be reordered if any values have been edited but not yet saved.*
Field properties panel	Shows the properties of the selected field in the fields table. ***Note**: if the source physical dataset is associated with a dictionary, the dictionary settings will be displayed.*

Dimensions tree details

Element	Description
	Dimensional element that can be added to the fields table by dragging.

Buttons in the fields table

Element	Description
	Adds a formula field (or a calculated field).
	Opens a page to run the mapping between the fields of the virtual dataset and the CCH Tagetik dimensions. This allows you to align the Financial Workspace layer with the Analytical Workspace layer using the Quick Data Loader. See Quick Data Loader - Import criteria definition window.
	Delete a field from the virtual dataset.  ***IMPORTANT**: when a virtual dataset field is deleted, any forms with references to the deleted field will become invalid and must be edited manually.*

Field properties panel

Element	Description
Label	Field ID. Alphanumeric codes are permitted (maximum 30 characters). Only ISO Latin characters are permitted, and reserved keywords are not accepted. When a field originating from physical datasets is added, the identifier is automatically completed with the code of the physical dataset field, which can be edited.
Description	Description of the field in all languages managed in the environment. When the field originates from physical datasets, the description is completed automatically with the description of the original field, but can be edited.
Calculated fields	
Formula	Allows you to insert a formula the value of which is calculated at runtime. The correct syntax will depend on the type of database used. Non-calculated fields of the virtual dataset can be called up in the formula using the Label of the field to which you want to refer, between braces preceded by the $ symbol (e.g. *${label}*).
Time dimension rollup	Only used for numerical calculated fields. Allows you to define the roll-up logic on the time dimension, or the data aggregation method on the scenario/period dimension used by the reporting engine in multidimensional matrices. • **Sum**: (default) the data related to the scenarios/periods identified by the chosen period length are added together. • **Last**: only the data related to the chosen scenario/period are considered, regardless of the defined period length. In reporting, if the virtual dataset contains the Account dimension, the applied roll-up logic is deducted from the Nature and the Type of the account, rather than from the measure. ***Note**: the roll-up logic is calculated after the formula.*
Conversion type	Allows you to define the type of conversion to be applied. • **Average FX rate**: the cumulated amount is the result of the conversion at the "average FX rate" defined in the FX rates table. • **Period average FX rate**: the amount is the result of the conversion of the period at the period average FX rate defined in the FX rates table. • **Final FX rate**: the amounts are the result of the conversion at the "final FX rate" defined in the FX rates table. It is typically used for the Balance Sheet, Other stocks and details accounts, but not for the Net Equity accounts which are normally converted at the historical FX rate, not available on Analytical Workspaces. • **None**: the default value is used for accounts not subject to the currency conversion process (e.g. number of employees, volume of sales, etc., as they are numbers not amounts of currency). It can be used for Other Variations/Stock accounts and initial balance variation accounts. ***Note**: this is read only for numeric fields and inherited from the value of the source dataset.*

Element	Description
Physical dataset fields	
Source dataset	Indicates the field's source dataset.
Field values	Allows you to select the dictionary that defines the list of valid values for the field in data entry mode. You can choose from the dictionaries of the current workspace. For dimensional fields, by default the system proposes a standard dictionary composed of table elements of the field itself.
Query field code	In case of an SQL dictionary, it allows the user to select the field of the query that identifies the code of the dictionary elements.
Query field description	In case of a SQL type dictionary, it allows the user to select the field of the query that identifies the description of the dictionary elements. If the value of the description field does not match the name of the field in the query, then the system will use, if available, the field whose name is obtained by concatenating the value supplied with the numeric identifier of language, 0...3 for the languages that are available at level of the whole application, namely 0...24 for specific languages of the reporting module, if they are enabled.
Out of dictionary values allowed	Enables the manual insertion of values not present in the dictionary.
Display mode	Displayed content that identifies the field in the columns of forms in navigation or data entry mode. • **Code** • **Description** • **Code and Description** The preset display is the same as that of the physical dataset in the relationships tab (see Relationships tab) and is editable.

Links on the page

Accessible via the ⋮ button in the fields table.

Element	Description
Financial workspace mapping	Mapping between the virtual dataset fields and the logical dimensions of CCH Tagetik data to allow the Quick Data Loader to automatically align the Financial Workspace layer with the Analytical Workspace layer.

Datasource definition page

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab > datasource tile

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab > datasource tile

Purpose of the page

This page allows you to define the fields of the datasource, or a logical definition (*View*) based on a query.

Datasources can only be deleted when not being used in any DTP. In this case, the deletion will not be successful and an error message will be displayed.

Page tabs

Element	Description
Custom query	Allows you to insert a custom query that defines the datasource. See Query tab.
Fields	Allows you to define datasource fields. See Query tab.

New datasource window

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab > ⊕ New Datasource

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab > ⊕ New Datasource

Purpose of window

This window allows you to create a datasource.

Fields in window

Element	Description
Code	Code of the or datasource
Description	Description of the datasource in all enabled system languages
Sort rows	Allow you to specify a sorted list of or fields to be used as sorting criteria for displaying the records in the window or in reports. ***Note**: only used if the sorting fields are also fields of the Line-by-Line report.*

Datasource settings window

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab (datasource tile) ⋮ > Settings

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab (datasource tile) ⋮ > Settings

Purpose of window

This window allows you to manage properties or delete the datasource.

Fields in window

Element	Description
Code	Code of the or datasource
Description	Description of the datasource in all enabled system languages
Sort rows	Allow you to specify a sorted list of or fields to be used as sorting criteria for displaying the records in the window or in reports. ***Note**: only used if the sorting fields are also fields of the Line-by-Line report.*

Buttons in the window

Element	Description
Delete	Deletes the or . ***IMPORTANT:***

Custom Query Tab

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab > datasource tile > Query tab

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab > datasource tile > Query tab

Purpose of the tab

This tab allows you to define the queries (one for every DBMS platform for every possible database from which to read) that define the datasource. To define parametric queries, the syntax of the cell fields can be used. On saving, the query is validated on the application database from which the data are read, using the syntax specified in the corresponding tab.

***Note**: CLOB/BLOB etc. fields are not supported. If they are inserted in the query to create the datasource, a warning message will appear.*

Custom Query

Element	Description
MsSql body	Allows you to enter the SQL query that will be used in the case of a primary MsSql connection.
Oracle body	Allows you to enter the SQL query that will be used in the case of a primary connection of Oracle type.
Postgres body	Allows you to enter the SQL query that will be used in the case of a primary PostgreSQL connection.
Hana body	Allows you to enter the SQL query that will be used in the case of a primary connection of Hana type.
Other Body	Allows you to enter the SQL query that will be used in the case of a secondary or tertiary connection.
Connection	Allows you to select the connection on which to perform the query. Secondary connections are marked with prefix (S) and tertiary connections with prefix (T). Primary connection means a connection defined as primary in the configuration file of the standalone.xml application server. A secondary connection is a connection defined as secondary in the configuration file of the standalone.xml application server. A tertiary connection is a schemaless connection defined as primary or secondary in the configuration file of the standalone.xml application server. ***Note**: in workspace import/export operations, the datasource's association with the database remains.* ***Note**: If a database other than the current database in this field is selected, the datasource will not appear among those available for DTP operations to insert/enrich from another Dataset.*
Preview	Shows a temporary table with a preview of the query results (max. 30 rows). ***Note**: the preview does not support queries with reporting parameters or Analytical Workspaces.*

Datasource fields tab

Application database > Analytical Workspaces tile > workspace tile > Virtual Datasets and Datasources tab > datasource tile > fields tab

Application database > Navbar > Analytic Information hub > workspace tile > Virtual Datasets and Datasources tab > datasource tile > fields tab

Purpose of the tab

This tab lists all the fields defined in the definition query, sorted according to how they were listed in the query.

Page sections

Element	Description
List of fields	Lists all the fields that define the datasource.
Field properties panel	Shows the properties of the selected field.

Field properties panel

Element	Description
Label	Field identifier, not editable.
Description	Description of the field in all languages managed in the environment. By default, this is the same as the identifier in **Label**, but can be edited.
Field type	• With dimension fields, this uniquely identifies the CCH Tagetik dimension or dimensional attribute. • With custom fields, this allows you to specify the field's data type.
Size	Allows you to uniquely associate the field with a CCH Tagetik dimension. Only text fields are allowed, and dimensions can only be associated with one field.
Time dimension rollup	For numeric fields, this allows you to define the roll-up logic on the time dimension, or the data aggregation method on the scenario/period dimension used by the reporting engine in multidimensional matrices. • **Sum**: (default) the data related to the scenarios/periods identified by the chosen period length are added together. • **Last**: only the data related to the chosen scenario/period are considered, regardless of the defined period length.
Conversion type	FX rate type to be used in the conversion step.
Field values	Allows you to select a dictionary defined in the workspace.
Query field code	Allows you to indicate the query field that identifies the code of the dictionary items to be shown in the form fields.
Query field description	Allows you to indicate the query field that identifies the description of the dictionary items to be shown in the form fields.
Out of dictionary values allowed	Enables the manual insertion of values not present in the dictionary.
Display mode	Displayed content that identifies the field in the columns of forms in navigation or data entry mode. • **Code** • **Description** • **Code and Description** **Encoded**: enables the saving of non-ISO Latin characters in the database.

The system will apply the user restrictions based on the association between the fields and the dimensions.

If the datasource is defined on the basis of a dataset, it will not inherit the datasets properties, and so it will be necessary to specify the dimension of the data model associated with every field.

The data model

Contents

This section covers the following topics:

Multidimensional data model 81
The dimensions of CCH Tagetik 81
Aggregation structures 82
How to work with dimensions 83
Dimensions 84
New dimension settings 85
Account dimension settings 85
Entity dimension settings 86
Category dimension settings 86
Attributes library 86
Customised Attributes 87
Creating a custom dimensional attribute 88
Working on customised dimensional attributes 88

Multidimensional data model

What a data model consists of

Every Tagetik application is based on a multidimensional data model. This is mainly defined by the following dimensions:

- system dimensions
- custom dimensions
- extended dimensions
- analytical dimensions

In turn, the dimensions can be linked and organised into aggregation structures, allowing them to be analysed in a functional way. In Tagetik, there are two types of aggregation structures:

- hierarchies
- groupings

The dimensions of CCH Tagetik

System dimensions

These dimensions are mandatory and are always present for all data.

First name	Function
Entity	This identifies the entities for which the data are collected.
Scenarios	This represents the time dimension.
Period	This defines the basic unit of time; this is normally 12 months, but may be customised.
Accounts	This identifies any measurements or metrics subject to analysis.
Category	This classifies and segments the data and keeps track of how they are generated.
Unit	This manages the currencies of the transactions, financial statements and consolidation processes.

Custom dimensions

These dimensions are known as Custom Dimensions and they are necessary to meet the specific configuration requirements of a business. It is possible to define up to five custom dimensions and, once enabled, they are used in the same way as system dimensions. Once enabled, they are mandatory and are present for all data.

The various custom dimensions are linked to specific financial criteria:

Target	Description
Custom dimension 1	Mandatory to manage draft bank budgeting
Custom dimension 2	This is the only dimension that can be used as a counterparty dimension, other than the Company dimension.
Custom dimension 3	Mandatory to manage assets when processing asset amortisation/depreciation.
Custom dimension 5	Mandatory to manage the products of the Production Cost Control module.

They can be used both in the Financial Layer and in the Analytical Layer.

***Note**: Function 0000205 must be active in the user's assigned role to allow editing and deletion of analytical and custom dimensions*

Extended dimensions

***IMPORTANT**: extended dimensions are still available, but they will be replaced by analytical dimensions.*

These dimensions make it possible to increase the level of detail of the input data and to use CCH Tagetik as a data warehouse, i.e. to collect and aggregate structured data. These dimensions can only be created if the CCH Tagetik Analytics module is present.

***Note**: these dimensions are not present in the tables of amounts and journals.*

Analytical dimensions

These dimensions are used to manage a large number of elements. An unlimited number of them may be used, but only if the Analytical Workspaces module is enabled.

***Note**: Function 0000205 must be active to allow editing and deletion of analytical and custom dimensions*

Aggregation structures

What aggregation structures are

Tagetik dimension elements may be grouped in different ways, by defining different aggregation structures.

In Tagetik, there are different types of aggregation structures:

- Hierarchies
- Groupings
- Control groups
- Financial statement templates

***IMPORTANT**: hierarchies and Groupings have a tree format: the dimension elements are the leaves and the intermediate aggregation elements are the nodes.*

***IMPORTANT**: hierarchies relate elements in hierarchical order by creating rigid parent-child relationships, where a child may only be related to one parent. Groupings, on the other hand, create more versatile parent-child relationships, where the same child may be related to several parents.*

What aggregation structures are used for

Aggregation structures have different functions:

- They define grouping logics in order to create useful reports. For example, it is possible to create a report by selecting a node, thereby obtaining the data for all the companies related to that node.
- To quickly select a set of elements from a given dimension. By selecting a node, all the related elements are automatically selected.
- To define rules in a dynamic way. All the rules using a node are automatically updated whenever the node aggregation structure is modified.

IMPORTANT: *the data are not saved on the aggregation structure nodes, but on the dimension elements. To save data on a node, it is necessary to create a dummy element inside it where the data can be saved.*

How to work with dimensions

Concept Information

Multidimensional data model 81

How to create a new dimension

Dimensions > New dimension

This procedure allows you to create both the five custom dimensions and analytical dimensions.

IMPORTANT: *Only create custom dimensions if you really need them. Once inserted, the new custom dimension will have to be declared for all data entered into the system.*

1. Select the type of dimension to create, and then define all the relative characteristics.
2. Click **OK** to create the new dimension.

How to define the characteristics of the company dimension

Dimensions > Entity > ⋮ > Settings

Set the characteristics of the company dimension, and then click **OK**.

How to define the characteristics of the account dimension

Dimensions > Account > ⋮ > Settings

Set the characteristics of the account dimension, and then click **OK**.

How to define the characteristics of the scenario dimension

Dimensions > Scenario > ⋮ > Settings

Set the characteristics of the scenario dimension, and then click **OK**.

How to define the characteristics of the category dimension

Dimensions > Category > ⋮ > Settings

Set the characteristics of the category dimension, and then click **OK**.

How to define the characteristics of a custom dimension

Dimensions > choose custom dimension > ⋮ > Settings

Set the characteristics of the custom dimension, and then click **OK**.

Set the characteristics of an analytical dimension

Dimensions > choose analytical dimension> ⋮ > Settings

Set the characteristics of the analytical dimension, then click **OK**.

Attributes list

Dimensions > Attributes list

Access the custom attributes list.

Dimensions


Setup & Admin > Dimensions

Navigation panel > Dimensions

Purpose of the page

This page allows you to set all the dimensions provided by Tagetik and possibly create new ones.

What it looks like

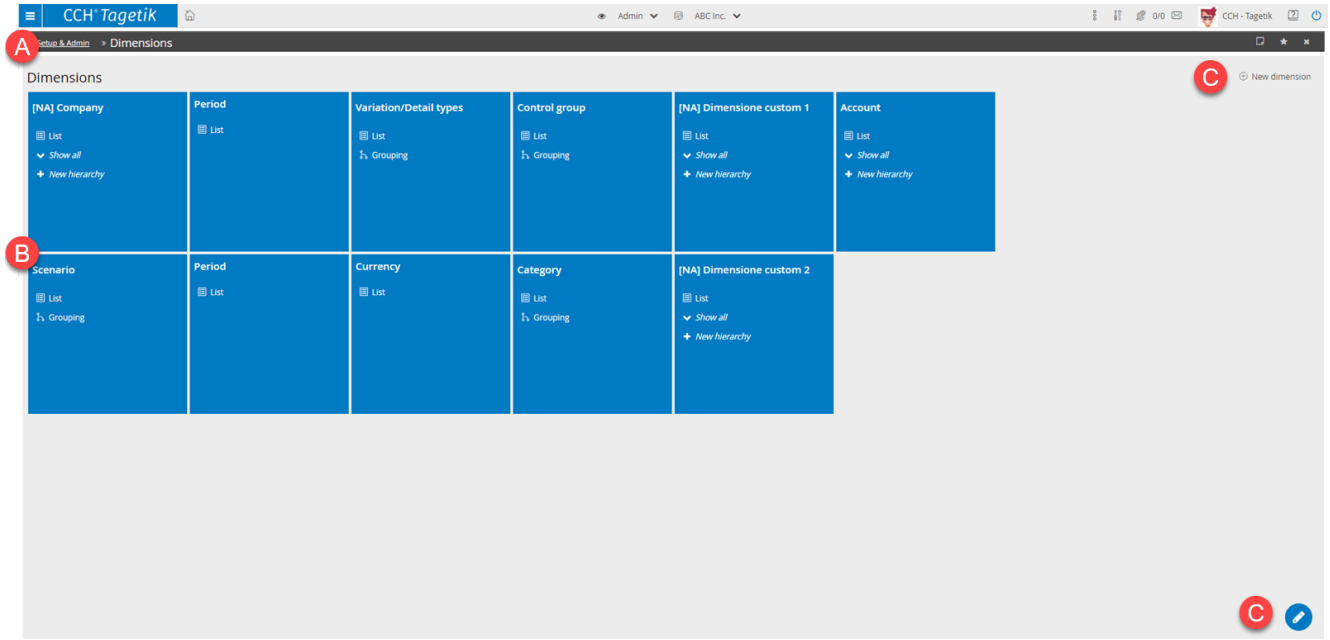

Element	Description
To	Navigation bar
B	List of existing dimensions
C	Action buttons on this page

Action buttons on this page

Element	Description
⋮	This runs certain actions on the specific dimension.
⊕	This adds a new dimension.

Element	Description
	Access the Attributes List.
	This selects the panes to be shown and allows you to alter their appearance and position. It also allows you to block them so that they cannot be modified by unauthorised users.

New dimension settings

Dimensions > ⊕ > New dimension

Field description

Please find below the most important fields.

Field	Description
Type	Type of dimension to be created (custom or analytical)
Analytical dimension label	Label to be attributed to the dimension, if analytical
Default element	
Code/Description	Code and description of the default element generated together with the new dimension
Sorting	
Code	This sorts the elements by code.
Description	This sorts the elements by description.
Custom sorting in hierarchies	This allows you to freely sort the elements in the hierarchy, not necessarily on the basis of the code or description.
CTP dynamic groups management	This allows you to specify certain CTP groups for each combination of accounts and elements of the dimension that you are creating.

Account dimension settings

Dimensions > Account > ⋮ > Settings

Field description

Please find below the most important fields.

Field	Description
Name	Name of the dimension. This may be inserted in any of the languages available.
Accounting class signs	Signs used by the accounting classes (e.g. payables, revenues, costs...) in the reporting forms
Custom sorting in groupings	This allows you to define custom sorting of the nodes and 'child' elements in the structure of the dimension hierarchies.
Separator	Character used as a separator to automatically create variation or detail accounts
Custom attributes	Attributes that can be related to the account dimension (max. 5).

Entity dimension settings

Dimensions > Entity > ⋮ > Settings

Field description

Please find below the most important fields.

Field	Description
Name	Name of the dimension. This may be inserted in any of the languages available.
Time Dependent elements	This enables time-dependent management of the dimension and the relationships between its elements and the reclassification variables.
Multilanguage management	This enables the multi-language management of the description of dimension elements.
Cod.	This sorts the elements included in the reports by code.
Default element	Allows you to define a generic element for the dimension. Until now, in traditional processes, the Entity was always mandatory; this condition does no longer apply in multidimensional processes. In a multidimensional process, when an Entity is omitted, the default element specified here is used. As of today, the definition of the non-mandatory generic element for the entity is used by the reporting in the following cases: • Data entry in a multi-organisation process at a step where the company is not the organisational element • Using a multidimensional form • On a dataset with the Entity dimension • The Entity dimension is omitted in the dataset
Description	This sorts the elements included in the reports by description.
Custom sorting in hierarchies	This allows you to define custom sorting of the nodes and 'child' elements in the structure of the dimension hierarchies.
Entity management by control types	This allows you to define the financial statement templates depending on the type of entity control.
Custom attributes	Attributes that can be related to the Entity dimension (max. 5).

Category dimension settings

Dimensions > Category > ⋮ > Settings

Field description

Please find below the most important fields.

Field	Description
Code	This sorts the elements by code.
Description	This sorts the elements by description.
Custom sorting in hierarchies	This allows you to customise the sorting of the nodes and 'child' elements in the structure of the dimension hierarchies.

Attributes library


setup and administration > dimensions > attributes library

setup and administration > dimensions > attributes library

Purpose of the page

This page lists all custom dimensional elements, whether created on dimensions or directly here

What it looks like

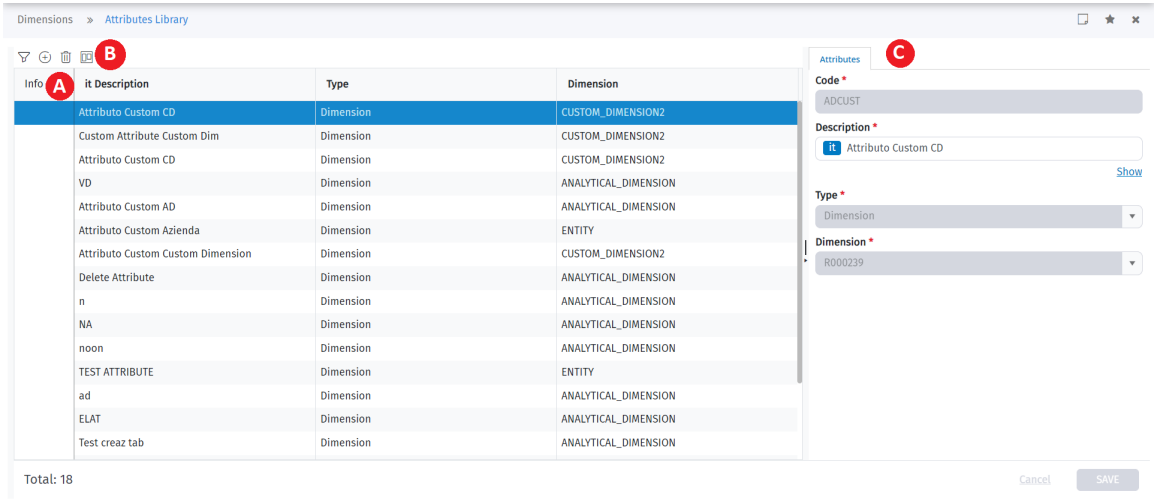

Element	Description
To	Attributes library
B	Tool bar
C	Configuration tab

Actions on this page

Element	Description
	This filters the data displayed on the page.
	Adds a row in order to insert a new element.
	Deletes the element contained in the selected row.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.

Customised Attributes

For the various dimensions, the elements table allows for a certain number of predefined attributes. It is possible to create custom attributes to form special classifications, for style formatting, or to meet other specific requirements. During the reporting phase, these allow for information to be displayed that is not otherwise manageable with the default attributes. Some dimensions have only textual custom attributes available, in limited numbers, while others have dimensional ones, in unlimited numbers, and some have both types. These attributes may be defined for the following elements:

Size	Text (Quantity)	Dimensional
Entity	Yes (5)	No
Accounts	Yes (5)	No
Custom	Yes (5)	Yes
Analytics	Yes (5)	Yes
Scenarios	Yes (10)	No
Form	Yes (5)	No

***Note**: Functions 0004174 and 0004175 in the user's assigned role manage the addition and enhancement of custom attributes on analytical dimensions respectively*

Creating a custom dimensional attribute

Setup & Admin > dimensions > new dimension > new attribute

Navigation panel > dimensions > new dimension > new attribute

Setup & Admin > dimensions > {analytic_size/custom_size} > options > settings > new attribute

Navigation panel > dimensions > {analytical_size/custom_size} > options > settings > new attribute

Purpose of the page

This window allows you to define, edit and delete the basic settings of an analytical dimension.

What it looks like



Custom dimensional attributes can be added in this window.

***IMPORTANT**: a custom attribute, as well as the attached and reference dimension, cannot be deleted when used in a Business Workflow.*

Choosing 'New' will maintain the above fields, explained below.

Field	Description
First name	Attribute name, in each available language
Code	Code CCH Tagetik of the attribute
type	Attribute Type
Size	Attribute reference dimension. The list contains the Company Dimension and all Custom and Analytical Dimensions

Selecting 'From Existing' will display the list of dimensional attributes already present in the system, visible from theAttribute List, excluding those already matched to the dimension. Multiple attributes can be selected, which will be linked to the current dimension with the 'Create' button.

Working on customised dimensional attributes

Defining a custom attribute in a custom dimension

Dimensions > choose analytical or custom dimensions > ⋮ > Settings

Assign a name to the custom attributes you wish to create.

Defining a custom attribute in an analytical dimension

Dimensions > choose analytical or custom dimension > ⋮ > Settings > Add Attribute

Assign name, type and dimension to the custom attributes you wish to create.

Dimensions: Entity

Contents

This section covers the following topics:

Entity: basic concepts 90
How to work with entities 91
Entity elements page 94
Entity elements 95
How to manage the company dimension with a time dependency 97
Time-dependent entity elements page 97
Time-dependent entity elements 99
Copies between original scenarios 100
Define generic data 100
Archive entity data 101
Input data for original scenario 101
Input data for consolidation scenario 101
Control chart page 102
Control chart 103
Control type page 103
Control type 104
CTP dynamic groups page 104
Counterparty dynamic groups 105

Entity: basic concepts

Definition

The entity dimension is the element that guides the data collection process and the approval/submission process. It is normally made up of the legal entity, or company, or of one of its parts. However, in some cases, it may be identified as a different organisational element, such as a cost center, a work order, a division or another element.

Control chart

For each scenario and period, the control chart allows you to specify the type of relationship between pairs of entities. The type of relationship is defined by original scenario, or by consolidation scenario.

Original scenario set-up

The original scenario set-up allows you to define the relationships for a scenario/period and to reclassify the original amounts. It is possible to generate reports on an entity using the original scenario.

In this case, the entity is the one for which the report is being generated.

Consolidation scenario set-up

The consolidation scenario set-up allows you to define the relationships for a consolidation scenario/period and to reclassify the consolidated amounts. Reports on ‘consolidation’ amounts can be generated using the consolidation scenario.

In this case, the entity is normally the holding for the consolidation in question.

Control types

The control type identifies the relationship between two entities and may therefore be used to differentiate the relationships between an account and the FST items. An account used for reporting to the owned entities can thus be linked to different FST items depending on the defined control type, and on the scenario/period.

Typically, the control types are as follows:

- Parent
- Subsidiary
- Affiliate
- Third party, for entities not belonging to the group

***Note**: for 'third party' control types, the system automatically creates the default type $TERZ.*

Counterparty (CTP) dynamic groups

When declaring intercompany entries, it may be useful to only identify certain entities in the elements table as counterparties. For example, for a bank credits account, it may be useful to only take banking counterparties into consideration. To do this, it is useful to create a CTP dynamic group.

Once the CTP dynamic group has been defined, it is then necessary to relate it to the desired accounts and custom dimension elements.

Time-dependent management of the company dimension

For some projects, especially for banking consolidations, it may be useful to store the company's elements table attributes and the relationships between companies and classifiers, by scenario and period. This means that, over time, the data processing will take into consideration any changes to said relationships.

This type of management must be enabled by the Administrator, via the entity dimension settings.

How to work with entities

Concept Information

The dimensions of CCH Tagetik 81
Hierarchies: basic concepts 182

How to create an entity

Dimensions > Entity > List

Please find below the basic procedure for creating a new entity.

1. In the entity elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new entity.
3. Set all the characteristics for the entity in the various configuration tabs, then click **Save**: the new entity will be listed in the data table.

How to inherit settings from another entity

Dimensions > Entity > List

This procedure is useful to create a company that is similar to an existing one, as it speeds up the set-up process.

1. In the entity elements table, select the entity to be defined and then click ⋮ > **Relate as similar company**: the relationship window will open.
2. In **Reference Company**, select the entity from which to inherit the settings: all the "inheritable" characteristics for that entity will be displayed.
3. Select the characteristics to be inherited, then click **Run**: the entity selected in the elements table will inherit all the selected characteristics.

How to relate an entity to time-dependent hierarchies

Dimensions > Entity > List

This is useful for managing entities that belong to different nodes and hierarchies at different moments in time.

1. In the entity elements table, select the desired entity and go to the **Relationships** tab, then click **TD hierarchies relationships**: the**TD hierarchies relationships** page will open.
2. Click : an empty row will be added, allowing you to define a new relationship.
3. In the **Attributes** tab, set the reference scenario, the relationship period and the hierarchy node with which to create the relationship, then click **Save**.

How to relate counterparties to an entity

Dimensions > Entity > List

This is useful when an entity has frequent relations with certain counterparties, and you would like to facilitate data entry.

1. In the entity elements table, select the desired entity and go to the **Counterparties** tab; select a counterparty from those available.
2. Click to add other counterparties.

How to create a CTP dynamic group

Dimensions > Entity > > CTP dynamic groups

1. In the CTP dynamic groups elements table, click : an empty row will be added.
2. In the **Attributes** tab, define the SQL rule that allows you to select the desired counterparties, then click **Save**: the new dynamic group will be listed in the data table.
3. To view a list of all the elements selected by the SQL rule, click**Definition result**.
4. To apply the rule and fill the group, click : a window will open, allowing you to limit the process to a specific scenario and period.
5. Set the desired restrictions and then click **OK**: the group will be filled in.

How to recode an entity

Dimensions > Entity > List

1. In the entity elements table, select the entity whose code needs to be changed.
2. Select > **Recode**: the **Recode - Company Dimension** page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the entity.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to relate an entity to a node in a hierarchy

Dimensions > Entity > List

This procedure is useful for creating groupings to which specific rules and configurations may be applied.

1. In the entity elements table, select one or more entities to be related to the same node.
2. In the **Relationships** tab, select the node with which to create the relationship, then click **Save**.

How to define custom dimension restrictions for an entity

Dimensions > Entity > List

For each control group, it is possible to define restrictions, i.e. to exclude data from specific custom dimensions from being collected.

1. In the entity elements table, select the entity for which to create restrictions.
2. In the **Restrictions** tab, set the desired type of restriction for each custom dimension shown.
3. Click **Save**: for custom dimensions for which a restriction has been set, the **Define** command will be displayed together with the ⊗ symbol, indicating that there are elements for which the entity is to be restricted.
4. Click **Define**: the specific page will open allowing you to define the restrictions.
5. Click ⊕ to add an element.
6. In the **Attributes** tab, set whether to include or exclude the element, and select the single custom dimension elements or nodes of a non-time-dependent hierarchy defined for the custom dimension.
7. To enable a hierarchy node, but exclude an element from it, you must first set the node and then the exception on the next line.

   ***IMPORTANT**: The system implements restrictions based on the order in which they are inserted in the definition window. If two restrictions are in conflict, the one implemented last in the sequence will prevail.*

8. Click **Save**.
9. To view a list of all the selected elements, click **Definition result**.

How to set relationships between entities for the control chart

Dimensions > Entity > ⋮ > Control type

This procedure creates relationships between companies so you can then use them in the control chart.

1. In the control types list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert a code and a name for the control type and then click **Save**: the new type of relationship will be listed in the data table.

How to define the relationship between group entities based on the scenario in the control chart

Dimensions > Entity > ⋮ > Control chart

1. In the control chart elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, select the reference scenario and the period for which the relationship is valid.
3. Select the two entities and the control type, then click **Save**: the new relationship will be listed in the data table.

How to generate a report on the entity's custom dimension restrictions

Dimensions > Entity > List

This is useful for creating reports containing information about specific custom dimensions managed for the entities listed.

1. Select 📄 > **Restrictions on custom dimensions report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the filters to define the entities that will be included in the report.
3. In the **Output** section, define how to break down and group information in the report. For each type of output selected, a dedicated tab will be created in the report.
4. Click **OK**: the requested report will be generated in Excel format.


Entity elements page

Dimensions > Entity > List

Purpose of the page

This page allows you to view all the existing entities and to define new ones.

What it looks like

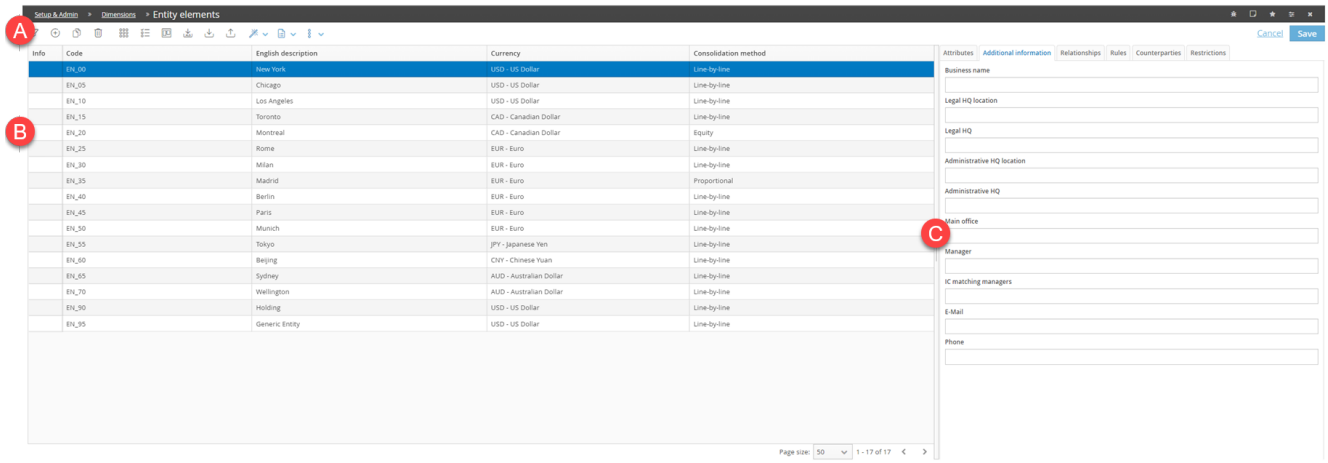

Element	Description
A	Tool bar
B	Entity elements table
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new entity.
	This duplicates an entity with the same characteristics as the one selected, with the exception of the code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows different ancillary functions. For example, it allows you to access the **Recode** function and to modify the code related to an entity.

Element	Description
	This sets the parameters to generate Excel reports. **Restrictions on custom dimensions report**: this generates reports on the restrictions of the different entities.
	Relate as similar company: this allows you to create a new entity, using a number of characteristics from an existing entity.

Entity elements

Dimensions > Entity > List

Attributes tab

Please find below the most important fields.

Field	Description
Currency	Currency used to insert the original data for the entity.
Advanced	
Validity	Validity period for the entity
Sorting	Inserts any custom sorting for the entity dimension in the system reports.

Additional information tab

This tab allows you to insert additional information about the entity that is useful for reporting purposes.

Relationships tab

This tab allows you to create relationships between entities using hierarchies and nodes.

Field	Description
Hierarchy	Hierarchies to which the entity may be related
Node	Node within the specific hierarchy to which the entity may be related
TD hierarchies relationships	Create relationships with time-dependent hierarchies.

Rules tab

This tab allows you to set rules to be applied to the entity.

Please find below the most important fields.

Field	Description	Value
Tax regime	Tax regime used to calculate taxes (direct and deferred).	-
Consolidation		
Consolidation method	The consolidation method used for the entity	Cost Equity Line-by-line Proportional

Field	Description	Value
Deconsolidation method	The deconsolidation method used for the entity	**Do not deconsolidate**: No data is cancelled. **Deconsolidate only initial balances**: only data from carry-forward operations from the previous period are cancelled. **Deconsolidate from previous period**: this keeps the information relative to the company for consolidation purposes in the next period and this is then deconsolidated. **Deconsolidate from current period**: the original scenario data processed as normal and are then deconsolidated.
% consolidation	Percentage of the entity to be consolidated	-
Generate CTP eliminations	This modulates the creation of counterparty eliminations for companies that do not require such entries, based on the consolidation method or by choice.	All elimination logics Exclude IC elimination logics Never
Only CTP	The entity can only be used as a counterparty in intercompany declarations.	-
Only consolidator's data	Only inserts data on the consolidator's categories.	-
Listed	Indicates whether the entity is listed.	-
IC matching	This sets the type of IC matching.	Mandatory Optional Automatic
Use Ref. company in the O.S.R. and Intragroup assets assignment	In the case of sub-companies, this indicates the reference company to be used when the consolidation scope is deployed.	-
Reference entity	Entity used in the deployment step of the entities in the consolidation scope, to calculate the percentages.	-
Taxes and Cash Management		
Run as company	This indicates that the entity is a legal entity.	-
Run as sub-company	This indicates whether notional data processing must be carried out for this entity (e.g. direct taxes, indirect taxes, cash management).	-
Default dimensions for Data Entry		
default <custom dimension>	This is a default element of the custom dimension where financial planning operations are carried out.	-

Counterparties tab

This tab allows you to insert counterparties with whom the entity has frequent dealings; these parties will be auto-suggested in the data entry phase.

Restrictions tab

This tab allows you to set the custom dimensions accepted by the entity.

It is possible to set these restrictions for each enabled custom dimension (cost centers, products, employees etc.).

Restriction	Description
None	All custom dimensions are accepted.
Restricted	It is possible to apply restrictions to the accepted custom dimensions.

Banking data tab

This tab allows you to set the characteristics of the data collected for banking supervision purposes.

Please find below the most important fields.

Field	Description
ABI code	ABI code without check code
Bankit reporting code	This code identifies the entity in bank reporting
Individual data reporting	The entity's original data are included in the statistical reporting to the supervisory authorities as subsystems 14 and 16.
Intragroup reporting	The entity is included in intercompany statistical reporting to the supervisory authorities (item 36381).
Exclude 'Financial investments type' automatic input	The entity is not taken into consideration in the automatic definition of the relationship with the 'Financial investments type' classifier.

How to manage the company dimension with a time dependency

Concept Information

The dimensions of CCH Tagetik 81
Entity: basic concepts 90
Periods: basic concepts 129
The Scenario: basic concepts 133

How to enable time-dependent management of a company entity

Dimensions > Entity > ⋮ > Settings

***Note**: only users with admin rights can carry out this procedure.*

Select the option **Time-dependent management**.

How to manage a company with a time dependency

Dimensions > Entity > List > ⋮ > Time-dependent entity elements

Dimensions > Entity > Time-dependant elements

1. In the time-dependent entity elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, select the desired company and then select the scenario and period to be combined in order to create the time dependency.
3. In the **Advanced** section, set a time interval to limit the duration of the time dependency, if necessary.
4. In the **Rules** tab, set the rules to be applied to the company for which the time dependency is being created, then click **Save**: time-dependency management will be created for the selected company and the scenario-period combination will be set.

Time-dependent entity elements page


Dimensions > Entity > List > ⋮ > Time-dependent entity elements

Dimensions > Entity > Time-dependant elements

Purpose of the page

This page allows you to view all the time-dependent relationships between the entities that manage this type of relationship and to define new ones. In particular, it allows you to enable the time-dependent management of companies, relating them to scenarios and specific periods.

What it looks like

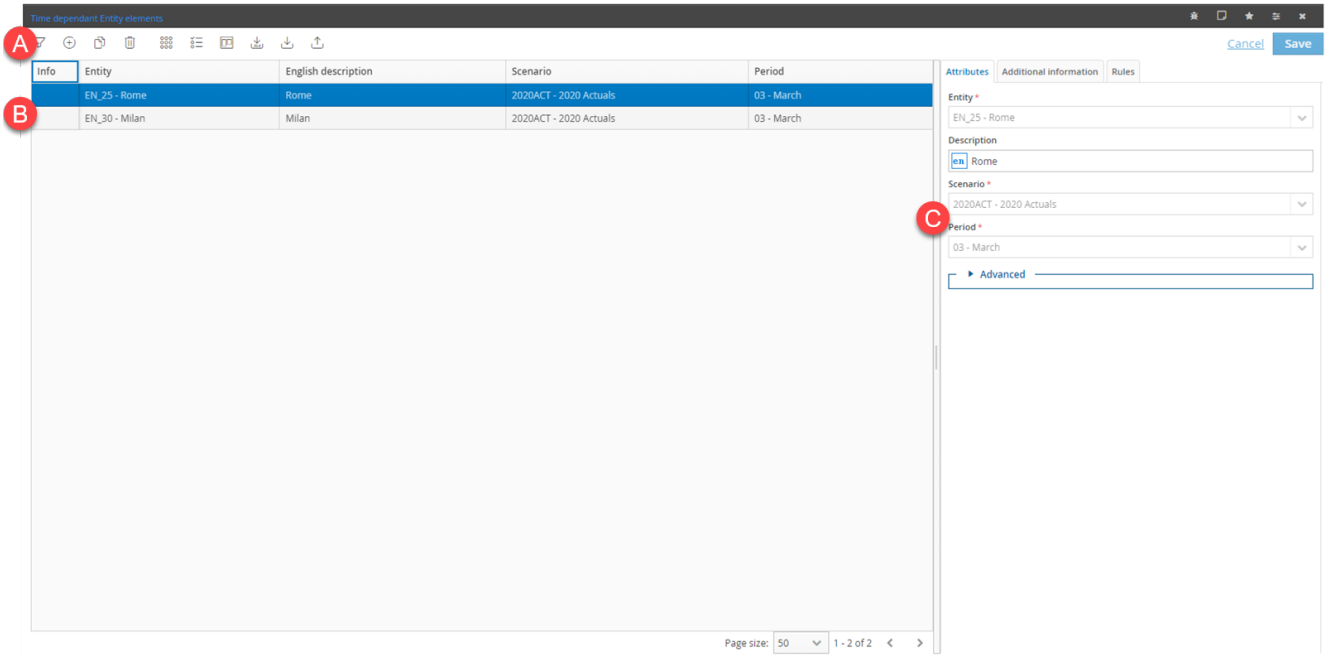

Element	Description
A	Tool bar
B	Time dependent entity elements table
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to relate a company to a scenario and period combination.
	This duplicates the selected row with all the information inserted.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
XLS	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows the following ancillary functions: • **Copies between original scenarios**: to copy the values from one original scenario/period to another. • **Archive entity data**: to move an entity's elements attributes in the offline tables. • **Input data for original scenario**: to copy the values of a time-dependent entity onto an original scenario. • **Input data for consolidation scenario**: to copy the values of a time-dependent entity onto a consolidation scenario.

Time-dependent entity elements

Dimensions > Entity > List > ⋮ > Time-dependent entity elements

Dimensions > Entity > Time-dependant elements

Attributes tab

Please find below the most important fields.

Field	Description
Scenario	Scenario to which the time dependency is to be applied
Period	Period to which the time dependency is to be applied
Advanced	
Validity	Start date and end of the time dependency

Additional information tab

This tab allows you to insert additional information about the entity, valid for the scenario and period for which the time dependency is created. This information is useful for reporting purposes.

Rules tab

This tab allows you to set the rules to be related to the entity, valid for the scenario and period for which the time dependency is created.

Please find below the most important fields.

Field	Description	Value
Consolidation		
Consolidation method	The consolidation method used for the entity	Cost Equity Line-by-line Proportional
Deconsolidation method	The deconsolidation method used for the entity	**Do not deconsolidate**: No data is cancelled. **Deconsolidate only initial balances**: only data from carry-forward operations from the previous period are cancelled. **Deconsolidate from previous period**: this keeps the information relative to the company for consolidation purposes in the next period and this is then deconsolidated. **Deconsolidate from current period**: the original scenario data are subject to standard data processing and are then deconsolidated.
% consolidation	Percentage of the entity to be consolidated	-
Generate CTP eliminations	This restricts the creation of counterparty eliminations for companies that do not require such entries, based on the consolidation method or by choice.	All elimination logics Exclude IC elimination logics Never
Only CTP	The entity can only be used as a counterparty in intercompany declarations.	-
Only consolidator data	Only inserts data on the consolidator's categories.	-

Field	Description	Value
Listed	Indicates whether the entity is listed.	-
IC matching	This sets the type of IC matching.	Mandatory Optional Automatic

Copies between original scenarios

Dimensions > Entity > Time dependant elements > > Copies between original scenarios

Field description

Please find below the most important fields.

Field	Description
Entity – scenario/period data	This copies the company's elements table attributes from the scenario/period selected.
Entity - TD hierarchy relationships	This copies the entities' relationship with the entity hierarchy nodes for the selected scenario/period, from a source hierarchy.
TD Entity - Classifiers relationships	This copies all the relationships between entities and reclassification variables for the scenario/period selected.

Define generic data

Dimensions > Entity > Time dependant elements > > Define generic data

Descriptions of fields

Below are the most significant fields.

Field	Description
Financial investments type	The flag allows the updating of the Entity - Financial investments type classifier relationships. The classifier 00004 – Financial investments type must be managed in the classifiers list.
Source scenario/period	Allows the selection of the consolidation scenario, necessary to identify the Ownership structure register to be used to update the Entity - Financial investments type classifier relationships
Financial statement geographic area	Allows the updating of the Entity - Financial statement geographic area classifier relationships. The classifier 00016 – Financial statement geographic area must be managed in the classifiers list.
Listed	Allows the updating of the Entity - Listed entity classifier relationships. The classifier 20 – Listed entity must be managed in the classifiers list.

Archive entity data

Dimensions > Entity > Time dependant elements > > Archive entity data

Field description

Please find below the most important fields.

Field	Description
Add only	This only copies the selected values into the offline tables for new companies, without updating existing companies.
Entity elements table	This copies the entity elements for the scenario/period selected.
TD Entity - Classifiers relationships	This copies all the relationships between entities and reclassification variables for the scenario/period selected.
Entity - TD hierarchy relationships	This copies the entities' relationship with entity hierarchy nodes, from a source hierarchy to a target hierarchy, for the scenario/period selected.

Input data for original scenario

Dimensions > Entity > Time dependant elements > > Input data for original scenario

Field description

Please find below the most important fields.

Field	Description
Consolidation method	This copies the consolidation method from the selected scenario to the scenario to fill in.
Financial investment type	This copies the financial investment type from the selected scenario to the scenario to fill in.
Financial statement geographic area	This copies the **Country**/**Geographic area** values relating to the entity to the scenario to fill in.
Listed	This copies the entities' **Listed** status setting to the scenario to fill in.

Input data for consolidation scenario

Dimensions > Entity > Time dependant elements > > Input data for consolidation scenario

Field description

Please find below the most important fields.

Field	Description
Filter	This selects the scenario/period based on a specific criterion: • **Based on the elements to consolidate**: for entities forming part of the elements to consolidate in the scenario/period to fill in. • **Based on the ownership structure register**: for entities forming part of the ownership structure register in the scenario/period to fill in.


Control chart page

Dimensions > Entity > ⋮ > Control chart

Purpose of the page

This page allows you to view and create new relationships between entities and counterparties in specific scenarios and periods.

What it looks like

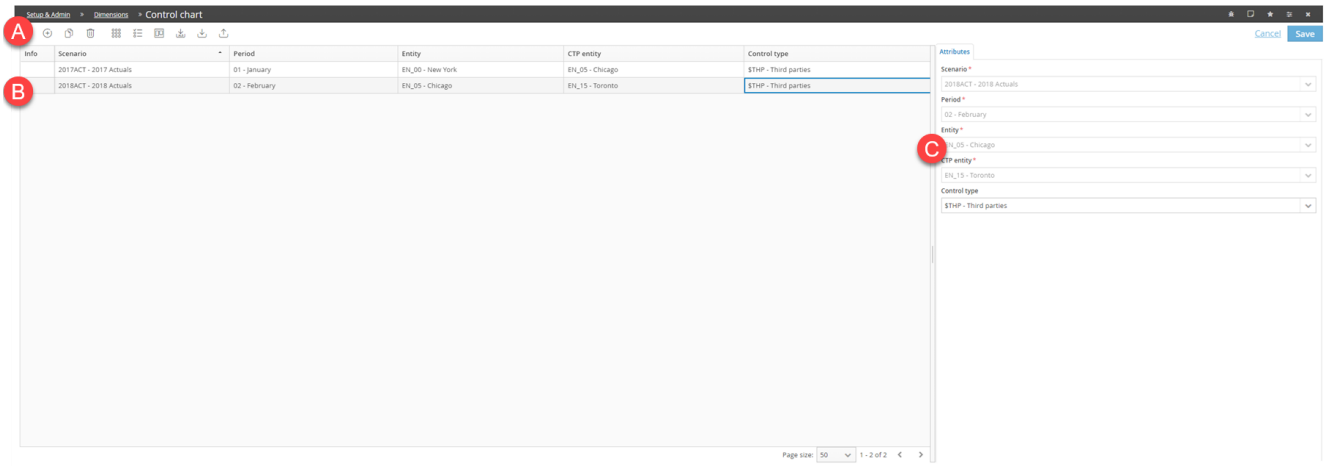

Element	Description
A	Tool bar
B	List of relationships between entities
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new relationship.
	This duplicates the selected row.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

Control chart

Dimensions > Entity > ⋮ > Control chart

Attributes tab

This tab allows you to define the characteristics of the relationship between entities and counterparties. Please find below the most important fields.

Field	Description
Scenario	Scenario for which the relationship is valid
Period	Period belonging to the selected scenario, for which the relationship is valid
Entity	Holding entity or owner entity
CTP entity	Owned entity
Control type	Type of relationship between the owner entity and the owned counterparty


Control type page

Dimensions > Entity > ⋮ > Control type

Purpose of the page

This page allows you to view and create relationship types between entities and counterparties.

What it looks like

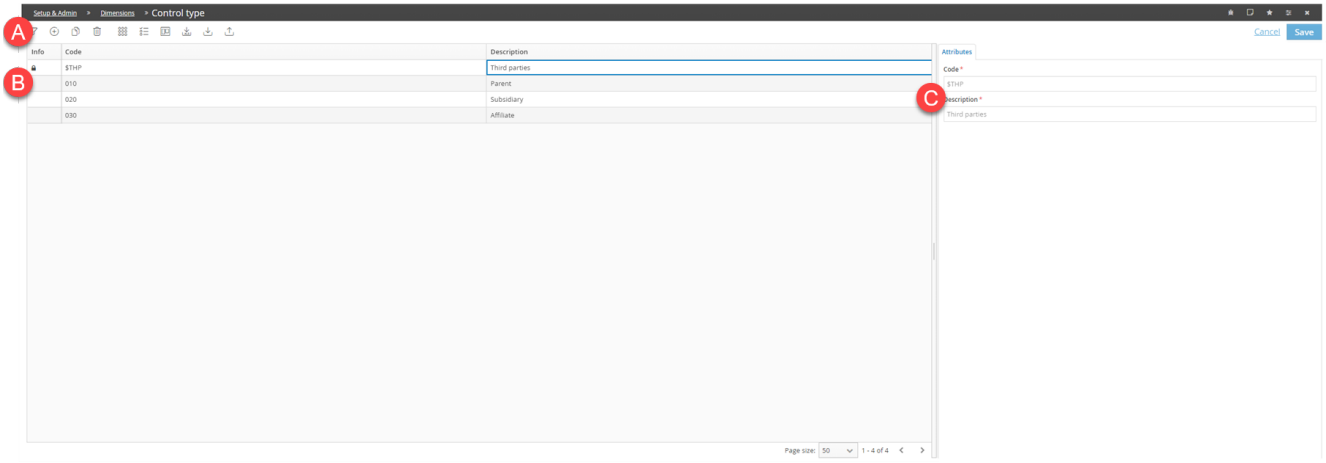

Element	Description
A	Tool bar
B	List of control types
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new relationship.
	This duplicates the selected row.

Element	Description
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
XLS	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

Control type

Dimensions > Entity > ⋮ > Control type

Attributes tab

Field	Description
Code	This identifies the type of control. It begins with $, if it is a system control type.
Description	Control type description


CTP dynamic groups page

Dimensions > Entity > ⋮ > CTP dynamic groups

Purpose of the page

This page allows you to view and create dynamic groups of counterparties.

What it looks like

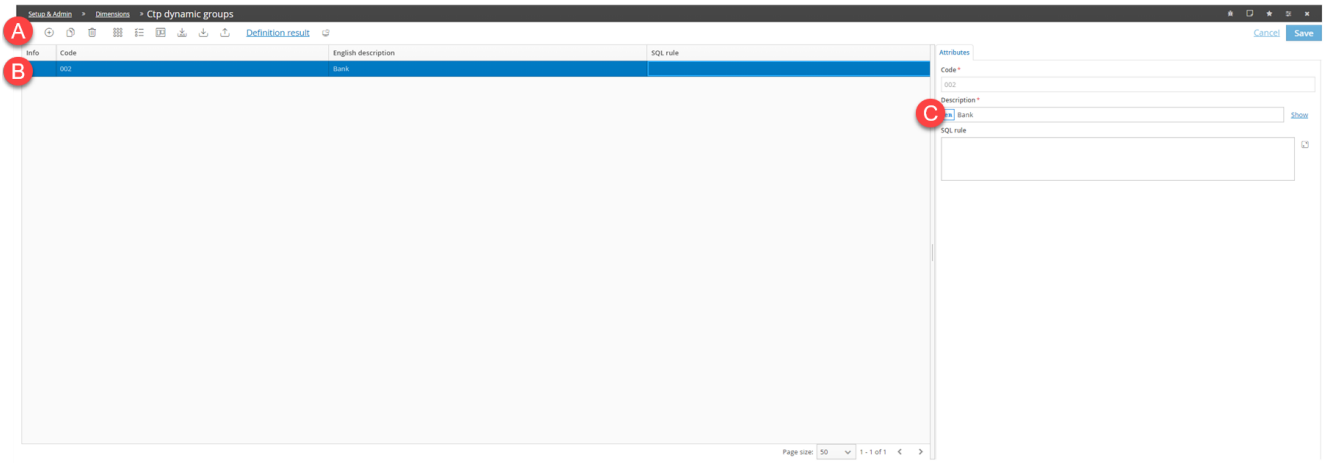

Element	Description
A	Tool bar
B	List of existing dynamic groups
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new relationship.
	This duplicates the selected row.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table, and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
Definition result	This displays and expands the result of applying the defined SQL rule.
	This generates the dynamic group based on the defined SQL rule.

Counterparty dynamic groups

Dimensions > Entity > ⋮ > CTP dynamic groups

Attributes tab

Field	Description
Code	Dynamic group code
Description	Description of the dynamic group
SQL rule	SQL rules for the dynamic extraction of counterparties

SQL rule conventions

The following conventions apply to the composition of SQL rules:

Convention	Description
{AZI}.NOME_CAMPO	Entity elements field: • AZIENDA table • SCENARIO_PERIODO_AZIENDA table (only for time-dependent management)
{AZIV}.NOME_CAMPO	Classifiers field managed for the entity dimension: • AZIENDA_VARIABILE table • AZIENDA_VARIABILE_TV (only for time-dependent management)
{AZIR}.NOME_CAMPO	Field from the SCENARIO_PERIODO_CONS table which stores the parameters used by consolidation data processing on original scenarios for the process/scenario/period/company (only counterparty company, consolidator company, deconsolidation method on the original scenario, optional intercompany matching and generation of counterparty eliminations)
{SCE}.NOME_CAMPO	Scenario elements field

Dimensions: Account

Contents

This section covers the following topics:

The Account: basic concepts 106
Calculation rules: result accounts 108
How to create accounts 109
How to work with accounts 110
Account elements table page 111
Account elements table 113
Create Variations, Control groups, Calculation logics 118
Create Details, Control groups, Calculation logics 120
Recode account page 121
Recode account 122
Result accounts page 122
Result accounts 124
Creation of calculation logics to generate result accounts 124
Creation of control groups to generate result accounts 125
Dynamic groups of accounts 127

The Account: basic concepts

Definition

The account is a mandatory dimension for identifying the data. In this dimension, it is possible to define any measurement or metric in order to carry out statistical or financial analysis.

Nature of the account

Account	Function
Profit & Loss	This collects the P&L data.
Balance Sheet	This collects the balance sheet data.
Memorandum	This collects data and quantities recorded in the financial statements despite not belonging to the P&L or balance sheet.
Other variations	This collects statistical data, where the cumulative value is the sum of the values of each month. *For example: quantities sold that are added together month by month.*
Other stocks	This collects statistical data, where the cumulative value is the value of the month. *For example: the number of employees of the company.*

Account types

Account	Description
Normal account	Account included in the financial statements.
Detail account	This provides more detailed information than a normal reference account. *For example: it may break down the purchasing data by product category (food, detergents, stationery etc.).*
Variation account	This shows the variation over time of the amounts included in an account. This is particularly useful in statutory consolidated financial statements. *For example: in the explanatory notes for a financial statement account, it is necessary to explain how the final value of the current financial year was reached from the closing amount of the previous year.*

Example of a detail account

In this example, a number of detail accounts have been related to a trade receivables account in order to break down the amounts that will be paid with different due dates (30-60 days, 60-90 days, etc.).

Account name	Amount	Account type
Trade receivables	**€ 100**	**Normal account**
Trade receivables: 0-30	€ 60	**Detail account**
Trade receivables: 30-60	€ 20	**Detail account**
Trade receivables: 60-90	€ 20	**Detail account**

The sum of the detail account values is always equal to the value of the reference normal account.

Example of a variation account

In this example, variation accounts are related to the tangible assets account; these variation accounts are identified by variation/detail types showing the entries that led from the initial balance amount to the final balance amount.

Account name	Amount	Account type
Tangible assets: initial balance	€ 100	**Variation account**
Tangible assets: investments	€ 80	**Variation account**
Tangible assets: disinvestments	€ 0	**Variation account**
Tangible assets: depreciation	€ - 10	**Variation account**
Tangible assets: other variations	€ 30	**Variation account**
Tangible assets (final balance)	**€ 200**	**Normal account**

Account class

An account may also be related to a class. This is useful to check the sign with which the amounts are inserted in the forms. In fact, depending on requirements, it may be necessary to view the amounts with their original sign or as an absolute value.

- Original sign: all the values are displayed with a sign. This is "-" for negative values.
- Absolute value: all values are displayed without a sign, and are therefore positive.

If the accounts are displayed with a sign, this is due to the combination of the class attributed to the account and the sign of the classes set during configuration.

The following classes are available:

- Revenue
- Cost
- Asset
- Liability
- Asset increase

- Asset decrease
- Liability increase
- Liability decrease

Calculation rules: result accounts

Definition

The result accounts are calculated automatically, based on the balance sheet net result and the P&L net result. Dedicated control groups and calculation logics are used to complete this calculation.

***IMPORTANT**: balance sheet (BS) control groups and calculation logics are only generated if the system is set to manage the BS net result balanced with the P&L net result.*

***Note**: the generic result accounts shown in the Result accounts page are used by default.*

Control groups for result accounts

To calculate the result accounts, the system generates the following system control groups:

Control group	Function
$PL_"Rule set code"	This checks that the profit and loss is balanced, i.e. that the result account is the sum of all the normal P&L, with a changed sign.
$RESFLOW_ "Rule set code"	This checks that the balance sheet result accounts and the balance sheet result variation (including the effect of the current year) contain the same amounts.
$RESULT_ "Rule set code"	This checks that the balance sheet result accounts and the P&L result are the same.
$BS_codice set	This checks that the balance sheet is balanced, i.e. that the balance sheet result account is the same as the sum of all the normal balance sheets, with a changed sign.

For further details about how these control groups are generated, please refer to "Creation of control groups to generate result accounts" on page 125.

Calculation logics for result accounts

To calculate the result accounts, the system generates the following calculation logics:

Calculation logic	Function
$PL_RESULT_"Rule set code"	This calculates the P&L result account as the sum of all the P&L.
$BS_RESULT_"Rule set code"	This calculates the balance sheet result account, the amount of which is the same as the P&L result account.
$BS_RESULT_FLOW_ "Rule set code"	This copies the amount of the effect of the year from the balance sheet result account amount to the variation account.

For further details about how these calculation logics are generated, please refer to "Creation of calculation logics to generate result accounts" on page 124.

How result accounts are used in processes

The generic result accounts shown on the **Result accounts** page are used by default. To use other sets of result accounts for specific processes, the override must be enabled when the calculation logics are being defined.

How to create accounts

Concept Information

The dimensions of CCH Tagetik 81
Creation of calculation logics to generate result accounts 124
Creation of control groups to generate result accounts 125

How to create an account manually

Dimensions > Account > List

This procedure is useful when it is necessary to create a limited number of accounts; it allows for a new account to be created manually.

1. In the account elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new account.
3. In the **Relationships** tab, the new account will be automatically related to a default hierarchy ($) which organises the accounts by nature and type. If necessary, replace this hierarchy or update with others.
4. Set all of the characteristics for the account in the various configuration tabs, then click **Save**: the account created will be listed in the data table.

How to create a variation account

Dimensions > Account > List

It is possible to create variation accounts in order to monitor the changes of a reference account (parent account).

To create this type of account, it is possible to follow the manual procedure ("How to create an account manually" above), or the following steps. In this case, you must also define the variation/detail types necessary to create the control groups and their groupings.

1. In the account elements table, select the normal account for which a variation needs to be created, then click ⋮ > **Create Variations**: the **Create Variations, Control groups, Calculation logics** window will open.
2. Set the parameters in the **Variation Accounts** section in order to define the account to be created.
3. Set any other useful parameters, then click **OK**: the new account will be created and listed in the account element table.

How to create a detail account

Dimensions > Account > List

It is possible to create detail accounts to provide details of financial statement accounts for which it is useful to have more granular information.

To create this type of account, it is possible to follow the manual procedure ("How to create an account manually" above), or the following steps. In this case, you must also define the variation/detail types necessary to create the control groups.

1. In the account elements table, select the normal account for which details need to be created, then click ⋮ > **Create Details**: the **Create Details, Control groups, Calculation logics** window will open.
2. Set the parameters in the **Detail Accounts** section in order to define the account to be created.
3. Set any other useful parameters, then click **OK**: the new account will be created and listed in the account element table.

How to create a result account

Dimensions > Account > ⋮ > Result accounts

This procedure must be completed during initial configuration.

1. In the account elements table, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the set of result accounts.
3. Set all the characteristics of the result accounts and balancing, then click **Save**.

How to work with accounts

Concept Information

The dimensions of CCH Tagetik 81
The Account: basic concepts 106
Creation of calculation logics to generate result accounts 124
Creation of control groups to generate result accounts 125

How to delete an account

Dimensions > Account > List

***IMPORTANT**: This procedure is irreversible. Only run if there is a real need to do so.*

1. In the account elements table, select the account to delete, then click : in the **Info** column, the symbol will appear, indicating that the account is about to be deleted.
2. Click **Save**: a window will open explaining the consequences of the deletion.
3. Select the desired options, then click **Confirm**: the account will be deleted.

***IMPORTANT**: this operation may take a long time, as the account has to be removed from all the tables within Tagetik.*

How to recode an account

Dimensions > Account > List

This is useful for changing account codes individually. This is a time-consuming procedure and is therefore only recommended for changing a limited number of codes at a time.

To make massive updates, use the Standard import function and work on the Recoding page.

1. In the account elements table, select the account whose code needs to be changed.
2. Select > **Recode**: the **Recode - Code Dimension** page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the account.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to define custom dimension restrictions for an account

Dimensions > Account > List

This is useful for excluding data from specific custom dimensions from being collected.

1. In the account elements table, select the account for which to create restrictions.
2. In the **Restrictions** tab, set the desired type of restriction for each custom dimension shown.
3. Click **Save**: for custom dimensions for which a restriction has been set, the **Define** command will be displayed together with the symbol, indicating that there are elements for which the account is to be restricted.
4. Click **Define**: the specific page will open allowing you to define the restrictions.
5. Click to add an element.
6. In the **Attributes** tab, set whether to include or exclude the element, and select the single custom dimension elements or nodes of a non-time-dependent hierarchy defined for the custom dimension.

7. To enable a hierarchy node, but exclude an element from it, you must first set the node and then the exception on the next line.

   ***IMPORTANT**: The system implements restrictions based on the order in which they are inserted in the definition window. If two restrictions are in conflict, the one implemented last in the sequence will prevail.*

8. Click **Save**.
9. To view a list of all the selected elements, click **Definition result**.

How to inherit settings from another account

Dimensions > Account > List

1. In the account elements table, select the account to be defined and then click ⋮ > **Relate as similar account**: the relationship window will open.
2. In **Reference Account**, select the account from which to inherit the settings: all of the characteristics for that account that may be inherited will be displayed.
3. Select the characteristics to be inherited, then click **Run**: the account selected in the elements table will inherit all of the selected characteristics.

How to generate a report with the characteristics of an account

Dimensions > Account > List

This is useful for creating reports in Excel format that contain specific attributes extracted from the accounts.

1. In the accounts list, select > **Report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the characteristics of the accounts to be included in the report.
3. In the **Output** section, define how to break down and group the accounts in the report. For each type of output selected, a dedicated tab will be created in the report.
4. Click **OK**: the requested report will be generated in Excel format.

How to generate a report on account restrictions

Dimensions > Account > List

It is possible to create reports in Excel format containing information about specific custom dimensions managed for the entities listed. To define the data to be included in the report, follow the below procedure:

1. Select > **Restrictions on custom dimensions report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the filters to define the accounts that will be included in the report.
3. In the **Output** section, define how to break down and group the information in the report. For each type of output selected, a dedicated tab will be created in the report.
4. Click **OK**: the requested report will be generated in Excel format.

How to define the characteristics of the account dimension

Dimensions > Account > ⋮ > Settings

Set the characteristics of the account dimension, and then click **OK**.


Account elements table page

Dimensions > Account > List

Purpose of the page

This page allows you to view all the existing accounts and to insert new ones, defining all the relative characteristics.

What it looks like

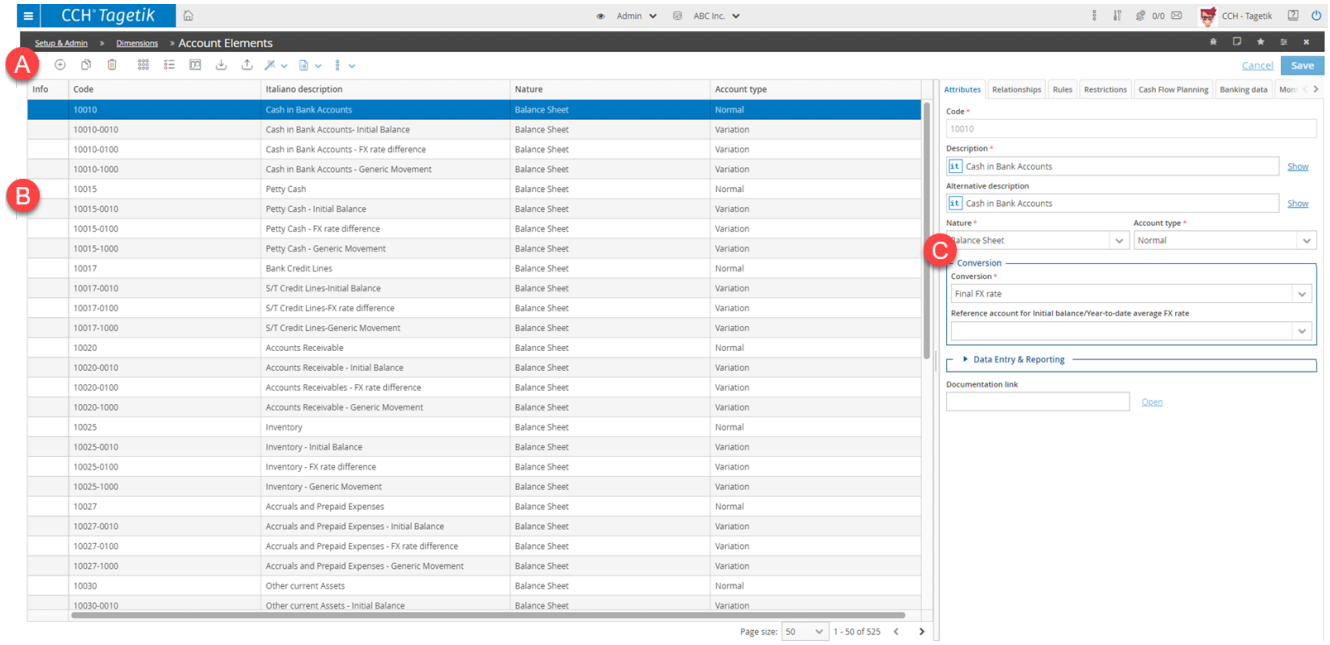

Element	Description
A	Tool bar
B	Account elements table
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new account.
	This duplicates an account with the same characteristics as the one selected, with the exception of the code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
XLS	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

Account elements table

Dimensions > Account > List

Attributes tab

Please find below the most important fields.

Field	Description	Values
Alternative description	Account description used in the reports.	-
Nature	Nature of the account	Balance Sheet Profit & Loss Memorandum Other variations Other stocks
Account type	Account type	Normal: main accounts, neither variation accounts nor detail accounts. Variation: the account is part of a variation. Details: the account collects detail values.

Field	Description	Values
Conversion	FX rate to be applied when converting into the consolidation currency.	**P&L FX rate** : The P&L conversion method is defined in the conversion rule. It is possible to override, for the individual process, the settings of the default conversion rule and replace them with the chosen FX rate (average FX rate/period average FX rate/year-end FX rate). Used for the P&L, detail accounts and other variation accounts. **Average FX rate**: This converts the cumulative amounts to the average FX rate present in the FX rates table. **Period average FX rate**: This converts the amount for the period to the period average FX rate present in the FX rates table and then adds it to the converted data of the previous period. **Final FX rate**: This converts cumulative amounts to the final FX rate present in the FX rate table. Used for the balance sheet, detail accounts and 'other stock' accounts. Equity accounts are excluded, as these are normally converted at the historical FX rate. **Historical FX rate**: This stratifies the conversion based on the period FX rate. There is no FX rate numeric value. In order to obtain the final converted value, the system adds the converted variations to the initial balance, each based on the type of FX rate indicated in the relative table. Used for equity accounts. **Prev. P&L FX rate**: Applied to the reserve variations that receive the distribution of profit and the balance sheet net result for the previous year. Only used for variation accounts and detail accounts. **Prev. Final FX rate**: Applied to the accounts representing the initial balances. However, these accounts are actually calculated on the basis of the carryforward processing operations, and are not the result of conversions. Only used for variation accounts and detail accounts. **Initial balance FX rate**: this converts incoming area variations or percentage variations in the case of a decrease of accounts converted at the historical FX rate, when the entry or reduction occur at the start of the period, or when the amount refers to carrying forward. Only used for variation accounts. With this kind of FX rate, it is useful to specify the **Reference account for Initial balance/Year-to-date average FX rate** which allows you to calculate the conversion coefficient. Only if the conversion type is "Initial balance FX rates" or "Year-to-date average FX rate". Must be a "Normal" or "Detail" Balance Sheet account. If not present, the system will use the parent account of the control group to which the account being converted belongs as the account. **Year-to-date average FX rate**: this converts outgoing area variations or the percentage variance in the case of a decrease of accounts converted at the historical FX rate, i.e. when the exit or reduction occur during the period and other operations alter the value of the account. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the conversion coefficient in **Reference account for Initial balance/Year-to-date average FX rate**. **None**: This is applied to accounts that are not subject to currency conversion. This is used for 'other variation', 'stock' and 'initial balance variation' accounts.
Reference account for Initial balance/Year-to-date average FX rate	Account used to calculate the conversion coefficient.	Only Normal or Detail Balance Sheet accounts. If not specified, the parent account of the control group to which the account belongs is used.
Validity	Account validity period	-

Field	Description	Values
Class	Account class to which the account belongs. This defines the sign for the amounts in the forms.	-
Manage transaction currency	This defines if the account allows for transaction currency or only company currency.	-
IC management	The account may receive intercompany values.	-
Manage maximum number of decimals	This allows for 9 decimals to be used also for 'other stock' and 'other variations' accounts.	-
Documentation link	This opens a page that is external to Tagetik with additional information.	-

tab Relationships

This tab allows you to create relationships between accounts, hierarchies and nodes.

Rules tab

Please find below the most important fields.

Field	Description
Gross amount equal to the IC sum	The gross amount for the account is automatically calculated by summing the IC declarations for said account.
Accrual	
Debit accrual	The account used to generate the counterpart entry for the P&L rows inserted manually (if a debit sign).
Credit accrual	The account used to generate the counterpart entry for the P&L rows inserted manually (if a credit sign).
Consolidated	
Use account for set-up	Use the account to set up the financial investments or equity of the ownership structure register.
Exclude from proportional calculation	Account not to be calculated proportionally, in the presence of proportional companies. Mandatory for 'other variations' or 'other stock' accounts.
Validation checks	
Standard sign check	Sign that may be used to insert amounts. Used by diagnostic checks to detect any violations of the configured standard. This check can be set as blocking.
FX rates check	This indicates whether the IC FX rate diagnostic check is run on the account.
Notes check	This indicates whether the diagnostic check into the presence of notes regarding amounts is run on the account. Notes can be set as mandatory and the check can be blocking for data submission.
IC capacity check	Diagnostic check on the capacity between IC amounts and gross amounts.
IC sign check	Diagnostic check on the sign of IC entries. The sign must be consistent with the gross amount. Mandatory for accounts that allow IC.

Restrictions tab

This tab allows you to set the custom dimensions accepted by the account.

Please find below the most important fields.

Field	Description
<Custom dimensions enabled in the environment>	Restrictions for the specific custom dimension.
CTP restriction	This uses rules to define the counterparties accepted by the account for the IC.

It is possible to set these restrictions for each enabled custom dimension (cost centers, products, employees etc.).

Restriction	Description
None	All custom dimensions are accepted.
Restricted	It is possible to define the accepted custom dimensions.
Restricted on the company's default custom dimension	The account inherits the restrictions on the associated company's custom dimensions.
Restricted based on the account/classifiers relationships	The possible custom dimensions are automatically generated depending on the relationships between the custom dimension accounts and classifiers inserted in the table.

Cash Flow Planning tab

This tab allows you to set the data for financial planning.

Please find below the most important fields.

Field	Description
Variation	
Debit	Variation account to be used to define the accounting models. This is normally used on balance sheet accounts to specify the variation account with which to perform the initial disinvestment, or, for accounts linked to asset-type objects, to specify the variation accounts linked to events. It must be a variation account.
Credit	
Receivable/Payable	
Debit	Variation account to be used to define the accounting models. This is usually used on P&L accounts to specify the variation account of adjusted credits or debits. It must be a variation account.
Credit	
Liquidity	
Debit	Bank account variation account that records cash flow account entries (payment or collection) for the account.
Credit	To be used to define the accounting models. It must be a variation account.
Accrual	
Debit	The account used to generate the counterpart entry for the P&L rows inserted manually.
Credit	
Others	
Debit	Additional account to define the accounting models.
Credit	
Additional debit accrual account	The account to generate a balance sheet counterpart entry for accounts that have no entries; or to generate the reference entry of a cost/revenue in the case of deferred invoicing.
Additional credit accrual account	

Field	Description
Revaluation/Write-down	
Enable	Specifies whether or not the valuation at the period-end FX rate is performed for that account at the end of each period. Only mandatory for balance sheet accounts.
Debit	The account to which the FX rate difference relating to the period-end FX rate valuation is booked. It must be a P&L account. If not defined, the account present in the configuration will be used.
Credit	

tab Banking data

This tab allows you to set the characteristics of the data collected for banking supervision purposes. In particular, it relates accounts to specific supervisory items.

Please find below the most important fields.

Field	Description
Bankit reporting M sub-item	Supervisory sub-item that the account will feed for statistical reporting.
Bankit reporting M sub-item - IC Group	Supervisory sub-item to be fed by the financial statement accounts of 36381 for direct production (IC relationships between entities of the banking group).
Bankit reporting 1 sub-item	Supervisory sub-item that the account will feed for the common reporting framework.
Bankit reporting EP sub-item	Supervisory sub-item that the account will feed for Bankit EP reporting.
EBA reporting sub-item	Supervisory sub-item that the account will feed for Bankit EBA reporting.
Bankit reporting M sub-item (OLD)	Supervisory sub-item that the account will feed for statistical reporting.
IC sub-item (OLD)	Supervisory sub-item to be fed by the financial statement accounts of 36381 for direct production (IC relationships between entities of the banking group) up until 30/06/2009.

Monthly splitting rules tab

This tab allows you to set the criteria based on which data are registered within a period.

Field	Description	Value
Monthly splitting type	Monthly splitting type to be allocated to the account	**No**: no monthly splitting (default) **Flat**: the value of the account is allocated in equal parts to each defined period. **Coefficient 445**: the value of the account is allocated based on the 4+4+5 progression of weeks in the months. Considering that a year is made up of 52 weeks and that each quarter has 13 weeks, for the 445 coefficient, the "weights" of the weeks in the quarter will be 4/52, 8/52, 13/52, 17/52, ... 47/52, 52/52. This is only applicable in the case of 12 periods. **Coefficient 454**: the value of the account is allocated based on the 4+5+4 progression of weeks in the months. The "weights" of the weeks in the quarter will be 4/52, 9/52, 13/52, 17/, ... 48/52, 52/52. This is only applicable in the case of 12 periods. **Coefficient 544**: the value of the account is allocated based on the 5+4+4 progression of weeks in the months. The "weights" of the weeks in the quarter will be 5/52, 9/52, 13/52, 18/52, ... 48/52, 52/52. This is only applicable in the case of 12 periods. **Advanced Management**:Monthly splitting is defined using a specific driver. This enables the subsequent reference fields.
Reference		
Reference account	Account used to calculate the monthly splitting driver. If this is not specified, the system uses the account defined in the elements table. In the case of monthly splitting with **Advanced Management**, it must be a P&L account, 'other variations' account or a variation account.	

Field	Description	Value
Reference account hierarchy	The hierarchy of accounts used to calculate the monthly splitting driver. Only for monthly splitting with **Advanced Management**.	
Reference scenario	Reference scenario used to calculate the monthly splitting driver, obtained by defining a time sequence to apply to the data processing scenario. Only for monthly splitting with **Advanced Management**.	
Filter custom dimension 1	This specifies whether the driver is filtered on the custom dimension. Only for monthly splitting with **Advanced Management**.	**Do not filter**: No partialization applied to the driver. **Filter on lowest level element**: Data are monthly split with a driver filtered on the same elements of the target custom dimension. **<hierarchy node>**: Data are monthly split with a driver filtered on all elements related to the same node to which the target element is related.
Filter custom dimension 2		
Filter custom dimension 3		
Filter custom dimension 4		
Filter custom dimension 5		
Filter category	This specifies whether or not the driver is filtered on the category based on the data to handle.	
Filter CTP company	This specifies whether or not the driver is filtered on the CTP company based on the data to handle.	
Filter CTP custom dimension2	This specifies whether or not the driver is filtered on the CTP custom dimension 2 based on the data to be handled	

Create Variations, Control groups, Calculation logics

Dimensions > Account > List > ⋮ > Create Variations

Variation accounts section

Please find below the most important fields.

Field	Description	Values
Type nodes of variation accounts	Grouping of the variation types that define the variation generated	-
Restrictions on dimensions	Restriction to be applied to the variation accounts generated	**As Parent Account**: inherits the same restrictions as the parent account. **On Default Entity**: inherits the restrictions defined at entity level. **Based on"Dimensions Checks"**: the restrictions depend on how the dimension checks have been defined. **None**: there are no restrictions on dimensions.

Control groups section

Please find below the most important fields.

Field	Description
One for each Parent Account/One for all Parent Accounts	Number of control groups to be created for the parent accounts selected.
Code format and Description	Criteria with which the control group inherits the code and description from the parent account.
Balance automatically	The control group is made to be balanced automatically. ***Note**: any unbalanced amounts are reported in a dedicated variation account (Balancing variation).*

Diagnostics section

Please find below the most important fields.

Field	Description
Severity	This defines whether or not any errors detected by the diagnostic process have to be block the data submission process.
Data types to check	The types of data to be checked during the diagnostic process.
Check original data on	This indicates whether the diagnostic process for original data has to use the local currency or the transaction currency.

Calculation logics section

In this section, it is possible to define one or more calculation strategies to be applied to the control group.

Please find below the most important fields.

Field	Description	Values
Calculate	The criteria used to calculate the account balance	**Parent account as sum**: the balance of the normal account (parent account) is calculated by adding together the detail accounts or variation accounts. The data are inserted in the detail accounts or variation accounts. **Variation/detail as difference**: the detail account or variation account is calculated as the difference between the balance of the parent account and the balance of the remaining detail accounts or variation accounts.
Data to calculate	Data to be taken into consideration in the calculation.	**Gross** **Intercompany** **Journals**
Suffix	The common suffix for codes, when several rules are generated.	-

Create Details, Control groups, Calculation logics

Dimensions > Account > List > ⋮ > Create Details

Detail accounts section

Please find below the most important fields.

Field	Description	Values
Type nodes of detail accounts	Grouping of the detail types that define the details generated	-
Restrictions on dimensions	Restriction to be applied to the detail accounts generated	**As Parent Account**: inherits the same restrictions as the parent account. **On Default Company**: inherits the restrictions defined at entity or company level. **Based on"Dimensions Checks"**: the restrictions depend on how the dimension checks have been defined. **None**: there are no restrictions on dimensions.

Control groups section

Please find below the most important fields.

Field	Description
One for each Parent Account/One for all Parent Accounts	Number of control groups to be created compared with the parent accounts selected.
Code format and Description	Criteria with which the control group inherits the code and description from the parent account.
Balance automatically	The control group is made to be balanced automatically. ***Note**: any unbalanced amounts are reported in a dedicated child account.*

Diagnostics section

Please find below the most important fields.

Field	Description
Severity	This defines whether or not any errors detected by the diagnostic process have to be block the data submission process.
Data types to check	The types of data to be checked during the diagnostic process.
Check original data on	This indicates whether the diagnostic process for original data has to use the local currency or the transaction currency.

Calculation logics section

In this section, it is possible to define one or more calculation strategies to be applied to the control group. Please find below the most important fields.

Field	Description	Values
Calculate	The criteria used to calculate the account balance	**Parent account as sum**: the balance of the normal account (parent account) is calculated by adding together the detail accounts or variation accounts. The data are inserted in the detail accounts or variation accounts. **Variation/detail as difference**: the detail account or variation account is calculated as the difference between the balance of the parent account and the balance of the remaining detail accounts or variation accounts.
Data to calculate	Data to be taken into consideration in the calculation.	**Gross** **Intercompany** **Journals**
Suffix	The common suffix for codes, when several rules are generated.	-


Recode account page

Dimensions > Account > List > > Recode

Purpose of the page

This page allows you to change the existing account codes on an individual basis.

What it looks like

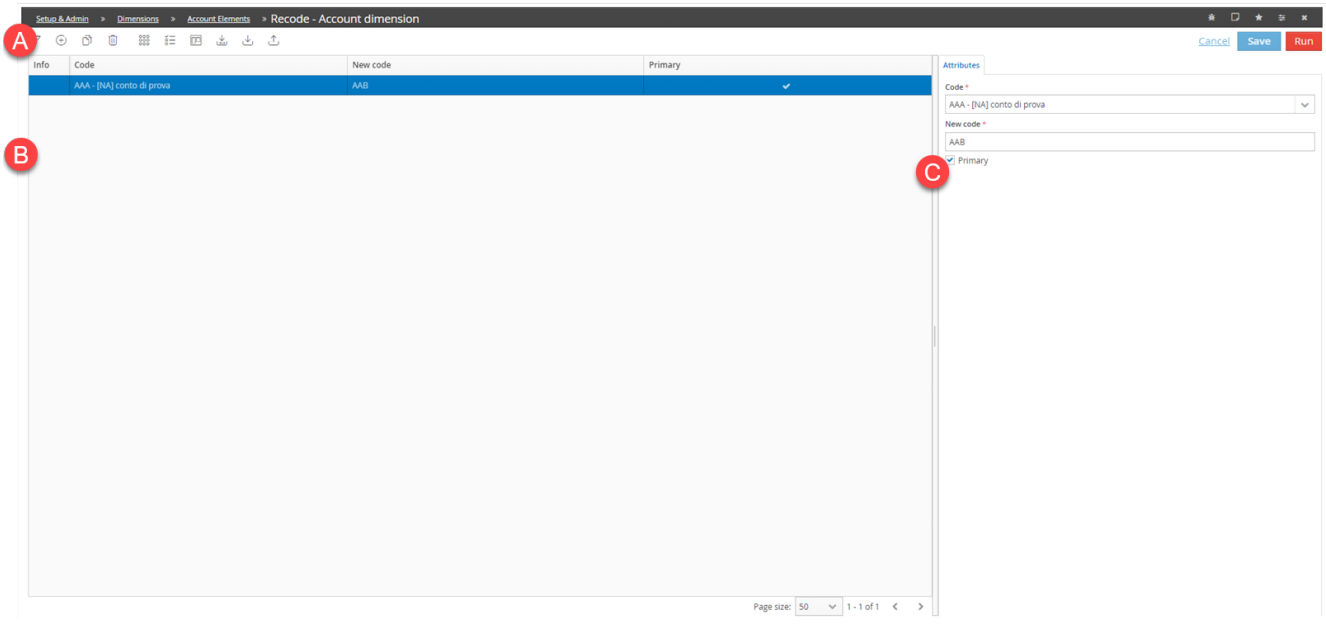

Element	Description
A	Tool bar
B	List of codes in the process of being recoded
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new account.
	This adds a new row with the same recoding code as the one selected. This is useful to merge several accounts into one.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

Recode account

Dimensions > Account > List > > Recode

Attributes tab

Please find below the most important fields.

Field	Description
Code	Original code
New code	New code to be assigned to the account
Primary	This indicates that the new code must prevail in case of any conflict with other previously defined codes.


Result accounts page

Dimensions > Account > > Result accounts

Purpose of the page

This page allows you to define the calculation logics in order to automatically generate result accounts.

What it looks like

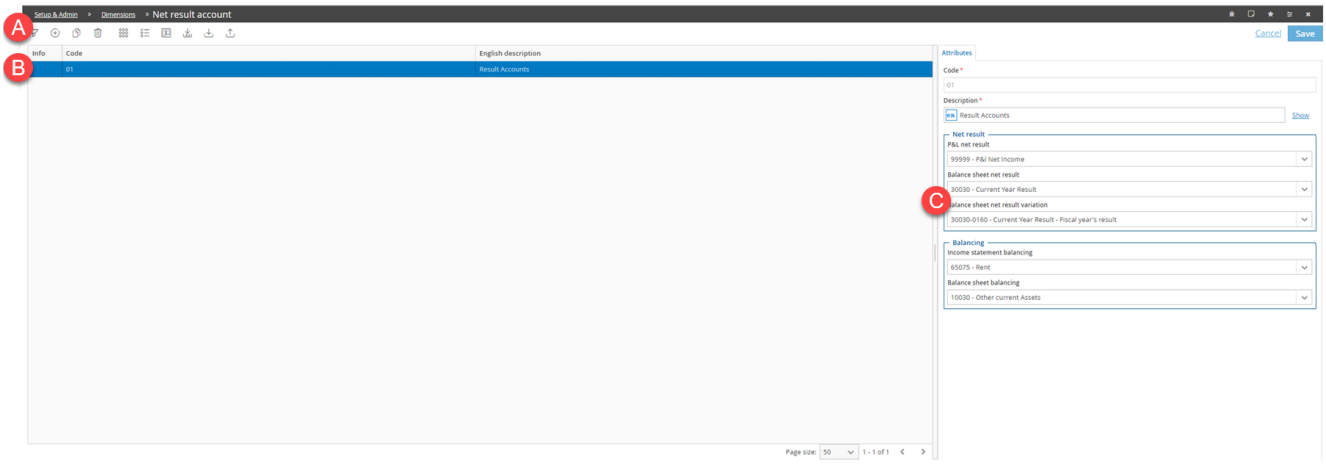

Element	Description
A	Tool bar
B	List of result accounts
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new account.
	This adds a new row with the same recoding code as the one selected. This is useful to merge several accounts into one.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table, and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
.XLS	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

Result accounts

Dimensions > Account > ⋮ > Result accounts

Attributes tab

Please find below the most important fields.

Field	Description
Result	
P&L result	Normal P&L calculated as the sum of the P&L accounts
Balance sheet result	Normal balance sheet calculated based on the P&L
Balance sheet result variation	Variation account that records the balance sheet entries for the year
Balancing	
Balancing P&L	P&L used by balancing data processing, with an amount equal to the difference between the P&L result and the sum of the P&L accounts.
Balancing balance sheet	Used by the Balancing processing, with an amount equal to the difference between the balance sheet result and the sum of the balance sheet accounts.

Creation of calculation logics to generate result accounts

Introduction

This section describes the process followed by the system to create the calculation logics required to generate the result accounts.

Process of creating calculation logics

This process involves the following main steps:

1. If the $PL_RESULT, $BS_RESULT, $BS_RESULT_FLOW calculation logics are already present, deletion of the addenda they are made up of.
2. Creation of the following sets of rules, if not already present:
   - $PL_RESULT
   - $BS_RESULT
   - $BS_RESULT_FLOW
3. The calculation logics generated are connected to the node of the calculation logic grouping set as default for new calculation logics.
4. Deployment.

Creation of $PL_RESULT set of rules

If the P&L result account is defined in the result accounts, the system will create a 'sum' calculation logic with the following characteristics:

Element	Value
Code	$PL_RESULT + code for set of result accounts
Description	$PL_RESULT + description of set of result accounts
Set	Accounts, with the P&L result account
Run	(**Run on gross amounts** option) Run on gross amounts. (**Run on journals**) Run on journals.

Once the set of rules has been created, insert the accounts relating to the "PL_OT - Profit & Loss - Others" node of the system account hierarchy, with the opposite sign, as the addenda for the calculation logic.

Creation of $BS_RESULT set of rules

If the balance sheet result account is defined in the result accounts, the system will create a 'sum' calculation logic with the following characteristics:

Element	Value
Code	$BS_RESULT + code for set of result accounts
Description	$BS_RESULT + description of set of result accounts
Set	Accounts, with the balance sheet result account
Run	(**Run on gross amounts** option) Run on gross amounts. (**Run on journals**) Run on journals.

Once the set of rules has been created, insert the P&L result account, with the opposite sign, as the addenda for the calculation logic.

Creation of $BS_RESULT_FLOW set of rules

If the balance sheet result account and the balance sheet result variation are defined in the result accounts, the system will create a 'sum' calculation logic with the following characteristics:

Element	Value
Code	$BS_RESULT_FLOW + code for set of result accounts
Description	$BS_RESULT_FLOW + description of set of result accounts
Set	Accounts, with the balance sheet result variation
Run	(**Run on gross amounts** option) Run on gross amounts. (**Run on journals**) Run on journals.

Once the set of rules has been created, insert the balance sheet result account as the addenda for the calculation logic.

Creation of control groups to generate result accounts

Introduction

This section provides a detailed description of the process that the system runs to create the control groups necessary to generate the result accounts.

Process to create control groups

This process involves the following main steps:

1. Cancellation of the accounts that make up the definition of the system control groups, if these already exist.
2. Creation of the following control groups, if not already present:
   - $RESULT
   - $PL
   - $BS
   - $RESFLOW
3. The control groups generated are linked to the nodes of the control group grouping defined by default for new control groups.
4. Deployment.

Creation of the $RESULT control group

If both the P&L result and the balance sheet result are defined in the set of result accounts, the system will create a balancing control group with a "=" control operator, with the following characteristics:

Element	Value
Code	$RESULT + code for set of result accounts
Description	Balancing result + result accounts
Notes	Balancing result + description of result accounts

Element	Value
Blocking error	The balancing between accounts belonging to the control group is blocking for data submission.
Diagnostic	(**Journals - Check by single company** option) Carried out by journal number/company on the consolidation journals. (**Gross amount type check**) Carried out on gross amounts.
Balancing	During the diagnostic phase: on the gross amounts in the financial statement currency.
Custom dimensions	• Check lowest level elements: if the balance sheet result account is restricted for the dimension **Based on Company**. • Total: in the other cases.

Once the control group has been created, it inserts the P&L result account present in the set as the parent account and the balance sheet result account as the child account, with the opposite sign.

Creation of the $PL control group

If the P&L result is defined in the set of result accounts, the system will create a balancing control group with a "=" control operator, with the following characteristics:

Element	Value
Code	$PL + code for set of result accounts
Description	P&L balancing + description of set of result accounts
Notes	P&L balancing + description of set of result accounts
Blocking error	The balancing between accounts belonging to the control group is blocking for data submission.
Diagnostic	(**Journals - Check by single company** option) Carried out by journal number/company on the consolidation journals. (**Gross amount type check**) Carried out on gross amounts.
Balancing	(**Enable automatic balancing**) Automatic During the diagnostic phase: on gross amounts in financial statement currency.
Custom dimensions	• Check lowest level elements: if the P&L result account is restricted for the dimension **Based on Company**. • Total: in the other cases.

Once the control group has been created, it inserts the P&L result account present in the set as the parent account and the accounts of the "PL_OT - Profit & Loss - Others" node from the system account hierarchy as child accounts, with the opposite sign.

Furthermore, if the P&L balancing account is set up in the set, the system will insert it as a child account (with the opposite sign), allocating to it any unbalanced amounts due to rounding for currency conversion or for changes in unit measures between the parent accounts and child accounts.

Creation of the $BS control group

If the balance sheet result is defined in the set of result accounts, the system will create a balancing control group with a "=" control operator with the following characteristics:

Element	Value
Code	$BS + code for set of result accounts
Description	BS balancing + description of set of result accounts
Notes	BS balancing + description of set of result accounts
Blocking error	The balancing between accounts belonging to the control group is blocking for data submission.
Diagnostic	(**Gross amount type check**) Carried out on gross amounts.
Balancing	(**Enable automatic balancing**) Automatic During the diagnostic phase: on gross amounts in financial statement currency.

Once the control group has been created, it inserts the balance sheet result account present in the set as the parent account and the accounts of the "BS_OT - Balance Sheet - Others" node from the system account hierarchy as child accounts, with the opposite sign.

Furthermore, if the balance sheet balancing account is set-up in the set, the system will insert it as a child account (with the opposite sign), allocating to it any unbalanced amounts due to rounding for currency conversion or for changes in unit measures between the parent accounts and child accounts.

Creation of the $RESFLOW control group

If the balance sheet result accounts and the balance sheet result variation are defined in the set of result accounts, the system will create a balancing control group with a "=" control operator, with the following characteristics:

Element	Value
Code	$RESFLOW + code for set of result accounts
Description	Result variation balancing + description of set of result accounts
Notes	Result variation balancing + description of set of result accounts
Blocking error	The balancing between accounts belonging to the control group is blocking for data submission.
Diagnostic	(**Journals - Check by single company** option) Carried out by journal number/company on consolidation journals. (**Gross amount type check**) Carried out on gross amounts.
Balancing	(**Enable automatic balancing**) Automatic During the diagnostic phase: on gross amounts in financial statement currency.
Custom dimensions	• Check lowest level elements: if the P&L result account is restricted for the dimension **Based on Company**. • Total: in the other cases.

Once the control group has been created, it inserts the balance sheet result account present in the set as the parent account and the balance sheet result variation account as the child account.

Dynamic groups of accounts

Dimensions > Account >  > Dynamic groups of accounts

Page purpose

This page allows you to view and create dynamic groups of accounts.

It consists of 2 panels:

- a panel displaying the list of dynamic groups of accounts
- a panel displaying the conditions to be applied to accounts for populating the dynamic group selected in the list

List of Dynamic groups of accounts

This panel allows you to create, edit, clone and delete dynamic groups of accounts.

Field	Description
Code	Dynamic group code.
Description	Description of the dynamic group.
Note	Any explanatory notes.

Filter conditions for dynamic group

This panel allows you to define the dynamic group creation logic.

You can define multiple groups of conditions and the logical operator (AND or OR) that connects them.

Condition	Description
Account code	Allows you to add accounts to the group by filtering them by code.
Custom attributes	Allows you to add accounts to the group by filtering them by the customised attributes defined in the Account Master Settings (see Account Dimension Settings page).
Account nature	Allows you to add accounts to the group by filtering them by account Nature.
Account type	Allows you to add accounts to the group by filtering them by account Type.
Account conversion type	Allows you to add accounts to the group by filtering them by account conversion Type.
IC data management	Allows you to add accounts to the group by filtering them by IC Data Management.
Use account for setup	Allows you to add accounts to the group by filtering them by Use account for setup.
Standard sign	Allows you to add accounts to the group by filtering them by Standard sign.
IC Capacity	Allows you to add accounts to the group by filtering them by IIC Capacity.
Account node code	Allows you to add accounts to the group by selecting one or more account nodes.

For most conditions, it is also possible to select the 'calculate Variations/Details' option. In this case, accounts will not be retrieved by applying the filter to the accounts list, but their detail/variation accounts will be retrieved. It is also possible to specify the list of detail/variation accounts to be used to retrieve accounts.

Dimensions: Period

Contents

This section covers the following topics:

Periods: basic concepts 129
How to work with periods 131
Period list page 131
Period list 132

Periods: basic concepts

Definition

The period is a time dimension representing the basic unit used to break down the tax year. Periods normally represent months.

Subdivision into periods

In addition to the default subdivision into 12 periods, it is also possible to create custom periods. For example, it may be useful to create the following periods:

- 13 periods for companies that complete periodic reporting every four weeks
- single weeks
- quarters
- half-years

In Tagetik, it is possible to create up to 99 periods.

Period length

It is not possible to define aggregation structures in the period dimension. However, it is possible to define reports that aggregate data in quarters or four-month periods using the 'period length' attribute. To do this, it is necessary to set a "monthly" period length. The report displays the monthly data calculated based on the cumulative figures present in the database.

***IMPORTANT**: 'period length' is not a mandatory attribute. If this is not specified, 'LUN_0' - cumulative in the CPM and 'LUN_1'- Monthly in the Analytical Workspace will be set by default.*

Example of how 'period length' may be used

In this example, it is necessary to insert monthly data:

Quarter	Months	Value
Q1	January-March	€ 100
Q2	April-June	€ 150
Q3	July-September	€ 250
Q4	October-December	€ 300

The user may calculate and manually insert cumulative data.

Month	Four months	Cumulative value calculated
March	Q1	€ 100
June	Q1+Q2	€ 250
September	Q1+Q2+Q3	€ 500
December	Q1+Q2+Q3+Q4	€ 800

However, this method is liable to calculation errors or data entry errors.

Alternatively, it is therefore possible to use the 'LUN 3 - Quarter' period length attribute. This allows you to insert quarterly data and the system will automatically calculate the cumulative figures.

Period length values

Please find below the period length values that may be used. The period *n* indicates the period defined as a filter in the template.

Length	Description	Notes
LUN_0 cumulative	Default value in the CPM. The system does not carry out any calculation and the amount shown coincides with the amount in the database. In the Analytical Workspace (AW), the cumulative data are calculated by taking into account the figures from the end of the previous period to the current period.	In both the CPM and Analytical Workspace (AW) multidimensional matrices, the cumulative data are calculated by taking into account the figures from the end of the previous period to the current period.
LUN_1 Monthly	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-1.	Used for scenarios whose open periods are from 01 to 12.
LUN_2 Bimonthly	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-2.	Used for scenarios whose open periods are 02, 04, 06, 08, 09 and 12.
LUN_3 Quarterly	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-3.	Used for scenarios whose open periods are from 03, 06, 09 and 12.
LUN_4 Every four months	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-4.	Used when weeks are managed as part of the periods.
LUN_5 Every five months	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-5.	Used when weeks are managed as part of the periods.
LUN_6 Half-yearly	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-6.	Used for scenarios whose open periods are 06 and 12.
LUN_12 Annual	The cumulative data are calculated taking into account the amount of period *n* and the amount of period *n*-12.	Used for scenarios that only have period 12.
LUN_QTD Quarter to date	cumulative data are calculated from the end of the previous quarter to the current period.	-
LUN_STD Semester to date	The cumulative data are calculated from the end of the previous half-year period to the current period.	-
LUN_LYD Life to date	The cumulative data are calculated from minus infinity to the current period.	Useful for multi-year projects.

Relationship between periods and scenarios

To create the Tagetik time dimension, a period must be related to a scenario. For example, if the 2018 tax year is subdivided into 12 periods, the scenario 2018ACT / Period 01 may indicate the first period of the final figures for the 2018 tax year, the scenario 2018ACT / Period 02 may indicate the second period and so on.

How to work with periods

Concept Information
The dimensions of CCH Tagetik 81
The Scenario: basic concepts 133

How to create a period

Dimensions > Period > List

1. In the period list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new period and define its characteristics, then click **Save**: the period will be listed in the data table.

How to relate a period to a specific scenario

Dimensions > Period > List

1. In the scenarios list, select the scenario to which a period needs to be added, then click ⋮ > **Periods**: the window will open containing the period list for the selected scenario.
2. In the period list, click ⊕: an empty row will be added.
3. In **Period**, select an existing period from the period list that has not yet been related to this scenario.
4. In the **Attributes** tab, select the code for the new period from those present in the list that have not yet been related to the scenario, and define the relative characteristics, then click **Save**: the period will be listed in the period list for the scenario.


Period list page

Dimensions > Period > List

Purpose of the page

This page allows you to view and create periods, which can then be used in the various scenarios.

What it looks like

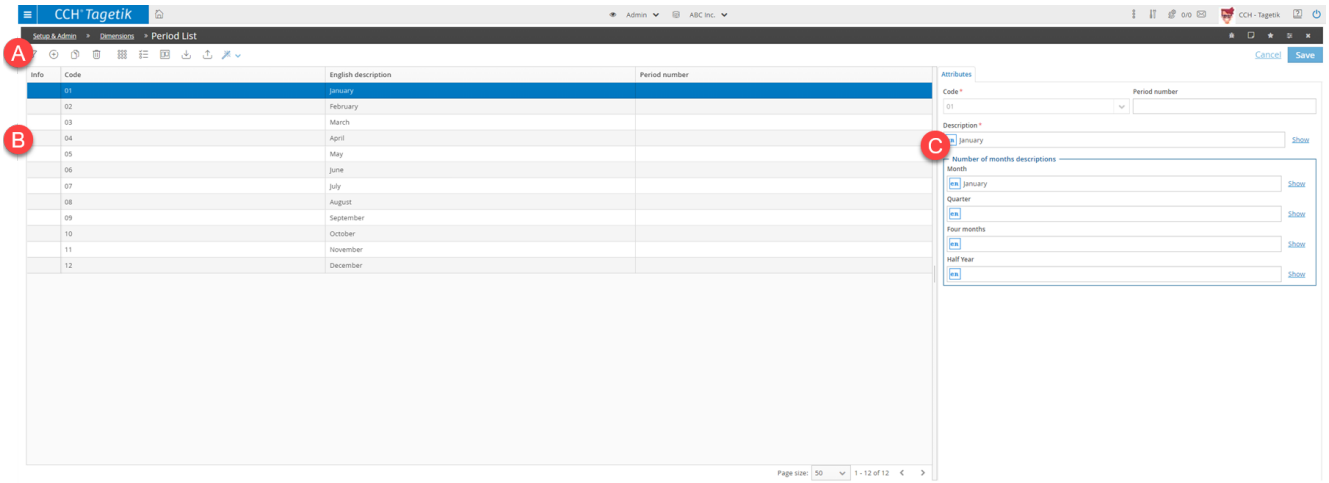

Element	Description
A	Tool bar
B	Period list
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new period.
	This duplicates a period with the same characteristics as the one selected, with the exception of the code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table, and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows any ancillary functions.

Period list

Dimensions > Period > List

Attributes tab

Please find below the most important fields.

Field	Description
Period number	Free label used to identify the period.
Number of months descriptions	Descriptions used in the reports if data are displayed on a monthly, quarterly or other basis

Dimensions: Scenario

Contents

This section covers the following topics:

The Scenario: basic concepts 133
Original scenario 134
Consolidation scenario 136
How to work with scenarios 137
Scenarios list page 138
Scenarios list 139
Scenario periods page 140
List of scenario periods 141
Snapshot scenarios page 141
Snapshot scenarios 142

The Scenario: basic concepts

Definition

Together with the period, the scenario represents the Tagetik time dimension. This also allows you to define the version of the data.

Scenario types

There are three types of scenario:

- original scenario
- consolidation scenario
- snapshot scenario

Original scenario

This scenario is used for data entry: amounts, consolidation journals and entity journals. This allows you to manage the tax year and the version of the data. Please find below some examples of original scenarios:

- 2018ACT, actual data for the 2018 tax year
- 2018BDG, budget data for the 2018 tax year
- 2018F6, forecast data for the 2018 tax year, after the month of June is closed.

An original scenario may be related to and may feed one or more consolidation scenarios.

Consolidation scenario

This scenario allows you to define the entities in the scope of consolidation: holding company, companies to be consolidated, currency and consolidation method, original scenario from which to read the data etc. A consolidation scenario is always linked to one - and only one - original scenario, and it stores consolidated data that cannot be edited manually. If the same original scenario is linked to several consolidation scenarios, the same data may be processed differently as long as the different consolidation perimeters and rules are respected. For example, based on the original data for 2018 for companies A, B, C and D, it is possible to create the following consolidation scenarios:

- two different consolidation scenarios, one for companies A and B and one for companies C and D
- hypothesizing that company A owns 70% of company B and 40% of company C, and that company B owns 30% of company C and 40% of company D, it is possible to create two consolidation scenarios. One for company B's consolidation, in which company C is consolidated using the equity method, and one for company A's consolidation, in which company C is consolidated using the line-by-line method.

Snapshot scenario

This scenario allows you to take a snapshot of data before making any changes. For example, when it is useful to keep different versions of a budget in place before deciding upon the final one.

Snapshot scenarios are particularly useful for data processing linked to financial planning.

Scenario groupings

Tagetik allows you to create groupings of scenarios based on different criteria, for example based on the version of the data (actual, budget, forecast), on the type of scenario (consolidation, original) or on the sub-holdings; this simplifies the selection process during the reporting phase.

Tagetik has a default aggregation structure ($) and two default nodes:

- $ORIGINAL, related to each new original scenario by default
- $CONSOLIDATION, related to each new consolidation scenario by default.

The grouping structure may be customised, indicating the nodes to which each new original scenario will be related by default, and the nodes to which each new consolidation scenario will be related by default.


The scenario grouping nodes are used:

- during the reporting phase
- to simplify the management of user rights for the scenario dimension
- to simplify the selection of a group's scenarios.

However, data are never saved on the nodes. All data (amounts, adjustments, etc.) are saved on the individual scenarios.

Example of a grouping of scenarios

The following scenarios have been defined: 2017BDG, 2018BDG, 2017ACT and 2018ACT. These may be grouped in two ways: based on the year or based on the version of the data. The two classification types may co-exist within the same grouping.

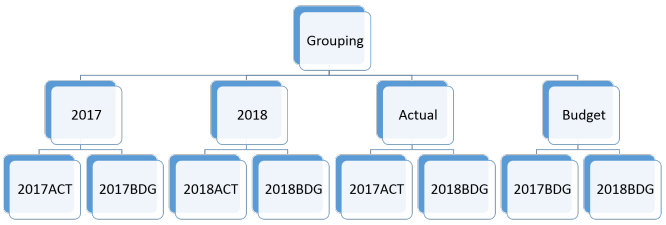

Original scenario

Characteristics of a scenario

The original scenario is used to insert data such as amounts, journals and consolidation data. Data may be inserted manually or automatically with massive data entry functions. Each scenario is identified by the following characteristics:


- code
- description
- type
- previous and next scenario

It is fundamental to indicate the previous and next scenario in order to link the various reporting periods and to allow for carrying forward over two reporting periods.

Certain scenarios may be made inactive. This allows you to record and store a lot of data, but to only view and select the original scenarios containing the data of most interest.


Several consolidation scenarios and snapshots may be related to an original scenario.

Example of an original scenario linked to more than one consolidation scenario

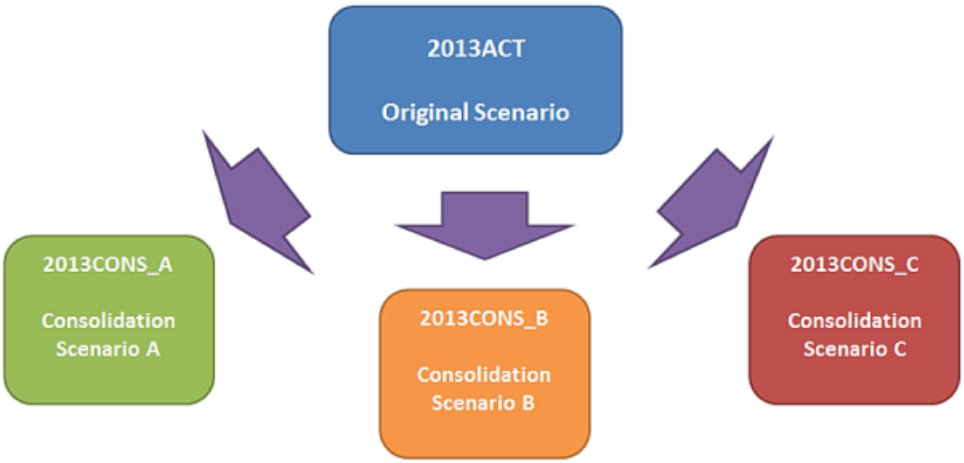

This example shows how a scenario containing original data for 2013 can be used to create various consolidation scenarios:

- several sub-consolidations
- two consolidation scenarios, one consolidating 10 companies and another consolidating 100 companies
- if company A owns 70% of company B and 40% of company E, and company B owns 30% of company E and 40% of company F, it is possible to create two consolidation scenarios, one for company B's consolidation, in which company E is consolidated using the equity method, and another for company A's consolidation, in which company E is consolidated using the line-by-line method.

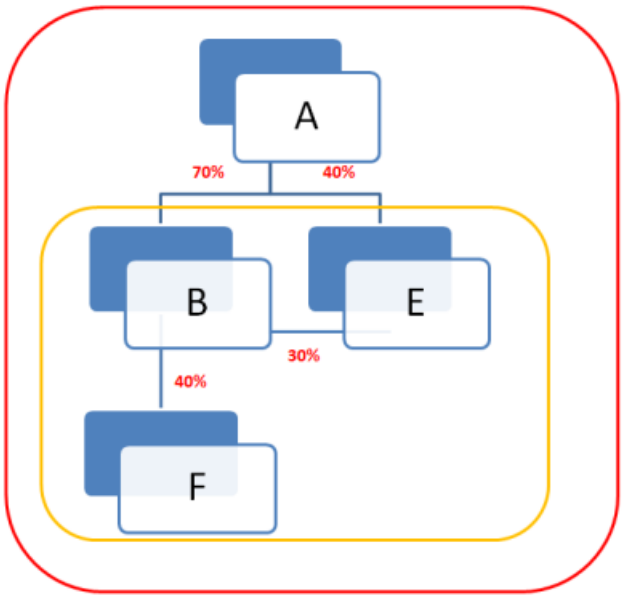

Correlations between scenarios

Correlations may be created between original scenarios in order to achieve different results:

- To compare data in current, previous and following scenarios, according to a time-based logic.
- To compare budget data or forecasts against actual data, for example during the reporting phase. These correlations are known as "reference scenarios"; up to five reference scenarios are permitted.

For reporting purposes, it is possible to give each original scenario the following attributes:

- year, i.e. the tax period to which the scenario refers
- version, i.e. the version of the data to which the original scenario refers

Original scenario periods

The Tagetik time dimension is always made up of the combination of the two physical 'scenario' and 'period' dimensions. In order to insert data, it is therefore necessary to relate at least one period to an original scenario. For example, in order to collect budget data for 2018, it is necessary to specify a specific period of interest, whether that be 2018BDG 03, or 2018BDG 06, or 2018BDG 09.

When a new scenario is created, it is sufficient to define what kind of 'number of months' set-up is required (monthly, quarterly, annual, etc.) and the start date; using the wizard, the necessary periods will then be created and related automatically.

Period characteristics

Each period of an original scenario is identified by the following characteristics:

- a code, which must be an existing value in the period table
- a description, which is filled in automatically but can be changed afterwards
- a start date
- an end date

An original scenario period may be given the following statuses:

- **Locked**. In this case, it cannot be modified by adding new data. This status is useful to control the moment when it becomes possible to begin inserting data.
- **Filled**. In this case, it is possible to exclude data belonging to a particular scenario/period from the reports. This status may be useful to hide periodic data for the periods created but for which data have still not been collected, or to reduce the list of scenarios that may be selected and to simplify operations.

Consolidation scenario

Characteristics

A consolidation scenario has the following attributes:

- the original scenario that feeds the consolidation scenario, i.e. the scenario containing the data that will be processed during the consolidation process
- the holding
- the currency in which the consolidation must be generated This does not necessarily have to be the currency of the holding and, in this case, the holding is also subject to the consolidation process.
- any filter on the categories that feed the consolidation. This filter is defined through a node of the category grouping.
- any filter on the accounts that feed the consolidation
- any reference scenario for FX rates, otherwise the same FX rate will be applied as for the original scenario
- a prefix to create the journal number in the financial investment reclassification journals.

Consolidation scenario periods

To define a consolidation scenario period, it is sufficient to select one of the periods of the original scenario that feeds it. Tagetik automatically gives the following attributes to the new period:

- start and end date, equal to those of the original scenario period
- a description, which is filled in automatically but can be changed afterwards
- a process, equal to the one of the original scenario period
- a period length, to define the previous reference period

The period length is useful to carry out the following actions:

- to convert at the period average FX rate
- to retrieve the previous period for deconsolidation operations from the previous period.

A consolidation scenario period may be given **Locked** status. This means that it cannot be processed or edited.

How to work with scenarios

Concept Information

The dimensions of CCH Tagetik 81
Periods: basic concepts 129
The Scenario: basic concepts 133

How to create a scenario

Dimensions > Scenario > List

1. In the period list, click : an empty row will be added.
2. In the **Attributes** tab, insert the code for the new scenario and define its characteristics.
3. In the **Relationships** tab, the new scenario is automatically related to a default node ($). If necessary, replace this node or add others.
4. Set all the characteristics for the scenario, then click **Save**: the scenario will now be listed in the elements table.

How to create an original scenario from an existing scenario

Dimensions > Scenario > List

1. In the scenarios list, click > **Add scenarios from existing**: a window will open allowing you to select the scenario to be used as a model.
2. Select a reference year and a model scenario.
3. Select the years for which the new scenarios need to be created, then click **OK**: a new original scenario will be created with the same number of periods as the source original scenario. The start and end date for each period depend on the new tax year.

How to relate a period to a specific scenario

Dimensions > Period > List

1. In the scenarios list, select the scenario to which a period needs to be added, then click > **Periods**: the window will open containing the period list for the selected scenario.
2. In the period list, click : an empty row will be added.
3. In **Period**, select an existing period from the period list that has not yet been related to this scenario.
4. In the **Attributes** tab, select the code for the new period from those present in the list that have not yet been related to the scenario, and define the relative characteristics, then click **Save**: the period will be listed in the period list for the scenario.

How to create a scenario snapshot

Dimensions > Scenario > List

1. In the scenarios list, select the scenario for which a snapshot scenario needs to be created, then click > **Snapshot**: the window will open allowing you to create the snapshot.
2. In **Version number**, assign a number to the snapshot.
3. In **Snapshot scenario**, insert the code of the snapshot scenario.

***IMPORTANT**: The original scenario selected must be enabled.*

How to recode a scenario

Dimensions > Scenario > List

1. In the scenarios list, select the scenario whose code needs to be changed.
2. Select > **Recode original scenarios**/**Recode consolidation scenarios**: the recode page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.

5. Under **New Code**, insert the new code to be assigned to the scenario.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to create scenario groupings

Dimensions > Scenario > Grouping

1. In the list of scenario groupings, select the point where the new grouping is to be inserted.
2. Click on ; a row will be added in the table for the new node.
3. In the **Attributes** tab, define the characteristics of the grouping, and then click **Save**.

How to add scenarios to a grouping

Dimensions > Scenario > Grouping

1. In the list of scenario groupings, select the desired grouping and open it.
2. Select the point where the scenario needs to be inserted.
3. Click ; a row will be added in the table for the new scenario.
4. In the **Attributes** tab, define the characteristics of the scenario.
5. In the **Relationships** tab, define the relationship with any other nodes, then click **Save**.


Scenarios list page

Dimensions > Scenario > List

Purpose of the page

This page allows you to view and create original and consolidation scenarios. It also allows you to manage the subdivision into periods for each scenario, and to define the relative duration.

What it looks like

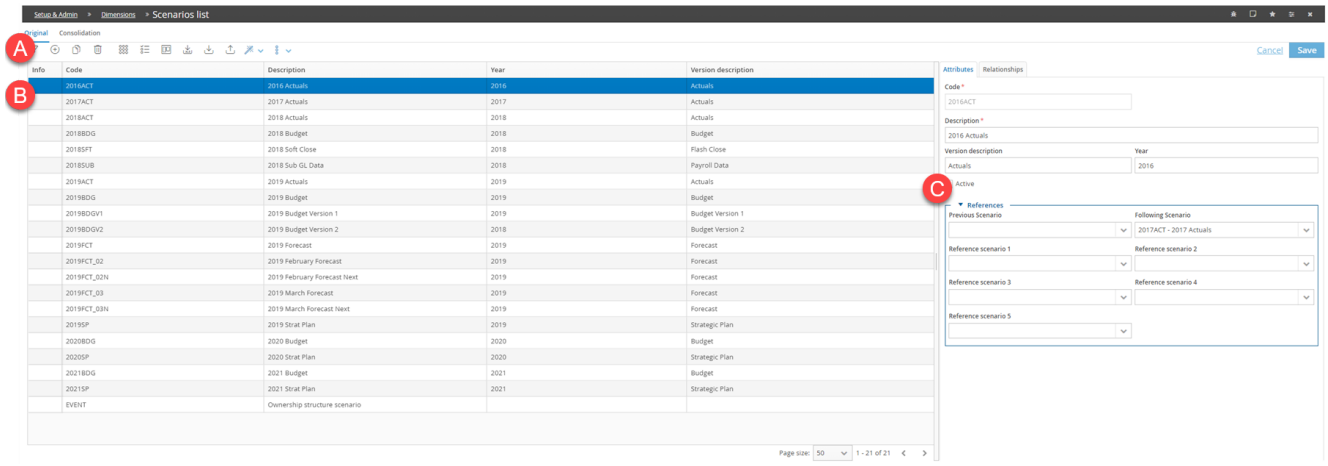

Element	Description
A	Tool bar
B	Scenarios list
C	Configuration tab

Actions on this page

Element	Description
Original	This displays the list of original scenarios.
Consolidation	This displays the list of consolidation scenarios.
	This filters the data shown on the page.
	This adds a row in order to insert a new scenario.
	This duplicates a scenario with the same characteristics as the one selected, with the exception of the code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows different ancillary functions. **Recode original scenarios**: this modifies the code related to an original scenario. **Add scenarios from existing**: this creates an original scenario using an existing one as a model.
	Periods: this allows you to manage the periods related to each scenario. **Snapshot**: this allows you to manage the snapshot scenarios created for the original scenarios.

Scenarios list

Dimensions > Scenario > List

Attributes tab

This tab allows you to define the attributes of a scenario. These may vary depending on whether it is an original scenario or a consolidation scenario.

Please find below the most important fields.

Field	Description	Scenario type
Version description	Scenario version. Information used in the reporting phase.	All
Year	The year to which the scenario refers. Information used in the reporting phase.	All
Enabled	This allows you to view the scenario in the selection lists on the various pages.	All
References		
Previous scenario	The scenario used to complete carry forwards and to compare data from the current scenario.	All
Following scenario	The scenario used to compare data from the current scenario.	All

Field	Description	Scenario type
Reference scenario <n>	Scenarios that are useful for comparisons during the reporting phase.	All
Consolidation settings		
Original scenario	The scenario that feeds the consolidation scenario	Consolidation
Holding	The holding company in the consolidation	Consolidation
Currency	The currency used for the consolidation	Consolidation
Exceptions		
Category filter	Category grouping node to be used to filter the data that feed the scenario	Consolidation
Account filter	Account hierarchy node to be used to filter the data that feed the scenario.	Consolidation
Ref. FX rate scenario	This allows you to use an original scenario to read FX rates that is different from the scenario that you are using for the consolidation.	Consolidation
Prefix for FI reclass. journals	The prefix for the journals generated by the reclassification of financial investments.	Consolidation

Scenario Relationships **tab**

This tab allows you to create relationships between scenarios and the dedicated hierarchies.

Field	Description
Node	Node within the specific hierarchy to which the scenario may be related


Scenario periods page

Dimensions > Scenario > List > choose scenario > ⋮ > Periods

Purpose of the page

This page allows you to define the periods related to a scenario.

What it looks like

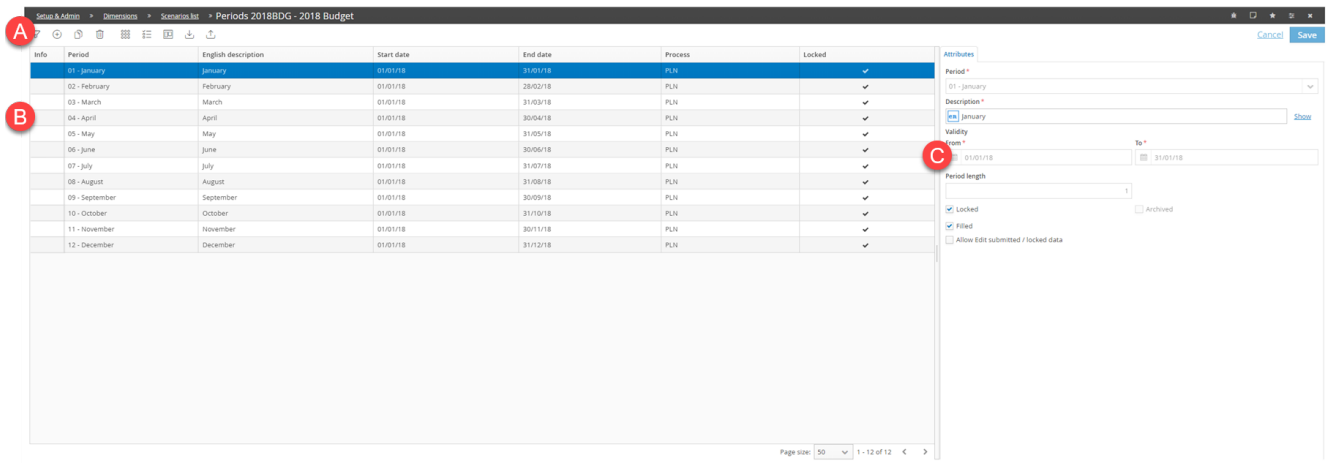

Element	Description
A	Tool bar
B	List of periods for the selected scenario
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new period.
	This duplicates a period with the same characteristics as the one selected, with the exception of the code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

List of scenario periods

Dimensions > Scenario > List > choose scenario > ⋮ > Periods

Attributes tab

Please find below the most important fields.

Field	Description
Validity	Only for original scenarios. Time interval within which the period is valid.
Period length	This allows aggregated data to be displayed based on methods other than the 'cumulative' method.
Locked	It is not possible to insert other data for the period.
Archived	This identifies the data from the period as archived.
Filled	This enables data from the period to be viewed in the reports.
Allow editing of submitted/locked data	This allows data that have already been submitted or locked in the period to be edited.


Snapshot scenarios page

Dimensions > Scenario > List > choose a scenario > ⋮ > Snapshot

Purpose of the page

This page allows you to create snapshot scenarios for specific original scenarios.

What it looks like

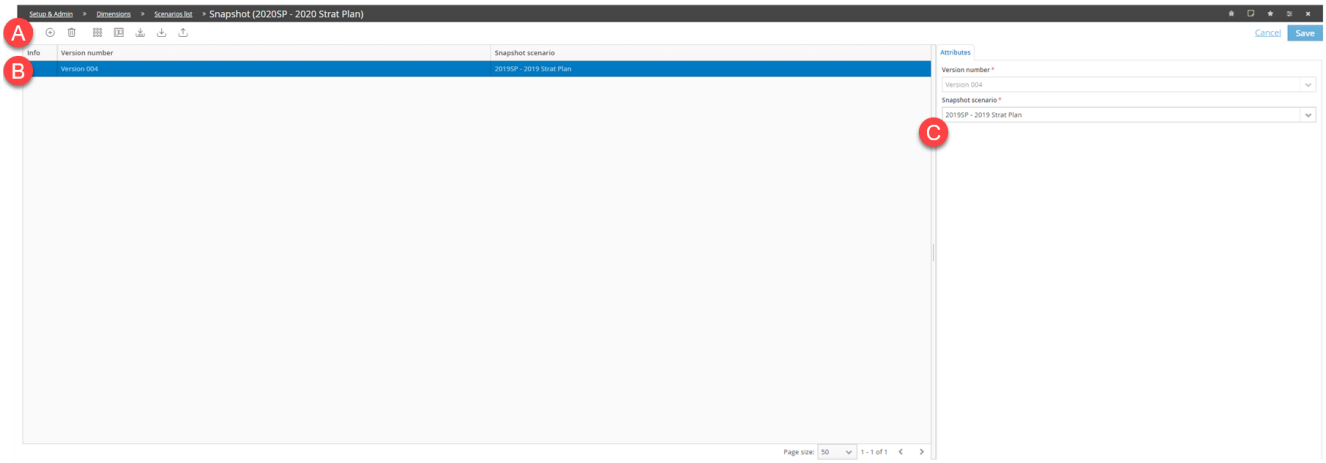

Element	Description
A	Tool bar
B	List of snapshot scenarios
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new snapshot scenario.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
XLS	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

Snapshot scenarios

Dimensions > Scenario > Element list > choose a scenario > ⋮ > Snapshot

Attributes tab

Field	Description
Version number	Snapshot scenario number. Unique identifier of one of the n versions managed for the same original scenario. A maximum of 999 versions can be managed
Snapshot scenario	Original scenario, previously created in the scenarios list, on which the snapshot is performed. The snapshot scenario must have the same number of periods as the original scenario.

Dimensions: Category

Contents

This section covers the following topics:

Category: basic concepts 143
How to work with categories 145
Categories list page 146
Categories list 147
Journal models page 148

Category: basic concepts

Definition

The category is the dimension that allows data, especially journals, to be classified and segmented. It also allows you to keep track of the way in which data are generated. In fact, classifying the data into different categories allows you to:

- treat them differently during processing
- view them separately in the forms.

Classification by data source

A given amount may be the result of several operations; each operation can be classified with a category. This allows you to analyse the figures separately in order to understand where to intervene.

Category types

Category	Description
Amount	This identifies the original data, gross amounts and intercompany entries. Generally speaking, only one amount category is necessary, but it is possible to create more in the following cases: • when it is necessary to manage adjustments as amounts and therefore to be able to modify them from the forms • when it is necessary to store data coming from different information systems, for example, the general ledger, analytical accounts, etc.
Company journals	This identifies the journals that describe changes to the original data for each company. By default, this has the same currency as the company for which it has been inserted; in a consolidation process, it is used to align the financial statements to the holding company's accounting standards.
Consolidation journals	This identifies the manual and automatic consolidation journals. This allows for the evolution of each figure to be analysed, from the original figure to the consolidated figure. The more complex the consolidation process, the more useful it is to segment the data. In this case, it is useful to create several categories of this type.
Consolidator amount	This classifies the original data, gross amounts and intercompany entries, by consolidator.
Consolidator Company Journals	This classifies the entity journals, i.e. the journals with the changes to the general data of the company, by consolidator.

Journal example for statutory consolidation

For statutory consolidation purposes, it may be useful to create the following consolidation journals:

- Elimination of dividends
- Revaluations/write-downs of financial investments
- Elimination of financial investments
- Equity valuation
- Equity reclassification
- Intercompany eliminations
- Minorities calculation

Category groupings

Categories can also be grouped together in order to better organise and analyse the data. For example, data can be grouped according to the type of processing (minorities, equity reclassification, equity), or by the type of figures to be shown (adjusted, aggregated, consolidable).

Default category aggregation structure


The default aggregation structure is indicated with the $ code, and contains three default nodes:

Node	Description
$AMOUNT	All new amount categories are related to this category by default.
$PRECO	All new company journal categories are related to this category by default.
$CONSO	All new consolidation journal categories are related to this category by default.

The grouping structure can be customised and it is possible to define the nodes to which each new category will be related by default.

Example of a category grouping

In this example, the default $AMOUNT category and two other categories allow for the classification of changes to the original data. Category R1 classifies the data based on the IFRS, while category R2 classifies it according to the national accounting standards. The categories can therefore be grouped based on two views: the “IFRS View” and the “Italian View”. These two classifications can coexist within the grouping.

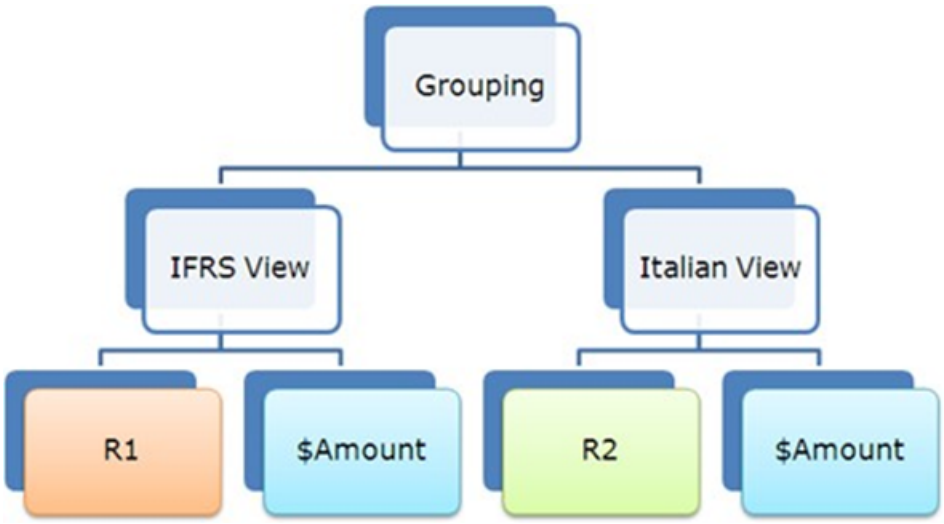

Journal models

It is possible to define a journal model for each ‘Company Journal’ and ‘Consolidation Journal’ category, i.e. a list of accounts that are normally contained in the journal. When these models are used when inserting the journal, the required accounts will open automatically.

How to work with categories

Concept Information

The dimensions of CCH Tagetik 81
Groupings 193

How to create a category

Dimensions > Category> List

1. In the categories list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new category and define the relative type.

   ***Note**: it is necessary to define different attributes depending on the type of category selected.*

3. In the **Relationships** tab, the new category is automatically related to a default node ($). If necessary, replace this node or update with others.
4. Set all the characteristics for the category, then click **Save**: the category will now be listed in the elements table.

How to inherit settings from another category

Dimensions > Category> List

1. In the category elements table, select the category to be defined and then click ⋮ > **Relate as similar category**: the relationship window will open.
2. In **Reference Category**, select the category from which to inherit the settings: all the "inheritable" characteristics for that category will be displayed.
3. Select the characteristics to be inherited, then click **Run**: the category selected in the elements table will inherit all the selected characteristics.

How to relate a category to a node in a hierarchy

Dimensions > Category> List

1. In the categories list, select one or more categories to be related to the same node.
2. In the **Relationships** tab, select the node with which to create the relationship, then click **Save**.

How to recode a node

Dimensions > Category > List > ✨ > Recode Nodes

1. In the categories list, select the category whose code needs to be changed.
2. Select ✨ > **Recode Nodes**: the **Recode Nodes** page will open.
3. Click ⊕: an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the node.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to recode an element

Dimensions > Category > List > > Recode Elements

1. In the categories list, select the category whose code needs to be changed.
2. Select > **Recode Elements**: the **Recode Elements** page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the element.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to define a journal model

Dimensions > Category> List

***Note**: only users with admin rights can carry out this procedure.*

1. In the categories list, select the 'Company Journal' and 'Consolidation Journal' category for which to create a model.
2. In the **Attributes** tab, under **Advanced**, click **Journal model definition**: the **Journal models** page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Account**, select an account to be inserted into the model, then set all the relative characteristics (e.g. cost centers).
5. To add other accounts to the model, repeat from step 3 onwards.
6. Click **Save** to save the model.


Categories list page

Dimensions > Category> List

Purpose of the page

This page allows you to view all the existing categories and to insert new ones.

What it looks like

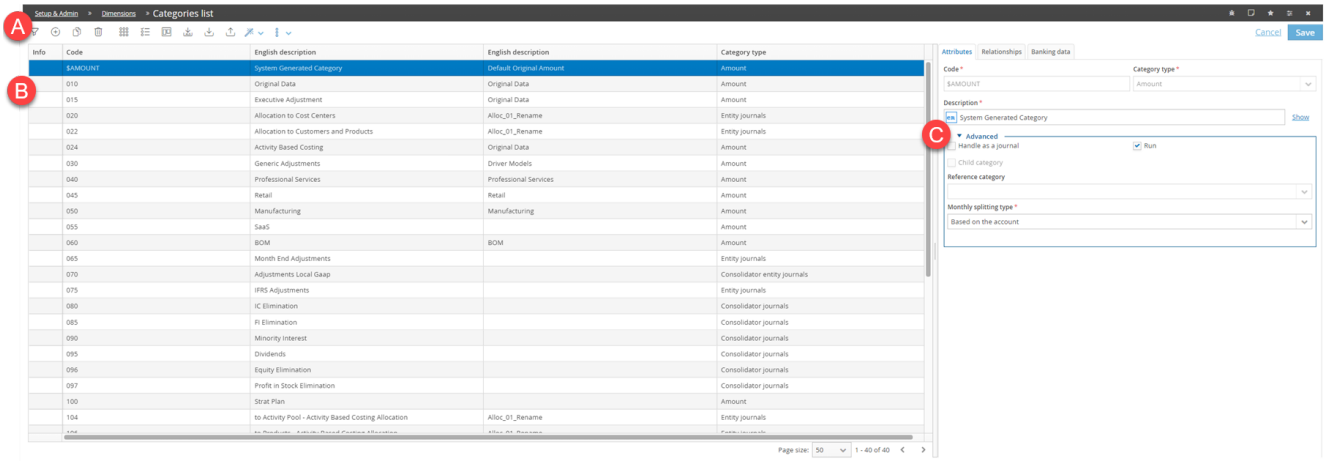

Element	Description
A	Tool bar
B	Categories list
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new category.
	This duplicates a category with the same characteristics as the one selected, with the exception of the code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows different ancillary functions. For example, it allows you to recode nodes and elements.
	Relate as similar category: this creates a new category, using a number of characteristics from an existing category.

Categories list

Dimensions > Category> List

Attributes tab

This tab allows you to define the attributes of a category. They may vary depending on the category.

Please find below the most important fields.

Field	Description	Category type
Default for manual journals		
Periodic journal	This specifies that the journal is periodic and not cumulative.	Only Company Journals
Enable carry-forward	This enables the carrying forward of journals for the year or the next scenario.	Only Company Journals
Exclude Reclassifications and ER	This indicates whether equity reclassification and account reclassification must be carried out for the category.	Only Company Journals
Tax calculation method	This specifies how deferred taxes are calculated.	Only Company Journals
Reverse type	This indicates if and how a journal is reversed automatically by the system in the carry-forward step.	Only Company Journals
Consolidation		
Override CTP for segment set equal to Entity	In the consolidation journals, the counterparty entity segment with the same value as the entity is overridden.	Only Consolidation Journals
Proportional calculation method	This indicates how to determine the proportional calculation percentage.	Only Consolidation Journals
Equity valuation method	This defines what the system should do during the equity valuation step where there is an investee company.	Only Consolidation Journals
Minorities calculation method	This defines how to calculate the minorities.	Only Consolidation Journals
Minorities calculation on <Entity>	This defines how to calculate the minorities for company 1 and company 2 in a relationship.	Only Consolidation Journals
Advanced		
Handle as a journal	The category is handled like a journal category for the calculation of formulas.	Amount only
To run	Data processing is run on the category.	All
Child category	For this category, diagnostics and data processing are carried out together with another reference category.	All
Reference category	Reference category for the child category used to carry out diagnostics and data processing.	All
Monthly splitting type	Method used to process the data.	All
Journal model definition	This allows for a journal model to be created. : a journal model already exists for the category.	Only Consolidation Journals and Company Journals

Relationships tab

This tab allows you to create relationships between categories using groupings.

Field	Description
Nodes	Nodes to which the category is to be related

Banking data tab

This tab allows you to set the characteristics of the data collected for banking supervision purposes.

Field	Description
Notify on individual data	The category is included in the reporting of individual data.
Notify on 36381	The category is included in the reporting of item 36381.
Notify on other intragroup items	The category is included in the reporting of other intragroup items.


Journal models page

Dimensions > Category> List> Attributes > Journal models

Purpose of the page

This page allows you to create journal models by selecting all the accounts to be inserted therein.

What it looks like

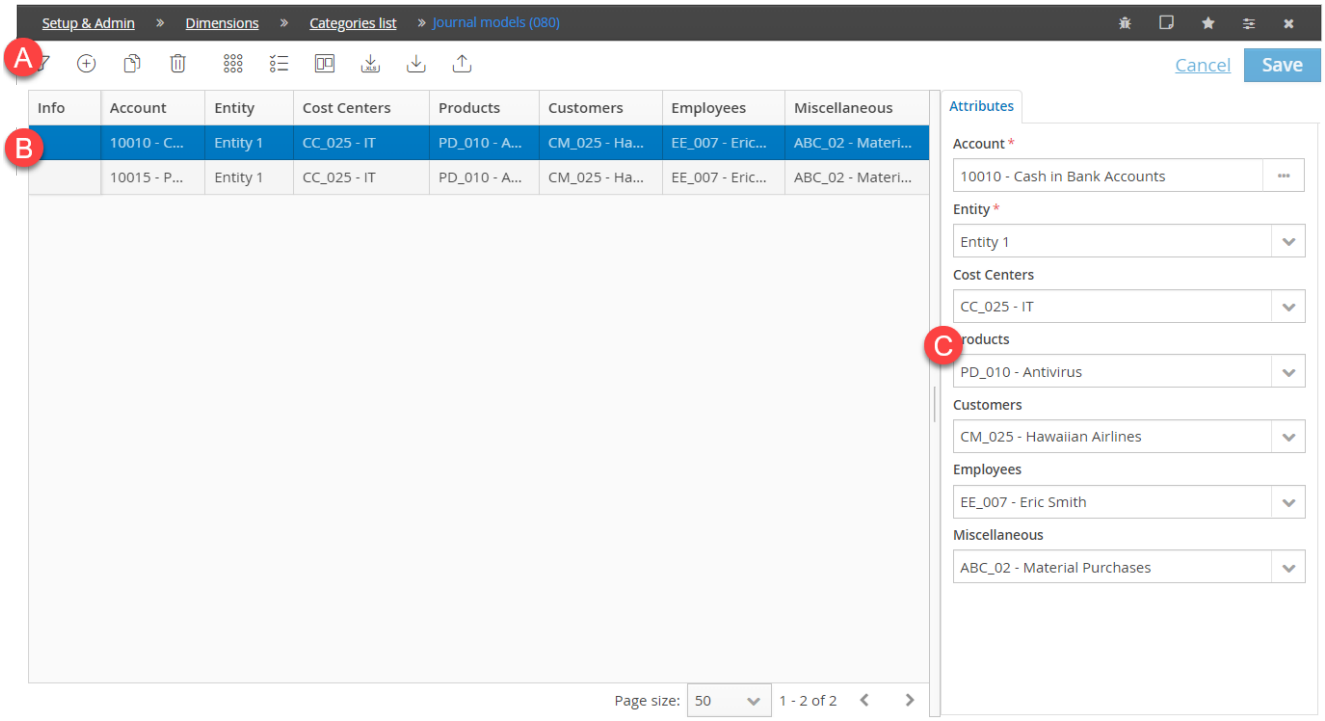

Element	Description
A	Tool bar
B	List of accounts included in the journal
C	Configuration tab for the attributes of the account included in the journal

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert an account inside the model.
	This duplicates the selected row with the same attributes, with the exception of the account code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

Dimensions: Currency

Contents

This section covers the following topics:

Currencies: basic concepts 150
How to work with currencies 151
Currencies list page 151
Currencies list 153

Currencies: basic concepts

Definition

The currency is the national currency used to execute the transactions and draw up the financial statements.

Currency types

Tagetik is a multi-currency system that can manage amounts with different types of currency.

Type	Description
Transaction currency	This is the currency in which the transaction is executed. It may be different from the currency of the company that executed the transaction.
Company currency	This is the currency used by the company to draw up and publish its financial statements.
Consolidation currency	This is the currency used to produce the consolidated financial statements. This normally coincides with the holding's company currency.

Company and transaction currencies are used to insert financial statement amounts, intercompany journals or adjustments. The consolidation currency, on the other hand, is used to convert all the amounts from their original currency during the consolidation process.

Each data item thus always has two amounts:

- Transaction/company amount for the original data
- Company/consolidation amount for the consolidation data.

FX rate types

Different types of FX rates may be managed for each currency.

FX rate type	Description
Final FX rate	Year-end FX rates, used for the balance sheet accounts, excluding the equity accounts, which are normally converted at the historical FX rate.
Average FX rate	These FX rates are normally used for the P&L accounts.
Period average FX rate	A different FX rate for each period of the year. This ensures more precise conversions compared with the average FX rate.

Currency conversion method

To convert an amount from currency A to currency B, the system divides the amount by the FX rate for currency A and multiplies the result by the FX rate for currency B.

Preferred currency

The 'preferred currency' has the following functions:

- it is the default currency used to display data in the IC matching cockpit
- it is the currency in relation to which FX rates are inserted.

Reference currency

Using a 'reference currency' allows you to manage data with different units of measurement (for example, thousands and millions) or with a different number of decimal placess, creating 'derived' currencies. The derived currencies are all based on a shared reference currency. To calculate the derived currencies, multiply the FX rate of the reference currency by the reference coefficient.

How to work with currencies

Concept Information

The dimensions of CCH Tagetik 81

How to create a currency

Dimensions > Currency > List

1. In the Currencies list, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert the code for the new currency and define its characteristics, then click **Save**: the currency will be listed in the data table.

How to recode a currency

Dimensions > Currency > List

1. In the Currencies list, select ✨ > **Recode**: the **Recode - Currency dimension** page will open.
2. Click ⊕: an empty row will be added.
3. In the **Attributes** tab, under **Code**, select the code to be replaced.
4. Under **New Code**, insert the new code to be assigned to the scenario.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

5. Select **Primary** if the code inserted must prevail in case of any conflict.
6. Click **Save** to save the new code.
7. Repeat from step 3 in order to change other codes.
8. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*


Currencies list page

Dimensions > Currency > List

Purpose of the page

This page allows you to view all the currencies used by Tagetik and to insert new ones.

What it looks like

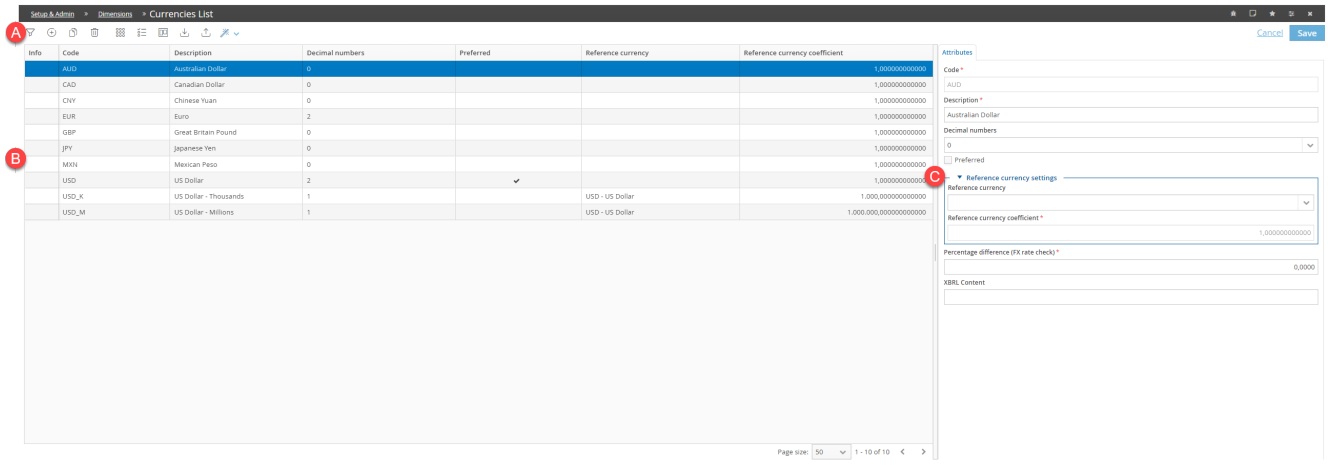

Element	Description
A	Tool bar
B	Currencies list
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new currency.
	This duplicates a currency with the same characteristics as the one selected, with the exception of the code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows any ancillary functions. **Recode**: this changes the code related to a currency.

Currencies list

Dimensions > Currency > List

Attributes tab

Please find below the most important fields.

Field	Description
Decimals	Number of decimals permitted for data entry
Preferred	The currency is indicated as the preferred currency. Only one currency can be set as 'preferred'.
Alternative codes	
Alternative code <n>	Another code that may identify the currency
Reference currency settings	
Reference currency	The currency to use in order to manage data expressed in a different way (e.g. different units of measurement, or a different number of decimal places)
Coeff. Reference currency	Transformation coefficient to convert from the currency indicated to the reference currency
Percentage difference (FX rate check)	Percentage used in diagnostics to check that the FX difference between the amount in the document currency and the amount in the financial statement currency does not exceed a certain percentage
XBRL Content	Value to assign to the measure sub-element in order to specify the unit of measurement used for the value of a 'monetary' item in the creation of an XBRL instance template

Analytical Dimensions

Contents

This section covers the following topics:

Analytical Dimension Creation Page 154
Elements window of Analytical Dimension 155

Analytical Dimension Creation Page


Setup & Admin > dimensions > new dimension > analytical dimension

Navigation Panel > Dimensions > New Dimension > Analytical Dimension

Purpose of the page

This window allows you to define, edit and delete the basic settings of an analytical dimension.

What it looks like

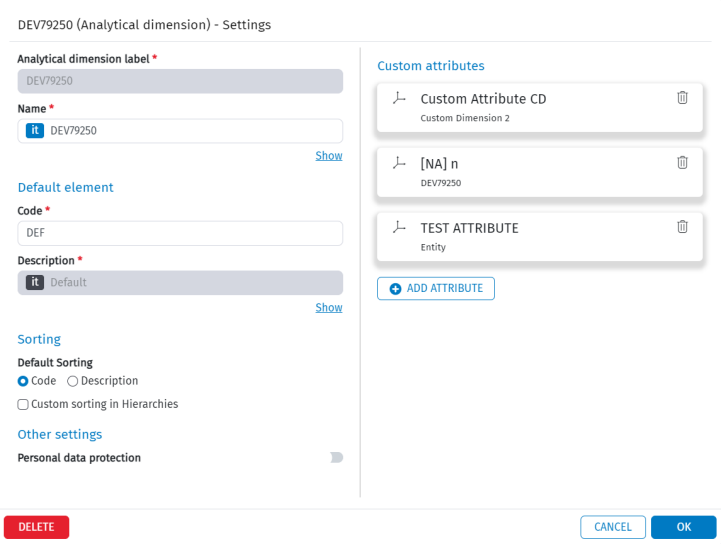

Field description

Please find below the most important fields.

Element	Items	Description
Analytical dimension label		Analytical dimension label assigned upon creation
First name		Name of the dimension, in each language enabled on the system
Default element	**Code**	Default element code, editable on this window
	Description	Name of the default element, in all available languages. Editable on the elements list page.

Element	Items	Description
Sorting	**Sorting by**	Page sorting type (Code and Description)
	Custom sorting in Hierarchies	Enables the Custom sorting in Hierarchies
Other Settings	**Personal data protection**	Enables protection for personal data, which will be encrypted (see personal data protection)
Custom attributes	**Add Attribute**	Allows the creation of a Custom Dimension Attribute. The 'Recycle bin' button removes the connection of the attributes to the dimension.

Elements window of Analytical Dimension


Setup & Admin > dimensions > {analytical dimension} > list

Navbar > dimensions > {analytical dimension} > list

Purpose of the page

This page allows you to add and manage the elements of an analytical dimension.

What it looks like

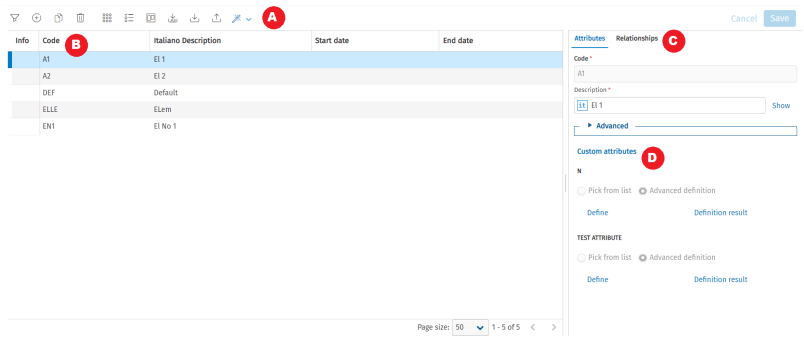

Element	Description
A	Tool bar
B	Dimensions elements table
C	Configuration tab
D	Custom fields

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to relate a company to a scenario and period combination.
	This duplicates the selected row with all the information inserted.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.

Element	Description
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows the following ancillary functions: • **Recode**: changes the code associated with a causal. • **Translator mod**: opens the page in translator mode

Section D fields

Please find below the most important fields.

Field	Description
Pick from list/Advanced Definition	Specifies how custom attributes are selected
Definition	Shows the attribute definition page
Definition Result	Show the result of the attribute definition

Custom Dimensions

Contents

This section includes fololwing topics:

Custom Dimension Creation Page 157
Custom dimensions list page 158

Custom Dimension Creation Page


Setup & Admin > dimensions > new dimension > custom dimension

Navigation Panel > Dimensions > New Dimension > Custom Dimension

Purpose of the page

This window allows you to create, edit and delete the basic settings of a custom dimension.

What it looks like

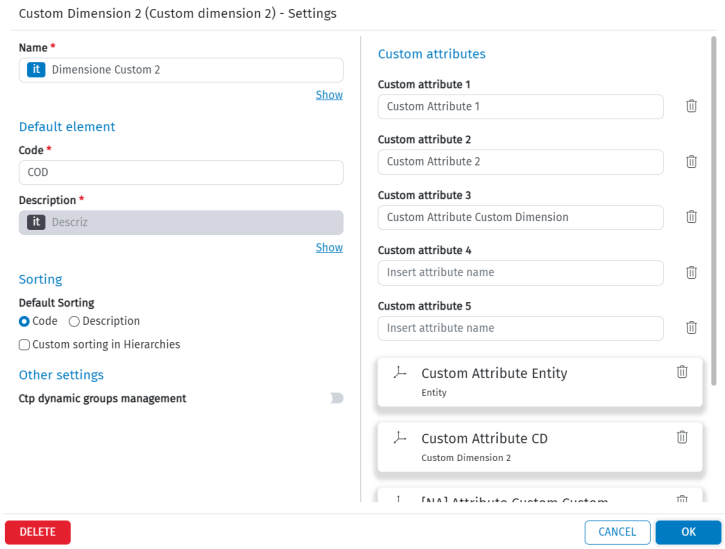

Element	Items	Description
First name		Name of the dimension, in each language enabled on the system
Default element	**Code**	Default element code, editable on this window
	Description	Name of the default element, in all available languages. Editable on the list page.
Sorting	**Sorting by**	Page sorting type (Code and Description)
	Custom sorting in Hierarchies	Enables the Custom sorting in Hierarchies
Other Settings	**CTP dynamic groups**	Enables the management of Ctp dynamic groups
Custom attributes	**Custom Attribute 1-5**	Inserts the description of a custom attribute, which will enable it in the elements list
	Add Attribute	Allows the creation of a Custom Dimension Attribute. The 'Recycle bin' button removes the connection of the attributes to the dimension.

In addition to these, during the creation phase, selecting one of the custom dimensions will display a brief explanation of its additional functions.

Custom dimensions list page


Setup and Admin > dimensions > {dimensione_custom} > elements list

Navigation panel > dimensions > {dimensione_custom} > elements list

Purpose of the page

This page allows you to add and manage elements of a custom dimension

What it looks like

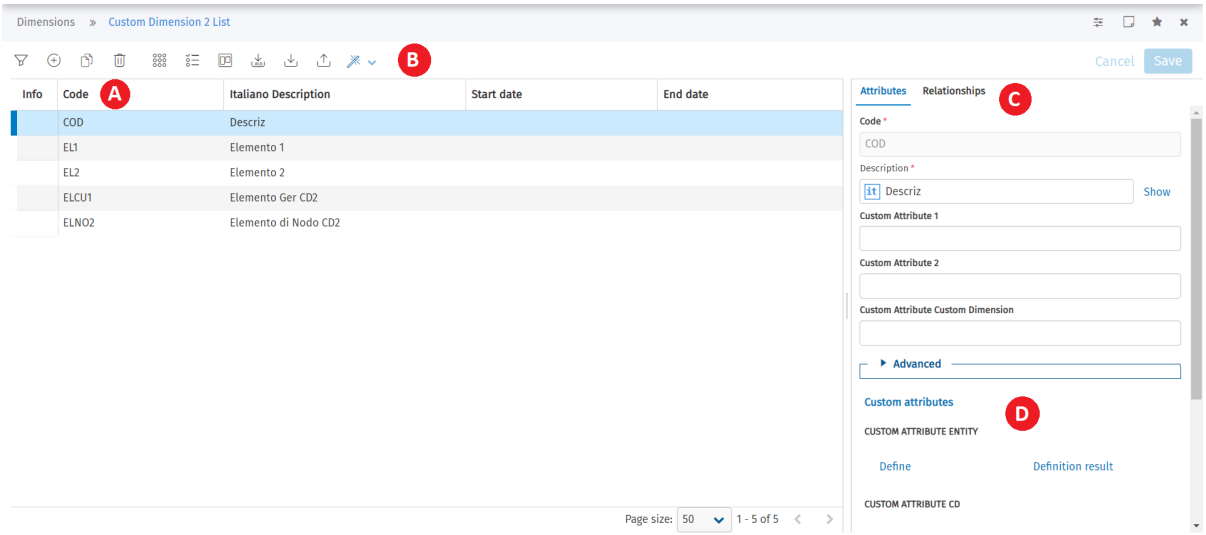

Element	Description
A	Dimension list
B	Tool bar
C	Configuration tab
D	Dimensional custom attributes fields

Actions on this page

Element	Description
	This filters the data displayed on the page.
	Adds a row in order to insert a new element.
	Duplicates an element with the same characteristics as the selected one, except for the code.
	Deletes the element contained in the selected row.
	Enables/Disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table, and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.

Element	Description
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows any ancillary functions. **Recode**: changes the code related to a variation/detail type. **Translator mode**: opens the page in translator mode

Attributes Tab: Advanced Section

Please find below the most important fields.

Validity	Description
From	Shows the **Validity start date** of the custom dimension element. Together with the 'End Date', it defines whether the element at issue can be used in a data collection process. If at least one Scenario/Period associated with the process falls within the validity time range of the element, the latter will be valid for the process at issue. **Note**: it is not necessary to define both the Start Date and the End Date (only one of the two may be specified).
A	Shows the **Validity end date** of elements of the Custom dimension. This information is used in the same context as the 'Start Date' field.

Dimensional custom attributes fields

Please find below the most important fields.

Field	Description
Define	Shows the attribute definition page
Definition results	Shows the attribute definition result

Variation/detail types

Contents

This section covers the following topics:

Variation/Detail types: basic concepts 160
How to work with variation/detail types 160
Variation/detail types list page 162
Variation/Detail types list 163

Variation/Detail types: basic concepts

Definition

Variation and Detail types classify the variation accounts and detail accounts, and also identify the type of variation in the variation accounts.

Var. - Det. types

Type	Description
Variation	This shows the variations over time for a normal account (e.g. initial balance, investments, etc.)
Detail	This shows a detail of a normal account (e.g. revenue breakdown by geographic area, product type, etc.)

The role of variation/detail types

The variation/detail types have the following roles:

- They simplify the set-up of the chart of accounts and the control groups. In fact, they allow for control groups to be automatically generated and updated; the control groups link a normal account with the variation accounts or detail accounts generated by the variation/detail types.
- They create data entry forms in a simple way and allow for reports to be generated based on the control group structure.

Var. - Det. types grouping

Variation/detail types can also be grouped together. For example, it is possible to create a node that groups the variation/detail types representing a variation of the financial investment variation accounts and another that groups those of the equity variations. These nodes are useful for a number of purposes:

- to generate reports including or excluding the nodes
- to select several variation/detail types included in the same grouping

How to work with variation/detail types

Concept Information

The dimensions of CCH Tagetik 81
Groupings 193

How to create a variation/detail type

Dimensions > Variation/Detail types > List

1. In the variation/detail types list, click : an empty row will be added.
2. In the **Attributes** tab, insert the code for the new variation/detail type and define all the relative characteristics, then click **Save**: the variation/detail type created will be listed in the data table.

How to recode a variation/detail type

Dimensions > Variation/Detail types > List

This procedure allows you to quickly modify the code attributed to one or more variation/detail types.

1. In the variation/detail types list, select > **Recode**: the **Recode - Var. - det. types** page will open.
2. Click : an empty row will be added.
3. In the **Attributes** tab, under **Code**, select the code to be replaced.
4. Under **New Code**, insert the new code to be assigned to the scenario.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

5. Select **Primary** if the code inserted must prevail in case of any conflict.
6. Click **Save** to save the new code.
7. Repeat from step 3 in order to change other codes.
8. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to relate variation/detail types to nodes

Dimensions > Variation/Detail types > List

1. In the variation/detail types list, select one or more variation/detail types to be related to the same node.
2. In the **Relationships** tab, select the node with which to create the relationship, then click **Save**.

How to create variation/detail type nodes

Dimensions > Variation/Detail types > Grouping

1. In the list of variation/detail type groupings, select the point where the node is to be inserted.
2. Click ; a row will be added in the table for the new node.
3. In the **Attributes** tab, define the characteristics of the node, respecting the following conditions:

If...	Then...
the node contains Detail accounts	do not include more than one element for which one of the following options is selected: • **Balancing** • **Calculated Amount**
the node contains Variation accounts	do not include more than one element for which one of the following options is selected: • **Balancing** • **Initial balance** • **Cancel** • **Calculated amount**

   ***IMPORTANT**: for fields with several options (e.g. **Merger** or **Modify %**), each option may only be used by a single variation. For example, the **Entry** option cannot be selected in the **Merger** field if, in another field, the **Entry/Exit** merger option has already been selected.*

4. Click **Save**.

How to add variation/detail types to a node

Dimensions > Variation/Detail types > Grouping

1. In the list of variation/detail type groupings, select the point where the variation/detail type is to be inserted.
2. Click and a row will be added in the table for the new variation/detail type.
3. In the **Attributes** tab, define the characteristics of the variation/detail type.
4. In the **Relationships** tab, define the relationship with any other nodes, then click **Save**.


Variation/detail types list page

Dimensions > Variation/Detail types > List

Purpose of the page

This page allows you to view all the existing variation/detail types and to insert new ones.

What it looks like

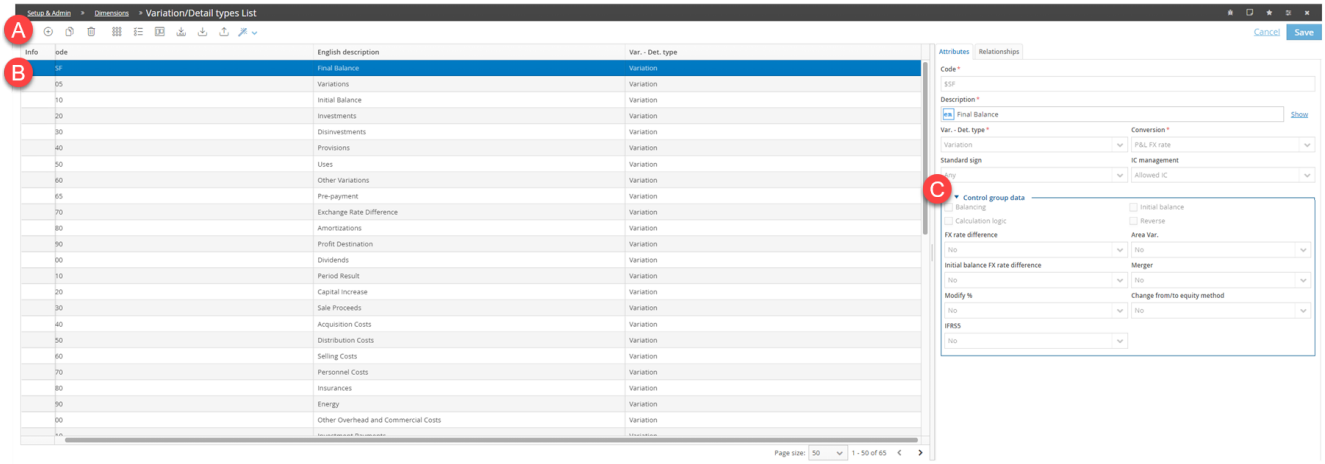

Element	Description
A	Tool bar
B	Variation/Detail types list
C	Configuration tab

Actions on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new category.
	This duplicates a category with the same characteristics as the one selected, with the exception of the code.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.

Element	Description
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows any ancillary functions. **Recode**: changes the code related to a variation/detail type.

Variation/Detail types list

Dimensions > Variation/Detail types > List

Attributes tab

Please find below the most important fields.

Field	Description	Values
Var. - Det. type	Var. - Det. type	**Detail**: detail of a normal account **Variation**: variation of a normal account
Conversion	FX rate to be applied when converting into the consolidation currency.	**P&L FX rate** : The P&L conversion method is defined in the conversion rule. It is possible to override, for the individual process, the settings of the default conversion rule and replace them with the chosen FX rate (average FX rate/period average FX rate/year-end FX rate). Used for the P&L, detail accounts and other variation accounts. **Average FX rate**: This converts the cumulative amounts to the average FX rate present in the FX rates table. **Period average FX rate**: This converts the amount for the period to the period average FX rate present in the FX rates table and then adds it to the converted data of the previous period. **Final FX rate**: This converts cumulative amounts to the final FX rate present in the FX rate table. Used for the balance sheet, detail accounts and 'other stock' accounts. Equity accounts are excluded, as these are normally converted at the historical FX rate. **Historical FX rate**: This stratifies the conversion based on the period FX rate. There is no FX rate numeric value. In order to obtain the final converted value, the system adds the converted variations to the initial balance, each based on the type of FX rate indicated in the relative table. Used for equity accounts. **Prev. P&L FX rate**: Applied to the reserve variations that receive the distribution of profit and the balance sheet net result for the previous year. Only used for variation accounts and detail accounts. **Prev. Final FX rate**: Applied to the accounts representing the initial balances. However, these accounts are actually calculated on the basis of the carryforward processing operations, and are not the result of conversions. Only used for variation accounts and detail accounts. **Initial balance FX rate**: this converts incoming area variations or percentage variations in the case of a decrease of accounts converted at the historical FX rate, when the entry or reduction occur at the start of the period, or when the amount refers to carrying forward. Only used for variation accounts. With this kind of FX rate, it is useful to specify the **Reference account for Initial balance/Year-to-date average FX rate** which allows you to calculate the conversion coefficient. Only if the conversion type is "Initial balance FX rates" or "Year-to-date average FX rate". Must be a "Normal" or "Detail" Balance Sheet account. If not present, the system will use the parent account of the control group to which the account being converted belongs as the account. **Year-to-date average FX rate**: this converts outgoing area variations or the percentage variance in the case of a decrease of accounts converted at the historical FX rate, i.e. when the exit or reduction occur during the period and other operations alter the value of the account. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the conversion coefficient in **Reference account for Initial balance/Year-to-date average FX rate**. **None**: This is applied to accounts that are not subject to currency conversion. This is used for 'other variation', 'stock' and 'initial balance variation' accounts.
Standard sign	This determines the sign with which data can be inserted into the account	**Equal to the parent account sign** **Opposite to the parent account sign** **Any**
IC management	The account may receive intercompany values.	-

Field	Description	Values
Control group data		
Balancing	The detail/variation account used to allocate any unbalanced amounts caused by rounding for currency conversion between detail/variation accounts and parent accounts.	-
Initial balance	The account that represents the initial balance; carry forward data processing feeds this account with the final balance of the previous scenario.	-
Calculation rule	The account used by the system to generate the calculation rule, if the rule for creating the calculation rule is “Calculate variation/detail as difference”.	-
Cancel	This identifies the account used by the system to cancel the journal; carry forward data processing feeds this account with an amount equal to the initial balance, but with the opposite sign.	-
FX rate difference	Variation account(s) to which to allocate the FX rate difference generated by the currency conversion of variations, if the relative parent account is not converted at the historical FX rate.	-
Var. Area	Variation account(s) to which to allocate the amounts created for the automatic management of entry and exit variations regarding the consolidation area.	-
Initial Balance FX rate difference	Variation account to which to allocate the FX rate difference generated by the currency conversion of initial balance variations, if the relative parent account is not converted at the historical FX rate.	-

Field	Description	Values
Merger	Variation account(s) to which to allocate the amounts created for the automatic management of mergers.	-
Modify %	Variation account(s) to which to allocate the amounts deriving from the variation of the proportional calculation percentage.	-
Change to equity method	Variation account(s) to which to allocate the amounts originating from the change to the equity method and from the equity calculation in the transition from the line-by-line/proportional to the equity method.	-
IFRS5	Variation account(s) used to allocate the reclassification amounts from IFRS5 data processing.	-

Relationships tab

This tab allows you to create relationships between variation/detail types using the nodes.

Field	Description
Nodes	Nodes to which the variation/detail type is to be related

Control groups

Contents

This section covers the following topics:

Control groups: basic concepts 167
How to define control groups 170
How to create different types of control groups 171
How to work with control groups 172
Control groups page 174
Control groups 176
Definition of Set 1 accounts 178
Definition of Set 2 accounts 179
Recode - Control groups page 179
Recode - Control groups attributes 181

Control groups: basic concepts

Definition

A control group is a set of accounts between which a relationship is created in order to achieve two objectives:

- to check the balancing or coherence for the data inserted
- to calculate detail accounts or variation accounts

Comparisons are carried out between data of accounts belonging to two groups:

- **Set 1**, i.e. the accounts for which the detail or variation is provided.
- **Set 2**, i.e. the detail accounts or variation accounts representing the entries of Set 1 accounts.

***Note**: for the Variation and Detail control groups, Set 1 identifies the parent accounts and Set 2 identifies the child accounts.*

Calculation rules generated by the control groups

Through the control groups, it is possible to generate calculation rules and obtain the following results:

- calculate the parent account as the sum of the detail/variation accounts. In this case, the data are inserted in the detail or variation accounts, and the amount of the normal account is obtained as the sum of its entries or details.
- calculate a detail/variation account as the difference between parent accounts and the remaining detail/variation accounts.

Example control group for coherency check

In this example, four child accounts refer to one parent account. The sum of the detail accounts corresponds to the parent account amount.

Account name	Amount	Account type
Trade receivables	**€ 100,000**	**Normal parent account**
Trade receivables: 0-30 days	€ 10,000	Detail child account
Trade receivables: 30-60 days	€ 10,000	Detail child account
Trade receivables: 60-90 days	€ 80,000	Detail child account
Σ Detail accounts	**€ 100,000**	**Sum of detail accounts**

Example of control group to automatically calculate an account

In this example, a number of detail accounts have been related to a trade receivables account in order to break down the amounts that will be paid with different due dates (30-60 days, 60-90 days, etc.).

Account name	Amount	Account type
Trade receivables: 0-30 days	€ 10,000	Detail child account
Trade receivables: 30-60 days	€ 10,000	Detail child account
Trade receivables: 60-90 days	€ 80,000	Detail child account
Total trade receivables = Σ Detail accounts	**€ 100,000**	**Parent account calculated as the sum of the detail accounts**

Control group type

It is possible to create the following types of control groups:

Type	Description
Detail	This relates the accounts to the relative details. *For example: revenue breakdown by geographic area, product type, etc.*
Variation	This relates balance sheet accounts, memorandum accounts or 'other stock' accounts to the respective entries made over the course of the year. *For example: purchases, sales, equity, etc.*
Balancing	This defines free balancing rules between accounts, details and variations. *For example: the rule that checks that the depreciation detail included in the variation form of tangible asset variations, segmented by asset type, corresponds to the row of the P&L account that contains the depreciation of tangible assets at global level.*
Coherence	This defines rules that check, if there is an amount, whether there is another amount or another account. *For example: if there are financial debts, there must also be the relative interest expenses.* Coherency may be mono-directional, i.e. the presence of amount A implies the presence of amount B, or bi-directional, i.e. the presence of amount B may also imply the presence of amount A.

System control groups

The following system control groups are predefined; they cannot be deleted, but rather only some of their details may be modified:

Name	Description
$PL	This checks that the P&L is balanced, i.e. that the P&L result account is equal to the sum of all the other normal P&L accounts, with the sign changed.
$RESFLOW	This checks that the balance sheet result accounts have the same amounts as the balance sheet result variation accounts.
$RESULT	This checks that the balance sheet result account is the same as the P&L result account.
$BS	This checks that the balance sheet is balanced, i.e. that the balance sheet result account is equal to the sum of all the normal balance sheet accounts, with the sign changed.

Control operators

In order to create calculation and checking rules within the control groups, more complex operators are also available compared with the basic ones (>, <, =, ...).

Operator	Description
Coherence	If the algebraic sum of the values in the **parent accounts** is not zero, then also the algebraic sum of the values present in the **child accounts** must be different to zero.
Bi-directional coherence	• If the algebraic sum of the values in the **parent accounts** is not zero, then also the algebraic sum of the values present in the **child accounts** must be different to zero. • If the algebraic sum of the values in the **parent accounts** is zero, then the algebraic sum of the values present in the **child accounts** must also be zero.
Coherence by element	If the algebraic sum of the values in at least one of the **parent accounts** is not zero, then also the algebraic sum of the values present in at least one of the **child accounts** must be different to zero.
Bi-directional coherence by element	• If the algebraic sum of the values in at least one of the **parent accounts** is not zero, then also the algebraic sum of the values present in at least one of the **child accounts** must be different to zero. • If the algebraic sum of the values in all the **parent accounts** is zero, then the algebraic sum of the values present in all the **child accounts** must also be zero.

Groupings of control groups

It is possible to organise control groups in groupings. These groupings are useful:

- in reporting
- to select all the control groups belonging to the same group at the same time

Example of the creation of a control group

In this example, starting from the following normal accounts:

- Tangible assets
- Intangible assets


and from three variation types:

- Initial balance
- Amortisation/Depreciation
- Other variations

The **Create details and variations** function generated, at the same time:

- six new variation accounts
- two variation control groups

The two normal accounts will be the parent accounts for each control group.

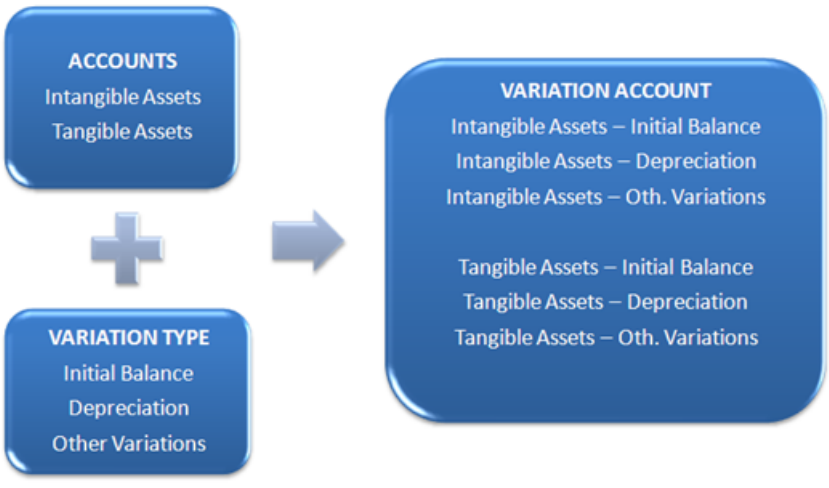

Updating control groups

The control groups need to be updated in the following cases:

- when new variation/detail types are added to the variation/detail types grouping node used to generate the control group
- when changes are made to the attributes of the variation/detail types related to the variation/detail types grouping node used to generate the control group

How to define control groups

Concept Information

The dimensions of CCH Tagetik 81
The Account: basic concepts 106
Groupings 193

Sequence of procedures to create a control group

1. "How to create a control group" below
2. "How to define the Set 1 accounts of a control group" below
3. "How to define the Set 2 accounts of a control group" on the facing page.

How to create a control group

Dimensions > Control groups > List

1. In the table listing existing control groups, click ⊕: an empty row will be added.
2. In the **Attributes** tab, insert a code for the new control group and define all of its other characteristics.
3. In the **Diagnostics** tab, define the characteristics of the checks to be run on the accounts.
4. In the **Relationships** tab, the new account will be automatically related to a default hierarchy ($) which organises the accounts by nature and type. If necessary, replace this hierarchy or update with others.
5. In the **Restrictions** tab, set the custom dimensions that the control group must take into consideration.
6. In the **Calculation Logics** tab, define the calculation logics that must generate the result accounts.
7. Click **Save**: the control group created will be listed in the data table.

How to define the Set 1 accounts of a control group

Dimensions > Control groups > List

***Note**: for Variation and Detail control groups, this group of accounts is called 'parent accounts'.*

1. Select the control group for which to define the Set 1 accounts.
2. In the **Attributes** tab, in the **Accounts Definition** section, click **Define Set 1**, and the page will open to define the Set 1 accounts.
3. Click ⊕: an empty row will be added.
4. In the **Attributes** tab, select whether or not to include the account, or the accounts making up a node, in the control group, and then select the account or the node to be considered as a Set 1 account; then click **Save**.
5. Repeat for all the Set 1 accounts to be defined.
6. To view the list of Set 1 accounts and the relative Set 2 accounts contained in any nodes, click **Definition result**.

***IMPORTANT**: be careful with the order in which accounts are inserted or excluded, as Tagetik will carry out the operations in exactly the same order in which they are listed, with the next operation prevailing over the previous one.*

How to define the Set 2 accounts of a control group

Dimensions > Control groups > List

***Note**: for Variation and Detail control groups, this group of accounts is called 'child accounts'.*

1. Select the control group for which to define the Set 2 accounts.
2. In the **Attributes** tab, in the **Accounts Definition** section, click **Define Set 2**, and the page will open to define the Set 2 accounts.
3. Click : an empty row will be added.
4. In the **Attributes** tab, select whether or not to include the account, or the accounts making up a node, in the control group, and then select the account or the node to be considered as a Set 2 account.
5. If necessary, define the variation/detail type for which to run the check, and then click **Save**.
6. Repeat for all the Set 2 accounts to be defined.
7. To view the list of Set 1 accounts and the relative Set 2 accounts contained in any nodes, click **Definition result**.

***IMPORTANT**: be careful with the order in which accounts are inserted or excluded, as Tagetik will carry out the operations in exactly the same order in which they are listed, with the next operation prevailing over the previous one.*

How to create different types of control groups

Concept Information

The dimensions of CCH Tagetik 81
The Account: basic concepts 106
Groupings 193

How to create a variation control group from the control groups list table

Dimensions > Control groups > List

1. In the table listing existing control groups, click : an empty row will be added.
2. In the **Control type** section, select **Variation**.
3. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**: the control group created will be listed in the data table.

How to create a variation control group from the account elements table

Dimensions > Account > List

1. In the account elements table, select the parent account, and then click > **Create Variations**: the**Create Variations, Control groups, Calculation logics** window will open.
2. In the **Control Groups** section, define the characteristics of the control group, and then click **OK**.

How to create a detail control group from the control groups list table

Dimensions > Control groups > List

1. In the table listing existing control groups, click : an empty row will be added.
2. In the **Control type** section, select **Detail**.
3. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**: the control group created will be listed in the data table.

How to create a detail control group from the account elements table

Dimensions > Account > List

1. In the account elements table, select the parent account, and then click > **Create Details**: the**Create Details, Control groups, Calculation logics** window will open.

2. In the **Control Groups** section, define the characteristics of the control group, and then click **OK**.

How to create a balancing control group

Dimensions > Control groups > List

1. In the table listing existing control groups, click : an empty row will be added.
2. In the **Control type** section, select **Balancing**.
3. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**: the control group created will be listed in the data table.

How to create a coherence control group

Dimensions > Control groups > List

1. In the table listing existing control groups, click : an empty row will be added.
2. In the **Control type** section, select **Coherence**.
3. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**: the control group created will be listed in the data table.

How to create a single control group for a set of accounts

Dimensions > Account > List

This allows you to create a new control group starting from a set of parent accounts and to insert all new child accounts into the same group. This is useful in the case of several accounts that form a financial statement item, relating them to details or variations that regard said financial statement item in its entirety.

1. Click to enable multiple selection, and then, in the account elements table, select the accounts for which to create the control group.
2. Click > **Create Details**: the **Create Details, Control groups, Calculation logics** window will open.
3. In **Control groups**, select **One for all Parent Accounts**.
4. Define all the characteristics of the control group in the various sections, and then click **OK**: the control group will be created with the relative calculation logics.

How to create a control group for each account in a set of accounts

Dimensions > Account > List

This allows you to create a separate control group for each account considered as a parent account. This is useful to create a series of control groups in order to analyse the detail or variation of several accounts.

1. Click to enable multiple selection, and then, in the account elements table, select the accounts for which to create the control group.
2. In the account elements table, select the parent account, and then click > **Create Details**: the**Create Details, Control groups, Calculation logics** window will open.
3. In **Control groups**, select **One for each Parent Account**.
4. Define all the characteristics of the control groups in the various sections, and then click **OK**: for each parent account selected, a control group will be created with the relative calculation logics.

How to work with control groups

Concept Information

The dimensions of CCH Tagetik 81
The Account: basic concepts 106
Groupings 193

How to modify a control group

Dimensions > Control groups > List

1. In the control groups list table, select the group to modify.
2. Define all the characteristics of the control group using the various configuration tabs, and then click **Save**.

How to recode a control group

Dimensions > Control groups > List

1. In the control groups list table, select the group whose code needs to be modified.
2. Select > **Recode**: the **Recode - Control groups** page will open.
3. Click : an empty row will be added.
4. In the **Attributes** tab, under **Code**, select the code to be replaced.
5. Under **New Code**, insert the new code to be assigned to the control group.

   ***IMPORTANT**: the new code must not already be used in Tagetik.*

6. Select **Primary** if the code inserted must prevail in case of any conflict.
7. Click **Save** to save the new code.
8. Repeat from step 3 in order to change other codes.
9. Click **Run** to recode all the new codes saved.

   ***Note**: this operation may take several minutes.*

How to relate a control group to a node in a hierarchy

Dimensions > Control groups > List

1. In the control groups list table, select one or more groups to be related to the same node.
2. In the **Relationships** tab, select the node with which to create the relationship and then click **Save**.

How to update control groups

Dimensions > Control groups > List

This procedure allows you to update control groups, which have been automatically created using variation/detail types, when it is necessary to add variation accounts or detail accounts for a parent account that is already inserted in a control group. This is done after having created a dedicated variation/detail type and after this has been added to the grouping used for the control group.

1. In the control groups list table, select the group to update.
2. Select > **Update control groups**: the **Update control groups** page will open.
3. Define the update mode and any custom dimension restrictions.
4. Click **OK** to start the update process.

   ***Note**: this operation may take several minutes.*

How to exclude data for specific custom dimensions

Dimensions > Control groups > List

For each control group, it is possible to exclude data for specific custom dimensions from being collected.

1. In the control groups list table, select the group for which to create restrictions.
2. In the **Restrictions** tab, set the desired type of restriction for each custom dimension shown.
3. Click **Save**: for custom dimensions for which a restriction has been set, the **Define** command will be displayed together with the symbol, indicating that there are elements for which the control group is to be restricted.
4. Click **Define**: the specific page will open allowing you to define the restrictions.
5. Click to add an element.
6. In the **Attributes** tab, set whether to include or exclude the element, and select the single custom dimension elements or nodes of a non-time-dependent hierarchy defined for the custom dimension.

7. To enable a hierarchy node, but exclude an element from it, you must first set the node and then the exception on the next line.

   ***IMPORTANT**: The system implements restrictions based on the order in which they are inserted in the definition window. If two restrictions are in conflict, the one implemented last in the sequence will prevail.*

8. Click **Save**.
9. To view a list of all the selected elements, click **Definition result**.

How to copy custom dimension exclusions from another control group

Dimensions > Control groups > List

1. In the control groups list table, select the group from which to copy custom dimension restrictions.
2. Select > **Copy Custom Dimension Restrictions from**: the **Copy Custom Dimension Restrictions from** page will open.
3. Select the control group from which to copy custom dimension restrictions.
4. Select the desired custom dimensions, and then click **Run**.

How to generate a report with the characteristics of a control group

Dimensions > Control groups > List

It is possible to create reports that contain specific attributes extracted from the control groups. To define the characteristics to be included in the report, follow the below procedure:

1. In the control groups list, select > **Control groups report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the control groups to be included in the report.
3. In the **Output** section, select the information from the control groups to be included in the report.
4. Click **OK**: the requested report will be generated in Excel format.

How to generate a report on custom dimension restrictions

Dimensions > Control groups > List

It is possible to create reports containing information about specific custom dimensions managed for the control groups listed. To define the data to be included in the report, follow the below procedure:

1. Select > **Restrictions on custom dimensions report**: a window will appear allowing you to set the parameters for generating the report.
2. In the **Input filters** section, select the filters to define the control groups that will be included in the report.
3. In the **Output** section, define how to break down and group the information in the report. For each type of output selected, a dedicated tab will be created in the report.
4. Click **OK**: the requested report will be generated in Excel format.


Control groups page

Dimensions > Control groups > List

Purpose of the page

This page allows you to create and modify control groups.

What it looks like

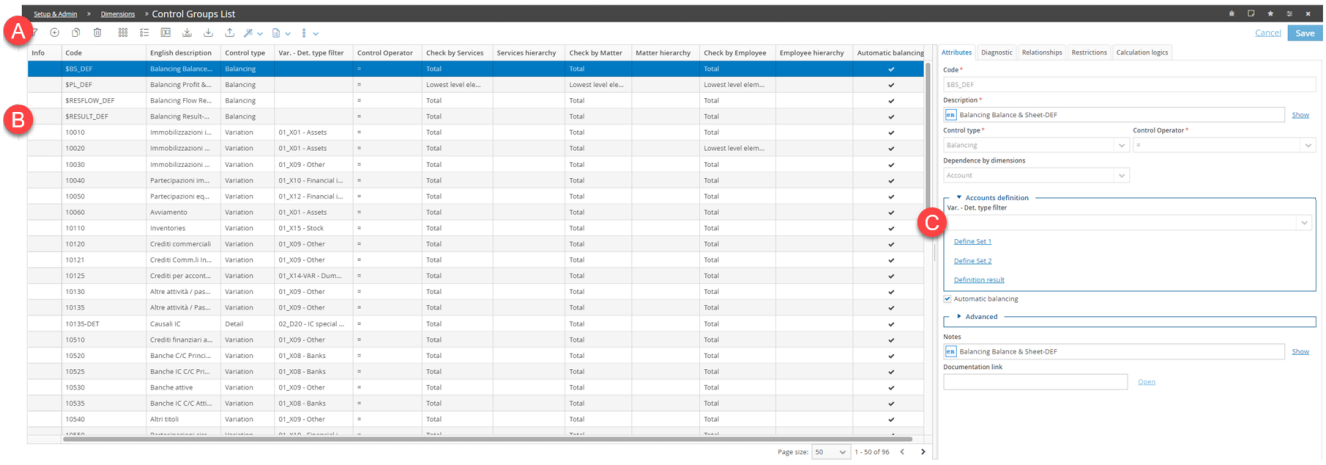

Element	Description
A	Action buttons
B	Data table
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new control group.
	This duplicates a control group with the same characteristics as the one selected, except for the code and the relationships of the underlying Set 1 and Set 2 accounts.
	This deletes the control group contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This shows any ancillary functions. **Recode**: this modifies the code related to a control group.
	This sets the parameters to generate Excel reports. **Restrictions on custom dimensions report**: this generates reports on the restrictions applicable to the different accounts. **Control groups report**: this generates reports on the different types of control groups.
	This shows a number of functions that can be run on the selected control groups. **Update control groups**: this updates the control groups with the latest changes made to the associated accounts. **Copy Custom Dimension Restrictions from**: this copies the exclusions for specific custom dimensions from another control group. Duplicate control groups: this duplicates a control group with the same characteristics as the one selected, with the exception of the code.

Control groups

Dimensions > Control groups > List

Attributes

Please find below the most important fields.

Field	Description	Values
Control type	Type of control group created.	Details Variation Balancing Coherence
Control Operator	Operator used for balancing check	Coherence Equality and relational operators
Check by element	Only for Balancing control groups. Control groups are validated at the single-account level rather than on the total of accounts.	
Dependence by dimensions	Any relationships between accounts and the various custom dimensions.	**Account**: the control group is only defined for the account. **Account/ <Custom Dimension>**: the control group is defined in relation to the account and the custom dimension indicated. **Dynamic Account Group**: the control group is defined via a dynamic account group (see page Dynamic Account Groups). Option only available for Balancing or Coherence control groups.
Accounts definition		
Var. - Det. type filter	Only if the 'Dependence by dimensions' field is set to Account. Node of the var. - det. types grouping associated with the control group. For 'Flow' or 'Detail' type control groups, the system uses this information to automatically update the control group when using the 'update details/flows' utility. For control groups of type “Balancing” and “Coherence”, in addition to being used as a filter in associating Set 2 accounts with a Variation / Detail type, this information is also used by reporting.	-
Define Set 1	In control groups with dependence by dimension, by account or by account/custom dimension, set the accounts or account nodes to be considered as parent accounts. In control groups with dependence by dimension, by dynamic group of accounts, set the dynamic group to be used to define the parent accounts.	-
Define Set 2	In control groups with dependence by dimension, by account or by account/custom dimension, set the accounts or account nodes to be considered as children. In control groups with dependence by dimension, by dynamic group of accounts, set the dynamic group to be used to define the child accounts.	-

Field	Description	Values
Definition results	This displays the lists of parent accounts and child accounts.	-
Automatic balancing	The control group is made to be balanced automatically. Option that cannot be activated on control groups with Check by Element or with Dependence by Dimension, by dynamic group of accounts. ***Note**: any unbalanced amounts are reported in a dedicated variation account (Balancing variation).*	-
Advanced		
Validity	This defines a time interval within which the control group may be used.	-
Include in the process if	This defines the conditions for the control group to be used, for data collection purposes.	-
Documentation link	Opens a page outside Tagetik with additional information.	-

Diagnostics tab

This tab allows you to define the checks to be run through the control group.

Please find below the most important fields.

Field	Description	Values
Severity	Consequences triggered by a balancing error.	**Blocking**: the error blocks the submission process. **Non-Blocking**: the error is flagged up but does not block the submission process.
Data types to check	Type of data checked by the diagnostics carried out on the control group.	**Gross**: runs diagnostics on gross amounts. **Net**: runs diagnostics on net amounts. **Intercompany**: runs diagnostics on intercompany data.
Advanced		
Check original data on	Currency used to carry out the control group balancing check.	**Local currency**: this uses the financial statement currency. **Transaction currency**: this uses the transaction currency.
Check original data for	The level at which the control group checks the 'amount' type categories.	**Company**: the check is carried out for each individual company. **Contributor node**: the check is carried out on the total of the amounts for the companies belonging to a contributor node. **Company and contributor node**: the check is carried out both at company level and at contributor node level.
Check consolidation journals by Company	For 'consolidation journal' categories, this states whether the control group is to be checked only by the journal number or by the combination of journal number/company.	-
Dimensions check		
Check by <custom dimension>	Level of detail of the check carried out within the custom dimension indicated.	Total Lowest level elements Hierarchy nodes
<Custom dimension> hierarchy	This allows you to specify a hierarchy node if the custom dimension check is enabled and the 'Hierarchy nodes' mode is selected.	-

Relationships tab

This tab allows you to create relationships between the selected control groups and nodes of control group hierarchies.

Field	Description
Nodes	Node within a control group hierarchy.

Restrictions tab

This tab allows you to set the custom dimensions excluded by the control group.

Please find below the most important fields.

Field	Description	Value
<Custom dimension> restrictions	Restrictions for the specific custom dimension	**None**: all custom dimensions are accepted. **Restricted**: it is possible to define restrictions on enabled custom dimensions.
Counterparty rule for IC checks	This allows you to enable counterparty dynamic groups in IC checks.	-

Calculation Logics tab

This tab allows you to define the operations carried out through the control group in order to generate calculation rules.

Please find below the most important fields.

Field	Description
Create	This defines whether the control group generates one or more calculation rules.
Calculate	This indicates the criteria used to generate the calculation rule.
Data to calculate	
Run on Gross amounts	The account generated is calculated based on gross amounts.
Run on IC amounts	The account generated is calculated based on intercompany amounts.
Run on journals	The account generated is calculated based on journals.
Other options	
Compensate Company on journals	In a costs/revenues elimination journal, this avoids the system generating two rows with an opposite sign. Only enabled if the account generated is calculated based on journals.
Keep CTP on journals	The counterparty is kept in the account calculation based on journals. Only enabled if the account generated is calculated based on journals.
Keep original currency	The company currency amount and the transaction currency amount are managed separately,

Definition of Set 1 accounts

Dimensions > Control groups > List > select control group > Accounts definition > Define Set 1

Attributes tab

Field	Description
Action	This defines whether to include or exclude the account, or the node of accounts, from the control group.
Account	Account or node of accounts to be defined as a Set 1 account.

Definition of Set 2 accounts

Dimensions > Control groups > List > select control group > Accounts definition > Define Set 2

Attributes tab

Field	Description
Action	This defines whether to include or exclude the account, or the node of accounts, from the control group.
Account	Account or node of accounts to be defined as a Set 2 account.
Variation / Detail type	Var. - Det. Type used to define the Set 2 account.
Change sign	This indicates that the diagnostic check has to consider the account or node with the accounting sign or opposite sign.
Balancing	This account is used to allocate any unbalanced amounts caused by rounding between Set 1 and Set 2 accounts. If none are selected, the system uses the account with the highest amount in absolute terms. ***Note**: A control group may only have one Set 2 account with this function. It is not possible to select a node.*
Initial balance	The account is to be considered as the initial balance. In this case, the account is filled in automatically. It cannot be a node. ***Note**: A control group may only have one Set 2 account with this setting.*
Cancel	The account is used to cancel the journal. ***Note**: A control group may only have one Set 2 account with this setting.*
Calculation rule	The account is used to generate the calculation logic, if there is a “Calculate variation/detail as difference” creation rule for the calculation rule.
FX rate difference	The account is used to insert the FX rate differences generated by variations currency conversion.
Var. Area	The account is used to insert the amounts originating from the automatic management of variations to the consolidation area.
Initial balance FX rate difference	The account is used to insert the FX rate differences generated by the currency conversion of initial balance variations. If the relative parent account is not converted at the historical FX rate.
Merge	The account is used to insert the amounts originating from the automatic management of mergers.
Modify %	The account is used to insert the amounts originating from the variations to the proportional calculation percentage.
Change to equity method	The account is used to insert amounts originating from the change to the equity method and from the equity calculation in the transition from the line-by-line/proportional to the equity method.
IFRS5	The account is used to insert the reclassification amounts from application of IFRS5.
Reclassification for changed account with equity valuation method	The account is used if the financial investment account changes and it is necessary to reclassify the initial balance of the equity valuation journal.


Recode - Control groups page

Dimensions > Control groups > List > > Recode

Purpose of the page

This page allows you to modify control group codes.

What it looks like

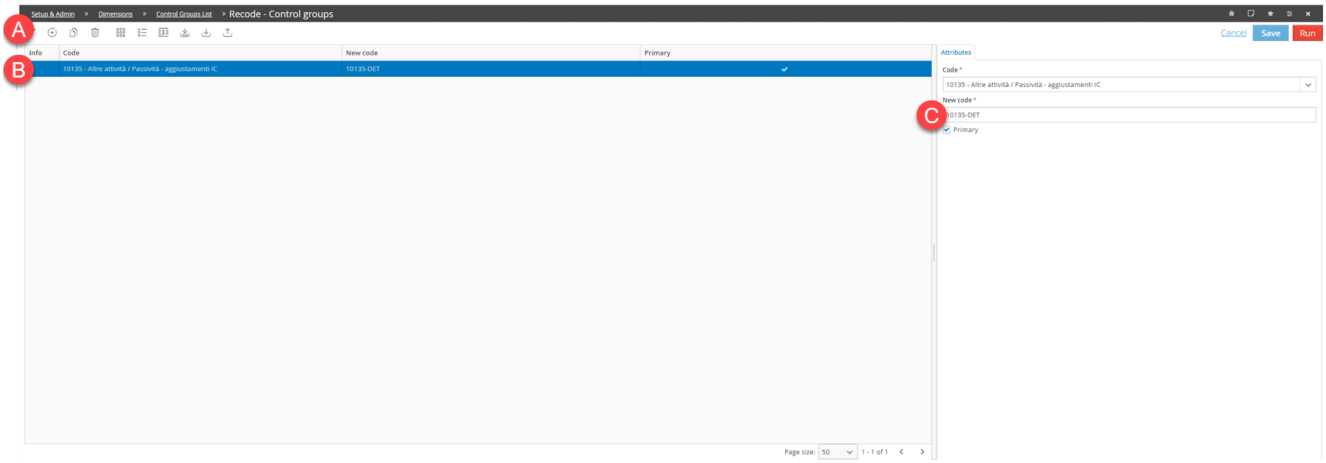

Element	Description
A	Tool bar
B	List of codes in the process of being recoded
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new code.
	This adds a new row with the same recoding code as the one selected. This is useful to merge several accounts into one.
	Deletes the element contained in the selected row.
	This enables/disables the grid modify function. This allows you to change the characteristics of the selected elements directly in the table and to hide the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.

Recode - Control groups attributes

Dimensions > Control groups > List > > Recode

Attributes tab

Please find below the most important fields.

Field	Description
Code	Original code
New code	New code to be assigned to the control group
Primary	This indicates that the new code must prevail in case of any conflict with other previously defined codes.

Hierarchies

Contents

This section covers the following topics:

Hierarchies: basic concepts 182
How to work with hierarchies 183
Structure and relationships for accounts page 185
Structure and relationships page for entities 186
New hierarchy 187
Node creation 188
Account hierarchies page 188
Account hierarchy attributes 189
Entity hierarchies page 189
Entity hierarchy attributes 191
Structure and Relationships Attributes 191

Hierarchies: basic concepts


Definition

The hierarchy is a multi-level structure that allows you to aggregate and organise several elements. Hierarchies have the following characteristics:

- multi-level structure with unlimited depth, i.e. the elements may be aggregated to different levels.
- single-parent structure, i.e. each child element in the hierarchy may be related to a single parent element.
- unlimited alternative hierarchies, i.e. it is possible to create an unlimited number of different hierarchies for each dimension.

***Note**: alternative hierarchies for the same dimension may be crossed during the reporting stage.*

Example hierarchy

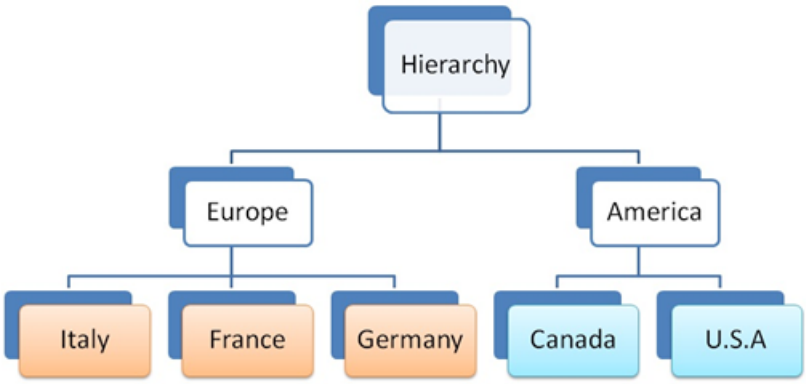

In this example, the elements are grouped together based on geographic area, on three levels. The Italy node is related to the Europe node and cannot be related to the America node at the same time.

Restrictions on the creation of hierarchies

The following restrictions exist on the creation of hierarchies:

- It is only possible to define hierarchies for the Entity, Account, Custom and Analytical dimensions.
- The Account and Entity dimensions always have a default hierarchy ($), to which the new elements are related.

***Note**: the "$" hierarchy collects all the accounts created, including non-related accounts, i.e. those that have not been inserted in any hierarchy or grouping.*

Hierarchy types

The type of hierarchy is marked by a symbol.

Symbol	Name	Description
	Basic	Generic relationships that can be used for any type of hierarchy.
	Geographical	The relationships reflect global regions, nations and departments.
	Organisation	The relationships represent the group's organisational structure.
	Time-dependent	The relationships between elements and nodes are not fixed, but depend on the scenario and period.

Example of a time-dependent hierarchy

In this example, the hierarchy groups the companies based on the number of employees:



If a company has 40 employees in 2011C/December and 55 employees in 2012C/January, it must be classified in the N02 node for the 2011C Scenario and Period 12, and in the N03 node for the 2012C Scenario and Period 01. The hierarchical structure does not change, but the relationships between the company and the hierarchy nodes alter depending on the scenario and the period.

How to work with hierarchies

Concept Information

The dimensions of CCH Tagetik 81
Aggregation structures 82
Groupings 193

How to view and modify existing hierarchies

Dimensions > choose dimension > ⋮ > Hierarchies

1. Select the hierarchy to modify.
2. In the **Attributes** tab, make the changes and then click **Save**: the hierarchies for which changes have not yet been saved will be highlighted (✎).

How to create a hierarchy

Dimensions > choose dimension > New hierarchy

1. Insert a code to attribute to the new hierarchy.
2. Define the characteristics of the hierarchy, and then click **OK**: the hierarchy will be created inside the dimension hierarchy.

How to create a new element inside a hierarchy

Dimensions > choose dimension > Show all > choose hierarchy

1. In the hierarchy structure, select the node within which to add the element, and then click : a new row will appear in the table.
2. In the configuration tabs, add all the data for the element, and then click **Save**: the element will be created and will be related to the node and to the hierarchy at the same time.

How to relate an element to a hierarchy

Dimensions > choose dimension > Show all > choose hierarchy

1. In the hierarchy structure, select the node to which the element is to be related, and then click : a new row will appear in the table.
2. In the **Attributes** tab, insert the code of the element to be related, and then click **Save**: the element data will be reported in the table and the element will be related to the selected node in the hierarchy.

How to relate several elements to a hierarchy

Dimensions > choose dimension > List

1. In the elements table, click : it is now possible to select several elements.
2. In the elements table, select all the dimension elements to be related to the same hierarchy,
3. In the **Relationships** tab, click : a new hierarchy selection box will be added.
4. Select the desired hierarchy from those available.

   Note: only the hierarchies to which it is possible to relate the element will be shown.

5. If necessary, select a node from those available within the hierarchy, and then click **Save**: the relationships created now apply to all selected elements.

How to add a node to a hierarchy

Dimensions > choose dimension > Show all > choose hierarchy

1. In the hierarchy structure, select the root or the node within which to create a new node, and then click : a new node row will appear in the table.
2. In the **Attributes** tab, insert the code of the node to be created, and then click **Save**: the node data are reported in the table and the node is related to the selected element in the hierarchy.

How to relate unrelated elements to a node

Dimensions > choose dimension > Show all > choose hierarchy

1. In the hierarchy structure, select **Unrelated elements**: all the dimension elements that have not yet been related to any node will be shown in the table.
2. Select the desired element and use your mouse to drag it to the desired node in the hierarchy structure.
3. Click **Save**.

How to define hierarchy levels

Dimensions > choose dimension > Show all > choose hierarchy

1. Click **Hierarchy levels**: the **Hierarchy levels** page will open.
2. Click ⊕ to add a new level: a new row will appear in the table.
3. In the **Attributes** tab, insert the information about the new level, and then click **Save**: the new level will be created.


Structure and relationships for accounts page

Dimensions > Account > Show all > select hierarchy

Purpose of the page

This page allows you to view the details of all the hierarchies created to group the existing accounts. It also allows you to change existing hierarchies, to insert additional nodes within each and to relate accounts to nodes and hierarchies.

What it looks like

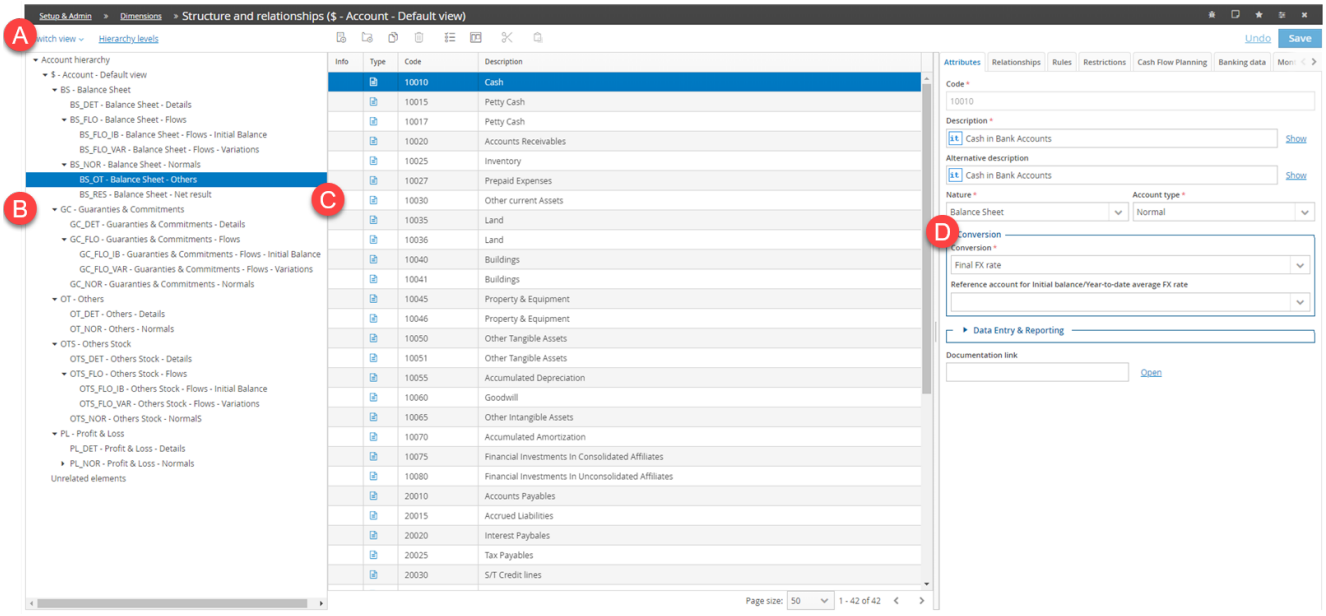

Element	Description
A	Tool bar
B	Hierarchy structure and elements
C	Details of the selected hierarchy node
D	Configuration tabs for the element of the selected hierarchy

Actions on this page

Element	Description
Switch view	This displays the hierarchy in two different ways. • **Element/node relationships**: the accounts are displayed in alphabetical order with the reference node. Non-related elements are not shown. • **Structure**: the nodes are displayed in alphabetical order and the name of the parent node is shown.
Hierarchy levels	This inserts a description for the hierarchy levels, which is useful for data analysis.

Element	Description
	This adds an account element to the hierarchy.
	This adds a node element to the hierarchy.
	This adds an identical element to the one selected.
	This deletes the selected element from the hierarchy.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an account from the hierarchy.
	This moves a node or an account that has been cut to another position in the hierarchy.


Structure and relationships page for entities

Dimensions > Entity > Show all > select hierarchy

Purpose of the page

This page allows you to view the details of all the hierarchies created to group existing entities. It also allows you to change existing hierarchies, to insert additional nodes within each one, and to relate entities to nodes and hierarchies.

What it looks like

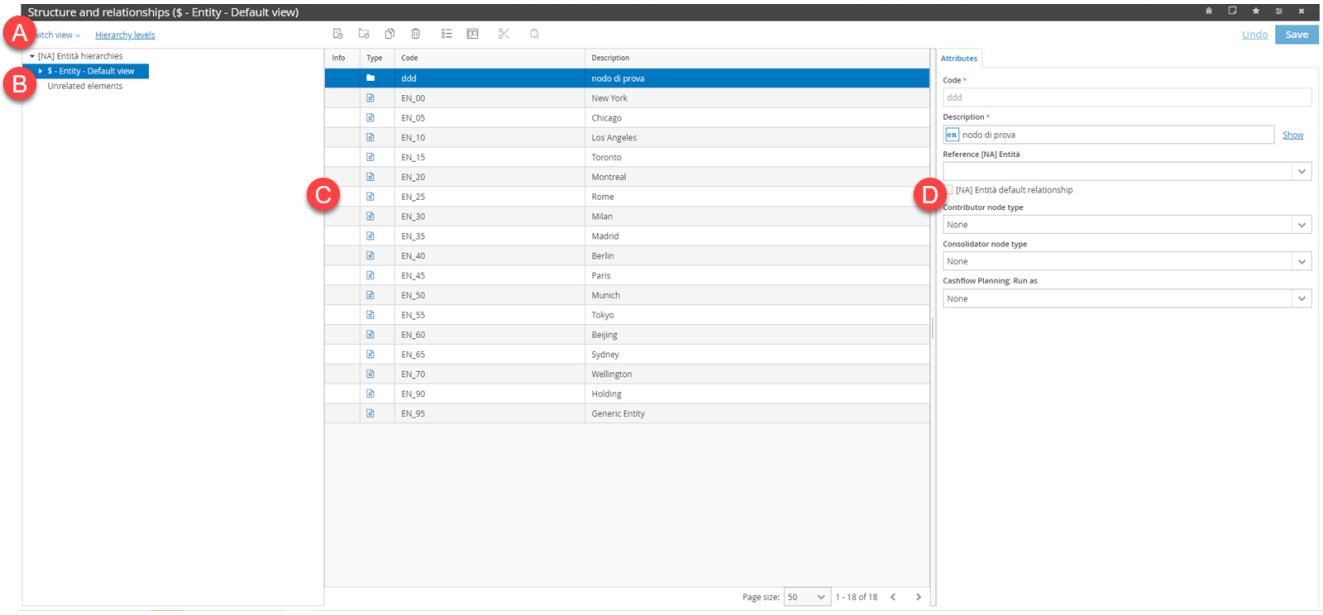

Element	Description
A	Tool bar
B	Hierarchy structure and elements
C	Details of the selected hierarchy node
D	Configuration tabs for the element of the selected hierarchy

Actions on this page

Element	Description
Switch view	This displays the hierarchy in two different ways. • **Element/node relationships**: the accounts are displayed in alphabetical order with the reference node. Non-related elements are not shown. • **Structure**: the nodes are displayed in alphabetical order and the name of the parent node is shown.
Hierarchy levels	This inserts a description for the hierarchy levels, which is useful for data analysis.
	This adds an account element to the hierarchy.
	This adds a node element to the hierarchy.
	This adds an identical element to the one selected.
	This deletes the selected element from the hierarchy.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an account from the hierarchy.
	This moves a node or an account that has been cut to another position in the hierarchy.

New hierarchy

Dimensions > choose dimension > New hierarchy

Add new hierarchy window

Please find below the most important fields.

Data	Description
Hierarchy code	Unique ID of the new hierarchy
Description	Meaningful name to identify the hierarchy and its content
Convert to flat structure	The hierarchy created will not have several levels; all related elements will be on the same level.
Exclude from reporting	The hierarchy created will not be included in the reports.
Root	Node of the first level to which the hierarchy is connected

Node creation

Dimensions > Account > Show all > select hierarchy

Attributes tab

Please find below the most important fields.

Data	Description
Code	Unique ID of the node
Description	Meaningful name to identify the node and its content
Reference account	Node account used to load the amounts inserted in the node.
Account default relationship	The node is automatically related to each company. Each new account created will be inserted in this node.
Class	Account class to which the node belongs.


Account hierarchies page

Dimensions > Account > ⋮ > Hierarchies

Purpose of the page

This page allows you to view and create hierarchies for existing accounts. It also allows you to change the attributes of each hierarchy.

What it looks like

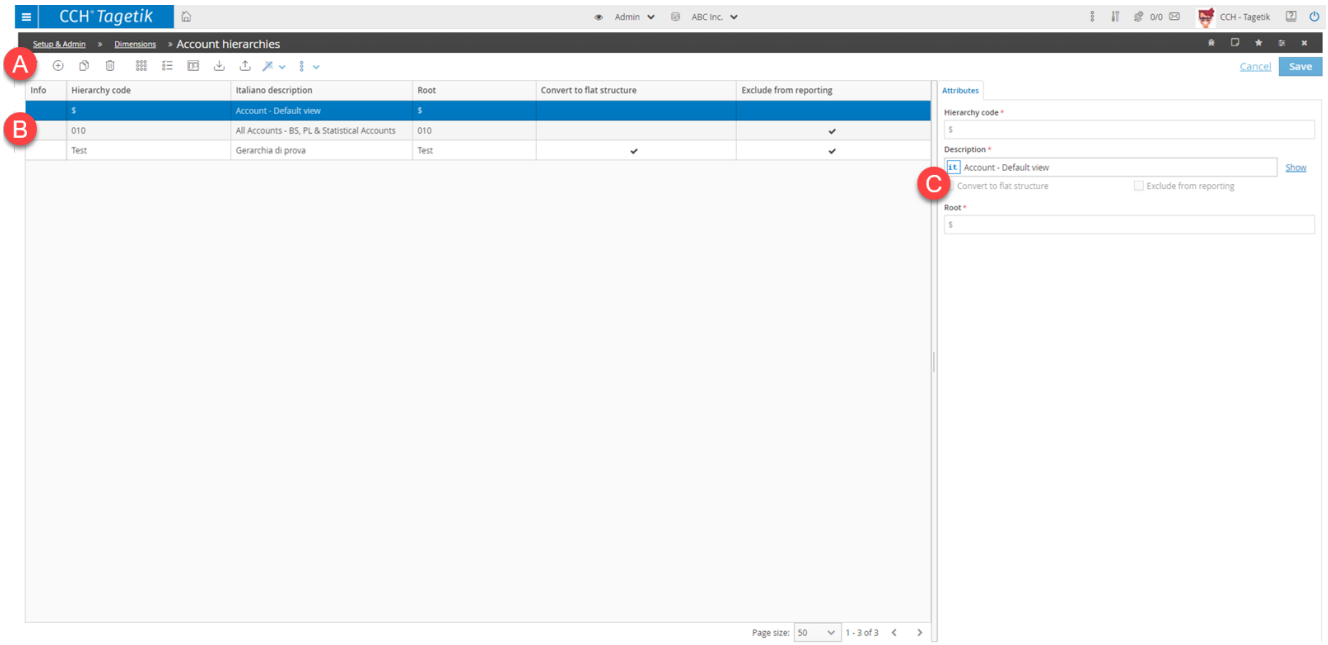

Element	Description
A	Action buttons
B	List of hierarchies to which the account is related
C	Configuration tab for the attributes of the selected hierarchy

Action buttons on this page

Element	Description
	This filters the data displayed on the page.
	This adds a row in order to insert a new hierarchy.
	This adds a hierarchy with the same characteristics as the one selected, with the exception of the code.
	This cancels the hierarchy contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This allows you to access the **Recode** function and to change the code related to a node.
	Structure and relationships: this opens the page to view all the hierarchies and to change the relationships. **Copy from**: this attributes the characteristics of another hierarchy of choice to the selected hierarchy.

Account hierarchy attributes

Dimensions > Account > ⋮ > Hierarchies

Attributes tab

Please find below the most important fields.

Field	Description
Convert to flat structure	This also keeps the flat structure of the hierarchy aligned. Only for non-time-dependent hierarchies.
Exclude from reporting	This excludes this hierarchy from the reporting. This is useful for hierarchies that have only been created to set-up the system and are no longer significant.
Root	Hierarchy root


Entity hierarchies page

Dimensions > Entity > ⋮ > Hierarchies

Purpose of the page

This page allows you to view and create entity hierarchies. It also allows you to change the attributes of each hierarchy.

What it looks like

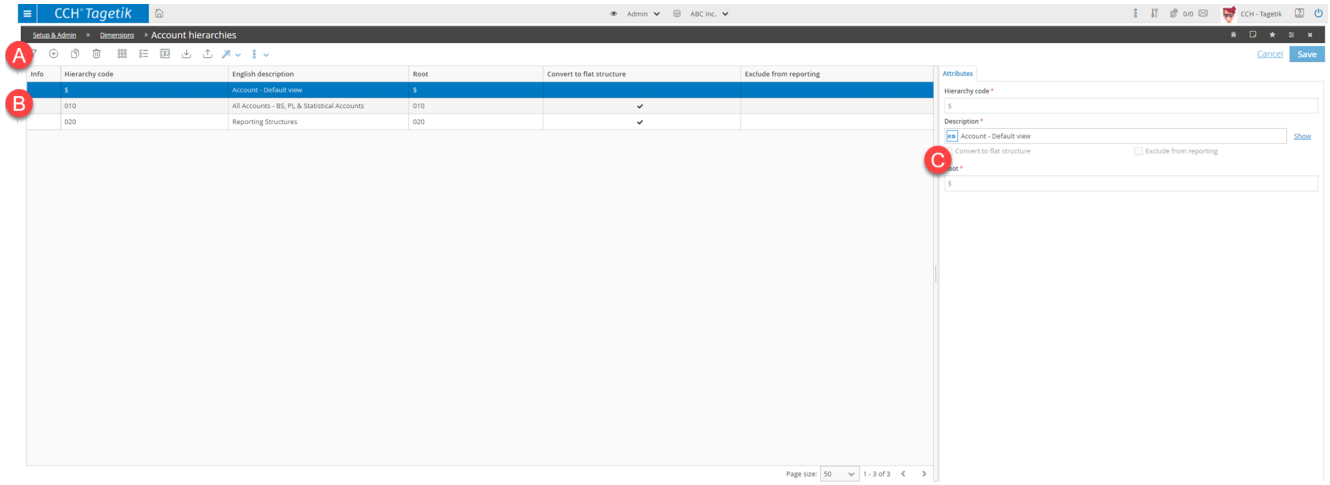

Element	Description
A	Action buttons
B	List of hierarchies to which an entity is related
C	Configuration tab for the attributes of the selected hierarchy

Action buttons on this page

Element	Description
	This filters the data displayed on the page.
	This adds a row in order to insert a new hierarchy.
	This adds a hierarchy with the same characteristics as the one selected, with the exception of the code.
	This cancels the hierarchy contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This allows you to access the **Recode** function and to change the code related to a node.
	**Structure and relationships**: this opens the page to view all the hierarchies and to change the relationships. **Copy from**: this attributes the characteristics of another hierarchy of choice to the selected hierarchy.

Entity hierarchy attributes

Dimensions > Entity > ⋮ > Hierarchies

Attributes tab

Please find below the most important fields.

Field	Description
Organisation	The type of hierarchy is 'organization'.
Geographical	The type of hierarchy is 'geographical'. The code must start with $G.
Exclude from reporting	This excludes this hierarchy from the reporting. This is useful for hierarchies that have only been created to set-up the system and are no longer significant.
Time dependent	The hierarchy is time-dependent, i.e. relating the element to the node depends on the scenario/period.
Convert to flat structure	This creates a flat copy of the hierarchy in the database, allowing for quick consultation for reporting purposes or for business intelligence.
Root	Hierarchy root

Structure and Relationships Attributes

Dimensions > Entities > ⋮ > Hierarchies > Structure and Relationships

Purpose of the page

This page allows you to view all hierarchies and modify the relationships.

Attributes tab

Please find below the most important fields.

Field	Description
Reference Entity	Reference Entity for the data processing procedures that work at the node level and need to attribute the data processing result to a specific Entity. In the break-back functionality: the value that is entered on the node is allocated by the system to the reference Entity specified on the node, if it cannot be allocated to the Entities on the node proportionally to the old value; In the calculation of multidimensional formulas: if it is asked to group the result of a calculation by Entities node (or Ctp entities), the system automatically assigns the result of that calculation to the node's reference Entity. If the hierarchy is time-dependent, it must be an Entity associated with the node or a lower-level node.
Contributor node type	Indicates the type of the contributor-side node. The possible values are: ***To approve***: means that a division manager will check the completion of data entry and approve its subsequent use. No diagnostics are ever performed on these nodes and the data are approved without the contributor's control. ***To submit*** means that there must be a division manager who verifies the completion of data entry and who is also responsible for submitting the data of the Entities in the node; to do so, they may use the diagnostic tool (this type of node is mainly used in consolidation management). ***None*** (default value) the node only allows the hierarchical structure to be built.

Field	Description
Consolidator node type	Indicates the type of the Consolidator-side node. The possible values are as follows: **To consolidate**: the node allows sector consolidation, i.e. it is possible to consolidate the set of Child Entities of the node; ***None*** (default value) the node only allows the hierarchical structure to be built.
Cash flow planning: run as	Indicates the node type for Cash Flow planning. The possible values are as follows: ***Entity*** indicates whether the node represents a legal entity. ***Group*** indicates whether the node represents a group on which to calculate group VAT, Cash Pooling, etc. ***Sub-entity*** indicates whether the node is a sub-Entity on which to perform notional data processing (direct taxes, indirect taxes, financial policy). ***Do not run*** (default value).

***IMPORTANT**: mandatory fields only if the Hierarchy is of Organization type.*

Groupings

Contents

This section covers the following topics:

Groupings 193
How to work with groupings 194
Scenario - Grouping page 194
Scenario - Grouping 196
Variation/Detail types Grouping page 197
Variation/Detail types grouping 198
Control group - Structure and relationships page 201
Control groups grouping 202
Category - Grouping page 205
Categories grouping 207

Groupings


What groupings are

Groupings are aggregation structures with the following characteristics:

- multi-level structures with unlimited depth, i.e. the elements may be aggregated to different levels.
- multi-parent structures, i.e. each child element in the hierarchy may be related to several parent elements.
- unique structures, i.e. it is possible to create just one grouping for each dimension.

Groupings allow for Category and Scenario dimensions to be aggregated.

Example of a grouping

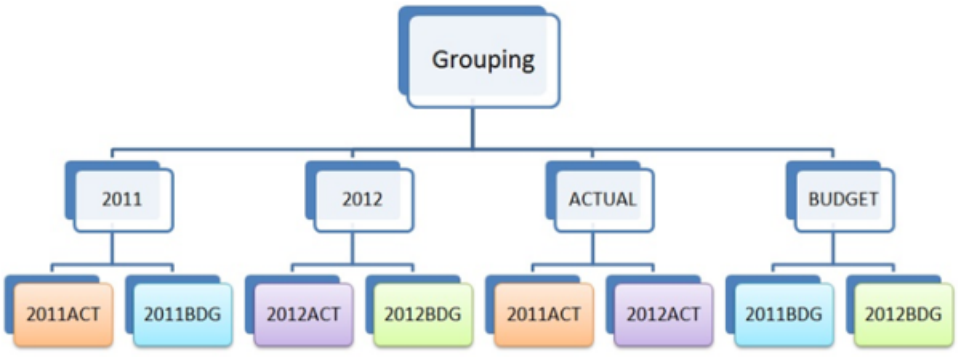

In this example, the same scenario 2011ACT is related to both the 2011 node and the ACTUAL node.

Principles for the creation of groupings

Groupings are created in the same way for all dimensions: by creating a tree structure and creating the relationships between dimension elements and nodes. It is also possible:

- To specify several nodes to which each new dimension element will be automatically related.
- To exclude (without deleting) certain grouping nodes from reports, as they may not be useful for reporting purposes.

How to work with groupings

Concept Information

The dimensions of CCH Tagetik 81
Aggregation structures 82
Hierarchies: basic concepts 182

How to view and modify existing groupings

Dimensions > choose dimension > ⋮ > Grouping

1. Select the grouping to be modified.
2. In the **Attributes** tab, make the changes and then click **Save**: the groupings for which changes have not yet been saved will be highlighted (✎).

How to add a node to a grouping

Dimensions > choose dimension > ⋮ > Grouping

1. In the grouping structure, select the node within which to create a new node, and then click : a new node row will appear in the table.
2. In the **Attributes** tab, insert the code of the node to be created, and then click **Save**: the node data are reported in the table and the node is related to the selected element in the grouping.

How to add a new element inside a grouping

Dimensions > choose dimension > ⋮ > Grouping

1. In the grouping structure, select the node within which to add the element, and then click : a new row will appear in the table.
2. In the configuration tabs, add all the data for the element, and then click **Save**: the element will be created and will be related to the node and to the grouping at the same time.

How to relate an element to a grouping

Dimensions > choose dimension > ⋮ > Grouping

1. In the grouping structure, select the node to which the element is to be related, and then click : a new element row will appear in the table.
2. In the **Attributes** tab, insert the code of the element to be related, and then click **Save**: the element data will be reported in the table and the element will be related to the selected node in the grouping.


Scenario - Grouping page

Dimensions > Scenario > Grouping

Purpose of the page

This page allows you to view and create scenario groupings. It also allows you to change the attributes of each grouping.

What it looks like

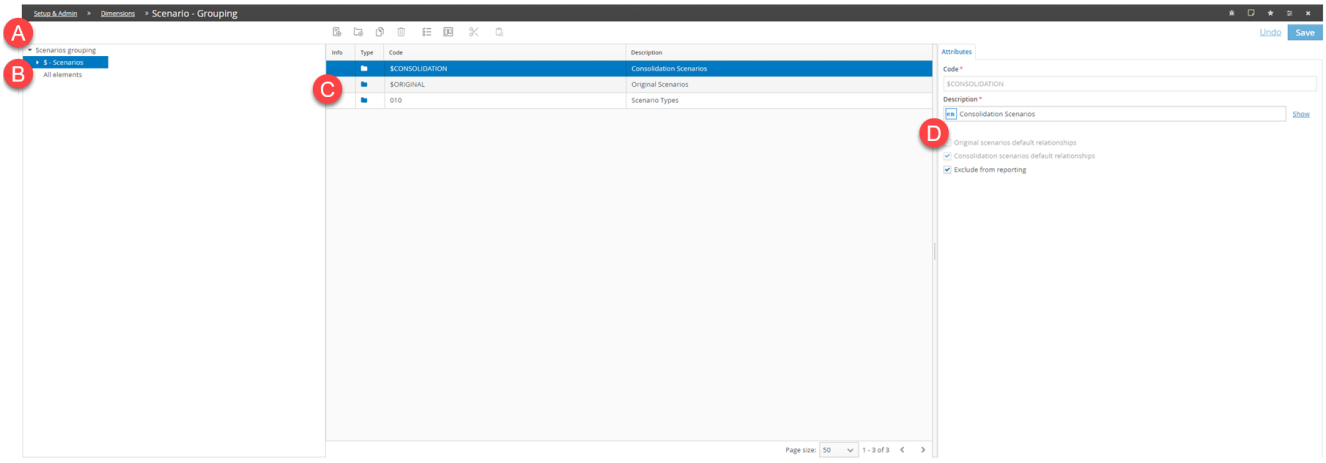

Element	Description
A	Action buttons
B	Hierarchical structure of grouping elements
C	Content of the element selected in the list
D	Configuration tab for the selected element

Action buttons on this page

Element	Description
	This adds a scenario element to the grouping.
	This adds a node element to the grouping.
	This adds a grouping with the same characteristics as the one selected, with the exception of the code.
	This cancels the grouping contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an element from the grouping.
	This moves a node or an element that has been cut to another position in the grouping.

Scenario - Grouping

Dimensions > Scenario > Grouping

Node Attributes tab

Please find below the most important fields.

Field	Description
Original scenarios default relationships	The node is automatically related to each original scenario created.
Consolidation scenarios default relationships	The node is automatically related to each consolidation scenario created.
Exclude from reporting	This relationship is not included in the reports.

Attributes tab

This tab allows you to define the attributes of a scenario. These may vary depending on whether it is an original scenario or a consolidation scenario.

Please find below the most important fields.

Field	Description	Scenario type
Version description	Scenario version. Information used in the reporting phase.	All
Year	The year to which the scenario refers. Information used in the reporting phase.	All
Enabled	This allows you to view the scenario in the selection lists on the various pages.	All
References		
Previous scenario	The scenario used to complete carry forwards and to compare data from the current scenario.	All
Following scenario	The scenario used to compare data from the current scenario.	All
Reference scenario <n>	Scenarios that are useful for comparisons during the reporting phase.	All
Consolidation settings		
Original scenario	The scenario that feeds the consolidation scenario	Consolidation
Holding	The holding company in the consolidation	Consolidation
Currency	The currency used for the consolidation	Consolidation
Exceptions		
Category filter	Category grouping node to be used to filter the data that feed the scenario	Consolidation
Account filter	Account hierarchy node to be used to filter the data that feed the scenario.	Consolidation
Ref. FX rate scenario	This allows you to use an original scenario to read FX rates that is different from the scenario that you are using for the consolidation.	Consolidation
Prefix for FI reclass. journals	The prefix for the journals generated by the reclassification of financial investments.	Consolidation

Scenario Relationships tab

This tab allows you to create relationships between scenarios and the dedicated hierarchies.

Field	Description
Node	Node within the specific hierarchy to which the scenario may be related


Variation/Detail types Grouping page

Dimensions > Variation/Detail types > Grouping

Purpose of the page

This page allows you to view and create variation/detail type groupings. It also allows you to change the attributes of each grouping.

What it looks like

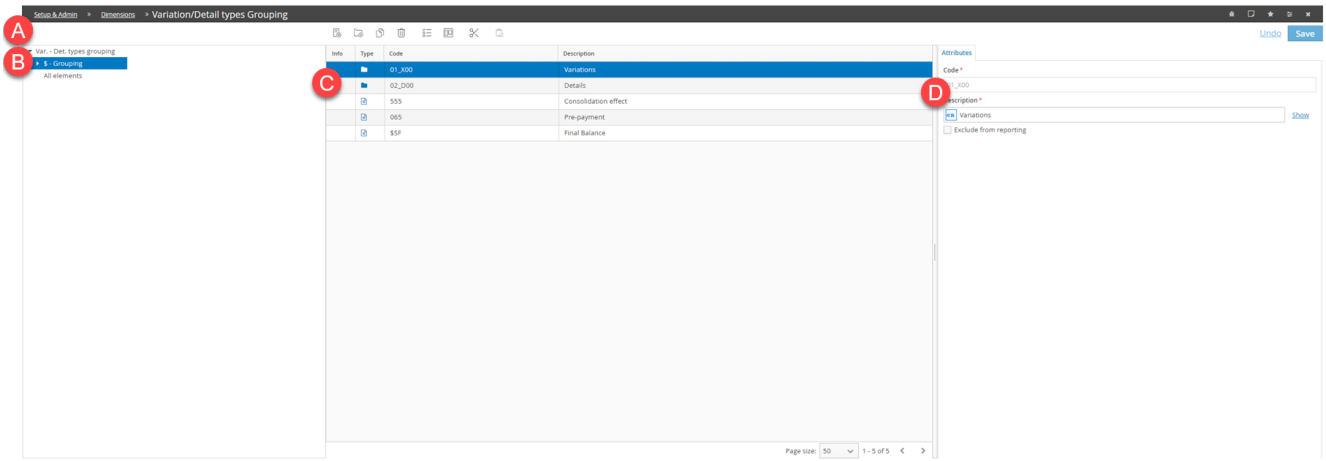

Element	Description
A	Action buttons
B	Hierarchical structure of grouping elements
C	Content of the element selected in the list
D	Configuration tab for the selected element

Action buttons on this page

Element	Description
	This adds a variation/detail type element to the grouping.
	This adds a node element to the grouping.
	This adds a grouping with the same characteristics as the one selected, with the exception of the code.
	This cancels the grouping contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an element from the grouping.
	This moves a node or an element that has been cut to another position in the grouping.

Variation/Detail types grouping

Dimensions > Variation/Detail types > Grouping

Node Attributes tab

Please find below the most important fields.

Field	Description
Exclude from reporting	This excludes this node from the reporting.

Var. - Det. types Attributes tab

Please find below the most important fields.

Field	Description	Values
Var. - Det. type	Var. - Det. type	**Detail**: detail of a normal account **Variation**: variation of a normal account
Conversion	FX rate to be applied when converting into the consolidation currency.	**P&L FX rate** : The P&L conversion method is defined in the conversion rule. It is possible to override, for the individual process, the settings of the default conversion rule and replace them with the chosen FX rate (average FX rate/period average FX rate/year-end FX rate). Used for the P&L, detail accounts and other variation accounts. **Average FX rate**: This converts the cumulative amounts to the average FX rate present in the FX rates table. **Period average FX rate**: This converts the amount for the period to the period average FX rate present in the FX rates table and then adds it to the converted data of the previous period. **Final FX rate**: This converts cumulative amounts to the final FX rate present in the FX rate table. Used for the balance sheet, detail accounts and 'other stock' accounts. Equity accounts are excluded, as these are normally converted at the historical FX rate. **Historical FX rate**: This stratifies the conversion based on the period FX rate. There is no FX rate numeric value. In order to obtain the final converted value, the system adds the converted variations to the initial balance, each based on the type of FX rate indicated in the relative table. Used for equity accounts. **Prev. P&L FX rate**: Applied to the reserve variations that receive the distribution of profit and the balance sheet net result for the previous year. Only used for variation accounts and detail accounts. **Prev. Final FX rate**: Applied to the accounts representing the initial balances. However, these accounts are actually calculated on the basis of the carryforward processing operations, and are not the result of conversions. Only used for variation accounts and detail accounts. **Initial balance FX rate**: this converts incoming area variations or percentage variations in the case of a decrease of accounts converted at the historical FX rate, when the entry or reduction occur at the start of the period, or when the amount refers to carrying forward. Only used for variation accounts. With this kind of FX rate, it is useful to specify the **Reference account for Initial balance/Year-to-date average FX rate** which allows you to calculate the conversion coefficient. Only if the conversion type is "Initial balance FX rates" or "Year-to-date average FX rate". Must be a "Normal" or "Detail" Balance Sheet account. If not present, the system will use the parent account of the control group to which the account being converted belongs as the account. **Year-to-date average FX rate**: this converts outgoing area variations or the percentage variance in the case of a decrease of accounts converted at the historical FX rate, i.e. when the exit or reduction occur during the period and other operations alter the value of the account. Only used for variation accounts. With this kind of FX rate, it is necessary to specify the conversion coefficient in **Reference account for Initial balance/Year-to-date average FX rate**. **None**: This is applied to accounts that are not subject to currency conversion. This is used for 'other variation', 'stock' and 'initial balance variation' accounts.

Field	Description	Values
Standard sign	This determines the sign with which data can be inserted into the account	**Equal to the parent account sign** **Opposite to the parent account sign** **Any**
IC management	The account may receive intercompany values.	-
Control group data		
Balancing	The detail/variation account used to allocate any unbalanced amounts caused by rounding for currency conversion between detail/variation accounts and parent accounts.	-
Initial balance	The account that represents the initial balance; carry forward data processing feeds this account with the final balance of the previous scenario.	-
Calculation rule	The account used by the system to generate the calculation rule, if the rule for creating the calculation rule is “Calculate variation/detail as difference”.	-
Cancel	This identifies the account used by the system to cancel the journal; carry forward data processing feeds this account with an amount equal to the initial balance, but with the opposite sign.	-
FX rate difference	Variation account(s) to which to allocate the FX rate difference generated by the currency conversion of variations, if the relative parent account is not converted at the historical FX rate.	-
Var. Area	Variation account(s) to which to allocate the amounts created for the automatic management of entry and exit variations regarding the consolidation area.	-

Field	Description	Values
Initial Balance FX rate difference	Variation account to which to allocate the FX rate difference generated by the currency conversion of initial balance variations, if the relative parent account is not converted at the historical FX rate.	-
Merger	Variation account(s) to which to allocate the amounts created for the automatic management of mergers.	-
Modify %	Variation account(s) to which to allocate the amounts deriving from the variation of the proportional calculation percentage.	-
Change to equity method	Variation account(s) to which to allocate the amounts originating from the change to the equity method and from the equity calculation in the transition from the line-by-line/proportional to the equity method.	-
IFRS5	Variation account(s) used to allocate the reclassification amounts from IFRS5 data processing.	-

Var. - Det. types Relationships tab

This tab allows you to create relationships between variation/detail types using the nodes.

Field	Description
Node	Node within the specific hierarchy to which the variation/detail type may be related


Control group - Structure and relationships page

Dimensions > Control groups> Grouping

Purpose of the page

This page allows you to view and create control group groupings. It also allows you to change the attributes and characteristics of each grouping.

What it looks like

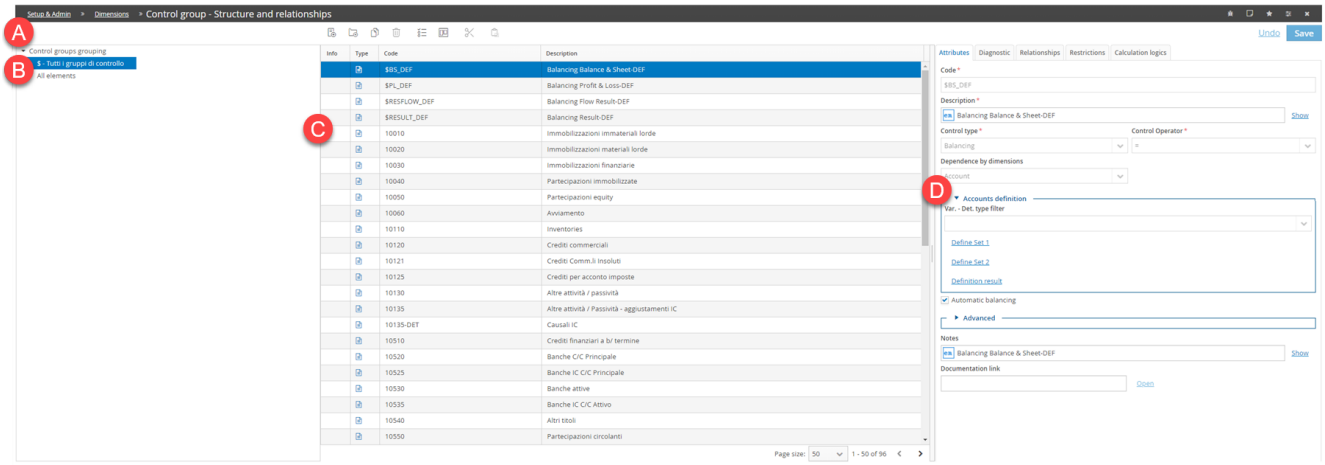

Element	Description
A	Action buttons
B	Hierarchical structure of grouping elements
C	Content of the grouping selected in the list
D	Configuration tab for the selected element

Action buttons on this page

Element	Description
	This adds a control group element to the grouping.
	This adds a node element to the grouping.
	This adds a grouping with the same characteristics as the one selected, with the exception of the code.
	This cancels the element contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an element from the grouping.
	This moves a node or an element that has been cut to another position in the grouping.

Control groups grouping

Dimensions > Control groups> Grouping

Attributes groupings tab

Please find below the most important fields.

Field	Description
Control groups default relationships	The node is automatically related to each control group created.
Exclude from reporting	This relationship is not included in the reports.

Attributes tab control groups

Please find below the most important fields.

Field	Description	Values
Control type	Type of control group created.	Details Variation Balancing Coherence
Control Operator	Operator used for balancing check	Coherence Equality and relational operators
Check by element	Only for Balancing control groups. Control groups are validated at the single-account level rather than on the total of accounts.	
Dependence by dimensions	Any relationships between accounts and the various custom dimensions.	**Account**: the control group is only defined for the account. **Account/ <Custom Dimension>**: the control group is defined in relation to the account and the custom dimension indicated. **Dynamic Account Group**: the control group is defined via a dynamic account group (see page Dynamic Account Groups). Option only available for Balancing or Coherence control groups.
Accounts definition		
Var. - Det. type filter	Only if the 'Dependence by dimensions' field is set to Account. Node of the var. - det. types grouping associated with the control group. For 'Flow' or 'Detail' type control groups, the system uses this information to automatically update the control group when using the 'update details/flows' utility. For control groups of type “Balancing” and “Coherence”, in addition to being used as a filter in associating Set 2 accounts with a Variation / Detail type, this information is also used by reporting.	-
Define Set 1	In control groups with dependence by dimension, by account or by account/custom dimension, set the accounts or account nodes to be considered as parent accounts. In control groups with dependence by dimension, by dynamic group of accounts, set the dynamic group to be used to define the parent accounts.	-
Define Set 2	In control groups with dependence by dimension, by account or by account/custom dimension, set the accounts or account nodes to be considered as children. In control groups with dependence by dimension, by dynamic group of accounts, set the dynamic group to be used to define the child accounts.	-
Definition results	This displays the lists of parent accounts and child accounts.	-

Field	Description	Values
Automatic balancing	The control group is made to be balanced automatically. Option that cannot be activated on control groups with Check by Element or with Dependence by Dimension, by dynamic group of accounts. ***Note**: any unbalanced amounts are reported in a dedicated variation account (Balancing variation).*	-
Advanced		
Validity	This defines a time interval within which the control group may be used.	-
Include in the process if	This defines the conditions for the control group to be used, for data collection purposes.	-
Documentation link	Opens a page outside Tagetik with additional information.	-

Diagnostics tab

Please find below the most important fields.

Field	Description	Values
Severity	Consequences triggered by a balancing error.	**Blocking**: the error blocks the submission process. **Non-Blocking**: the error is flagged up but does not block the submission process.
Data types to check	Type of data checked by the diagnostics carried out on the control group.	**Gross**: runs diagnostics on gross amounts. **Net**: runs diagnostics on net amounts. **Intercompany**: runs diagnostics on intercompany data.
Advanced		
Check original data on	Currency used to carry out the control group balancing check.	**Local currency**: this uses the financial statement currency. **Transaction currency**: this uses the transaction currency.
Check original data for	The level at which the control group checks the 'amount' type categories.	**Company**: the check is carried out for each individual company. **Contributor node**: the check is carried out on the total of the amounts for the companies belonging to a contributor node. **Company and contributor node**: the check is carried out both at company level and at contributor node level.
Check consolidation journals by Company	For 'consolidation journal' categories, this states whether the control group is to be checked only by the journal number or by the combination of journal number/company.	-
Dimensions check		
Check by <custom dimension>	Level of detail of the check carried out within the custom dimension indicated.	Total Lowest level elements Hierarchy nodes
<Custom dimension> hierarchy	This allows you to specify a hierarchy node if the custom dimension check is enabled and the 'Hierarchy nodes' mode is selected.	-

Relationships **tab**

Field	Description
Nodes	Node within a control group hierarchy.

Restrictions tab

Please find below the most important fields.

Field	Description	Value
<Custom dimension> restrictions	Restrictions for the specific custom dimension	**None**: all custom dimensions are accepted. **Restricted**: it is possible to define restrictions on enabled custom dimensions.
Counterparty rule for IC checks	This allows you to enable counterparty dynamic groups in IC checks.	-

Calculation Logics tab

Please find below the most important fields.

Field	Description
Create	This defines whether the control group generates one or more calculation rules.
Calculate	This indicates the criteria used to generate the calculation rule.
Data to calculate	
Run on Gross amounts	The account generated is calculated based on gross amounts.
Run on IC amounts	The account generated is calculated based on intercompany amounts.
Run on journals	The account generated is calculated based on journals.
Other options	
Compensate Company on journals	In a costs/revenues elimination journal, this avoids the system generating two rows with an opposite sign. Only enabled if the account generated is calculated based on journals.
Keep CTP on journals	The counterparty is kept in the account calculation based on journals. Only enabled if the account generated is calculated based on journals.
Keep original currency	The company currency amount and the transaction currency amount are managed separately,


Category - Grouping page

Dimensions > Category > Grouping

Purpose of the page

This page allows you to view and create category groupings. It also allows you to change the attributes of each grouping.

What it looks like

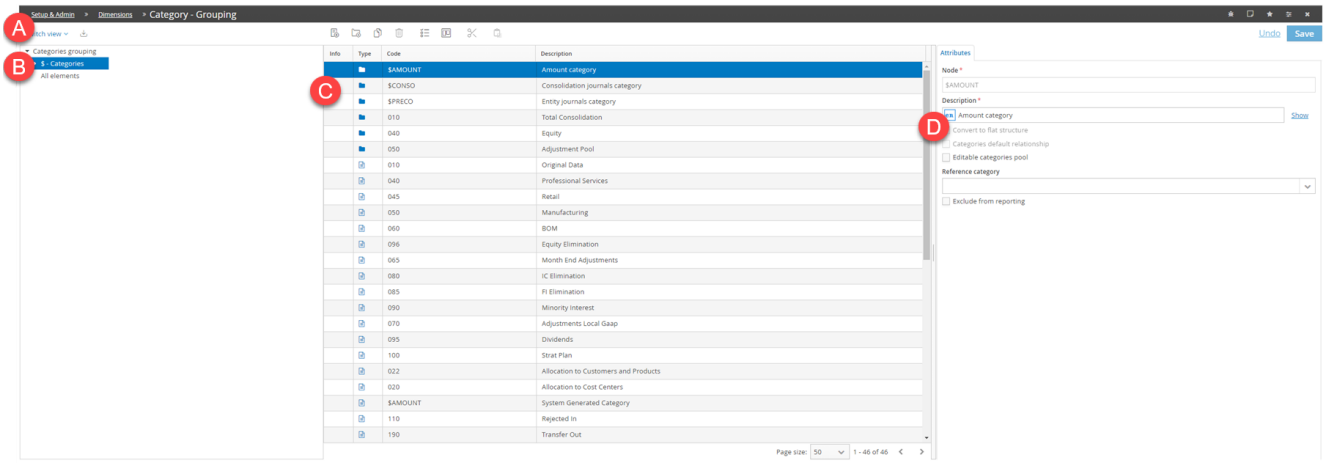

Element	Description
A	Action buttons
B	Hierarchical list of groupings
C	Content of the element selected in the list
D	Configuration tab for the selected element

Action buttons on this page

Element	Description
	This adds a category element to the grouping.
	This adds a node element to the grouping.
	This adds a grouping with the same characteristics as the one selected, with the exception of the code.
	This cancels the grouping contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	This deletes a node or an element from the grouping.
	This moves a node or a category that has been cut to another grouping position.

Categories grouping

Dimensions > Category > Grouping

Node Attributes tab

Please find below the most important fields.

Field	Description
Convert to flat structure	This also keeps the alignment flat structure aligned. This can only be enabled for root nodes.
Control groups default relationships	The node is automatically related to each category created.
Editable categories pool	A set of categories used to keep track of changes, by type of user.
Exclude from reporting	This excludes this relationship from the reporting.

Category Attributes tab

This tab allows you to define the attributes of a category. Different attributes have to be defined depending on the category being configured.

Please find below the most important fields.

Field	Description	Category type
Default for manual journals		
Periodic journal	This specifies that the journal is periodic and not cumulative.	All
Enable carry-forward	This enables the carrying forward of journals for the year or the next scenario.	All
Exclude Reclassifications and ER	This indicates whether equity reclassification and account reclassification must be carried out for the category.	All
Tax calculation method	This specifies how deferred taxes are calculated.	All
Reverse type	This indicates if and how a journal is reversed automatically by the system in the carry-forward step.	All
Consolidation		
Override CTP for segment set equal to Entity	In the consolidation journals, the counterparty entity segment with the same value as the entity is overridden.	Only Consolidation Journals
Proportional calculation method	This indicates how to determine the proportional calculation percentage.	Only Consolidation Journals
Equity valuation method	This defines what the system should do during the equity valuation step where there is an investee company.	Only Consolidation Journals
Minorities calculation method	This defines how to calculate the minorities.	Only Consolidation Journals
Minorities calculation on <Entity>	This defines how to calculate the minorities on company 1 or company 2 of the journal	Only Consolidation Journals
Advanced		
Handle as a journal	The category is handled like a journal category for the calculation of formulas.	Amount only
To run	Data processing is run on the category.	All
Child category	For this category, diagnostics and data processing are carried out together with another reference category.	All
Reference category	Reference category for the child category used to carry out diagnostics and data processing.	All
Monthly splitting type	Method used to process the data.	All
Journal model definition	This allows for a journal model to be created.	All

Relationships tab

This tab allows you to create relationships between categories using nodes.

Field	Description
Nodes	Nodes to which the category is to be related

Banking data tab

This tab allows you to set the characteristics of the data collected for banking supervision purposes.

Field	Description
Notify on individual data	The category is included in the reporting of individual data.
Notify on 36381	The category is included in the reporting of item 36381.
Notify on other intragroup items	The category is included in the reporting of other intragroup items.

Financial statement templates

Contents

This section covers the following topics:

Financial Statement Templates: basic concepts 209
Formulas for financial statement template (FST) items 210
How to work with financial statement templates and items 211
FST&KPI 213
FST & KPI page 214
FST items page 215
FST items 216
Relationships page 217
Relationships 218

Financial Statement Templates: basic concepts

Definition

A financial statement template (FST) is a structure used to aggregate accounts or custom dimensions; FSTs are used to create standard financial statement formats, but also KPIs and other indices that are useful for reporting purposes.

Characteristics of a financial statement template

A financial statement template is a hierarchy with two levels:

- the first level includes elements, called FST items; there are three types of FST item:
  - **parent item**, i.e. this can be related to one or more accounts, as is the case for a hierarchy node. This item shows the sum of the amounts of the relative accounts.
  - **formula**, defined based on a parent item or on other formulas.
  - **description**, this does not represent an account but a 'description' custom header.
- the second level consists of the accounts related to the parent items.

Unlike the case for hierarchies, for financial statement templates it is possible:

- to have 'formula' and 'description' FST items in addition to parent items (which define the concept of grouping nodes)
- to recall FST items from other financial statement templates.

***Note**: the latter functionality is very useful for building KPIs, as FST items from various templates can be used as components.*

CAUTION! It is not possible to use financial statement templates for matrices designed in the Analytical Workspace.

Elements of a financial statement template

A financial statement template is made up of the following elements:

- a header
- the FST items in the template, with specific properties
- the relative accounts/custom dimensions/control types relationships

Formulas for financial statement template (FST) items

Standard formulas

A standard formula is a combination of FST items or accounts defined with the following syntax:

<input element> <operator> <input element> [<operator> <input element>...]

Element	Description
Input element	• current FST items • items from other FSTs, if of the same type • accounts, in the financial statement templates based on the Account dimension only
Operators	arithmetical: +, -, *, / logical: IF, OR, AND, NOT, ||, && comparisons: >, <>, <, >=, <=, = classifiers: TRUE, FALSE

The following syntax must be used to refer to an FST item:

[V,,'<FST item code>']

The following syntax must be used to refer to an item in another FST of the same type:

[V,'<FST code>','<FST item code>']

***IMPORTANT**: before saving the formula, the system will detect and flag up any errors regarding use of the operators, allowing the user to correct them.*

Example

To define a Formula item by adding together the item 50010 (from the current FST) and 90010 from another FST (code 020), the following formula must be used:

[V,'','50010'] + V,'020','50010']

Other syntax examples

It is often useful to calculate KPIs by referring to different scenarios and periods from those included in the form in which the FST is used. For this reason, the input elements may be enriched with the specific time shifts required, using the following syntax.

Requirement	Syntax
FST item V01 relating to previous periods of the current scenario	*[V,,'V01'].onScenarioPeriod(-1)*
FST item V01 relating to the current scenario/period	*[V,,'V01'].onScenarioPeriod($Scenario.code, $Period.code)*
FST item V01 relating to a specific scenario (e.g. 2014BDG), period (e.g. 12)	*[V,,'V01'].onScenarioPeriod("2014BDG","12")*
Account ''00010' relating to the last period of the current quarter	*[C,'00010'].onScenarioPeriod(quarter().lastSP())*
Account ''00010' relating to the last period of the third last quarter 3	*[C,'00010'].onScenarioPeriod(quarter().offsetSP(-3).lastSP())*

The *onScenarioPeriod()* utility can be applied to FST items and accounts, and accepts the following:

- a positive or negative number that indicates a difference
- two strings that specify the scenario code and the period code
- a scenario / period directly, through the use of cell fields

The reference to the scenario or period may be used to guide the logical conditions.

Example of an IF condition

Account 00010 relating to the current period if we are in period 01, otherwise Account 00010 relating to the previous period:

IF($Pe- riod.code == "01", [C, '00010'], [C, '00010'].onScenarioPeriod(-1))

TGKML MD formulas

A TGKML MD formula is a multi-dimensional formula written with syntax belonging to Tagetik TGKML, deriving from the MultiDimensional eXpressions (MDX) language for OLAP (online analytical processing) on the SQL Server.

These formulas may be defined using a dedicated editor and by respecting the following syntax:

- TGKML 1.0 header at the beginning of the script, which is mandatory in an MD calculation logic, except for MD FST formulas.
- The element resulting from the calculation and displayed on the cell making the reference is identified by the reserved element @output. This is a standard temporary account, the result of which is displayed in the cell that makes reference to the MD formula.

For example: @output :=010, 50010}+{010, 50020};

- Only parent FST items may be referred to and not for the custom dimension (advanced financial statement templates) of the current financial statement template or of other templates.
- It is not possible to use temporary accounts as entire parameters of the 'time skip' or 'number of months' functions, for example *Lag()*, *Span()*, etc.
- An MD financial statement template can also be used on reporting forms, which are therefore not linked to a specific process; it is therefore not possible to omit the company hierarchy when reference is made to a company node (*Entity.[NN]* syntax), i.e. the organisational hierarchy specified in the definition of the process.
- Conversion functions cannot be used (*ConvertOriginal*).
- In an MD FST formula, it is not possible to define assignments to physical accounts to perform DB writing. It is instead possible to use assignments to temporary accounts, which can then be reused to calculate the final result (identified by the @output specification – reserved and case-sensitive). If, at the end of the script, several records exist in the @output temporary account, the amounts will be added up.
- Since the final result is always a dimensionless number, it is pointless to specify the output Pro directive (periodic result year-to-date calculation).

Use of TGKML MD formulas in the forms

These formulas can be used in the forms, respecting the following conditions:

- Forms that use the in-memory engine.
- The MD script is run cell by cell, filtering every run with the filters working on the cell.
- The currency is always the one identified by the cell in the form to which the calculation is being applied. The amount in the company currency coincides with the amount in the original currency.
- Data are always read from the "cube" identified by the definition of the form (matrix) in which the financial statement template is being used. The result is always a number shown on the relative cell of the report, and not an n-tuple saved in the DB.

How to work with financial statement templates and items

Concept Information

Financial Statement Templates: basic concepts 209

How to create a financial statement template

Dimensions > Account > ⋮ > FST & KPI

1. Click ⊕: an empty row will appear in the table.
2. In the **Attributes** tab, assign a code to the new template and define all the relative characteristics.
3. Select the options **Account**, **Control type** and **Custom Dimension** in order to define the relationships based on which to create the financial statement template.
4. Click **Save**: the header of the new financial statement template will appear in the table and can be related to the FST items.

How to create an FST item

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items

1. Click ⊕: an empty row will appear in the table.
2. In the **Attributes** tab, assign a code to the new item and define all the relative characteristics.
3. Click **Save**: the header of the new FST item will appear in the table and can be related to accounts and hierarchies.

How to copy a financial statement template

Dimensions > Account > ⋮ > FST & KPI

1. Create a financial statement template and select it, then click ⋮ > **Copy from**.
2. In the **source FST**, select the template from which to copy the structure.
3. Select **Copy accounts mapping also** to also copy the accounts mapping and the FST items, then click **OK**.

How to relate an account to an FST item

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

1. Click ⊕: an empty row will appear in the table.
2. In the **Attributes** tab, in **Account**, select the account to be added from the **Account elements table** root.
3. Select the FST item to which the account is to be related.
4. Click **Save**.
5. To view all of the accounts included within a related node, click **Deployment**: all the consequent relationships will be calculated.
6. To view all the related accounts, click on **Definition results**.

How to relate a node or a hierarchy to an FST item

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

1. Click ⊕: an empty row will appear in the table.
2. In the **Attributes** tab, in **Account**, select the node or the hierarchy to add.
3. Select the FST item to which the node or hierarchy is to be related.
4. Click **Save**.
5. To view all of the accounts included within a related node, click **Deployment**: all the consequent relationships will be calculated.
6. To view all the related accounts, click **Definition results**.

How to exclude individual items from a financial statement template

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

Normally, all the accounts that belong to the nodes inserted in an FST item will be included in the relative financial statement template. To exclude some specific items, proceed as follows:

1. In the table, select the account not to be included.
2. In the **Attributes** tab, select the **Exclude** action, then click **Save**: the account is no longer related to the FST item.

How to check the accounts present in the FST items

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

To check which accounts have been inserted in an FST item after a formula has been applied, it is useful to follow the procedure below.

Select the desired relationship, then click **Definition result**: the **Definition results** page will open, showing all the accounts that have actually been inserted in the FST item.

How to change the header of a financial statement template

Dimensions > Account > ⋮ > FST & KPI

1. Select the financial statement template to be changed.
2. Change the values in the **Attributes** tab, then click **Save**.

How to view the FST items related to a financial statement template

Dimensions > Account > ⋮ > FST & KPI

Select the desired financial statement template, then select ⋮ > **FST items**: the FST items page will open.


FST&KPI

Dimensions > Account > ⋮ > FST&KPI

Purpose of the page

This page displays, modifies and creates financial statement templates.

What it looks like

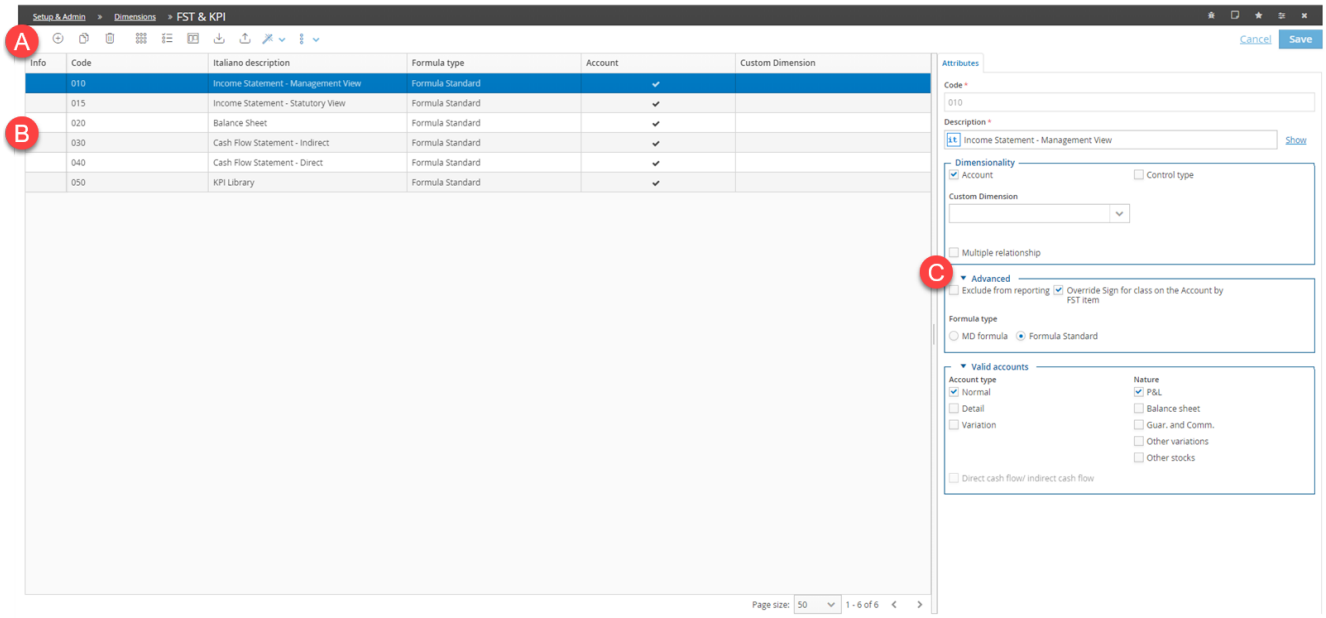

Element	Description
To	Action buttons
B	Data table
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data displayed on the page.
	This adds a row in order to insert a new financial statement template.
	This adds a financial statement template with the same characteristics as the one selected, with the exception of the code.
	This cancels the financial statement template contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	**Recode**: changes the code associated with FST items.
	FST items: this opens the page in order to work on the FST items. **Copy from**: this copies the structure of an FST item in order to create a new one. **Report unmapped accounts**: displays a modal with the report of accounts or items that have not yet been **mapped** to any financial statement template. The entry is visible if 'Account' is active in the 'Dimensionality' section. In the 'Dimensionality' section, 'Account', 'Control Type' and 'Dimension' can be selected, and one, two, three or four tabs can be displayed from the combination. A PDF file can be downloaded from each individual tab, and it is also possible to download a single PDF file that includes all tabs. **Set formula for cube** automatically fills the FST items' **Formula for cube** field of **Standard Formula** type having the **Override formula for cube** field disa**bled** **Convert SUM formulas to relationships** Data processing required by the PowerBI connector to optimise the calculation of formulas containing only sums. It has no impact on other functionalities or on CCH Tagetik's native reporting.

FST & KPI page

Dimensions > Account > ⋮ > FST & KPI

Attributes tab

Please find below the most important fields.

Field	Description
Dimensionality	
Account	This indicates that FST items are calculated as the sum of the accounts related to them.
Control type	Relationships based on the type of control between the reference company and the counterparty company.
Custom Dimension	Any dimension used for the calculations of FST items.

Field	Description
Multiple relationship	The account can be related to more than one FST item in the same template.
Advanced	
Exclude from reporting	This excludes this hierarchy from the reporting. This is useful for hierarchies that have only been created to set-up the system and are no longer significant.
Override sign for class on the account by FST item	For accounts related to the FST item, this sets the sign for class assigned to the same FST item.
Formula type	Formulas that can be used within the template **MD Formula**: only multi-dimensional formulas **Standard Formula**: only standard formulas
Valid accounts	
Account type	Types of accounts that can be related to the financial statement template
Nature	Nature of the accounts that can be related to the financial statement template
Direct cash flow/Indirect cash flow	Specific financial statement templates for direct cash flow and indirect cash flow. Used as an alternative to account type and nature.


FST items page

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items

Purpose of the page

This page allows you to view, modify and create FST items that are related to a specific FST template.

What it looks like

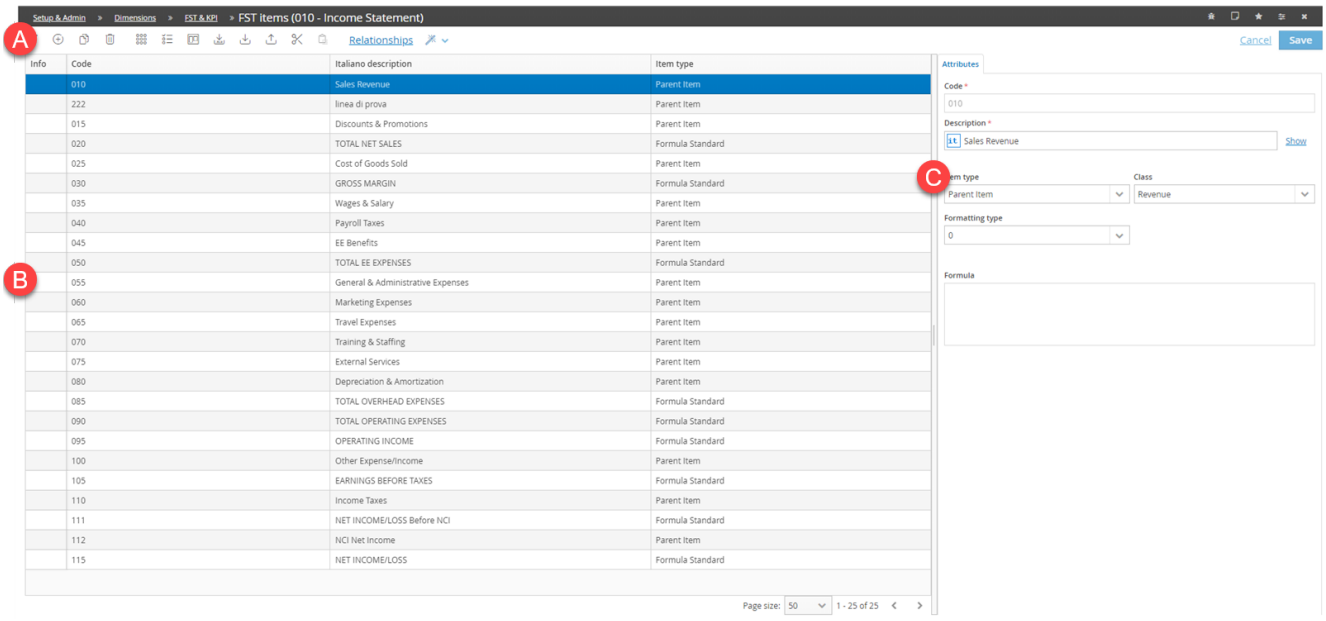

Element	Description
A	Action buttons
B	Data table
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to insert a new item.
	This adds an item with the same characteristics as the one selected, with the exception of the code.
	This cancels the item contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This cuts a financial statement item in order to move it to a different position.
	This pastes a cut item underneath the selected item.
Relationships	This opens the **Relationships** page and shows the account items related to the various FST items.

FST items

 *Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items*

Attributes tab

Please find below the most important fields.

Field	Description
Item type	**Parent item**: the item may be related to one or more accounts. **Description**: header line. The purpose of this is to make the content of the template clearer; it cannot be related to accounts. **Formula**: the FST item is calculated through a formula (standard or multidimensional).
Class	Sign with which the amounts are displayed in the reports.
Formatting type	Report formatting, applying specific templates or style sheets.
Formula	
Add item from	Source to be used to add elements to the FST item, based on a specific formula (only for **Standard Formula** FST items).
Guide	This provides instructions for creating the rule.


Relationships page

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

Purpose of the page

This page shows the relationships between accounts and financial statement template items. It allows you to create relationships for account nodes and to set which single accounts of the node to include or exclude from the definition.

What it looks like

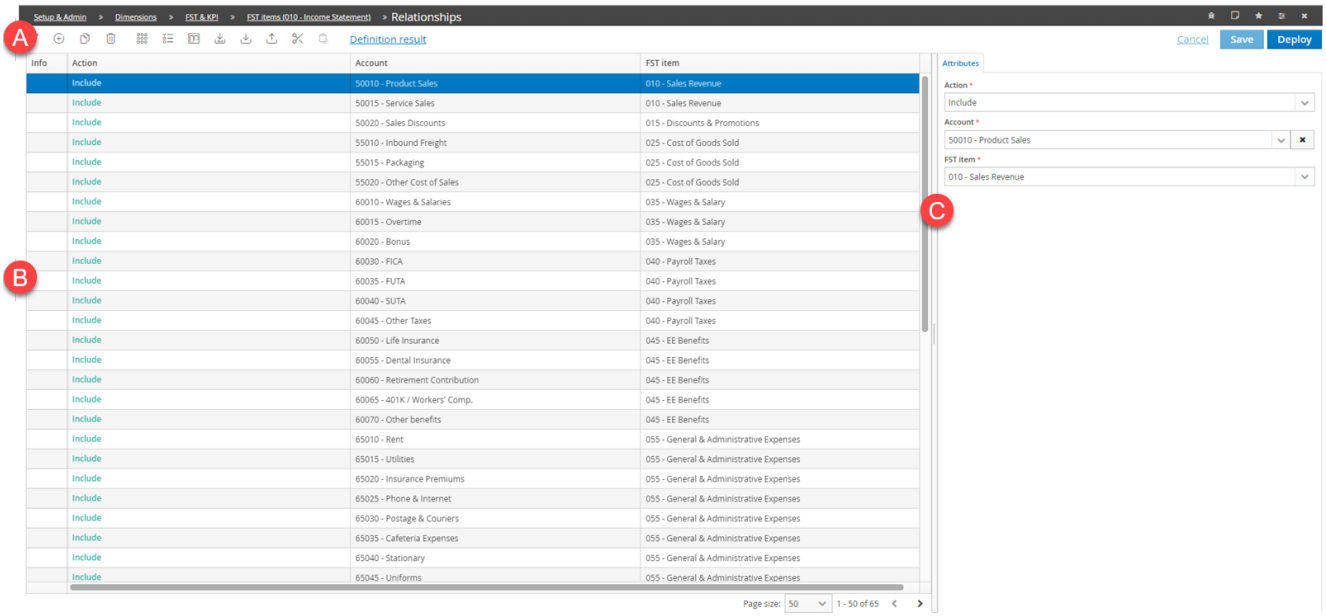

Element	Description
A	Action buttons
B	Data table
C	Configuration tab

Action buttons on this page

Element	Description
	This filters the data shown on the page.
	This adds a row in order to create a new relationship.
	This adds a financial statement template with the same characteristics as the one selected, with the exception of the code.
	This cancels the financial statement template contained in the selected row.
	This shows/hides the configuration tabs.
	Enables multi-row selection to allow mass changes.
	Selects the columns to be shown/hidden in the table and those to be locked when scrolling the table.
	Exports data in Excel format. This file cannot be re-imported into CCH Tagetik.

Element	Description
	Exports the data in Excel format so they can be edited and reimported into CCH Tagetik.
	Imports data from a previously prepared Excel file.
	This cuts a financial statement item in order to move it to a different position.
	This pastes a cut item underneath the selected item.
Definition result	This opens the **Definition results** page, which shows the detailed result of applying the selected relationship formula.
Deployment	This calculates all the relationships triggered by the insertion of a new account or node in an FST item.

Relationships

Dimensions > Account > ⋮ > FST & KPI > ⋮ > FST items > Relationships

Attributes tab

Please find below the most important fields.

Field	Description
Action	Action to be run on the account or selected node: **Include**: include in the FST item, default setting. **Exclude**: exclude from the FST item
Account	Account or node
FST item	FST item to which the element belongs

Deployment

In some cases, in Tagetik it is possible to insert a synthetic parametrization by using the nodes of the aggregation structures. The synthetic information is managed by specific windows named definition window.

In order to make the data processes that use the synthetic information more efficient, Tagetik provides a deployment tool which is able to read the information defined in the definition windows as well as the aggregation structure in order to understand how the nodes are made and, with one single deployment data processing, to define a series of "deployed" tables containing very detailed information.

So the deployment prevents the system from having to run the deployment information more than once, causing delay, whenever it needs to use collected aggregated information.

Moreover, the deployment allows obtaining the modifications made to the elements of a hierarchy without having to update the definition windows every time.

 Therefore, it is necessary to run the deployment whenever a modification is made to the parametrization, since the "deployed" tables provide a detailed picture of the synthetic definition at a precise moment in time. So any modification made later, will be acquired by the system by rerunning the deployment.


The Deployment can be run:

- via **General Deployment**, in this case, all elements present in the selected elements tables will be run;
- inside a Job, in this case, you can select the specific elements you want to deploy.
- via Workflow Task , launched from "Process cockpit function" on page 510

General Deployment

The General Deployment window can be accessed from the **General Deployment** tile via Navbar > Tools > General Deployment

The window shows the deployments tree;

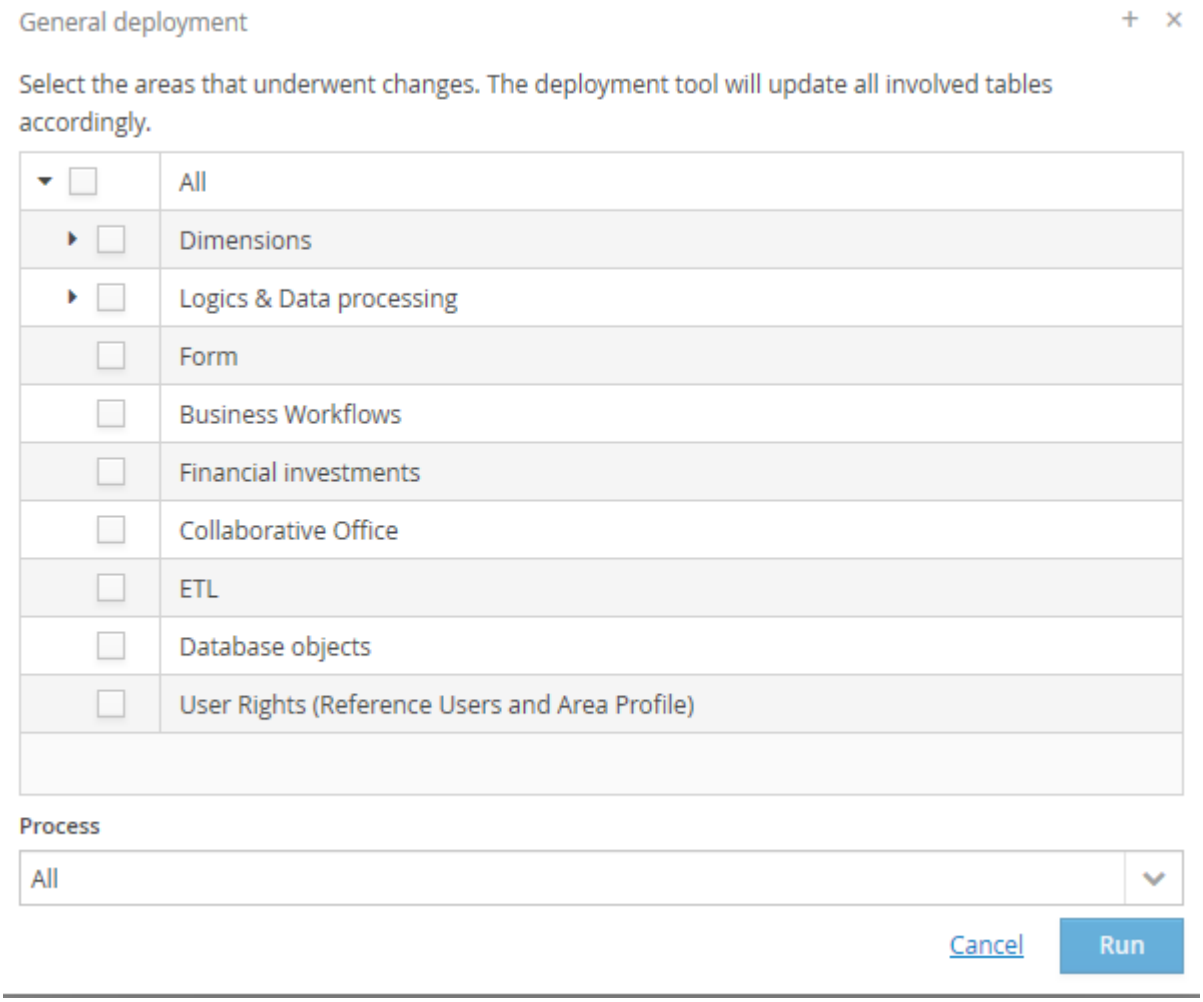

In order to select the deployments to be run, it is possible to:

- select each deployment by ticking the related check-box;
- select all the deployments of a group by ticking the corresponding outer check-box;


It is possible to filter the execution by specifying an application process.

In case of deployment of user rights on the Entity dimension's restrictions, the system processes only the organizational hierarchy related to the selected application process.

In the **Advanced filters** box, it is possible to further filter the execution by:

- Original Scenario or Period
- Consolidation Scenario or Period
- Entity dimension's hierarchies
- User

By clicking on "Schedule", it is possible to organize the execution of the deployment based on the parameters set up by the user (for further details, see the "Scheduling" chapter)

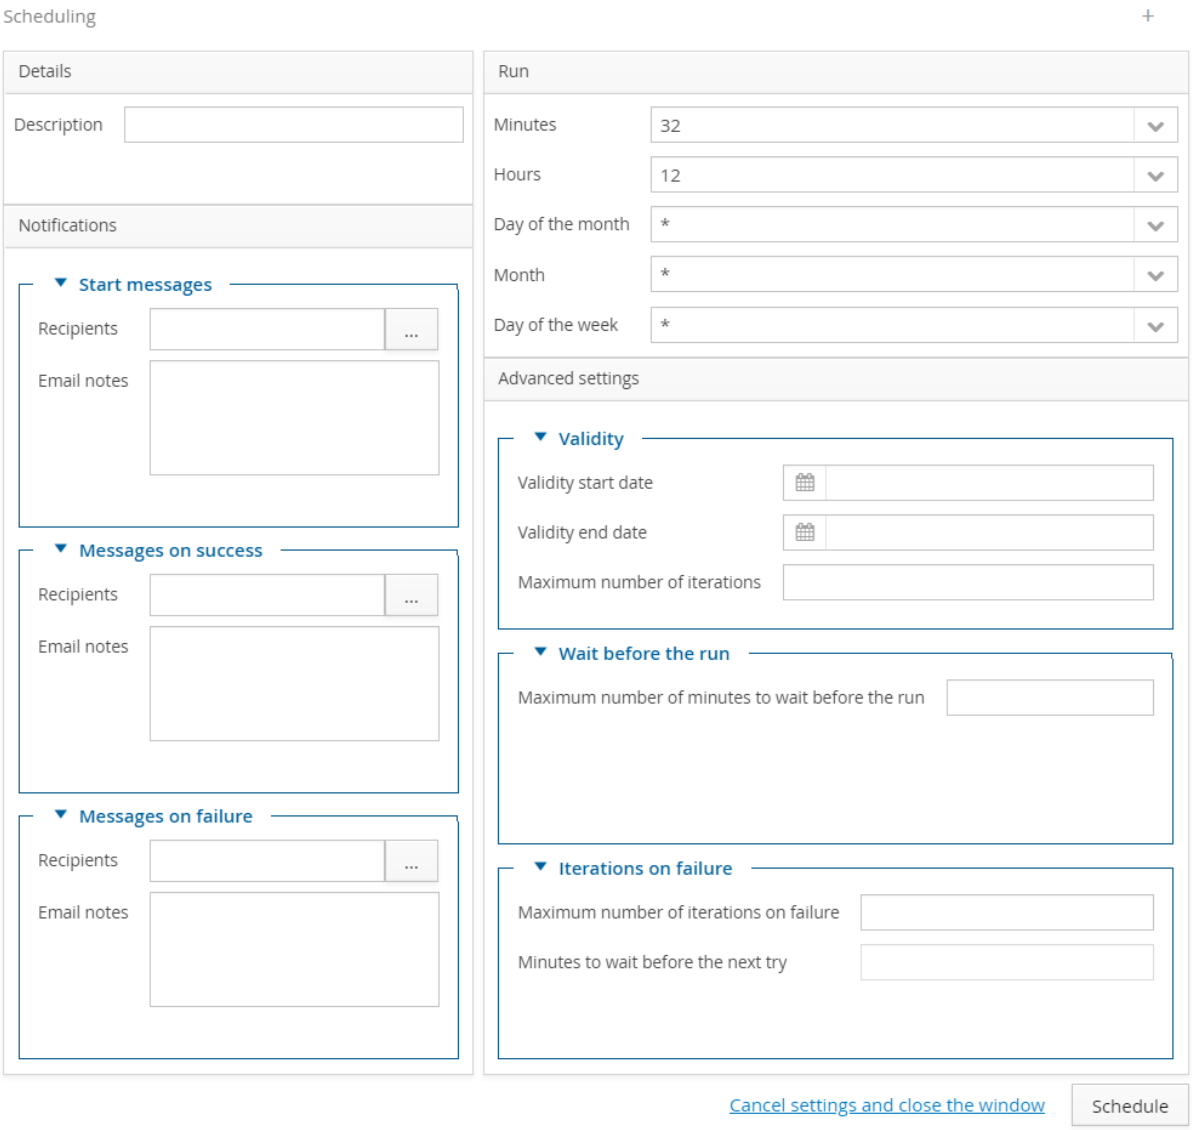

Whereas, selecting "Run" launches the data processing. Once completed, the **Data processing is complete** window pops up showing the performed operations and the exportable detail log.


Please note that in some cases the deployment can involve a big amount of data and therefore its execution could take very long time. So, whenever possible, it is recommended that you limit the area of data (e.g. by specifying the application process) for which the deployment must be run and run only the deployments that are really needed.

Personal Data Protection

In order to comply with current data protection directives, various functions have been introduced.

Setting an Analytical Dimension

When creating an analytical dimension, it is possible to activate the **Personal Data Protection** option in the *Personal Data* pane.

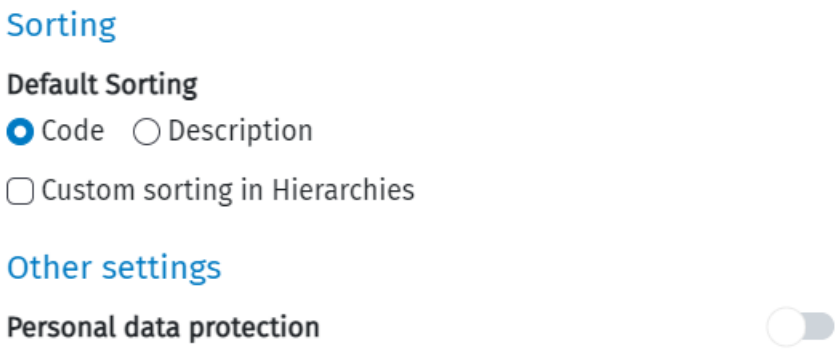

Operation

If **Personal Data Protection** is enabled, Dimension data will be stored encrypted, and decrypted once displayed. Activities performed on this Dimension will be recorded in log files.

Changing this field later will encrypt or decrypt all elements of the Analytical Dimension. This must be confirmed by accepting a warning window, and will launch a data processing to make changes to the database.

Restrictions


If the user is not authorised to handle sensitive data, via a role with *0004095 - Personal Data Protection* enabled, then the field will not be visible, and the Analytical Dimensions created will be considered unmarked for Personal Data Protection.

Enforcement of the right to be forgotten of personal data

This function is only possible for users who have associated a role with the function *0004110 - Right to be Forgotten* enabled, otherwise the following field will not be visible and the function will not be allowed.

If the dimension is marked as containing sensitive data, it is possible to apply the right to be forgotten for all selected items in the grid from the dimension list page.

"Apply the right to be forgotten" is an item in the menu of the "Wizard" button. A pop-up will open where the previously selected items are shown in the grid.

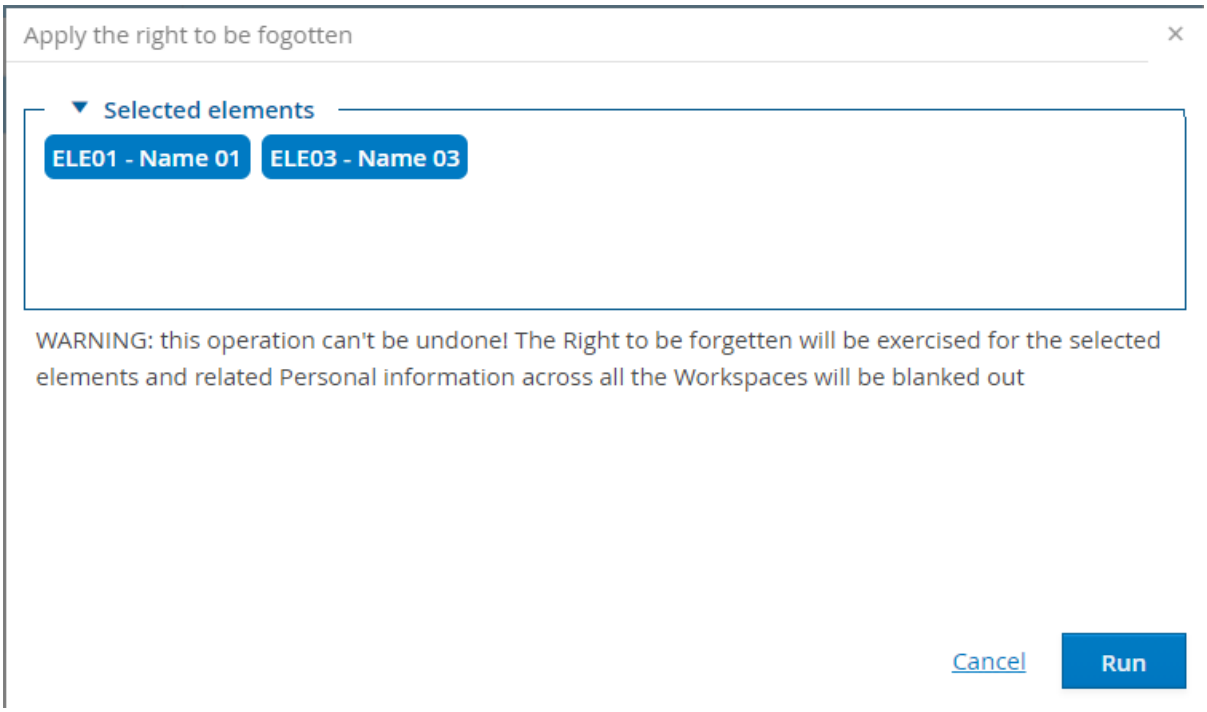

To ensure data consistency, all of the following points must be valid, otherwise we will get an error message and it will not be possible to start data anonymisation processing:

- All workspaces using the dimension must be offline.
- There must not be an update procedure in progress (e.g. DATASET UPDATE)
- There must be no data processing (check, apply, remove) in progress for the protection of personal data.

When anonymisation data processing is in progress, it is not possible to change the online/offline status of a dataset, a workspace, and it is not possible to launch the data processing (check, apply, remove) for the data protection purposes.


Once data processing is completed, the following will be anonymised:

- all descriptions of the grid items selected in the 'Apply right to be forgotten' popup

- all fields marked as personal data used in all records (partitions, datasets, workspaces and all types) that refer to the items selected in the 'Apply right to be forgotten' pop-up.

Data tables clean-up

Tagetik provides a convenient data processing to delete wrong data or data that are no longer useful
Setup & Admin > tile Data processing > Data Clean Up > Data tables
Navbar> Data processing > Data Clean Up > Data tables

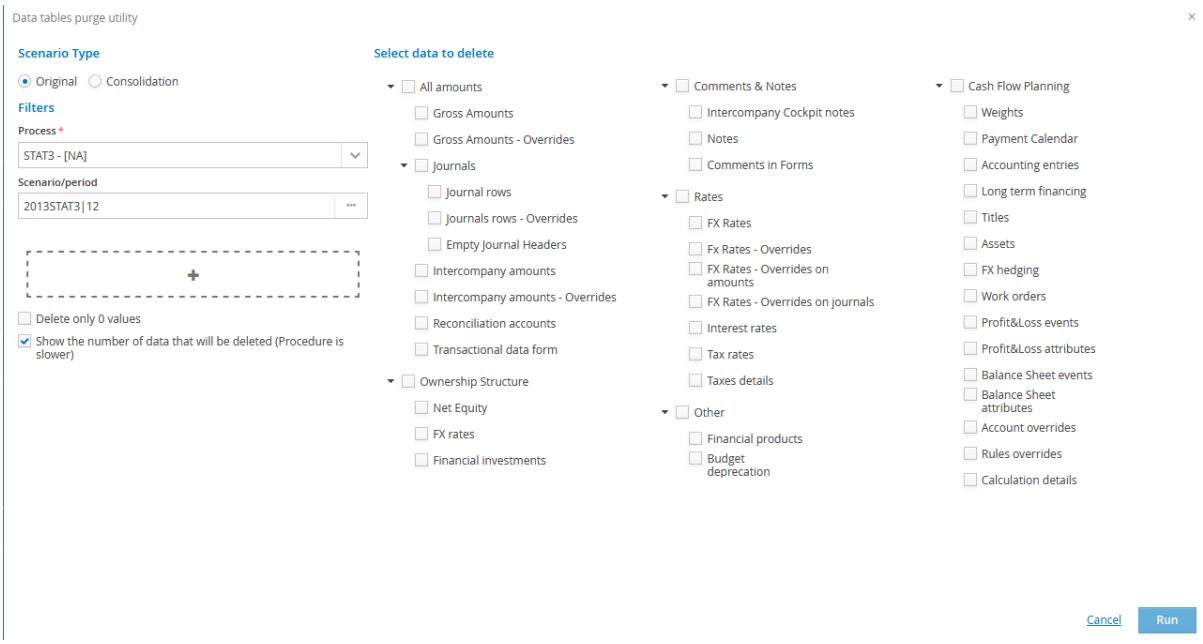

It is necessary to filter the data to delete by **Process** and **Scenario/period** and then add, if necessary, additional specific filters : User (UserUpd), Category, Account, Entity, Entity node, Custom dimension 1-5, Date (DateUpd), Origin (this option is very useful when you want to massively delete all data with a specific origin for the specified process)

For some deletions it is not necessary to select the Scenario/Period:

Cash flow, Weights
Cash flow, Payment Calendar
Cash flow, Accounting entries
Cash flow, L/T Financing
Cash flow, Titles
Cash flow, Assets
Cash flow, FX hedging
Cash flow, Work Orders
Cash flow, Calculation details
Cash flow, Account overrides
Cash flow, Rules overrides
Ownership structure register, Net equity
Ownership structure register, FX rates
Ownership structure register, Financial investments
Other, Financial products
Other, Budget deprecation

Some specific filters are not available for certain types of deletion

Delete only zero values if enabled, it deletes only the rows with amount zero.

The deletion can be run on the following elements:


- **Amounts**

    - Gross amounts
    - Gross amounts - Overrides
    - Adjustments
    - Journals rows
    - Journals rows - overrides
    - Delete the journal headers if empty
    - IC amounts
    - IC amounts - overrides
    - Reconciliation accounts
    - Transactional form data
- **Ownership structure register**
    - Net Equity
    - FX rates
    - Financial investments
    - Other information
- **Comments and Notes**
    - Intercompany Cockpit notes
    - Notes Forms
    - Comments Forms
- **FX rates**
    - FX rate type
    - Overridden FX rates
    - Specific overridden FX rates on amounts
    - Specific overridden FX rates on journals
    - Interest Rates
    - Tax Rates
    - Taxes detail
- **Other**
    - Financial product: calculation details
    - Depreciation: calculation details
- **Cash Flow Planning**
    - Weights
    - Payments calendar
    - Accounting entries
    - L/T Financing
    - Titles
    - Assets
    - FX hedging
    - Work orders
    - P&L events
    - P&L attributes
    - Balance Sheet events
    - Balance Sheet attributes
    - Account overrides
    - Rules overrides
    - Calculation details

After specifying the process and the filters to identify the data to delete, it is possible to run the clean-up operation just by clicking on **Run**.

Download Purge Queries

When the **"Show the number of data that will be deleted (Procedure is slower)"** option is enabled, the window below pops up

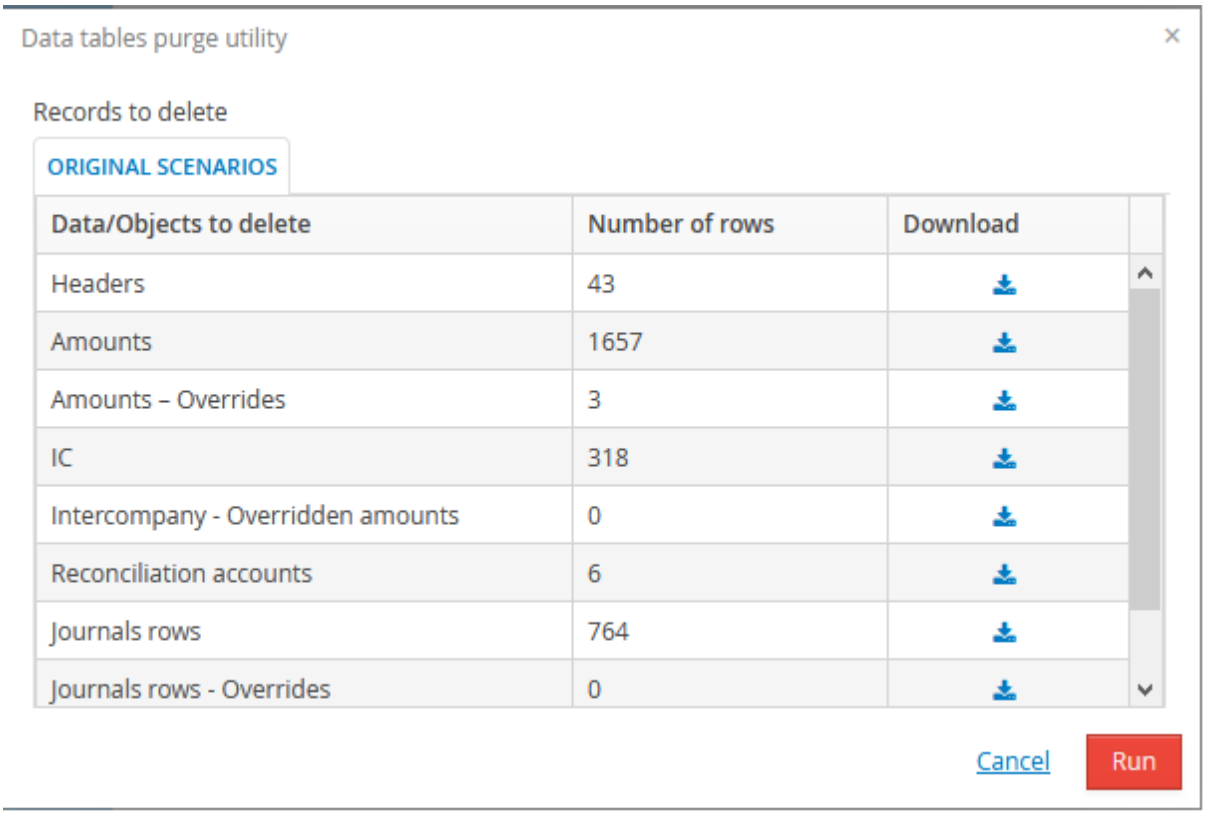

For each "Data/ Objects to delete" it is possible to Download the related queries that can be run by clicking on Run.

After downloading the file, you can run each query (on any Query Analyzer) to display the rows that will be deleted.

For each download file, if all queries are run, the total number of rows will correspond to the value of the "Number of rows" column.

Then you can decide whether to run or to abort the operation. If you decide to proceed with the deletion, the following applies.

Once the operation is completed, the system displays a *Data processing is complete* window from which it is possible to extract the detail log or export such log in Excel format

It is possible to hide this window by flagging the "**Show only in case of error**" field

Processes with dimension by step

Contents

This section covers the following topics:

Processes: basic concepts 227
Processes with dimension by step 228
Process creation page 229
Page for Definition of Process with dimension by step 231
Create processes 233
Managing processes 234
Deploy processes 235
Archiving process data 235

Processes: basic concepts

What are processes

A *process* is the component that CCH Tagetik uses to acquire, submit, process and log data on the customer's activity, allowing them to take control of the quality of their data, reporting and planning. It consists of a workflow, or a sequence of activities, in which authorised users insert, submit and approve data in accordance with a finite logical/functional flow of work.

Working with processes in CCH Tagetik means recreating on the system your actual workflow used to collect and submit data in-house, processing that data accurately, and generating valid documentation for said data that meets your business's short- and long-term needs.

Traditional processes and processes with dimension by step

Traditional processes act solely on the Entity dimension, while for processes with dimension by step you can specify a different dimension for each step of the process.

For more details on process with dimension by step, see Processes with dimension by step.

Function

CCH Tagetik Processes can be used both to enter and to process data in a centralised and accurate manner to produce reports, and to collaboratively manage data in order for it to be submitted and in order to monitor and plan business activities.

Based on their configuration, process workflows can be used to guide the collection and processing of all the data of an individual entity or company (entity workflow) or to submit an entity's individual journals (journal workflow).

Process structure

To create data collection and processing logics specific to the entity's business requirements, there must be the following structures:

- the *time dimension* of the activities documented by the process
- the *entity* authorised to enter and submit data
- the *logical steps* of the process
- the *accounts* on which to collect data
- the *rules* for data entry
- the *processing modes* for specific data or groups of data.

These structures are defined in the *Business Workflow*, *Data model*, *Data entry and submission rules* and *Data Processing* modules and are used by processes according to the logics defined at the level of the individual process.

The management of data within processes

Data is managed according to the following steps:

- *data entry*, i.e. entering data in the application database.
- *submission*, i.e. the validation and locking of original collected data or calculated data for each individual dimension.
- *processing* data according to the system rules and logics and/or rules and logics defined by the user.
- *consolidation*, i.e. the calculation of data at the group level as if it were a single entity for legal and reporting purposes.

The necessary elements for these steps are configured on the following pages of CCH Tagetik :

Configuration	Page
Data entry	Data Entry and Submission tile (see Data entry and submission in the dedicated section)
Submission	
Data Processing	Data Processing tile (see Data Processing: Introduction in the dedicated section)
Consolidation	

These general configurations are applied automatically to all processes set up in CCH Tagetik . The generic rules can be overridden to adapt them to a specific process. See Data Entry & Submission Rules section and Data Processing Section in the dedicated section.

Process configuration

CCH Tagetik has a default process ($Process) which allows you to use CCH Tagetik as a *data mart*, or a container for a subset of data and for reporting. This process is therefore predefined, but it still requires *Process Data Model* configuration (see Introduction to the Process Data Model).

***IMPORTANT**: like all system elements ($), the default $Process must not be deleted. However, it may be modified by configuring the PDM.*

When CCH Tagetik is used as a collaborative tool, a dedicated process must be created according to the entity's needs.

This requires intervening on several separate aspects in the various sections of the Definition of Process with dimension by step Page.

Process deployment

In CCH Tagetik, running deployment means applying to the system the parameters configured by the user in the interface, or updating the database tables with those parameters.

When deployment is run on processes, the system updates the database tables that manage the data entry rules in the various steps of the process and the checks on data prior to submission.

Deployment can be run on the **Process definition** page by the administrator user. Deployment can be run on all of the process's parameters by clicking the **Deploy** button, or some of the process's parameters by clicking the button corresponding to the configuration sections.

The parameters included in the last deployment, and therefore already applied within the system, can be consulted on the **Definition result** pages (e.g. **Definition result: Mapping task workflow**).

The order in which the records are inserted in the definition tables is important, since this determines the order in which the deployment processes the rows.

Individual processes can also be deployed from the general deployment page (seeDeployment in the dedicated section).

Processes with dimension by step

Introduction

Processes with dimension by step can be used to associate the various steps of the process with various organisations of CCH Tagetik dimensions. You can, for example, associate different organisations with the steps of data collection and partially or fully manage entity processes on the Analytical Workspace.

Operational budgets: processes fully on the Analytical Workspace

For this budget type, sales data collection is managed by Sales Manager, while overheads are managed by cost centre. Thus, it is useful to develop the process by managing the steps for two distinct dimensions: Sales and Cost Centres, working on the Analytical Workspace

Budget consolidation: processes on the Analytical and Financial Workspaces

In this case it is useful to develop the process partially on the Analytical Workspace, for data collection, and partially on the Financial Workspace, for consolidation.

Instead, monthly closings, statutory consolidation and the financial budget by Entity are more suited to processes linked only to the Entity dimension, which is managed fully on the Financial Workspace.

Management of dependencies

For processes with dimension by step, you must define the policies used to check the submission/rejection of nodes and lowest level elements of the hierarchy, based on the status of the previous and subsequent steps.

Management of the dimension hierarchies

The hierarchy defined by the dimensions reflects the approval and data entry workflow used in the process.

Process creation page

Admin


Application database > Processes tile

Application database > Navbar > Processes & Workflows > Process

Purpose of the page

This page shows the list of processes defined in CCH Tagetik; it allows you to configure them and create new ones.

What it looks like

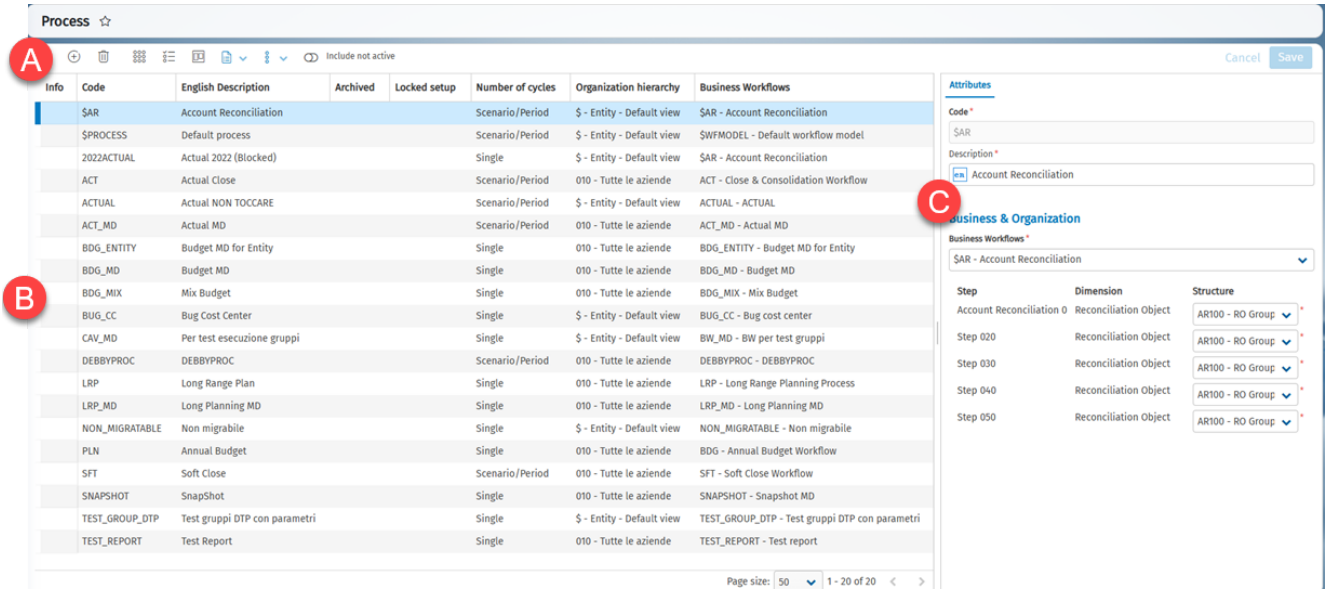

Element	Description
A	Tool bar
B	List of processes
C	Configuration tab

Commands on the page

Element	Description
	Process Control groups: allows you to generate a report in Excel format containing a list of the control groups excluded from the selected process.
	Some actions are available only for traditional processes, not for those with dimension by step. • **Process definition**: opens a page to configure the selected process. • **Clone process**: opens a window to create a new process based on the selected process. • **Create backup on offline tables**: opens a window to archive data on offline tables.
Include not active	Show/hide archived processes.
1	Shows the number of changes not yet saved.

Page fields

Please find below the most important fields.

Field	Description
Archived	✔: the process has been archived and can no longer be defined.
Locked setup	✔: the modification of one or several of the process's parameters or logics is locked.
Number of cycles	• **Single**: submission/rejection takes place at the same time on all scenarios/periods linked to the process. • **Scenario/period**: submission/rejection takes place by scenario/period.
Business Workflow	Flow of activities associated with the process. This is requested on creating the process and establishes whether the process is traditional or with dimension by step. Only for processes with dimension by step, the **Structure** field can be used to associate an element of the structure hierarchy to each step.
Origin	Origin of the data. The data may originate from data processing or be entered by a user.

Page for Definition of Process with dimension by step

Admin


Application database > Processes tile > > Pr ocess setup

Application database > Navigation panel > Processes & Workflow > Process > > Process setup

Purpose of the page

This page allows you to define the characteristics of the selected process with dimension by step.

What it looks like

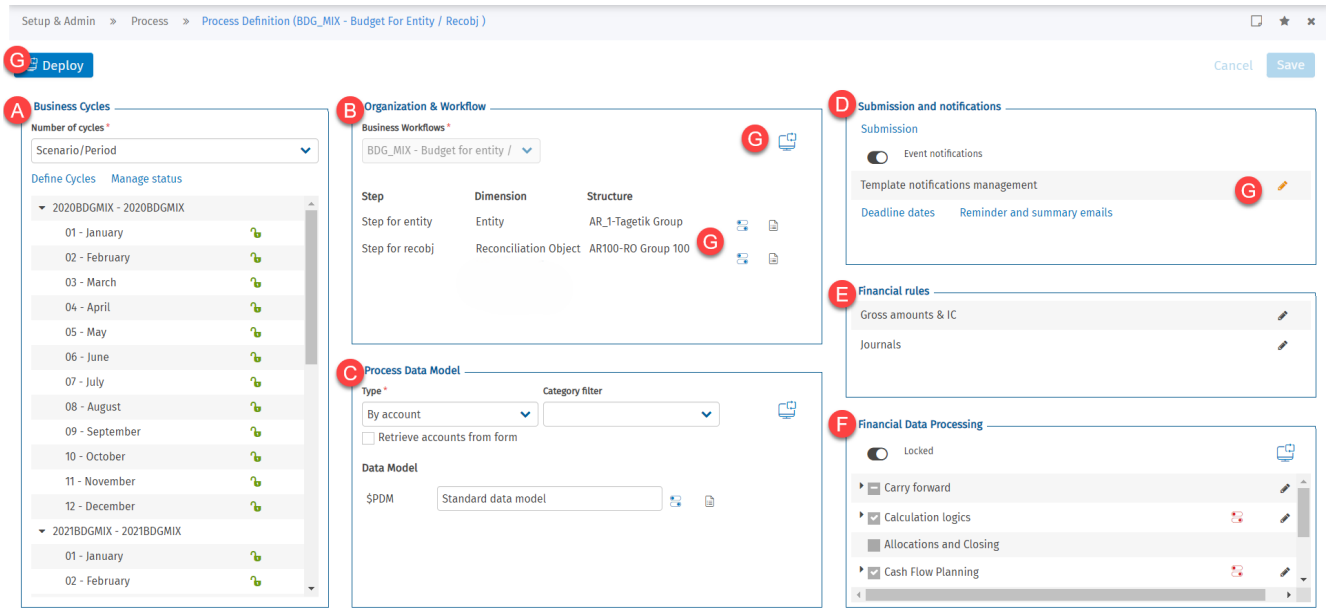

Element	Description
AA	Business Cycles section
B	Organisation and Workflow section
C	Process Data Model section
D	Submission and notifications section
E	Financial Rules section
F	Financial Data Processing section
G	Action buttons on this page

Page sections

Section	Description
Business cycles	Defines the process submission type (single submission, or submission by period/scenario). Period status: • : locked. Data cannot be loaded for that period. • : unlocked. Data can be loaded for that period.
Organisation and workflow	The Business Workflow breaks down the process of data collection and calculation into different logical steps. Each logical step is then broken down into activities to be run in a specific order. Activities can be different depending on the dimension. Allows you to define which task workflow to use for each lowest level element and dimension node and to consult the deployed results of that definition. For processes with at least one step By Entity, it allows you to: • manage entity exceptions and browse the deployed results of that definition • map the entity journals by entity/task workflow, and browse the deployed results of that definition
Process Data Model	Defines the subset of accounts or accounts/categories on which to collect, submit and process data of the process for each individual step.
Submission and Notifications	Defines the submission rules for each step and for the entire process, and manages the notifications of specific events.
Financial rules	Section available only if at least one step has been defined by entity. Defines any overrides in managing data entry of amounts and journals. It also allows you to customise the generic parameters of the entity on the original scenarios, and to override the FX rate table of the entity on the process.
Data processings	Defines the data processing operations managed by the process and the related logics/rules to apply. Allows you to set overrides and requirements.

Actions in the Business Cycles section

Element	Description
Define Cycles	Opens the window for setting business cycles (Define Cycles window).
Manage status	Opens the window to lock or unlock data collection on specific scenarios/periods, and to archive data (Manage status window).

Actions in the Organisation and Workflow section

Element	Description
	Deploys the section's settings.
Journals mapping	Opens the mapping task journal workflow page
Journals mapping	Opens the Definition result: Mapping task journal workflow page showing the result of the deployment of the defined relationships.
Entity exceptions	Opens the Entity exceptions page.
Entity exceptions	Opens the Definition result: Entity exceptions page showing the result of the deployment of the defined relationships.
	Opens the mapping task workflow page (Mapping task workflow page).
	Opens the **Definition result: Mapping task workflow page** showing the result of the deployment of the relationships defined.

Actions in the Process Data Model section

Element	Description
	Deploys the section's settings.
Inherit account from form	(Only for Process Data Models by account) Includes in the process the accounts specified in the related forms.
	Opens the "Define Process Data Model page" on page 415
	Opens the **Definition result: Process Data Model page**.
	• **Copy from**: allows you to copy the Process Data Model configurations of an existing process onto the same row of the Process Data Model. • **Cancel**: allows you to cancel the Process Data Model from the process.

Actions in the Submission and Notifications section

Element	Description
Submission	Opens a page to set up the submission rules(Submission rules page).
Checking rules	Opens a page to set up the checking rules (Checking rules page).
Event notifications	Enable/disable notifications of specific events.
	(Only if notifications are enabled) Opens the page to manage email templates (Email templates page).
Deadline dates	(Only if notifications are enabled) Opens the page to set the deadline dates for submission (deadline dates for submission page).
Reminder and summary emails	(Only if notifications are enabled) Opens a window to set up reminder and summary emails (Reminder and summary emails window).

Actions in the Financial rules section

Element	Description
	Opens the page to override the specific rule as compared to the general settings.

Actions in the Financial Data Processing section

Element	Description
	Deploys the section's settings.
Unlocked	Allows you to select and potentially override data processing.
 **Locked**	Prevents data processing from being selected or overridden.
	Allows you to override the rules of the relative data processing and shows their status: •  : general rules are currently applied. • : general rules have already been edited by the current user or another user with the necessary rights.
	Allows you to enter the requirements of the relative data processing. •  : incomplete or incorrect requirements •  : edited requirements

Create processes

 Application database > Processes tile

Application database > Navbar > Processes & Workflows > Process

Create a process

1. Click : a new row will appear.
2. In the **Attributes** section, enter the process code and a description.
3. Select the desired Business Workflow. For the process to be able to use dimensions other than the standard ones, including the Analytical Information Hub, select a Business Workflow with dimensions by step.

   ***IMPORTANT**: to create a process with dimension by step, select a Business Workflow with the **Dimension by step** option selected.*

4. For each step identified in the process, in **Structure** enter the dimension hierarchy that defines the approval workflow and data entry workflow used in the process.

***IMPORTANT**: for the steps associated with the entity dimension, select the same hierarchy for all steps.*

5. Click **Save**.

Create a process based on an existing process

1. Select the source process.
2. Select > **Clone process**: the **Clone process** window will open.
3. Enter the code and description of the new process.
4. To customise scenarios that have been created, click **Also clone Scenarios**.

Managing processes

Application database > Processes tile

Application database > Navbar > Processes & Workflows > Process

Introduction

The procedures for managing and modifying processes are listed below.

Change the description of a process

1. Select the desired process.
2. In **Attributes**, change the process description.
3. Click **Save**.

Clone a process

1. Select the source process.
2. Select > **Clone process**: the **Clone process** window will open.
3. Enter the code and description of the new process.
4. To customise scenarios that have been created, click **Also clone Scenarios**.

Create backup on offline tables

This procedure can only be run on processes where submission is set to by scenario/period.

1. Select the desired process.
2. Select > **Create backup on offline tables**: the relative window will open.
3. Click : the **Items selection** window will open.
4. Select the scenarios/periods of which you want to create a backup and click **OK**: the corresponding scenario row will appear in the **Create backup on offline tables** window.
5. Enter a code and description for every scenario.
6. Click **Run**.

Deploy the process

Application database > Processes tile > select process > > Process setup

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition

Click **Deploy**: the full deployment of the process will be run.

Deploy processes

Application database > Processes tile > select process > > Process setup

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition

Perform full deployment of the process

Click **Deploy**: the full deployment of the process will be run.

Perform partial deployment of the process

Click in a specific section: deployment is only run for data related to the section in question.

Archiving process data

Operation of archiving

Collected data can be archived in dedicated database tables, called *offline tables*, which have the same content as the original data tables. Storing the data offline is useful to reduce the size of the operational database, which can be extremely large at full operation.

***Note**: the offline tables are indicated with the prefix H_.*

When data are archived, they are moved from the original tables to the offline tables. Specific scenarios are created in these tables for this purpose. After the data has been stored offline, the specific scenarios/periods are locked. When all the scenarios/periods of a process are locked, the process itself is locked and stored offline.

The offline storage of the data can be reversed, but this does not automatically unlock the original scenarios/periods.

***Note**: data stored offline can be used for reporting, but not for data entry or data processing.*

Specifics for the HANA database

If you are using a HANA (Hana Data Tiering) database, all the partitions regarding the process scenario/period stored offline will be moved from the HOT area to WARM area to optimise the storage costs. When restoring data, all the partitions regarding the process scenario/period will be moved back to the HOT area.

If the "004203" function is active, the processes page shows the **Hot/Warm partition alignment** function. You can use this function to realign the partitions between the HOT and WARM areas, based on the status of offline storage of the scenarios/periods of the various processes the partitions refer to.

For example, this function is useful in the following cases:

- to clone a workspace,
- to update a workspace based on another workspace to which the user has access,
- to realign partitions that are incorrectly aligned.

Business Workflow

Contents

This section covers the following topics:

Business Workflow concepts 237
Business workflow with dimensions per phase 239
Define a Business Workflow 239
Business Workflow page 243
Steps page 243
Step Configuration window 244
Task workflow page 245
Business Workflow task icons 247

Business Workflow concepts

What is Business Workflow

A Business Workflow is a specific workflow. It is prepared in CCH Tagetik in such a way that users responsible for entering and processing data can do it in an order that matches the entity's own way of working.

Business Workflow structure

The Business Workflow is made up of various logical and temporal steps, called *steps*. All logical steps can be preparatory to the next step and parallel to other steps. They are identified by a code and contain one or several activity flows, called *task workflows*. Every activity flow is made up of several activities (*tasks*) which must be run in a certain order.

> ### Examples of steps
>
> In a statutory consolidation process, it may be necessary to collect and submit data from financial statements and journals at different times and, subsequently, in a different step, collect data from a supplementary note.
>
> In a budget process, however, it may be useful to separate the collection of revenue data from the collection of fixed cost data, as well as data on investments and staff costs.

> ### Examples of tasks
>
> In a Payroll data collection task workflow, the compilation of each data entry form may constitute a different task.

Characteristics of the steps and task workflows


Steps and task workflows can be completed in series or in parallel. Steps are submitted once and how they correspond to each other defines the chronological order of submission. Steps completed in parallel can be submitted independently from each other and task workflows can be run simultaneously.

It is also possible to specify whether to allow certain steps to be submitted only after all the entities in the previous step have been submitted. This is useful for steps in which one entity attributes transversal costs to other entities. Accordingly, in the subsequent step the entities receiving those costs can submit the total of their own costs and those received from the previous step only after the previous step has been submitted in full, i.e. on the other entities as well.

The task workflows of contributor steps and consolidator steps may contain only tasks that concern the contributor user or consolidator, respectively.


Example with two steps and task workflows in series

This image shows an extract from a Business Workflow graph made up of two steps. The first step contains one task workflow and the second step contains two in series.

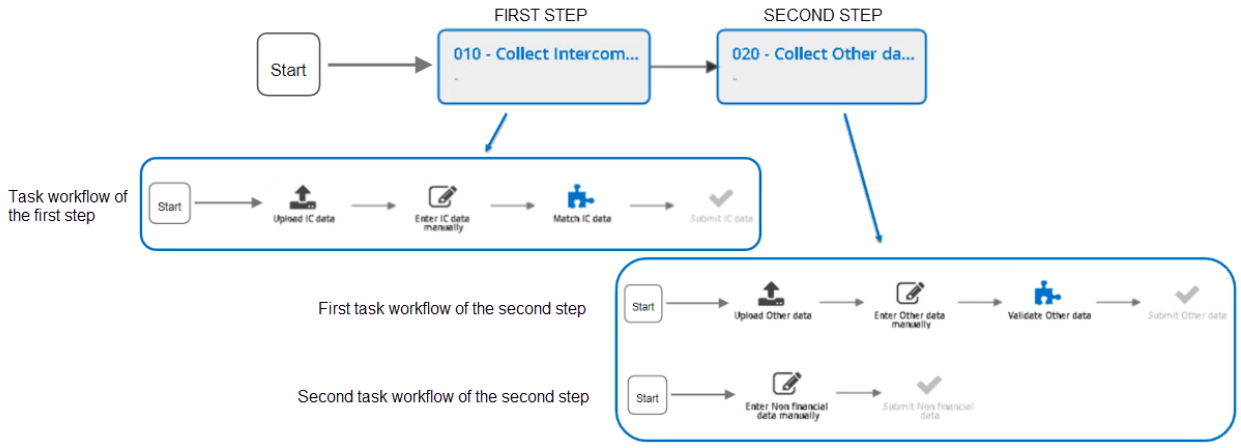

Example with three steps and with the steps' first activities in parallel

This example shows a Business Workflow in which the first two tasks of each task workflow can be run in parallel. The next task can only be run after both tasks have been completed. You can only move to the next step once the previous step's task workflow has been completed.

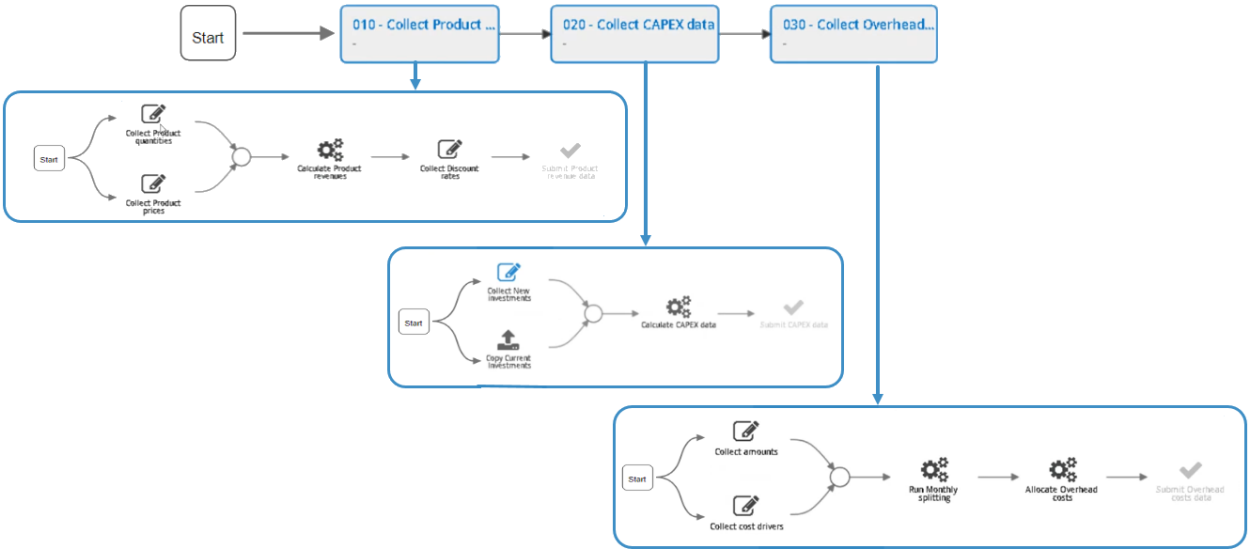

Particular features of task workflows

Several task workflows can be created, depending on the calculation models or needs of the various entities in the group. By default, CCH Tagetik provides two task workflows for every step; these are not visible in the task workflow definition, but are available during the process setup.

- **$ - Task Workflow**: to insert a submission only task for a process.
- **$$. Task Workflow**: to insert a step where no significant tasks are run for the entity in a process.

Task labels

The activities run by tasks can be identified by labels attributed to those tasks. Several tasks can therefore be grouped under the same label. These labels can be referred to in order to assign tasks to several specific users.

Task groups

Individual tasks can be grouped, so the user can run the corresponding data processing with a single click, e.g. for consolidated data processing. Grouped tasks can be viewed as a single task and expanded later or run all together.

Completing task workflows

Every task workflow must be completed with a submission task. If necessary, one or more data approval tasks can be added later. This is useful when different people are responsible for submission and approval.

Business workflow with dimensions per phase

Introduction

The distinctive feature of business workflows with a dimension by step is that each step can be assigned an organisational dimension: Entity, custom dimension, or analytical dimension.

If all steps are associated with the Entity organisational dimension, you must specify whether the Process Hub or the Legacy Dashboard is to be used:

- Process Hub: this mode allows the use of the dashboard with the new interface
- Legacy dashboard: this mode allows the use of the dashboard with the legacy user interface

IMPORTANT:

- The DTP task can only be executed in standard mode, with the option to use datasets partitioned by Entity, if the Business Workflow uses only steps by Entity.
- The DTP type task can be executed in 'Context independent run' mode and without using datasets partitioned by Entity if the Business Workflow does not exclusively consist of steps per Entity.
- The Job task type is only available if the Business Workflow uses only steps by Entity.

For each step, it is possible to define on the process which task workflows to use for each lowest level element and dimension node associated with that step.

Business Workflow Steps

Two types of steps are available when defining a Business Workflow:

Element	Description
Contributor step	Contains activities that were run by contributors. It can be associated with any dimension.
Consolidator step	Contains activities that were run by the consolidators. It can only be associated with the Entity dimension.

Define a Business Workflow

Sequence of core procedures

The following procedures are essential for defining a Business Workflow and must be performed in the specified order.

1. "Create a Business Workflow" on the next page.
2. "Add steps to a Business Workflow" on the next page.

3. "Create a task workflow and the relative tasks" below or "Define a Business Workflow" on the previous page.
4. (Only for processes with dimension by step) "Managing dependencies" on the facing page

Create a Business Workflow

Application database > Business Workflows

Application database > Navigation panel > Processes and Workflow > Business Workflows

1. Click : a new row will appear in the table.
2. In the **Attributes** tab, complete the fields as desired.
3. If you want to define a dimension for every step, select **Dimension by step**.
4. Click **Save**.

Add steps to a Business Workflow

Application database > Business Workflows > Desired Business Workflow > > Steps

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > > Steps

1. If the Business Workflow has already been prepared, click **Edit**.
2. Drag the **Step** icon into the work panel.
3. Complete the fields as desired and click **OK** to save.
4. To add another step, repeat steps 2 and 3, considering the following:

If you want to arrange the steps...	Then...
in series	position the step next to the previous one.
in parallel	position the step below the one to be completed in parallel.

5. After two or more steps in parallel, drag a join node into the work panel.
6. Link the elements of the Business Workflow. See "Link two elements of the chart" on the facing page for details.
7. To organise the Business Workflow formatting automatically, click **Auto-format**.
8. Click **Save**.

Create a task workflow and the relative tasks

This procedure allows you to select and order the tasks that the user has to complete.

Application database > Business Workflows > Desired Business Workflow > > Steps > Desired step

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > > Steps > desired Step

1. Click : the **Task workflow** window will open.
2. Complete the fields and click **OK** to confirm.
3. Click the desired task tab.
4. Drag the desired task into the work panel.
5. Complete the fields and click **OK** to confirm.
6. To add more tasks, repeat steps 3 to 5, considering the following:

If you want to arrange the tasks...	Then...
in series	position the task next to the previous one.
in parallel	position the task below the one to be completed in parallel.

7. After two or more tasks in parallel, drag a join node into the work panel.
8. Click the **Submit** tab and drag the **Submit** task to the bottom of the task workflow. If necessary, also drag the **Approval** task.
9. Complete the fields and click **OK** to confirm.
10. Link the elements of the task workflow. See "Link two elements of the chart" below for details.

11. To organise the task workflow formatting automatically, click **Auto-format**.
12. Click **Save**.

Managing dependencies

This procedure is used to control data submissions/rejections.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Managing Dependencies

Application database > Navigation panel > Processes and Workflow > Business Workflows > Desired Business Workflow > ⋮ > Steps > Managing Dependencies

1. Select the step on which to set the dependencies: the **Configure Step** window opens..
   ***Note**: fields are available to set dependencies only if the selected step has preceding steps.*
2. Set the rules for dependencies, then click **Save**.

Other procedures

The following procedures are additional and may be useful for managing the Business Workflow.

- "Modify a Business Workflow" below.
- "Link two elements of the chart" below.
- "Modify/duplicate/delete a task workflow" below.
- "Modify a task workflow task" on the next page.
- "Create and edit labels" on the next page.
- "Group tasks together" on the next page.

Modify a Business Workflow

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps

1. Click **Edit**.
2. Do the following:

If you want to...	Then...
delete a step or link (arrow)	1. Right click on the desired step/arrow. 2. Click **Delete**.
modify a step	1. Right click on the desired step. 2. Click **Edit**. 3. Edit the fields as desired and click **OK** to save.

3. Click **Save**.

Link two elements of the chart

1. Position the cursor in the centre of the first element to link.
2. Drag the arrow to the second element to link.

To link two parallel tasks, use a join node.

Modify/duplicate/delete a task workflow

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps

1. Click on the desired step.
2. Do the following:

If you want to...	Then...	and...
modify a task workflow	In the desired task workflow pane, click ⋮.	1. Click **Edit**. 2. Edit the fields as desired and click **OK** to save. 3. Click **Save**.
duplicate a task workflow		1. Click **Clone**. 2. Complete the fields as desired and click **Run** to save. 3. Click **Save**.
delete a task workflow		click **Cancel**.

Modify a task workflow task

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step > desired Task workflow

1. In the work panel, select the desired task: complete the relevant information.
2. Click **Edit**.
3. Edit the fields as desired and click **Save**.
4. To create or edit a label, follow the "Create and edit labels" below procedure from step 2.

Create and edit labels

This procedure allows you to work on labels of the selected Business Workflow.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step > desired Task workflow

1. Select the desired task: the relative information will appear on the right.
2. Click **Manage labels**.
3. Do the following:

If you want to...	Then...
create a label	1. Click ⊕ 2. In **Attributes** complete the fields as desired.
edit the description of a label	1. Click on the desired row of the label. 2. In **Attributes** edit the description as desired.
change the colour of a label	1. Click on the desired row of the label. 2. In **Attributes** click on the pane of colours. 3. Select the desired colour and click **OK**.

4. Click **Save**.

Group tasks together

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step > desired Task workflow

1. Press CTRL and click on the tasks to group together.
2. Right click one of the desired tasks and click **Create group**.

Business Workflow page

Admin

Application database > Business Workflows

Application database > Navigation panel > Processes and Workflow > Business Workflows

Page purpose

This page allows you to configure Business Workflows.

Specific actions on the page

Element	Description
⋮	• **Steps**: allows you to set the contents of the Business Workflow. • **Clone business workflow**: creates a copy of the selected Business Workflow.

Page fields

Please find below the most important fields.

Field	Description
Use only steps by entity	When the toggle is set to: • Disabled, each step can be assigned an organisational dimension (Entity, custom dimension or analytical dimension). • Enabled, all phases are assigned to the Entity organisational dimension by default. In this case, it is necessary to specify whether to use the Process Hub or the Legacy Dashboard.
Process Hub	In this mode, it is possible to use the dashboard with the new interface and manage the Job type task and the DTP type task in standard mode and partitioned by Company.
Legacy dashboard	In this mode, the dashboard can be used with the legacy user interface.

Steps page

Admin

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps

Purpose of the page

This page allows you to add steps to the selected Business Workflow.

Step window fields

This window will appear in the modify Business Workflow step, after the **Step** icon has been dragged into the work panel.

Please find below the most important fields.

Field	Description
Step code	Allows you to assign a unique code to the step created.
Description	Description of the step in the application language. If there are several languages, you can add a description for every enabled language.
Size	Dimension used when submitting the step in the process. You can indicate the entity dimension, a custom dimension or one of the analytical dimensions.
Step type	Only visible if the Entity dimension is selected. • **Contributor**: step visible on the contributor user's cockpit with their typical activities. • **Consolidator**: step visible on the consolidator's cockpit with their typical activities.
Management type	Only visible if the **Task Management** licence has been installed. • **Graph**: the workflow task definition is managed through a graph Default value. • **List**: the workflow task definition is managed in a tabular format, supported by a spreadsheet that facilitates loading and editing, especially when dealing with a large number of elements.

Step Configuration window

Admin

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Managing Dependencies> select step

Application database > Navigation panel > Processes and Workflow > Business Workflows > Desired Business Workflow > ⋮ > Steps > Managing Dependencies > select step

Purpose of the page

This window shows the detailed information on the selected step and can be used to define the dependencies between the steps for submission/rejection of the data.

***Note**: fields are available to set dependencies only if the selected step has other preceding steps.*

Submission and rejection options

For all the steps preceding the selected step, you can select one of the following submission/rejection options:

Option	Description
All elements have been submitted	You can submit a lowest level element only if all elements in the previous step have been submitted. You can reject a lowest level element only if no elements of the subsequent step have already been submitted.
The same element(s) was/were submitted	This option is possible only if the two steps refer to the same dimension. You can submit a lowest level element only if it was already submitted in the preceding step. You can reject an element only if it is not submitted in the subsequent step.
The element(s) based on the dimension attribute has been submitted	This option is possible only if the two steps refer to different dimensions. You must select one of the custom dimension attributes defined to relate the current step with the preceding one. In this case, you can submit a lowest level element only if all the lowest level elements linked to it by the selected dimension attribute have been submitted. You can reject an element only if the elements linked to it by the selected custom dimension attribute have not been submitted.

For more details on the custom dimension attributes, see Creation of a Custom Dimension Attribute in the Data Model section.

Task workflow page

Admin


Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step

Graph steps

This page allows you to create task workflows for the selected step.

What it looks like

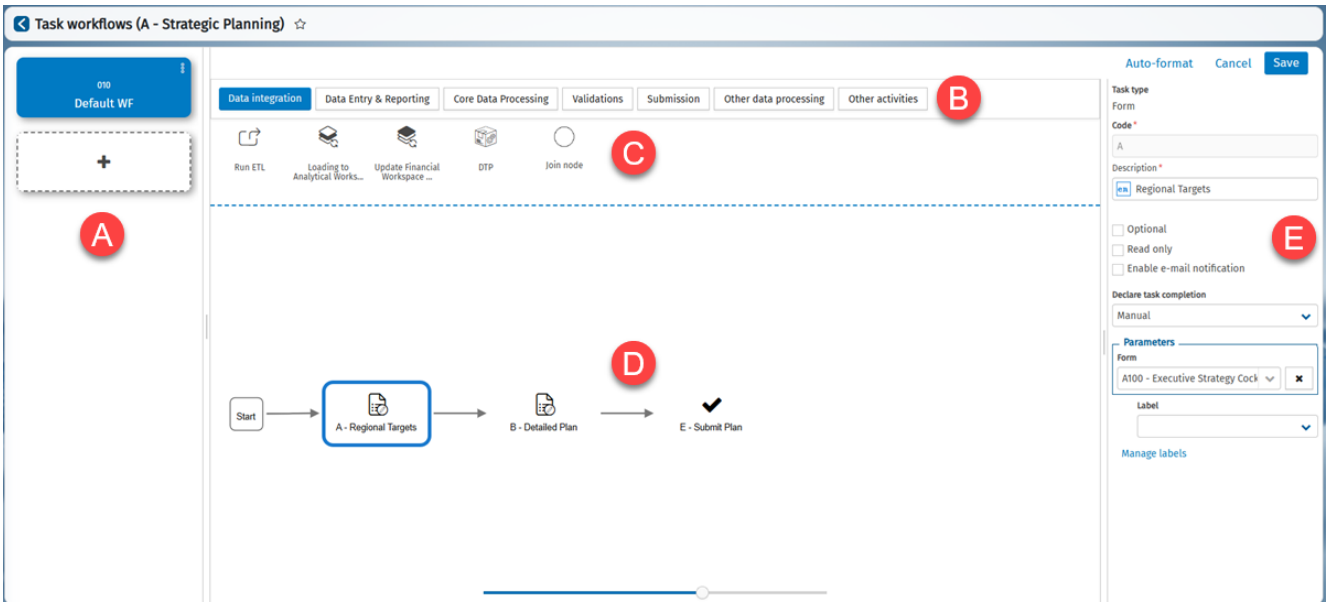

Element	Description
AA	List of task workflows created and button for adding a new task workflow
B	Activities tab
C	Activities related to the selected tab
D	Work panel
E	Information related to the activity selected in the work panel

Activities tab

Tab	Content
Data integration	Activities for integrating data en masse from external sources.
Data Entry & Reporting	Activities related to entering and consulting data present in CCH Tagetik.
Core data processing	Application data processing that allows you to transform and add data present in Tagetik in different ways according to your needs.
Validations	Diagnostics and IC cockpit
Submission	Submission and approval activities to complete the task workflow.
Other data processing	Other data processing (Store procedure, Jobs and others)
Other activities	Other activities (Bookmarks, Deployments and other)

Fields in window to add a task

This window will appear after a task icon has been dragged into the work panel.

Please find below the most important fields.

Field	Description
Optional	Make the task optional. It will then be possible to submit task workflow data even if the task has not been run.
Read-only	For forms, this allows you to open the form in navigation mode rather than data entry mode. If the form is in navigation mode, the task will automatically become optional. The user must in any case declare that the task has been completed to continue to the next one.
Enable e-mail notification	Only if the process send email rule **Completion: Process task workflows** is active. Sends the task managers a notification email reporting that the previous task has been completed and they can start working.
Declare task completion	Allows you to select the mode for declaring the task complete.
Parameters	Allows you to indicate the parameters for running the task. The displayed parameters will depend on the type of task that has been selected. For example, for **Submit** and **Diagnostics** activities, underlying nodes and entities can also be submitted en masse and diagnostics can be run on them. The **Forms** option allows you to indicate the report in the list of preconfigured reports that the user can use.
Label	Assigns a label to the task.

IMPORTANT: 'Bookmark' type tasks have been deprecated. With the introduction of the new user interface, it is no longer possible to create new ones. Instead, 'Link' tasks must be used. 'Bookmark' tasks already in the system will continue to function correctly.

List steps

This page allows you to create task workflows for the selected step.

Fields in window to add a task

You can add a new task to the queue of those already present, via the 'Add Task' button.

A new task can be inserted between two existing ones by using the 'Add Task' button located between the two items.

The graphic order of the tasks can be changed via drag & drop functionality.

You can modify the task sequence either by using the dedicated button or while creating a new task.

Please find below the most important fields.

Field	Description
Working days	Allows you to specify number of days by which tasks must be completed. The value can be positive if the deadline is after the start of the work cycle, or negative if the deadline is before the start of the work cycle.
Task type	Info, Form and Submission tasks are currently available.
Read-only	Only 'Form' task type. Opens the form in navigation mode.
Dependencies	Allows you specify whether the task is independent or depends on one or more previous tasks.
Parameters	Allows you to indicate the parameters for running the task. The displayed parameters will depend on the type of task that has been selected. For the **Form** type task, it allows you to specify the report in the list of pre-configured ones.

Spreadsheet

Clicking the 'Spreadsheet' button opens a dedicated spreadsheet for managing the tasks within the selected task workflow. In this way, the user can handle tasks more efficiently by copying and pasting data directly from an Excel sheet.

Business Workflow task icons

Data integration

Element	Description
	Run ETL
	Loading to Analytical Workspaces
	• Update Financial Workspaces • Export Analytical Workspaces - File format
	DTP
	Join node

Data entry & Reporting

Element	Description
	• Form • List of forms
	Gross Amounts
	IC amounts
	Entity Journals
	Consolidation Journals
	Cash Flow Planning
	Ownership structure register
	Join node

Core Data Processing

Element	Description
	• Entity and Group preliminary, Preliminary on consolidation area • Entity Data Processing
	Consolidation
	Calculation Logics
	Allocations & Closing
	Cash Flow Planning
	Join node


Validations

Element	Description
	Diagnostics and Diagnostic results log
	IC cockpit
	Join node

Submission

Element	Description
	Submit
	Approval
	Join node

Other data processing

Element	Description
	Stored procedure
	Job
	Transaction matching
	Join node

Other activities

Element	Description
	Info
	Bookmark (Deprecated)
	Deployment
	Link
	Join node

The entity's business cycles

Contents

This section covers the following topics:

Business cycles 249
Define Cycles window 249
Manage Status window 250
Set Business Cycles 250

Business cycles

What are business cycles

In process settings, business cycles define the type of submission (single submission or submission by scenario/period). They are based on scenarios and periods, and so these dimensions must already be prepared in CCH Tagetik's Data Model.

Function

Setting the business cycles allows you to define the time interval over which the data must be submitted.

There are two types of business cycle:

- Submission by scenario/period: submission is completed for every scenario/period of the cycle. The cycle data are then locked when all scenarios/periods have been submitted.
- Single submission: data submission is completed for a group of periods, e.g. every 12 periods for an annual process. Data for the entire cycle are locked when the last scheduled period has been submitted.

***IMPORTANT**: if you change the type of business cycle, data related to the Analytical Information Hubs linked to the process will be lost.*

Define Cycles window

Admin

Application database > Processes tile > select process > > Process setup > (Business Cycles section) Define Cycles

Application database > Processes & Workflows > Process > select process > > Process definition > (Business Cycles section) Define Cycles

Purpose of window

This window allows you to set the necessary business cycles to define the time interval over which the data must be submitted.

Window sections

Element	Description
Available scenarios/periods	Displays scenario/period pairs that are not related to any process.
Related to another process	Displays the list of processes to which scenario/period pairs are related. The current process, archived processes and processes with locked setup are excluded.
Process scenarios/periods	Displays scenario/period pairs already related to the current process.

Options in window

Element	Description
>	Adds the selected scenario/period to the process.
<	Removes the selected scenario/period from the process.

Manage Status window

Admin

Application database > Processes tile > select process > > Process setup > (Business Cycles section) Manage status

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Business Cycles section) Manage status

Purpose of window

This window allows you to lock or unlock data collection for specific scenarios/periods and archive or restore data on specific scenarios/periods.

Options in window

Element	Description
Lock	Lock data collection for the selected scenario/period.
Unlock	Unlock data collection for the selected scenario/period.
Archive	• For single submission processes, this archives and locks all periods of the process simultaneously. • For submission by scenario/period processes, this locks and archives the data for the selected scenario/period and for the consolidation scenarios/periods associated with it. ***IMPORTANT**: if all process scenarios/periods are archived and locked, the process is also archived and locked. See Archiving process data.*
Restore	Restores data for the selected scenario/period. ***Note**: restoring does not unlock scenarios/periods.*
Original scenario/period	Selects the entire original scenario/period structure.
Consolidation scenario/period	Selects the entire consolidation scenario/period structure.

Set Business Cycles

Sequence of procedures

To define the business cycles, the following procedures must be followed:

1. "Set the scenarios/periods to be inserted into the process" below
2. "Define actions on process scenarios/periods" below

1. Set the scenarios/periods to be inserted into the process

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Define Cycles

Application database > Processes & Workflows > Process > select process > ⋮ > Process definition > (Business Cycles section) Define Cycles

This procedure allows you to define the process submission type (single submission or submission by scenario/period) and the process scenarios/periods.

1. In **Number of cycles** select the desired type of submission and click **Save**.
2. To select the desired scenarios/periods, click **Define Cycles**: the **Define Cycles** window will open.
3. In the **Available Scenarios/Periods** column, select one or several scenarios/periods.
4. Click > or drag the selected items into the **Process Scenarios/Periods** column.
5. Click **Save**.

1. Define actions on process scenarios/periods

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Manage status

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Business Cycles section) Manage status

This procedure allows you to lock, unlock, archive or restore scenarios/periods.

1. Click on the desired action, then select the desired scenarios/periods. and click **OK**.
2. Repeat step 1 for every action to be defined.
3. Click **OK**.

Entity organisation and workflow

Contents

This section covers the following topics:

Organisation and workflow 252
Mapping task workflow page 253
Exceptions page 254
Definition results page (organisational hierarchy) 255
Mapping task workflow page 256
Definition result: Mapping task workflow page 257
Business Workflow Deployment 258

Organisation and workflow

Function

It allows you to define, for each step, which task workflows to use for each lowest level element and dimension node.

The following actions can only be performed for Entity steps:

- Include in the process specific entities or nodes of an entity hierarchy chosen from among the non-time-dependent hierarchies not related to the process, provided that those entities or nodes are involved on an exceptional basis in the same process.
- Override the currency of the included entities in relation to the currency indicated in the entity's elements table.
- Exclude from the process specific entities, or nodes of a group of entities, that are related to the process.
- Mapping Entity journal/task workflows

For list-type steps only, it is possible to enter the step start date by pressing the  button associated with each step. This date represents the start of the activities planned for the step and, when added to the task's processing days, allows the related due date to be calculated.

Special features of the task workflow/dimension mapping

Tasks that can be related to a node/lowest level element in the dimension hierarchy are those defined in the Business Workflow associated with the process. The following tasks are always present in each step of the Business Workflow:

- one or more tasks defined by the user
- a default submission task ($)
- an empty generic task ($$)

If no relationships are created, out, only the submission task is automatically associated with all the entities in the process.

Mapping task workflow page

Admin


Application database > Processes tile > select process > ⋮ > Process setup (Organisation & Workflow section - desired step)

Application database > Navigation panel > Processes and Workflow > select process > ⋮ > Process setup (Organisation & Workflow section - desired step)

Purpose of the page

This page allows you to relate entities and nodes to specific task workflows, for each step of the selected Business Workflow.

What it looks like

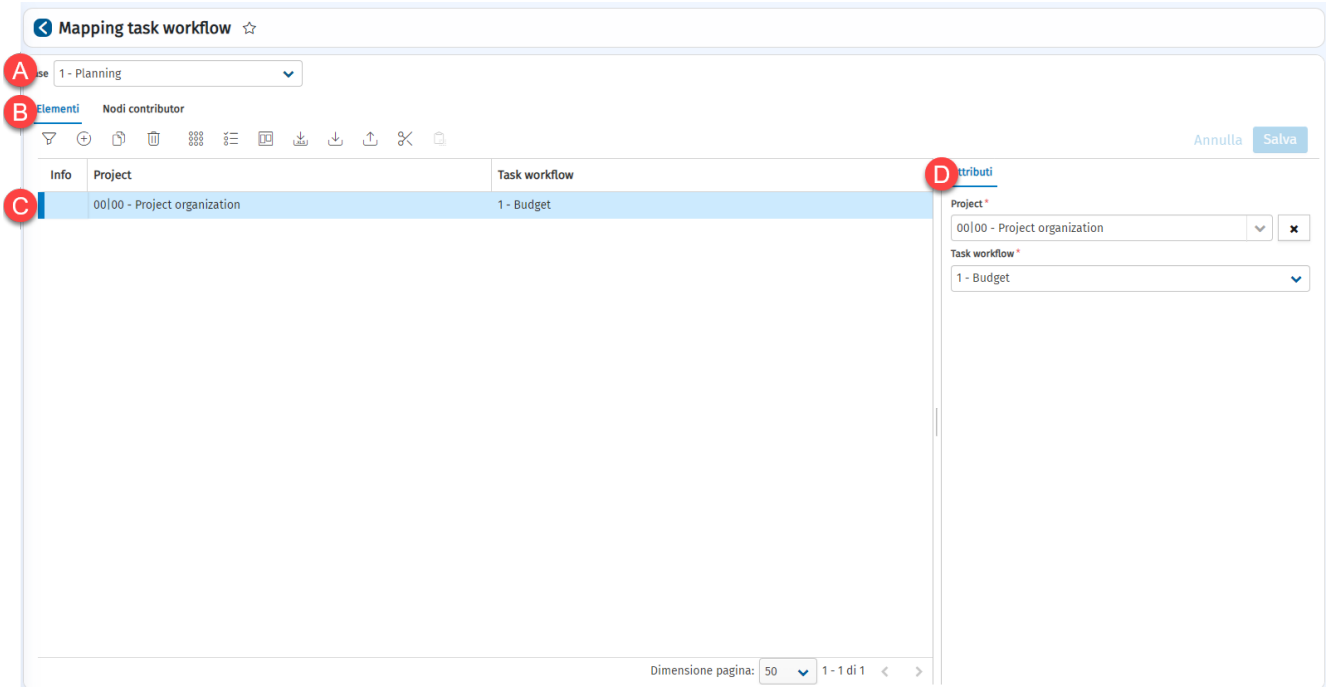

Element	Description
A	Step on which the relationships are set
B	Relationship details tabs
C	Relationships table
D	Relationship configuration tab

Details tab

Element	Description
Elements	Relates each element of the same dimension to the related task workflow.
Contributor nodes	Relates the specific task workflow to each contributor node.
Consolidator nodes	If the step is by entity, relates the specific task workflow to each consolidator node.

Elements tab

Field	Description
Dimension	Element or node of the dimension selected within the hierarchies of the organisational dimension of the process.
Task workflow	The task workflow of the selected step

Contributor nodes tab

Field	Description
Dimension	Element or node of the dimension selected within the hierarchies of the organisational dimension of the process.
Task workflow	The task workflow of the selected step
Node Type	Node or level of the node with which the task workflow is to be associated. The relationship may be as follows: ▪ with the node ▪ with the node and all child nodes ▪ with the lowest children level ▪ with the child nodes of a specific level (from 1 to 9)

Consolidator nodes tab

Field	Description
Dimension	Element or node of the dimension selected within the hierarchies of the organisational dimension of the process.
Task workflow	The task workflow of the selected step
Node Type	Node or level of the node with which the task workflow is to be associated. The relationship may be as follows: ▪ with the node ▪ with the node and all child nodes ▪ with the lowest children level ▪ with the child nodes of a specific level (from 1 to 9)

Exceptions page

Admin


Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Exceptions

Application database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Organisation & Workflow section) Exceptions

Purpose of the page

This page allows you to include/exclude specific entities or nodes of entities in/from the process's organisational hierarchy.

What it looks like

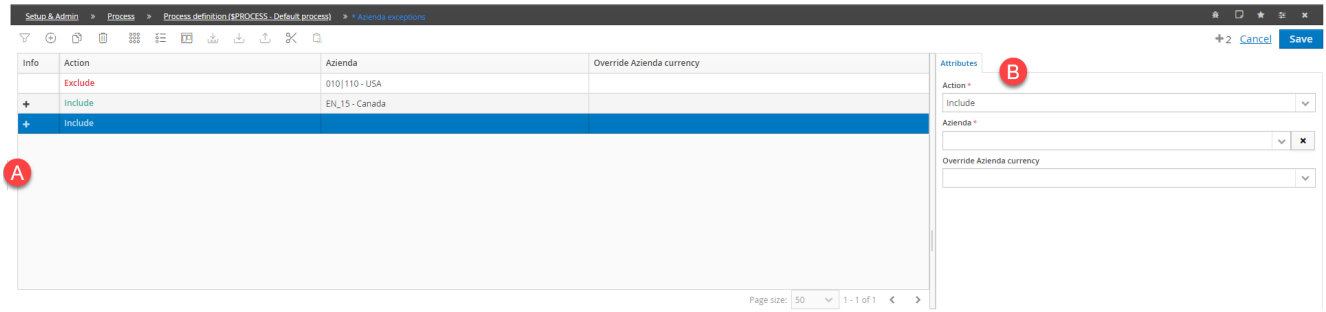

Element	Description
A	List of exceptions
B	Exceptions configuration tab

Page fields

Please find below the most important fields.

Field	Description
Action	Includes/excludes the entity selected in **Entity** in/from the process's organisational hierarchy.
Entity	Selects an entity or a node of entities.
Override entity currency	Set the currency of the selected entity to a different currency from the one indicated in the entity elements table.

Definition results page (organisational hierarchy)

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow, Administrative hierarchy section) > Definition result

Application database > Processes & Workflows > Processes > select process > ⋮ > Process setup (Organisation & Workflow, Administrative hierarchy section) Definition result

Purpose of the page

This page shows the list of entities or nodes of entities included/excluded in/from the process' organisational hierarchy.

Page tabs

Element	Description
Entity	Shows entities on which to collect data in the process and the currencies associated with them.
Nodes	Shows the nodes of entities and activities enabled for contributor nodes and consolidator nodes.

Mapping task workflow page

Admin


Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Mapping

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Mapping

Purpose of the page

This page allows you to relate entities, nodes and/or journals to specific task workflows, and specific steps of the selected Business Workflow.

What it looks like

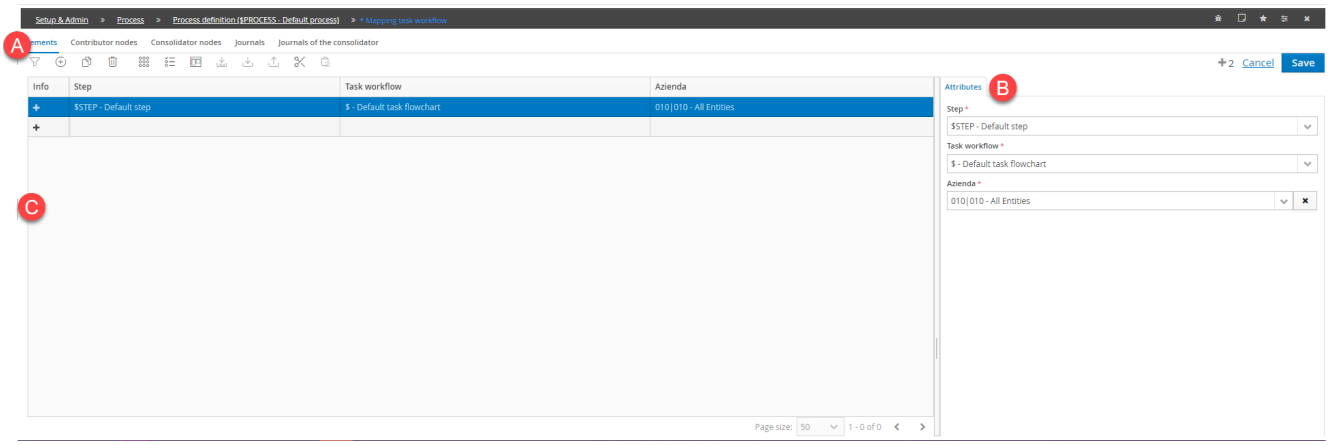

Element	Description
A	Relationship details tabs
B	Relationship configuration tab
C	Relationships table

Details tab

Element	Description
Elements	Entity/Step/Task workflow relationships
Contributor nodes	Contributor node/Step/Task workflow relationships
Consolidator Nodes	Consolidator node/Step/Task workflow relationships
Journals	Entity journal/Step/Task workflow relationships
Consolidator journals	Consolidator node journal/Step/Task workflow relationships

Elements tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity	Entity or organisational hierarchy node of the process

Contributor nodes tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy
Node type	Node, child nodes or level of the node with which the task workflow is to be associated

Consolidator nodes tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's administrative hierarchy
Node type	Node, child nodes or level of the node with which the task workflow is to be associated

Journals tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy

Consolidator journals tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy
Node type	Node, child nodes or level of the nodes with which the task workflow is to be associated

Definition result: Mapping task workflow page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow, Business Workflow section) > Definition result

Application database > Processes & Workflows > Process > select process > ⋮ > Process setup (Organisation & Workflow, Business Workflow section) Definition result

Purpose of the page

This page shows the list of relationships between entities and/or journals, phases and specific task workflows run on the Mapping task workflow page, and which have been deployed.

Page tabs

Element	Description
Entity mapping	Relationships between entities (entities, contributor nodes, consolidator nodes), steps and task workflows.
Journals mapping	Relationships between journals (entity journals and consolidator node journals), steps and task workflows.

Data in the table

Element	Description
✔	The entity is related to default task workflow $ of the Business Workflow step.
Empty cell	The entity is not authorised to work on the step (e.g. a contributor entity is not authorised to work on consolidator type steps).
<Task workflow>	Task workflow to which the entity is related.

Business Workflow Deployment

Operation

When deployment is executed only for the Entity dimension, if a significant workflow has been associated with a node in the entity hierarchy that is not significant in the data collection process, it is replaced by the empty system workflow ($$). The same thing happens to nodes that are not significant in the consolidation process in the entity hierarchy.

If a lowest level element and/or a node in a hierarchy are later moved and associated with a different task, the following results can occur:

If...	Then...
the modified element is in "submitted" or "pending submission/approval" status.	it is reset as "submitted".
the modified element is in the "in progress" status.	it is set as "not started".

***Note**: this behaviour applies to all scenarios/periods in the process, including those that are locked.*

List steps

For each phase, workflow element/task e-nuples are automatically generated based on the mapping, to facilitate entering due dates and assigning managers.

If the task has defined working days and the step has a start date, the due date is automatically calculated by adding the working days to the start date.

If in the 'Reminder and Summary Emails' management window the option 'Send submission memo starting from' has been defined, the reminder start date is automatically calculated by subtracting the specified number of days from the due date, and the time is set according to what is defined in the window.

The Process Data Model

Contents

This section covers the following topics:

Introduction to the Process Data Model 259
Process Data Model definition 260
Data management for the Process Data Model 262
Process Data Model examples 263
Define Process Data Model page 265
Process Data Model/Entity Relationships page 268
Definition result: Process Data Models related to entities page 269
Definition result: Process Data Model page 269
Process Data Model setup 270

Introduction to the Process Data Model

Background

In the process settings, the Process Data Model (PDM) defines a subset of accounts or accounts/categories on which to collect, submit and process the data. The PDM is based on accounts and categories, and so these structures must already be set up in CCH Tagetik's dimensions.

Elements of the Process Data Model

The **Process Data Model** is based on the following elements:

- *account*s, or the subject of data collation
- *steps* of the process on which to collect account data
- *categories* containing the classification and segmentation of the data on accounts
- *measures*, or custom dataset fields
- the process's *data model*, or the accounts/categories involved in data collection, specific behaviour and exceptions that govern the entry of data on the process.

Process Data Model definition

Setting up the process's *data model* involves defining the following elements:

- Accounts or accounts/categories that collect/do not collect data on the process (e.g. if you want to exclude accounts included in a certain node of accounts).
- The editability rights of accounts on specific types of data and on the categories associated with them, when they need to be different from the default behaviours.
- The steps on which to set, for example, any blocks on intercompany declarations for specific accounts not belonging to intercompany matching cockpits.
- The control groups included in the process and those excluded from it, from among those that the system automatically relates to the process during its deployment.
- The form details available for each step.
- Any custom Analytical Workspace measures to be included in the process.

If the process has at least one step on the entity dimension, it also allows you to define the following elements:

- The IC cockpits and their relationships with the steps.
- The control groups that are subject to diagnostic data processing.
- The relationship between the forms containing accounts that are part of control groups included in the process, and the specific control groups.

Default PDM and custom data models

A default PDM, called $PDM, is related to every process. For processes with at least one step on the Entity dimension, if the default PDM does not fully meet the functional needs of the project, custom PDMs can be created. In particular, this is useful for associating subgroups of accounts with specific entities/companies and consolidation scenarios/periods.

Process Data Model organisation

The order in which PDMs are inserted determines the order in which they are run within the system. If there are general PDMs and PDMs with exceptions and overrides, the order in which the PDMs is created must go from the most generic to the most specific because, if the data processing of a generic PDM follows that of a specific PDM, the rules of the specific PDM may be overwritten.

If several PDMs are managing different accounts, it is advisable to set up a custom PDM by account, rather than make changes to the $PDM.

Process Data Model definition

Introduction

To set up the PDM, the following elements must be defined:

- accounts/categories and measures (or custom dataset fields of Analytical Workspaces) involved in the process
- any overrides and/or exceptions on accounts/categories and measures

The order in which the records are inserted in the setup tables is important because deployment processes the rows in the order in which they were inserted.

1. Define the CCH Tagetik accounts to be included in/excluded from specific steps of the process.
2. Define the forms, and therefore the accounts contained in them, to be included in/excluded from specific steps of the process.
3. Define the type of data to be collected on the process, the categories, if required, and the editability properties of the accounts.
4. Define the process steps on which to set, remove or move the block of intercompany declarations for specific accounts or accounts/categories.
5. Define the control groups from among those to be included in/excluded from the process and the types of data checked by them.
6. Define the Analytical Workspace measures to be included in/excluded from the data model and/or specific steps of the process.

Customisation of the PDM

For processes with dimension by step and at least one step on the Entity dimension, if the default PDM does not fully meet the functional needs of the project, custom PDMs can be created. In particular, this is useful for associating subgroups of accounts with specific entities/companies and consolidation scenarios/periods.

You can also exclude one or more control groups from a specific step.

You must consider the type of step defined on the Business Workflow (Steps of the Business Workflow).

If...	Then...	AND...
the Process Data Model is managed by account/step	the accounts/forms can be assigned only via the steps. ***Note**: this operation allows you to distinguish the management of data between the contributor and the consolidator, without having to provide details of the process by category.*	The relations between the accounts/forms/control groups are set as follows: • For the contributor, they are related to the step selected in the setup. • For the consolidator, they are related to the consolidator step immediately after the contributor step on which the accounts and forms are positioned.
the Process Data Model is managed by account/category/step	the specific categories are related to the contributor and consolidator steps of the process. In other words, contributor categories for the contributor steps and consolidator categories for the consolidator steps. ***Note**: this operation gives a clear separation of timing between the operations carried out by the contributor and those carried out by the consolidator.*	the category-step relations are set as follows: • The contributor categories are related to the contributor steps. • The consolidator categories are related to the consolidator steps. • The category groupings can be related to all the steps. The accounts/forms/control groups are then attributed to contributor steps if the categories are contributor categories, and to consolidator steps if the categories are consolidator categories. Pairs that do not comply with the rule described for assignment are discarded.

Exceptions on forms

By default, CCH Tagetik automatically associates a form with a step of the process when at least one account associated with the step is also contained in the forms and editable. However, a form or a node of the grouping of forms can be excluded or added manually.

Example of excluded forms

Two different processes, statutory and management, can manage the same accounts via different forms, in different data entry steps. In the statutory process, the node that groups management data forms can be excluded from the desired step in order to view only the forms involved in the entry of statutory data.

Exceptions for account editability

The setting of exceptions for account editability defines the changes that users can make on the accounts.

Accounts can be made editable, non-editable, only importable (e.g. via ETL import), or be set to follow the editability condition defined in the table on the individual account (*automatic* behaviour).

It is possible to set exceptions on the editability of specific types of account data (all data, gross data, intercompany data) and/or certain categories of account data (all categories, amounts, journals).

The overrides set on intercompany data do not change the account settings in the table. For example, the “Editable on intercompany values” override has no effect on an account that does not allow intercompany declarations. Vice versa, on an account that allows intercompany declarations, setting a non-editable override makes the account’s intercompany data non-editable in the specific process.

> ### Example of editable accounts
>
> When a calculated revenue account is defined as the product of price and quantity, that configuration makes the account non-editable. For it to be editable, an editability exception needs to be created on the account, to allow the user to edit the data.

Exceptions for intercompany steps

By default, for accounts belonging to an intercompany matching cockpit, the insertion of intercompany declarations is blocked when submitting the step to which the cockpit is related.

For accounts not belonging to an intercompany matching cockpit, intercompany declarations are blocked by default when submitting the gross step to which the accounts are related. However, exceptions can be defined for the step in which to block intercompany declarations, or:

- Remove the intercompany account from the gross step to which it belongs, so that the declaration is never blocked.
- Move the blocking of intercompany declarations to a different intercompany step
- Set the blocking of intercompany declarations on the gross step to which said declarations belong (*Automatic* behaviour).

Exceptions for control groups

By default, CCH Tagetik includes all control groups that contain at least one account involved in the process, with the exception of control groups on which the “Include in the process if all parent accounts belong to the process” or “Include in the process if all child accounts belong to the process” option is active.

To exclude individual control groups or specific nodes of a grouping of control groups from the PDM, exceptions can be set to remove control groups.

When an exception is set to remove one or several control groups, this may have an impact on all data entered, on gross data only, or on intercompany data only.

Analytical Workspace measures

The setting of Measures allows you to define which measures belonging to the Analytical Workspace, and its selected datasets, to associate with the chosen step of the process.

When each association is saved, CCH Tagetik checks that every measure is associated with one step, and one step only.

Data management for the Process Data Model

Data collection modes

Data can be collected *by account*, which considers all data entered on the account, or *by account/category*, which considers the data collected, separated by category. Data is then collected in the following two modes:

- by account/step
- by account/category/step

In both cases, data collection is blocked when submitting the step to which the accounts or accounts/categories are related.

Data collection by account/step

Management by *account/step* is typically used in single step processes, or processes with several steps in which each step is related to a different account. In management by account/step, all the categories associated with the account are considered, or, if the filter on a node of categories is activated, only the categories related to said node are considered.

The accounts and forms, and therefore the control groups associated with them, defined on a contributor step, also are automatically associated with the immediately subsequent consolidator step.

> ### Example of data collection by account
>
> In the case of a budget process with three steps:

1. Collection of revenues and cost of sales data
2. Collection of operating cost data
3. Collection of fixed capital investments data

For data related to the three steps to be submitted at different times, each step must be related to the desired account. Thus, when users submit the first step, the system only blocks the reference accounts for revenue and cost of sales, when they submit the second step, the system only locks the reference accounts for operating costs, etc.

Data collection by account/category/step

Management by *account/category/step* is typically used in processes in which the accounts can be associated with several steps and submission is determined by the categories associated with the accounts.

This management mode is suitable in projects in which you intend to clearly differentiate contributor activities from consolidator activities.

In processes with data collection by account/category/step, the PDM accounts are associated with specific amount or journal categories, in their various declinations, which in turn are associated with contributor steps or consolidator steps, respectively, or with contributor/consolidator steps.

Example of data collection by account/category/step

A statutory data collection process may have two steps:

1. FS data collection
2. Collection of entity journals

In both steps, data can be entered on the same accounts, but on different categories: amount categories for the first step and entity journal categories for the second.

Process Data Model examples

Introduction

Some specific examples of settings for various types of PDM are provided below.

Example of a Process Data Model by account/step

This example describes a situation in which all entities insert and consolidate data on the same accounts and according to the following contributor/consolidator steps:

1. Collection of revenue and cost of sales data
2. Collection of OPEX data
3. Collection of CAPEX data

The default PDM ($PDM) can be used for this process.

Procedure

Application database > Processes tile > select process > > Process setup (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Process Data Model section)

1. In the **Process Data Model** section, in **Type**, select **By Account**.
2. Click to open a page showing the details of the default PDM.

3. Select the accounts to be inserted in the various steps.

To select accounts from...	Then...
Account tab	Select the accounts individually or as a node in an accounts hierarchy.
Form exceptions tab	Select individual forms or a node from the group of forms. Selecting a form selects all the editable accounts contained in it.

4. Indicate the gross step to which the selected accounts must be related: on submitting the indicated step, the entry of gross data on all of that step's accounts is blocked, except for overrides.

***IMPORTANT**: actions are run in the order in which they are presented in the table. If **Excluded** is selected as the last action for an account, it is excluded from the whole process.*

Example of Process Data Model by account/category/step

This example describes a statutory data collection process according to the following contributor/consolidator steps:

1. Intercompany data collection
2. FS data collection
3. Collection of supplementary note details and variations data
4. Collection of entity journals

The same accounts as steps 2 and 3 are managed in step 4, but according to the entity journal categories. Whereas amount categories are considered in phases 2 and 3.

Procedure

Application database > Processes tile > select process > > Process setup (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Process Data Model section)

1. In the **Process Data Model** section of the **Process definition** page, in **Type**, select **By account/category**.
2. Click to open the **Define Process Data Model** page.
3. In the **Account** tab of the **Define Process Data Model** page, define the account/category pairs for which data are collected and the relative step:
    1. Select the normal P&L and balance sheet accounts.
    2. For these accounts, in **Categories**, select the Amount categories and in **Step**, choose step 2, because this is the step in which you want to close the collection of gross data.
    3. Select the detail P&L accounts and the variation balance sheet accounts.
    4. For these accounts, in **Categories**, select the Amount categories and in **Step**, choose step 3, because this is the phase in which you want to close the collection of detail and variation accounts.
    5. Select normal detail accounts and variation accounts (both P&L and balance sheet).
    6. For these accounts, in **Categories**, select the Entity journal accounts and in **Step**, choose step 4, because this is the step in which you want to close the entry of entity journals.

Comments

No definition is entered for step 1 because intercompany data is submitted in this step.

In the definition of the details of accounts/categories for which data must be entered, only the gross step is considered, i.e. the step in which the entry of gross data of a certain entity must be blocked.

The intercompany step, in which the entry of intercompany data is blocked, is determined by the step in which an intercompany matching cockpit has been inserted.

The only operation required to manage the matching of intercompany entries in step 1 is therefore creating a relationship between the intercompany cockpit and step 1 in the process rules. Thus, the

system blocks the entry of intercompany entries for all accounts included in the intercompany cockpit upon submission of step 1.

For accounts excluded from the cockpit, however, the entry of intercompany entries is blocked when submitting the gross step to which the account is related.

Example of a Process Data Model by account/step with contributor steps and consolidator steps

This example describes a data collection process for generating the consolidation according to the following three steps:

1. Data collection by entity - contributor step
2. Collection of supplementary note details and variations - contributor step
3. Collection of consolidation journals - consolidator step

With the contributor and the consolidator using different steps, a single PDM can be used; in this example it is the default $PDM.

Procedure

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

1. In the **Account** tab on the **Define Process Data Model** page, select the **Include** action and define the accounts on which to collect data.
2. In **Step**, indicate the gross step to which the selected accounts must be related: on submitting the indicated step, the entry of gross data on all of that step's accounts is blocked, except for overrides.

   ***Note**: consolidator steps are not included among the selectable steps.*
3. Click **Save** to return to the **Process definition** page.
4. Run deployment.
5. Click to view the accounts involved in the contributor and consolidator steps of the data model.

Define Process Data Model page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

Purpose of the page

This page allows you to set up the process's data model.

Page tabs

The following tabs are displayed in the following cases:

- the Process Data Model is "By Account" and the **Retrieve accounts from form** option is not selected
- the Process Data Model is "By account/category"

Element	Description
Account	Defines the accounts or accounts/categories to be included in/excluded from the process and the step on which they enter data. ***IMPORTANT**: only the forms for which those accounts can be edited are available for data entry.*
Form exceptions	Selects the forms to be included in/excluded from specific steps of the process.
Editability exceptions	Allows you to override behaviours in default editability and to set specific behaviours.
IC step exceptions	(Only if the process has at least one step on the Entity dimension) Defines the steps in which to set the block on intercompany declarations for specific accounts or accounts/categories not belonging to intercompany cockpits.
Control groups to exclude	(Only if the process has at least one step on the Entity dimension) Defines the control groups to exclude from the process from those that the deployment operation automatically relates to the process.
Analytical Workspace measures	(Only if the process has at least one step on the Entity dimension) Defines the datasets of the Analytical Workspace to be included in/excluded from the process.

Instead, the following tabs are displayed when the Process Data Model is "By Account" and the **Retrieve accounts from form** option is selected:

Element	Description
Form	Defines the form to be included in/excluded from the process. ***Note**: this allows you to manage forms for which the accounts are defined dynamically and not automatically included in the process deployment.*
Account Exceptions	Select the accounts or accounts/categories to be included in/excluded from the data collection and specific step. ***IMPORTANT**: only the forms for which those accounts can be edited are available for data entry.*
Editability exceptions	Allows you to override behaviours in default editability and to set specific behaviours.
IC step exceptions	(Only if the process has at least one step on the Entity dimension) Defines the steps in which to set the block on intercompany declarations for specific accounts or accounts/categories not belonging to intercompany cockpits. ***Note**: the override is effective only on the accounts that do not belong to an IC matching cockpit.*
Control groups to exclude	(Only if the process has at least one step on the Entity dimension) Defines the control groups to exclude from the process from those that the deployment operation automatically relates to the process.
Analytical Workspace measures	(Only if the process has at least one step on the Entity dimension) Defines the datasets of the Analytical Workspace to be included in/excluded from the process.

Fields in the Account tab

Field	Description
Action	Includes/excludes the account in/from the process.
Select from dimension	Selects an account (or a node of accounts) from CCH Tagetik 's account dimension.
Select from form	Selects a form from which the editable accounts contained in it will be obtained
Step	Selects a Business Workflow step

Fields in the Form tab

Field	Description
Action	Includes/excludes the form in/from the process.
Form	Selects a form from which the editable accounts contained in it will be obtained.
Step	Selects a Business Workflow step.

Fields in the Form Exceptions tab

Field	Description
Action	Includes/excludes the selected form in/from the process.
Form	Selects a form or a node of forms from which the editable accounts contained in it will be obtained.
Step	Selects a Business Workflow step.

Fields in the Account Exceptions tab

Field	Description
Action	Includes/excludes the selected account in/from the process.
Account	Select an account or a node of accounts. **If...** / **Then...** **Retrieve account from form** is selected. → indicates the subset of accounts to exclude/include compared to those retrieved from the form. ***IMPORTANT**: with dynamic forms, the deployment cannot automatically calculate or include the accounts on the form.* **Retrieve account from form** is not selected. → indicates the account to be excluded/included for the selected step.
Step	Selects a Business Workflow step.

Fields in the Editability Exceptions tab

Field	Description
Account	Accounts on which to override the editability rule.
Data type	Selects the type of data on which to set the editability rule (gross data, intercompany data, or both).
Category type	Selects the category on which to set the editability rule (amount, journal, or both).
General settings	Selects the editability level of the selected data (non-editable, only importable, editable, automatic).

Fields in the IC Step Exceptions tab

This tab is available only if the process has at least one step on the Entity dimension.

Field	Description
Action	Selects the action to be run on the account or account/category: • **Delete**: deletes the intercompany account or account/category from the gross step. Thus, the intercompany declaration on the account is never blocked. • **Shift**: shifts the locking of intercompany declarations from the account or account/category onto an IC step. • **Automatic**: sets the gross step of the account as the IC step of the account or account/category.
Account	Selects the account or account/category for which to set the block on intercompany insertions.
Step	(only with the **Shift** option in the **Action** field) Selects a different IC step to which to move the block on intercompany insertions. ***Note**: by default, the block occurs in the gross amount step to which the account belongs.*

Fields in the Control groups to exclude tab

This tab is available only if the process has at least one step on the Entity dimension.

Field	Description
Action	Selects the action to be run on the control group: • **Delete**: deletes the control group from the process. • **Automatic**: only includes the control group if it contains at least one process account, unless the "Include in process if all parent accounts exist" or "Include in process if all child accounts exist" option is active on the control group. In this case, it runs the selected rule.
Control group	Selects a control group or node of control groups.
Data type	Selects the type of data on which to run the action (**gross data**, **intercompany data**, or **both**).

Fields in the Analytical Workspace Measures tab

This tab is available only if the process has at least one step on the Entity dimension.

Field	Description
Action	Includes/excludes Analytical Workspace measures in/from the process.
Analytical workspace	Selects the Analytical Workspace.
Dataset	Selects the dataset from the Analytical Workspace.
Measure	Selects a measure from the dataset of the Analytical Workspace.
Step	Selects a Business Workflow step.

Process Data Model/Entity Relationships page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section) Process Data Model/Entity relationships

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process setup (Process Data Model section) Process Data Model/Entity relationships

Purpose of the page

This page allows you to create specific relationships between the process's entities and data models, and between the process's existing consolidation scenarios/periods.

***Note**: the page is only available if there are several PDMs and there is at least one step per entity.*

Page tabs

Element	Description
Elements	Entity (from the available non-time-dependent hierarchies) and PDM relationships.
Contributor nodes	Relationships between contributor nodes and PDMs.
Consolidator nodes	Relationships between consolidator nodes and PDMs.
Consolidation scenarios/periods relationship	Relationships between the process's consolidation scenarios/periods and the PDM.

Elements tab

Field	Description
Entity	Selects an entity or node of entities.
Process Data Model	Selects a PDM.

Contributor nodes tab

Field	Description
Contributor nodes	Selects a contributor node.
Process Data Model	Selects a PDM.
Advanced selection	Selects the contributor node levels to relate to the PDM.

Consolidator nodes tab

Field	Description
Consolidator nodes	Selects a consolidator node.
Process Data Model	Selects a data model.
Advanced selection	Selects the consolidator node levels to relate to the data model.

Consolidation scenarios/periods relationship tab

Field	Description
Process Data Model	Selects a data model to relate to consolidation scenarios/periods.

Definition result: Process Data Models related to entities page

Admin

Application database > Processes tile > select process > > Process setup > (Process Data Model section) Definition result

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup > (Process Data Model section) Definition result

Purpose of the page

This page shows the list of entity/data model relationships.

Page tabs

Element	Description
Entity	The list of individual entity/currency/data model relationships
Nodes	List of entity node/data model relationships divided into contributor and consolidator

Definition result: Process Data Model page

Admin

Application database > Processes tile > select process > > Process setup > (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Process Data Model section)

Purpose of the page

This page shows the list of accounts, control groups, categories, forms and the Analytical Workspace measures included in/excluded from the Process Data Model. Each tab shows details of the associations

between those elements of the data model and the steps of the Business Workflow.

Page tabs

Element	Description
Account	Shows the list of accounts included in/excluded from the Process Data Model, the steps on which they enter data, the editability rights of the accounts on gross and IC amount categories and journal categories and the association of the accounts with IC cockpits. The system uses the contents of this table to determine the editability and importability of an account and the possibility of running data processing on the accounts.
Control groups	Shows the list of control groups included in/excluded from the business workflow steps of the process.
Form - Control groups	Shows the list of control groups originating from forms included in the Process Data Model.
Category	Shows the list of categories that can be edited by the accounts included in the Process Data Model. If the Process Data Model is by account and no filter has been set on categories, the system displays all categories included in the table which have the “To run” option active.
Form	Shows the list of forms containing accounts included in the Process Data Model and the steps on which those accounts collect data.
Analytical Workspace measures	Shows the list of Analytical Workspace measures included in the Process Data Model.

Process Data Model setup

Sequence of procedures

"Define the data to be collected in the process" below.

"Set up a Process Data Model" on the facing page.

Define the data to be collected in the process

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

This procedure is crucial when defining a Process Data Model.

To define the data to be included in the process, do the following:

To define data collection on	Then...
account	1. In **Type**, select **By account**. 2. To include accounts originating from other forms included in the process, select **Retrieve accounts from form**. 3. Click **Save**.
account/category	1. In **Type**, select **By account/category** to collect data from accounts divided into the categories present in the environment. 2. (optional) In **Category filter**, select a node of categories to filter according to the categories present in the node. 3. Click **Save**.

Set up a Process Data Model

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

The following general procedure describes the order in which to set up the various configuration tabs with which a PDM can be defined and customised. To define the PDM, an account must be defined but the remaining configuration tabs are optional based on the needs of the project.

1. In the **Account** tab, click ⊕, then select the accounts from CCH Tagetik dimensions and/or accounts originating from forms to be included in/excluded from the process and specify the step on which they are to enter data, then click **Save**.
2. In the **Form exceptions** tab, click ⊕, then select forms to be included in/excluded from specific steps of the process, then click **Save**.
3. In the **Editability exceptions** tab, click ⊕, then set the editability of accounts on specific types of data for certain categories of the process, then click **Save**.
4. In the **IC Step Exceptions** tab, click ⊕, then select steps of the process on which to set the blocking of intercompany declarations for specific accounts or accounts/categories, then click **Save**.
5. In the **Control groups to exclude** tab, click ⊕, then select the control groups to be excluded from/included in the process, then click **Save**.
6. In the **Analytical Workspace Measures** tab, click ⊕, then select the measures from a dataset to be included in/excluded from the process, then click **Save**.

Exclude an account from a step of the process

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

This procedure is optional and allows you to exclude a specific account or node of accounts from a step of the process.

1. In the configuration section of the **Account** tab, in **Action**, select **Exclude**.
2. In **Account**, select the account or node to exclude.
3. In Step, select the step of the process from which to exclude the account, then click **Save**.

Set up a specific data model by entity

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

To set up a specific data model by entity, an account must be defined, but the remaining configuration tabs are optional based on the needs of the project. For the option to be visible, there must be several PDMs.

1. Create one or several customised data models and click **Save**.
2. Click **Process Data Model/Entity Relationships**: a page will open to define the specific PDM for the entities.
3. In the **Elements** tab, click ⊕, then select the desired entity and the PDM with which it should be associated, and finally click **Save**.
4. In the **Contributor nodes** tab, click ⊕, then select a contributor node and specify node levels if necessary, then select the PDM with which it should be associated, and finally click **Save**.
5. In the **Consolidator nodes** tab, click ⊕, then select a consolidator node and specify the node levels if necessary. Then select the PDM to associate it with, and finally click **Save**.
6. In the **Consolidation scenarios/periods relationship** tab, click on the desired consolidation scenario/period, then select the PDM with which it should be associated, and finally click **Save**.

Process submission

Contents

This section covers the following topics:

Management of submission and notifications 272
Submission rules page 274
Checking rules page 275
Deadline dates page 275
Reminder and summary emails window 276

Management of submission and notifications

Introduction

To manage the submission of the process, you need to define and/or customise the following rules:

- Analytical Workspace Checking rules
- submission rules of the specific process

On submission, CCH Tagetik checks the validation of the checking rules set for each step (see Checking Rules in the Analytical Workspace section). Thus, only the steps where the rule has been validated, or respected, are submitted.

For the submission of each process, the rules defined as general submission rules are applied. However, you can override these rules for a specific process.

For details on the submission data processing, see The processes cockpit.

To facilitate the management of submission activities, CCH Tagetik a notification system is also provided.

Operation of notifications

In order for notifications to operate correctly, the following information must be specified:

- email templates to be used for notifications
- due dates of the submission events and approval that triggers the sending of the notification
- scheduling automatic reminders for submission
- scheduling daily summaries of the submission status

To send notification emails, the rules defined as general are applied. However, you can override these rules for a specific process.

Sending configurable emails

For processes with dimension by step, the following email templates are provided:

- Entity submission: when an entity is submitted, an email is sent to the recipients in the template
- Entity Approval: when an entity is submitted and an approval task is defined, an email is sent to the recipients in the template
- Submitted entity rejection: when an entity is rejected, an email is sent to the recipients in the template

- Reminder Before Task Deadline: once a day, the submission or approval task managers receive an email for any tasks not completed.

- Completion: process task workflows: each time a submission or approval task is completed on a lowest level element, all managers of the subsequent tasks receive an email.
- Rejection of submitted elements: each time a certified element is rejected, all the task managers of the submission and approval of the lowest level element receive an email.
- Send Summary Email on Task Completion: once a day, for each lowest level element not yet submitted, all the managers of the subsequent task receive an email for each submission or approval task completed.
- Send Summary Email for Rejected Elements: once a day , for each lowest level rejected, all the task managers of the submission and approval of the lowest level element receive an email.

Note: A user is only considered to be 'responsible for the task' if he/she is explicitly restricted on the reference entity/task.

Examples of notification configuration

To send the email ...	Then...
once a day with tasks falling due	set **Email event type** = **Reminder Before Task Deadline** and activate the reminder email
when the submission task has been completed	set **Email event type** = **Completion: Process task workflows**
when an element is rejected	set **Email event type** = **Reject Submitted Analytical Dimensions**
once a day with the summary of completed tasks	set **Email event type** = **Send Summary Email on Task Completion** and activate the summary email
once a day with the summary of rejected lowest level elements	set **Email event type** = **Send Summary Email for Rejected elements** and activate the summary email

Deadline dates

You can set the following dates by business cycle, step and element:

- for operational tasks: the dates by which the task must be finished
- for submission tasks:
  - the submission deadlines, namely the dates by which the lowest level element must be submitted
  - send reminder email, namely the dates from which the reminder emails to submit an element are sent

Managers

Only for list steps.

It is possible to assign the managers of the task for each business cycle, step, element, and task. Task managers are those authorized to run tasks, mark them as completed, and revoke that status.

Submission rules page

Admin

Application database > Processes tile > select process > > Process setup > (Data Entry & Submission Rules section) > Submit >

Application database > Navigation Panel > Processes & Workflows > Process > > Process definition > (Data Entry & Submission Rules section) > Submit >

Purpose of the page

This page allows you to set overrides on the following default elements:

- data submission rules
- data rejection rules
- rules for locking data editability in the rejection step
- default overrides for the incorrect data submission

Page sections

Section	Description
Submit	Defines specific behaviours for the data processing run on submission and for how to purge submission tables, run diagnostics on steps prior to the submitted step, and store diagnostic data offline.
Lock data	Defines the method that the system uses to make data that contributed to the submission of an entity or journal no longer editable, even if rejected. The origin is no longer manual and users must input new data to leave a trace of the corrections made.
Reject	Defines the specific behaviour for performing rejections
Override submission	Defines submission overrides.

Fields in the Submission section

Element	Description
Run data processing on submission	Allows you to run all data processing enabled on the process automatically in the submission launch step (with the exception of cash flow planning and closing).

Fields in the Lock data section

Element	Description
With manual origin on the Journals submission	Places the SUB_ prefix before the original origin on the journal rows with manual origin that have been submitted.
Calculation on journal submission	Places the SUB_ prefix before the original origin on the journal rows that have been calculated by the calculated accounts data processing and submitted.
With manual origin on the submission of the entities/nodes	Places the SUB_ prefix before the original origin on the (gross and intercompany) amount rows and manual journal when submitting the entity.
With calculation origin on the submission of the entities/nodes	Places the SUB_ prefix before the original origin on the (gross and intercompany) amount rows and journals generated by the calculated accounts data processing when submitting the entity.

Fields in the Rejection section

Element	Description
Mandatory reason	Makes it mandatory to select a rejection reason to be able to reject an entity's data.

Fields in the Override submission section

Element	Description
By user	Allows authorised users to submit the step even if there are blocking errors. See User lists in the System Administration section.
With authorization of blocking errors	Allows you to submit the step, even if there are blocking diagnostic errors, provided they have been authorised. In the validation rules, the **Enable detected errors trace** must be enabled (see Diagnostic Rules page). Authorised errors with **Blocking**severity will be renamed **Authorised blocking**.

Checking rules page

Admin

Application database > Processes tile > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Checking Rules

Application database > Navigation Panel > Processes & Workflow > Process > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Checking Rules

Purpose of the page

This page allows you to define the validation rules for each individual step of the process. For each rule, you can also define an error message to be returned when the rule has not been satisfied.

You can enter only rules defined within an Analytical Workspace/dataset linked to the selected step.

Attributes on the page

Element	Description
Step	Selected Business Workflow step
Checking rules	Rule to satisfy to submit the selected step
Error message	Error message returned if the rule is not satisfied and the submission fails

Deadline dates page

Admin

Application database > Processes tile > select process with dimension by step > ⋮ > Process setup (Organisation & Workflow section) > Deadline dates

Application database > Navigation Panel > Processes & Workflow > Process > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Deadline dates

Purpose of the page

Using this window, for each step of the process you can define the date by which a task must be completed, and the date for sending the submission reminder.

Page fields

The page has two tabs: **Lowest level elements** and **Nodes**. Unless otherwise specified, the fields are present in both tabs.

Field	Description
Size	Element or node of the dimension selected within the hierarchies of the organisational dimension of the process
Task workflow	The task workflow of the selected step
Task	Task for which the (operational or submission/approval) deadline is set
Deadline date	Data by which the task must be completed
Override date	(Only the **Lowest level elements**tab, and for **submission/approval tasks**) Allows you to set a different start date for the sending of reminder emails compared to the default date.
Reminder Start date	(Only the **Lowest level elements** tab, and for **submission/approval tasks**) Date from which task managers will start to receive reminder emails

Reminder and summary emails window

Admin

Application database > Processes tile > select process with dimension by step > ⋮ > Process setup (Submission and notifications section)> Reminder and summary email

Application database > Navigation Panel > Processes & Workflow > Process > select process with dimension by step > ⋮ > Process setup > (Submission and notifications section) Reminder and summary email

Purpose of the page

On this page, you can enable and configure sending the following types of emails:

- **daily reminder** to all managers of the element, to signal the **upcoming deadline** for the task
- **daily reminder** on completion of a submission task or on rejection, to the managers of the element

Actions on this page

Element	Description
Send submission reminder starting from	If selected, allows you to set how many days before the deadline to send the reminder, and at what time.
Send Summary email	If selected, this allows you to set the time for sending the daily summary email.

Notification emails

Contents

This section covers the following topics:

Notification emails 277
Send email events 278
Email templates page 280
Parametric e-mail elements 281
Manage the sending of emails 282

Notification emails

Introduction

CCH Tagetik can send automatic notification emails to the user when certain events occur within the application. To set this behaviour, it is necessary to configure an *email template*, or define the rules for sending emails and email content (email content, email originating event, recipients, etc.).

Email template configuration

To create email template it is necessary to define the following data:

- the event type related to the process originating the send email event (e.g. task completion of process workflows)
- the email format
- the subject and body of the email, in which place markers related to parametric elements can be inserted
- the recipients, i.e. single users or groups of users of CCH Tagetik .

For more details, see the email template configuration page. See "Email templates page" on page 505.

Parametric elements in email templates

Place markers can be inserted in the subject and body of the email template for parametric elements related to process data.

When sending the email, the system replaces the parametric elements with the specific process data that originated the send email event. For example, the string in the email template 'Entity ${entity} has been submitted' becomes 'Entity A00 has been submitted' when sent.

For more details on parametric elements. See "Parametric e-mail elements" on page 506.

Tracking the sending of automatic emails

The automatic sending of emails can be tracked in CCH Tagetik ‘s audit trail. See Procedure di gestione audit.

Email transmission protocol

CCH Tagetik uses the SMTP (Simple Mail Transfer Protocol) transmission protocol.

Depending on the chosen configuration, the following types of email session are possible:

Session	Configuration	Description
Mail Session Application Server	The SMTP session is configured in the application server.	The email sender is defined by the parameter of the *name mail.from* property of the configuration XML file.
Custom Mail Session	The SMTP session is configured via the repository.	The email sender is defined by the Repository's *mail from* parameter. The following types of sender are supported: • **Single**: the email's **From** field inherits the email address indicated in the Repository's *Default Mail From* field. • **User**: the email's **From** field inherits the email address indicated in the user settings.

Specific behaviour for sending by event type

Element	Description
Submission events	Either "Specific recipients" or "Recipients", or both, must be selected. The emails will not be sent to the user who originated the event, not even if they are on one of the lists of recipients.
IC matching cockpit events	"Specific recipients" must be selected. The emails will only be sent if the cockpit was opened with a relationship type other than Node. They will not be sent to the user who originated the event, not even if they are on one of the lists of recipients.
Events related to data processing	"Recipients" must be selected. Emails will also be sent to the user who originated the event if they are on the list of recipients.
Events related to the completion of tasks	When the event relates to a task included in a process, no recipient needs to be specified. The emails will be sent to those responsible for the subsequent task (if the sending of notification emails is enabled on the task) and to the user who originated the event if they are one of those responsible for the subsequent task.

Send email events

List of events that originated the sending of emails

The list of events that trigger the sending of emails is provided below:

Element	Description
Processes with approval workflows	
Entity submission	Sends the email when one of the entities is submitted.**Only for processes with Entity dimension.**
Submission of the last entity below the Higher entity	Sends the email when the last child entity of a parent node is submitted. The email is sent to all users associated with the parent node. **Only for processes with Entity dimension.**
Entity approval	The email is sent when, if an approval workflow is defined for the entity, the submission task is run (i.e., when the entity transitions to the 'in submission' status and the corresponding indicator on the dashboard turns blue). **Applicable only to processes with Entity dimension.**
Reject submitted elements	Sends the email when an entity changes from **Submitted** to **Rejected**. **Only for processes with Entity dimension.**
Reject "Submission in progress" entity	Sends the email when an entity changes from **In Submission** to **Rejected** (cancelling the Approval step). **Only for processes with Entity dimension.**
Reminder on Entity submission	Sends the email on the submission reminder dates set for the process. **Only for processes with Entity dimension.** See Set deadline window.
Reminder Before Task Due Date	Reminds the user of the due date by sending a **daily reminder** to all managers of the element. The reminder starts from the number of days prior to the specified deadline. **Only for process hub.** See Deadlines dates page.

Element	Description
Completion: Process task workflows	allows the task managers to be notified via e-mail when the previous task has been completed
Send Summary Email for Rejected elements	once a day, when an element is rejected, it sends a reminder to the submission and approval task managers. **Only for process hub.**
Send Summary Email on Task Completion	Once a day, when a task is completed, a reminder of the next task is sent to the managers **Only for process hub.**
Journal approval	Sends the email when the journal approval tasks for which an approval workflow is provided are run (i.e., when the journal goes into "in submission" state).
"Submitted" journals rejection	Sends the email when a journal is rejected.
"Submission in progress" journals rejection	Sends the email when the journal status changes from **In Submission** to **Rejected** (cancelling the Approval step).
Generic event	deprecated
Intercompany matching cockpit	
IC insertion is Complete	Sends the email when the insertion of the entity's intercompany entries is declared complete.
Carry forward IC insertion	Sends the email upon the carry forward of the insertion of intercompany entries related to an entity for which it had already been declared complete.
IC matching	Sends the email when the relationship between the entities is submitted/blocked.
Carry forward submitted IC relationship	Sends the email when a relationship between entities that have already been submitted is carried forward.
Unlock IC relationship	Sends the email when a previously blocked relationship is carried forward.
Data processings	
Cashflow planning (deprecated)	Sends the email when the indicated data processing ends.
Closing	
Purge closing entries (deprecated)	
ETL routine for values	
Dictionary elements of an ETL dimension	
Lookup table elements	
ETL job for values	
ETL job for tables	
Consolidation area basic data processing	
ETL routine for tables	
Consolidation area basic data processing	
Consolidation area final data processing	
Preliminary data processing on Consolidation scenarios	
Group consolidation data processing	
Entity data processing	
Preliminary data processing on Original scenarios	
Snapshot	
Create snapshots automatically (deprecated)	Sends the email when a snapshot is created automatically.
Attachment	
Replace attachments	Sends the email when the attachments to a Collaborative Office document are replaced.
Spreading	
Banking IC spreading	Sends the email at the end of IC Spreading data processing.

Email templates page

Admin

Application database > Processes tile > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Template notifications management >

Application database > Navigation Panel > Processes & Workflow > Process > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Template notifications management >

Purpose of the page

This page allows you to configure email templates for the sending of automatic notification emails.

Configuration tab

Element	Description
Attributes	Defines the features and contents of the template.
Recipients	Defines the recipients of the automatic email.

Fields in the Attributes tab

Element	Description
Code	Defines the template's identification code.
Email event type	Defines the event that originated the automatic sending of the email. See Send email events.
E-mail text type	Defines the email format.
Enable	Enables the sending of emails when the event defined in **Email event type** occurs.
Subject	Defines the email subject.
Body	Defines the content of the email.

Fields in the Recipients tab

Element	Description
Specific recipients	Defines the type of users who will receive the email and the contributor/submitter role of the users in the process. The options for groups of users vary based on the value defined for **Email event type**.
Recipients	Allows you to select specific users to whom to send the email. To be able to use this, sending to Contributors and/or Submitters must have been enabled in **Specific recipients**.
Excluded Recipients	Allows you to select specific users to be excluded from the sending of the email. If groups have been defined in **Specific recipients**, this allows you to exclude specific users from the group of users.
Specific recipients in Cc	Defines the type of users who will receive the email in carbon copy and the contributor/submitter role of users in the process. The options for groups of users vary based on the value defined for **Email event type**.
Recipients in Cc	Allows you to select specific users to whom to send the email in carbon copy. To be able to do this, sending to Contributors and/or submitters must have been enabled in **Specific recipients in CC**.
Recipients not in Cc	Allows you to select specific users to be excluded from the sending of the email in carbon copy. If groups have been defined in **Specific recipients in CC**, this allows you to exclude specific users from the group of users.
Specific recipients in Bcc	Defines groups of users who will receive the email in blind carbon copy and the contributor/submitter role of users in the process. The options for groups of users vary based on the value defined for **Email event type**.

Element	Description
Recipients in Bcc	Allows you to select specific users to whom to send the email in blind carbon copy. To be able to use this, sending to Contributors and/or Submitters must have been enabled in **Specific recipients in BCC**.
recipients not in BCC	Allows you to select specific users to be excluded from the sending of the email in blind carbon copy. If groups have been defined in **Specific recipients in BCC**, this allows you to exclude specific users from the group of users.

Buttons and/or links on the page

Element	Description
	Opens a window to enter the text.

Parametric e-mail elements

List of parametric elements

The list of available parametric elements for send e-mail events is provided below:

Element	Description
${process}	Process code.
${process.desc}	Description of the data collection process.
${scenario}	Scenario code.
${scenario.desc}	Scenario description.
${period}	Period code.
${period.desc}	Period description.
${entity}	Entity code (entity/node/journal).
${entity.desc}	Entity description (entity/node).
${entityname}	Value of the name assigned to the Entity dimension in the general configuration.
${dimension}	Dimension (entity/analytical dimension/custom dimension) code. Only for process hub.
${dimension.desc}	Description of the dimension (entity/analytical dimension/custom dimension). Only for process hub.
${dimension.codeDesc}	Code and description of the dimension (entity/analytical dimension/custom dimension). Only for process hub.
${rootUrl}	Address of the server with which the request that originated the event associated with the e-mail was started.
${step}	Step code.
${step.desc}	Step description.
${user}	Code of the user who originated the event.
${user.desc}	Description of the user who originated the event.
Submission events	
${journal}	Journal code, only for journal submission.
${journal.desc}	Journal description, only for journal submission.
${message}	Note added during an entity rejection step.
${rejectionNote}	Comment added during a dimension rejection step. Only for process hub.
${dimension.details}	Code, Description and Comment added in the dimension approval or rejection step. Only for event types "Send Summary Email for rejected elements" and "Summary Email on Task Completion". Only for process hub.
${daysBeforeExpiration}	Only with the option to send reminders for the submission of entities. Number of days before the submission deadline.
Intercompany matching events	
${cockpit}	Code of the intercompany matching cockpit.
${entityctp}	Counterparty entity code.
${entityctp.desc}	Counterparty entity description.
${customdim2}	Code of the custom dimension 2 element on the open intercompany cockpits with relationship type: by entity/custom dimension 2.
${customdim2.desc}	Description of the custom dimension 2 element on the open intercompany cockpits with relationship type: by entity/custom dimension 2.

Element	Description
${customdim2ctp}	Code of the counterparty custom dimension 2 element on the open intercompany cockpits with relationship type: by entity/custom dimension 2.
${customdim2ctp.desc}	Description of the counterparty custom dimension 2 element on the open intercompany cockpits with relationship type: by entity/custom dimension 2.
${customdim2name}	Value of the name assigned to custom dimension 2, used for open intercompany cockpits with relationship type: by Entity/Custom dimension 2.
Data processing events	
${*<parameter>*}	Data processing parameter chosen by the user (e.g. ${aziendaList}, ${scenarioPeriodoOriginarioList}, ${scenarioPeriodoConsolidamentoList}...).
${elaborationError}	If the data processing has failed, this is defined as *True*.
Task workflow task events	
${Usertype}	The possible values are: • 1: the entity is an entity or contributor node. • 2: the entity is a consolidator node.
${activity}	Code of the task performed.
${task}	Code of the task performed. Only for process hub.
${task.desc}	Description of the task performed. Only for process hub.

Manage the sending of emails

Application database > Data processing tile > Email templates

Application database > Data processing > Email templates

Sequence of procedures

To set up the sending of automatic emails regarding the process, the following procedures are necessary:

1. "Define the email recipients" below.
2. "Define the email contents" below.
3. "Enable the sending of emails on the process" on the facing page.

Define the email recipients

1. Click ⊕ to create a new email template.
2. In the **Attributes** tab, enter an identification code for the template in **Code**.
3. In **Email event type**, select the condition that triggers the automatic sending of the email.
4. In the **Recipients** tab, select the desired types of user in **Specific recipients**.
5. To send the email to specific users of the environment only, click ... in the **Recipients** field and select the desired users in the **Select elements** window.
6. To exclude specific users in the selected group from the email, click ... in the **Excluded Recipients** field and select the desired users in the **Select elements** window.
7. Repeat steps 4 to 6 to define the recipients of carbon copies (in CC) and blind carbon copies (in BCC).

Define the email contents

1. In the **Attributes** tab, select the desired format for the email text in **Email text type**.
2. Enter the subject of the email in **Subject**. To insert parametric elements. See List of parametric elements of email.
3. Enter the body of the email in **Body**. To insert parametric elements. See List of parametric elements of email.
4. Select **Enable** to enable the sending of the created template.
5. Click **Save**.

Enable the sending of emails on the process

Application database > Processes tile > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Checking rules

Application database > Navigation Panel > Processes & Workflow > Process > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Checking rules

Select the **Notifications and events** box and click **Save**.

Financial rules and data processing

Contents

This section covers the following topics:

Rules of CCH Tagetik 284
ETL execution plan page 285
Carry forward rules page 286
Calculation Logics 287
Calculation logic requirements page 288
Calculation logics graph page 288
Define overridden amounts page 289
Override calculation logics page 289
Validations 290
Diagnostic Rules page 291
Plausibility diagnostic page 293
Balancing data processing 294

Rules of CCH Tagetik

Introduction

CCH Tagetikapplies the general rules to check the following behaviours:

- general configuration
- (financial statement) carry forwards
- calculation of taxes
- IC calculation, matching and elimination logics
- running of the consolidation data processing
- configuration of financial investments accounts
- allocation of amounts
- financial planning
- running of diagnostic data processing and plausibility checks
- automatic sending of notification emails

Depending on their use, the rules can be grouped as follows:

Rule type	Description
Configuration sets	These are high-level general settings that cannot be overridden or changed for individual processes. Configurations are, for example, the general behaviour settings CCH Tagetik that apply transversally to all processes (i.e. setting the accounting sign).
Specific rules	These are the rules defined at application database level. They can be overridden, if necessary, for individual processes. If there are no overrides, these are the rules that CCH Tagetik uses to run data processing, calculations and so on. In practice, to define a rule you must fill out one or more tables.
Metadata rules	These rules are defined on metadata and can be overridden for individual processes.

Rule type	Description
Calculation Logics	Calculation logics are rules that define how to run only part of a data processing operation. They are less granular, so that they can be grouped in different ways. They cannot be overridden for processes, but you can select which logics to associate with each process. For example, you can create different calculation logics for accounts, but use some of them for the budget process and others for the actual process.
Specific process rules	These rules are directly defined on the process and act only on that process. They are defined, based on the general rules, as overrides.
Execution plans (on the process)	These are operational rules that apply to the same process but vary by entity, scenario and/or period.

By default, data entry is enabled on all processes.

Rules applied to individual processes

The following rules are applied to each process:

- configurations
- specific generic or overridden rules, if present
- rules defined on metadata tables or overridden rules, if present
- calculation logics selected through a node of groupings
- rules defined directly on the process
- execution plans defined directly on the process.

Advanced rules are optional, and if not set, the default values are considered.

Rules for gross and IC amounts

Generic rules are set, and possibly overridden for the process, from the (Amount & IC rules page in the Data Entry section)

Journal rules

Generic rules are set, and possibly overridden for the process, from the (Journal rules and settings page in the Data Entry section)

Override entity parameters on original scenarios

The entity parameters on original scenarios can be set, and possibly overridden for a process, from the specific page (Override Entity parameters on original scenarios page in the Processes section).

ETL execution plan page

Admin

Application database > Processes > select process > ⋮ > Process setup > (Data Processing Section) ETC >

Application database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup > (Data Processing section) ETL >

Purpose of the page

This page allows you to create ETL data processing execution plans. For each plan, it allows you to enable ETL routines or jobs within the specific process. These ETL routines or jobs can then be run from the processes cockpit or from a task in a task workflow for the selected entities.

The following options are available:

- **Routines on metadata**
- **Routines on amounts**
- **Jobs on metadata**
- **Jobs on amounts**

Buttons and/or links on the page

The specific actions for the page are specified below.

Element	Description
Definition result	Shows the results of the set data processing plan, i.e. the entities and relative ETL routines or jobs that can be run from the processes cockpit or from a workflow task.

Attributes tab data

Element	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Entity	Code of the entity or node of entities within the available non-time dependent hierarchies to be included or excluded from the data processing
Jobs	Jobs to be run
ETL domain	ETL domain with all the settings to define ETL routines
Routine	ETL routine belonging to the domain to be run

Carry forward rules page

Admin

Operational database > Processes > select process > ⋮ > Process setup > (Data Processing Section) Carry forward >

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process set up > (Data Processing section) Carry forwards >

Purpose of the page

This page allows you to override the rules that control carry forward operations for a specific process.

Buttons and/or links on the page

Element	Description
Generic rules	
Input and ouput accounts	Open the Carry forward rules - Accounts definition page to select the accounts to be carried forward onto different accounts, duly managing the balancing of variations.
Override carry forward categories	Open the Override Carry Forward Categories page to change the data category during the carry forward.
Normal and Detail accounts/Categories to exclude	Open the Normal and Detail accounts/Categories to exclude page to exclude certain data from the carry forward.
Specific rules	
Exclude Scenarios from Carry forward	Open the Exclude Scenarios from Carry forward page to select the scenarios/period on which not to run the carry forward.

Options on page

Option	Description
Run carry forward on	Allows you to select the accounts on which to run the carry forward. **Process accounts**: all parent accounts of variation type control groups belonging to the process of the selected scenario/period and all journals indicated in the header as to be carried forward are carried forward. **All accounts**: all accounts on which data is present are carried forward, even if not included in the process.
Journals rows aggregation type	Allows you to define the type of aggregation for rows of journals on the carry forward scenario. Or not to aggregate the rows in order to keep the same detail as the previous year's scenario. **Aggregate according to dimensions**: aggregates the scenario rows by dimension. **Aggregate according to dimensions and notes**: aggregates the scenario rows by dimension and notes. **Don't aggregate**: maintain the same details as the previous year's scenario. ***Note**: aggregating the rows allows you to read the data more easily and reduce the number of records in the database.*
Allow preliminary data processings on data that belongs to submitted steps.	Allows you to carry forward variations and journals onto data belonging to submitted steps; normally, such data is excluded from the carry forward.
Carry forward journals: include attachments	Allows you to include any attachments from the previous year when carrying forward a journal.

Calculation Logics

Available types of logic

Calculation logics can be **Basic** or **Other**.

Field	Description
Base	Logics first run by the system during consolidation data processing, see Consolidated financial statements in the Consolidation section. All calculation logics generated automatically by the system are **Basic**. They can be enabled on entities or on the group. For example, there are logics related to result accounts (see Result accounts in the Data Model section), control groups (see Control groups in the Data Model section) and plug accounts and logics that calculate the gross figure of an account based on its intercompany amount.
Other	Logics run in the second instance by the system during consolidation data processing. In turn, these can be enabled on entities, on the group, or on the consolidation area.

Logics created by users can be either**Basic** or **Other**.

Managing loops between calculation logics.

When defining the calculation logics to be used, the system checks whether there are any loops between calculation logics. If there are, it prevents all calculation logics from being run.

However, it is possible to intervene on apparent loops, i.e. those generated by Multidimensional Script calculation logics, whose output accounts are also input accounts for other logics. To do this, it is necessary to override the sequence of the calculation logic when defining it (*Setup & Admin > Data Processing > Calculation logics > Elements*). (*Navigation panel > Data Processing > Calculation logics > List*). In fact, the system runs the logics of every sequence sequentially and only analyses possible dependencies between logics with the same sequence number. For more details on the application of calculation logics to data processing, see Data Processing Overview in the Data Processing section.

***Note**: to preserve performance when running calculation logics, only override the sequence in the event of apparent loops.*

Calculation logic requirements page

Admin

Application database > Processes tile > select process > > Process setup > (Data Processing section) Calculation logics >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing section) Calculation logics >

Purpose of the page

This page allows you to set the calculation logics to be used.

Page fields

Field	Description
Calculation logics node	Node of the group of calculation logics to be used.
Net result	Set of results accounts. The ones applied to the process can be overridden.
Display calculation logic graph	Opens a page displaying the execution order of the calculation logics in deployed view.

Calculation logics graph page

Admin

Application database > Processes tile > select process > > Process setup > (Data Processing section) Calculation logics > > Display calculation logic graph

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing section) Calculation logics > > Display calculation logic graph

Purpose of the page

This page shows the dependencies of the various calculation logics and the execution order of those logics.

Page tabs

Field	Description
Original scenarios, Basic	Shows the **Basic** calculation logics for the original scenarios and their execution order.
Original scenarios, Others	Shows the **Other** calculation logics for the original scenarios and their execution order.
Consolidation Scenario, Basic and Others	Shows the **Basic** and **Other** calculation logics for consolidation scenarios and their execution order.

Columns in the tables

Field	Description
Sequence	Order in which the account calculation logics will be processed
Calculation Logic	Calculation logic to be processed
Dependencies	Calculation logics the output of which determines the value of the logic specified in **Calculation logics**
Level	Level of the logic on the graph. 0: logic with no dependencies ≥1: logic to be processed after a lower-level logic, on whose output it is dependent

Define overridden amounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Calculation logics > ✎ > Define overridden amounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup > (Data Processing section) Calculation logics > ✎ > Define overridden amounts

Purpose of the page

This page allows you to define overrides for calculation logics.

Attributes tab

Field	Description
Calculation Logics	Code of the logic to be overridden
Run on Original Scenarios	Allows you to define when to run the calculation logic on the original scenarios. • **From Table**: according to what is set in the calculation rules table • **No**: never • **Automatic and Submission**: when executing the (Basic and Other) formulas and submitting the data collection process • **Automatic**: when executing the (Basic and Other) formulas • **On demand**: the logic can only be run manually, via data entry forms, or by being linked to an ETL routine.
Logic Type	Type of logic to be overridden • **From Table**: according to what is set in the calculation logics table • **Other**: Other logic type • **Basic**: Basic logic type
Run on Consolidation Scenarios	Allows you to define when to run the calculation logic on the consolidation scenarios. • **From Table**: according to what is set in the calculation logics table • **No**: never • **Automatic**: when executing the (Basic and Other) formulas • **On demand**: the logic can only be run manually, via data entry forms, or by being linked to an ETL routine

Override calculation logics page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Calculation logics > ✎

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) Calculation logics > ✎

Purpose of the page

This page allows you to open pages to define the desired overrides and see the results of override definition operations.

Buttons and/or links on the page

Element	Description
Define overridden amounts	Allows you to define the desired overrides.
Definition result	Shows the results of override definition operations.

Validations

Validations option function

The **Validations** option enables, in the process, the validation of data using a standard diagnostic check or plausibility diagnostics. It also allows you to change the validation rules for the specific process.

Characteristics of the diagnostics

Diagnostics, defined using the validation rules, allow you to run diagnostics for entities and, from the relative data entry activities, diagnostics for amounts and journals. Allows you to define the checks to be carried out with the diagnostics and therefore, indirectly, to define how automatic data balancing and data submission works.

Stored procedure and diagnostic parameters

Allows you to run, together with the other data processing to be launched with the diagnostics, a stored procedure that responds to CCH Tagetik's minimum requirements. This only makes sense if you have chosen to run data processing on diagnostics.

The name of the stored procedures that can be run directly from CCH Tagetik must start with **CPM_SP_**, regardless of any schemes. In order for the stored procedures to be able to read the diagnostic parameters, the files of those parameters must be named as follows, based on their content:

Name	File contents
PROCESS	Data collection process
ENTITY_HIERARCHY	The process's organisational hierarchy
STEP_LIST	List of steps
ORIGINAL_SCENARIO_PERIOD_LIST	List of original scenarios/periods
ENTITY_LIST	List of entities
CONTRIBUTOR_NODE_LIST	List of contributor nodes
CONSOLIDATOR_NODE_LIST	List of consolidator nodes

Stored procedures are only run on the original scenarios/periods.

Validation of annual results

The validation of the annual results consists of running diagnostics on the control group **$BS_<result account code>**. The result account code to be used is the one defined in the process rules for the process subject to diagnostics.

Tracking of errors found by diagnostics

Errors found by diagnostics are only saved and added/updated on every submission or running of the diagnostic tool if the "update log" option has been activated.

Errors can only be logged for the original scenarios. It is always possible to justify errors and attach explanatory/justifying files, for scenarios that are not stored offline, by accessing the log management window. The authorisation of an error can only be added/removed if the **With authorization of blocking errors** option has been selected from among the submission override modes in the submission rules.

Reporting failed journal submission

CCH Tagetik allows you to configure the severity (*severity*) with which the failure to submit a journal is reported. To do this, journal submission needs to have been enabled. Journal submission is active on the entities/steps on which a task workflow was entered for the submission of journals in the Processes tile > Process setup > Mapping.

Submission error severity (Severity)

Severity levels are used by the submission to assess the correctness of an entity's data. If diagnostics return results with blocking severity, then the submission of an entity's data cannot be completed.

Characteristics of plausibility diagnostics

This type of diagnostics compares the amounts of one scenario/period with the amounts of the same collection of data from another different scenario/period. It therefore shows the results of the comparison via various error messages or warning messages.

Functioning of plausibility diagnostics

When a definition row is added or edited in plausibility diagnostics, a deployment data process is automatically run when saving, allowing you to obtain all the entities deriving from this synthetic definition. In particular, the following will happen:

- For entities: if a node of entities is selected, it is deployed in the nodes' individual entities.

  ***Note**: the system only considers those which belong to the process.*

- For contributor nodes: nodes are deployed based on the selected node type.

  ***Note**: the system only considers nodes that are significant in the data collection process, or nodes in the entity hierarchy which, in the data collection process, are **To Approve** or **To Submit**.*

- For consolidator nodes: nodes are deployed based on the selected node type.

  ***Note**: the system only considers nodes that are significant in the consolidation process, or nodes in the entity hierarchy which, in the consolidation process, are **To consolidate**.*

Where to define the generic validation rules and the plausibility check logics

The generic validation rules and plausibility check logics are defined in the following sections, respectively:

Setup & Admin > Data processing > Diagnostic > Validation

Navigation panel > Data Processing > Diagnostic > Validation

See Specific validation rules in the Diagnostics section.

Setup & Admin > Data processing > Diagnostic > Plausibility check logics

Navigation panel > Data Processing > Diagnostic > Plausibility check logics

See Plausibility check logics page in the Diagnostics section.

Diagnostic Rules page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Validations > Diagnostic >

Application database > Navigation Panel > Processes & Workflows > Processes > select process > ⋮ > Process definition > (Data Processing section) Validations > Diagnostic >

Purpose of the page

This page allows you to customise the generic validation rules with a diagnostic check on the process and to define overrides.

Generic rules

Field	Description
Validation	
Run data processing on diagnostic	Allows you to run all data processing enabled for the process (with the exception of cash flow planning and closing) when running the diagnostics.
Also include the stored procedure	Only with **Run data processing on diagnostic** selected. Include a stored procedure that meets CCH Tagetik's minimum requirements in the data processing to be run when diagnostics is launched.
Diagnostic result: Show forms on row	Allows you to view, for every error on the control group or account in the diagnostic result window, the forms on which the control group accounts can be edited or the account itself. ***Note**: (non-transactional) standard forms can be edited using Excel or online.*
Categories for which to show the result	Allows you to manage the categories for which to display the validation of the year's result, even in the absence of unbalanced amounts. ***Note**: for control group **$BS_<result account code>**, diagnostics will show the result, even if balanced, on the categories defined here.*
Restore default values	Only if the rules have already been customised, restores the rules' default values.
Result log	
Enable detected errors trace	Allows you to log errors returned by diagnostics so you can consult, justify and authorise them. ***Note**: only logged errors are saved and can therefore be consulted over time.*
Don't propagate the authorized blocking error information	This check looks for the presence of blocking errors authorised by users responsible for the entity on which diagnostics were run. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the presence of blocking and authorised errors is reported with blocking severity. • **Non-blocking**: the check is performed and the presence of blocking and authorised errors is marked as being of non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed. The prerequisites for running this check are: • the traceability of errors found by diagnostics is enabled • the submission mechanism is enabled in the submission rules via authorisation of blocking errors
Journals submission validation	
Diagnose Manual journals submission	The check verifies that the manual journals belonging to the entity on which the diagnostics were run have been submitted. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the non-submitted manual journals are reported with blocking severity. • **Non-blocking**: the check is performed and the non-submitted manual journals are marked as being of non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed.
Diagnose Automatic journals submission	The check verifies that the automatic journals belonging to the entity on which the diagnostics were run have been submitted. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the non-submitted automatic journals are reported with blocking severity. • **Non-blocking**: the check is performed and the non-submitted automatic journals are marked as being of non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed.

Field	Description
Intercompany Cockpit	
IC cockpit: Balancing threshold of Compensation reconciliation accounts	Value provisionally set in the generic validation rules. The threshold, if set, is applied during the matching of relationships present in the IC Cockpit. Specifically, it will be used by the check that verifies the balancing of amounts linked to variation/detail types used on several matching rules.

Specific rules

Field	Description
Equality control groups	Opens a page to define specific rules to be applied to balancing control groups with equality operators.
"Other" control group	Opens a page to define specific rules to be applied to "other" control groups, or balancing control groups with non-equality equality operators. The rules are not applied to control groups with coherence operators.
Accounts	Opens a page to define specific control rules for accounts.

For further details on validation rules for diagnostic data, seeSpecific Rules

Plausibility diagnostic page

Application database > Processes tile > select process > > Process setup > (Data Processing section) Validations > Plausibility diagnostic >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing section) Validations > Plausibility diagnostic >

Purpose of the page

This page allows you to set the plausibility diagnostics requirements, or to associate a group of plausibility logics to be run during diagnostics with every entity, contributor node and consolidator node. Also allows you to override the security level to be applied to them.

Page tabs

Field	Description
Elements	Defines the plausibility logics to be applied to entities.
Contributor nodes	Defines the plausibility logics to be applied to contributor nodes.
Consolidator nodes	Defines the plausibility logics to be applied to consolidator nodes.

Attributes tab

Field	Description
Action	• **Include** (default) • **Exclude**
Original scenarios/periods	Original scenarios/periods of the process to which to apply the overrides: • **Selected** (default) • **All**
Entity	Only for the **Elements** tab. Allows you to select an entity belonging to the process or a node of entities within the available non-time dependent entity hierarchies.
Contributor node	Only for the **Contributor nodes** tab. Allows you to select an entity node from the organisational hierarchy linked to the process.
Consolidator node	Only for the **Consolidator nodes** tab. Allows you to select an entity node from the organisational hierarchy linked to the process.
Node type	Only for the **Contributor nodes** and **Consolidator nodes** tab. Indicates the way in which to deploy the selected node.

Field	Description
Plausibility rules node	Valorizzare solo per azione "Includi". Allows you to select the node of logics for the plausibility checks to be applied.
Severity type	Valorizzare solo per azione "Includi". • **Do not run**: combinations with this option selected are not validated. It is used, for example, to exclude entities/nodes from a node to be deployed. • **Automatic**: severity is recovered from the definition of the plausibility logic, where established through specific comparison thresholds.
Definition result	Only appears after a definition has been saved. Shows the result of deployment of the definition, with a list of available combinations.

Balancing data processing

Background

CCH Tagetik checks for the presence of any unbalanced amounts related to diagnostics for control groups and the IC capacity check.

Function

During the data processing step, balancing data processing makes it possible to automatically balance any unbalanced amounts below a certain threshold.

Types of balancing data processing

The available types of balancing data processing are detailed below:

- on entities: balancing data processing is run on data related to entities on the original scenarios, i.e. on amounts and entity journals, both contributor and consolidator.
- on the group: the balancing data processing includes the group consolidation data present on the original scenarios, i.e. the consolidation journals on the original scenarios.
- on the consolidation area: the balancing data processing is run on all data present on the consolidation scenarios, i.e. the consolidation journals on the consolidation scenarios, considering the consolidable amount type.

For more details on balancing functions, see in the Data Processing section.

Data Processing: consolidation

Contents

This section covers the following topics:

Introduction to data processing ... 295
Consolidation Data Processing ... 296
Basic consolidation data processing ... 297
Consolidation Requirements page ... 300
Define Consolidation Area page ... 301
Periods page ... 302
Define consolidation area by period page ... 303
Define relationships between entities and classifiers for the period page ... 304
IC Elimination and Matching Requirements page ... 305
Generate proportional amount page ... 305
Generate converted amount page ... 306
Override FX rate difference accounts page ... 307
Customise account conversion type page ... 308
Generate consolidable and Equity evaluation page ... 308
Minorities page ... 310
Mergers page ... 311
Account reclassification and NER Requirements page ... 311
Rules Engine Designer requirements page ... 312
Advanced consolidation data processing ... 312
Advanced consolidation page ... 314
Financial investments reclassification page ... 315
Equity pick-up Requirements page ... 315
Pick-up percentages page ... 316
Override Pick-up percentages page ... 317
Pick-up rules page ... 317
IC Spreading Requirements page ... 318
Override IFRS5 rules page ... 319
Consolidation procedures ... 319

Introduction to data processing

What is data processing

In CCH Tagetik, there is data processing that can be run transversally within the application. Specific executions for the process can be obtained by changing the requirements and rules of the data processing associated with the process itself.

In the process settings, data processing defines the data processing to be carried out on the process, the requirements and any override rules. The starting point is the data processing that has already been set CCH Tagetik.

Function

Setting data processing allows you to define the data processing to be associated with the process and change the relative requirements. In particular, it gives access to the configuration page for the requirements related to the following data processing:

- ETL
- Carry Forward

- Calculation Logics
- Validations
- Balancing
- Consolidated
- Allocations & Closing
- Cash flow planning
- Taxes
- Other data processing
- Send mail
- Taxes
- Other
- Snapshot

These pages show the general rules for the data processing operations defined in CCH Tagetik, and allow you to change them (“override them”), for the specific process only.

Data processing in CCH Tagetik

For an overall view of the existing data processing in CCH Tagetik and the run order, see Process’s data processing execution order in the dedicated section.

Consolidation Data Processing

Definition of event scenarios for Ownership structure register

An event scenario is a fictitious original scenario used by the system to manage events to date, or events linked to a specific date. In this case, events which from a specific date bring about a change to the ownership structure. Generally, an event scenario is used to manage the actual events; one for each data process of the budget. Thus, hypothetical future events can also be included.

Management of reference FX rate scenario

These settings are defined in the**Define Consolidation Area** page. See Define Consolidation Area page.

To convert the data, CCH Tagetik uses the FX rates of the original scenario linked to the processed consolidation scenario. However, the system can be overridden so it reads the FX rates from another original scenario. This is useful if, with the same original scenario, you want to generate two consolidation scenarios where the only difference between them is the FX rate applied. For example, to convert an actual amount also at the budget FX rate.

Management of prefixes for financial investment reclassification journals

These settings are defined in the **Define Consolidation Area** page. See Define Consolidation Area page.

This prefix is used by the system to compose the journal numbers of the journals generated by the financial investment reclassification. It is essential to enter the same prefix as the source consolidation scenario/period from which the carry forward is being carried out for the following reasons:

- To allow the system to generate the same journal header every year.
- To determine the consolidation scenarios, from among those associated with a given original scenario, to be processed for the reclassification of financial investments.

Composition of consolidation data processing

Consolidation data processing is divided into basic consolidation operations (see Details on basic consolidation data processing) and advanced consolidation operations (see Details on advanced consolidation data processing).

Account reclassification and NER execution plans

The execution plans allow you to relate a node of reclassification logics, from among those present, to a scenario/period/entity triplet. The logic can be related to an Entity or node of Entities for the chosen scenario/period.

Plug account

The plug account is used as a balancing account for the entity in the consolidation journals. It allows you to obtain a balanced BS for the entity. The general rule for the plug account is defined in the *Setup and Admin > Data Processing tile > Advanced Consolidation > Plug account rules page Navigation panel > Data Processing > Advanced Consolidation > Plug account rules page* (see Intercompany matching and elimination logics: advanced settings, in the Consolidation section). Some of the generic rule settings can then be overridden when defining a specific process (see Advanced consolidation page).

Equity pick-up

Equity pick-up (EPU) data processing is an accounting technique that allows you to revalue the value of an owner entity's financial investments based on the current value of the corresponding portion of the owned companies' net equity.

Basic consolidation data processing

Application database > Processes tile > select process > > Process s etup (Data Processing Section) > Consolidation > Basic Consolidation

Application database > Navigation Panel > Processes & Workflows > Processes > select process > > Process definition > (Data Processing section) Consolidation> Basic consolidation

Data processing types

Field	Description
Eliminations and IC matching	Specific elimination and IC matching logics. See "Eliminations and IC matching" on the next page.
Load financial investments on amounts	Automatically feeds the financial investment accounts into the FS amounts based on the data present in the ownership structure register. The data processing acts on the original scenarios.
Import financial investment data into ownership structure register	Imports financial investment data into the ownership structure register from IC amount and Entity journal data. See Import financial investment data into ownership structure register.
Generate contribution	Series of data processing that allows you to obtain the consolidated data based on the original data of companies included in the consolidation. See "Generate contribution" on the next page.
Merger	Operations through which two or more companies in the same group are combined into a single entity, either pre-existing the merger or created from scratch. See "Merger" on the next page.
Deconsolidation	Operations through which entities cease to contribute to the consolidation due to mergers or demergers affecting all or the majority of the entity, closures or bankruptcies. See "Deconsolidation" on page 299.
Account reclassification and N.E.R.	The purpose of account reclassification is to reclassify the values of amounts and adjustments from one account to another. The purpose of net equity reclassification (NER) is to reclassify net equity entries that must not be shown in the financial statements for the consolidated companies, in special accounts. They are performed consecutively, reclassification first and then NER. See "Account reclassification and N.E.R." on page 299.
Rules engine designer	Data processing which, based on input data, allows you to generate journals while applying rules and conditions.

Eliminations and IC matching

Field	Description
Financial investments from ownership structure register	Elimination only logics for financial investments. These are read from the ownership structure register. For example, they concern the elimination of the financial investment against the owned entity's net equity and the elimination of the financial investment's revaluation/devaluation.
by counterparty	Elimination and matching logics that take their input data from intercompany declarations. For example, these concern costs/revenue, receivables/payables, and dividends.

Generate contribution

Field	Description
Generate proportional	Generates the proportional amount type on the consolidation scenario (see Elaborazione di proporzionalizzazione).
Generate converted	Calculates the converted amount type by multiplying the values of the proportional amount type by the FX rate for the consolidation currency. The proportional amount is in local currency for amounts and entity journals and in any currency for consolidation journals.
Generate consolidable and Equity evaluation	Copies data from the converted amount onto the consolidable amount type. The data is copied as is for consolidated entities using the integrated or proportional method, or by generating the equity evaluation journals for consolidated entities using the equity method (see Equitizzazione).
Minorities	Reclassifies the portion of net equity and of the year's result for minorities in specific FS entries. Specific journals are generated for amounts and entity journals; for consolidation journals, reporting is done in the context of the journal itself by generating new rows (see Il calcolo dei terzi).
Use FX rates from ownership structure register	The use FX rates on consolidation scenarios data processing generates overridden FX rates on the consolidation scenario based on the FX rates entered in the ownership structure register (see Elaborazione scarico cambi sugli scenari di consolidamento).

Merger

Field	Description
on initial balances	If the merged entity is deconsolidated as **from initial balances**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the initial balances of the incorporated entity. The data processing precedes the original scenario data processing
from previous period	If the merged entity is deconsolidated as per **from previous period** , the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data of the incorporated entity, taking account of the previous period's entries. The data processing precedes the original scenario data processing
on entities	If the merged entity is deconsolidated as per **from current period**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data carried forward and the new entries of the incorporated entity within the processing period. The data processing acts on the contributor categories and is included in the entity data processing.
on group	If the merged entity is deconsolidated as per **from current period**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data carried forward and the new entries of the incorporated entity within the processing period. The data processing acts on the consolidator categories.

Deconsolidation

Field	Description
on initial balances	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate only initial balances**. The data processing deconsolidates both the amounts and the journals restored on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account.
from previous period	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate from previous period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account.
on entities	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate current period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account. The data processing acts on the contributor categories.
on group	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate current period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account. The data processing acts on the consolidator categories.
on consolidation area	Deconsolidates entities that are defined on the consolidation scenario as to be deconsolidated. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account.

Account reclassification and N.E.R.

Field	Description
on entities	By choosing the entities and periods based on the execution plan indicated on the process to be run, this creates entity journals through which to move the value from the accounts to be reclassified to the target accounts (as defined in the reclassification accounts logics). The data processing is performed on the contributor categories.
on consolidation area	By choosing the entities and periods based on the execution plan indicated on the process to be run, this creates entity journals through which to move the value from the accounts to be reclassified to the target accounts (as defined in the reclassification accounts logics).
Net equity reclassification on entities	Reclassifies, through consolidation journals, the net equity entries that should not be shown in the financial statements for the consolidated companies (e.g. **Other reserves**), in special accounts (**Undivided profits** or similar). Entities and periods are chosen based on the execution plan indicated on the process to be run. The data processing is performed on the contributor categories.
Net equity reclassification on consolidation area	Reclassifies, through consolidation journals, the net equity entries that should not be shown in the financial statements for the consolidated companies (e.g. **Other reserves**), in special accounts (**Undivided profits** or similar). Entities and periods are chosen based on the execution plan indicated on the process to be run. The data processing is run on the consolidable amount type.

Rules Engine Designer (In memory consolidation)

Field	Description
on entities	By selecting the Entities and the original scenarios defined in the execution plan on the process to be run, the system processes the IC Amounts and Entity journal rules contained in the nodes, reading the input combinations on the Input category, and then generates rows in the Output category and dimensions.
on group	By selecting the Entities and the periods according to the execution plan on the process to be run, the system processes the consolidation journal rules contained in the nodes, reading the input combinations on the Input category, and then generates rows on the Output category and dimensions.
on consolidation area	By selecting the entities and periods according to the execution plan on the process to be run, the data processing runs the rules contained in the nodes by reading the input combinations on the Input category, and generates a new consolidation journal on the Output category.

Consolidation Requirements page

Admin

Application database > Processes tile > select process > > Process setup > (Data Processing section) Consolidation >

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup (Data Processing Section) > Consolidation >

Purpose of the page

This page allows you to set the configuration of the consolidation requirements for the selected process.

Page fields

Field	Description
Consolidation engine	Only if required by the general configuration (seeConsolidation options, in the Consolidation section). Consolidation engine to be used. It can be in memory or database.
Event Scenario	Original scenario used to define the ownership structure.
Group events	
Ownership structure register	Opens a window to define group financial investment events. See Ownership Structure Register page, in the dedicated section.
Merger events	Opens the mergers window containing all the scenarios/periods, even those not belonging to the selected process.
Consolidation Areas	
Status	Status for all the consolidation scenarios/periods of the process. • : unlocked • : archived • : locked

Buttons and/or links on the page

Element	Description
Group events	
Ownership structure register	Opens the **Ownership structure register** page to define group financial investment events. See Ownership Structure Register page, in the dedicated section.
Merger events	Opens the **Mergers** page. Displays all the scenarios/periods, even those not belonging to the selected process.
Consolidation Areas	
Define Consolidation area	Opens the **Define Consolidation area** page to define the consolidation scope of the consolidation scenarios related to the selected process.
Copy elements to consolidate	Copies the definition of the elements to be consolidated from the consolidation scenario/period to the desired consolidation scenario/period. ***Note**: the definition can also be copied from a consolidation scenario/period not belonging to the process.*
Manage status	Opens the **Manage status** window to lock/unlock consolidation scenarios/periods that have not yet been archived. Note: Scenarios/periods stored offline are not displayed.
Change in consolidation scope	Opens the **Change consolidation scope report** window to generate a report on consolidation area changes. This report compares the consolidation criteria and entities of the two selected scenarios.
	Opens a page to define the elements to be consolidated.

Define Consolidation Area page

Admin

Application database > Processes tile > select process > > Process definition (Data Processing Section) Consolidation > > Define Consolidation Area

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition (Data Processing Section) Consolidation > > Define Consolidation Area

Purpose of the page

This page allows you to define the consolidation scope of the consolidation scenarios related to the selected process.

Buttons and/or links on the page

Field	Description
	Opens the **Copy Consolidation Area** window to access utilities.
Ownership structure register	Opens a page to manage the ownership structure.
	Opens the **Periods** page to configure the periods of the selected scenario when the page opens.

Attributes tab

Field	Description
Code	Unique identification code of the consolidation scenario. Mandatory field. ***Note**: if you want to create a consolidation scenario here, the generic rules for codes in CCH Tagetik are valid. See Create new codes in the General Procedures section.*
Description	Description of the consolidation scenario

Field	Description
Version description	Free description of the version to which the scenario relates. Only used by reporting.
Year	Year to which the scenario relates. Only used by reporting.
Active	Indicates whether or not the scenario must be shown in the selection list of scenarios present in different windows of the system. Does not affect the locking of data.
Consolidation settings	
Original scenario	Original scenario that feeds the consolidation scenario
Holding	The holding company in the consolidation
Currency	Currency in which the consolidation must be generated. This may be different from that of the holding company. In this case, the holding company will also be subject to the conversion process.
References	
Previous scenario	Scenario used: • by the system, to know where it should restore from • by reporting, to compare data present in the current scenario with data in the indicated previous scenario. It must be different from the current scenario code.
Following scenario	Following scenario with which to compare the data in the selected scenario. It must be different from the scenario code.
Reference scenario 1 **Reference scenario 2** **Reference scenario 3** **Reference scenario 4** **Reference scenario 5**	Scenario that can be used by reporting to specify, for example, the budget data or forecast data relating to actual data. ***Note**: an original scenario can only have an original scenario as its reference, previous or following scenario. A consolidation scenario can only have a consolidation scenario as its reference scenario.*
Exceptions	
Category filter	Filters the data categories with which to feed the consolidation scenario via a node of the categories grouping.
Account filter	Filters the data categories with which to feed the consolidation scenario via an account hierarchy node. If there is a filter account, the system only runs accounts that belong to the filter on the consolidation scenarios. This is also the case if it finds amounts defined on the original scenario. This functionality only appears in the in memory consolidation engine.
Ref. FX rate scenario	Forces the system to read the changes from an original scenario other than the one linked to the consolidation scenario being used.
Financial investments reclass. adj. prefix	Prefix to compose the journal numbers of the journals generated by the financial investment reclassification. To make sure the same header is generated each year, enter the same prefix of the source consolidation scenario/period. For the reclassification of financial investments, CCH Tagetik only processes consolidation scenarios from among those associated with a certain original scenario with this option active. This field overrides the same setting in the consolidated scenarios table.

Relationships tab

Field	Description
Nodes	Node to which to relate the chosen scenario in a group of scenarios. Displays the nodes of scenario groupings to which the consolidation scenarios selected on the current consolidation area can be related.

Periods page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) Consolidation > > Define Consolidation Area > ⋮ > Periods

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition (Data Processing Section) Consolidation > > Define Consolidation Area > > Periods

Purpose of the page

This page allows you to configure one of the financial investment reclassification requirements.

Buttons and/or links on the page

Field	Description
	Consolidation Area Definition: opens a page to define the consolidation area for the selected period. **Entity/classifier relationships**: opens a page to define the relationships between entities and classifiers for the selected period.

Attributes tab

Field	Description
Period	The period's unique identification code. Mandatory field. ***Note**: the generic rules for codes in CCH Tagetik are valid. See Create new codes in the General Procedures section.*
Description	Description of the period
Validity	Period start date and end date
Period length	Period length considered for conversion at the period's average FX rate and for the consolidation and deconsolidation data processing calculation.
Locked	The scenario/period pair cannot be changed.
Archived	The scenario/period data is archived.
Filled	The data for the scenario/period is displayed in the forms produced by the reporting system.

Define consolidation area by period page

Admin

Application database > Processes tile > select process > > Process setup (Data Processing Section) Consolidation > > Define Consolidation Area > > Periods > > Consolidation Area Definition

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition (Data Processing Section) Consolidation > > Define Consolidation Area > > Periods > > Consolidation Area Definition

Purpose of the page

This page allows you to define a consolidation area, on a period, for which to specify requirements and percentages to be used in the consolidation data processing.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings.

Attributes tab

Field	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Entity	Allows you to select the entity or nodes of entities involved in consolidation.

Field	Description
Rules	
Consolidation method	Allows you to select the applied consolidation method. See The Consolidation scenario, in the Consolidation section.
Deconsolidation method	Allows you to select the applied deconsolidation method. See The Consolidation scenario, in the Consolidation section.
Include even if it isn't owned	Indicates whether the Entity must be included in the consolidation scope even if it is not owned by any Entity present in the scope. This setting is useful for management consolidation.
Period of the first Consolidation	Indicates the first consolidation period for entities that entered the consolidation scope during the year. Only for In Memory consolidation.
Percentage	
Consolidation % type - Proportional	To be defined if the entity's consolidation type is "Proportional". See The Consolidation scenario, in the Consolidation section.
Consolidation %	Only to be set if the "Consolidation method" is "Proportional" and the "Consolidation % type - Proportional" is overridden. Must be a value between 0 and 100, inclusive.
Override Equity ratio %	Allows you to enter the equity ratio percentage manually (e.g. when the legal ownership structure is not defined).
Equity ratio %	Overridden equity ratio percentage
Equity ratio % of the period	Equity ratio percentage of the period, if the periodic minorities calculation is active

Define relationships between entities and classifiers for the period page

Admin

Application database > Processes tile > select process > > Process setup (Data Processing Section) Consolidation > > Define Consolidation Area > > Periods > > Entity/Classifier Relationships

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition (Data Processing Section) Consolidation > > Define Consolidation Area > > Periods > > Entity/Classifier Relationships

Purpose of the page

This page allows you to define, on a period, the relationships between entities and classifiers to be used in the financial investment reclassification data processing.

Attributes tab

Field	Description
Entity	Entity for which to run reclassification data processing
Classifier	Classifier to be considered for reclassifying the financial investment
Element	Element of the selected reclassification variable

IC Elimination and Matching Requirements page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Basic Consolidation > IC eliminations and matching >

Operational database > Processes & Workflow > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Basic Consolidation > IC eliminations and matching >

Purpose of the page

This page allows you to customise the configuration of intercompany elimination and matching requirements.

Page fields

In **Requirements**:

Field	Description
IC elimination logics	Node of the group of IC elimination logics to be associated with the process.
IC elimination logics - Definition result	Opens a page with the elimination logics of the selected node.

In **IC cockpits**:

Field	Description
Define IC cockpits	Opens a page to define the IC cockpits.
Add IC cockpit	Allows you to relate a IC matching cockpit to the step of the process. ***Note**: only cockpits already defined by the administrator user can be related (Setup & Admin > Data Processing Tile > Basic Consolidation > IC matching and elimination logics > IC cockpits).*
Logiche di riconciliazione IC - Risultato definizione	Apre la pagina con le logiche di riconciliazione IC del nodo selezionato nella definizione del cruscotto IC.
Categorie - Risultato definizione	Apre la pagina con le categorie selezionate nella definizione del cruscotto IC e, per ogni categoria, l'indicazione delle logiche di riconciliazione IC a cui appartiene.

Generate proportional amount page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate proportional amount >

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate proportional amount >

Purpose of the page

This page allows you to override some elements of the data processing that generates proportional type data on the consolidation scenario.

Page fields

Field	Description
Periodic calculation	If enabled, the system calculates the progressive proportional figure for the current period as the sum of the following figures: • the progressive proportional figure from the previous period and • the periodic original figure multiplied by the period proportional percentage. To identify the previous period the system considers the period length set on the period of the consolidation scenario. It is used to manage the proportional percentage change compared with the previous period and the entities that entered the consolidation area during the year.
Counterparty account for BS and P&L result alignment	The difference between the proportional P&L profit account calculated on a periodic basis and the proportional Balance Sheet profit account, calculated on a progressive basis, is allocated to the reserve account defined herein. The percentage variation account defined in the variation control group is also adjusted at the same time.

Generate converted amount page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount >

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount >

Purpose of the page

This page allows you to override the conversion data processing in the modes and accounts that you are using.

Page fields

In **Generic rules**:

Field	Description
Conversion at historical FX rate	Tells the system if any FS entries, typically the net equity accounts, must be converted with the historical FX rate method.
P&L conversion method for the Consolidation	Strategy for currency conversion in the context of contribution data processing.
FX rate difference accounts	Allows you to override accounts that the conversion data processing must use to allocate the FX rate difference, namely the FX rate difference accounts (Credit/Debit) and the Intercompany FX rate difference accounts (Credit/Debit) for the balance sheet and P&L. See "FX rate difference accounts" on the facing page.
Advanced	Allows you to manage FX rates in particular cases. See "Advanced" on the facing page.

In **Specific rules**:

Field	Description
Customize account conversion type	Opens a page to specify, for each individual account, the conversion type and the reference account, if the conversion type so requires. Customise account conversion type page.

For more details, see Conversion rules page in the Consolidation section.

FX rate difference accounts

Field	Description
Override FX rate difference accounts	Opens a page to override the credit and debit FX rate difference account for each individual account. See Override FX Rate Difference Accounts page.

Advanced

Field	Description
Overridden Var. - Det. type for the FX rate difference on the year's net result	To highlight the FX rate effect deriving from the previous year's profit, an ad-hoc variation can be specified, on which the system will allocate the FX rate difference. The same account defined for the balance sheet FX rate difference will be used, but on a different variation/detail type.
FX rates loading mode	Tells the *Use FX rates from group structure* data processing the entities on which it must download the FX rates entered in the ownership structure register • Amounts and Entity journals • Financial investments elimination journal/Net equity • Amounts, Entity journals and Financial investments elimination/Net equity
Alternative FX rates to Initial balance FX rate when the Initial balance variation is missing	For variations to be converted at the FX rate of the initial balance, the system calculates the rate to be applied by calculating the ratio of the converted amounts to proportional amounts of the initial balance variation. If there is no variation, it is necessary to specify the alternative conversion strategy, which may consist of using the Previous final FX rate or the Previous average FX rate.
Anticipate Intercompany FX rate difference on Original Scenario	
Calculate	Anticipates the calculation of the IC FX rate differences on the original scenario to allow the minorities calculation to take place. ***Note**: this option only applies to processes that use the standard consolidation engine (Databases). The In Memory consolidation engine does not need these settings since the conversion precedes the minorities calculation.*
Reverse journal type	Defines the behaviour for the elimination journals for the anticipation of IC FX rate differences. • **As IC elimination logic**: the standard IC elimination logics are followed. • **Set BS and Variations accounts to 0 and Write off P&L impact (IC)**: the variations will also be set to 0.

Override FX rate difference accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount > ✎ > Override FX rate difference accounts

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount > ✎ > Override FX rate difference accounts

Purpose of the page

This page allows you to override, for every desired account, the accounts that the conversion data processing should use to allocate any FX rate difference.

Attributes tab

Field	Description
Action	Allows you to include or exclude the account that is selected by conversion operations.
FX rate difference type	FX rate difference type to which to apply the override
Account	Account for which to override the FX rate difference account
Category	Category for which to override the FX rate difference account
IC elimination logic	IC elimination logic for which to override the FX rate difference account
FX rate difference account: debit	Account on which to write the FX rate difference as a debit amount
FX rate difference account: credit	Account on which to write the FX rate difference as a credit amount

Customise account conversion type page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount > ✎ > Customise account conversion type

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount > ✎ > Customise account conversion type

Purpose of the page

This page allows you to customise the conversion type and, if the conversion type requires, the reference account, for every desired account.

Attributes tab

Field	Description
Account	Account on which to override the conversion
Conversion	FX rate type to apply to the account
Reference account for Initial balance/Year-to-date average FX rate	Only with **Initial balance FX rates** or **Year-to-date average FX rate** selected. Account used to define the conversion coefficient.

Generate consolidable and Equity evaluation page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate consolidable and Equity evaluation > ✎

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate consolidable and Equity valuation > ✎

Purpose of the page

This page allows you to customise data processing that generates the consolidable amount. The procedure for defining the consolidable amount type works in two different ways, depending on the consolidation type of the entities involved:

- If the entities involved are consolidated on a line-by-line or proportional basis, then the data is simply copied from the converted amount type to the consolidable amount type (disregarding the carry forward).
- If the entities involved (or even just one of them, in case of consolidation journals) are consolidated based on equity, then the converted amount type data is subject to the equity evaluation process.

Moreover, CCH Tagetik also defines the category and the consolidation journals. The category must be subject to equity evaluation, or defined in the equity evaluation rules. For consolidation journals, the equity evaluation mode must not be “None” and the “Many to many relationship” option must not be selected. Thus, journals that adjust entities other than those indicated in the header will not be subject to equity evaluation.

Page fields

Field	Description
Accounts and categories	
Net equity Accounts	Normal and Details accounts that the system takes into consideration for calculating the value of the Owned entity’s share of the net equity. The contra-entry to the variation of these accounts is allocated on the financial investment account.
Categories to evaluate with equity method	Relationships between the Net Equity variation accounts and the Variation/Detail types of the financial investment account that the system will feed as the contra-entry.
Revaluation/Devaluation accounts	
Loss account for consolidated Entity at equity	Account used as the contra-entry to the losses that make up the P&L result
Profit account for consolidated Entity at equity	Account used as the contra-entry to the profits that make up the P&L result
Generic Financial investments account	Account used by the system in the event that it cannot return to the account to be used through the (intercompany) financial statements and entity journals
Advanced	
Entity on which to generate the Equity evaluation journals	Establishes the entity for which the equity evaluation journals are entered: owner entity, entity at equity or whether they are divided between the two of them (Financial investment on owner entity, net equity and P&L result on Entity at equity)
Listed Entity ownership restriction %	Percentage ownership indicating whether or not the listed entity should be calculated at equity when the “calculated” consolidation method is being used
Unlisted Entity ownership restriction %	Percentage ownership indicating whether or not the unlisted entity should be calculated at equity when the “calculated” consolidation method is being used
Sum up *DEST2* in equity evaluation journals	For Entity/DEST2 or synthetic Entity/DEST2 process report types, this determines the custom dimension 2 on which the equity evaluation journals will be entered. • If enabled, the DEST2 code present in the **Equity Owner Entities** window will be taken into consideration in the definition of the elements to be consolidated. • If disabled, the default DEST2 code of the entity will be taken into consideration.
Goodwill	It is possible to retain the effect of goodwill in a specific financial investment account when the system evaluates the financial investment/net equity elimination journal using the equity method. The following accounts should be indicated: • Financial investment accounts dedicated to goodwill on which the goodwill effect is reclassified. • Normal, detail and variation accounts used for goodwill.
P&L accounts to keep	P&L accounts to keep in the consolidation journals in the equity evaluation step in order to keep some P&L effects on the original account (e.g. capital gains)
Financial investments accounts to exclude	Normal financial investment accounts, with the field **Use Account for setup** set to **Financial investment**, to be excluded from equity evaluation.

For more details, see the Equity valuation, in the Consolidation section.

Minorities page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Minorities >

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Minorities >

Purpose of the page

This page allows you to customise the data processing for the minority interests calculation.

Page fields

In **Generic rules**:

Field	Description
Accounts	Opens a page to change the accounts adjusted by the minorities calculation for the direct and indirect minorities portion.
Categories	Opens a page to change the amount and entity journal categories on which minorities should be calculated and the corresponding category on which the minorities journal must be generated.
Periodic minorities	
Periodic minorities calculation	Allows you to customise the variation/detail types to be used to allocate the amount of the % change in minorities for the result shown on the balance sheet.
Area variation - Entrance	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the change in the consolidation area due to the entry of new entities.
Area variation - Exit	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the change in the consolidation area due to entities leaving the group.
Modify % - Increase	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the increase in percentage ownership of a controlled entity.
Modify % - Decrease	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the decrease in percentage ownership of a controlled entity.

In **Specific rules**:

Field	Description
Setup Periodic minorities calculation	Only with **Periodic minorities calculation** selected. Opens a page to override, for each scenario/period of the process, the **Reference date for periodic minorities calculation** and establish which ownership structure events to include and exclude.

For more details, see The minorities calculation in the Consolidation section.

Mergers page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Mergers >

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Mergers >

Purpose of the page

This page allows you to customise the data processing for mergers between two entities in the group. See Mergers.

Page fields

Field	Description
Categories to exclude	Category to be excluded from merger data processing categories

Account reclassification and NER Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Accounts reclassification and NER >

Operational database > Model > Processes & Workflow > Structure > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Accounts reclassification and NER >

Purpose of the page

This page allows you to relate a node of account reclassification/net equity reclassification (NER) logics to a scenario/period/entity triplet.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings for the process.

Attributes tab

Field	Description
Action	Allows you to include or exclude the node of selected rules for the selected scenario/period/entity triplet.
Scenario	Allows you to select the original or consolidation scenario (depending on the tab) from among those associated with the process. If not selected, all of the process scenarios are included.
Period	Allows you to select the periods associated with the chosen scenario. If not selected, all periods are included.
Entity	Allows you to select the entity, or node of entities, from among those present in the consolidation area.

Field	Description
Consolidation method	Only for consolidation scenarios. Allows you to select the consolidation method for the entities to be included. This can be used as an alternative to selecting the entity individually.
Reclassification logics/NER node	Allows you to select the desired account reclassification or NER logics from among those present.

Rules Engine Designer requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Rules Engine Designer >

Operational database > Processes & Workflow > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Rules Engine Designer >

Purpose of the page

This page allows you to customise the execution plan or relate a node of reclassification logics, from among those present, to a scenario/period/entity triplet. The logic can be related to an Entity or node of Entities for the chosen scenario/period. See Rules Engine Designer in the Consolidation section.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings for the process.

Attributes tab

Field	Description
Action	Allows you to include or exclude the selected scenario/period/entity triplet.
Scenario	Allows you to select the original or consolidation scenario, depending on the tab, from among those associated with the process. If not selected, all of the process scenarios are included.
Period	Allows you to select the period from among those of the selected scenario. If not selected, all periods are included.
Entity	Allows you to select the entity from among those present within the consolidation area.
Consolidation method	Allows you to select the entities to be included using the consolidation method.
Rules Engine Designer node*	Allows you to select a node of Rules Engine Designer rules.

Advanced consolidation data processing

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation >

Navigation panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation >

Data processing types

Field	Description
Amortisation/Depreciation	Manages the cost of a multi-year asset by distributing it among the years of the same asset's useful life. See "Amortisation/Depreciation" below.
Financial investment reclassification	Reclassifies financial investment accounts according to the owned entity's consolidation type on the various consolidation scenarios. See "Financial investment reclassification" on the next page.
Equity pick-up	Revalues the value of an owner entity's financial investments based on a current value of the corresponding portion of the owned companies' net equity. See "Equity pick-up" on the next page.
IC spreading	Specifies the node of the grouping of IC elimination logics that includes the logics to be processed. Allows you to run data processing for IC spreading, which writes off the existing IC declarations and reallocates the amounts to CTP custom dimension 2 based on the declarations made by the counterparty, maintaining the original unbalanced amounts. This information is only visible if the declaring entity/counterparty relationships ("Relationship Type") are set to "By entity - custom dimension 2" or "By entity - synthetic custom dimension 2" in the data entry rules for journals or overridden on the process. For details on how to set the data entry rules, see Data Entry and Submission Rules Page in the Data Collection section. For details of how to override these rules, see Data Entry and Journal rules and settings page in the dedicated section.
IFRS5	This is an accounting standard which sets out accounting practices for assets held for sale, how to report discontinued operations in the financial statements, and related supplementary information. For details, see International Financial Reporting Standard 5 in the Consolidation section.
Intercompany Asset Assignment	This automatically generates consolidation journals that must be made in the event that an asset is transferred within the group, eliminating the capital gain/capital loss recorded by the selling company and adjusting the acquiring company's depreciation journals in order to reconstruct the historical cost and depreciation fund of the asset within the group (return to group historical cost method). ***Note**: this operation has no effect on consolidation (see Intercompany asset assignment data processing, in the Consolidation section).*

Amortisation/Depreciation

Field	Description
on Entities	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the contributor categories.
on group	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the consolidator categories.

Financial investment reclassification

Field	Description
on Entities	The purpose of financial investment reclassification data processing is to reclassify FS data on the various financial investment accounts according to the consolidation type of the owned entity. The FS amount is reclassified by means of entity journals. An entity journal is created for every consolidation scenario in which the entity is present.
on group	Financial investment reclassification data processing also has the purpose of reclassifying the financial investment accounts on the relative eliminations depending on the consolidation type of the owned entity on the various consolidation scenarios. In every consolidation scenario to be fed, the system copies the adjusted elimination journal, filtering it based on the classifier indicated in the Account classifier code. ***Note**: the rule used for the deconsolidation of the current process is the general rule defined by the Data Processing > Advanced Consolidation > F.I. Reclassification tile.*

Equity pick-up

Field	Description
on Entities	Generates adjustments by entity to adjust the carrying value of the financial investments on a pro-rata basis in relation to the net equity of the owned entities. The journal relates to the owner entity.
on consolidation area	Uses the same logics and setup as the original scenario data processing. However, the calculation input data are the data converted into the consolidation currency and not the original data. Entries are therefore generated on the Consolidable amount type within the entity journal generated on the original scenario.
Look through on entities	The look through data processing is run on original scenarios at the end of the pick-up data processing, if **Fair value and look through** has been selected in the pick-up rules.
Look through on consolidation area	Data processing similar to the pick-up/fair value data processing of the original scenario that acts on the consolidation journals.

Advanced consolidation page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > ✎

Navigation panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation >

Purpose of the page

This page allows you to customise the advanced consolidation data processing by modifying the rules related to plug accounts (see Plug accounts).

Page fields

Field	Description
Liaison account categories	Opens a page to customise the general rule of the plug accounts for the current process.

Financial investments reclassification page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Financial investments reclassification

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > F.I. Reclassification >

Purpose of the page

This page allows you to customise, for the specific process being set up, some settings of the generic rules for financial investment reclassification.

The purpose of the financial investment reclassification rule is to reclassify financial investment accounts on the FS data and on the relative eliminations, depending on the consolidation type of the owned entity in the various consolidation scenarios. To identify the correct consolidation scenario, it uses the prefix for financial investment reclassification journals related to the scenario in the **Exceptions** section of the consolidation area definition.

Page fields

Field	Description
Accounts	Opens the **Account** page to select the accounts to be used to reclassify financial investments.
Categories	Opens the **Categories** page to relate the categories used in the journals with the financial investment reclassification categories.
Account classifier code	Allows you to specify the account classifier to be used to identify the consolidated scenarios on which the reclassification should be reported. The system obtains the classifier to be applied on the basis of the scenario/period/entity/classifier relationships created on the consolidation area in the consolidation area definition.

Equity pick-up Requirements page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up >

Navigation panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up >

Purpose of the page

This page allows you to customise the Equity pick-up requirements for the selected process.

Attributes tab

Field	Description
Scenario	Scenario of the selected process.
Period	Period of the selected process.
Start date	Start date of the periodic equity pick-up calculation.
End date	End date of the periodic equity pick-up calculation.
Period length	The period length defined on the consolidation scenario/period selected in the periods table. **1** indicates a monthly duration, **12** indicates an annual duration, etc.

Field	Description
Pick-up period length	This field defines whether the equity pick-up will be calculated for each selected scenario/period on a progressive or periodic basis. To calculate the equity pick-up using the progressive method, define this field only, and set the **Pick-up account period length** to 0. Then enter the code of the period from which to start in this field. This defines the desired period length. In fact, the figure is calculated taking account of the progressive data up until the selected period. To calculate the equity pick-up using the periodic method, enter the number of periods between the selected period and the previous period in which the equity pick-up was run. *E.g. if the scenario is divided into 12 months and the period is set to 4, the process starts to calculate the equity pick-up from the fourth month (April), every four months.*
Pick-up account period length	Period of the consolidation process in which the accounts are updated in the accounting, including the pick-up effects. 0 = calculates the equity pick-up on a progressive basis. If defined, this calculates the equity pick-up on a periodic basis, according to the selected period. The system will copy onto this period, adding the journals of the last period in which the equity pick-up was calculated to the values already present.
Override pick-up percentages	Opens a page to override the pick-up percentages (direct and indirect ownership percentages used by the pick-up) for the selected scenario/period.
Pick-up percentages	Opens a page showing the pick-up percentages of the selected scenario/period.

Pick-up percentages page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ⚙ > Pick-up percentages

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up ⚙ > Pick-up percentages

Purpose of the page

This page summarises the details of every entity subject to pick-up.

Page fields

Field	Description
Entity A	Entity subject to pick-up
Entity B	Entity that is owned by Entity A and directly or indirectly owns Entity C
Entity C	Entity that owns Entity D
Entity D	Entity directly and indirectly owned
Deployed percentage 2	Percentage calculated taking account of any manual overrides. This is used in equity pick-up calculations.
Percentage 2 for result	Percentage obtained without considering overridden percentages. This is not used in equity pick-up calculations.
Override pick-up percentages	Overrides on percentages entered manually. Used in equity pick-up calculations.

Override Pick-up percentages page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ⚙ > Override pick-up percentages

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ⚙ > > Override pick-up percentages

Purpose of the page

This page allows you to run overrides on the percentages used in equity pick-up calculations.

Page fields

Field	Description
Entity A	Entity subject to pick-up
Entity B	Entity that is owned by Entity A and directly or indirectly owns Entity C
Entity C	Entity that owns Entity D
Entity D	Entity directly or indirectly owned by Entity C
Account	Account affected by the pick-up calculation
Percentage	Overridden percentage applied to pick-up calculation

Pick-up rules page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ✎

Navigation panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ✎

Purpose of the page

This page allows you to override the generic pick-up rules for the selected process. See Equity Pick-Up data processing in the Consolidation section.

Page fields

Field	Description
Accounts	Financial investment and net equity accounts used in the equity pick-up calculation.
Categories	Category from which to read the amounts to be processed and the category on which to generate the equity pick-up journals. The third field contains the category for accounting pick-up journals simulation.
Use Financial investments FS	If active, for each relationship, the system uses the financial investment account indicated in the financial statements, not the one indicated in the pick-up rules.
Generate detailed information for the pick up query	Provides useful information for understanding how the equity pick-up journal was generated. The data processing of this information makes the equity pick-up data processing slower.

Field	Description
Fair value and look-through	Runs the look-through data processing on original scenarios at the end of the pick-up data processing. If enabled, participation accounts are not included in the Pick-up processing. If enabled, Company D is not visible in the EPU percentages window, and the deployment generates rows with Company C = Company D.
Cumulated fair value and look-through	Runs the look-through data processing on original scenarios at the end of the pick-up data processing by calculating the values on a progressive basis, i.e. the amount of the generated journal rows is the progressive value as at the period to be processed, without reading data from previous scenarios/periods (not even the carry forward). If enabled, participation accounts are not included in the Pick-up processing. If enabled, Company D is not visible in the EPU percentages window, and the deployment generates rows with Company C = Company D.
Classifier for methods	Classifier used to distinguish “investment vehicle” companies
Classifier for equivalent	Classifier used to distinguish “equivalent” companies
Classifier for sectoral	Classifier used to distinguish “sectoral” companies
Element: classifier for methods	Classifier element for selecting “investment vehicle” companies
Elements: classifier for equivalent	Classifier element for selecting “equivalent” companies
Elements: classifier for sectoral	Classifier element for selecting “sectoral” companies
Account filter to exclude from the look-through	Filter for excluding accounts or account nodes from the look-through results

IC Spreading Requirements page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IC spreading >

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IC spreading >

Purpose of the page

This page allows you to customise the intercompany spreading requirements for the selected process.

Only intercompany elimination logics (*Data Processing > Basic Consolidation > IC matching and elimination logics > List*) that have the **IC spreading logic** field active are visible in the list. For more details, see .Intercompany matching and elimination logics in the Consolidation section.

Page fields

Field	Description
IC elimination logics	Allows you to change the node of the grouping of IC elimination logics to be applied to the scenarios/periods of the process when the IC Spreading data processing is run.

Override IFRS5 rules page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IFRS5 > ✎

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IFRS5 > ✎

Purpose of the page

This page allows you to run overrides on IFRS5 rules.

Page fields

Field	Description
Accounts	Opens the **Account** page to select the accounts from which to read and on which to write the data to be reclassified. ***Note**: the user can choose whether or not the reclassification will act on the details of the accounts involved, for both the source accounts and the reclassified accounts.*
Categories	
Categories node to reclassify	Node of categories from which to read the data to be reclassified.
Category for IFRS 5 reclassification journals	Category on which to generate the reclassification journal

Consolidation procedures

Enable consolidation data processing

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition (Data Processing Section)

1. To unlock the settings, click **Locked**.
2. Select **Consolidation** and the desired fields.
3. Click **Save**.

Generate a report on consolidation area variations

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > ⛁

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup > (Data Processing section) > Consolidation

1. Click **Change in consolidation scope**.
2. In **Consolidation scenario/period**, enter the desired consolidation scenario/period.
3. Select the scenario or scenario/period with which you want to compare and the view mode.
4. Click **Run**: the requested report will be generated and downloaded in Excel format.

Configure the entities of a consolidation area

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Consolidation > ⛁

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation >

In **Consolidation area**, on the desired consolidation area row, click : the **Define element to consolidate** window will appear.

Set Equity pick-up requirements

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup > (Data Processing section) > Consolidation

1. Select the desired scenario/period.
2. In **Period length** enter the chosen value and then do the following:

If you are using this method...	Then...
progressive	In **Pick-up period length**, enter the value equal to the number of the selected period.
periodic	1. In **Pick-up period length**, enter the period length, i.e. the number of periods between the period from which data processing should start and the last period in which the equity pick-up was calculated. 2. In **Pick-up account period length**, enter a value equal to the selected period.

3. To view the pick-up percentages of the selected scenario/period, click **Pick-up percentages**.
4. To override the pick-up percentages, click **Override pick-up percentages**.
5. Click **Save**.

Data Processing: allocation and closing

Contents

This section covers the following topics:

Allocations and Closing Requirements page 321
Allocations & Closing rules page 322

Allocations and Closing Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Purpose of the page

This page allows you to define an execution plan to relate a routine to the scenario/period/entity dimensions. See Execution Plan in the Allocations & Closing section.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings.

Attributes tab

Field	Description
Action	Allows you to include or exclude the scenario/period/entity when running the selected jobs/routines.
Original scenarios/periods	Allows you to indicate original scenarios/periods on which to run the data processing, from among those associated with the process. This is the scenario on which the data will be processed. • **Selected**: allows you to select the desired original scenarios/periods. • **All**: includes all original scenarios/periods associated with the process.
Entity	Code and description of the desired entity/node from among the available non-time-dependant entity hierarchies.
Job or Routine	Allows you to select the routine from among those defined in *Data Processing > Allocations & Closing > Routine*, or a job that groups several routines together.
Period length	Period length that the system uses for periodic-type data processing rules
Advanced setup	Only with **Jobs** selected. Allows you to set period length and configuration scenarios for individual routines.
Reference scenario for driver	

Field	Description
Selection	Scenario from which the system takes the allocation driver on which basis to perform the allocation. • **Fixed**: the scenario for the allocation driver is established on configuration; in this case the scenario must be specified. • **Parametric**: a scenario that can be navigated by the allocation driver will be used.
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Allows you to calculate the desired navigable scenario. See "Navigable scenario options" below.
Target Scenario	
Selection	Used for “Target Matching” routines. This is the scenario from which the system reads data to be written on the scenario to be processed • **Fixed**: target scenario • **Parametric**: navigable target scenario
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" below.
Scenario for "ratio %" calculation	
Selection	Reference scenario for calculating the ratio percentage values for data processing for calculated target matching. This is the scenario on which the percentage is calculated and on which the system reads data to be written on the scenario to be processed for calculated target matching. • **Fixed**: scenario for the ratio % calculation • **Parametric**: scenario for the navigable ratio % calculation
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" below.
Actual scenario for fast closing	
Selection	Scenario on which the system reads data to be written on the scenario to be processed for “Target Matching” with fast closing. • **Fixed**: scenario for the fast closing calculation • **Parametric**: navigable scenario for the fast closing calculation
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" below.

Navigable scenario options

Option	Description
PREV	The reference scenario for the driver is the one prior to the processed scenario.
NEXT	The reference scenario for the driver is the one after the processed scenario.
REF1...REF5	The reference scenario for the driver is reference scenario 1...5 related to the processed scenario.

Allocations & Closing rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Purpose of the page

This page allows you to customise Allocation and Closing data processing for the selected process.

Page fields

Field	Description
Traceability	
Keep source	Level of detail to be stored in the journals generated by the system. • **Detail**: tracks and shows all steps taken to generate the allocated data, including the chain of all the latest sources. ***Note**: if selected, it may slow the data processing and generate a trail that is too long for the field.* • **Last source**: only tracks and shows the last step taken to generate the allocated data. Example: rule 001 requires cost centre C01 to be allocated to cost centres C02 and C03, and C02 to be allocated to cost centre C04. In this case, for the allocated data C04, the last data that generated it is shown, i.e. C02. • **Disable**: does not track the steps taken to generate the data. • **From rule**: shows all allocation steps that generated the result, except for rules excluded from execution, e.g. excluded routines. ***Note**: if selected, it may slow the data processing and generate a trail that is too long for the field.*
Store partial result	Stores the data processing history with details of the individual elements involved (e.g. collection of data to be allocated or imposed, drivers).
Performance	
Manage thousandths	Generates the allocations in the presence of very small amounts that would otherwise be disregarded. ***Note**: if selected, it may slow data processing performance.*
Bundling	If the routine is run on the entire scenario, then the system runs it once, instead of as many times as there are periods related to the scenario.

Data Processing: Cash Flow Planning

Contents

This section covers the following topics:

Cash Flow Planning 324
Cash Flow Planning Requirements page 325
Cash Flow Planning Rules page 326
Copy actual data page 327
Dimensions/Financial Rules Mapping page (Create derived events and entries) 327
Cash management rules page (Financial simulation) 328

Cash Flow Planning

Data processing types

The Cash Flow Planning data processing is as follows:

- Copy actual data
- Create financing, assets and FX hedging events
- Create objects, derived events and entries
- Indirect taxes and cash pooling
- Indirect taxes calculation
- Dividends calculation
- Tax balance payment
- Tax down payment
- Financial simulation
- Revaluation and Devaluation
- Direct taxes calculation

For more details on Cash Flow Planning, seeCash Flow Planning Overview in the dedicated section.

Cash Flow Planning: entry registration

Entries are registered only in the months between the estimate start date and the estimate end date. However, the estimate start date may not coincide with the calculation start date. This happens when the calculation needs to start before the simulation period.

Examples of early calculation

Example 1

Simulation calculation starts from the December before the simulation start date. This allows you to automatically obtain the effects of the initial balance sheet amounts by calculating the collection and payment methods associated with the items pertaining to **December year x-1** but which have financial manifestation in the months of the simulation.

Example 2

Forecast with simulation start date in April and calculation start date in January. For postponed semi-annual invoicing, the system begins to calculate the amounts to be aggregated in January and disposes of the accrual for the first six months of the year in June. This means you do not have to wait for the accounting of the first six months of simulation and can register the entry in October.

Asset depreciation on actual and balance

In general, to calculate depreciation, the budget data processing only considers purchase events contained in the simulation range. However, the system can be told to also include purchase events with (purchase) date prior to the simulation in that calculation. This is particularly useful when copying data between processes, since this transfers the purchase event by date. In fact, in this case, after the transfer to different periods, the purchase events may fall outside the simulation interval and the system may not calculate the relative depreciation.

Calculate Financial policy for counterparty entity

In general, during the financial policy calculation, the budget data processing does not consider the individual amounts of the counterparty entities. Regardless of those values, if the amount on the main section is greater than zero, it is moved to the active section, and if it is less, to the passive section. However, the system can be told to also consider amounts of counterparty entities during the calculation, in sorting from one section to another.

However, financial policy by counterparty entity is incompatible with *cash pooling*. In fact, in cases of cash pooling, when the system performs the Section shifts and generates interest, it always defines the counterparty entity as the parent entity. Therefore, when calculating the financial policy by counterparty, the system checks that none of the sections involved in the sorting has the **Cash Pooling** option selected. Otherwise, it will return a blocking error.

Cash Flow Planning Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Operational database > Navigation Panel > Processes & Workflows > Processes > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Purpose of the page

This page allows you to configure Cash Flow Planning data processing for the process.

Attributes tab

Field	Description
Step	Step of the Business Workflows model associated with the selected process to which Cash Flow Planning data processing is to be related.
Event scenario	Original scenario used for storing events to date. This can be selected from among the process scenarios, but it is typically a scenario created and reserved for this purpose.
Simulation timeframe	
Start date	Simulation start date
End date	Simulation end date
Calculation start date	Calculation start date according to defined planning rules
Net result calculation	Calculates the result accounts during Cash Flow Planning data processing.
Carry forward of Initial actual balance sheet	Calculates the carry forwards of the initial balance sheet scenario.
Execution plan	Opens a page to define execution plans.

Cash Flow Planning Rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Operational database > Navigation Panel > Processes & Workflows > Processes > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Purpose of the page

This page allows you to customise Cash Flow Planning data processing for the selected process.

Page fields

Field	Description
Categories	
Source / Target	Category used to do the following: • Filter data when reading initial balance sheets and projected P&Ls. • Write the Forecast BS and the additions to the P&L account (automatic calculation of depreciation, medium-/long-term financial expenses and income and with the management of taxation).
Alternative target category	Category used for sub-entities involved in the financial planning process, in such a way that keeps the data generated on the sub-entities separate from the data generated on the entities.
Target category for direct cash flow	Category for cash flows on which the direct cash flow is based
Alternative target category for direct cash flow	Category on which to generate alternative cash flows ***Note**: the category appears if the alternative category has been set in the process rules for sections with the **Cash Flow** option selected.*
Asset depreciation on actual and balance	Allows the depreciation data processing to also process purchase events with purchase dates prior to the simulation and generate depreciation for the estimate periods.
Calculate cash management for counterparty entity	Allows the budget data processing to also consider amounts of counterparty entities during the calculation, in sorting to the active section or the passive section.
Input origins setting	Opens the window for managing the input origins to be included for the projected P&L, projected flows and initial balance sheet.
Accounts	
Revaluation account for FX rate difference	Account in which to enter the revaluation generated by the FX rate difference in the conversion of accounts expressed in any currency other than the one used for the preparation of the financial statements.
Devaluation account for FX rate difference	Account in which to enter the depreciation generated by the FX rate difference in the conversion accounts, expressed in any currency other than the one used for the preparation of the financial statements.
Forecast: variation for carry forward	For forecast processes and standard balance sheet accounts, the system uses the variation account with the detail type, if defined here, to carry forward the initial balance sheet value, as defined in the last actual period, to all estimate periods of the first year. If it is not specified, the system carries forward the value on the variation account with the higher code and not the initial amount type code.
Additional dimensions in financial rules	
Custom dimensions 1-5	Specify the dimensions you want to use when mapping dimensions to financial rules..
CTP entity	Indicates whether you want to manage the counterparty entity in the relating of dimensions to financial rules.
CTP Cust. Dim. 2	Indicates whether you want to manage the custom dimension 2 counterparty in the relating of dimensions to financial rules.
Currency	Indicates whether you want to manage currency in the relating of dimensions to financial rules.

Copy actual data page

Admin

Operational database > Processes tile > select process > > Process setup (Data Processing section) > Cash Flow Planning > Copy actual data >

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup (Data Processing section) > Cash Flow Planning >

Purpose of the page

This page allows you to change the requirements for running the copy of the actual initial balance sheet and P&L based on the scenarios indicated for the selected process.

Page fields

Field	Description
Category	Source amount category, or entity journal type, or category group node from which to copy data.
Source beginning balance sheet scenario	Original scenario used to copy the actual data from the initial balance sheet
Previous actual scenario (P&L)	Original scenario used to copy the actual P&L account data of the previous scenario at the start of the calculation
Forecast scenario: actual periods (P&L)	Original scenario used to copy P&L data from the calculation start scenario

Dimensions/Financial Rules Mapping page (Create derived events and entries)

Admin

Operational database > Processes tile > select process > > Process setup (Data Processing section) > Cash Flow Planning > Create derived events and entries >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition(Data Processing section) > Cash Flow Planning > Create derived events and entries >

Purpose of the page

This page allows you to change the relationships between dimensions and financial rules that generate derived events and double entries for the selected process. For more details on data processing that generates derived events and entries, see Running Cash Flow Planning data processing in the dedicated section.

Attributes tab data

Element	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Dimensions	
<dimension>	Allows you to select an element or node within the individual dimensions.
Financial Rules	
Accounting model	Changes the accounting model according to which the curve should be generated for the selected row.

Element	Description
Event rule	Changes the rule for generating events present in the accounting model associated with the row.
Credit terms	Changes the credit terms associated with the row.
Indirect Tax Policy	Changes the indirect tax policy associated with the row.
Indirect Tax rate	Changes the percentage to be applied to the amount for the indirect tax calculation.
Other Indirect tax policy	Changes any other indirect tax policies.
Other Indirect Tax rate	Changes any other indirect tax rates.
Advanced	
Payment Calendar	Changes the calendar that sets the dates on which to run collections or payment in the event that credit terms have been established.
Weight	Changes the weighting to be associated with the row to weight the values.
Non-deductible %	Changes the non-deductible percentage, if applicable to the indirect tax.

Cash management rules page (Financial simulation)

Admin

Operational database > Processes tile > select process > > Process setup (Data Processing section) > Cash Flow Planning > Financial simulation >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition(Data Processing section) > Cash Flow Planning > Financial simulation >

Purpose of the page

This page allows you to change the cash management rules to run financial simulations. For more details on financial simulations, CFP Data Processing - Financial Simulation in the dedicated section.

Buttons and/or links on the page

Field	Description
	• **Lines of Credit/Deposits**: opens a page to change FST items and lines of credit. • **Shift between lines of credit/deposits**: opens a page to change the rules for shifting amounts between the various lines and the run order.
Entities/Cash management rules mapping	Opens a page to change the relationships between the entities and the cash management rules.

See Lines of deposit and credits in the Cash Flow Planning section.

Data Processing: taxes

Contents

This section covers the following topics:

Data Processing related to taxes 329
Tax rules page 329
Taxes setup page 330
Deferred and prepaid taxes - Input accounts page 332
Direct taxes - Input accounts page 333
Deferred and prepaid taxes - Override output accounts page 333
Direct taxes requirements page 334

Data Processing related to taxes

Data processing types

Data processing related to taxes is divided based on the type of tax.

- Data processing on deferred and prepaid taxes: their impact is reported when there are temporary differences, due to entity and consolidation adjustments, between the values of the assets and liabilities shown in the annual financial statements and the values for tax purposes of consolidated entities. The affected accounts are those indicated in the tax rules. The deferred taxes calculation applies to the original scenario and can be run on entities or on the group. In calculations run on entities, the data processing is run on the contributor entities and categories, i.e. the amount type categories and entity journals. In calculations run on the group, however, the data processing is run on the consolidator categories and the consolidation journals are involved.
- Data processing related to direct taxes: this calculates the taxes for the year and only applies to amounts.

Monthly splitting rule for taxes for the year

A tax can be split monthly based on the statutory result or a weight. In the former case, the tax for the year is allocated to periods based on the statutory result for the period. In the latter case, however, it is allocated on the basis of the coefficient attributed to the monthly splitting of the tax (*Setup & Admin > Data processing > Cash flow planning > Advanced Financial Rules > Weight*). (*Navigation panel > Data processing > Cash Flow Planning > Advanced financial rules > Weight*). For more details, see Weight Types and Weights in the Cash Flow Planning section.

Tax rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes >

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes >

Purpose of the page

This page allows you to customise tax-related data processing for the selected process.

Page fields

Field	Description
Taxes setup	Opens a page to override the output accounts that the system will use for taxes.
Deferred and prepaid taxes - Input accounts	Opens a page to define the input accounts that the system will use to calculate deferred and prepaid taxes and establish the percentage value of those accounts that should be considered.
Direct taxes - Input accounts	Opens a page to define the input accounts that the system will use to calculate direct taxes.
Deferred and prepaid taxes - Override output accounts	Opens a page to override what is defined in the **Deferred and prepaid taxes** tab on the **Taxes setup** page, for each individual output account.

Taxes setup page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Taxes setup

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Taxes setup

Purpose of the page

This page allows you to override the output accounts that the system will use for taxes.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured in the system
Set	Tax from among those configured in the system

Deferred and prepaid taxes tab

Field	Description
Deferred Taxes P&L	
Annual impact account - debit	P&L account on which the system registers the annual impact as a debit or credit amount
Annual impact account - credit	
% variance account - debit	P&L account on which the impact of the adjustment to the tax fund/credits for prepaid taxes, resulting from the change in the rate compared with the previous year, is registered as a debit or credit amount.
% variance account - credit	
Debits for deferred taxes	
Normal account	Balance sheet account on which the payable for deferred tax is registered
Variation annual impact - debit	Variation account of the Deferred taxes fund account, in debit or credit, on which the tax adjustment due to the impact of the year's taxes is registered. This typically coincides with a variation account of the Deferred taxes fund. To keep track of both the impact of the year and the impact of the fund adjustment due to the FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation annual impact - credit	

Field	Description
Variation % variance - debit	Variation account of the Deferred taxes fund account, in debit or credit, on which the tax adjustment due to the change in rate compared with the previous year is registered.
Variation % variance - credit	
Credits for prepaid taxes	
Normal account	Normal balance sheet account on which the amount receivable for tax is registered. This account may coincide with the Deferred taxes fund if no distinction needs to be made between receivables and payables.
Variation annual impact - debit	Variation account of the Credits for Prepaid taxes account, in debit or credit, on which the tax adjustment due to the impact of the year's taxes is registered. This typically coincides with a variation account of the Credits for Prepaid taxes account. To keep track of both the impact of the year and the impact of the fund adjustment due to the FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation annual impact - credit	
Variation % variance - debit	Variation account, in debit or credit, of the Credits for prepaid taxes account on which the tax adjustment due to the change in rate compared with the previous year is registered.
Variation % variance - credit	

Direct Taxes tab

Field	Description
Direct taxes	
Taxes	P&L account on which the taxes are booked
Accrual - credit variation	Variation balance sheet account on which the accruals for the tax that has already accrued but has not yet been recognised are booked
Tax loss	P&L account from which to read the negative result for the year. This may correspond to the P&L account used to book the net result for the year.
Tax loss spreading: No. of years	Specifies the number of years for which the tax loss for a specific tax period can be deducted from the taxable income in subsequent years. If set to zero, there is no spreading.
Direct taxes monthly splitting rule	Monthly splitting rule to be applied to the taxes for the year.
Accounting	
Accrual - debit variation	Variation BS account of monthly accruals write off for the booking of tax at year end
Tax fund	Balance sheet account from which to read the tax debit/credit
Tax fund: variation account	Variation account of the **Tax fund** normal account used for booking the year's taxes at the end of the debit/credit year
Tax credits	
Tax credit account (P&L)	P&L contra-entry on which to define the tax credit
Tax credit account (BS variation)	BS variation account on which to define the tax credit

Direct taxes - Payments tab

Field	Description
Holidays	Allows you to shift the tax payments that fall on a holiday to a work day based on what is specified in the selected holiday.
Bank - credit variation	Banking account for the down payments and tax balances
Down payment	
Credits due to down payments	Balance sheet account for credit with the tax authorities for tax down payments
Statistical account: prev. year tax	Reference tax account of the previous year used for the calculation of down payments of the first year of planning. In subsequent years, the system uses the tax account.

Field	Description
Credits due to down payment variation	Variation account of the **Credits due to down payments** account defined during the down payment of taxes
Bank - debit variation	Write off variation of the banking account for down payments if the balance of the tax fund is in credit
Tax fund: down payment write off	Credit variation of the tax fund account for the down payment write off if the balance of the tax fund is in credit
Down payment %	Percentage down payment to be paid
Day	Day on which to pay the tax down payment
Period	Period in which to pay the tax down payment
Balance payment and down payment write off	
Down payment write off method	Write off method for the down payment made during the year. • **Fiscal year end**: the amount payable to the tax authority is written off with the balance of the credit due to down payments on 31/12. • **Balance payment**: the amount payable to the tax authority is written off with the balance of the credit due to down payments made upon the settlement of the tax liability.
Credit write off variation for down payments	Write off variation of the credits due to down payments account that the system uses at year end or upon payment of the tax balance, in order to make a sort of account transfer and move the balance of the down payment account to the tax fund
Tax balance payment fund	Debit variation of the tax fund account entered upon the tax balance payment
Day	Day on which to pay the tax balance
Period	Period in which to pay the tax balance

Deferred and prepaid taxes - Input accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Input accounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Input accounts

Purpose of the page

This page allows you to define the input accounts that the system will use to calculate deferred and prepaid taxes and establish the percentagevalue of those accounts that should be considered.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax. Identifies all of the accounts that contribute to the definition of the tax base for the calculation of deferred taxes.
Taxable income %/ Deductible taxes %	Percentage of the account subject to tax

Direct taxes - Input accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Direct taxes - Input accounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Direct taxes - Input accounts

Purpose of the page

This page allows you to define the input accounts that the system will use to calculate direct taxes.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax
% not subject to	Percentage of the account not subject to tax
% subject to current year	Percentage of the account subject to tax for the current year
% subject to year n+1	Percentage of the account subject to tax for the specified year n+. Allows you to manage the spreading of deductible accounts over several years.
% subject to year n+2	
% subject to year n+3	
% subject to year n+4	
% subject to year n+5	
% subject to year n+6	
Threshold account	Account on which to apply the **Threshold %** value in order to get the maximum value subject to tax
Threshold %	Percentage to apply to the threshold account to get the maximum value subject to tax. This is applied, for example, if there are maintenance costs related to assets that are only deductible up to a certain percentage value of the asset.

Deferred and prepaid taxes - Override output accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Override output accounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Override output accounts

Purpose of the page

This page allows you to apply overrides for each individual output account.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax
Deferred Taxes P&L	
Annual impact account - debit	P&L account on which the system registers the annual impact as a debit or credit amount
Annual impact account - credit	
% variance account - debit	P&L account on which the impact of the adjustment to the tax fund/credits for prepaid taxes is registered, as a debit or credit amount. The impact of the adjustment is due to the rate change compared with the previous year.
% variance account - credit	
Debits for deferred taxes	
Normal account	Balance sheet account on which the payable for deferred tax is registered
Variation annual impact - debit	Variation account of the Deferred taxes fund account on which the tax adjustment due to the impact of the year's taxes is registered, as a debit or credit amount. This typically coincides with a variation account of the Deferred taxes fund.
Variation annual impact - credit	To track the impact of the year and the impact of the fund adjustment due to the change in FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation % variance - debit	Variation account of the Deferred taxes fund on which the tax adjustment due to the change in rate compared with the previous year is registered, as a debit or credit amount.
Variation % variance - credit	
Credits for prepaid taxes	
Normal account	Normal balance sheet account on which the amount receivable for tax is registered. If you do not want to distinguish between payables and receivables, this account may coincide with the Deferred taxes fund.
Variation annual impact - debit	Variation account of the Credits for Prepaid taxes account on which the tax adjustment due to the impact of the year's taxes is registered, as a debit or credit amount. This typically coincides with a variation account of the Credits for Prepaid taxes account.
Variation annual impact - credit	To track the impact of the year and the impact of the fund adjustment due to the change in FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation % variance - debit	Variation account of the Credits for prepaid taxes account on which the tax adjustment due to the change in rate compared with the previous year is registered, as a debit or credit amount.
Variation % variance - credit	

Direct taxes requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Direct Taxes > Taxes >

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Direct taxes Taxes >

Purpose of the page

This page allows you to override the execution plan settings for direct taxes at the entity level.

Attributes tab

Field	Description
Entity	Entity on which to run the override
Entity Calculation	Overrides data processing managed at the entity level. • **No**: the system does not run the entity calculation on the selected entity. • **Yes**: the system runs the entity calculation on the selected entity. • **On other Entity**: the system uses the data of the selected entity for the calculation on another entity. In this case, it is necessary to specify the target entity.
Target entity	Only if **Entity Calculation** is set to **On other Entity**. Owned Entity

Data Processing: other data processing

Contents

This section covers the following topics:

Other data processing 336
Asset depreciation rules page 337
Customers/Asset categories attribution page 337
Dividend Requirements page 338

Other data processing

Section contents

This section groups together data processing that does not belong to the main modules of CCH Tagetik, namely the Consolidation, Cash flow planning, ETL, Carry forward, Allocations & Closing, Calculation logics, Validations, Balancing and Taxes modules.

Available data processing

Data Processing	Description
Monthly splitting by Account	Runs the monthly splitting in accordance with the rules defined in the **Monthly splitting rules** tab in the accounts table. The monthly splitting rules can be defined for Profit & Loss or Other Variations accounts, or for variation accounts of a Balance Sheet or Other Stocks nature. See Monthly splitting in the dedicated section.
Countervalue calculation	Automatically calculates the amounts field of gross amounts and intercompany amounts based on the original currency amount field. Applies the FX rates of the processed scenario/period. See Countervalue calculation in the Data Processing section.
Asset depreciation	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the contributor categories. The purpose is to calculate the depreciation plan for new investments by tax category. SeeAssets depreciation in the Data Processing section.
Dividends	Enables the calculation of the dividends to be distributed to entitled entities as remuneration for the capital invested. See Dividend Requirements Page.

Asset depreciation rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Other > Asset depreciation >

Operational database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Other > Asset depreciation >

Purpose of the page

This page allows you to access the page on which to override relationships between categories of assets and custom dimension 3 items.

Page fields

Field	Description
Custom dimension 3/Asset categories attribution	Opens a page to override the relationships between custom dimension 3 items and asset categories. The relationships are created by entity/entity node.

Customers/Asset categories attribution page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Other > Asset depreciation > > Attribution (Custom dimension 3)/Asset categories

Operational database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Other > Asset depreciation > > Attribution (Custom dimension 3)/Asset categories

Purpose of the page

This page allows you to associate the custom dimension 3 elements (assets) with an asset category, for every entity. Thus, cases in which the same asset is depreciated for several entities can also be handled.

Buttons and/or links on the page

Field	Description
Definition result	Shows the results of the relationships created.

Relationships tab

Field	Description
Custom dimension 3	Dimension on which, within the domain, it is necessary to manage assets, such as buildings, land, etc.
Entity	Individual entity or node of an entity hierarchy. In the latter case, the system considers all the entities related to the selected node as entities to be related to the asset.
Asset categories	Allows you to select a category of assets from among those that have been defined (*Setup&Admin > Data processing tile > Asset depreciation*)

Dividend Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Other > Dividends >

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup > (Data Processing section) Other > Dividends >

Purpose of the page

This page allows you to associate specific dividend distribution rules with specific entities.

Attributes tab

Field	Description
Entity	Entity on which the dividend is calculated and booked
Dividends distribution rule	Allows you to override rules configured in the system (*Setup&Admin > Data Processing > Dividend distribution rules*)

Snapshot

Contents

This section covers the following topics:

Snapshot scenarios 339
Snapshot window 340
Manage thesnapshots on the process 342
Snapshot - Requirements page 343

Snapshot scenarios

Running of the snapshot scenario

The snapshot scenario is run, i.e. populated with data, in different ways for the steps by Entity and the steps with Custom or Analytical dimensions.

Step type	Description
by Entity	• The datasets associated with the step, filtered by the selected entities, are copied onto the Analytical Workspace. • The data for all the steps, filtered by the selected entities, are copied onto the Analytical Workspace.
with Custom or Analytical dimensions	The datasets associated with the step, filtered by the selected elements, are copied.

CCH Tagetikruns the data processing as follows:

- Considers only the "reporting layer" partitions.
- Recovers the data of the AIH partitions that refer to the scenario and period dimensions and the dimension of the step.
- Applies the user restrictions only for the dimensions for which the snapshot is being run.
- The data processing can be run on one or more lowest-level elements or a node. If a node is selected, the data processing is run for all the lowest levels elements of the node.

Execution conditions

Before running a snapshot scenario, CCH Tagetikcheck that the following conditions are met:

- No period of the scenarios to be copied is stored offline.
- For each scenario to copy, the corresponding snapshot scenario has opened the same periods, and those periods have not been locked.
- If the scenario to copy is related to a financial planning process, there is a snapshot scenario of the event scenario related to the process.

***IMPORTANT**: before restoring a snapshot scenario, CCH Tagetik a blocking error will be flagged if you select a filter by dimension on which no snapshot was previously created.*

Specific characteristics of the snapshot scenarios on AIH

Based on the process and partition types of the dataset, the partitions are selected as follows:

Process type	Partitioning of the Dataset	Data selection criterion
Scenario / period	Not partitioned	• The scenario/period columns are required. • If the snapshot type is By entity, the partition must have an Entity column. • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns.
Scenario / period	Partitioning by business cycle	• The scenario/period columns are not required. • If the snapshot type is By entity, the partition must have an Entity column. • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Scenario / period	Partitioning by business cycle and entity	• The scenario/period/entity columns are not required. • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns.
Single cycle	Not partitioned	• If the snapshot is By scenario, the scenario column is required. • If the snapshot is By scenario/period, the period column is required. • If the snapshot type is By entity, the partition must have an Entity column. • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns.
Single cycle	Partitioning by business cycle	• If the snapshot is By scenario, the scenario column is required. • If the snapshot is By scenario/period, the period column is required. • If the snapshot type is By entity, the partition must have an Entity column. • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns.
Single cycle	Partitioning by business cycle and entity	• If the snapshot is By scenario, the scenario column is required. • If the snapshot is By scenario/period, the period column is required. • The entity is not required. • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns.

Snapshot window

 User

Application database > Processes tile > select process > Open process >  > Snapshot

Application database > Navigation panel > Processes > select process > Open process >  > Snapshot

What is a snapshot: Snapshot

How to set it up:
Snapshot scenarios configuration
Snapshot management

The utility is only visible if the snapshot is enabled for the selected process and for the dimension step.
Execution mode:

- for Entity steps:
    - The datasets associated with the step, filtered by the selected entities, are copied onto the Analytical Workspace
    - The data for all the steps, filtered by the selected entities, are copied onto the Analytical Workspace
- for steps with Custom or Analytical dimensions, the datasets associated with the step and filtered by the selected elements are copied.

Data processing can be performed by selecting one or more lowest level elements or a node (in which case the data processing is performed for all lowest level elements in the node).

It considers only the reporting layer partitions.

The system retrieves data from AIH partitions that refer to the scenario, period, and step dimensions.

The snapshot applies user restrictions only for the dimensions for which it is running the snapshot.

In order to create a snapshot, the user must specify:

- the creation action (**Create**)
- the version number **(Version**) of the snapshot scenario to which the data is to be copied
- and any Notes

Once the 'Version' has been specified, the user can view the list of previously created snapshots

To restore a snapshot, the user must specify:

- the restore action **(Restore**)
- the version number **(Version**) of the snapshot scenario from which to restore the data
- the snapshot(s) to be restored

IMPORTANT: The copy process does not perform aggregations and preserves the original data sources.

Preliminary checks

CCH Tagetik, before proceeding with the creation of the snapshot scenario, verifies:

- that none of the scenarios to copy have been stored offline
- for each scenario to copy, that the corresponding snapshot scenario has opened the same periods, and that those periods have not been locked
- that there is a snapshot scenario of the event scenario related to the process, where the scenario to copy is related to a financial planning process

Before restoring a snapshot scenario, CCH Tagetik reports a blocking error if a filter by dimension on which no snapshot was previously created is selected.

Snapshots on AIH

Based on the process and partition types of the dataset, the partitions are selected as per the table:

Process type	Partitioning of the Dataset	Data selection criterion
Scenario / period	Not partitioned	• The scenario/period columns are required • If the snapshot type is By entity, the partition must have an Entity column • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Scenario / period	Partitioning by business cycle	• The scenario/period columns are not required • If the snapshot type is By entity, the partition must have an Entity column • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Scenario / period	Partitioning by business cycle and entity	• The scenario/period/entity columns are not required • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Single cycle	Not partitioned	• If the snapshot is By scenario, the scenario column is required • If the snapshot is By scenario/period, the period column is required • If the snapshot type is By entity, the partition must have an Entity column • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Single cycle	Partitioning by business cycle	• If the snapshot is By scenario, the scenario column is required • If the snapshot is By scenario/period, the period column is required • If the snapshot type is By entity, the partition must have an Entity column • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Single cycle	Partitioning by business cycle and entity	• If the snapshot is By scenario, the scenario column is required • If the snapshot is By scenario/period, the period column is required • The entity is not required • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns

Manage thesnapshots on the process

Enable snapshots on the process for dimension by step

Application database > Processes tile > select process > ⋮ > Process setup > (Data processing section) Snapshot >

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Snapshot >

To activate the snapshot function for the selected process, select the **Snapshot** option in the **Data Processing** section.

This procedure allows you to select the dimensions on which to perform the snapshot for the desired process.

1. Select the dimensions of the process on which to run the snapshot.
2. Click **Save**.

Run a snapshot on a process with dimension by step

Application database > Processes tile > select process > Open process > > Snapshot

Application database > Navigation panel > Processes > select process > Open process > > Snapshot

Using this procedure, you can populate a previously-created snapshot scenario with the process data.

For details on how to create the snapshot scenario, seeCreate a snapshot scenario in the section dedicated to the Data Model.

1. In **Action**, select **Create**.
2. In **Version**, specify the version number of the snapshot scenario on which to copy the data. You can view the list of previously-created snapshots.
3. In **Notes**, enter any comments on the snapshot scenario created.

***IMPORTANT**: totals are not calculated on the copied data, and their original origin is kept.*

Restore a snapshot on a process with dimension by step

Application database > Processes tile > select process > Open process > > Snapshot

Application database > Navigation panel > Processes > select process > Open process > > Snapshot

This procedure allows you to restore on the process the data previously saved on a snapshot scenario.

1. In **Action**, select **Restore**.
2. In **Version**, specify the version number of the snapshot scenario from which to copy the data to be restored.
3. Select the snapshots to restore.

***IMPORTANT**: totals are not calculated on the copied data, and their original origin is kept.*

Snapshot - Requirements page

Admin

Application database > Processes tile > select process > > Process setup > (Data processing section) Snapshot >

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup (Data Processing section) > Snapshot >

Purpose of the page

The dimensions on which to run the snapshot can be set on this page.

Page fields

Section	Description
<Dimension>	Enable/disable the snapshot for the dimension indicated.

The cockpit

Contents

This section covers the following topics:

Process cockpit 344
Process Page 345
Page for Processes with dimension by step cockpit 346
Status Report Window 353
Performance Dashboard 354
Journal book window 356
Copy Amounts and journals window 359
Report Consolidation of Investment (COI) 360
Lock / Unlock Data Window 362

Process cockpit

Introduction

The process cockpit shows the progress of the submission for each step visible to the user.
For processes with cycles by scenario/period, you can select the scenario/period of interest. If the scenario/period is locked and not stored offline, or if the process has a "Single" number of cycles and all the scenarios/periods are locked and not stored offline, the cockpit opens in read-only. The only activity you can carry out is opening forms. You cannot consult archived processes.

On initial access, the cockpit opens on the root of the hierarchy of the first step and the tree is expanded to the first level.

Submission and approval mechanisms

You can work on tasks irrespective of their order, but you cannot declare a task complete unless the previous mandatory tasks have also been declared complete. You cannot submit a step until all the mandatory tasks have been completed. In order for a node to be submitted, all of its children must first be submitted (lowest level elements and nodes relevant for the process).

> ***Note**: once an element has been submitted and/or approved, the declaration of task completed cannot be removed and single tasks can no longer be run. However, you can still open forms. If the element has been submitted and/or approved, the form is read-only.*

The submission data processing locks the data collected or calculated for individual elements, both lowest level elements and nodes. These data can no longer be modified.

An element may be submitted only by the managers of the element, called submission users. Submission is carried out only on the original scenarios/periods of the process that the user has the right to edit.

During the submission processing, CCH Tagetik verify that any checking rules for submission have been satisfied. If they haven't, the submission will not be carried out, and an error message will be displayed with the details of the invalid rule.

If the step requires approval tasks following submission, the data are locked after the submission, but the submission is not considered complete until the approval tasks are also completed. If provided for, after submission, users that have to carry out approval receive a notification email. See Send email events.

> ***Note**: the users running the approval tasks must be different from those running the submission tasks.*

If the steps of the process are sequential, the submission checks are run based on the Business Workflow settings (Configure Step window).

Specific characteristics of submission of steps by Entity

For steps by Entity, if the diagnostic validation rules have not been defined in the process, the execution of those rules may generate blocking errors at the time of submission. In these cases, the elements are not submitted.

The element is also submitted in the presence of blocking errors, but only if both of the following conditions occur:

- In the process submission rules, the “Override submission - Per user” option is active.
- Users carrying out the submission have the “Submit even with blocking errors” option active in their user rights.

Rejection of process steps

The action of rejection removes the submission previously run and, for example, allows you to modify the data entered or calculated for an individual element. This is possible only on the original scenarios/periods of the process that the user has the right to edit.

It can be run on a single lowest level element or on an entire node. To reject a lowest level element, the node that contains it has to have been rejected. In turn, to reject a node, its parent node, if any, has to have been rejected.

IMPORTANT*only for steps with "Entity" dimension : the rejection can only be run by the submission users of the lowest level element to reject and by those of the related parent nodes. Instead, if a node is to be rejected, only submission users of the node and those of the related parent nodes can reject it. If a task workflow to approve after the submission task is related to the element and some tasks have not yet been approved, the managers of those tasks can also reject it.*

If the steps of the process are sequential, the rejection checks are run based on the Business Workflow settings (Configure Step Window).

If, in the process submission rules, the **Mandatory reason** option is active, to reject an element you must indicate the reason for rejection (Reasons for rejection page in the dedicated section).

Process Page

User

Application database > Processes tile


Application database > Navigation panel > Processes & Workflow > Process

Purpose of the page

This page shows a list of all the processes configured. They are grouped by active, blocked and archived processes.

For each process, it shows the name and progress of the submission of each step, depending on the user rights. For processes with cycles by "Scenario/Period", you can choose the scenario/period to manage.

The Donut Chart is available for new processes, showing the progress status of tasks in the central part, as well as all the elements of the process steps.

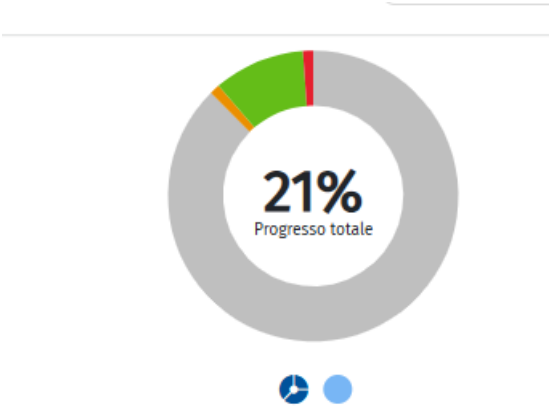

Actions on this page

Element	Description
Active	Shows only active processes, i.e. those that have at least one unlocked scenario/period not archived that is visible to the user.
Locked	Shows only locked processes, i.e. those that have at least one locked scenario/period archived that is visible to the user.
Archived	Shows only archived processes, i.e. those that have at least one archived scenario/period that is visible to the user.
Status report	Opens the Status Report window.
Open Process	Opens the process cockpit for the selected process. ***Note**: the last position worked on in the same work session is maintained, by organisational/hierarchy dimension.*
<step>	Opens the process cockpit directly in the tab relating to the selected step. ***Note**: the last position worked on in the same work session is maintained, by organisational/hierarchy dimension.*

Step submission status

Element	Description
<no icon>	The step is not significant for the element. No activity available or requested for the element.
	No activity carried out on the element
	Data collection and submission activities in progress
	Submitted element. All data is submitted and locked.
	Rejected element after submission. Other data can be entered.
	Approval process not completed. For example, the submission task was performed and only one of the two approval tasks was performed.

Page for Processes with dimension by step cockpit

User

Application database > Processes tile > select process > Open process

Application database > Navigation panel > Processes > select process > Open process


Purpose of the page

This page allows you to monitor the progress of submission on the various steps of the process. It also allows you to run specific actions on individual tasks in the process.

If you select an individual element, it shows you the deadline date for submission. This date corresponds to the latest deadline set for the submission tasks applicable to the element selected.

It also allows you to act on multiple lowest level elements and nodes using multiple selection and the dedicated context menu.


What it looks like

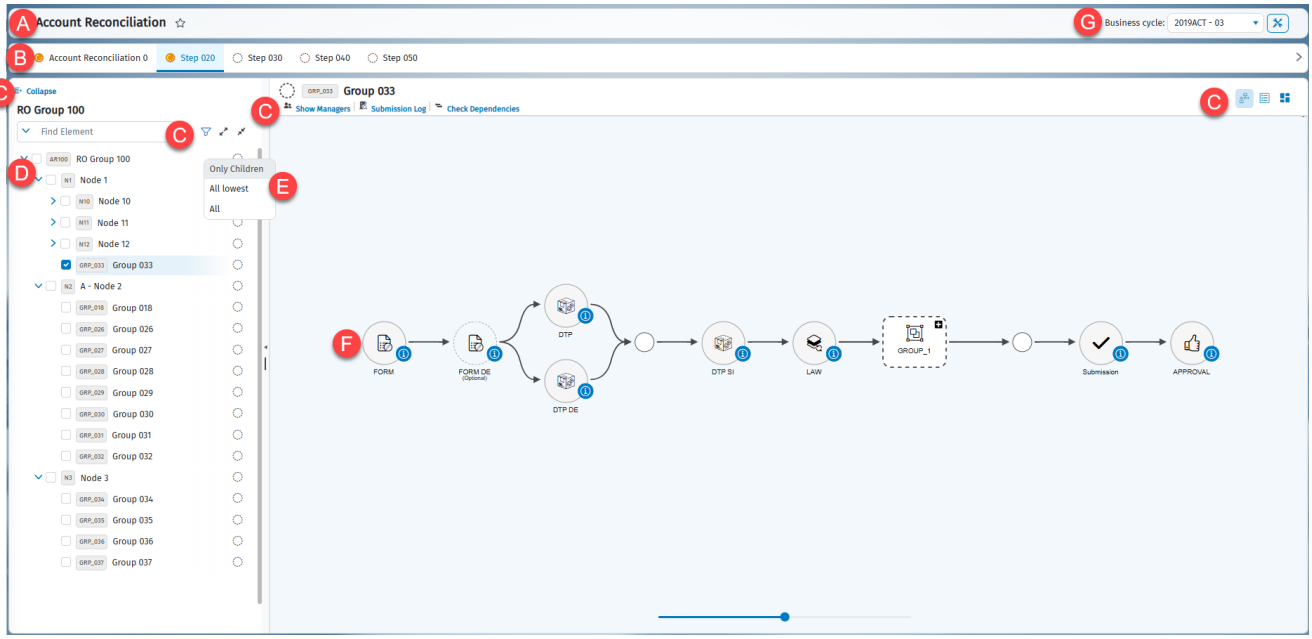

Element	Description
To	Process name
B	Process steps tab
C	Action buttons
D	Organisation of the hierarchy with the tree of nodes and lowest level elements
E	Context menu
F	Tasks of the step and their status
G	Business Cycle displayed

Buttons and/or links on the page

<table>
<tr><th>Element</th><th>Description</th></tr>
<tr><td>Consolidation</td><td>It shows a list of data processing operations, if consolidation operations are enabled on the process.
Preliminary data processing, to run the restorations.
Consolidation data processing, to run the related data processing.
Consolidation scenarios, to generate a report on the state of submission of the consolidation scenarios.</td></tr>
<tr><td>  </td><td>Shows a list of accessory functions:
Reset states: this resets the submission states and the task states.
<table>
<tr><th>If...</th><th>Then...</th></tr>
<tr><td>the business cycles are by scenario/period.</td><td>it processes the selected scenario/period.</td></tr>
<tr><td>there is a single business cycle.</td><td>it processes the selected process.</td></tr>
</table>
Copy amounts and journals: opens the Copy amounts and journals window.
Copy Consolidation: opens the Copy Consolidation window. Copy Consolidation in the Processes Section
Lock / Unlock Data: opens the Lock / Unlock Data window. lock/unlock data in the Processes section.
Diagnostic opens the window to run the diagnostic data processing (Run diagnostic data processing window in the Diagnostic section).</td></tr>
</table>

Element	Description
	This brings up a list of reports that can be useful to generate. For example: **Allocation entries** displays the journal entries generated by the data processing for allocations and closing. For further details, see .Allocation entries details report in the Allocations & Closing section. **Cash Flow Planning Entries**: shows the entries generated by the Cash Flow Planning data processing. For more details, see Cash Flow Planning Entries details report in the Cash Flow Planning section. **Journals book**: Allows you to extract a report containing all Entity and/or consolidation journals. Further details are available in the dedicated chapter (Journals book Journal Journal Report in the Processes section) **Net Result and Reserves Group Evolution analysis**: this allows you to analyse changes to net equity and the annual results for each entity in a given consolidation area. Additional details are available in the chapter on Process reports (Net Result and Reserves Group Evolution analysis report in the Processes section).
 Collapse	Hide the organisation of the hierarchy.
	Allows the management of advanced filters
	Allows the filtering of items to be displayed by submission status.
	Expands the hierarchy tree to display all the nodes and lowest level elements.
	Compresses the hierarchy tree.
	Displays the workflow as a flow chart containing the following information: • order in which the tasks must be run (in parallel or in sequence) • task type (form, DTP,...) • task status Right-click on the task to see the available actions. If the tasks are displayed in transparent mode, you can see them but cannot run any activities. Tasks with dotted borders are optional. It is possible to run several grouped data processes simultaneously, with the exclusion of 'Run ETL' and 'diagnostic' tasks.
	Displays detailed information on the selected task: • task name, description and status • deadline, if any • task managers • user and date of the last activities that were run on the task • any notes and attachments • related to the possible reason why the task cannot be run: ◦ function code not enabled for user ◦ some previous tasks must be completed (for submission and approval tasks) ◦ insufficient user rights.

Element	Description
	Shows the workflow as a list of tasks, which you can filter by status, code and description. **Mark as to do**: declares the selected tasks as pending completion. **Set as Complete**: declares selected tasks as completed. **Run**: executes selected tasks. + : shows detailed information on the task. ⋮ : shows the available actions for individual tasks. **Submission**: submits the selected elements. Allows for multiple submission when several elements in the hierarchy are selected. **Reject**: rejects the selected elements. ***Note**: in the event of multiple selection, the area shows the list of operational and submission/approval tasks relating to the selected elements, grouped by task workflow. You cannot run groups of tasks from the list display.*
	In the list phase, it is possible to enter comments on tasks, edit or delete them, as well as attach files. When a comment is added, a speech bubble icon appears next to the task. The @ , however, is only visible to the person mentioned.
	Shows a list of functions grouped by type. The available functions depend on the step and the elements selected in the hierarchy tree. **Data Entry Forms**: allows you to access the data entry forms for the selected elements and steps. **Allocations & Closing**: allows you to run allocation and closing processing operations for the elements selected, filtering by routine or by rule. See Run Allocations & Closing Data Processing in the Data Processing section. **Diagnostic**: allows you to run diagnostic data processing for the selected elements. See Diagnostic checks in the Diagnostic section. **Snapshot**:allows you to create and restore snapshots. Available only if snapshot data processing is active for the selected process and for the dimension of the step. See Snapshot Scenarios. **Cash Flow Planning**: allows you to access the views for managing the Profit & Loss account, Projected Flows, Accounting Entries, Financing, Assets, FX hedging, Weights and Calendar for the selected elements.
	Shows the list of functions that can be run on lowest level elements and nodes. **Lock / Unlock** Data: locks and unlocks data editing for the selected items in the tree structure and for the selected step.
Show managers	Shows the list of users who can enter or submit data for the selected lowest level element or node.

Element	Description
Submission log	Shows the history of the activities that were run on the selected elements. Shows the following information: • activities run (approval, submission or rejection) • any comments entered in the rejection step • date and time performed • executing user
Show dependencies	Shows the following information on the selected step: • steps it depends on • steps that depend on it • submission status of all steps

If...	Then...
the element has been submitted.	it shows the submission status of the lowest level element selected.
the element based on the dimension attribute has been submitted.	it shows the submission status of the elements linked to the custom dimension attribute of the selected lowest level element.

Organization

For each node/lowest level element, the system displays the submission progress status for the selected step. Here are the various progress status icons:

Element	Description
<no icon>	The step is not significant for the element. No activity is available or required for the element (i.e. the element is not relevant).
	No activity has yet been carried out for the element
	As above, with data editability locked
	Data collection and submission activities are in progress for the element
	As above, with data editability locked
	The element is submitted. All data is submitted and locked.
	The element was rejected (after submission). Data collection is available again.
	As above, with data editability locked
	The approval process for the element has not yet been completed (e.g. the submission task and one of the two scheduled approval tasks have been performed).

Context menu actions

By hovering over a node, you can select:

Option	Description
Only the children	Select the nodes and direct lowest level elements of the node.
All lowest	Select the direct and indirect lowest level elements of the node.
All	Select all the nodes and all the direct and indirect lowest level elements of the node.

Task status

For each type of activity, the status of the task is represented by the colour of the icon.

Colour	Description
Grey	Not started For submission tasks, the tasks has not been submitted or has been rejected.
Yellow	Running The task has been run but has not yet been declared finished. Also indicates the case where at least one previous mandatory task has been rerun or declared not completed. In this case, the subsequent mandatory tasks must be rerun, because their prerequisites have changed.
Green	Completed For operational tasks, this status is manually declared or is automatically set immediately after the task is run (based on that defined on the task in the definition step). For submission tasks, this status is automatically set when the submission/approval takes place.

Task type

Task	Description
	Run ETL
	Loading to Analytical Workspace
	Update Financial Workspace from Analytical Workspace
	DTP
	Form
	List of Forms
	Gross Amounts
	Intercompany amounts
	Entity journals
	Ownership structure register
	Cash Flow Planning Data Entry

Task	Description
	Preliminary of Entity and Group
	Preliminary on Consolidation Area
	Entity Data Processing
	Consolidation
	Calculation logics
	Allocations & Closing
	Cash Flow Planning Data Processing
	Financial investments congruence
	Intercompany Cockpit
	Submission
	Approval
	Stored Procedure
	PPS Data Processing
	Info
	Link
	Deploy
	ML Training
	ML Execute

Available actions per task

Specific actions are available depending on the task type.

Task	Available Actions
Form	**Open on Web**: opens the web form, if enabled. If this is set, the form is opened in read-only. **Open in Excel**: opens the form in Excel. If this is set, the form is opened in read-only. **Task is Complete**: Mark the task as completed. **Set task as not complete**: removes the manual Completed task setting For further details on opening the forms, see New Form window in the Reporting section.
List of Forms	**Open**: opens a list of forms that can be opened individually. **Task is Complete**: Mark the task as completed. **Set task as not complete**: removes the manual Completed task setting
Data Entry type	**Open**: opens the data entry page. **Task is Complete**: Mark the task as completed. **Set task as not complete**: removes the manual Completed task setting
Data Processing type	**Run**: runs the data processing. **Task is Complete**: Mark the task as completed. **Set task as not complete**: removes the manual Completed task setting
Info	**Task is Complete**: Mark the task as completed. **Set task as not complete**: removes the manual Completed task setting
Link (available only in the new interface)	**Run**: opens the page indicated in the link. **Task is Complete**: Mark the task as completed. **Set task as not complete**: removes the manual Completed task setting
Submission	**Submit**: submits the element.
Approval	**Approve**: approves the element.

Status Report Window

User

Application database > Processes tile > Process > desired process > Status Report

Application database > Navigation Panel > Processes & Workflows > Process > desired process > Status Report

Purpose of window


This page shows in a graph the percentage of elements that are in a certain status (Not started, in progress, rejected, pending approval, waiting for submission, submitted). In particular, it displays a bar for each step:

- grey for activities not started
- yellow for activities in progress
- red for rejected activities
- blue for activities awaiting approval/submission
- green for submitted activities

It also shows the hierarchy tree associated with the selected step on which the user is enabled, and the submission status for each node and lowest level element.

***Note**: on initial access to the window, you are at the root of the hierarchy of the first step and the tree is expanded to the first level.*

Actions on this page

Element	Description
	Shows the chart with the percentages of submission activities.
	Detailed view. Hides the chart with the percentages of submission activities and shows the global overview of submission statuses filtered by the organisational hierarchy selected by the user.
	By clicking on the submission log icon, you can view all operations that have taken place at the node/element level
	Click on the Export To Excel button to download a detailed export of the status report for all process dimensions/steps The export is also useful to compare different period scenarios of the same or different processes.
Go to Workflow	Shows the workflow in the process cockpit (Processes with dimension by step cockpit page).


Performance Dashboard

User

Processes Home > Select process of interest > Status Report (on a Process Hub) >  *Performance Dashboard (second icon)*

Page purpose

Monitor the process completion rate through a graphical representation of all items submitted before their expiration dates, after their expiration dates, and rejected.

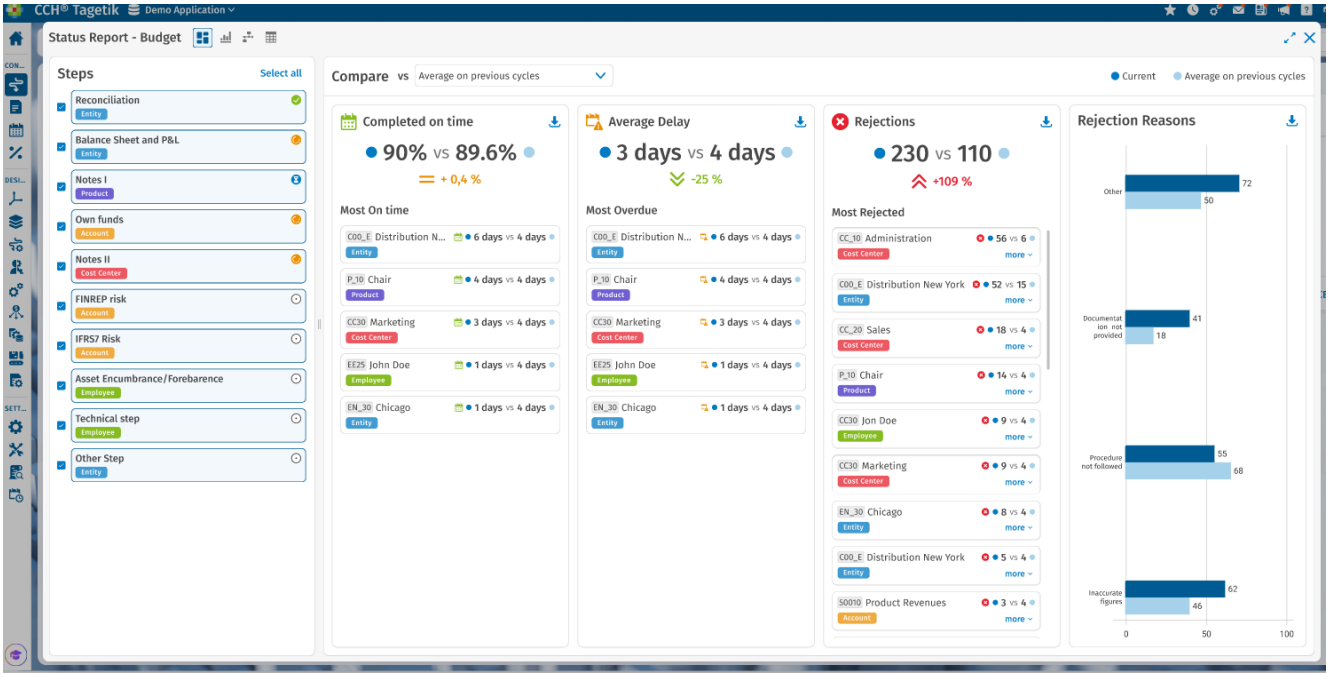





Element	Description
Completed on time	Displays data for process items submitted on time
Average Delay	Displays data for process items submitted after the deadline.
Rejections	Displays data for rejected process items.

Buttons and/or links on the page

Element	Description
	Performance Dashboard
	Excel Export. Click on the download icon to access the export mode
	Allows you to compare two different processes in order to assess differences in performance and identify potential inefficiencies

Elements on the page

Here are the most significant elements.

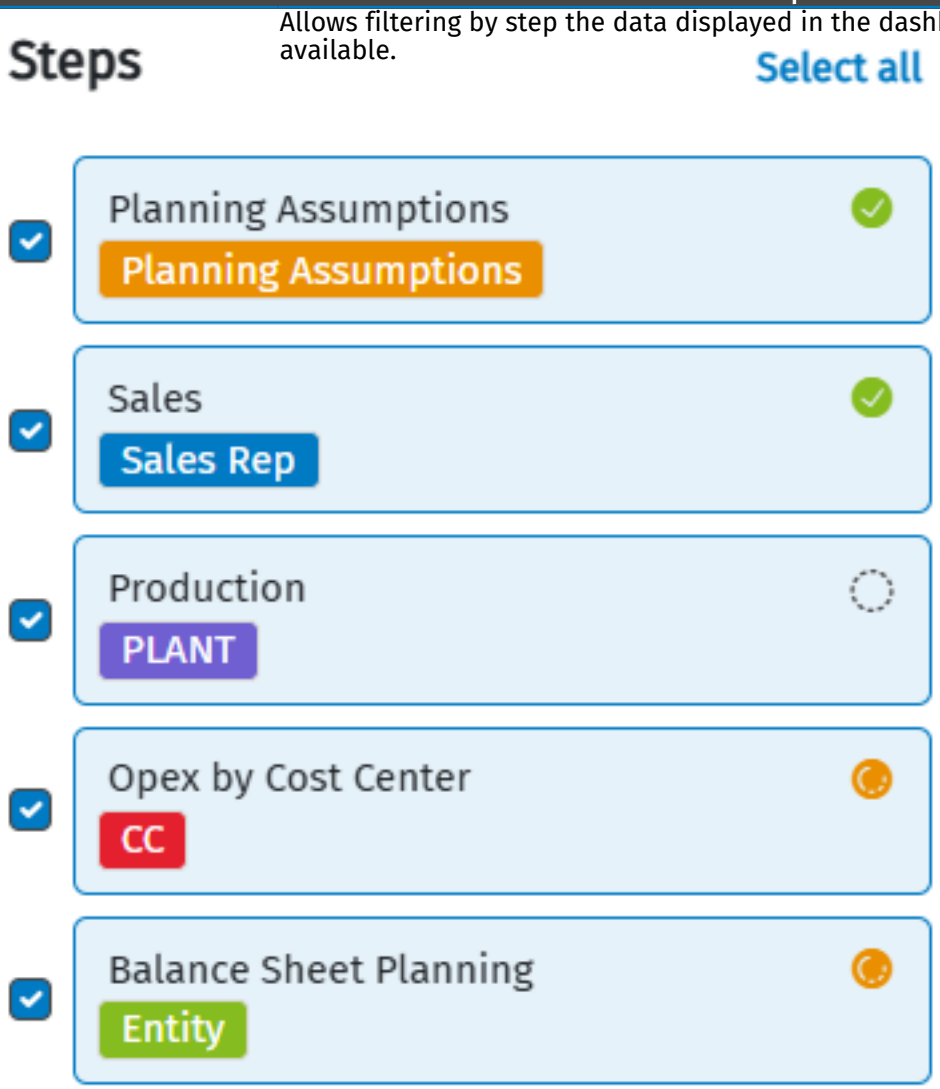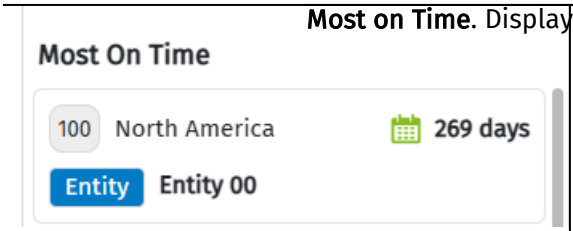Section	Description
	Allows filtering by step the data displayed in the dashboard. All process steps are available.
	**Most on Time**. Displays the list of items submitted the earliest.
	**Most Overdue**. Displays the list of items submitted after the deadline.
	**Most Rejected**. Displays the list of rejected items.
Rejection Reasons	Shows the reasons for rejection for each item

Journal book window

User

Navigation panel > Processes > select process > Reports > Journals book

Purpose of window

Allows you to extract a report with all the Entity and/or Consolidation journals

Window sections

Section	Description
General	Allows you to select the report format, scenarios/periods and the desired journal type.
Filter journals by	Allows you to specify any filters to be applied to journal headers, in order to extract only the desired journals and limit the volume of data extracted. **Note**: regardless of the filters applied, the system only extracts data of journals belonging to entities and categories visible to the user.
Filter rows by	Allows you to specify any filters to be applied to journal rows, in order to extract only the desired rows and limit the volume of data extracted. **Note**: regardless of the filters applied, only rows with amounts other than zero and rows on accounts visible to the user will be extracted.
Grouping and Sorting	Allows you to specify how the extracted data is grouped and sorted.

Options in the sections

Element	Description
General	
Report format	Allows you to select the desired report type: • **XLSX** (default) • **PDF** The PDF format has some limitations and must be extracted without journals grouping and with rows grouping set to **summary with origin**. Additionally, for the journal rows, it only displays the main information. This report is not available for processes with relationship type equal to **by entity - custom dimension 2** or **by entity - synthetic custom dimension 2**.
Run on	Set the desired scenario type: • **Original scenario** (default) • **Consolidation scenario**: extracts consolidable amount data **Note**: field not visible to contributor users, who can only extract data from original scenarios.
Scenario /Period	Mandatory field. • When **Run on Original Scenario** is selected, it specifies the scenario/period used to access the dashboard. However, it is possible to change it by selecting an active original scenario/period, visible to the user and linked to the process • When **Run on Consolidation Scenario** is selected, it allows the selection of an active consolidation scenario/period, visible to the user and linked to the process
Run on Entity journals Run on Consolidation journals	Allows you to choose the type of journals that will be extracted. It is mandatory to select at least one among: • **Run on Entity journals** (selected by default) • **Run on Consolidation journals** (selected by default) In the XLSX report, the report contains one sheet for entity journals and one for consolidation journals. In the PDF report, journals follow one another in the same file. **Note**: this field is not visible to contributor users, who can only extract data from entity journals.
Filter journals by	

Element	Description
Entity filter	Allows you to apply an Entity filter: • **None** (default) • **Entities.** Allows you to select one or more Entities belonging to the selected process and scenario/period, provided they are not only counterparties or only belong to the consolidator, and are visible to the user. • **Consolidator nodes**. Allows you to choose one or more nodes to be consolidated that belong to the process and are visible to the user
Category filter	Allows you to apply a category filter: • **None** (default) • **Category**. Allows you to choose one or more categories belonging to the process, which are visible to the user and are of a type consistent with the selection made for **Run on entity journals** and **Run on consolidation journals** • **Journal number.** Allows you to choose one or more journals belonging to the selected scenario/period that are consistent with the selection made for **Run on entity journals** and **Run on consolidation journals**
Filter rows by	
Account type	If specified, this only allows you to recover the rows on the indicated account type: • **Details** • **Variation** • **Sentence case**
Account nature	If specified, this only allows you to recover rows on accounts of the specified nature: • **Profit & Loss** • **Balance Sheet** • **Order** • **Other Variations** • **Other Stocks**
Origin	Allows one or more sources to be selected from those consistent with the selected scenario type (**Original Scenario** or **Consolidation Scenario**).
Exclude Result accounts and Variation	Selected by default. The extraction excludes rows on accounts that belong to the set of result accounts specified from among the requirements of the process's calculation logics. In particular, the P&L result account, the BS result account and their variations (determined taking account only of control groups belonging to the process) are excluded.
Show only main accounts	Only extracts the rows on the most important accounts involved in the journal, or those displayed as **Main accounts on Journals** in the process data model. See Le scritture per azienda.
Show Counterparty	Enters information related to the counterparty (counterparty entity, CTP custom dimension 2, transaction currency, transaction currency amount, total CTP amounts) in the reports.
Hide rows set to 0	The extraction excludes rows that, maintaining the same account, balance custom dimensions and counterparty.
Grouping and Sorting	
Journals grouping	Ways in which journal headers must be grouped: • <empty field>: grouping by journal number • **Journals grouping**: grouping based on **Grouping for Journals book** label manually set on the journals headers • **Entity 2**: grouping for Entity 2 and extraction of consolidation journals only **Note**: option not visible to contributor users.
Journals order	Ways in which journal headers can be ordered: • **Journal number** (default) • **Category / Journal number**

Element	Description
Rows grouping	Ways in which journal rows can be grouped: • **Analytic** (default): no grouping • **Synthetic**: grouping by account, custom dimensions and counterparty • **Synthetic with origin**: grouping by account, custom dimensions, counterparty and origin
Rows order	Ways in which journal rows can be ordered: • **Account/Origin** (default) • **Origin/Account**

Buttons in the window

Element	Description
Run	Runs the report. When execution is complete, the system displays a log window and downloads the report in the format chosen by the user.

Copy Amounts and journals window

User

Application database > Processes tile > select process > Open process > > Copy amounts and journals

Application database > Navigation panel > Processes > select process > Open process > > Copy amounts and journals

Purpose of window

This window allows you to copy the following:

- financial statement data and entity journals from one scenario/period to another and from one entity to another
- journals from one scenario/period to another and between entities and scenarios/periods

***Note**: the copying of financial statements and journals can be scheduled as a job task in the task workflow of the process steps.*

Available options

Element	Description
Gross and note	Copies Gross and notes.
Entity journals	Copies entity journals.
Consolidation journals	Copies consolidation journals.
Advanced operations	
Gross amounts	Only for **Gross and note**. Copies gross amounts.
Intercompany	Only for **Gross and note**. Copies intercompany entries.
Reconciliation accounts	Only for **Gross and note**. Copies reconciliation accounts.
Notes	Only for **Gross and note**. Copies the notes added to cells of forms.
IC cockpit notes	Only for **Gross and note**. Copies the notes inserted in the IC entry matching step.
Coefficient	Coefficient to be applied to the copied amount to convert it into a different unit of measurement from the one used in **Copy From** in the scenario. 0: no coefficient to apply. For example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.

Element	Description
Copy from	
Scenario	Source scenario(s) visible to the user. The copy can be performed from several scenarios at the same time, by choosing from among the active original scenarios on which the user is authorised.
Period	Source period. Only to be indicated if a single scenario has been selected in **Copy From**. If the period is not specified, the copy is performed from every period onto itself. This allows you to copy data for all open periods for the selected scenario. To copy data related to several but not all periods of the selected scenario, the copy must be repeated as any times as there are periods to be copied.
Entities	Only for **Gross and note** and **Entity journals**. One or several source Entities. If the entity is not selected or if several entities are selected, the copy is performed from all entities onto themselves.
Entity 1	Only for **Consolidation journals**. Filters the source data based on the first entity of the relationship.
Entity 2	Only for **Consolidation journals**. Filters the source data based on the second entity of the relationship.
Origin	Filters the data to copy, based on their origin
Categories	Category on which to filter the source data.
Account nodes	Filters source data based on the accounts associated with one or more nodes of a given hierarchy defined on the account dimension.
Journal number	Only for **Entity journals** and **Consolidation journals**. Filters the data to copy, based on the journals indicated
Copy to	
Scenario	Active and original target scenario, editable by the user. Only one can be selected.
Period	One or several target periods. Must be indicated in the following cases: • The source period has been specified, so one or several target periods must be specified. • No source period has been specified and, in the source scenario, the periods are different from those of the target scenario. It does not have to be indicated in the following cases: • No source period has been specified. • The periods of the source scenario are identical to those of the target scenario.
Entities	Only for **Gross and note** and **Entity journals**. Target entity code. Must be indicated in order to copy data onto a single entity other than the one already indicated in **Copy From**. Should not be indicated in the following cases: • To copy data onto the same entity from which it will be read. • To copy data from several entities. In this case, the system performs the copy from all entities onto themselves.
Origin	Define the origin that will be assigned to the copied data.
Categories	Allows you to override the target category.

Report Consolidation of Investment (COI)

Application Database > Navigation Panel > Processes > select process > Report > Consolidation of Investments

IMPORTANT:*To display the data, you have to select a* ***consolidation area*** *and a* ***Child Entity*** *belonging to it.*

Introduction

The **Consolidation of Investment (COI**) report is a data lineage tool that enables the analysis of the elimination process of financial investments between Entities within the same group, in the context of statutory consolidation.

The report, starting with the data contributing to the consolidated data, allows the following actions:

- View the intermediate processing steps.
- Consult the initial data that generated the consolidation.
- Access information on consolidation criteria and percentages, based on the financial investment relationships between group's Entities.

Consolidation Information

For the selected child Entity, the following information is displayed:

- Consolidation method
- information on the percentages used in the consolidation process that take into account all the financial investment relationships between Entities within the consolidation area.

The '**Information**' icon provides access to the same information for the previous period and the opening scenario.

Contribution
The section shows the development of values on F.I. and net equity accounts by category. The table initially displays the amounts on Entity categories (Amount and Entity type categories), followed by the impact of the Consolidation journals.

Financial investments elimination journals

The section displays the **F.I. elimination** journals generated by the elimination rules from ownership structure register.

The report displays the data on the **original scenario** and its evolution in the following types of amounts:

- **Proportional**
- **Converted**
- **Consolidable**.

Owner

The section displays the list of Entities within **the consolidation area** that currently have or previously had a F.I relationship as an Owner entity of the selected Entity.
The current Owner entities are shown in detail, along with those that were Owners in the previous period or in the opening scenario.

Ownership structure register

The section displays the **events in the ownership structure register** between the selected Entity and the Owner entities within the consolidation area.

After selecting an event, the values of the **financial investment** and **net equity** are shown in the central area.

Along with net equity amounts, the system displays:

- The **FX rate** applied.
- The **amount converted to** the currency of the owner company.

The FX rates displayed and used to calculate the converted value follow this logic:

- The **FX rate of** an account, if available.
- Alternatively, the **generic FX rate** associated with the event.

IMPORTANT:*The events displayed are exclusively those of the launch period based on the period length*

.

Balance Sheet - Financial Investments

The section displays the **contribution** data of the Owner entities. The data displayed refer to **balance sheet balances** and **Entity journals for the Financial Investment accounts**.

If the Entity is owned by several Entities, it is possible to filter the data of a single Owner entity.
The report shows the figure on the **original scenario** and its evolution on the **proportional**, **converted** and **consolidable** amount types.

Balance Sheet - Net equity

The section displays the **contribution** data of the Owned entities. The data displayed refer to **balance sheet balances** and **Entity journals for the Net Equity accounts**.

The report shows the figure on the **original scenario** and its evolution on the **proportional**, **converted** and **consolidable** amount types.

Show Structure

This section displays the hierarchy of Entities, showing the connection between the owned entity and the relevant owner entities (direct and indirect). Connections are traced back to the last owner entity in the chain.

The following information is provided for each entity displayed:

- **Entity name**
- **Reference currency**
- **Consolidation method**
- **Direct ownership percentage**

Restrictions

- The report does not process data from processes with a relationship type other than Entity.
- The report displaying the original data does not apply the category and account filters applied to the consolidation scenario.

Lock / Unlock Data Window

User

Application Database > Navigation Panel > Processes > Select Process > Open Process > > Lock / Unlock Data

Purpose of window

This window allows you to lock and unlock the editability of data on consolidator nodes and Entities on specific steps.

***Note**: when editability is locked, the data cannot be edited by any user, regardless of their rights and regardless of submission.*

Available options

Element	Description
Consolidator nodes	Allows you to select the nodes to be consolidated, on which the data processing will be performed. Mandatory field for consolidator users.
Steps	Allows you to select the steps on which to run data processing. Mandatory field.
Entities	Allows you to select the Entities on which the data processing must be performed. Mandatory field if user is a contributor.

Processes in CCH Tagetik

Contents

This section covers the following topics:

Processes: basic concepts 363

Processes: basic concepts

What are processes

A *process* is the component that CCH Tagetik uses to acquire, submit, process and log data on the customer's activity, allowing them to take control of the quality of their data, reporting and planning. It consists of a workflow, or a sequence of activities, in which authorised users insert, submit and approve data in accordance with a finite logical/functional flow of work.

Working with processes in CCH Tagetik means recreating on the system your actual workflow used to collect and submit data in-house, processing that data accurately, and generating valid documentation for said data that meets your business's short- and long-term needs.

Traditional processes and processes with dimension by step

Traditional processes act solely on the Entity dimension, while for processes with dimension by step you can specify a different dimension for each step of the process.

For more details on process with dimension by step, seeProcesses with dimension by step in the dedicated section.

Function

CCH Tagetik Processes can be used both to enter and to process data in a centralised and accurate manner to produce reports, and to collaboratively manage data in order for it to be submitted and in order to monitor and plan business activities.

Based on their configuration, process workflows can be used to guide the collection and processing of all the data of an individual entity or company (entity workflow) or to submit an entity's individual journals (journal workflow).

Process structure

To create data collection and processing logics specific to the entity's business requirements, there must be the following structures:

- the *time dimension* of the activities documented by the process
- the *entity* authorised to enter and submit data
- the *logical steps* of the process
- the *accounts* on which to collect data
- the *rules* for data entry
- the *processing modes* for specific data or groups of data.

These structures are defined in the *Business Workflow*, *Data model*, *Data entry and submission rules* and *Data Processing* modules and are used by processes according to the logics defined at the level of the individual process.

The management of data within processes

Data is managed according to the following steps:

- *data entry*, i.e. entering data in the application database.
- *submission*, i.e. the validation and locking of original collected data or calculated data for each individual dimension.

- *processing* data according to the system rules and logics and/or rules and logics defined by the user.
- *consolidation*, i.e. the calculation of data at the group level as if it were a single entity for legal and reporting purposes.

The necessary elements for these steps are configured on the following pages of CCH Tagetik :

Configuration	Page
Data entry	Data Entry and Submission tile (see Data entry and submission in the dedicated section)
Submission	
Data Processing	Data Processing tile (see Data Processing: Introduction in the dedicated section)
Consolidation	

These general configurations are applied automatically to all processes set up in CCH Tagetik . The generic rules can be overridden to adapt them to a specific process. See Data Entry & Submission Rules section and Data Processing Section in the dedicated section.

Process configuration

CCH Tagetik has a default process ($Process) which allows you to use CCH Tagetik as a *data mart*, or a container for a subset of data and for reporting. This process is therefore predefined, but it still requires *Process Data Model* configuration (see Introduction to the Process Data Model).

***IMPORTANT**: like all system elements ($), the default $Process must not be deleted. However, it may be modified by configuring the PDM.*

When CCH Tagetik is used as a collaborative tool, a dedicated process must be created according to the entity's needs.

This requires intervening on several separate aspects in the various sections of the Definition of Process with dimension by step page.

Process deployment

In CCH Tagetik, running deployment means applying to the system the parameters configured by the user in the interface, or updating the database tables with those parameters.

When deployment is run on processes, the system updates the database tables that manage the data entry rules in the various steps of the process and the checks on data prior to submission.

Deployment can be run on the **Process definition** page by the administrator user. Deployment can be run on all of the process's parameters by clicking the **Deploy** button, or some of the process's parameters by clicking the button corresponding to the configuration sections.

The parameters included in the last deployment, and therefore already applied within the system, can be consulted on the **Definition result** pages (e.g. **Definition result: Mapping task workflow**).

The order in which the records are inserted in the definition tables is important, since this determines the order in which the deployment processes the rows.

Individual processes can also be deployed from the general deployment page (seeDeployment in the dedicated section).

Process by Entity

The Process by Entity enables the management of business processes where the organisational dimension driving the process is the Entity.

Monthly closing, consolidation and financial budgeting are examples of this use.

It is possible to define milestones (phases) to which specific deadlines can be assigned for the organisation to complete the entire process.

Process configuration and deployment

Sequence of procedures

Process configuration and deployment require the following procedures to be run in the specified order:

1. "Set Business Cycles" on page 391
2. "Organisation and Workflow setup" on page 395
3. "Process Data Model setup" on page 411.
4. "Define data entry and submission rules" on page 422
5. "Define the Data Processing" on page 436.
6. "Deploy processes" on page 367.

Create processes

Application database > Processes tile

Application database > Navbar > Processes & Workflows > Process

Create a process

1. Click : a new row will appear.
2. In the **Attributes** section, enter the process code and a description.
3. Select the desired Business Workflow. For the process to be able to use dimensions other than the standard ones, including the Analytical Information Hub, select a Business Workflow with dimensions by step.

   ***IMPORTANT**: to create a process with dimension by step, select a Business Workflow with the **Dimension by step** option selected.*

4. For each step identified in the process, in **Structure** enter the dimension hierarchy that defines the approval workflow and data entry workflow used in the process.

***IMPORTANT**: for the steps associated with the entity dimension, select the same hierarchy for all steps.*

5. Click **Save**.

Create a process based on an existing process

1. Select the source process.
2. Select > **Clone process**: the **Clone process** window will open.
3. Enter the code and description of the new process.
4. To customise scenarios that have been created, click **Also clone Scenarios**.

Managing processes

Application database > Processes tile

Application database > Navbar > Processes & Workflows > Process

Introduction

The procedures for managing and modifying processes are listed below.

Change the description of a process

1. Select the desired process.
2. In **Attributes**, change the process description.
3. Click **Save**.

Clone a process

1. Select the source process.
2. Select ⋮ > **Clone process**: the **Clone process** window will open.
3. Enter the code and description of the new process.
4. To customise scenarios that have been created, click ◯◯ **Also clone Scenarios**.

Copy and migrate a process for entity

1. Select the process for entity you want to migrate.
2. Select ⋮ > **Copy and Migrate Process**: the **Copy and Migrate Process** window will open showing a list of all the checks and their result.

***IMPORTANT**: if blocking errors are found, the process cannot be migrated.*

3. If the list contains blocking errors, click **Cancel**, correct the error, then repeat the procedure.
4. If no blocking error is listed, click **Next**.
5. Enter a code and description for the new business workflow and for the new process with dimension by step.
6. Click **Migrate**: the setup for the process is migrated, but the scenarios/periods associated to the process are not.

Lock changes to some process logics and rules

1. Select the process you want to lock.
2. Select ⋮ > **Lock setup**.
3. Select the desired entries.
4. Click **OK**.

Create backup on offline tables

This procedure can only be run on processes where submission is set to by scenario/period.

1. Select the desired process.
2. Select ⋮ > **Create backup on offline tables**: the relative window will open.
3. Click ··· : the **Items selection** window will open.
4. Select the scenarios/periods of which you want to create a backup and click **OK**: the corresponding scenario row will appear in the **Create backup on offline tables** window.
5. Enter a code and description for every scenario.
6. Click **Run**.

Remove from the process data no longer relevant on scenarios/periods

This procedure allows you to remove from scenarios/periods data related to dimensions no longer in use or not relevant for the selected process.

1. Select the desired process.
2. Select > **The Data isn't consistent with the process**: the corresponding window will open.
3. Click : the **Item selection** window will open.
4. Select the scenarios/periods from which you want to remove irrelevant data, then click **OK**.
5. Select the type of data to remove.
6. (optional) To display a detail window with a list of the deleted data at the end of the procedure, click **Show the number of data that will be deleted (slower procedure).**
7. Click **Run** to remove the selected data from the process and display the detail window with the deleted data, if selected.

***IMPORTANT**: data deleted from a process are not automatically deleted from the related dimension.*

Copy processing criteria and rules from other processes

1. Select the desired process.
2. Select > **Copy Requirements and Rules From**:the **Copy Requirements and Rules From** window will open.
3. In **Process**, select the process from whose data processing you want to copy requirements and rule: data processes are listed in the window.
4. Select the desired data processing.
5. Click **Run**.

Copy override rules on general rules

1. Select the desired process.
2. Select > **Copy Override Rules on General Rules**: the corresponding window will open.
3. Select the logics and/or the rules from which you want to copy override rules.
4. Click **Run**.

Deploy the process

Application database > Processes tile > select process > > Process setup

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition

Click **Deploy**: the full deployment of the process will be run.

Deploy processes

Application database > Processes tile > select process > > Process setup

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition

Perform full deployment of the process

Click **Deploy**: the full deployment of the process will be run.

Perform partial deployment of the process

Click in a specific section: deployment is only run for data related to the section in question.

Archiving process data

Admin

Archive process data

Application database > Processes tile

Application database > Navbar > Processes & Workflows > Process

In CCH Tagetik , collected data can be archived in dedicated database tables, called *offline tables*, which have the same information content as the original data tables. The *offline storage* of data is useful to limit the size of database tables when working with a large volume of data.

When offline data storage is performed, the system moves scenario/period data from the data entry tables, called *original tables*, to the offline tables. Special scenarios onto which to copy the original scenario/period data are then created on the offline tables.

After the data has been stored offline, the original scenarios/periods are blocked: if all the scenarios/periods of a process are stored offline then the process is blocked and stored offline.

Data shifted into offline tables remain available for reporting, but not for data entry or processing.

Offline tables are identified by the prefix H_ followed by the original name of the table.

The offline storage operation can be reversed, but restoring data does not automatically unblock the original scenarios/periods.

Hana Data Tiering

If the environment on which you are working is related to a HANA database, the system moves, if any, all partitions related to the scenario/period process being stored offline from the HOT area to the WARM area in order to optimise storage costs.

In the reverse "restore data online" operation, all partitions related to the scenario/period process are returned to the HOT area.

On the process page, there is the 'Hot/Warm partition alignment' wizard - which can be displayed with function code '004203' - which allows the partitions to be realigned between the HOT and WARM areas according to archiving status of the scenarios/periods of the various processes to which the partitions belong.

Create backup on offline tables

Application database > Processes tile > select process > > Create backup on offline tables

Application database > Navbar > Processes & Workflows > Process > select process > > Create backup on offline tables

The **Create backup on offline tables** function makes it possible to create a copy of the data of a period scenario by storing them contextually on the offline tables

Deletion of data that is no longer used by the process

Application database > Processes tile > select process > > The Data isn't consistent with the process

Application database > Navbar > Processes & Workflows > Process > select process > > Inconsistent data cleanup

The creation and processing of process data is based on the use of CCH Tagetik 's Entity, Account, Scenario, Category dimensions, etc. However, some data linked to a given dimension may be superfluous for the purposes of the data processing inherent to the process.

The **Data isn't consistent with the process** functionality allows you to detect superfluous data on the Entity, Account and Category dimensions and delete it from the process, to facilitate data processing.

Deleting data no longer in use from the process does not delete it from the relevant CCH Tagetik dimension.

Process creation page

Admin


Application database > Processes tile

Application database > Navbar > Processes & Workflows > Process

Purpose of the page

This page shows the list of processes defined in CCH Tagetik; it allows you to configure them and create new ones.

What it looks like

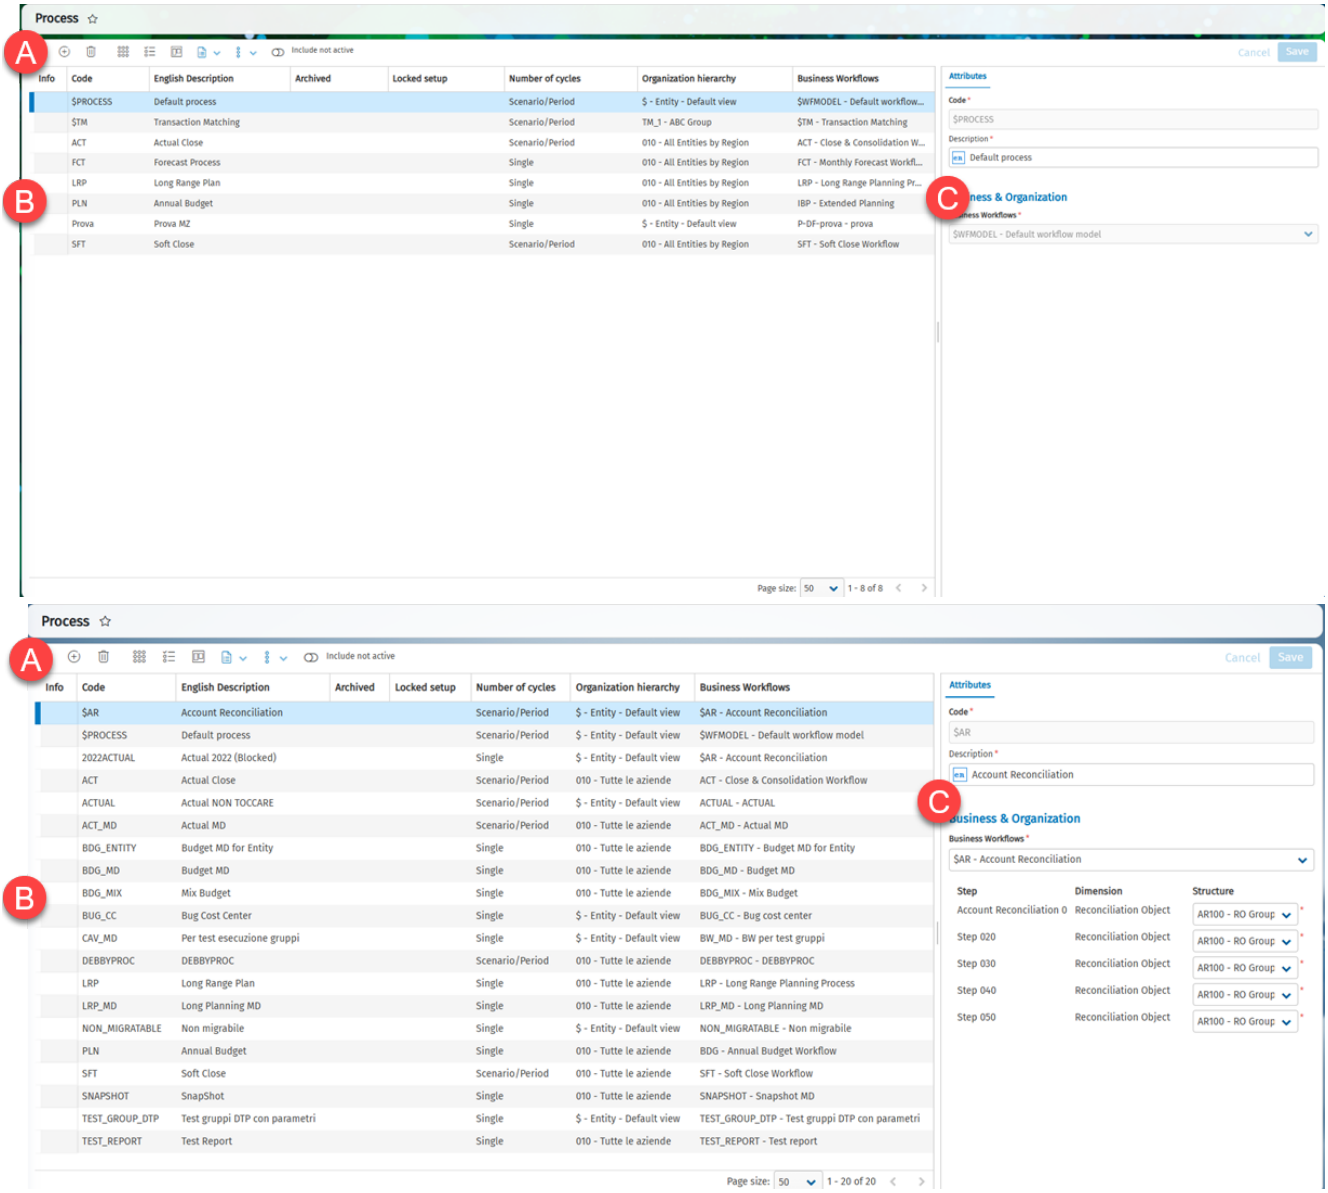

Element	Description
A	Tool bar
B	List of processes
C	Configuration tab

Commands on the page

Element	Description
	**Process Control groups**: allows you to generate a report in Excel format containing a list of the control groups excluded from the selected process.
	Some actions are available only for traditional processes, not for those with dimension by step. • **Process definition**: opens a page to configure the selected process. • **Clone process**: opens a window to create a new process based on the selected process. • **Lock setup**: opens a window to lock the setup for the selected process and for one or more rules and logics associated with the process and that cannot be overridden on the process but need to be retrieved through a node. • **The Data isn't consistent with the process**: opens a window to remove from the process data related to dimensions which are no longer in use or not included in the selected process. It also allows you to generate a report on such data. • **Copy Requirements and Rules From**: opens a window to copy, from another process onto the selected process, one ore more criteria of **Data processing**. • **Copy Override Rules on General Rules**: opens a window to copy the override rules of the process onto the general rules of the environment.
 **Include not active**	Show/hide archived processes.
	Shows the number of changes not yet saved.

Page fields

Please find below the most important fields.

Field	Description
Archived	✔: the process has been archived and can no longer be defined.
Locked setup	✔: the modification of one or several of the process's parameters or logics is locked.
Number of cycles	• **Single**: submission/rejection takes place at the same time on all scenarios/periods linked to the process. • **Scenario/period**: submission/rejection takes place by scenario/period.
Organization Hierarchy	Hierarchy of the entities that contribute to the data collection for the process.
Business Workflow	Flow of activities associated with the process. This is requested on creating the process and establishes whether the process is traditional or with dimension by step. Only for processes with dimension by step, the **Structure** field can be used to associate an element of the structure hierarchy to each step.
Origin	Origin of the data. The data may originate from data processing or be entered by a user.

Process setup page

Admin


Application database > Processes tile > > Process setup

Navbar > Processes & Workflows > Process> > Process setup

Purpose of the page

This page allows you to define the characteristics of the selected process.

What it looks like

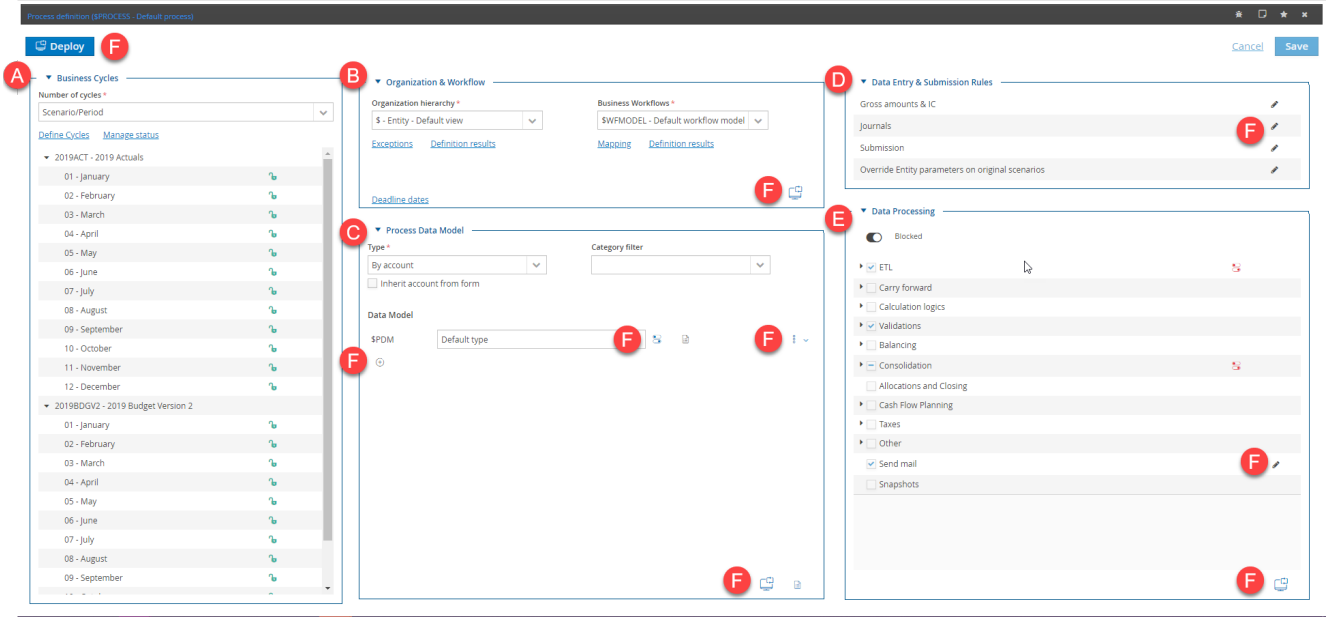

Element	Description
A	Business Cycles section
B	Organisation and Workflow section
C	Process Data Model section
D	Data Entry & Submission Rules section
E	Data Processing section
F	Action buttons on this page

Page sections

Section	Description
"Business cycles" on page 391	Defines the process submission type (single submission, or submission by period/scenario). Period status: • : locked. Data cannot be loaded for that period. • : unlocked. Data can be loaded for that period.
"Organisation and workflow" on page 394	Defines the process's organisational hierarchy and business workflow.
"Introduction to the Process Data Model" on page 407	Defines the subset of accounts or accounts/categories on which to collect, submit and process data of the process for each individual step.
"Data entry and submission rules" on page 422	Defines the specific data processing and submission rules for the process based on the processing and submission rules defined in CCH Tagetik .
"Introduction to data processing" on page 433	Defines the data processing to be run on the process, the relative requirements and any overrides to be applied to the basic rules.

Actions in the Business Cycles section

Element	Description
Define Cycles	Opens the "Define Cycles window" on page 392
Manage status	Opens the "Manage Status window" on page 393

Actions in the Organisation and Workflow section

Element	Description
Exceptions	Opens the "Exceptions page" on page 397
Definition result	Opens the "Definition results page (organisational hierarchy)" on page 398"Manage Status window" on page 393
Mapping	Opens the "Mapping task workflow page" on page 399
Definition result	Opens the "Definition result: Mapping task workflow page" on page 400
Deadline dates	Opens the "Deadline dates page" on page 402

Actions in the Process Data Model section

Element	Description
Retrieve accounts from form	(Only for Process Data Models by account) Includes in the process the accounts specified in the related forms.
	Opens the "Define Process Data Model page" on page 415
	• (in the section pane) Allows you to view the **Definition result: Process Data Model** page. • (next to Data Model code and description) Allows you to view the **Definition result: Process Data Model** page for the relative data model.
	• **Copy from**: allows you to copy the Process Data Model configurations of an existing process onto the same row of the Process Data Model. • **Cancel**: allows you to cancel the Process Data Model from the process.
	Deploys the section's settings.

Actions in the Data Entry & Submission Rules section

See "Data Entry & Submission Rules section" on page 423.

Actions in the Data Processing section

See "Data Processing section" on page 438.

Clone Process window

Admin

Application database > Processes tile > select process > > Clone process

Application database > Navbar > Processes & Workflows > Process > select process > > Clone process

Purpose of window

This window allows you to create a new process based on the selected process.

Options in window

Element	Description
Also clone Scenarios	Allows you to set up extra scenarios in addition to the existing scenarios, which are copies with a new code.
Copy the submission status	(only if **Also Clone Scenarios** is enabled) Copies the submission status of source scenarios onto the newly created scenarios.
Keep original user's details on data	Copies the user, date and origin of the original process's data. otherwise, the code of the user that ran the clone, the date on which the clone was made and INPUT_WEB, as the origin, will be entered.

Element	Description
Copy Time Dependent Datamodel	Copies the Time Dependent Datamodel of the original process.
Copy Rates & Events	Copies the Rates & Events of the original process.
Copy data	Copies the data of the original process.

Lock setup window

Admin

Application database > Processes tile > select process > ⋮ > Lock setup

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Lock setup

Purpose of window

This window allows you to lock rules that cannot be overridden directly on the process because they are called during the process via a node of calculation rules or a node of IC elimination rules associated with the process. Thus, all the rules used by the process in the data processing are overridden in the process and stored offline.

Options in window

Element	Description
Control groups	Locks editability on the control groups called during the process.
Calculation logics	Blocks editability on the account calculation logics called in the process.
IC elimination logics	Blocks editability on the intercompany elimination logics called in the process.
Account reclassification logics and NER	Blocks editability on the account and NER reclassification logics called in the process.
Multidimensional reclassification logics	Blocks editability on the multidimensional reclassification logics and NERs called in the process.

Create backup on offline tables window

Admin

Application database > Processes tile > select process > ⋮ > Create backup on offline tables

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Create backup on offline tables

Purpose of window

This window allows you to copy data from scenarios/periods of the process, onto backup scenarios/periods created in the tables stored offline.

Options in window

Element	Description
Scenario /Period	Opens a window to select original scenarios/periods from which you want to create the backup.
Source scenario	Shows the scenario from which data can be copied.
New Scenario code	Allows you to insert a code for the backup scenario to be created on the offline tables.
New Scenario description	Allows you to insert a description of the backup scenario to be created on the offline tables.

The Data isn't consistent with the process window

Admin

Application database > Processes tile > select process > > The Data isn't consistent with the process

Application database > Navbar > Processes & Workflows > Process > select process > > Inconsistent data cleanup

Purpose of window

This window allows you to delete, from the process's scenarios/periods, data related to dimensions that are no longer used or not present in the process.

Options in window

Element	Description
Scenario/period	Allows you to select the scenarios/periods associated with the process from which to delete data.
Data on entities that don't belong to the process	Deletes data on entities, defined for the selected scenarios/periods, that are not associated with the process.
Data on the accounts that don't belong to the process	Deletes data on accounts, defined for the selected scenarios/periods, that are not associated with the process.
Data on the categories that don't belong to the process	Deletes data on the categories, defined for the selected scenarios/periods, that are not associated with the process.
Shows the number of data that will be deleted	Shows details of the number of data to be deleted and search queries of data to be deleted when the operation is run.

Copy Requirements and Rules From window

Admin

Application database > Processes tile > select process > > Copy Requirements and Rules From

Application database > Navbar > Processes & Workflows > Process > select process > > Copy Requirements and Rules From

Purpose of window

This window allows you to copy requirements and override rules from another process's data processing onto the process.

Options in window

Fields	Description
Process	Selects the process containing the data processing from which to copy requirements and override rules.
Rows in the Parameters & Rules Management table	These select the data processing from which you want to copy requirements and override rules.

Copy Override Rules on Generic Rules window

Admin

Application database > Processes tile > select process > ⋮ > Copy Override Rules on Generic Rules

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Copy Override Rules on Generic Rules

Purpose of window

This window allows you to select the override rules related to the data processing of the process onto the corresponding genericCCH Tagetik rules.

Options in window

Fields	Description
Rows in the Parameters & Rules Management table	These select the override rules of the process to be copied onto the generic rules of the domain.

Copy and Migrate Process Window

Admin

Application database > Processes tile > select process by entity > ⋮ > Copy and Migrate Process

Application database > Navigation Panel> Process & Workflow > Process > ⋮ > Copy and Migrate Process

Purpose of window

This window allows you to create a new process with dimensions by step by migrating a process by Entity.

CCH Tagetik checks whether the process to be migrated complies with the functionality currently compatible with the new process with dimensions by step.

Compatibility checks

Coherence	Description
Business Workflow	It is ensured that the business workflow associated with the process to be migrated complies with the functionality currently compatible with the process with dimensions by step. The mixed phase (Contributor / Consolidator) is not supported. The check is not blocking Some tasks are not supported (QDL, Monthly splitting, ...). The check is not blocking Task workflows with approval path management are not supported. The check is not blocking Currently, only the launch of type 'context independent run' is supported. The check is not blocking Diagnostic tasks for which the 'Run diagnostic on nodes / underlying Entity' option is enabled are not supported. The check is non-blocking Form list tasks with 'Declare task completion' set to 'Automatic' are not supported The check is non-blocking Submission tasks with the option 'Node Submission: Submit also underlying nodes and Entity' enabled are not supported. The check is non-blocking Bookmark tasks can only be used with the legacy user interface. For the new user interface, these will have to be redefined as 'Link' tasks. The check is not blocking
Deadline dates	The system makes sure that no expiry date parameterisation is present for the process to be migrated. The check is not blocking
Process Data Model	It is ensured that the Process Data Model parameterisation of the process to be migrated complies with the functionality currently compatible with the new process with dimensions by step. The check is blocking Currently, datasets partitioned by Entity are not supported.
Data Processing	It is ensured that the parameterisation of the snapshot of the process to be migrated complies with the functionality currently compatible with the new process with dimensions by step. The check is not blocking

For each row, CCH Tagetik indicates the outcome of the check (correct, non-blocking error, blocking error).

In case of blocking errors, the process cannot be migrated. Read the reporting tooltip, correct the errors and proceed with a new migration.

If there are no blocking errors, select the 'Next' button.

Enter the code and description of the new business workflow and process with dimensions by step. Select the 'Migrate' button.

The process parameterisation is migrated and the scenarios/periods associated with the process are not copied. The following corrections are carried out for non-blocking errors:

- Mixed phases: if they contain only tasks of type Contributor, the phase will be set as Contributor; if they contain even a single task of type Consolidator, the phase will be set as Consolidator
- unsupported tasks: these tasks will be converted into tasks of type Info.
- DTP task without the 'Context independent run' option and/or a Job type task: the business workflow will be migrated with 'Use only steps by Entity'; it will not be allowed to add steps related to other dimensions.

Business Workflow

Contents

This section covers the following topics:

Business Workflow concepts 378
Define a Business Workflow 380
Business Workflow page 384
Business Workflow task icons 384
Steps page 387
Entity/node, step and task relationships 387
Task workflow page 388
Task workflow for a Collaborative Office document 389

Business Workflow concepts

What is Business Workflow

A Business Workflow is an entity's specific workflow. It is prepared in CCH Tagetik in such a way that users responsible for entering and processing data can do it in an order that matches the entity's own way of working.

Business Workflow structure

The Business Workflow is made up of various logical and temporal steps, called *steps*. All logical steps can be preparatory to the next step and parallel to other steps. They are identified by a code and contain one or several activity flows, called *task workflows*. Every activity flow is made up of several activities (*tasks*) which must be run in a certain order.

> ### Examples of steps
>
> In a statutory consolidation process, it may be necessary to collect and submit data from financial statements and journals at different times and, subsequently, in a different step, collect data from a supplementary note.
>
> In a budget process, however, it may be useful to separate the collection of revenue data from the collection of fixed cost data, as well as data on investments and staff costs.

> ### Examples of tasks
>
> In a Payroll data collection task workflow, the completion of each data entry form constitutes a different task.

Default Business Workflow

CCH Tagetik provides a default Business Workflow by Entity based on Entity dimension with code $WFModel, containing a single $STEP step. This Business Workflow can be used where there is no need to manage separate steps or specific activities other than submission.

Characteristics of the steps and task workflows

Steps and task workflows can be completed in series or in parallel. Steps are submitted once and how they correspond to each other defines the chronological order of submission. Steps completed in parallel can be submitted independently from each other and task workflows can be run simultaneously.


It is also possible to specify whether to allow certain steps to be submitted only after all the entities in the previous step have been submitted. This is useful for steps in which one entity attributes transversal costs

to other entities. Accordingly, in the subsequent step the entities receiving those costs can submit the total of their own costs and those received from the previous step only after the previous step has been submitted in full, i.e. on the other entities as well.

The task workflows of contributor steps and consolidator steps may contain only tasks that concern the contributor user or consolidator, respectively.


Example with two steps and task workflows in series

This image shows an extract from a Business Workflow graph made up of two steps. The first step contains one task workflow and the second step contains two in series.

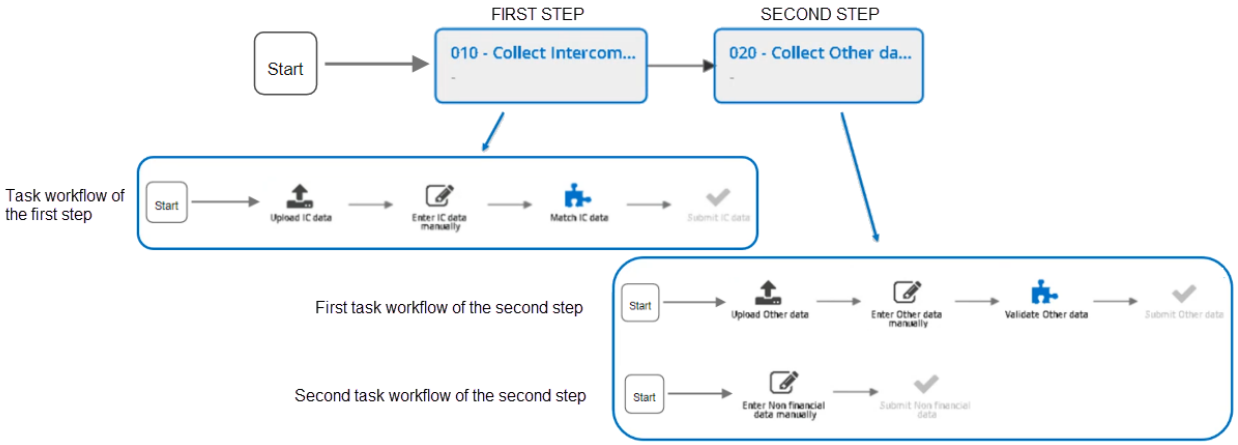

Example with three steps and with the steps' first activities in parallel

This example shows a Business Workflow in which the first two tasks of each task workflow can be run in parallel. The next task can only be run after both tasks have been completed. You can only move to the next step once the previous step's task workflow has been completed.

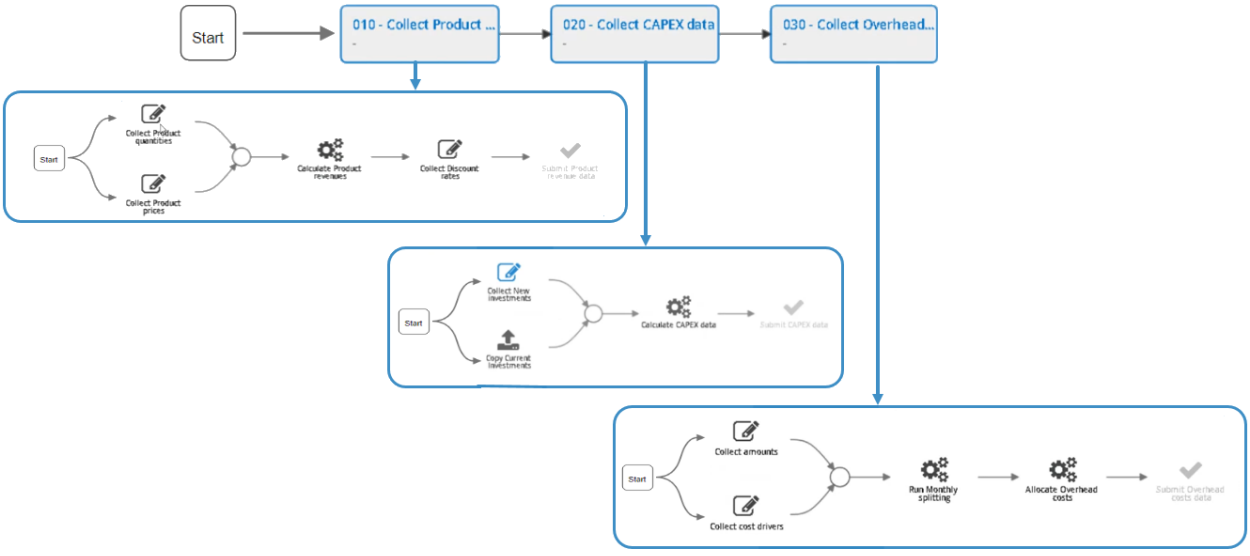

Particular features of task workflows

Several task workflows can be created, depending on the calculation models or needs of the various entities in the group. By default, CCH Tagetik provides two task workflows for every step; these are not visible in the task workflow definition, but are available during the process setup:

- **$ - Task Workflow**: to insert a submission only task for a process.
- **$$. Task Workflow**: to insert a step where no significant tasks are run for the entity in a process.

Task labels

The activities run by tasks can be identified by labels attributed to those tasks. Several tasks can therefore be grouped under the same label. These labels can be referred to to assign tasks to several specific users.

Task groups

Individual tasks can be grouped, so the user can run the corresponding data processing with a single click, e.g. for consolidated data processing. Grouped tasks can be viewed as a single task and expanded later or run all together.

Completing task workflows

Every task workflow must be completed with a submission task. If necessary, one or more data approval tasks can be added later. This is useful when different people are responsible for submission and approval.

Define a Business Workflow

Sequence of core procedures

The following procedures are essential for defining a Business Workflow and must be performed in the specified order.

1. "Create a Business Workflow" below.
2. "Add steps to a Business Workflow" below.
3. "Create a task workflow and the relative tasks" on the facing page or "Create a task workflow for a Collaborative Office document" on the facing page.
4. (Only for processes with dimension by step) "Managing dependencies" on page 382

Create a Business Workflow

Application database > Business Workflows

Application database > Navigation panel > Processes and Workflow > Business Workflows

1. Click : a new row will appear in the table.
2. In the **Attributes** tab, complete the fields as desired.
3. If you want to define a dimension for every step, select **Dimension by step**.
4. Click **Save**.

A Business Workflow by entity is available based on the Entity dimension ($WFMODEL). It contains only one step ($STEP) and can be used for processes that have only one step or submission task.

Add steps to a Business Workflow

Application database > Business Workflows > Desired Business Workflow > > Steps

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > > Steps

1. If the Business Workflow has already been prepared, click **Edit**.
2. Drag the **Step** icon into the work panel.
3. Complete the fields as desired and click **OK** to save.

4. To add another step, repeat steps 2 and 3, considering the following:

If you want to arrange the steps...	Then...
in series	position the step next to the previous one.
in parallel	position the step below the one to be completed in parallel.

5. After two or more steps in parallel, drag a join node into the work panel.
6. Link the elements of the Business Workflow. See "Link two elements of the chart" on the next page for details.
7. To organise the Business Workflow formatting automatically, click **Auto-format**.
8. Click **Save**.

Create a task workflow and the relative tasks

This procedure allows you to select and order the tasks that the user has to complete.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step

1. Click ➕: the **Task workflow** window will open.
2. Complete the fields and click **OK** to confirm.
3. Click the desired task tab.
4. Drag the desired task into the work panel.
5. Complete the fields and click **OK** to confirm.
6. To add more tasks, repeat steps 3 to 5, considering the following:

If you want to arrange the tasks...	Then...
in series	position the task next to the previous one.
in parallel	position the task below the one to be completed in parallel.

7. After two or more tasks in parallel, drag a join node into the work panel.
8. Click the **Submit** tab and drag the **Submit** task to the bottom of the task workflow. If necessary, also drag the **Approval** task.
9. Complete the fields and click **OK** to confirm.
10. Link the elements of the task workflow. See "Link two elements of the chart" on the next page for details.
11. To organise the task workflow formatting automatically, click **Auto-format**.
12. Click **Save**.

Create a task workflow for a Collaborative Office document

This procedure allows you to create a task workflow containing one task per document part of the Collaborative Office document to be submitted/closed.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step

1. Click ➕: the **Task workflow** window will open.
2. Complete the fields and click **OK** to confirm.
3. Click the **Other activities** tab.
4. For each document part of the document to be submitted, drag a **Collaborative Office** task into the work panel, complete the fields and press **OK** to confirm.

   ***Note**: selecting **Open as PDF** will open the document in PDF format.*

5. Link the first document part to the **Start** task.
6. Link the tasks together.
7. Drag a join node into the work panel to link several document parts in parallel.
8. Join the tasks attributable to document parts of the same document chapter to the same node.

9. For each chapter, drag a **Collaborative Office** task into the work panel, complete the fields and press **OK** to confirm.
10. Drag a join node into the work panel.
11. Link the related chapter and tasks via the node you have just dragged over.
12. Drag a **Collaborative Office** task into the work panel for the master document, complete the fields and press **OK** to confirm.
13. Click the **Submit** tab and drag the **Submit** task to the bottom of the task workflow.
14. Complete the fields and click **OK** to confirm.
15. Use the nodes to link the chapters to the master document task and the master document task to the **Submit** task.
16. To organise the task workflow formatting automatically, click **Auto-format**.
17. Click **Save**.

Managing dependencies

This procedure is used to control data submissions/rejections.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Managing Dependencies

Application database > Navigation panel > Processes and Workflow > Business Workflows > Desired Business Workflow > ⋮ > Steps > Managing Dependencies

1. Select the step on which to set the dependencies: the **Configure Step** window opens..

   ***Note**: fields are available to set dependencies only if the selected step has preceding steps.*

2. Set the rules for dependencies, then click **Save**.

Other procedures

The following procedures are additional and may be useful for managing the Business Workflow.

- "Modify a Business Workflow" below.
- "Link two elements of the chart" below.
- "Modify/duplicate/delete a task workflow" on the facing page.
- "Modify a task workflow task" on the facing page.
- "Create and edit labels" on the facing page.
- "Group tasks together" on the facing page.

Modify a Business Workflow

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps

1. Click **Edit**.
2. Do the following:

If you want to...	Then...
delete a step or link (arrow)	1. Right click on the desired step/arrow. 2. Click **Delete**.
modify a step	1. Right click on the desired step. 2. Click **Edit**. 3. Edit the fields as desired and click **OK** to save.

3. Click **Save**.

Link two elements of the chart

1. Position the cursor in the centre of the first element to link.
2. Drag the arrow to the second element to link.

To link two parallel tasks, use a join node.

Modify/duplicate/delete a task workflow

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps

1. Click on the desired step.
2. Do the following:

If you want to...	Then...	and...
modify a task workflow	In the desired task workflow pane, click ⋮.	1. Click **Edit**. 2. Edit the fields as desired and click **OK** to save. 3. Click **Save**.
duplicate a task workflow		1. Click **Clone**. 2. Complete the fields as desired and click **Run** to save. 3. Click **Save**.
delete a task workflow		click**Cancel**.

Modify a task workflow task

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step > desired Task workflow

1. In the work panel, select the desired task: complete the relevant information.
2. Click **Edit**.
3. Edit the fields as desired and click **Save**.
4. To create or edit a label, follow the "Create and edit labels" below procedure from step 2.

Create and edit labels

This procedure allows you to work on labels of the selected Business Workflow.

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step > desired Task workflow

1. Select the desired task: the relative information will appear on the right.
2. Click **Manage labels**.
3. Do the following:

If you want to...	Then...
create a label	1. Click ⊕ 2. In **Attributes** complete the fields as desired.
edit the description of a label	1. Click on the desired row of the label. 2. In **Attributes** edit the description as desired.
change the colour of a label	1. Click on the desired row of the label. 2. In **Attributes** click on the pane of colours. 3. Select the desired colour and click **OK**.

4. Click **Save**.

Group tasks together

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step > Desired task workflow

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step > desired Task workflow

1. Press CTRL and click on the tasks to group together.
2. Right click one of the desired tasks and click **Create group**.

Business Workflow page

Admin

Application database > Business Workflows

Application database > Navigation panel > Processes and Workflow > Business Workflows

Page purpose

This page allows you to configure Business Workflows.

Specific actions on the page

Element	Description
⋮	• **Steps**: allows you to set the contents of the Business Workflow. • **Clone business workflow**: creates a copy of the selected Business Workflow.

Page fields

Please find below the most important fields.

Field	Description
Use only steps by entity	When the toggle is set to: • Disabled, each step can be assigned an organisational dimension (Entity, custom dimension or analytical dimension). • Enabled, all phases are assigned to the Entity organisational dimension by default. In this case, it is necessary to specify whether to use the Process Hub or the Legacy Dashboard.
Process Hub	In this mode, it is possible to use the dashboard with the new interface and manage the Job type task and the DTP type task in standard mode and partitioned by Company.
Legacy dashboard	In this mode, the dashboard can be used with the legacy user interface.

Business Workflow task icons

Data integration

Element	Description
	ETL dictionary
	ETL lookup table
	Run ETL
	Quick data loader
	Loading to Analytical Workspaces

Element	Description
	• Update Financial Workspaces • Export from Analytical Workspaces - XBRL format • Export from Analytical Workspaces - Bank of Italy Matrix format • Export Analytical Workspaces - XML format • Export Analytical Workspaces - File format
	Data Export Service
	DTP
	Join node

Data entry & Reporting

Element	Description
	• Form • List of forms
	Gross amount
	IC amounts
	Entity journals
	Consolidation Journals
	Ownership structure register
	Cash Flow Planning
	Access partition
	Join node
	Matching Windows

Core Data Processing

Element	Description
	• Entity and Group preliminary, Preliminary on consolidation area • Entity Data Processing
	Consolidation
	Calculation logics
	Allocations & Closing
	Cash Flow Planning
	Join node

Validations

Element	Description
	Diagnostics and Diagnostic results log
	Intercompany Cockpit
	Join node

Submit

Element	Description
	Submit
	Approval
	Join node

Other data processing

Element	Description
	Monthly splitting calculation
	• Cube processing • Update QlinkView
	Stored procedure
	Jobs
	Transaction Matching
	Join node

Other activities

Element	Description
	Collaborative Office
	Info
	Bookmark
	Checkpoint
	Deploy
	Production control
	• Machine Learning Training • Machine Learning Execute • Machine Learning Dashboard Wizard
	Link
	Join node

Steps page

Admin

Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps

Purpose of the page

This page allows you to add steps to the selected Business Workflow.

Step window fields

This window will appear in the modify Business Workflow step, after the **Step** icon has been dragged into the work panel.

Please find below the most important fields.

Field	Description
Description	Description of the step in the application language. If there are several languages, you can add a description for every enabled language.
Step type	• **Contributor**: step visible on the contributor user's cockpit with their typical activities. • **Consolidator**: step visible on the consolidator's cockpit with their typical activities. • **Contributor / Consolidator**: step visible on the cockpits of the contributor user and consolidator, with both users' typical activities (only for Business Workflows by Entity). ***IMPORTANT**: the last option is applied by default when migrating from previous versions. Do not use in a new domain.*
Advanced	• **Allow Submission only if the previous step is submitted**: only allows the entity to be submitted in this step if the previous step has been submitted for all entities of the data collection process (only for Business Workflows by Entity).
Dimension	Dimension that will be used in the submission of the step in the process. It is possible to specify either the Entity dimension or one of the analytical dimensions. . **IMPORTANT**: only for Business Workflows with "dimension by step" enabled.

Entity/node, step and task relationships

How it works

Tasks that can be related to a node/lowest level element in the dimension hierarchy are those defined in the Business Workflow associated with the process. The following tasks are always present in each step of the Business Workflow:

- one or more tasks defined by the user
- a default submission task ($)
- an empty generic task ($$)

If no relationships are created, out, only the submission task is automatically associated with all the entities in the process.

Relationships of entities, nodes and/or journals to specific task workflows, for each step of the Business Workflow, can be created as:

- Analytical relationships, i.e. per lowest level element, where each element represents an individual lowest level element.
- Synthetic relationships, i.e. per dimension hierarchy node, where each element represents a set of lowest level elements that belong to the node.

Task workflow page

Admin


Application database > Business Workflows > Desired Business Workflow > ⋮ > Steps > Desired step

Application database > Navigation panel > Processes and Workflow > Business Workflows > desired Business Workflow > ⋮ > Steps > desired Step

Purpose of the page

This page allows you to create task workflows for the selected step.

What it looks like

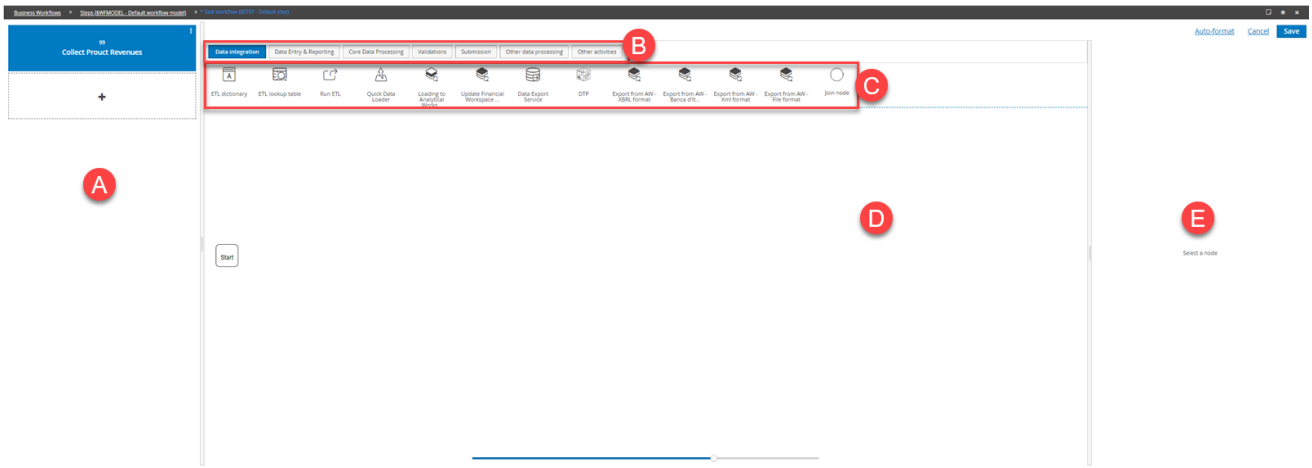

Element	Description
AA	List of task workflows created and button for adding a new task workflow
B	Activities tab
C	Activities related to the selected tab
D	Work panel
E	Information related to the activity selected in the work panel

Activities tab

For multidimensional workflows, only some of these tabs will appear.

Tab	Content
Data integration	Activities for integrating data en masse from external sources.
Data Entry & Reporting	Activities related to entering and consulting data present in CCH Tagetik.
Core data processing	Application data processing that allows you to transform and add data present in Tagetik in different ways according to your needs.
Validations	Diagnostics and IC cockpit
Submission	Submission and approval activities to complete the task workflow.
Other data processing	Other data processing (Store procedure, Jobs and others)
Other activities	Other activities (Bookmark, Deployment and others)

Fields in window to create a task workflow

This window will appear after you have clicked on ✚ to create a new task workflow.

Please find below the most important fields.

Field	Description
Enable alternative approval paths	Makes some approval activities that may have been entered optional. • **No**: alternative approval paths not enabled. All approval activities entered are mandatory. • **Manual rows effect on the main accounts**: approval activities can only be run if the value of the main accounts is within the threshold specified as a parameter for the relative tasks. • **Effect on the specific account**: approval activities can only be run if the value of the account for calculating the alternative approval paths is within the threshold specified as a parameter for the relative tasks. Enable the **Account for the calculation of alternative approval paths** field.
Account for the calculation of alternative approval paths	Only with **Effect on the specific account** selected. Account used for calculating the alternative approval paths.

Fields in window to add a task

This window will appear after a task icon has been dragged into the work panel.

Please find below the most important fields.

Field	Description
Optional	Make the task optional. It will then be possible to submit task workflow data even if the task has not been run.
Read-only	For forms, this allows you to open the form in navigation mode rather than data entry mode. If the form is in navigation mode, the task will automatically become optional. The user must in any case declare that the task has been completed to continue to the next one.
Enable e-mail notification	Only if the process send email rule **Completion: Process task workflows** is active. Sends the task managers a notification email reporting that the previous task has been completed and they can start working.
Declare task completion	Allows you to select the mode for declaring the task complete.
Parameters	Allows you to indicate the parameters for running the task. The displayed parameters will depend on the type of task that has been selected. For example, for **Submit** and **Diagnostics** activities, underlying nodes and entities can also be submitted en masse and diagnostics can be run on them. The **Forms** option allows you to indicate the report in the list of preconfigured reports that the user can use.
Label	Assigns a label to the task.



IMPORTANT: 'Bookmark' type tasks have been deprecated. With the introduction of the new user interface, it is no longer possible to create new ones. Instead, 'Link' tasks must be used. 'Bookmark' tasks already in the system will continue to function correctly.

Task workflow for a Collaborative Office document

Background

In addition to numbers and amounts, CCH Tagetik allows you to submit Collaborative Office documents containing text, charts and tables.

How to manage document submission

CCH Tagetik allows you to link the submission of a document created using Collaborative Office to the desired step of a specific Business Workflow. To do this, a specific task workflow must be created within that step, made up of as many Collaborative Office tasks as there are *document parts* in the document to be submitted.

Task workflow structure

The task workflow must mirror the structure of the document to be submitted. The Collaborative Office tasks within it must be arranged according to the sequential order of the parts, which in this document will be referred to as specified in the following example of the document parts tree:

1. paragraphs
2. chapters
3. document (*master document*)

Prerequisites for creating a task workflow


To create the task workflow for a Collaborative Office document, you must:

- Know the structure of the document in question.
- Have activated the **Relate to the process** property in the specific additional component of the Word file in document properties. Under the same parameters (Entity, Scenario, Period and Document language) the option can be activated for one document only.

***Note**: task workflows related to the process can only be managed from the web interface.*

Example of a task workflow with Collaborative Office tasks

Document comprising two chapters of two paragraphs each.

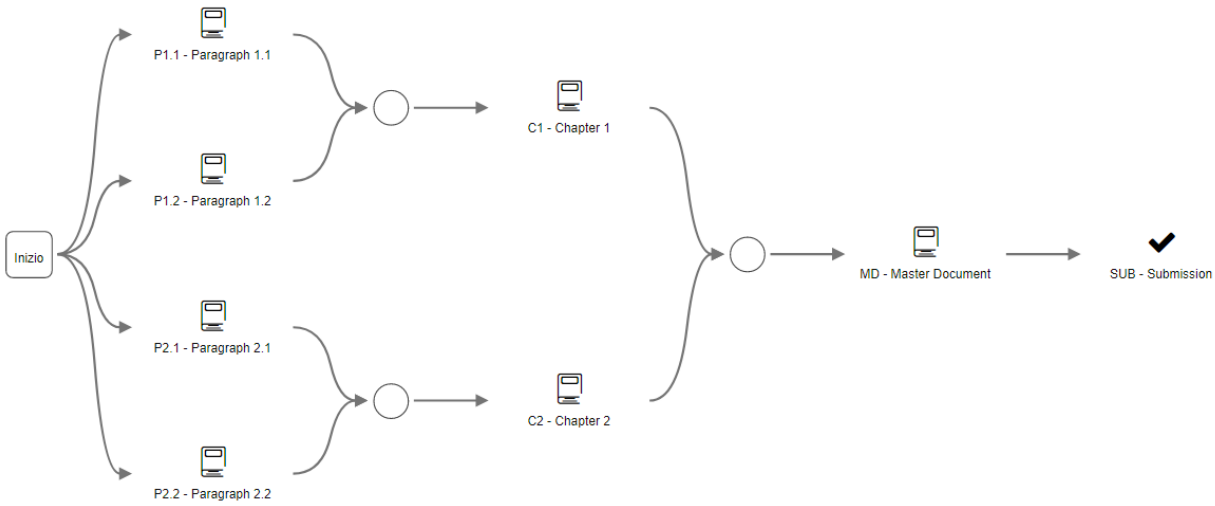

Utility for the user

For task workflows with Collaborative Office tasks, the user can access the process cockpit, open the various parts of the desired document in order and, if required, declare them to be complete.

The **Task is complete** option allows you to submit the document part, or run the submission/approval tasks once only, if the user is authorised to do so. If the **Open as PDF** option is active in the task definition step, it will not be possible to submit it from the cockpit.

***Note**: to enable the **Task is complete** menu and therefore submit the document part, the Manually declare task completed option must be activated when the task is created.*

Document submission

A document can only be submitted when the document parts of which its comprised have been declared complete. Parts can only be declared complete when all of their sub-parts have been declared complete.

The entity's business cycles

Contents

This section covers the following topics:

Business cycles 391
Set Business Cycles 391
Define Cycles window 392
Manage Status window 393

Business cycles

What are business cycles

In process settings, business cycles define the type of submission (single submission or submission by scenario/period). They are based on scenarios and periods, and so these dimensions must already be prepared in CCH Tagetik's Data Model.

Function

Setting the business cycles allows you to define the time interval over which the data must be submitted.

There are two types of business cycle:

- Submission by scenario/period: submission is completed for every scenario/period of the cycle. The cycle data are then locked when all scenarios/periods have been submitted.
- Single submission: data submission is completed for a group of periods, e.g. every 12 periods for an annual process. Data for the entire cycle are locked when the last scheduled period has been submitted.

***IMPORTANT**: if you change the type of business cycle, data related to the Analytical Information Hubs linked to the process will be lost.*

Set Business Cycles

Sequence of procedures

To define the business cycles, the following procedures must be followed:

1. "Set the scenarios/periods to be inserted into the process" below
2. "Define actions on process scenarios/periods" on the next page

1. Set the scenarios/periods to be inserted into the process

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Define Cycles

Application database > Processes & Workflows > Process > select process > ⋮ > Process definition > (Business Cycles section) Define Cycles

This procedure allows you to define the process submission type (single submission or submission by scenario/period) and the process scenarios/periods.

1. In **Number of cycles** select the desired type of submission and click **Save**.
2. To select the desired scenarios/periods, click **Define Cycles**: the **Define Cycles** window will open.
3. In the **Available Scenarios/Periods** column, select one or several scenarios/periods.
4. Click > or drag the selected items into the **Process Scenarios/Periods** column.
5. Click **Save**.

1. ### Define actions on process scenarios/periods

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Manage status

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Business Cycles section) Manage status

This procedure allows you to lock, unlock, archive or restore scenarios/periods.

1. Click on the desired action, then select the desired scenarios/periods. and click **OK**.
2. Repeat step 1 for every action to be defined.
3. Click **OK**.

Define Cycles window

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Business Cycles section) Define Cycles

Application database > Processes & Workflows > Process > select process > ⋮ > Process definition > (Business Cycles section) Define Cycles

Purpose of window

This window allows you to set the necessary business cycles to define the time interval over which the data must be submitted.

Window sections

Element	Description
Available scenarios/periods	Displays scenario/period pairs that are not related to any process.
Related to another process	Displays the list of processes to which scenario/period pairs are related. The current process, archived processes and processes with locked setup are excluded.
Process scenarios/periods	Displays scenario/period pairs already related to the current process.

Options in window

Element	Description
>	Adds the selected scenario/period to the process.
<	Removes the selected scenario/period from the process.

Manage Status window

Admin

Application database > Processes tile > select process > > Process setup > (Business Cycles section) Manage status

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Business Cycles section) Manage status

Purpose of window

This window allows you to lock or unlock data collection for specific scenarios/periods and archive or restore data on specific scenarios/periods.

Options in window

Element	Description
Lock	Lock data collection for the selected scenario/period.
Unlock	Unlock data collection for the selected scenario/period.
Archive	• For single submission processes, this archives and locks all periods of the process simultaneously. • For submission by scenario/period processes, this locks and archives the data for the selected scenario/period and for the consolidation scenarios/periods associated with it. ***IMPORTANT**: if all process scenarios/periods are archived and locked, the process is also archived and locked. See Archiving process data.*
Restore	Restores data for the selected scenario/period. ***Note**: restoring does not unlock scenarios/periods.*
Original scenario/period	Selects the entire original scenario/period structure.
Consolidation scenario/period	Selects the entire consolidation scenario/period structure.

Entity organisation and workflow

Contents

This section covers the following topics:

Organisation and workflow 394
Organisation and Workflow setup 395
Exceptions page 397
Definition results page (organisational hierarchy) 398
Mapping task workflow page 399
Definition result: Mapping task workflow page 400
Examples of mapping 401
Deadline dates page 402
Settings submission window 403
Advanced definition page 404
Shift dates window 405
Set deadline window 405

Organisation and workflow

Background

In the process settings, the organization and workflow section allows you to define the process's organisational hierarchy and workflow.

Function

Setting the organization and workflow means bringing an entity's real organisation and workflow into CCH Tagetik, i.e. defining:

- the *organisational hierarchy*, or the entities or companies enabled to enter and approve process data
- the process's *business workflow*, or the logical steps of the process's workflow.

The following actions can also be run:

- Include in the process specific entities or nodes of an entity hierarchy chosen from among the non-time-dependent hierarchies not related to the process, provided they are involved on an exceptional basis in the same process.
- Override the currency of the included entities in relation to the currency indicated in the entity's elements table.
- Exclude from the process specific entities or nodes of a group of entities related to the process.
- Perform the entity/task workflow *mapping*, or relate entities/nodes to specific task workflows for specific steps of the selected Business Workflow. This limits data entry on task workflows to the entities that are actually responsible for that data.

For every entity, it is also possible to define submission start and end dates and start dates for sending e-mails reminding authorised users to enter data.

***Note**: the recipients of the reminder e-mail and the e-mail wording are defined in the send email rule associated with the "Reminder on Entity submission" event (see "Send email events" on page 502).*

Example or Organisation and workflow settings

This example describes a budget process with the following characteristics:

- the organisational hierarchy used is called Regional view
- data is entered by individual entities

- approval and submission takes place at the geographic regional level

Case 1: excluding an entity from the administrative hierarchy

Entity X00, contained in Regional view, does not collect data on the budget process. It is therefore not necessary to consider this entity in the process's data processing and it can be excluded, using the *Exclude* action.

Case 2: override the currency of a USD entity in a EUR process

Entity B00 uses the USD currency. That entity is involved on an exceptional basis in the entry of data for the budget process using the Global view hierarchy, for which the currency is EUR. In this case, it is necessary to override the entity's exclusion from the process and override its currency, changing it from USD to EUR, to adjust the entity's amounts to the currency of the process's administrative hierarchy.

Particularities of entity/task workflow mapping

When entity/task workflow mapping is performed, entities and specific task workflows are related to specific phases of the selected Business Workflow.

If no mapping is managed, by default the system only associates submission with all entities in the process (task $ - default workflow).

When a *lowest level element* entity, or an entity contained in a node, is related to a task workflow, the relationship is not automatic for the parent node. To relate the parent node to a task workflow, it will be necessary to create a specific relationship.

Organisation and Workflow setup

Sequence of core procedures

The following procedures are necessary in order to set up the administrative hierarchy and workflow:

1. "Associate the organisational hierarchy and business workflow with the process" below.
2. "Include/exclude entities from the organisational hierarchy" below.
3. "Associate task workflows with entities" on the next page

1. Associate the organisational hierarchy and business workflow with the process

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section)

Application database > Processes & Workflow > Process > select process > ⋮ > Process setup (Organisation & Workflow section)

1. From **Organization hierarchy**, select the hierarchy of entities involved in the process.
2. From **Business Workflows**, select the Business Workflow to be associated with the process.

1. Include/exclude entities from the organisational hierarchy

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Exceptions

Application database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Organisation & Workflow section) Exceptions

This procedure allows you to include or exclude specific entities or groups of entities in/from the hierarchy involved in the process. For the data entry of the individual entity, it also allows you to use a currency other than the one defined in the entity elements table itself, by overriding it.

1. Click ⊕ to add an exception.
2. In **Entity**, select the desired non-time-dependent entity or node of entities.

3. In **Action**, set the desired type of exception.
4. If you want to change the reference currency of the selected entity or node of entities, in **Override entity currency**, set the new currency.
5. Click **Save**.

1. ### Associate task workflows with entities

   This procedure allows you to associate task workflows with entities for the individual phases that make up the Business Workflow associated with the process.

   1. Click **Mapping**: the **Mapping task workflow** window will open.
   2. Click on the desired tab.
   3. Click to add an association.
   4. In **Attributes**, define the fields as desired.
   5. Set the entity to be associated with the task workflow in the relative menu.
   6. Click **Save**.

      ***Note**: entities or nodes not associated with a specific task workflow are associated by the system with the default task workflow ($ - default workflow), which provides for submission only.*

***IMPORTANT**: the order in which the relationships are added to the table determines the order in which they are read by the system, which manages subsequent rows as exceptions to the previous rows. If there are both general and specific relationships (with exceptions and overrides), the specific relationships must be positioned after the general relationships.*

Other procedures

The following procedures are optional extras.

- "Set step submission deadline" below.
- "Change the step submission deadline" below.
- "Set the process submission date" on the facing page.
- "Override the submission start dates and memo send dates" on the facing page.

Set step submission deadline

Application database > Processes tile > select process > > Process setup (Organization & Workflow section) Deadline dates

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Organization & Workflow section) Deadline dates

1. For submission by scenario/period steps, in the scenarios/periods selection bar, select the desired scenario and period.
2. Select the desired role tab (contributor or consolidator).
3. In the entity search bar, enter the name of the entity or select it from the list to the left.
4. Cl the desired cell at which the entities row and the steps column intersect: the **Set deadline** window will open.
5. Set a deadline and select the entity node levels to which to apply the deadline.
6. Click **OK**.

Change the step submission deadline

Application database > Processes tile > select process > > Process setup (Organization & Workflow section) Deadline dates

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Organization & Workflow section) Deadline dates

1. Click the **Shift dates** button to open the **Shift dates** window.
2. Select the desired mode for shifting the dates (**Shift current dates**/**Copy from Scenario/Period and shift**).
3. In **New deadline date**, set the desired deadline date and time.
4. Click **OK**.

Set the process submission date

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Organization & Workflow section) Deadline dates

1. In the memo settings section, click **Edit**: the **Settings submission** window will appear.
2. Select the submission admissibility period: if you choose the **Time period** option, set a validity period prior to the deadline.
3. (Optional) Select **Send submission memo starting from** to set the date from which to send users the submission memo then set the desired interval.
4. Select the period in which to allow submission.
5. Click **OK**.

Override the submission start dates and memo send dates

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Deadline dates > Advanced definition

Application database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup > (Organisation & Workflow section) Deadline dates > Advanced definition

This procedure allows you to set, for specific entity/phase/deadline relationships, submission period start dates and customised memo send dates. These new dates are written over the dates set at the process level.

1. In the list of entity relationships or entity node/phase/deadline/memo send date relationships, click on the desired relationship.
2. In the configuration tab, select **Override dates**.
3. In **Submission Start date** and/or **Reminder Start date**, set the desired date and time.
4. Click **Save**.

Exceptions page

Admin


Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Exceptions

Application database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Organisation & Workflow section) Exceptions

Purpose of the page

This page allows you to include/exclude specific entities or nodes of entities in/from the process's organisational hierarchy.

What it looks like

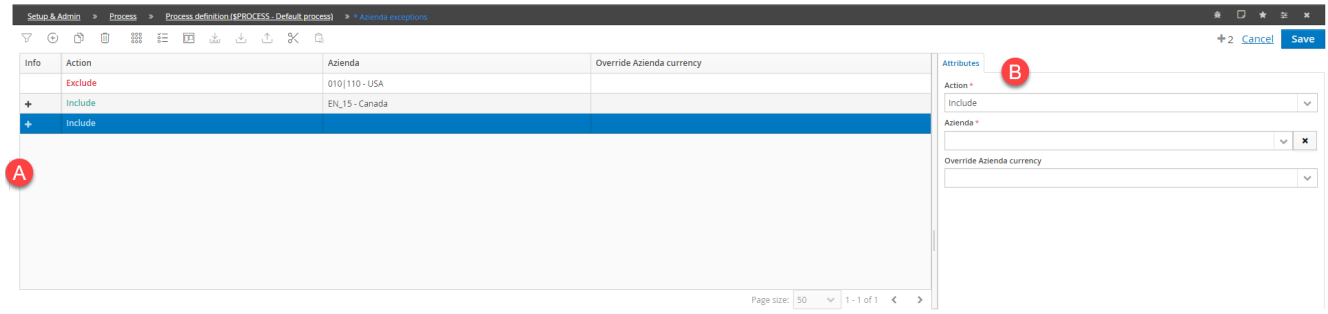

Element	Description
A	List of exceptions
B	Exceptions configuration tab

Page fields

Please find below the most important fields.

Field	Description
Action	Includes/excludes the entity selected in **Entity** in/from the process's organisational hierarchy.
Entity	Selects an entity or a node of entities.
Override entity currency	Set the currency of the selected entity to a different currency from the one indicated in the entity elements table.

Definition results page (organisational hierarchy)

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow, Administrative hierarchy section) > Definition result

Application database > Processes & Workflows > Processes > select process > ⋮ > Process setup (Organisation & Workflow, Administrative hierarchy section) Definition result

Purpose of the page

This page shows the list of entities or nodes of entities included/excluded in/from the process' organisational hierarchy.

Page tabs

Element	Description
Entity	Shows entities on which to collect data in the process and the currencies associated with them.
Nodes	Shows the nodes of entities and activities enabled for contributor nodes and consolidator nodes.

Mapping task workflow page

Admin


Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Mapping

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Mapping

Purpose of the page

This page allows you to relate entities, nodes and/or journals to specific task workflows, and specific steps of the selected Business Workflow.

What it looks like

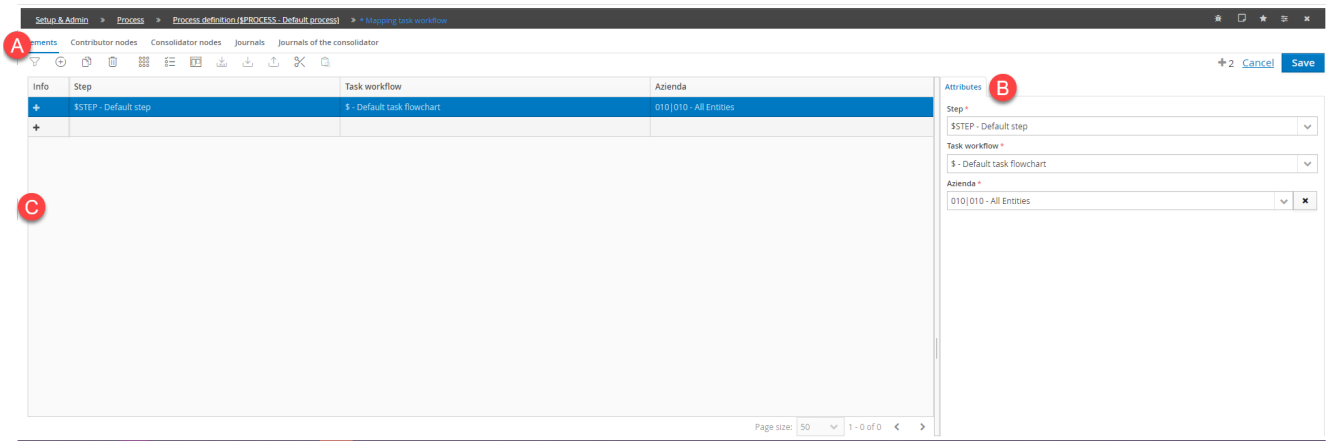

Element	Description
A	Relationship details tabs
B	Relationship configuration tab
C	Relationships table

Details tab

Element	Description
Elements	Entity/Step/Task workflow relationships
Contributor nodes	Contributor node/Step/Task workflow relationships
Consolidator Nodes	Consolidator node/Step/Task workflow relationships
Journals	Entity journal/Step/Task workflow relationships
Consolidator journals	Consolidator node journal/Step/Task workflow relationships

Elements tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity	Entity or organisational hierarchy node of the process

Contributor nodes tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy
Node type	Node, child nodes or level of the node with which the task workflow is to be associated

Consolidator nodes tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's administrative hierarchy
Node type	Node, child nodes or level of the node with which the task workflow is to be associated

Journals tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy

Consolidator journals tab

Field	Description
Step	The process's Business Workflow step
Task workflow	Task workflow of the process's Business Workflows step
Entity node	Entity node of the process's organisational hierarchy
Node type	Node, child nodes or level of the nodes with which the task workflow is to be associated

Definition result: Mapping task workflow page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow, Business Workflow section) > Definition result

Application database > Processes & Workflows > Process > select process > ⋮ > Process setup (Organisation & Workflow, Business Workflow section) Definition result

Purpose of the page

This page shows the list of relationships between entities and/or journals, phases and specific task workflows run on the Mapping task workflow page, and which have been deployed.

Page tabs

Element	Description
Entity mapping	Relationships between entities (entities, contributor nodes, consolidator nodes), steps and task workflows.
Journals mapping	Relationships between journals (entity journals and consolidator node journals), steps and task workflows.

Data in the table

Element	Description
✔	The entity is related to default task workflow $ of the Business Workflow step.
Empty cell	The entity is not authorised to work on the step (e.g. a contributor entity is not authorised to work on consolidator type steps).
<Task workflow>	Task workflow to which the entity is related.

Examples of mapping

Introduction

Some specific examples of entity/node, step and task workflow mapping are provided below.

Entity/node, step and task workflow mapping

In this example, two steps of a budget process, called Payroll planning and IT Costs, are mapped in order to achieve specific functional objectives, such as:

- setting the Payroll planning step to run the planning on the individual employee for American entities, and on the headcount for all other entities.
- enable only submission for contributor and consolidator nodes.
- enable the Corporate entity as the only entity authorised to enter data on the IT Costs step.

In CCH Tagetik , these objectives correspond to the following settings, developed in the procedures in this module:

Settings	Procedure
Diversify the task workflow of a step depending on the entity	"Step (Payroll planning)/Entity mapping" below
Enable only submission for contributor and consolidator nodes	"Step (Payroll planning)/Node mapping" on the next page
Enable only the Corporate node (organisational hierarchy parent) to enter data in the IT costs step , excluding all other entities.	"Step (IT Costs)/Entity mapping" on the next page

Step (Payroll planning)/Entity mapping

In this example, the Payroll planning step must run the planning on the individual employee for American entities, and on the headcount for all other entities. To do this, the following operations are necessary:

- Create a step/entity relationship that defines the general behaviour to be applied to the entire organisational hierarchy. To do this, the PPA task workflow of the payroll planning by headcount is related to the Payroll planning step and the entity is the parent (or root) 000 Entities node of the process's organisational hierarchy.
- Create a step/entity relationship that defines the specific behaviour to be applied to an individual entity of the organisational hierarchy. To do this, the PPU task workflow of the payroll planning by employee is related to the Payroll planning phase and the entity is the USA node to which the American entities in the organisational hierarchy are related.

Procedure

***IMPORTANT**: the order in which the relationships are added to the table determines the order in which they are read by the system, which manages subsequent rows as exceptions to the previous rows. If there are both general and specific relationships (with exceptions and overrides), the specific relationships must be positioned after the general relationships.*

1. On the **Elements** tab of the **Mapping task workflow** page, click ⊕: a new row will appear.
2. Select the new row and, in the **Attributes** tab, select the **Payroll planning** phase, the **PPA** task workflow, and the **000 Entities** entity. This is the parent node of the process's organisational hierarchy
3. Click **Save**.
4. Click ⊕.

5. Select the new row and, in the **Attributes** tab, select the **Payroll planning** phase, the **PPU** task workflow, and the **USA** entity. This is the node of American entities.
6. Click **Save**.

Step (Payroll planning)/Node mapping

For contributor and consolidator nodes, it is necessary to enable data submission only. This is automatic, since the system associates the default task workflow $STEP that contains only one submission operation to every node within the mapping.

Step (IT Costs)/Entity mapping

In this example, in the entire IT Costs phase, the Corporate entity must be the only entity in the organisational hierarchy authorised for data entry and submission. To do this, the following operations are necessary:

- Create a phase/entity relationship that prevents any behaviour on the entire organisational hierarchy. To do this, the task workflow $$ - Empty task flowchart is related to the IT Costs step and the entity is the parent node of the process' organisational hierarchy.
- Create a step/entity relationship that defines the specific behaviour to be applied to an individual entity in the organisational hierarchy. To do this, the IT Costs task workflow and the entity X00 - Corporate are related to the IT costs step.

***Note**: excluded entities are identified with a grey traffic light on the process cockpit.*

Procedure

***IMPORTANT**: the order in which the relationships are added to the table determines the order in which they are read by the system, which manages subsequent rows as exceptions to the previous rows. If there are both general and specific relationships (with exceptions and overrides), the specific relationships must be positioned after the general relationships.*

1. On the **Elements** tab of the **Mapping task workflow** page, click : a new row will appear.
2. Select the new row and, in the **Attributes** tab, select the **IT Costs** step, the Task workflow $$ - Empty task flowchart, and the **000 Entities** entity. This is the parent node of the process's organisational hierarchy
3. Click **Save**.
4. Click .
5. Select the new row and, in the **Attributes** tab, select the **IT Costs** step, the **IT Expenses** task workflow, and the **X00 - Corporate** entity.
6. Click **Save**.

Deadline dates page

Admin

Application database > Processes tile > select process > > Process setup (Organization & Workflow section) Deadline dates


Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Organization & Workflow section) Deadline dates

Purpose of the page

This page allows you to define the following information for the entities involved in the process:

- the deadlines for submitting the process or the phases of one of the process's scenarios/periods
- the submission admissibility period
- the dates on which the submission memos are sent

What it looks like

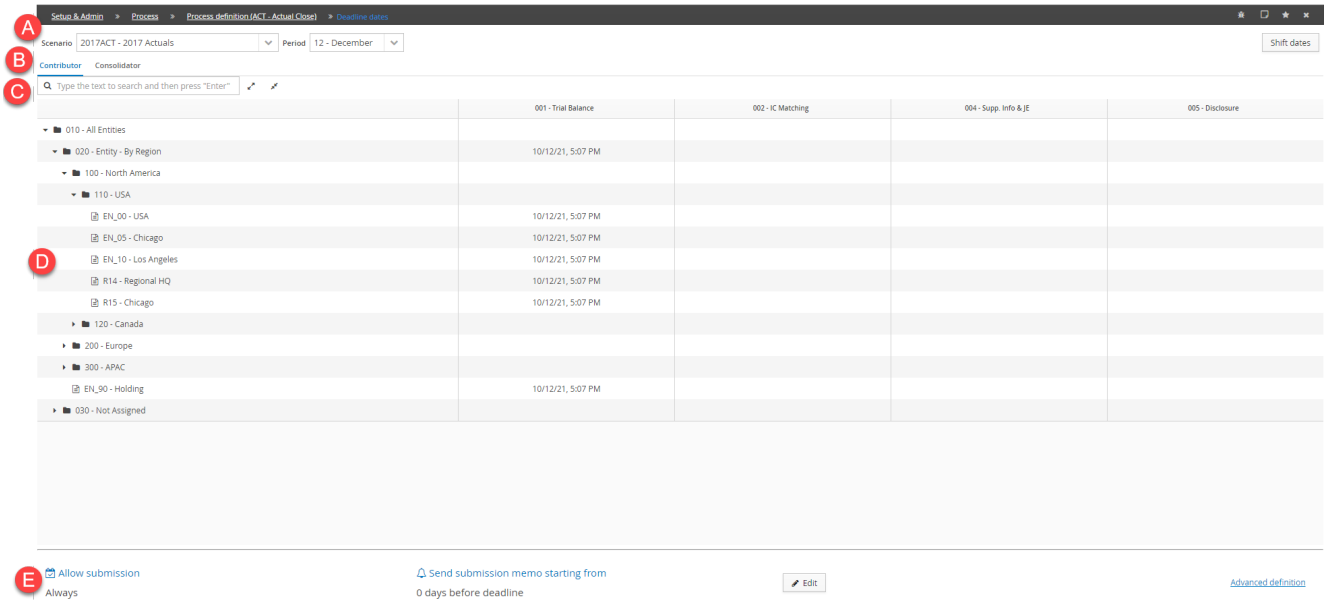

Element	Description
A	(only in processes with submission by scenario/period) Scenario/period selection bar
B	Role tabs
C	Entity search bar
D	Section for setting deadlines on entity/phase relationships.
E	Section for setting submission start dates and submission memo dates

Role tabs

Element	Description
Contributor	Details of deadlines assigned to contributor entities for submitting process phases.
Consolidator	Details of deadlines assigned to consolidator entities for submitting process phases.

Actions on this page

Element	Description
<Intersection cells>	Open a window to set the date by which the entity must submit the phase.
Shift dates	Opens a window to change the deadlines en masse at the process or scenario/period level.
Edit	Opens a window to set the submission admissibility period and the sending of submission memos.
Advanced definition	Opens a window to set submission start date overrides for the period and overridden submission memo send dates.

Settings submission window

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates > Edit

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Organization & Workflow section) Deadline dates > Edit

Purpose of window

This page allows you to set the process's submission period and the sending of a submission memo.

Options in window

Element	Description
Always	Makes submission always possible until the deadline.
Time period	Makes submission possible based on a certain period of days, hours and minutes prior to the deadline.
Send submission memo starting from	Enables the sending of a daily submission memo within a period of days prior to the deadline and allows you to set that period.

Advanced definition page

Admin


Application database > Processes tile > select process > > Process setup (Organization & Workflow section) > Deadline dates > Advanced definition

Application database > Navigation Panel > Processes & Workflow > Process > select process > > Process setup > (Organisation & Workflow section) Deadline dates > Advanced definition

Purpose of the page

This page allows you to set overridden submission period start dates and overridden submission memo send dates on entity/step/deadline relationships. These dates overwrite the dates set at the process level, but are not overwritten by any deadline recalculations due to changes to the settings.

What it looks like

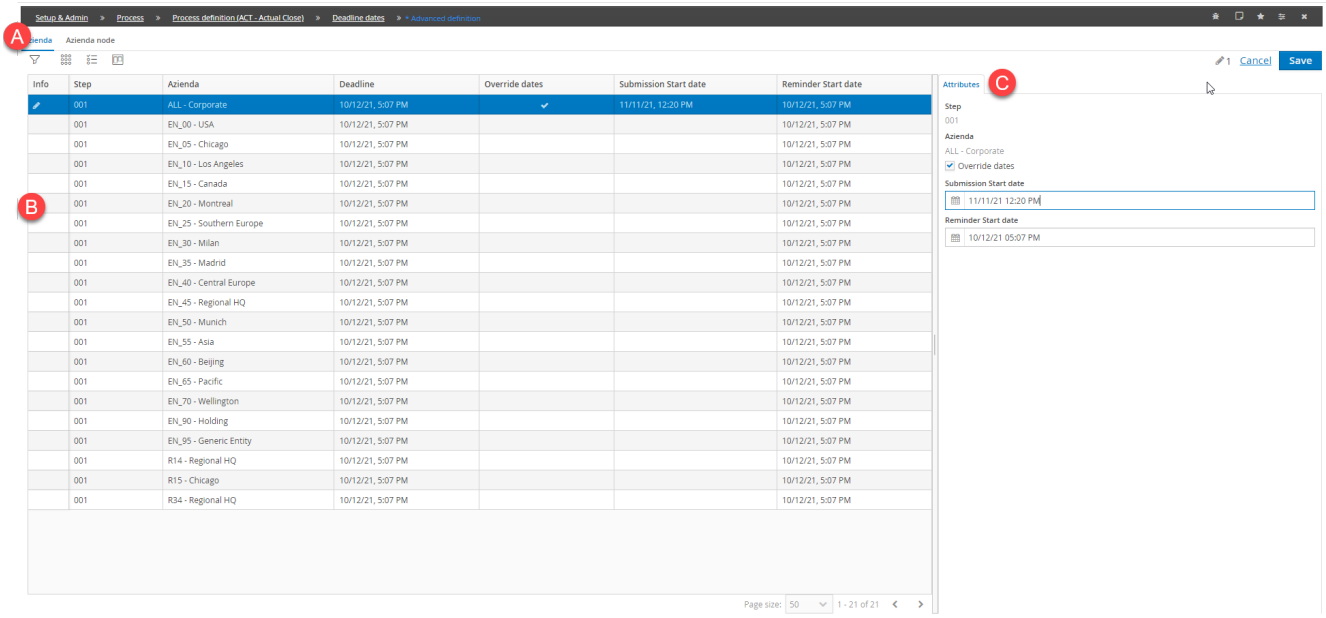

Element	Description
A	Entity tabs.
B	List of entity (or node of entities)/step/deadline/memo send date relationships
C	Overridden dates configuration tab

Actions on this page

Element	Description
Override dates	Enables insertion of overridden dates on the entity (or node of entities)/phase/deadline/memo send date relationship.
Submission start date	Selects the overridden submission period start date on the entity (or node of entities)/step/deadline relationship.
Reminder Start date	Selects the overridden reminder send date on the entity (or node of entities)/phase/deadline relationship.

Shift dates window

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) Deadline dates > Shift dates

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Organization & Workflow section) Deadline dates > Shift dates

Purpose of window

This page allows you to edit en masse the deadlines for the submission of a single submission process or steps of the selected scenario/period. If deadlines have not yet been defined on a process, this page allows you to copy the deadline from a scenario/period of a similar process, or a process with the same organisational hierarchy and same business workflow, and to update the deadline based on the copied date. The copied date is the last deadline, in chronological order, defined on the steps of the source scenario.

Actions in window

Element	Description
Shift current dates	Enables the insertion of a new submission date for all steps of the selected scenario/period.
Copy from Scenario/Period and shift	Enables the deadline to be copied from a selected scenario/period to processes with the same organisational hierarchy and business workflow as the process in use.
Scenario/period	Scenario/period from which to copy the deadline
Last deadline date	Shows the last known deadline date and time for the process or for the steps of the scenario/period.
New deadline date	Allows you to set a new deadline date and time for submission of the process or steps of the scenario/period.

Set deadline window

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Organization & Workflow section) > Deadline dates > click cells in table

Application database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup > (Organisation & Workflow section) Deadline dates > click cells in table

Purpose of window

This page allows you to set the date by which the entity in question must submit the step in question. For single submission processes, the deadline is inserted on the last of the process's scenarios/periods.

Actions in window

Element	Description
Selected element	Shows the entity or node of entities and the step on which to set the deadline.
Deadline	Selects the deadline
Apply to	Only if a node of entities is selected. Determines the levels of the node in question to which to apply the deadline in relation to the step in question: • **Current selection**: the date is assigned to the node. • **Subnodes**: the date is assigned to all of the node's contributor subnodes. • **Lowest level elements**: the date is assigned to the lowest level elements.

The Process Data Model

Contents

This section covers the following topics:

Introduction to the Process Data Model 407
Process Data Model definition 408
Data management for the Process Data Model 410
Process Data Model setup 411
Process Data Model examples 413
Define Process Data Model page 415
Process Data Model/Entity Relationships page 418
Definition result: Process Data Models related to entities page 419
Definition result: Process Data Model page 419

Introduction to the Process Data Model

Background

In the process settings, the Process Data Model (PDM) defines a subset of accounts or accounts/categories on which to collect, submit and process the data. The PDM is based on accounts and categories, and so these structures must already be set up in CCH Tagetik's dimensions.

Elements of the Process Data Model

The **Process Data Model** is based on the following elements:

- *account*s, or the subject of data collation
- *steps* of the process on which to collect account data
- *categories* containing the classification and segmentation of the data on accounts
- *measures*, or custom dataset fields
- the process's *data model*, or the accounts/categories involved in data collection, specific behaviour and exceptions that govern the entry of data on the process.

Process Data Model definition

Setting up the process's *data model* involves defining the following elements:

- Accounts or accounts/categories that collect/do not collect data on the process (e.g. if you want to exclude accounts included in a certain node of accounts).
- The editability rights of accounts on specific types of data and on the categories associated with them, when they need to be different from the default behaviours.
- The steps on which to set, for example, any blocks on intercompany declarations for specific accounts not belonging to intercompany matching cockpits.
- The control groups included in the process and those excluded from it, from among those that the system automatically relates to the process during its deployment.
- Any custom Analytical Workspace measures to be included in the process.

Default PDM and custom data models

A default PDM, called $PDM, is related to every process. If the default PDM does not fully meet the functional needs of the project, custom PDMs can be created. In particular, this is useful for associating subgroups of accounts with specific entities/entities and consolidation scenarios/periods.

Process Data Model organisation

The order in which PDMs are inserted determines the order in which they are run within the system. If there are general PDMs and PDMs with exceptions and overrides, the order in which the PDMs is created must go from the most generic to the most specific because, if the data processing of a generic PDM follows that of a specific PDM, the rules of the specific PDM may be overwritten.

If several PDMs are managing different accounts, it is advisable to set up a custom PDM by account, rather than make changes to the $PDM.

Process Data Model definition

Introduction

To set up the PDM, the following elements must be defined:

- accounts/categories and measures (or custom dataset fields of Analytical Workspaces) involved in the process
- any overrides and/or exceptions on accounts/categories and measures

The order in which the records are inserted in the setup tables is important because deployment processes the rows in the order in which they were inserted.

1. Define the CCH Tagetik accounts to be included in/excluded from specific steps of the process.
2. Define the forms, and therefore the accounts contained in them, to be included in/excluded from specific steps of the process.
3. Define the type of data to be collected on the process, the categories, if required, and the editability properties of the accounts.
4. Define the process steps on which to set, remove or move the block of intercompany declarations for specific accounts or accounts/categories.
5. Define the control groups from among those to be included in/excluded from the process and the types of data checked by them.
6. Define the Analytical Workspace measures to be included in/excluded from the data model and/or specific steps of the process.

Customisation of the PDM

For processes with dimension by step and at least one step on the Entity dimension, if the default PDM does not fully meet the functional needs of the project, custom PDMs can be created. In particular, this is useful for associating subgroups of accounts with specific entities/companies and consolidation scenarios/periods.

You can also exclude one or more control groups from a specific step.

You must consider the type of step defined on the Business Workflow (Steps of the Business Workflow).

If...	Then...	AND...
the Process Data Model is managed by account/step	the accounts/forms can be assigned only via the steps. ***Note**: this operation allows you to distinguish the management of data between the contributor and the consolidator, without having to provide details of the process by category.*	The relations between the accounts/forms/control groups are set as follows: • For the contributor, they are related to the step selected in the setup. • For the consolidator, they are related to the consolidator step immediately after the contributor step on which the accounts and forms are positioned.
the Process Data Model is managed by account/category/step	the specific categories are related to the contributor and consolidator steps of the process. In other words, contributor categories for the contributor steps and consolidator categories for the consolidator steps. ***Note**: this operation gives a clear separation of timing between the operations carried out by the contributor and those carried out by the consolidator.*	the category-step relations are set as follows: • The contributor categories are related to the contributor steps. • The consolidator categories are related to the consolidator steps. • The category groupings can be related to all the steps. The accounts/forms/control groups are then attributed to contributor steps if the categories are contributor categories, and to consolidator steps if the categories are consolidator categories. Pairs that do not comply with the rule described for assignment are discarded.

Exceptions on forms

By default, CCH Tagetik automatically associates a form with a step of the process when at least one account associated with the step is also contained in the forms and editable. However, a form or a node of the grouping of forms can be excluded or added manually.

Example of excluded forms

Two different processes, statutory and management, can manage the same accounts via different forms, in different data entry steps. In the statutory process, the node that groups management data forms can be excluded from the desired step in order to view only the forms involved in the entry of statutory data.

Exceptions for account editability

The setting of exceptions for account editability defines the changes that users can make on the accounts.

Accounts can be made editable, non-editable, only importable (e.g. via ETL import), or be set to follow the editability condition defined in the table on the individual account (*automatic* behaviour).

It is possible to set exceptions on the editability of specific types of account data (all data, gross data, intercompany data) and/or certain categories of account data (all categories, amounts, journals).

The overrides set on intercompany data do not change the account settings in the table. For example, the “Editable on intercompany values” override has no effect on an account that does not allow intercompany declarations. Vice versa, on an account that allows intercompany declarations, setting a non-editable override makes the account’s intercompany data non-editable in the specific process.

> ### Example of editable accounts
>
> When a calculated revenue account is defined as the product of price and quantity, that configuration makes the account non-editable. For it to be editable, an editability exception needs to be created on the account, to allow the user to edit the data.

Exceptions for intercompany steps

By default, for accounts belonging to an intercompany matching cockpit, the insertion of intercompany declarations is blocked when submitting the step to which the cockpit is related.

For accounts not belonging to an intercompany matching cockpit, intercompany declarations are blocked by default when submitting the gross step to which the accounts are related. However, exceptions can be defined for the step in which to block intercompany declarations, or:

- Remove the intercompany account from the gross step to which it belongs, so that the declaration is never blocked.
- Move the blocking of intercompany declarations to a different intercompany step
- Set the blocking of intercompany declarations on the gross step to which said declarations belong (*Automatic* behaviour).

Exceptions for control groups

By default, CCH Tagetik includes all control groups that contain at least one account involved in the process, with the exception of control groups on which the “Include in the process if all parent accounts belong to the process” or “Include in the process if all child accounts belong to the process” option is active.

To exclude individual control groups or specific nodes of a grouping of control groups from the PDM, exceptions can be set to remove control groups.

When an exception is set to remove one or several control groups, this may have an impact on all data entered, on gross data only, or on intercompany data only.

Analytical Workspace measures

The setting of Measures allows you to define which measures belonging to the Analytical Workspace, and its selected datasets, to associate with the chosen step of the process.

When each association is saved, CCH Tagetik checks that every measure is associated with one step, and one step only.

Data management for the Process Data Model

Data collection modes

Data can be collected *by account*, which considers all data entered on the account, or *by account/category*, which considers the data collected, separated by category. Data is then collected in the following two modes:

- by account/step
- by account/category/step

In both cases, data collection is blocked when submitting the step to which the accounts or accounts/categories are related.

Data collection by account/step

Management by *account/step* is typically used in single step processes, or processes with several steps in which each step is related to a different account. In management by account/step, all the categories associated with the account are considered, or, if the filter on a node of categories is activated, only the categories related to said node are considered.

The accounts and forms, and therefore the control groups associated with them, defined on a contributor step, also are automatically associated with the immediately subsequent consolidator step.

> ### Example of data collection by account
>
> In the case of a budget process with three steps:

1. Collection of revenues and cost of sales data
2. Collection of operating cost data
3. Collection of fixed capital investments data

For data related to the three steps to be submitted at different times, each step must be related to the desired account. Thus, when users submit the first step, the system only blocks the reference accounts for revenue and cost of sales, when they submit the second step, the system only locks the reference accounts for operating costs, etc.

Data collection by account/category/step

Management by *account/category/step* is typically used in processes in which the accounts can be associated with several steps and submission is determined by the categories associated with the accounts.

This management mode is suitable in projects in which you intend to clearly differentiate contributor activities from consolidator activities.

In processes with data collection by account/category/step, the PDM accounts are associated with specific amount or journal categories, in their various declinations, which in turn are associated with contributor steps or consolidator steps, respectively, or with contributor/consolidator steps.

Example of data collection by account/category/step

A statutory data collection process may have two steps:

1. FS data collection
2. Collection of entity journals

In both steps, data can be entered on the same accounts, but on different categories: amount categories for the first step and entity journal categories for the second.

Process Data Model setup

Sequence of procedures

"Define the data to be collected in the process" below.

"Set up a Process Data Model" on the next page.

Define the data to be collected in the process

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

This procedure is crucial when defining a Process Data Model.

To define the data to be included in the process, do the following:

To define data collection on	Then...
account	1. In **Type**, select **By account**. 2. To include accounts originating from other forms included in the process, select **Retrieve accounts from form**. 3. Click **Save**.
account/category	1. In **Type**, select **By account/category** to collect data from accounts divided into the categories present in the environment. 2. (optional) In **Category filter**, select a node of categories to filter according to the categories present in the node. 3. Click **Save**.

Set up a Process Data Model

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

The following general procedure describes the order in which to set up the various configuration tabs with which a PDM can be defined and customised. To define the PDM, an account must be defined but the remaining configuration tabs are optional based on the needs of the project.

1. In the **Account** tab, click ⊕, then select the accounts from CCH Tagetik dimensions and/or accounts originating from forms to be included in/excluded from the process and specify the step on which they are to enter data, then click **Save**.
2. In the **Form exceptions** tab, click ⊕, then select forms to be included in/excluded from specific steps of the process, then click **Save**.
3. In the **Editability exceptions** tab, click ⊕, then set the editability of accounts on specific types of data for certain categories of the process, then click **Save**.
4. In the **IC Step Exceptions** tab, click ⊕, then select steps of the process on which to set the blocking of intercompany declarations for specific accounts or accounts/categories, then click **Save**.
5. In the **Control groups to exclude** tab, click ⊕, then select the control groups to be excluded from/included in the process, then click **Save**.
6. In the **Analytical Workspace Measures** tab, click ⊕, then select the measures from a dataset to be included in/excluded from the process, then click **Save**.

Exclude an account from a step of the process

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

This procedure is optional and allows you to exclude a specific account or node of accounts from a step of the process.

1. In the configuration section of the **Account** tab, in **Action**, select **Exclude**.
2. In **Account**, select the account or node to exclude.
3. In Step, select the step of the process from which to exclude the account, then click **Save**.

Set up a specific data model by entity

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

To set up a specific data model by entity, an account must be defined, but the remaining configuration tabs are optional based on the needs of the project. For the option to be visible, there must be several PDMs.

1. Create one or several customised data models and click **Save**.
2. Click **Process Data Model/Entity Relationships**: a page will open to define the specific PDM for the entities.
3. In the **Elements** tab, click ⊕, then select the desired entity and the PDM with which it should be associated, and finally click **Save**.
4. In the **Contributor nodes** tab, click ⊕, then select a contributor node and specify node levels if necessary, then select the PDM with which it should be associated, and finally click **Save**.
5. In the **Consolidator nodes** tab, click ⊕, then select a consolidator node and specify the node levels if necessary. Then select the PDM to associate it with, and finally click **Save**.
6. In the **Consolidation scenarios/periods relationship** tab, click on the desired consolidation scenario/period, then select the PDM with which it should be associated, and finally click **Save**.

Process Data Model examples

Introduction

Some specific examples of settings for various types of PDM are provided below.

Example of a Process Data Model by account/step

This example describes a situation in which all entities insert and consolidate data on the same accounts and according to the following contributor/consolidator steps:

1. Collection of revenue and cost of sales data
2. Collection of OPEX data
3. Collection of CAPEX data

The default PDM ($PDM) can be used for this process.

Procedure

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

1. In the **Process Data Model** section, in **Type**, select **By Account**.
2. Click ⚙ to open a page showing the details of the default PDM.
3. Select the accounts to be inserted in the various steps.

To select accounts from...	Then...
Account tab	Select the accounts individually or as a node in an accounts hierarchy.
Form exceptions tab	Select individual forms or a node from the group of forms. Selecting a form selects all the editable accounts contained in it.

4. Indicate the gross step to which the selected accounts must be related: on submitting the indicated step, the entry of gross data on all of that step's accounts is blocked, except for overrides.

*IMPORTANT: actions are run in the order in which they are presented in the table. If **Excluded** is selected as the last action for an account, it is excluded from the whole process.*

Example of Process Data Model by account/category/step

This example describes a statutory data collection process according to the following contributor/consolidator steps:

1. Intercompany data collection
2. FS data collection

3. Collection of supplementary note details and variations data
4. Collection of entity journals

The same accounts as steps 2 and 3 are managed in step 4, but according to the entity journal categories. Whereas amount categories are considered in phases 2 and 3.

Procedure

Application database > Processes tile > select process > > Process setup (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Process Data Model section)

1. In the **Process Data Model** section of the **Process definition** page, in **Type**, select **By account/category**.
2. Click to open the **Define Process Data Model** page.
3. In the **Account** tab of the **Define Process Data Model** page, define the account/category pairs for which data are collected and the relative step:
    1. Select the normal P&L and balance sheet accounts.
    2. For these accounts, in **Categories**, select the Amount categories and in **Step**, choose step 2, because this is the step in which you want to close the collection of gross data.
    3. Select the detail P&L accounts and the variation balance sheet accounts.
    4. For these accounts, in **Categories**, select the Amount categories and in **Step**, choose step 3, because this is the phase in which you want to close the collection of detail and variation accounts.
    5. Select normal detail accounts and variation accounts (both P&L and balance sheet).
    6. For these accounts, in **Categories**, select the Entity journal accounts and in **Step**, choose step 4, because this is the step in which you want to close the entry of entity journals.

Comments

No definition is entered for step 1 because intercompany data is submitted in this step.

In the definition of the details of accounts/categories for which data must be entered, only the gross step is considered, i.e. the step in which the entry of gross data of a certain entity must be blocked.

The intercompany step, in which the entry of intercompany data is blocked, is determined by the step in which an intercompany matching cockpit has been inserted.

The only operation required to manage the matching of intercompany entries in step 1 is therefore creating a relationship between the intercompany cockpit and step 1 in the process rules. Thus, the system blocks the entry of intercompany entries for all accounts included in the intercompany cockpit upon submission of step 1.

For accounts excluded from the cockpit, however, the entry of intercompany entries is blocked when submitting the gross step to which the account is related.

Example of a Process Data Model by account/step with contributor steps and consolidator steps

This example describes a data collection process for generating the consolidation according to the following three steps:

1. Data collection by entity - contributor step
2. Collection of supplementary note details and variations - contributor step
3. Collection of consolidation journals - consolidator step

With the contributor and the consolidator using different steps, a single PDM can be used; in this example it is the default $PDM.

Procedure

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

1. In the **Account** tab on the **Define Process Data Model** page, select the **Include** action and define the accounts on which to collect data.
2. In **Step**, indicate the gross step to which the selected accounts must be related: on submitting the indicated step, the entry of gross data on all of that step's accounts is blocked, except for overrides.

   ***Note**: consolidator steps are not included among the selectable steps.*
3. Click **Save** to return to the **Process definition** page.
4. Run deployment.
5. Click to view the accounts involved in the contributor and consolidator steps of the data model.

Define Process Data Model page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Process Data Model section)

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process definition > (Process Data Model section)

Purpose of the page

This page allows you to set up the process's data model.

Page tabs

The following tabs are displayed in the following cases:

- the Process Data Model is "By Account" and the **Retrieve accounts from form** option is not selected
- the Process Data Model is "By account/category"

Element	Description
Account	Defines the accounts or accounts/categories to be included in/excluded from the process and the step on which they enter data. ***IMPORTANT**: only the forms for which those accounts can be edited are available for data entry.*
Form exceptions	Selects the forms to be included in/excluded from specific steps of the process.
Editability exceptions	Allows you to override behaviours in default editability and to set specific behaviours.
IC step exceptions	(Only if the process has at least one step on the Entity dimension) Defines the steps in which to set the block on intercompany declarations for specific accounts or accounts/categories not belonging to intercompany cockpits.
Control groups to exclude	(Only if the process has at least one step on the Entity dimension) Defines the control groups to exclude from the process from those that the deployment operation automatically relates to the process.
Analytical Workspace measures	(Only if the process has at least one step on the Entity dimension) Defines the datasets of the Analytical Workspace to be included in/excluded from the process.

Instead, the following tabs are displayed when the Process Data Model is "By Account" and the **Retrieve accounts from form** option is selected:

Element	Description
Form	Defines the form to be included in/excluded from the process. ***Note**: this allows you to manage forms for which the accounts are defined dynamically and not automatically included in the process deployment.*
Account Exceptions	Select the accounts or accounts/categories to be included in/excluded from the data collection and specific step. ***IMPORTANT**: only the forms for which those accounts can be edited are available for data entry.*
Editability exceptions	Allows you to override behaviours in default editability and to set specific behaviours.
IC step exceptions	(Only if the process has at least one step on the Entity dimension) Defines the steps in which to set the block on intercompany declarations for specific accounts or accounts/categories not belonging to intercompany cockpits. ***Note**: the override is effective only on the accounts that do not belong to an IC matching cockpit.*
Control groups to exclude	(Only if the process has at least one step on the Entity dimension) Defines the control groups to exclude from the process from those that the deployment operation automatically relates to the process.
Analytical Workspace measures	(Only if the process has at least one step on the Entity dimension) Defines the datasets of the Analytical Workspace to be included in/excluded from the process.

Fields in the Account tab

Field	Description
Action	Includes/excludes the account in/from the process.
Select from dimension	Selects an account (or a node of accounts) from CCH Tagetik 's account dimension.
Select from form	Selects a form from which the editable accounts contained in it will be obtained
Step	Selects a Business Workflow step

Fields in the Form tab

Field	Description
Action	Includes/excludes the form in/from the process.
Form	Selects a form from which the editable accounts contained in it will be obtained.
Step	Selects a Business Workflow step.

Fields in the Form Exceptions tab

Field	Description
Action	Includes/excludes the selected form in/from the process.
Form	Selects a form or a node of forms from which the editable accounts contained in it will be obtained.
Step	Selects a Business Workflow step.

Fields in the Account Exceptions tab

Field	Description
Action	Includes/excludes the selected account in/from the process.
Account	Select an account or a node of accounts. **If...** / **Then...** **Retrieve account from form** is selected. → indicates the subset of accounts to exclude/include compared to those retrieved from the form. ***IMPORTANT**: with dynamic forms, the deployment cannot automatically calculate or include the accounts on the form.* **Retrieve account from form** is not selected. → indicates the account to be excluded/included for the selected step.
Step	Selects a Business Workflow step.

Fields in the Editability Exceptions tab

Field	Description
Account	Accounts on which to override the editability rule.
Data type	Selects the type of data on which to set the editability rule (gross data, intercompany data, or both).
Category type	Selects the category on which to set the editability rule (amount, journal, or both).
General settings	Selects the editability level of the selected data (non-editable, only importable, editable, automatic).

Fields in the IC Step Exceptions tab

This tab is available only if the process has at least one step on the Entity dimension.

Field	Description
Action	Selects the action to be run on the account or account/category: • **Delete**: deletes the intercompany account or account/category from the gross step. Thus, the intercompany declaration on the account is never blocked. • **Shift**: shifts the locking of intercompany declarations from the account or account/category onto an IC step. • **Automatic**: sets the gross step of the account as the IC step of the account or account/category.
Account	Selects the account or account/category for which to set the block on intercompany insertions.
Step	(only with the **Shift** option in the **Action** field) Selects a different IC step to which to move the block on intercompany insertions. ***Note**: by default, the block occurs in the gross amount step to which the account belongs.*

Fields in the Control groups to exclude tab

This tab is available only if the process has at least one step on the Entity dimension.

Field	Description
Action	Selects the action to be run on the control group: • **Delete**: deletes the control group from the process. • **Automatic**: only includes the control group if it contains at least one process account, unless the "Include in process if all parent accounts exist" or "Include in process if all child accounts exist" option is active on the control group. In this case, it runs the selected rule.
Control group	Selects a control group or node of control groups.
Data type	Selects the type of data on which to run the action (**gross data**, **intercompany data**, or **both**).

Fields in the Analytical Workspace Measures tab

This tab is available only if the process has at least one step on the Entity dimension.

Field	Description
Action	Includes/excludes Analytical Workspace measures in/from the process.
Analytical workspace	Selects the Analytical Workspace.
Dataset	Selects the dataset from the Analytical Workspace.
Measure	Selects a measure from the dataset of the Analytical Workspace.
Step	Selects a Business Workflow step.

Process Data Model/Entity Relationships page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Process Data Model section) Process Data Model/Entity relationships

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process setup (Process Data Model section) Process Data Model/Entity relationships

Purpose of the page

This page allows you to create specific relationships between the process's entities and data models, and between the process's existing consolidation scenarios/periods.

***Note**: the page is only available if there are several PDMs.*

Page tabs

Element	Description
Elements	Entity (from the available non-time-dependent hierarchies) and PDM relationships.
Contributor nodes	Relationships between contributor nodes and PDMs.
Consolidator Nodes	Relationships between consolidator nodes and PDMs.
Consolidation scenarios/periods relationship	Relationships between the process's consolidation scenarios/periods and the PDM.

Elements tab

Field	Description
Entity	Selects an entity or node of entities.
Process Data Model	Selects a PDM.

Contributor nodes tab

Field	Description
Contributor nodes	Selects a contributor node.
Process Data Model	Selects a PDM.
Advanced selection	Selects the contributor node levels to relate to the PDM.

Consolidator nodes tab

Field	Description
Consolidator Nodes	Selects a consolidator node.
Process Data Model	Selects a data model.
Advanced selection	Selects the consolidator node levels to relate to the data model.

Consolidation scenarios/periods relationship tab

Field	Description
Process Data Model	Selects a data model to relate to consolidation scenarios/periods.

Definition result: Process Data Models related to entities page

Admin

Application database > Processes tile > select process > > Process setup > (Process Data Model section) Definition result

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup > (Process Data Model section) Definition result

Purpose of the page

This page shows the list of entity/data model relationships.

Page tabs

Element	Description
Entity	The list of individual entity/currency/data model relationships
Nodes	List of entity node/data model relationships divided into contributor and consolidator

Definition result: Process Data Model page

Admin

Application database > Processes tile > select process > > Process setup > (Process Data Model section)

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Process Data Model section)

Purpose of the page

This page shows the list of accounts, control groups, categories, forms and the Analytical Workspace measures included in/excluded from the Process Data Model. Each tab shows details of the associations

between those elements of the data model and the steps of the Business Workflow.

Page tabs

Element	Description
Account	Shows the list of accounts included in/excluded from the Process Data Model, the steps on which they enter data, the editability rights of the accounts on gross and IC amount categories and journal categories and the association of the accounts with IC cockpits. The system uses the contents of this table to determine the editability and importability of an account and the possibility of running data processing on the accounts.
Control groups	Shows the list of control groups included in/excluded from the business workflow steps of the process.
Form - Control groups	Shows the list of control groups originating from forms included in the Process Data Model.
Category	Shows the list of categories that can be edited by the accounts included in the Process Data Model. If the Process Data Model is by account and no filter has been set on categories, the system displays all categories included in the table which have the “To run” option active.
Form	Shows the list of forms containing accounts included in the Process Data Model and the steps on which those accounts collect data.
Analytical Workspace measures	Shows the list of Analytical Workspace measures included in the Process Data Model.

Data entry and submission

Contents

This section covers the following topics:

Data entry and processing in processes ... 421
Data entry modes ... 421
Data entry and submission rules ... 422
Define data entry and submission rules ... 422
Data Entry & Submission Rules section ... 423
Amount & Intercompany rules page ... 423
Journal rules and settings page ... 427
Categories for draft journals page ... 428
Submission rules page ... 428
Reasons for rejection page ... 430
Execution plan of jobs to run on submission and rejection page ... 430
Override Entity parameters on Original scenarios page ... 431

Data entry and processing in processes

Introduction

Data can be entered on process by the *contributor user* via the *contributor cockpit*. Then, once the data has been submitted, on CCH Tagetik it is possible to launch *data processing*, which will in turn be used in calculations and processing by the *consolidator* in the *consolidator cockpit*.

To prepare data entry for processes, the following rules must exist:

- *Data entry rules* which determine whether data can be entered in the contributor cockpit.
- *Data processing rules* which define the data processing to be run on the data.

These rules can be customised or left as they have been prepared for the whole environment.

Data entry configuration varies depending on the logic on which basis the financial statements are prepared. For more details, see "Data entry and submission rules" on the next page and "Introduction to data processing" on page 433.

Data entry modes

Introduction

There are the following data entry modes:

Data entry	Description
Via Excel	Data is entered using *data entry forms*, i.e. Excel spreadsheets that allow you to extract and view information from a CCH Tagetik application database and save data entered by the user. Using Excel allows you to take advantage of Excel's normal functionalities such as formulas and charts. For more details, see I form di data entry.
Via Web forms	Data is entered via an interface, i.e. a web form and data entry windows. Data is entered manually, allowing you to add to or edit the accounting values and journals already entered in the system.

Data entry	Description
ETL (Extraction Transformation and Loading)	Data is entered by running ETL routines, which facilitate the following operations: • extract data from external sources (Excel files, text files, data warehouses, ERP systems or CCH Tagetik itself) • process the extracted data, with aggregation or enrichment options • load data into the system. CCH Tagetik has functionalities for checking that the data entered are consistent with the data model and blocks the entry of data on scenarios that have already been closed, submitted data, etc. For more details, see Extraction, Transformation & Loading.
Copy tools	Data is entered using functions that allow you to automatically compile an entity's data based on data associated with the same entity on different scenarios/periods or with other entities on the same scenario/period or a different scenario/period.
Algebraic operations	The entry of data is the result of operations performed by the system on the data of a selected scenario or data belonging to several scenarios.

Based on the project's needs, data can be entered using one or several methods.

Data entry and submission rules

What are process rules

fIn CCH Tagetik , *data entry and submission* logics and rules define the data processing and submission methods to be used in processes. These logics and rules are managed in the Data entry & submission tile and in the Data Entry Rules section of the process setup. In particular, the rules defined in the Data entry & submission tile are applied by default to all processes in CCH Tagetik , while those defined in the Data Entry Rules section of the process setup allow you to fine tune the global settings with specific overrides for the process.

Function

The data entry and submission settings define the following data entry, processing and submission rules:

- Gross and IC amounts
- Journals (entity and consolidation journals)
- Submission
- (only in the Data Entry Rules section of the process setup). Override entity parameters on the original scenarios/periods

Define data entry and submission rules

Database applicativo > tile Processi > seleziona processo > > Definizione Processo > Sezione Regole data entry e certificazione

Database applicativo > Pannello Navigazione > Processi & Workflow > Processo > seleziona processo > > Definizione Processo > Sezione Regole data entry e certificazione

Procedure

This procedure allows you to set overrides on rules for intercompany amounts (**IC amounts**), journals (**Journals**), submission (**Submission**) and for the overriding of entity parameters regarding scenarios (**Override parameters on original scenarios**).

1. Next to the desired item, click ✎.
2. Modify the rule as desired and click **Save**.

Data Entry & Submission Rules section

Admin

Application database > Processes tile > select process > ⋮ > Process setup

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition

Introduction

This section allows you to customise the process's data entry and submission rules and to override entity parameters on predefined scenarios associated with the process. In particular, it gives access to configuration pages showing the sets of generic rules for data entry and submission defined in CCH Tagetik (see "Amount & Intercompany rules page" below), and provides the possibility to change them by overriding them only in relation to the specific process.

Elements in the section

Element	Description
Gross amounts & IC	Customises the generic rules for gross and intercompany amounts.
Journals	Customises the generic rules for journals and the specific rules for draft journals.
Submission	Customises the generic rules for submission and the jobs to be run on submission/rejection.
Override Entity parameters on original scenarios	Customises the generic parameters of the entity on the original scenarios.

Actions in this section

Element	Description
✎	Allows you to override the rule and shows its status: • ✎: default rules are currently applied. • ✎: the default rules have already been modified.
Restore default values	Allows you to restore the default values

Amount & Intercompany rules page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > Data Entry & Submission Rules section) > Gross & IC amounts > ✎

Application database > Processes & Workflows > Processes > select process > ⋮ > Process definition > (Data Entry & Submission Rules section) > Gross amounts & IC > ✎

Purpose of the page

This page allows you to define specific overrides for the process on the default data entry rules for gross amounts and intercompany entries.

Page sections

Section	Description
Dimensions	Defines the custom dimensions enabled on amounts, intercompany entries and reconciliation accounts.
Intercompany	Defines additional fields for the intercompany declaration and specific behaviour for the intercompany declaration methods.
Transaction currency	Defines the management mode for the currency in which the transaction was carried out, regardless of the entity that executed it.
Editability	Defines the editability options for data originating from specific sources.
Break back	Defines, for the managed dimensions, the requirements for entering data from forms at the level of hierarchy nodes.
IC Cockpit Advanced rules	Defines advanced requirements for the attribution of intercompany data to the relevant steps.
Spreading	Defines the way in which the spreading functionality is used.
Countervalue calculation	Defines the FX rate used in the countervalue calculation data processing, and the data on which it is run.

Fields in the Dimensions section

Element	Description
<Custom dimension 1>	Enables the use of custom dimension 1.
<Custom dimension 2>	Enables the use of custom dimension 2.
<Custom Dimension n>	Enables the use of custom dimension <n>.

Fields in the Intercompany section

Element	Description
Enable additional fields on IC	They both enable the collection of additional data on intercompany amounts. • **Only information for document** • **Information for document and amount type** (see Amount & Intercompany rules page)
Copy intercompany to gross data	Enables the automatic calculation of the gross data based on the saving of intercompany data from forms. The plausibility diagnostics will then diagnose the intercompany data and the minorities share together.
Allows intercompany declarations towards same Declaring entity	Allows you to enter intercompany declarations towards the same declaring entity. The declaring entity is therefore the same as the counterparty entity.
Defines CTP <Custom dimension 2> with default Entity element	When entering intercompany data, the CTP custom dimension 2. is automatically defined as the default element of custom dimension 2 associated with the entity.

Fields in the Transaction currency section

Element	Description
Managed on gross amount	Allows you to manage the transaction currency and the amount in the currency of the transaction on gross amounts.
Managed on ic amount	Allows you to manage the transaction currency and the amount in foreign currency of the transaction on intercompany amounts.
Keep transaction currency on consolidated gross amount	Keeps details of the transaction currency on consolidated amounts.
Use detail window to input gross & IC data on transaction currency	Where the transaction currency is being managed, the entry of data (gross and intercompany amounts) within the form must obligatorily be done from the relative management window and not directly from the cell.

Fields in the Editability section

Element	Description
Edit data with ETL origin	Enables the data collected by ETL procedures to be edited manually.
Save data in form incrementally	Enables changes to data in forms to be tracked. When saving a form, the system creates a database row for every change made to the individual amount. If disabled, the system sums up all the values entered, and only shows the total.

Fields in the Break back section

Element	Description
Dimensions	Allows you to select the dimensions on which to run the break back.
Editability check	With break back active, it allows you to select the mode in which the editability check is performed if break back is active. • **Automatic**: if the data is saved on a reference element, the system performs the check on the reference element itself, otherwise it does not perform any editability check. If no reference element is specified, the editability check is not performed. • **On reference lowest element**: the system always performs the editability check on the reference element. If no reference element is specified, the data will not be editable.
Always write on reference element	With break back active and enabled, for data entry from forms it automatically attributes the changes made on the node to the same node's reference entity. When disabled, changes made on a node are distributed among the lowest level elements related to the same node in proportion to the values already present.

Fields in the IC Cockpit Advanced rules section.

Element	Description
Attribute only the reconciliation account category to the cockpit step	For account/category pairs present in an intercompany matching cockpit in which the category is the one used on the IC cockpit for reconciliation accounts, this defines the step in which the cockpit currently is as the intercompany step. For the others, including those belonging to the cockpit, it also behaves as if it were not active. If not active: • for account/category pairs belonging to the intercompany matching cockpit, the intercompany step is the same as the cockpit step • for account/category pairs not belonging to any cockpit, where there are overrides the system considers the intercompany step to be the overridden step; if there are no overrides it uses the step generated by the intersection between the highest among the steps of the gross amount and the lowest step on which there is a cockpit.
Simplified calculation of the ic step	Defines the gross step, or any overridden step, as the intercompany step for accounts/categories not associated with the cockpit.
Allow the insertion of reconciliation accounts with IC data entry in progress	Allows you to insert reconciliation accounts even if one of the two entities has not yet finished inserting intercompany entries. Reconciliation accounts can therefore always be added, regardless of the status of the entities of the relationship on the IC matching cockpit.
Mandatory notes when inserting reconciliation accounts	Makes it mandatory to insert notes when loading reconciliation accounts.

Fields in the Spreading section

Element	Description
Intercompany Spreading display method	Tells the system how to display data related to intercompany entries in the data entry step when the intercompany spreading functionality is in use. • **All data**: the system displays the original declarations and write-off and reallocation entries. • **Original data**: the system only displays the original declarations. • **Only Reallocations**: the system only displays data related to reallocations on the counterparty custom dimension 2.
Granularity: <Custom dimension 2>	Defines the level of detail for the intercompany spreading functionality.
Reference Hierarchy <Custom dimension 2>	Only with **<Custom dimension 2> Granularity** = **By node**. Defines the custom dimension 2 hierarchy to be used.
Reference level for the <Custom dimension 2> hierarchy	Only with **<Custom dimension 2> Granularity** = **By node**. Selects the level of the custom dimension 2 hierarchy to be used to select the available nodes.
Display override type CTP <Custom dimension 2>	Enables **CTP custom dimension 2 override** information in data entry management windows for intercompany entries and entity journals.
Preferential allocation to <Custom dimension 1>	Enables the management of intercompany declarations belonging to the entity/counterparty/custom dimension 1 relationships subject to balancing as a stand-alone set of declarations.
Balancing threshold on <Custom dimension 1>	Defines the minimum threshold at which an entity/counterparty/custom dimension 1 is considered to be balanced.
Delete error signs	Enables algorithm for reallocating intercompany declarations on custom dimension 2 to the custom dimension 2 of the counterparty with the opposite sign. For details of the algorithm, see Algoritmo Elimina effetti dichiarazioni IC con segni anomali.

Fields in the Countervalue calculation section

Element	Description
Conversion	Defines the type of FX rate to be used in countervalue calculation data processing to convert the accounts with conversion type set to P&L FX rate. The system converts to one of the following rates: • **Average FX rate** • **Period average FX rate** • **Final FX rate** • **Override Period average FX rate on P&L or on Variations accounts**: the system converts all P&L accounts, Other Variations accounts and Variations accounts (regardless of their Nature), ignoring the account's conversion type. Conversion takes place at the period's average FX rate and the period length is the one indicated on the scenario being processed. For more details on FX rates, see "Currencies: basic concepts" on page 150.
Run also on Balance Sheet, Other Stock & Guard. and Comm. accounts	Includes balance sheet accounts and normal and detailed other stock accounts in the countervalue calculation data processing.

Buttons and/or links on the page

Element	Description
Restore default values	Restores the default configurations defined on the **Amount & Intercompany rules** page (see Amount & Intercompany rules page).

Journal rules and settings page

Admin

Operational database > Processes > select process > > Process setup > (Data Entry & Submission Rules section) > Journals >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Entry & Submission Rules section) > Journals >

Purpose of the page

This page allows you to set specific overrides for the process on the rules for entity journals and consolidation journals.

Page sections

Element	Description
Dimensions	Defines the custom dimensions enabled on the journals.
Transaction currency	Defines the management mode for the currency in which the transaction was carried out, regardless of the entity that executed it.
Others	Defines specific behaviour for relationships, editability, journal compilation and elimination logics.

Fields in the Transaction currency section

Element	Description
Entity journals	Allows you to manage the transaction currency and the amount in the currency of the transaction on the rows of an entity journal.
Consolidation journals	Allows you to manage the transaction currency and the amount in the currency of the transaction on the rows of a consolidation journal.

Fields in the Other section

Element	Description
Relationship type	Defines the declaring entity/counterparty relationships. • **Entity**: declaring entity/counterparty relationships are entity-entity. • **Entity - custom dimension 2**. Declaring entity/counterparty relationships are entity-custom dimension 2. The system generates the automatic intercompany elimination journals based on the relationship between the entity and the custom dimension 2. • **Entity - synthetic custom dimension 2**: The headers are generated on the basis of the relationships between entities and their COD_DEST1 and COD_DEST2 fields are empty. When the entity or relationship (CTP eliminations, minorities, NER, etc.) are used to generate the journal number, custom dimension 2 is not inserted. The journal rows are generated on the basis of the entity/custom dimension 2 relationship and their COD_DEST2_CTP_SEGMENT field is defined. The system considers the Entity - custom dimension 2 relationship type both during the row creation step and during the reading/processing of the data of the same rows.
Enable financial investments editability on journals	Overrides the editability of financial investment accounts on journals.
Manages CTP entity and CTP Products regardless of the header relationship	In the consolidation journal compilation step, this allows you to set entities or custom dimensions other than those defined in the journal header as the counterparty entity and/or counterparty custom dimension 2 on the rows (regardless of the value in the **Many to many relationship** field).

Element	Description
Exclude intercompany capacity check on the single row of the journal	Only if the row account manages intercompany declarations and the **IC capacity check** in the process validation rules is **Check =**. When saving a journal entry row, makes the counterparty entity valuation optional.
Eliminate once the accounts present in more than one elimination logics	When the account is associated with several elimination logics, it deletes the account with the highest code in the elimination logic.

Buttons and/or links on the page

The buttons vary depending on the path taken to reach the page.

Element	Description
Categories for draft journals	Opens a page to define categories for draft journals, see "Categories for draft journals page" below.
Restore default values	Restores the default configurations defined for this page.

Categories for draft journals page

Admin

Application database > Processes tile > select process > > Process setup > (Data Entry & Submission Rules section) > Journals > > Categories for Draft Journals

Application database > Processes & Workflows > Process > select process > > Process definition (Data Entry & Submission Rules section) > > Journals > > Categories for Draft Journals

Purpose of the page

This page allows you to define overrides on categories that are valid for the process's draft journals.

Page fields

Element	Description
Category	Selects a category.

Submission rules page

Admin

Application database > Processes tile > select process > > Process setup > (Data Entry & Submission Rules section) > Submit >

Application database > Navigation Panel > Processes & Workflows > Process > > Process definition > (Data Entry & Submission Rules section) > Submit >

Purpose of the page

This page allows you to set overrides on the following default elements:

- data submission rules
- data rejection rules
- rules for locking data editability in the rejection step
- default overrides for the incorrect data submission

Page sections

Section	Description
Submission	Defines specific behaviours for the data processing run on submission and for how to purge submission tables, run diagnostics on steps prior to the submitted step, and store diagnostic data offline.
Lock data	Defines the method that the system uses to make data that contributed to the submission of an entity or journal no longer editable, even if rejected. The origin is no longer manual and users must input new data to leave a trace of the corrections made.
Reject	Defines specific behaviour for performing rejections.
Override submission	Defines submission overrides.

Fields in the Submission section

Element	Description
Run data processing on submission	Allows you to run all data processing enabled on the process automatically in the submission launch step (with the exception of cash flow planning and closing).
Exclude Other calculation logics from the data processing on submission	Only with **Run data processing on submission** selected. Allows you to exclude all **Other** logics enabled on the process automatically in the submission launch step.
Also includes the stored procedure	Only with **Run data processing on submission** selected. Allows you to choose a previously defined procedure (stored procedure) to be run automatically in the submission launch step, together with the other data processing. The system only uses procedures with names starting with the suffix CPM_SP_. Moreover, to allow the stored procedure to read the submission parameters, they must be named as follows: • PROCESS: data collection process • ENTITY_HIERARCHY: organisational hierarchy process • STEP_LIST: list of steps • ORIGINAL_SCENARIO_PERIOD_LIST: list of original scenarios/periods • ENTITY_LIST: list of entities • CONTRIBUTOR_NODE_LIST: list of contributor nodes • CONSOLIDATOR_NODE_LIST: list of consolidator nodes
Exclude Purge submission tables	Makes the carry forward of submission information, in the entity deployment step, following changes to the process's organisational hierarchy, optional.
Diagnose all the steps before the submitted step	Allows you to check for errors in both submitted and non-submitted previous steps when running the submission of a step.
Store diagnostic result on submission	Allows you to save a PDF report with the diagnostic results when the submission of an entity is complete.

Fields in the Lock data section

Element	Description
With manual origin on the Journals submission	Places the SUB_ prefix before the original origin on the journal rows with manual origin that have been submitted.
Calculation on journal submission	Places the SUB_ prefix before the original origin on the journal rows that have been calculated by the calculated accounts data processing and submitted.
With manual origin on the submission of the entities/nodes	Places the SUB_ prefix before the original origin on the (gross and intercompany) amount rows and manual journal when submitting the entity.
With calculation origin on the submission of the entities/nodes	Places the SUB_ prefix before the original origin on the (gross and intercompany) amount rows and journals generated by the calculated accounts data processing when submitting the entity.

Fields in the Rejection section

Element	Description
Mandatory notes	Makes it mandatory to insert explanatory notes to be able to run the rejection of an entity's data.
Mandatory reason	Makes it mandatory to select a rejection reason to be able to run the rejection of an entity's data.
User enabled for Journals rejection	Defines the user responsible for the rejection of an entity's journals.

Fields in the Override submission section

Element	Description
By user	Allows authorised users to submit the step even if there are blocking errors. See User lists.
With authorization of blocking errors	Allows you to submit the step, even if there are blocking diagnostic errors, provided they have been authorised. The **Enable detected errors trace** option must be enabled in the validation rules (see "Diagnostic Rules page" on page 450). Errors with **Blocking** severity that have been authorised will be renamed **Authorized blocking**.

Buttons and/or links on the page

Element	Description
Execution plan of jobs to run on submission and rejection	Opens a page to create and relate jobs to steps of the process. See "Execution plan of jobs to run on submission and rejection page" below.

Reasons for rejection page

Admin

Application database > Data Entry & Submission rules > Reasons for rejection

Application database > Navigation panel > Processes and Workflow > Reasons for rejection

Purpose of the page

This page allows you to define the reasons to be reported in the processing logs in case of rejection of the data.

Page fields

Element	Description
Code	Defines the detail type code
Description	Defines the description of the reason for the rejection.

Execution plan of jobs to run on submission and rejection page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Entry & Submission Rules section) > Submit > ✎

Application database > Navigation Panel > Processes & Workflows > Process > ⋮ > Process definition > (Data Entry & Submission Rules section) > Submit > ✎

Purpose of the page

This page allows you to match a step or steps of the process (in case of multi-step process) with jobs to be launched at the time of certification or decertification of that step.

> **Example**
>
> It is possible to provide for the launch of an ETL that populates the project registry once a new project is approved.

***Note**: Any jobs are run only when companies are certified or decertified.*

Page fields

Element	Description
Step	Defines the process step with which to associate the job.
Submit Job	Defines the job to be run on submission of the step.
Reject Job	Defines the job to be run on rejection of the step.

IMPORTANT in the case of simultaneous certification of multiple phases, the job is executed only if it has been matched to the last phase being certified. In the case of matching to a previous phase, certification stops on the phase to which the job was matched, signaling that the job cannot be executed.

Override Entity parameters on Original scenarios page

Admin

Application database > Processes tile > select process > > Process setup > Data Entry & Submission Rules > (Override Entity parameters on Original scenarios) >

Application database > Processes & Workflows > Process > select process > > Process definition > Data Entry & Submission Rules > (Override Entity parameters on Original scenarios) >

Purpose of the page

This page allows you to define overrides on entity attributes for the process's original scenarios/periods.

Page fields

Element	Description
Original scenario/periods	Allows you to select scenarios/periods on which to run the overrides for the entity. • **All**: selects all original scenarios/periods associated with the entity. • **Selected**: activates the ... button, which opens a page to select the desired original scenario/period.
Entity	Selects an entity or node from the process's non-time dependent hierarchies.
Only CTP	Allows you to use entities that are in the group but not consolidated, or entities owned by the group with negligible percentages, as the counterparty in intercompany declarations only. Choosing **From Entity elements table** tells the system to use the settings present on the entity dimension table.
Only consolidator data	Tells the system whether to enter, for the entity, data on consolidator categories only. Choosing **From Entity elements table** tells the system to use the settings present in the entity dimension table.

Element	Description
Deconsolidation method	Defines the entity's deconsolidation method. • **From Entity elements table**: the system uses the settings present on the entity dimension. • **Not to deconsolidate**: never runs deconsolidation. • **Deconsolidate only initial balances**: for entities on which no FS data has been entered on the original scenario (except for carry forward), on the original scenario the system only deletes data originating from carry forward operations from the previous year. Used when the deconsolidated entity merges with another entity in the group or is sold at the start of the current year. • **Deconsolidate from previous period**: data not yet consolidated is attributed to the subsequent consolidation period. Used when the entity is sold or merged during the year soon after the last interim consolidation. • **Deconsolidate from current period**: data deconsolidation follows the standard process. Used when an entity for which significant data has been entered on the original scenario is sold or merged during the year.
Generate CTP eliminations	Defines the CTP elimination mode according to the entity's consolidation settings. Its purpose is to prevent the system from generating journals in the original scenarios that will never be used and to prevent matching for entities that may not declare their own ICs. • **From Entity elements table** the system uses the settings present on the entity dimension. • **All elimination logics**: for line-by-line or proportional entities included in the intercompany matching cockpit and are not only counterparty. • **Exclude IC elimination logic**: for entities not included in the intercompany matching cockpit, the system generates counterparty eliminations only for elimination logics with **Equity evaluation method** not set to **Delete**. See Equity evaluation data processing. • **Never**: the system does not generate counterparty eliminations and the entity is not included in the intercompany cockpit. This is the default value in the event that the entity is counterparty only or is at cost.
IC matching	Defines the requirements for running intercompany matching based on the entity's consolidation method. • **Mandatory**: failure to run matching blocks submission. • **Optional**: intercompany matching is not mandatory for the entity, but is run when the counterparty entity has made intercompany declarations. • **Automatic**: the system runs intercompany matching automatically when at least one of the two entities has this option activated. Relationships do not appear on the IC cockpit. Failure to run matching does not block submission. They are automatically balanced in the IC elimination journals regardless of the balancing threshold value.

Buttons and/or links on the page

Element	Description
Definition result	Opens a page to view the list of overrides set up on entity attributes for specific original scenarios/periods.
	Opens a window to select an original scenario/period on which to create overrides on entity attributes.

Data Processing: introduction

Contents

This section covers the following topics:

Introduction to data processing 433
The process's data processing execution order 434
Define the Data Processing 436
Data Processing section 438
ETL execution plan page 439

Introduction to data processing

What is data processing

In CCH Tagetik, there is data processing that can be run transversally within the application. Specific executions for the process can be obtained by changing the requirements and rules of the data processing associated with the process itself.

In the process settings, data processing defines the data processing to be carried out on the process, the requirements and any override rules. The starting point is the data processing that has already been set CCH Tagetik.

Function

Setting data processing allows you to define the data processing to be associated with the process and change the relative requirements. In particular, it gives access to the configuration page for the requirements related to the following data processing:

- ETL
- Carry Forward
- Calculation Logics
- Validations
- Balancing
- Consolidated
- Allocations & Closing
- Cash flow planning
- Taxes
- Other data processing
- Send mail
- Taxes
- Other
- Snapshot

These pages show the general rules for the data processing operations defined in CCH Tagetik, and allow you to change them ("override them"), for the specific process only.

Data processing in CCH Tagetik

For an overall view of the existing data processing in CCH Tagetik and the run order, see Process's data processing execution order in the dedicated section.

The process's data processing execution order

Execution order details

CCH Tagetik runs the process's data processing in a pre-established non-modifiable order.
The details of the data processing execution order, divided into themes, are specified below.

***IMPORTANT**: the following list of data processing is applicable to the In Memory consolidation engine.*

Theme	Data processing order
ETL	• ETL routine for tables • ETL routine for values • ETL job for tables • ETL job for values
Carry Forward	• Preliminary data processing on Original scenarios-Carry forward • Preliminary data processing on Original scenarios-Reverse journal • Preliminary data processing on Consolidation scenarios-Carry forward
Validation and Automatic balancing	• Validation • Entity data processing-Balancing • Group consolidation data processing-Balancing • Consolidation area final data processing-Balancing
Calculation logics	• Calculation logics • Monthly splitting

Theme	Data processing order
Consolidated	• Preliminary data processing on Original scenarios-Carry forward • Preliminary data processing on Original scenarios - Override Carry-forward • Preliminary data processing on Original scenarios-Deconsolidation on Initial balances • Preliminary data processing on original scenarios-Incoming Mergers on Initial balances • Preliminary data processing on Original scenarios-Reverse journal • Preliminary data processing on Original scenarios-Copy previous period • Preliminary data processing on Original scenarios-Deconsolidation from previous period • Preliminary data processing on Original scenarios-Incoming Mergers from previous period • Entity data processing-Incoming mergers • Entity data processing-Dividends distribution calculation • Entity data processing-Financial investments loading • Entity data processing-Bank loans depreciation calculation plan • Entity data processing-Financial investments loading • Entity data processing-countervalue calculation • Entity data processing-Accounts reclassification • Entity data processing-Depreciation • Entity data processing-Direct tax calculation • Entity data processing-IC Spreading • Entity data processing-Standard Formulas • Entity data processing - Rules Engine Designer • Entity data processing-Monthly splitting • Entity data processing-Equity Pick-up • Entity data processing-Look Through • Entity data processing-deferred taxes • Entity data processing-balancing • Entity data processing-Net equity account reclassification • Entity data processing-Formulas • Entity data processing-Financial investments reclassification • Entity data processing-Deconsolidation • Group consolidation data processing-Import Financial Investment data into Ownership Structure Register • Group consolidation data processing-Incoming mergers • Group consolidation data processing-Ctp eliminations • Group consolidation data processing-Eliminate Financial investments from Ownership structure register • Group consolidation data processing-Intragroup assets assignment • Group consolidation data processing-Depreciation • Group consolidation data processing-Standard Formulas • Group consolidation data processing-Rules Engine Designer • Group consolidation data processing-Deferred taxes • Group consolidation data processing-Balancing • Group consolidation data processing-Formulas • Group consolidation data processing-Financial investments reclassification • Group consolidation data processing-Deconsolidation • Preliminary data processing on Consolidation scenarios-Carry forward • Preliminary data processing on Consolidation scenarios- Override carry-forward

Theme	Data processing order
Area consolidation data processings-Contribution	• Consolidation area basic data processing-Copy / Proportional calculation • Consolidation area basic data processing- Override proportional calculation • Consolidation area basic data processing - Deconsolidation - Proportional • Consolidation area basic data processing-Rules Engine Designer - Proportional • Consolidation area basic data processing - Final override - Proportional • Consolidation area basic data processing-Specific FX rate loading • Consolidation area basic data processing-Conversion • Consolidation area basic data processing-Conversion override • Consolidation area basic data processing-Rules Engine Designer - Converted • Consolidation area basic data processing-Minority • Consolidation area basic data processing- Minorities override • Consolidation area basic data processing - Deconsolidation - Converted • Consolidation area basic data processing - Final override - Converted • Consolidation area final data processing-Copy / Equity evaluation • Consolidation area basic data processing- Equity evaluation override • Consolidation area final data processing-IFRS5 reclassification • Consolidation area final data processing-Eqiuty pick-up • Consolidation area final data processing-Look Through • Consolidation area final data processing-Accounts Reclassification • Consolidation area final data processing-Balancing • Consolidation area final data processing-Net equity reclassification (NER) • Consolidation area final data processing-Riules Engine Designer - Consolidable • Consolidation area final data processing-Formulas • Area consolidation basic data processing - Final override - Consolidable
Allocations & Closing	Closing
Cash flow planning	• Cash flow planning - Copy Actual data • Cash flow planning - Create objects, derived events and entries • Cash flow planning - Indirect taxes and Cash Pooling • Cash Flow Planning - Indirect taxes calculation • Cash flow planning - Tax balance payment • Cash flow planning - Tax down payment • Cash flow planning - Dividends calculation • Cash flow planning - Financial simulation • Cash flow planning - Revaluation and Devaluation • Cash flow planning - Direct taxes calculation • Preliminary data processing on Original scenarios - Carry forward • Entity data processing - Standard formulas
Other	• Entity data processing-Dividends distribution calculation • Entity data processing-Bank loans depreciation calculation plan • Entity data processing-Financial investments loading • Entity data processing-Direct tax calculation • Entity data processing-deferred taxes • Group consolidation data processing-Deferred taxes
Send mail	Send mail rule

Define the Data Processing

Enable the running of data processing

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition (Data Processing Section)

1. To enable changes to settings, click **Locked**.
2. Select the data processing to be run for the selected process.
3. Click **Save**.

Customise the calculation logics to be applied

Application database > Processes tile > select process > > Process setup (Data Processing Section)

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition (Data Processing Section)

1. To enable changes to settings, click **Locked**.
2. Click **Calculation logics** and select the type of logics to apply.
3. To customise the logics, in the **Calculation logics** row, click : the **Calculation logics** page will open.
4. Set the fields as desired and click **Save**.

Change the validation rules for a specific process

Application database > Processes tile > select process > > Process setup (Data Processing Section)

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition (Data Processing Section)

1. To enable changes to settings, click **Locked**.
2. Select **Validations** and **Diagnostic**.
3. In the **Diagnostic** row, click .
4. If necessary, click **Restore default values** to restore the generic rules for the process you are working on.
5. Set the fields as desired and click **Save**.

***Note**: for page details, see Data processing > Diagnostic > Define rules > Validation.*

Change the configuration of the entities of a consolidation area

Application database > Processes tile > select process > > Process setup > (Data Processing section) Consolidation >

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup (Data Processing Section) > Consolidation >

In **Consolidation area**, in the row of the desired consolidation area, click : the **Consolidation area** page will open.

Generate a report on consolidation area variations

Application database > Processes > select process > > Process setup (Data Processing Section) > Consolidation >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing section) > Consolidation >

1. Click **Change in consolidation scope**.
2. In **Consolidation scenario/period**, select the desired consolidation scenario/period.
3. Select the scenario or scenario/period with which you want to compare and the data view mode.
4. Click **Run**: the report will be generated.

Change Equity pick-up requirements

Application database > Processes > select process > > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing section) > Consolidation > Advanced Consolidation > Equity pick-up >

1. Select the desired scenario/period.
2. Do the following:

If you are using this method...	Then...
progressive	In **Pick-up period length**, enter the value equal to the number of the selected period.
periodic	1. In **Pick-up period length**, enter the number of periods between the selected period and the previous one, i.e. the last period processed with equity pick-up data processing. 2. In **Pick-up account period length**, enter a value equal to the selected period.

3. To view the pick-up percentages of the selected scenario/period, click **Percentages pick-up**.
4. To override the pick-up percentages, click **Override percentages pick-up**.
5. Click **Save**.

Data Processing section

Application database > Processes tile > select process > ⋮ > Process setup

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition

Introduction

This section allows you to select the data processing to be associated with the process and to change the relative requirements. In particular, it gives access to configuration pages showing the sets of general requirements for the data processing defined in CCH Tagetik, but only changes them in relation to the specific process.

Elements in the section

Element	Description
ETL	Enables the execution of ETL routines or jobs.
Carry Forward	Enables the execution of data processing to carry forward initial balances of BS accounts using variations that bring the previous year's final balances forward in time.
Calculation Logics	Enables account calculation logics on entities, groups or consolidation areas.
Validations	Enables validation with diagnostic check or plausibility diagnostics within the process.
Balancing	Enables balancing on diagnostics for control groups and on the intercompany capacity check.
Consolidated	Enables consolidation data processing.
Allocations & Closing	Enables allocation/closing data processing.
Cash Flow Planning	Enables Cash Flow Planning data processing.
Taxes	Enables tax-related data processing.
Other	Enables data processing that is not part of the main modules: monthly splitting based on the account, countervalue calculation, depreciation of assets and dividends.
Send mail	Enables the automatic sending of e-mails following pre-determined events (e.g. submission/rejection of an element, completion of a task or an approaching deadline).
Snapshots	Enables the creation of snapshot scenarios.

Actions in this section

Element	Description
Unlocked	Allows you to select and potentially override data processing.
Locked	Prevents data processing from being selected or overridden.
	Allows you to enter the requirements of the relative data processing. • : incomplete or incorrect requirements • : edited requirements
	Allows you to override the rules of the relative data processing and shows their status: • : default rules are currently applied. • : default rules have already been edited by the current user or another user with the necessary rights.
	Deploys what has been set in the section.

ETL execution plan page

Admin

Application database > Processes > select process > ⋮ > Process setup > (Data Processing Section) ETC >

Application database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup > (Data Processing section) ETL >

Purpose of the page

This page allows you to create ETL data processing execution plans. For each plan, it allows you to enable ETL routines or jobs within the specific process. These ETL routines or jobs can then be run from the processes cockpit or from a task in a task workflow for the selected entities.

The following options are available:

- **Routines on metadata**
- **Routines on amounts**
- **Jobs on metadata**
- **Jobs on amounts**

Buttons and/or links on the page

The specific actions for the page are specified below.

Element	Description
Definition result	Shows the results of the set data processing plan, i.e. the entities and relative ETL routines or jobs that can be run from the processes cockpit or from a workflow task.

Attributes tab data

Element	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Entity	Code of the entity or node of entities within the available non-time dependent hierarchies to be included or excluded from the data processing
Jobs	Jobs to be run
ETL domain	ETL domain with all the settings to define ETL routines
Routine	ETL routine belonging to the domain to be run

Data Processing: carry forward

Contents

This section covers the following topics:

Carry forward data processing 440
Carry forward rules page 440
Carry forward rules - Accounts definition page 441
Override Carry Forward Categories page 442
Normal and Detail accounts/Categories to exclude page 442
Exclude Scenarios from Carry forward page 443

Carry forward data processing

Introduction

Carry forward is used to initialise the initial balances of balance sheet accounts with the final balance from the previous year. This data processing is necessary both for consolidation data processing and for Cash Flow Planning data processing, and whenever balance sheet variations are used in general.

Types of carry forward data processing

Carry forward data processing can be limited by the following options.

Type	Description
On entities and group	The carry forward data processing is run on gross amounts and IC amounts and on pre-consolidation journals on the original scenarios (entity) and consolidation journals on the original scenario (group).
On consolidation area	The carry forward data processing is run on Adjustment Amounts by entity and consolidation adjustments (on consolidation scenario).
Reverse journal	Only journal cancellation operations are performed. See Reverse journal data processing.

Carry forward rules page

Admin

Operational database > Processes > select process > > Process setup > (Data Processing Section) Carry forward >

Operational database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing Section) Carry forward >

Purpose of the page

This page allows you to override the rules that control carry forward operations for a specific process.

Buttons and/or links on the page

Element	Description
Generic rules	
Input and ouput accounts	Opens the "Carry forward rules - Accounts definition page" below to select the accounts to be carried forward onto different accounts, duly managing the balancing of variations.
Override carry forward categories	Opens the "Override Carry Forward Categories page" on the next page to change the data category during the carry forward.
Normal and Detail accounts/Categories to exclude	Opens the "Normal and Detail accounts/Categories to exclude page" on the next page to exclude certain data from the carry forward.
Specific rules	
Exclude Scenarios from Carry forward	Opens the "Exclude Scenarios from Carry forward page" on page 443 to select the scenarios/period on which not to run the carry forward.

Options on page

Option	Description
Run carry forward on	Allows you to select the accounts on which to run the carry forward. **Process accounts**: all parent accounts of variation type control groups belonging to the process of the selected scenario/period and all journals indicated in the header as to be carried forward are carried forward. **All accounts**: all accounts on which data is present are carried forward, even if not included in the process.
Journals rows aggregation type	Allows you to define the type of aggregation for rows of journals on the carry forward scenario. Or not to aggregate the rows to keep the same detail as the previous year's scenario. **Aggregate according to dimensions**: aggregates the scenario rows by dimension. **Aggregate according to dimensions and notes**: aggregates the scenario rows by dimension and notes. **Don't aggregate**: maintain the same details as the previous year's scenario. ***Note**: aggregating the rows allows you to read the data more easily and reduce the number of records in the database.*
Allow preliminary data processings on data that belongs to submitted steps.	Allows you to carry forward variations and journals onto data belonging to submitted steps, normally excluded from the carry forward.
Carry forward journals: include attachments	Allows you to carry forward onto a journal any attachments to the journal itself, in the previous year.

Carry forward rules - Accounts definition page

Admin

Operational database > Processes > select process > > Process setup > (Data Processing Section) Carry forward > > Input and output accounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > > Process setup > (Data Processing Section) Carry forward > > Input and output accounts

Purpose of the page

As a rule, the carry forward operation carries forward all balance sheet accounts belonging to a variation type control group, as parent accounts, and the initial balance is written on these. This page allows you to select the accounts to be carried forward onto other accounts, duly managing the balancing of variations. This is done by indicating the account from which to perform the download and the account onto which to perform the upload.

Buttons and/or links on the page

The specific actions for the page are specified below.

Element	Description
Definition result	Shows the result of the defined carry forwards.

Attributes tab data

Element	Description
Action	Allows you to include or exclude the carry forward accounts according to the defined characteristics.
Normal input account	Normal account on which the data to restore is present
Category	Category on which to filter the normal input account
Write off account: normal	Normal account from which to read data for the carrying forward of journals. This is normally the normal input account.
Writeoff account: variation	Variation of the account to be carried forward, from which to read the data
Loading account: normal	Normal account on which to write data for the carrying forward of journals
Loading account: variation	Target account variation on which to write the data

Override Carry Forward Categories page

Admin

Operational database > Processes > select process > > Process setup > (Data Processing Section) Carry forward > > Override carry forward categories

Operational database > Navigation Panel > Processes & Workflow > Process > select process > > Process setup > (Data Processing Section) Carry forward > > Override carry forward categories

Purpose of the page

This page allows you to change the category of data when accounts are carried forward.

Attributes tab data

Element	Description
Category	Previous scenario category
Category for Carry forward	Category to be applied with the carry forward

Normal and Detail accounts/Categories to exclude page

Admin

Operational database > Processes > select process > > Process setup > (Data Processing Section) Carry forward > > Normal and Detail accounts/Categories to exclude

Operational database > Navigation Panel > Processes & Workflow > Process > select process > > Process setup > (Data Processing Section) Carry forward > > Normal and Detail accounts/Categories to exclude

Purpose of the page

This page allows you to exclude some data from the carry forward depending on the account, filtered by the category or control group to which it belongs.

Attributes tab data

Element	Description
Action	Allows you to exclude or include the selected data from/in the carry forward.
Account	
Account	Account to be excluded from or included in the carry forward. If not specified, all accounts are entered ($ALL).
Control group	Control group to be excluded from or included in the carry forward. If not specified, all control groups are entered ($ALL).
Category	Any category to be excluded from or included in carry forward.

Exclude Scenarios from Carry forward page

Admin

Operational database > Processes > select process > > Process setup > (Data Processing Section) Carry forward > > Exclude Scenarios from Carry forward

Operational database > Navigation Panel > Processes & Workflow > Process > select process > > Process setup > (Data Processing Section) Carry forward > > Exclude Scenarios from Carry forward

Purpose of the page

This page allows you to select specific scenarios/periods associated with the process on which the carry forward will not be run.

Options on page

Element	Description
Lock carry forwards	Does not run the carry forward for the specific scenario/period.

Data Processing: calculation logics

Contents

This section covers the following topics:

Calculation Logics 444
Calculation logic requirements page 444
Calculation logics graph page 445
Override calculation logics page 446
Define overridden amounts page 446

Calculation Logics

Available types of logic

Calculation logics can be **Basic** or **Other**.

Field	Description
Base	Logics first run by the system during consolidation data processing, see Consolidated financial statements in the Consolidation section. All calculation logics generated automatically by the system are **Basic**. They can be enabled on entities or on the group. For example, there are logics related to result accounts (see Result accounts in the Data Model section), control groups (see Control groups in the Data Model section) and plug accounts and logics that calculate the gross figure of an account based on its intercompany amount.
Other	Logics run in the second instance by the system during consolidation data processing. In turn, these can be enabled on entities, on the group, or on the consolidation area.

Logics created by users can be either**Basic** or **Other**.

Managing loops between calculation logics.

When defining the calculation logics to be used, the system checks whether there are any loops between calculation logics. If there are, it prevents all calculation logics from being run.

However, it is possible to intervene on apparent loops, i.e. those generated by Multidimensional Script calculation logics, whose output accounts are also input accounts for other logics. To do this, it is necessary to override the sequence of the calculation logic when defining it (*Setup & Admin > Data Processing > Calculation logics > Elements*). (*Navigation panel > Data Processing > Calculation logics > List*). In fact, the system runs the logics of every sequence sequentially and only analyses possible dependencies between logics with the same sequence number. For more details on the application of calculation logics to data processing, see Data Processing Overview in the Data Processing section.

> ***Note**: to preserve performance when running calculation logics, only override the sequence in the event of apparent loops.*

Calculation logic requirements page

Admin

Application database > Processes tile > select process > > Process setup > (Data Processing section) Calculation logics >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing section) Calculation logics >

Purpose of the page

This page allows you to set the calculation logics to be used.

Page fields

Field	Description
Calculation logics node	Node of the group of calculation logics to be used.
Net result	Set of results accounts. The ones applied to the process can be overridden.
Display calculation logic graph	Opens a page displaying the execution order of the calculation logics in deployed view.

Calculation logics graph page

Admin

Application database > Processes tile > select process > > Process setup > (Data Processing section) Calculation logics > > Display calculation logic graph

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing section) Calculation logics > > Display calculation logic graph

Purpose of the page

This page shows the dependencies of the various calculation logics and the execution order of those logics.

Page tabs

Field	Description
Original scenarios, Basic	Shows the **Basic** calculation logics for the original scenarios and their execution order.
Original scenarios, Others	Shows the **Other** calculation logics for the original scenarios and their execution order.
Consolidation Scenario, Basic and Others	Shows the **Basic** and **Other** calculation logics for consolidation scenarios and their execution order.

Columns in the tables

Field	Description
Sequence	Order in which the account calculation logics will be processed
Calculation Logic	Calculation logic to be processed
Dependencies	Calculation logics the output of which determines the value of the logic specified in **Calculation logics**
Level	Level of the logic on the graph. 0: logic with no dependencies ≥1: logic to be processed after a lower-level logic, on whose output it is dependent

Override calculation logics page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Calculation logics >

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) Calculation logics >

Purpose of the page

This page allows you to open pages to define the desired overrides and see the results of override definition operations.

Buttons and/or links on the page

Element	Description
Define overridden amounts	Allows you to define the desired overrides.
Definition result	Shows the results of override definition operations.

Define overridden amounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Calculation logics > > Define overridden amounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup > (Data Processing section) Calculation logics > > Define overridden amounts

Purpose of the page

This page allows you to define overrides for calculation logics.

Attributes tab

Field	Description
Calculation Logics	Code of the logic to be overridden
Run on Original Scenarios	Allows you to define when to run the calculation logic on the original scenarios. • **From Table**: according to what is set in the calculation rules table • **No**: never • **Automatic and Submission**: when executing the (Basic and Other) formulas and submitting the data collection process • **Automatic**: when executing the (Basic and Other) formulas • **On demand**: the logic can only be run manually, via data entry forms, or by being linked to an ETL routine.

Field	Description
Logic Type	Type of logic to be overridden • **From Table**: according to what is set in the calculation logics table • **Other**: Other logic type • **Basic**: Basic logic type
Run on Consolidation Scenarios	Allows you to define when to run the calculation logic on the consolidation scenarios. • **From Table**: according to what is set in the calculation logics table • **No**: never • **Automatic**: when executing the (Basic and Other) formulas • **On demand**: the logic can only be run manually, via data entry forms, or by being linked to an ETL routine

Data Processing: validation and balancing

Contents

This section covers the following topics:

Validations 448
Balancing data processing 450
Diagnostic Rules page 450
Plausibility diagnostic page 452

Validations

Validations option function

The **Validations** option enables, in the process, the validation of data using a standard diagnostic check or plausibility diagnostics. It also allows you to change the validation rules for the specific process.

Characteristics of the diagnostics

Diagnostics, defined using the validation rules, allow you to run diagnostics for entities and, from the relative data entry activities, diagnostics for amounts and journals. Allows you to define the checks to be carried out with the diagnostics and therefore, indirectly, to define how automatic data balancing and data submission works.

Stored procedure and diagnostic parameters

Allows you to run, together with the other data processing to be launched with the diagnostics, a stored procedure that responds to CCH Tagetik's minimum requirements. This only makes sense if you have chosen to run data processing on diagnostics.

The name of the stored procedures that can be run directly from CCH Tagetik must start with **CPM_SP_**, regardless of any schemes. In order for the stored procedures to be able to read the diagnostic parameters, the files of those parameters must be named as follows, based on their content:

Name	File contents
PROCESS	Data collection process
ENTITY_HIERARCHY	The process's organisational hierarchy
STEP_LIST	List of steps
ORIGINAL_SCENARIO_PERIOD_LIST	List of original scenarios/periods
ENTITY_LIST	List of entities
CONTRIBUTOR_NODE_LIST	List of contributor nodes
CONSOLIDATOR_NODE_LIST	List of consolidator nodes

Stored procedures are only run on the original scenarios/periods.

Validation of annual results

The validation of the annual results consists of running diagnostics on the control group **$BS_<result account code>**. The result account code to be used is the one defined in the process rules for the process subject to diagnostics.

Tracking of errors found by diagnostics

Errors found by diagnostics are only saved and added/updated on every submission or running of the diagnostic tool if the “update log” option has been activated.

Errors can only be logged for the original scenarios. It is always possible to justify errors and attach explanatory/justifying files, for scenarios that are not stored offline, by accessing the log management window. The authorisation of an error can only be added/removed if the **With authorization of blocking errors** option has been selected from among the submission override modes in the submission rules.

Reporting failed journal submission

CCH Tagetik allows you to configure the severity (*severity*) with which the failure to submit a journal is reported. To do this, journal submission needs to have been enabled. Journal submission is active on the entities/steps on which a task workflow was entered for the submission of journals in the Processes tile > Process setup > Mapping.

Submission error severity (Severity)

Severity levels are used by the submission to assess the correctness of an entity’s data. If diagnostics return results with blocking severity, then the submission of an entity’s data cannot be completed.

Characteristics of plausibility diagnostics

This type of diagnostics compares the amounts of one scenario/period with the amounts of the same collection of data from another different scenario/period. It therefore shows the results of the comparison via various error messages or warning messages.

Functioning of plausibility diagnostics

When a definition row is added or edited in plausibility diagnostics, a deployment data process is automatically run when saving, allowing you to obtain all the entities deriving from this synthetic definition. In particular, the following will happen:

- For entities: if a node of entities is selected, it is deployed in the nodes’ individual entities.

  ***Note**: the system only considers those which belong to the process.*

- For contributor nodes: nodes are deployed based on the selected node type.

  ***Note**: the system only considers nodes that are significant in the data collection process, or nodes in the entity hierarchy which, in the data collection process, are **To Approve** or **To Submit**.*

- For consolidator nodes: nodes are deployed based on the selected node type.

  ***Note**: the system only considers nodes that are significant in the consolidation process, or nodes in the entity hierarchy which, in the consolidation process, are **To consolidate**.*

Where to define the generic validation rules and the plausibility check logics

The generic validation rules and plausibility check logics are defined in the following sections, respectively:

Setup & Admin > Data processing > Diagnostic > Validation

Navigation panel > Data Processing > Diagnostic > Validation

See Specific validation rules in the Diagnostics section.

Setup & Admin > Data processing > Diagnostic > Plausibility check logics

Navigation panel > Data Processing > Diagnostic > Plausibility check logics

See Plausibility check logics page in the Diagnostics section.

Balancing data processing

Background

CCH Tagetik checks for the presence of any unbalanced amounts related to diagnostics for control groups and the IC capacity check.

Function

During the data processing step, balancing data processing makes it possible to automatically balance any unbalanced amounts below a certain threshold.

Types of balancing data processing

The available types of balancing data processing are detailed below:

- on entities: balancing data processing is run on data related to entities on the original scenarios, i.e. on amounts and entity journals, both contributor and consolidator.
- on the group: the balancing data processing includes the group consolidation data present on the original scenarios, i.e. the consolidation journals on the original scenarios.
- on the consolidation area: the balancing data processing is run on all data present on the consolidation scenarios, i.e. the consolidation journals on the consolidation scenarios, considering the consolidable amount type.

For more details on balancing functions, see in the Data Processing section.

Diagnostic Rules page

Admin

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Validations > Diagnostic >

Application database > Navigation Panel > Processes & Workflows > Processes > select process > ⋮ > Process definition > (Data Processing section) Validations > Diagnostic >

Purpose of the page

This page allows you to customise the generic validation rules with a diagnostic check on the process and to define overrides.

Generic rules

Field	Description
Validation	
Run data processing on diagnostic	Allows you to run all data processing enabled for the process (with the exception of cash flow planning and closing) when running the diagnostics.
Also include the stored procedure	Only with **Run data processing on diagnostic** selected. Include a stored procedure that meets CCH Tagetik's minimum requirements in the data processing to be run when diagnostics is launched.
Diagnostic result: Show forms on row	Allows you to view, for every error on the control group or account in the diagnostic result window, the forms on which the control group accounts can be edited or the account itself. ***Note**: (non-transactional) standard forms can be edited using Excel or online.*
Categories for which to show the result	Allows you to manage the categories for which to display the validation of the year's result, even in the absence of unbalanced amounts. ***Note**: for control group **$BS_<result account code>**, diagnostics will show the result, even if balanced, on the categories defined here.*
Restore default values	Only if the rules have already been customised, restores the rules' default values.

Field	Description
Result log	
Enable detected errors trace	Allows you to log errors returned by diagnostics so you can consult, justify and authorise them. ***Note**: only logged errors are saved and can therefore be consulted over time.*
Don't propagate the authorized blocking error information	This check looks for the presence of blocking errors authorised by users responsible for the entity on which diagnostics were run. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the presence of blocking and authorised errors is reported with blocking severity. • **Non-blocking**: the check is performed and the presence of blocking and authorised errors is marked as being of non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed. The prerequisites for running this check are: • the traceability of errors found by diagnostics is enabled • the submission mechanism is enabled in the submission rules via authorisation of blocking errors
Journals submission validation	
Diagnose Manual journals submission	The check verifies that the manual journals belonging to the entity on which the diagnostics were run have been submitted. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the non-submitted manual journals are reported with blocking severity. • **Non-blocking**: the check is performed and the non-submitted manual journals are marked as being of non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed.
Diagnose Automatic journals submission	The check verifies that the automatic journals belonging to the entity on which the diagnostics were run have been submitted. • **Do not run**: the check is not performed. • **Blocking**: the check is performed and the non-submitted automatic journals are reported with blocking severity. • **Non-blocking**: the check is performed and the non-submitted automatic journals are marked as being of non-blocking severity. • **Only Diagnostic**: the check is only performed if explicitly requested by running customisable diagnostics. When diagnostics are run automatically from the cockpit/other data processing, the check is not performed.
Intercompany Cockpit	
IC cockpit: Balancing threshold of Compensation reconciliation accounts	Value provisionally set in the generic validation rules. The threshold, if set, is applied during the matching of relationships present in the IC Cockpit. Specifically, it will be used by the check that verifies the balancing of amounts linked to variation/detail types used on several matching rules.

Specific rules

Field	Description
Equality control groups	Opens a page to define specific rules to be applied to balancing control groups with equality operators.
“Other” control group	Opens a page to define specific rules to be applied to “other” control groups, or balancing control groups with non-equality equality operators. The rules are not applied to control groups with coherence operators.
Accounts	Opens a page to define specific control rules for accounts.

For further details on validation rules for diagnostic data, seeSpecific Rules

Plausibility diagnostic page

Application database > Processes tile > select process > > Process setup > (Data Processing section) Validations > Plausibility diagnostic >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition > (Data Processing section) Validations > Plausibility diagnostic >

Purpose of the page

This page allows you to set the plausibility diagnostics requirements, or to associate a group of plausibility logics to be run during diagnostics with every entity, contributor node and consolidator node. Also allows you to override the security level to be applied to them.

Page tabs

Field	Description
Elements	Defines the plausibility logics to be applied to entities.
Contributor nodes	Defines the plausibility logics to be applied to contributor nodes.
Consolidator nodes	Defines the plausibility logics to be applied to consolidator nodes.

Attributes tab

Field	Description
Action	• **Include** (default) • **Exclude**
Original scenarios/periods	Original scenarios/periods of the process to which to apply the overrides: • **Selected** (default) • **All**
Entity	Only for the **Elements** tab. Allows you to select an entity belonging to the process or a node of entities within the available non-time dependent entity hierarchies.
Contributor node	Only for the **Contributor nodes** tab. Allows you to select an entity node from the organisational hierarchy linked to the process.
Consolidator node	Only for the **Consolidator nodes** tab. Allows you to select an entity node from the organisational hierarchy linked to the process.
Node type	Only for the **Contributor nodes** and **Consolidator nodes** tab. Indicates the way in which to deploy the selected node.
Plausibility rules node	Valorizzare solo per azione "Includi". Allows you to select the node of logics for the plausibility checks to be applied.
Severity type	Valorizzare solo per azione "Includi". • **Do not run**: combinations with this option selected are not validated. It is used, for example, to exclude entities/nodes from a node to be deployed. • **Automatic**: severity is recovered from the definition of the plausibility logic, where established through specific comparison thresholds.
Definition result	Only appears after a definition has been saved. Shows the result of deployment of the definition, with a list of available combinations.

Data Processing: consolidation

Contents

This section covers the following topics:

Consolidation Data Processing 453
Basic consolidation data processing 454
Consolidation Requirements page 457
Define Consolidation Area page 458
Periods page 460
Define consolidation area by period page 460
Define relationships between entities and classifiers for the period page 461
Import financial investment data into ownership structure register 462
Page Import financial investments data on Ownership Structure Register Requirements 466
IC Elimination and Matching Requirements page 467
Generate proportional amount page 468
Generate converted amount page 468
Override FX rate difference accounts page 470
Customise account conversion type page 470
Generate consolidable and Equity evaluation page 471
Minorities page 472
Mergers page 473
Account reclassification and NER Requirements page 473
Rules Engine Designer requirements page 474
Advanced consolidation data processing 475
Advanced consolidation page 476
Financial investments reclassification page 477
Equity pick-up Requirements page 477
Pick-up percentages page 478
Override Pick-up percentages page 479
Pick-up rules page 479
IC Spreading Requirements page 480
Override IFRS5 rules page 481
Consolidation procedures 481

Consolidation Data Processing

Definition of event scenarios for Ownership structure register

An event scenario is a fictitious original scenario used by the system to manage events to date, or events linked to a specific date. In this case, events which from a specific date bring about a change to the ownership structure. Generally, an event scenario is used to manage the actual events; one for each data process of the budget. Thus, hypothetical future events can also be included.

Management of reference FX rate scenario

These settings are defined in the**Define Consolidation Area** page. See Define Consolidation Area page.

To convert the data, CCH Tagetik uses the FX rates of the original scenario linked to the processed consolidation scenario. However, the system can be overridden so it reads the FX rates from another original scenario. This is useful if, with the same original scenario, you want to generate two consolidation scenarios where the only difference between them is the FX rate applied. For example, to convert an actual amount also at the budget FX rate.

Management of prefixes for financial investment reclassification journals

These settings are defined in the **Define Consolidation Area** page. See Define Consolidation Area page.

This prefix is used by the system to compose the journal numbers of the journals generated by the financial investment reclassification. It is essential to enter the same prefix as the source consolidation scenario/period from which the carry forward is being carried out for the following reasons:

- To allow the system to generate the same journal header every year.
- To determine the consolidation scenarios, from among those associated with a given original scenario, to be processed for the reclassification of financial investments.

Composition of consolidation data processing

Consolidation data processing is divided into basic consolidation operations (see Details on basic consolidation data processing) and advanced consolidation operations (see Details on advanced consolidation data processing).

Account reclassification and NER execution plans

The execution plans allow you to relate a node of reclassification logics, from among those present, to a scenario/period/entity triplet. The logic can be related to an Entity or node of Entities for the chosen scenario/period.

Plug account

The plug account is used as a balancing account for the entity in the consolidation journals. It allows you to obtain a balanced BS for the entity. The general rule for the plug account is defined in the *Setup and Admin > Data Processing tile > Advanced Consolidation > Plug account rules page Navigation panel > Data Processing > Advanced Consolidation > Plug account rules page* (see Intercompany matching and elimination logics: advanced settings, in the Consolidation section). Some of the generic rule settings can then be overridden when defining a specific process (see Advanced consolidation page).

Equity pick-up

Equity pick-up (EPU) data processing is an accounting technique that allows you to revalue the value of an owner entity's financial investments based on the current value of the corresponding portion of the owned companies' net equity.

Basic consolidation data processing

Application database > Processes tile > select process > > Process s etup (Data Processing Section) > Consolidation > Basic Consolidation

Application database > Navigation Panel > Processes & Workflows > Processes > select process > > Process definition > (Data Processing section) Consolidation> Basic consolidation

Data processing types

Field	Description
Eliminations and IC matching	Specific elimination and IC matching logics. See "Eliminations and IC matching" on the facing page.
Load financial investments on amounts	Automatically feeds the financial investment accounts into the FS amounts based on the data present in the ownership structure register. The data processing acts on the original scenarios.
Import financial investment data into ownership structure register	Imports financial investment data into the ownership structure register from IC amount and Entity journal data. See Import financial investment data into ownership structure register.

Field	Description
Generate contribution	Series of data processing that allows you to obtain the consolidated data based on the original data of companies included in the consolidation. See "Generate contribution" below.
Merger	Operations through which two or more companies in the same group are combined into a single entity, either pre-existing the merger or created from scratch. See "Merger" on the next page.
Deconsolidation	Operations through which entities cease to contribute to the consolidation due to mergers or demergers affecting all or the majority of the entity, closures or bankruptcies. See "Deconsolidation" on the next page.
Account reclassification and N.E.R.	The purpose of account reclassification is to reclassify the values of amounts and adjustments from one account to another. The purpose of net equity reclassification (NER) is to reclassify net equity entries that must not be shown in the financial statements for the consolidated companies, in special accounts. They are performed consecutively, reclassification first and then NER. See "Account reclassification and N.E.R." on page 457.
Rules engine designer	Data processing which, based on input data, allows you to generate journals while applying rules and conditions.

Eliminations and IC matching

Field	Description
Financial investments from ownership structure register	Elimination only logics for financial investments. These are read from the ownership structure register. For example, they concern the elimination of the financial investment against the owned entity's net equity and the elimination of the financial investment's revaluation/devaluation.
by counterparty	Elimination and matching logics that take their input data from intercompany declarations. For example, these concern costs/revenue, receivables/payables, and dividends.

Generate contribution

Field	Description
Generate proportional	Generates the proportional amount type on the consolidation scenario (see Elaborazione di proporzionalizzazione).
Generate converted	Calculates the converted amount type by multiplying the values of the proportional amount type by the FX rate for the consolidation currency. The proportional amount is in local currency for amounts and entity journals and in any currency for consolidation journals.
Generate consolidable and Equity evaluation	Copies data from the converted amount onto the consolidable amount type. The data is copied as is for consolidated entities using the integrated or proportional method, or by generating the equity evaluation journals for consolidated entities using the equity method (see Equitizzazione).
Minorities	Reclassifies the portion of net equity and of the year's result for minorities in specific FS entries. Specific journals are generated for amounts and entity journals; for consolidation journals, reporting is done in the context of the journal itself by generating new rows (see Il calcolo dei terzi).
Use FX rates from ownership structure register	The use FX rates on consolidation scenarios data processing generates overridden FX rates on the consolidation scenario based on the FX rates entered in the ownership structure register (see Elaborazione scarico cambi sugli scenari di consolidamento).

Merger

Field	Description
on initial balances	If the merged entity is deconsolidated as **from initial balances**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the initial balances of the incorporated entity. The data processing precedes the original scenario data processing
from previous period	If the merged entity is deconsolidated as per **from previous period** , the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data of the incorporated entity, taking account of the previous period's entries. The data processing precedes the original scenario data processing
on entities	If the merged entity is deconsolidated as per **from current period**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data carried forward and the new entries of the incorporated entity within the processing period. The data processing acts on the contributor categories and is included in the entity data processing.
on group	If the merged entity is deconsolidated as per **from current period**, the data processing defines the incorporating entity's **incoming merger** variation accounts with data of the merged entity. To do this, the data processing reads the data carried forward and the new entries of the incorporated entity within the processing period. The data processing acts on the consolidator categories.

Deconsolidation

Field	Description
on initial balances	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate only initial balances**. The data processing deconsolidates both the amounts and the journals restored on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account.
from previous period	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate from previous period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account.
on entities	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate current period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account. The data processing acts on the contributor categories.
on group	Deconsolidates that are defined on the process as to be consolidated with **Deconsolidation Type** = **Deconsolidate current period**. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account. The data processing acts on the consolidator categories.
on consolidation area	Deconsolidates entities that are defined on the consolidation scenario as to be deconsolidated. The data processing deconsolidates both the amounts and the journals present on those entities. Data is written off by defining the variation account identified as **exit area variations**. The normal account is written off, as well as the variation account.

Account reclassification and N.E.R.

Field	Description
on entities	By choosing the entities and periods based on the execution plan indicated on the process to be run, this creates entity journals through which to move the value from the accounts to be reclassified to the target accounts (as defined in the reclassification accounts logics). The data processing is performed on the contributor categories.
on consolidation area	By choosing the entities and periods based on the execution plan indicated on the process to be run, this creates entity journals through which to move the value from the accounts to be reclassified to the target accounts (as defined in the reclassification accounts logics).
Net equity reclassification on entities	Reclassifies, through consolidation journals, the net equity entries that should not be shown in the financial statements for the consolidated companies (e.g. **Other reserves**), in special accounts (**Undivided profits** or similar). Entities and periods are chosen based on the execution plan indicated on the process to be run. The data processing is performed on the contributor categories.
Net equity reclassification on consolidation area	Reclassifies, through consolidation journals, the net equity entries that should not be shown in the financial statements for the consolidated companies (e.g. **Other reserves**), in special accounts (**Undivided profits** or similar). Entities and periods are chosen based on the execution plan indicated on the process to be run. The data processing is run on the consolidable amount type.

Rules Engine Designer (In memory consolidation)

Field	Description
on entities	By selecting the Entities and the original scenarios defined in the execution plan on the process to be run, the system processes the IC Amounts and Entity journal rules contained in the nodes, reading the input combinations on the Input category, and then generates rows in the Output category and dimensions.
on group	By selecting the Entities and the periods according to the execution plan on the process to be run, the system processes the consolidation journal rules contained in the nodes, reading the input combinations on the Input category, and then generates rows on the Output category and dimensions.
on consolidation area	By selecting the entities and periods according to the execution plan on the process to be run, the data processing runs the rules contained in the nodes by reading the input combinations on the Input category, and generates a new consolidation journal on the Output category.

Consolidation Requirements page

Admin

Application database > Processes tile > select process > > Process setup > (Data Processing section) Consolidation >

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup (Data Processing Section) > Consolidation >

Purpose of the page

This page allows you to set the configuration of the consolidation requirements for the selected process.

Page fields

Field	Description
Consolidation engine	Only if required by the general configuration (seeConsolidation options, in the Consolidation section). Consolidation engine to be used. It can be in memory or database.
Event Scenario	Original scenario used to define the ownership structure.
Group events	
Ownership structure register	Opens a window to define group financial investment events. See Ownership Structure Register page, in the dedicated section.
Merger events	Opens the mergers window containing all the scenarios/periods, even those not belonging to the selected process.
Consolidation Areas	
Status	Status for all the consolidation scenarios/periods of the process. • : unlocked • : archived • : locked

Buttons and/or links on the page

Element	Description
Group events	
Ownership structure register	Opens the **Ownership structure register** page to define group financial investment events. See Ownership Structure Register page, in the dedicated section.
Merger events	Opens the **Mergers** page. Displays all the scenarios/periods, even those not belonging to the selected process.
Consolidation Areas	
Define Consolidation area	Opens the **Define Consolidation area** page to define the consolidation scope of the consolidation scenarios related to the selected process.
Copy elements to consolidate	Copies the definition of the elements to be consolidated from the consolidation scenario/period to the desired consolidation scenario/period. ***Note**: the definition can also be copied from a consolidation scenario/period not belonging to the process.*
Manage status	Opens the **Manage status** window to lock/unlock consolidation scenarios/periods that have not yet been archived. Note: Scenarios/periods stored offline are not displayed.
Change in consolidation scope	Opens the **Change consolidation scope report** window to generate a report on consolidation area changes. This report compares the consolidation criteria and entities of the two selected scenarios.
	Opens a page to define the elements to be consolidated.

Define Consolidation Area page

Admin

Application database > Processes tile > select process > > Process definition (Data Processing Section) Consolidation > > Define Consolidation Area

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition (Data Processing Section) Consolidation > > Define Consolidation Area

Purpose of the page

This page allows you to define the consolidation scope of the consolidation scenarios related to the selected process.

Buttons and/or links on the page

Field	Description
	Opens the **Copy Consolidation Area** window to access utilities.
Ownership structure register	Opens a page to manage the ownership structure.
	Opens the **Periods** page to configure the periods of the selected scenario when the page opens.

Attributes tab

Field	Description
Code	Unique identification code of the consolidation scenario. Mandatory field. ***Note**: if you want to create a consolidation scenario here, the generic rules for codes in CCH Tagetik are valid. See Create new codes in the General Procedures section.*
Description	Description of the consolidation scenario
Version description	Free description of the version to which the scenario relates. Only used by reporting.
Year	Year to which the scenario relates. Only used by reporting.
Active	Indicates whether or not the scenario must be shown in the selection list of scenarios present in different windows of the system. Does not affect the locking of data.
Consolidation settings	
Original scenario	Original scenario that feeds the consolidation scenario
Holding	The holding company in the consolidation
Currency	Currency in which the consolidation must be generated. This may be different from that of the holding company. In this case, the holding company will also be subject to the conversion process.
References	
Previous scenario	Scenario used: • by the system, to know where it should restore from • by reporting, to compare data present in the current scenario with data in the indicated previous scenario. It must be different from the current scenario code.
Following scenario	Following scenario with which to compare the data in the selected scenario. It must be different from the scenario code.
Reference scenario 1 **Reference scenario 2** **Reference scenario 3** **Reference scenario 4** **Reference scenario 5**	Scenario that can be used by reporting to specify, for example, the budget data or forecast data relating to actual data. ***Note**: an original scenario can only have an original scenario as its reference, previous or following scenario. A consolidation scenario can only have a consolidation scenario as its reference scenario.*
Exceptions	
Category filter	Filters the data categories with which to feed the consolidation scenario via a node of the categories grouping.
Account filter	Filters the data categories with which to feed the consolidation scenario via an account hierarchy node. If there is a filter account, the system only runs accounts that belong to the filter on the consolidation scenarios. This is also the case if it finds amounts defined on the original scenario. This functionality only appears in the in memory consolidation engine.
Ref. FX rate scenario	Forces the system to read the changes from an original scenario other than the one linked to the consolidation scenario being used.
Financial investments reclass. adj. prefix	Prefix to compose the journal numbers of the journals generated by the financial investment reclassification. To make sure the same header is generated each year, enter the same prefix of the source consolidation scenario/period. For the reclassification of financial investments, CCH Tagetik only processes consolidation scenarios from among those associated with a certain original scenario with this option active. This field overrides the same setting in the consolidated scenarios table.

Relationships tab

Field	Description
Nodes	Node to which to relate the chosen scenario in a group of scenarios. Displays the nodes of scenario groupings to which the consolidation scenarios selected on the current consolidation area can be related.

Periods page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) Consolidation > ⚙ > Define Consolidation Area > ⋮ > Periods

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition (Data Processing Section) Consolidation > ⚙ > Define Consolidation Area > ⋮ > Periods

Purpose of the page

This page allows you to configure one of the financial investment reclassification requirements.

Buttons and/or links on the page

Field	Description
⋮	**Consolidation Area Definition**: opens a page to define the consolidation area for the selected period. **Entity/classifier relationships**: opens a page to define the relationships between entities and classifiers for the selected period.

Attributes tab

Field	Description
Period	The period's unique identification code. Mandatory field. ***Note**: the generic rules for codes in CCH Tagetik are valid. See Create new codes in the General Procedures section.*
Description	Description of the period
Validity	Period start date and end date
Period length	Period length considered for conversion at the period's average FX rate and for the consolidation and deconsolidation data processing calculation.
Locked	The scenario/period pair cannot be changed.
Archived	The scenario/period data is archived.
Filled	The data for the scenario/period is displayed in the forms produced by the reporting system.

Define consolidation area by period page

Admin

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) Consolidation > ⚙ > Define Consolidation Area > ⋮ > Periods > ⋮ > Consolidation Area Definition

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition (Data Processing Section) Consolidation > ⚙ > Define Consolidation Area > ⋮ > Periods > ⋮ > Consolidation Area Definition

Purpose of the page

This page allows you to define a consolidation area, on a period, for which to specify requirements and percentages to be used in the consolidation data processing.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings.

Attributes tab

Field	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Entity	Allows you to select the entity or nodes of entities involved in consolidation.
Rules	
Consolidation method	Allows you to select the applied consolidation method. See The Consolidation scenario, in the Consolidation section.
Deconsolidation method	Allows you to select the applied deconsolidation method. See The Consolidation scenario, in the Consolidation section.
Include even if it isn't owned	Indicates whether the Entity must be included in the consolidation scope even if it is not owned by any Entity present in the scope. This setting is useful for management consolidation.
Period of the first Consolidation	Indicates the first consolidation period for entities that entered the consolidation scope during the year. Only for In Memory consolidation.
Percentage	
Consolidation % type - Proportional	To be defined if the entity's consolidation type is "Proportional". See The Consolidation scenario, in the Consolidation section.
Consolidation %	Only to be set if the "Consolidation method" is "Proportional" and the "Consolidation % type - Proportional" is overridden. Must be a value between 0 and 100, inclusive.
Override Equity ratio %	Allows you to enter the equity ratio percentage manually (e.g. when the legal ownership structure is not defined).
Equity ratio %	Overridden equity ratio percentage
Equity ratio % of the period	Equity ratio percentage of the period, if the periodic minorities calculation is active

Define relationships between entities and classifiers for the period page

Admin

Application database > Processes tile > select process > > Process setup (Data Processing Section) Consolidation > > Define Consolidation Area > > Periods > > Entity/Classifier Relationships

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition (Data Processing Section) Consolidation > > Define Consolidation Area > > Periods > > Entity/Classifier Relationships

Purpose of the page

This page allows you to define, on a period, the relationships between entities and classifiers to be used in the financial investment reclassification data processing.

Attributes tab

Field	Description
Entity	Entity for which to run reclassification data processing
Classifier	Classifier to be considered for reclassifying the financial investment
Element	Element of the selected reclassification variable

Import financial investment data into ownership structure register

Introduction

The import of financial investment data to ownership structure register allows the import of F.I data uploaded by the contributor users.

The following data can be imported:

- Financial investments
- Assignment price for the intra-group assignment events with sales model
- FX Rates

The data processing reads the F.I. variation accounts and the assignment price account from IC Amounts and from Entity journals, and writes data on the events involving the same Entities.

Setup

To run the data processing, it is necessary to:

- enable it in the data processing tree of the process
- in the requirements, define the scenarios / periods from which to read the contributor data by specifying the period length for the data import
- In the Ownership structure accounts Configuration, define the categories node for F.I. data and the F.I. variation accounts to be used.

Activation of data processing

The data processing can be enabled in the data processing tree of the process under the Basic Consolidation node **Import Financial Investment data into Ownership Structure Register**

Important *Data processing is only available in processes using the 'In Memory' consolidation engine*

Important *The "Import financial investment data into ownership structure register" data processing is an alternative to the "Load financial investments on amounts" data processing. If both are enabled, a blocking preliminary check is reported when launching the Entity, group and "Import Financial investment data" data processing from the ownership structure register window.*

Definition of imported data period length

In the requirements its is necessary to define the **Import data period length** on the scenarios / periods from which F.I data are to be read. The data processing can only be performed for periods with the "Import data period length" field different from "Do not run". The Import data period length is used to determine the previous period in the calculation of the periodic amount.

In the data processing tree, the requirements icon appears in red if all period scenarios of the process are set to "Do not run".

Locked or archived scenarios / periods are not editable.

Definition of import mode, category node and financial investment accounts

The Group Structure Accounts Configuration window can be accessed via Data processing > Basic Consolidation > IC matching and elimination logics.

In the **Financial investment data import** tab, you must specify the **import mode**:

- Do not use (functionality is deactivated)
- Financial Investments and Other Information (F.I. data and assignment price on existing ownership structure register events created by the consolidator beforehand are imported)
- Events, Financial investments and Other Information (as for the previous option, but with automatic creation of non-existing events).

In addition, the **Category Node** for F.I. data must be specified. This is the node that contains the Amount and Entity journals type categories from which to import the financial investment contributor data.

The import reads the variation accounts defined in the **Financial Investments** tab with the "Use on Ownership structure register" option enabled. If the Import Data option is 'Events, Financial investments values and Other info', it is necessary to configure the **event type for import.**

The **Import Exchange rates** option also allows the import of FX rates.

Data Processing

Running the data processing

Data processing is available from the following menus

- **Admin**, Ownership structure Register window accessible from the process, Consolidation requirements.
- **User**, Consolidator Cockpit. The Import of Financial Investments data into Ownership Structure Register is part of the group data processes.

Run from Ownership Structure Register window

To access the data processing, access the Ownership Structure Register via the Admin menu > Processes >Process definition > Data processing pane > Consolidation > Requirements > Group Events pane > Ownership structure register. The Wizards > Import Financial Investments Data menu key is only visible if the data processing has been enabled and the Category node for Financial Investments data has been specified.

It is necessary to select the original scenario / period to be processed. The scenarios / periods of the process having the 'Import data period length' field different from 'Do not run' (excluding inactive scenarios and locked or archived periods) are displayed.

The data processing:

- is run on all Entity nodes, node selection is not possible
- is run also on submitted nodes
- the Impacted functionality is not applied: it is not possible to run edited data only
- user rights on consolidation odes are not applied
- it is possible to select one scenario / period at a time

Important: *Data processing is only available in processes that use the 'in memory' consolidation engine. Data processing is not available in the Ownership structure register window accessible via the menu User > Events because the F.I. data import affects all Entity relationships, whereas this window applies user restrictions on Entities.*

Run from consolidator cockpit

The data processing is run in the group data processing before Incoming mergers.

The data processing:

- is run on the selected entity nodes
- is not run on submitted nodes
- the Impacted functionality can be applied: run edited data only
- user rights on consolidation odes are applied
- it is possible to select one scenario / period at a time

Important: *Data processing is only available in processes that use the 'In Memory' consolidation engine. Selected scenarios/periods that have the 'Import data period length' field set to 'Do not run' are not processed and are reported in the audit window as 'Not processable'.*

If the category node for Financial Investments data is undefined, the data processing is not run.

Import Financial investments data

Important *If the import mode is Financial investments values and Other info, events must be entered into the ownership structure register by the consolidator user before data processing is performed.*

The data processing handles the events of the event scenario linked to the selected process. The events with a date between the end date of the previous period and the end date of the selected period are taken into account:

- Event date > previous period end date. If, based on the Import data period length, the previous period does not exist, the 'event date >= start date of the selected period' filter is applied.
- Event date <= end date of the selected scenario/period

The system reads the financial investments data present on IC Amounts and on Entity journal by:

- Amounts and Entity journals categories belonging to the specified category node
- variation accounts present in the ownership structure register accounts Configuration with "Use on Ownership structure register" option enabled
- Origin other than 'Carry forward on Original scenarios': 'PREL_RESTORE'

The value to be imported into the ownership structure register is calculated as the difference between the amount of the selected scenario / period and the amounts of the previous period. The previous period is determined based on the Import data period length.

IC Amounts and Entity Journals data are linked to an event in the ownership structure register with the following characteristics:

- Owner Entity of the event = Entity of data
- Owned Entity of the event = Ctp Entity of data
- if the Relationship Type of the process is by Entity / Custom dimension 2 : Custom dimension 2 Owner Entity of the event = Custom dimension 2 of data
- Event Owner Entity currency = Currency of data (entity currency in the process)
- If the import mode is "Events, Financial investments values and Other info": Event Type=Event Type for data import associated with the data account in the ownership structure register account configuration

if data are linked to more than one event, the event with latest date is chosen. When the event dates are the same, the event with the greatest event number is chosen.

If the import mode is 'Events, Financial investments values and Other info' and the data row does not match any existing event, the data processing creates a new event by filling the fields as follows:

- The **event date** is the first day of the data processing period.
- The **event number** is the maximum existing event number, for the same Owner entity/Owned entity relationship , + 10.
- The **Ownership percentage** is the same as the previous event or 100% for non-existing Owner entity/Owned entity relationships.
- The **event type** is defined based on the link between financial investment accounts and event types.

Events are created based on the financial investment variation movement, so some corporate events may not be intercepted. For example, in the case of a share capital increase that is not subscribed by the holding company belonging to the group, the event to record the reduction of the direct percentage is not created.

Events entered or updated by the consolidator will not be overwritten by subsequent data processing

IC Amounts and Entity Journals data are loaded into the Financial Investments of the chosen event, keeping the account, the custom dimensions and the category present on contributor data.

The origin generated by the data processing is 'PROC_OSR_FI_LOADING'.

FX rates import

FX rates are imported if under Configuration > Import Financial Investment Data, the option 'Import FX rates' is activated.

The FX rates in the FX Rates table for the selected Scenario/Period are read.

FX rates relationship to output events

For each event for which there is F.I. data to be entered, FX rates are entered.

The average, period average or final FX rate is read out according to conversion type present in the account accounts list for the Financial investments account.

If the event has F.I. data to be entered for more than one account, the conversion type of the account with the largest code is considered.

FX rates are not imported for currencies that were manually entered in the event.

Import financial investment data into the Intra-group assignment events with management of the Custom dimension for third Entity

Three Entities are specified for the intra-group assignment events with sales model:

- owner Entity : seller
- owned Entity: sold Entity
- Buyer Entity

Two Entities exist on contributor data:

- declaring Entity : seller
- Counterparty : sold Entity

If you want the system to import the value of the financial investment to the ownership structure register by also matching the buyer Entity of the event with the contributor data, you can parametrize a custom dimension to contain the third Entity.

The custom dimension for the third Entity can be defined in the Settings > General tab, Financial Consolidation option:

- Intra-group financial investment assignment with sales model - Custom Dimension for the third Entity. It is possible to choose one of the active custom dimensions, excluding the custom dimension 2.

 The 'Import financial investment data' data processing uses the custom dimension for the third Entity only in processes with 'by Entity' relationship type (because for processes with 'by Entity / Custom dimension 2' relationship type, the information on the custom dimension 2 of the third Entity is missing).

If the Custom dimension of the third Entity is defined and the Relationship Type of the process is By Entity , the system imports:

- the Financial investment data by also matching the buyer Entity with the contributor
- the assignment price value

Import Financial investments data with third Entity

Contributor data that have the custom dimension for the third Entity different from the default value are linked to the intra-group assignment event with sales model having:

- Owner Entity of the event = Entity of data
- Owned Entity of the event = Ctp Entity of data
- if the Relationship Type of the process is by Entity / Custom dimension 2 : Custom dimension 2 Owner Entity of the event = Custom dimension 2 of data
- Event Owner Entity currency = Currency of data (entity currency in the process)
- Event buyer Entity = custom dimension for the third Entity of data

Contributor data that have the custom dimension for the third Entity equal to the default value are linked to a non-intra-group assignment event having:

- Owner Entity of the event = Entity of data
- Owned Entity of the event = Ctp Entity of data
- if the Relationship Type of the process is by Entity / Custom dimension 2 : Custom dimension 2 Owner Entity of the event = Custom dimension 2 of data
- Event Owner Entity currency = Currency of data (entity currency in the process)

Assignment price import

The system reads the Assignment Price from contributor data on:

- "F.I. : Sale value in the P&L account" accounts defined in the Accounts Configuration for Intra-group financial investment assignments (Sale models)

The contributor data of the assignment price is matched to the intra-group assignment event with sales model that has:

- Owner Entity of the event = Entity of data
- Owned Entity of the event = Ctp Entity of data
- if the Relationship Type of the process is by Entity / Custom dimension 2 : Custom dimension 2 Owner Entity of the event = Custom dimension 2 of data
- Event Owner Entity currency = Currency of data (entity currency in the process)
- Event buyer Entity = custom dimension for the third Entity of data
- "F.I. : Sale value in the P&L account" account of the Account model for Intra-group assignments specified on the event = Data account

IC Amounts and Entity Journals data are loaded into the Other Information tab of the chosen event, keeping the account, the custom dimensions and the source category.

Final checks

Upon completion of the data processing, the following checks are reported in the audit window:

- Contributor data to be loaded for which there is no event. The relationships Owner Entity / Owned Entity / Custom dimension 2 Owner Entity (in case of 'by Entity /Custom Dimension 2' relationship), Custom dimension for the third Entity (if defined) of the rows of F.I. data and Assignment price that have not been matched to any event are reported.
- Events without financial investments data. The events for which there is no automatic or manual F.I data row are reported.

Page Import financial investments data on Ownership Structure Register Requirements

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Basic Consolidation > Import financial investments data on Ownership structure register >

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Basic Consolidation > Import financial investments data on Ownership structure register >

Purpose of the page

This page allows you to customise the requirements of Import financial investments data on the Ownership structure register for the selected process.

Attributes tab

Field	Description
Scenario	Original scenario of the selected process
Period	Period of the selected process
Start date	Period start date
End date	Period end date

Field	Description
Period length	Period length defined on original scenario/period. **1** indicates a monthly duration, **12** indicates an annual duration, etc.
Length of import data period	The processing of import financial investments data on the Ownership structure register is periodic. Thus, it is crucial to indicate the period length for import on scenarios/periods of the process. The default value is 'Do not run' In the data processing tree, the Requirements icon will appear in red if all the process scenarios/periods have the value 'Do not run'. The length of the import data period must be entered for the scenarios/periods from which you want to read the contributor data of the financial investments to import on the Ownership structure register. The data processing can be run only for periods with a 'import data period length' field different from 'Do not run'. The length of the import data period is used to determine the previous period in calculating the periodic amount. To calculate the periodic value, enter the number of periods between the selected period and the previous period in which the import financial investments data is being run. Locked or archived scenarios/periods cannot be edited.

IC Elimination and Matching Requirements page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Basic Consolidation > IC eliminations and matching >

Operational database > Processes & Workflow > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Basic Consolidation > IC eliminations and matching >

Purpose of the page

This page allows you to customise the configuration of intercompany elimination and matching requirements.

Page fields

In **Requirements**:

Field	Description
IC elimination logics	Node of the group of IC elimination logics to be associated with the process.
IC elimination logics - Definition result	Opens a page with the elimination logics of the selected node.

In **IC cockpits**:

Field	Description
Define IC cockpits	Opens a page to define the IC cockpits.
Add IC cockpit	Allows you to relate a IC matching cockpit to the step of the process. ***Note**: only cockpits already defined by the administrator user can be related (Setup & Admin > Data Processing Tile > Basic Consolidation > IC matching and elimination logics > IC cockpits).*
Logiche di riconciliazione IC - Risultato definizione	Apre la pagina con le logiche di riconciliazione IC del nodo selezionato nella definizione del cruscotto IC.
Categorie - Risultato definizione	Apre la pagina con le categorie selezionate nella definizione del cruscotto IC e, per ogni categoria, l'indicazione delle logiche di riconciliazione IC a cui appartiene.

Generate proportional amount page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate proportional amount >

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate proportional amount >

Purpose of the page

This page allows you to override some elements of the data processing that generates proportional type data on the consolidation scenario.

Page fields

Field	Description
Periodic calculation	If enabled, the system calculates the progressive proportional figure for the current period as the sum of the following figures: • the progressive proportional figure from the previous period and • the periodic original figure multiplied by the period proportional percentage. To identify the previous period the system considers the period length set on the period of the consolidation scenario. It is used to manage the proportional percentage change compared with the previous period and the entities that entered the consolidation area during the year.
Counterparty account for BS and P&L result alignment	The difference between the proportional P&L profit account calculated on a periodic basis and the proportional Balance Sheet profit account, calculated on a progressive basis, is allocated to the reserve account defined herein. The percentage variation account defined in the variation control group is also adjusted at the same time.

Generate converted amount page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount >

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount >

Purpose of the page

This page allows you to override the conversion data processing in the modes and accounts that you are using.

Page fields

In **Generic rules**:

Field	Description
Conversion at historical FX rate	Tells the system if any FS entries, typically the net equity accounts, must be converted with the historical FX rate method.
P&L conversion method for the Consolidation	Strategy for currency conversion in the context of contribution data processing.
FX rate difference accounts	Allows you to override accounts that the conversion data processing must use to allocate the FX rate difference, namely the FX rate difference accounts (Credit/Debit) and the Intercompany FX rate difference accounts (Credit/Debit) for the balance sheet and P&L. See "FX rate difference accounts" below.
Advanced	Allows you to manage FX rates in particular cases. See "Advanced" below.

In **Specific rules**:

Field	Description
Customize account conversion type	Opens a page to specify, for each individual account, the conversion type and the reference account, if the conversion type so requires. Customise account conversion type page.

For more details, see Conversion rules page in the Consolidation section.

FX rate difference accounts

Field	Description
Override FX rate difference accounts	Opens a page to override the credit and debit FX rate difference account for each individual account. See Override FX Rate Difference Accounts page.

Advanced

Field	Description
Overridden Var. - Det. type for the FX rate difference on the year's net result	To highlight the FX rate effect deriving from the previous year's profit, an ad-hoc variation can be specified, on which the system will allocate the FX rate difference. The same account defined for the balance sheet FX rate difference will be used, but on a different variation/detail type.
FX rates loading mode	Tells the *Use FX rates from group structure* data processing the entities on which it must download the FX rates entered in the ownership structure register • Amounts and Entity journals • Financial investments elimination journal/Net equity • Amounts, Entity journals and Financial investments elimination/Net equity
Alternative FX rates to Initial balance FX rate when the Initial balance variation is missing	For variations to be converted at the FX rate of the initial balance, the system calculates the rate to be applied by calculating the ratio of the converted amounts to proportional amounts of the initial balance variation. If there is no variation, it is necessary to specify the alternative conversion strategy, which may consist of using the Previous final FX rate or the Previous average FX rate.
Anticipate Intercompany FX rate difference on Original Scenario	
Calculate	Anticipates the calculation of the IC FX rate differences on the original scenario to allow the minorities calculation to take place. ***Note**: this option only applies to processes that use the standard consolidation engine (Databases). The In Memory consolidation engine does not need these settings since the conversion precedes the minorities calculation.*
Reverse journal type	Defines the behaviour for the elimination journals for the anticipation of IC FX rate differences. • **As IC elimination logic**: the standard IC elimination logics are followed. • **Set BS and Variations accounts to 0 and Write off P&L impact (IC)**: the variations will also be set to 0.

Override FX rate difference accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount > ✎ > Override FX rate difference accounts

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount > ✎ > Override FX rate difference accounts

Purpose of the page

This page allows you to override, for every desired account, the accounts that the conversion data processing should use to allocate any FX rate difference.

Attributes tab

Field	Description
Action	Allows you to include or exclude the account that is selected by conversion operations.
FX rate difference type	FX rate difference type to which to apply the override
Account	Account for which to override the FX rate difference account
Category	Category for which to override the FX rate difference account
IC elimination logic	IC elimination logic for which to override the FX rate difference account
FX rate difference account: debit	Account on which to write the FX rate difference as a debit amount
FX rate difference account: credit	Account on which to write the FX rate difference as a credit amount

Customise account conversion type page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount > ✎ > Customise account conversion type

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate converted amount > ✎ > Customise account conversion type

Purpose of the page

This page allows you to customise the conversion type and, if the conversion type requires, the reference account, for every desired account.

Attributes tab

Field	Description
Account	Account on which to override the conversion
Conversion	FX rate type to apply to the account
Reference account for Initial balance/Year-to-date average FX rate	Only with **Initial balance FX rates** or **Year-to-date average FX rate** selected. Account used to define the conversion coefficient.

Generate consolidable and Equity evaluation page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate consolidable and Equity evaluation >

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Generate consolidable and Equity valuation >

Purpose of the page

This page allows you to customise data processing that generates the consolidable amount. The procedure for defining the consolidable amount type works in two different ways, depending on the consolidation type of the entities involved:

- If the entities involved are consolidated on a line-by-line or proportional basis, then the data is simply copied from the converted amount type to the consolidable amount type (disregarding the carry forward).
- If the entities involved (or even just one of them, in case of consolidation journals) are consolidated based on equity, then the converted amount type data is subject to the equity evaluation process.

Moreover, CCH Tagetik also defines the category and the consolidation journals. The category must be subject to equity evaluation, or defined in the equity evaluation rules. For consolidation journals, the equity evaluation mode must not be “None” and the “Many to many relationship” option must not be selected. Thus, journals that adjust entities other than those indicated in the header will not be subject to equity evaluation.

Page fields

Field	Description
Accounts and categories	
Net equity Accounts	Normal and Details accounts that the system takes into consideration for calculating the value of the Owned entity’s share of the net equity. The contra-entry to the variation of these accounts is allocated on the financial investment account.
Categories to evaluate with equity method	Relationships between the Net Equity variation accounts and the Variation/Detail types of the financial investment account that the system will feed as the contra-entry.
Revaluation/Devaluation accounts	
Loss account for consolidated Entity at equity	Account used as the contra-entry to the losses that make up the P&L result
Profit account for consolidated Entity at equity	Account used as the contra-entry to the profits that make up the P&L result
Generic Financial investments account	Account used by the system in the event that it cannot return to the account to be used through the (intercompany) financial statements and entity journals
Advanced	
Entity on which to generate the Equity evaluation journals	Establishes the entity for which the equity evaluation journals are entered: owner entity, entity at equity or whether they are divided between the two of them (Financial investment on owner entity, net equity and P&L result on Entity at equity)
Listed Entity ownership restriction %	Percentage ownership indicating whether or not the listed entity should be calculated at equity when the “calculated” consolidation method is being used
Unlisted Entity ownership restriction %	Percentage ownership indicating whether or not the unlisted entity should be calculated at equity when the “calculated” consolidation method is being used

Field	Description
Sum up *DEST2* in equity evaluation journals	For Entity/DEST2 or synthetic Entity/DEST2 process report types, this determines the custom dimension 2 on which the equity evaluation journals will be entered. • If enabled, the DEST2 code present in the **Equity Owner Entities** window will be taken into consideration in the definition of the elements to be consolidated. • If disabled, the default DEST2 code of the entity will be taken into consideration.
Goodwill	It is possible to retain the effect of goodwill in a specific financial investment account when the system evaluates the financial investment/net equity elimination journal using the equity method. The following accounts should be indicated: • Financial investment accounts dedicated to goodwill on which the goodwill effect is reclassified. • Normal, detail and variation accounts used for goodwill.
P&L accounts to keep	P&L accounts to keep in the consolidation journals in the equity evaluation step in order to keep some P&L effects on the original account (e.g. capital gains)
Financial investments accounts to exclude	Normal financial investment accounts, with the field **Use Account for setup** set to **Financial investment**, to be excluded from equity evaluation.

For more details, see the Equity valuation, in the Consolidation section.

Minorities page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Minorities >

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Generate Contribution > Minorities >

Purpose of the page

This page allows you to customise the data processing for the minority interests calculation.

Page fields

In **Generic rules**:

Field	Description
Accounts	Opens a page to change the accounts adjusted by the minorities calculation for the direct and indirect minorities portion.
Categories	Opens a page to change the amount and entity journal categories on which minorities should be calculated and the corresponding category on which the minorities journal must be generated.
Periodic minorities	
Periodic minorities calculation	Allows you to customise the variation/detail types to be used to allocate the amount of the % change in minorities for the result shown on the balance sheet.
Area variation - Entrance	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the change in the consolidation area due to the entry of new entities.
Area variation - Exit	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the change in the consolidation area due to entities leaving the group.

Field	Description
Modify % - Increase	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the increase in percentage ownership of a controlled entity.
Modify % - Decrease	Only with **Periodic minorities calculation** selected. Variation/detail type used to generate variations that take account of the decrease in percentage ownership of a controlled entity.

In **Specific rules**:

Field	Description
Setup Periodic minorities calculation	Only with **Periodic minorities calculation** selected. Opens a page to override, for each scenario/period of the process, the **Reference date for periodic minorities calculation** and establish which ownership structure events to include and exclude.

For more details, see The minorities calculation in the Consolidation section.

Mergers page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Mergers >

Operational database > Processes & Workflow > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Mergers >

Purpose of the page

This page allows you to customise the data processing for mergers between two entities in the group. See Mergers.

Page fields

Field	Description
Categories to exclude	Category to be excluded from merger data processing categories

Account reclassification and NER Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Accounts reclassification and NER >

Operational database > Model > Processes & Workflow > Structure > Processes > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Accounts reclassification and NER >

Purpose of the page

This page allows you to relate a node of account reclassification/net equity reclassification (NER) logics to a scenario/period/entity triplet.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings for the process.

Attributes tab

Field	Description
Action	Allows you to include or exclude the node of selected rules for the selected scenario/period/entity triplet.
Scenario	Allows you to select the original or consolidation scenario (depending on the tab) from among those associated with the process. If not selected, all of the process scenarios are included.
Period	Allows you to select the periods associated with the chosen scenario. If not selected, all periods are included.
Entity	Allows you to select the entity, or node of entities, from among those present in the consolidation area.
Consolidation method	Only for consolidation scenarios. Allows you to select the consolidation method for the entities to be included. This can be used as an alternative to selecting the entity individually.
Reclassification logics/NER node	Allows you to select the desired account reclassification or NER logics from among those present.

Rules Engine Designer requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Rules Engine Designer >

Operational database > Processes & Workflow > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Consolidation > Basic Consolidation > Rules Engine Designer >

Purpose of the page

This page allows you to customise the execution plan or relate a node of reclassification logics, from among those present, to a scenario/period/entity triplet. The logic can be related to an Entity or node of Entities for the chosen scenario/period. See Rules Engine Designer in the Consolidation section.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings for the process.

Attributes tab

Field	Description
Action	Allows you to include or exclude the selected scenario/period/entity triplet.
Scenario	Allows you to select the original or consolidation scenario, depending on the tab, from among those associated with the process. If not selected, all of the process scenarios are included.
Period	Allows you to select the period from among those of the selected scenario. If not selected, all periods are included.
Entity	Allows you to select the entity from among those present within the consolidation area.
Consolidation method	Allows you to select the entities to be included using the consolidation method.
Rules Engine Designer node*	Allows you to select a node of Rules Engine Designer rules.

Advanced consolidation data processing

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation >

Navigation panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation >

Data processing types

Field	Description
Amortisation/Depreciation	Manages the cost of a multi-year asset by distributing it among the years of the same asset's useful life. See "Amortisation/Depreciation" below.
Financial investment reclassification	Reclassifies financial investment accounts according to the owned entity's consolidation type on the various consolidation scenarios. See "Financial investment reclassification" on the next page.
Equity pick-up	Revalues the value of an owner entity's financial investments based on a current value of the corresponding portion of the owned companies' net equity. See "Equity pick-up" on the next page.
IC spreading	Specifies the node of the grouping of IC elimination logics that includes the logics to be processed. Allows you to run data processing for IC spreading, which writes off the existing IC declarations and reallocates the amounts to CTP custom dimension 2 based on the declarations made by the counterparty, maintaining the original unbalanced amounts. This information is only visible if the declaring entity/counterparty relationships ("Relationship Type") are set to "By entity - custom dimension 2" or "By entity - synthetic custom dimension 2" in the data entry rules for journals or overridden on the process. For details on how to set the data entry rules, see Data Entry and Submission Rules Page in the Data Collection section. For details of how to override these rules, see Data Entry and Journal rules and settings page in the dedicated section.
IFRS5	This is an accounting standard which sets out accounting practices for assets held for sale, how to report discontinued operations in the financial statements, and related supplementary information. For details, see International Financial Reporting Standard 5 in the Consolidation section.
Intercompany Asset Assignment	This automatically generates consolidation journals that must be made in the event that an asset is transferred within the group, eliminating the capital gain/capital loss recorded by the selling company and adjusting the acquiring company's depreciation journals in order to reconstruct the historical cost and depreciation fund of the asset within the group (return to group historical cost method). ***Note**: this operation has no effect on consolidation (see Intercompany asset assignment data processing, in the Consolidation section).*

Amortisation/Depreciation

Field	Description
on Entities	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the contributor categories.
on group	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the consolidator categories.

Financial investment reclassification

Field	Description
on Entities	The purpose of financial investment reclassification data processing is to reclassify FS data on the various financial investment accounts according to the consolidation type of the owned entity. The FS amount is reclassified by means of entity journals. An entity journal is created for every consolidation scenario in which the entity is present.
on group	Financial investment reclassification data processing also has the purpose of reclassifying the financial investment accounts on the relative eliminations depending on the consolidation type of the owned entity on the various consolidation scenarios. In every consolidation scenario to be fed, the system copies the adjusted elimination journal, filtering it based on the classifier indicated in the Account classifier code. ***Note**: the rule used for the deconsolidation of the current process is the general rule defined by the Data Processing > Advanced Consolidation > F.I. Reclassification tile.*

Equity pick-up

Field	Description
on Entities	Generates adjustments by entity to adjust the carrying value of the financial investments on a pro-rata basis in relation to the net equity of the owned entities. The journal relates to the owner entity.
on consolidation area	Uses the same logics and setup as the original scenario data processing. However, the calculation input data are the data converted into the consolidation currency and not the original data. Entries are therefore generated on the Consolidable amount type within the entity journal generated on the original scenario.
Look through on entities	The look through data processing is run on original scenarios at the end of the pick-up data processing, if **Fair value and look through** has been selected in the pick-up rules.
Look through on consolidation area	Data processing similar to the pick-up/fair value data processing of the original scenario that acts on the consolidation journals.

Advanced consolidation page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > ✎

Navigation panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation >

Purpose of the page

This page allows you to customise the advanced consolidation data processing by modifying the rules related to plug accounts (see Plug accounts).

Page fields

Field	Description
Liaison account categories	Opens a page to customise the general rule of the plug accounts for the current process.

Financial investments reclassification page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Financial investments reclassification

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > F.I. Reclassification >

Purpose of the page

This page allows you to customise, for the specific process being set up, some settings of the generic rules for financial investment reclassification.

The purpose of the financial investment reclassification rule is to reclassify financial investment accounts on the FS data and on the relative eliminations, depending on the consolidation type of the owned entity in the various consolidation scenarios. To identify the correct consolidation scenario, it uses the prefix for financial investment reclassification journals related to the scenario in the **Exceptions** section of the consolidation area definition.

Page fields

Field	Description
Accounts	Opens the **Account** page to select the accounts to be used to reclassify financial investments.
Categories	Opens the **Categories** page to relate the categories used in the journals with the financial investment reclassification categories.
Account classifier code	Allows you to specify the account classifier to be used to identify the consolidated scenarios on which the reclassification should be reported. The system obtains the classifier to be applied on the basis of the scenario/period/entity/classifier relationships created on the consolidation area in the consolidation area definition.

Equity pick-up Requirements page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up >

Navigation panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up >

Purpose of the page

This page allows you to customise the Equity pick-up requirements for the selected process.

Attributes tab

Field	Description
Scenario	Scenario of the selected process.
Period	Period of the selected process.
Start date	Start date of the periodic equity pick-up calculation.
End date	End date of the periodic equity pick-up calculation.
Period length	The period length defined on the consolidation scenario/period selected in the periods table. **1** indicates a monthly duration, **12** indicates an annual duration, etc.

Field	Description
Pick-up period length	This field defines whether the equity pick-up will be calculated for each selected scenario/period on a progressive or periodic basis. To calculate the equity pick-up using the progressive method, define this field only, and set the **Pick-up account period length** to 0. Then enter the code of the period from which to start in this field. This defines the desired period length. In fact, the figure is calculated taking account of the progressive data up until the selected period. To calculate the equity pick-up using the periodic method, enter the number of periods between the selected period and the previous period in which the equity pick-up was run. *E.g. if the scenario is divided into 12 months and the period is set to 4, the process starts to calculate the equity pick-up from the fourth month (April), every four months.*
Pick-up account period length	Period of the consolidation process in which the accounts are updated in the accounting, including the pick-up effects. 0 = calculates the equity pick-up on a progressive basis. If defined, this calculates the equity pick-up on a periodic basis, according to the selected period. The system will copy onto this period, adding the journals of the last period in which the equity pick-up was calculated to the values already present.
Override pick-up percentages	Opens a page to override the pick-up percentages (direct and indirect ownership percentages used by the pick-up) for the selected scenario/period.
Pick-up percentages	Opens a page showing the pick-up percentages of the selected scenario/period.

Pick-up percentages page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ⚙ > Pick-up percentages

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up ⚙ > Pick-up percentages

Purpose of the page

This page summarises the details of every entity subject to pick-up.

Page fields

Field	Description
Entity A	Entity subject to pick-up
Entity B	Entity that is owned by Entity A and directly or indirectly owns Entity C
Entity C	Entity that owns Entity D
Entity D	Entity directly and indirectly owned
Deployed percentage 2	Percentage calculated taking account of any manual overrides. This is used in equity pick-up calculations.
Percentage 2 for result	Percentage obtained without considering overridden percentages. This is not used in equity pick-up calculations.
Override pick-up percentages	Overrides on percentages entered manually. Used in equity pick-up calculations.

Override Pick-up percentages page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ⚙ > Override pick-up percentages

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ⚙ > > Override pick-up percentages

Purpose of the page

This page allows you to run overrides on the percentages used in equity pick-up calculations.

Page fields

Field	Description
Entity A	Entity subject to pick-up
Entity B	Entity that is owned by Entity A and directly or indirectly owns Entity C
Entity C	Entity that owns Entity D
Entity D	Entity directly or indirectly owned by Entity C
Account	Account affected by the pick-up calculation
Percentage	Overridden percentage applied to pick-up calculation

Pick-up rules page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ✎

Navigation panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up > ✎

Purpose of the page

This page allows you to override the generic pick-up rules for the selected process. See Equity Pick-Up data processing in the Consolidation section.

Page fields

Field	Description
Accounts	Financial investment and net equity accounts used in the equity pick-up calculation.
Categories	Category from which to read the amounts to be processed and the category on which to generate the equity pick-up journals. The third field contains the category for accounting pick-up journals simulation.
Use Financial investments FS	If active, for each relationship, the system uses the financial investment account indicated in the financial statements, not the one indicated in the pick-up rules.
Generate detailed information for the pick up query	Provides useful information for understanding how the equity pick-up journal was generated. The data processing of this information makes the equity pick-up data processing slower.

Field	Description
Fair value and look-through	Runs the look-through data processing on original scenarios at the end of the pick-up data processing. If enabled, participation accounts are not included in the Pick-up processing. If enabled, Company D is not visible in the EPU percentages window, and the deployment generates rows with Company C = Company D.
Cumulated fair value and look-through	Runs the look-through data processing on original scenarios at the end of the pick-up data processing by calculating the values on a progressive basis, i.e. the amount of the generated journal rows is the progressive value as at the period to be processed, without reading data from previous scenarios/periods (not even the carry forward). If enabled, participation accounts are not included in the Pick-up processing. If enabled, Company D is not visible in the EPU percentages window, and the deployment generates rows with Company C = Company D.
Classifier for methods	Classifier used to distinguish “investment vehicle” companies
Classifier for equivalent	Classifier used to distinguish “equivalent” companies
Classifier for sectoral	Classifier used to distinguish “sectoral” companies
Element: classifier for methods	Classifier element for selecting “investment vehicle” companies
Elements: classifier for equivalent	Classifier element for selecting “equivalent” companies
Elements: classifier for sectoral	Classifier element for selecting “sectoral” companies
Account filter to exclude from the look-through	Filter for excluding accounts or account nodes from the look-through results

IC Spreading Requirements page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IC spreading >

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IC spreading >

Purpose of the page

This page allows you to customise the intercompany spreading requirements for the selected process.

Only intercompany elimination logics (*Data Processing > Basic Consolidation > IC matching and elimination logics > List*) that have the **IC spreading logic** field active are visible in the list. For more details, see .Intercompany matching and elimination logics in the Consolidation section.

Page fields

Field	Description
IC elimination logics	Allows you to change the node of the grouping of IC elimination logics to be applied to the scenarios/periods of the process when the IC Spreading data processing is run.

Override IFRS5 rules page

Admin

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IFRS5 > ✎

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > IFRS5 > ✎

Purpose of the page

This page allows you to run overrides on IFRS5 rules.

Page fields

Field	Description
Accounts	Opens the **Account** page to select the accounts from which to read and on which to write the data to be reclassified. ***Note**: the user can choose whether or not the reclassification will act on the details of the accounts involved, for both the source accounts and the reclassified accounts.*
Categories	
Categories node to reclassify	Node of categories from which to read the data to be reclassified.
Category for IFRS 5 reclassification journals	Category on which to generate the reclassification journal

Consolidation procedures

Enable consolidation data processing

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition (Data Processing Section)

1. To unlock the settings, click **Locked**.
2. Select **Consolidation** and the desired fields.
3. Click **Save**.

Generate a report on consolidation area variations

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation >

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup > (Data Processing section) > Consolidation

1. Click **Change in consolidation scope**.
2. In **Consolidation scenario/period**, enter the desired consolidation scenario/period.
3. Select the scenario or scenario/period with which you want to compare and the view mode.
4. Click **Run**: the requested report will be generated and downloaded in Excel format.

Configure the entities of a consolidation area

Application database > Processes tile > select process > ⋮ > Process setup > (Data Processing section) Consolidation >

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing Section) > Consolidation >

In **Consolidation area**, on the desired consolidation area row, click : the **Define element to consolidate** window will appear.

Set Equity pick-up requirements

Operational database > Processes > select process > ⋮ > Process setup (Data Processing Section) > Consolidation > Advanced Consolidation > Equity pick-up

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup > (Data Processing section) > Consolidation

1. Select the desired scenario/period.
2. In **Period length** enter the chosen value and then do the following:

If you are using this method...	Then...
progressive	In **Pick-up period length**, enter the value equal to the number of the selected period.
periodic	1. In **Pick-up period length**, enter the period length, i.e. the number of periods between the period from which data processing should start and the last period in which the equity pick-up was calculated. 2. In **Pick-up account period length**, enter a value equal to the selected period.

3. To view the pick-up percentages of the selected scenario/period, click **Pick-up percentages**.
4. To override the pick-up percentages, click **Override pick-up percentages**.
5. Click **Save**.

Data Processing: allocation and closing

Contents

This section covers the following topics:

Allocations and Closing Requirements page 483
Allocations & Closing rules page 484

Allocations and Closing Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Purpose of the page

This page allows you to define an execution plan to relate a routine to the scenario/period/entity dimensions. See Execution Plan in the Allocations & Closing section.

Buttons and/or links on the page

Field	Description
Definition result	Opens a page summarising the settings.

Attributes tab

Field	Description
Action	Allows you to include or exclude the scenario/period/entity when running the selected jobs/routines.
Original scenarios/periods	Allows you to indicate original scenarios/periods on which to run the data processing, from among those associated with the process. This is the scenario on which the data will be processed. • **Selected**: allows you to select the desired original scenarios/periods. • **All**: includes all original scenarios/periods associated with the process.
Entity	Code and description of the desired entity/node from among the available non-time-dependant entity hierarchies.
Job or Routine	Allows you to select the routine from among those defined in *Data Processing > Allocations & Closing > Routine*, or a job that groups several routines together.
Period length	Period length that the system uses for periodic-type data processing rules
Advanced setup	Only with **Jobs** selected. Allows you to set period length and configuration scenarios for individual routines.
Reference scenario for driver	

Field	Description
Selection	Scenario from which the system takes the allocation driver on which basis to perform the allocation. • **Fixed**: the scenario for the allocation driver is established on configuration; in this case the scenario must be specified. • **Parametric**: a scenario that can be navigated by the allocation driver will be used.
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Allows you to calculate the desired navigable scenario. See "Navigable scenario options" below.
Target Scenario	
Selection	Used for “Target Matching” routines. This is the scenario from which the system reads data to be written on the scenario to be processed • **Fixed**: target scenario • **Parametric**: navigable target scenario
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" below.
Scenario for "ratio %" calculation	
Selection	Reference scenario for calculating the ratio percentage values for data processing for calculated target matching. This is the scenario on which the percentage is calculated and on which the system reads data to be written on the scenario to be processed for calculated target matching. • **Fixed**: scenario for the ratio % calculation • **Parametric**: scenario for the navigable ratio % calculation
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" below.
Actual scenario for fast closing	
Selection	Scenario on which the system reads data to be written on the scenario to be processed for “Target Matching” with fast closing. • **Fixed**: scenario for the fast closing calculation • **Parametric**: navigable scenario for the fast closing calculation
Fixed scenario	Only with **Fixed** selected. Desired fixed scenario.
Navigable scenario	Only with **Parametric** selected. Desired navigable scenario. See "Navigable scenario options" below.

Navigable scenario options

Option	Description
PREV	The reference scenario for the driver is the one prior to the processed scenario.
NEXT	The reference scenario for the driver is the one after the processed scenario.
REF1...REF5	The reference scenario for the driver is reference scenario 1...5 related to the processed scenario.

Allocations & Closing rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Allocations and Closing >

Purpose of the page

This page allows you to customise Allocation and Closing data processing for the selected process.

Page fields

Field	Description
Traceability	
Keep source	Level of detail to be stored in the journals generated by the system. • **Detail**: tracks and shows all steps taken to generate the allocated data, including the chain of all the latest sources. ***Note**: if selected, it may slow the data processing and generate a trail that is too long for the field.* • **Last source**: only tracks and shows the last step taken to generate the allocated data. Example: rule 001 requires cost centre C01 to be allocated to cost centres C02 and C03, and C02 to be allocated to cost centre C04. In this case, for the allocated data C04, the last data that generated it is shown, i.e. C02. • **Disable**: does not track the steps taken to generate the data. • **From rule**: shows all allocation steps that generated the result, except for rules excluded from execution, e.g. excluded routines. ***Note**: if selected, it may slow the data processing and generate a trail that is too long for the field.*
Store partial result	Stores the data processing history with details of the individual elements involved (e.g. collection of data to be allocated or imposed, drivers).
Performance	
Manage thousandths	Generates the allocations in the presence of very small amounts that would otherwise be disregarded. ***Note**: if selected, it may slow data processing performance.*
Bundling	If the routine is run on the entire scenario, then the system runs it once, instead of as many times as there are periods related to the scenario.

Data Processing: Cash Flow Planning

Contents

This section covers the following topics:

Cash Flow Planning 486
Cash Flow Planning Requirements page 487
Cash Flow Planning Rules page 488
Copy actual data page 489
Dimensions/Financial Rules Mapping page (Create derived events and entries) 489
Cash management rules page (Financial simulation) 490

Cash Flow Planning

Data processing types

The Cash Flow Planning data processing is as follows:

- Copy actual data
- Create financing, assets and FX hedging events
- Create objects, derived events and entries
- Indirect taxes and cash pooling
- Indirect taxes calculation
- Dividends calculation
- Tax balance payment
- Tax down payment
- Financial simulation
- Revaluation and Devaluation
- Direct taxes calculation

For more details on Cash Flow Planning, seeCash Flow Planning Overview in the dedicated section.

Cash Flow Planning: entry registration

Entries are registered only in the months between the estimate start date and the estimate end date. However, the estimate start date may not coincide with the calculation start date. This happens when the calculation needs to start before the simulation period.

Examples of early calculation

Example 1

Simulation calculation starts from the December before the simulation start date. This allows you to automatically obtain the effects of the initial balance sheet amounts by calculating the collection and payment methods associated with the items pertaining to **December year x-1** but which have financial manifestation in the months of the simulation.

Example 2

Forecast with simulation start date in April and calculation start date in January. For postponed semi-annual invoicing, the system begins to calculate the amounts to be aggregated in January and disposes of the accrual for the first six months of the year in June. This means you do not have to wait for the accounting of the first six months of simulation and can register the entry in October.

Asset depreciation on actual and balance

In general, to calculate depreciation, the budget data processing only considers purchase events contained in the simulation range. However, the system can be told to also include purchase events with (purchase) date prior to the simulation in that calculation. This is particularly useful when copying data between processes, since this transfers the purchase event by date. In fact, in this case, after the transfer to different periods, the purchase events may fall outside the simulation interval and the system may not calculate the relative depreciation.

Calculate Financial policy for counterparty entity

In general, during the financial policy calculation, the budget data processing does not consider the individual amounts of the counterparty entities. Regardless of those values, if the amount on the main section is greater than zero, it is moved to the active section, and if it is less, to the passive section. However, the system can be told to also consider amounts of counterparty entities during the calculation, in sorting from one section to another.

However, financial policy by counterparty entity is incompatible with *cash pooling*. In fact, in cases of cash pooling, when the system performs the Section shifts and generates interest, it always defines the counterparty entity as the parent entity. Therefore, when calculating the financial policy by counterparty, the system checks that none of the sections involved in the sorting has the **Cash Pooling** option selected. Otherwise, it will return a blocking error.

Cash Flow Planning Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Operational database > Navigation Panel > Processes & Workflows > Processes > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Purpose of the page

This page allows you to configure Cash Flow Planning data processing for the process.

Attributes tab

Field	Description
Step	Step of the Business Workflows model associated with the selected process to which Cash Flow Planning data processing is to be related.
Event scenario	Original scenario used for storing events to date. This can be selected from among the process scenarios, but it is typically a scenario created and reserved for this purpose.
Simulation timeframe	
Start date	Simulation start date
End date	Simulation end date
Calculation start date	Calculation start date according to defined planning rules
Net result calculation	Calculates the result accounts during Cash Flow Planning data processing.
Carry forward of Initial actual balance sheet	Calculates the carry forwards of the initial balance sheet scenario.
Execution plan	Opens a page to define execution plans.

Cash Flow Planning Rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Operational database > Navigation Panel > Processes & Workflows > Processes > select process > ⋮ > Process setup (Data Processing section) > Cash Flow Planning >

Purpose of the page

This page allows you to customise Cash Flow Planning data processing for the selected process.

Page fields

Field	Description
Categories	
Source / Target	Category used to do the following: • Filter data when reading initial balance sheets and projected P&Ls. • Write the Forecast BS and the additions to the P&L account (automatic calculation of depreciation, medium-/long-term financial expenses and income and with the management of taxation).
Alternative target category	Category used for sub-entities involved in the financial planning process, in such a way that keeps the data generated on the sub-entities separate from the data generated on the entities.
Target category for direct cash flow	Category for cash flows on which the direct cash flow is based
Alternative target category for direct cash flow	Category on which to generate alternative cash flows ***Note**: the category appears if the alternative category has been set in the process rules for sections with the **Cash Flow** option selected.*
Asset depreciation on actual and balance	Allows the depreciation data processing to also process purchase events with purchase dates prior to the simulation and generate depreciation for the estimate periods.
Calculate cash management for counterparty entity	Allows the budget data processing to also consider amounts of counterparty entities during the calculation, in sorting to the active section or the passive section.
Input origins setting	Opens the window for managing the input origins to be included for the projected P&L, projected flows and initial balance sheet.
Accounts	
Revaluation account for FX rate difference	Account in which to enter the revaluation generated by the FX rate difference in the conversion of accounts expressed in any currency other than the one used for the preparation of the financial statements.
Devaluation account for FX rate difference	Account in which to enter the depreciation generated by the FX rate difference in the conversion accounts, expressed in any currency other than the one used for the preparation of the financial statements.
Forecast: variation for carry forward	For forecast processes and standard balance sheet accounts, the system uses the variation account with the detail type, if defined here, to carry forward the initial balance sheet value, as defined in the last actual period, to all estimate periods of the first year. If it is not specified, the system carries forward the value on the variation account with the higher code and not the initial amount type code.
Additional dimensions in financial rules	
Custom dimensions 1-5	Specify the dimensions you want to use when mapping dimensions to financial rules..
CTP entity	Indicates whether you want to manage the counterparty entity in the relating of dimensions to financial rules.
CTP Cust. Dim. 2	Indicates whether you want to manage the custom dimension 2 counterparty in the relating of dimensions to financial rules.
Currency	Indicates whether you want to manage currency in the relating of dimensions to financial rules.

Copy actual data page

Admin

Operational database > Processes tile > select process > > Process setup (Data Processing section) > Cash Flow Planning > Copy actual data >

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup (Data Processing section) > Cash Flow Planning >

Purpose of the page

This page allows you to change the requirements for running the copy of the actual initial balance sheet and P&L based on the scenarios indicated for the selected process.

Page fields

Field	Description
Category	Source amount category, or entity journal type, or category group node from which to copy data.
Source beginning balance sheet scenario	Original scenario used to copy the actual data from the initial balance sheet
Previous actual scenario (P&L)	Original scenario used to copy the actual P&L account data of the previous scenario at the start of the calculation
Forecast scenario: actual periods (P&L)	Original scenario used to copy P&L data from the calculation start scenario

Dimensions/Financial Rules Mapping page (Create derived events and entries)

Admin

Operational database > Processes tile > select process > > Process setup (Data Processing section) > Cash Flow Planning > Create derived events and entries >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition(Data Processing section) > Cash Flow Planning > Create derived events and entries >

Purpose of the page

This page allows you to change the relationships between dimensions and financial rules that generate derived events and double entries for the selected process. For more details on data processing that generates derived events and entries, see Running Cash Flow Planning data processing in the dedicated section.

Attributes tab data

Element	Description
Action	Allows you to include or exclude the selected elements from the data processing.
Dimensions	
<dimension>	Allows you to select an element or node within the individual dimensions.
Financial Rules	
Accounting model	Changes the accounting model according to which the curve should be generated for the selected row.

Element	Description
Event rule	Changes the rule for generating events present in the accounting model associated with the row.
Credit terms	Changes the credit terms associated with the row.
Indirect Tax Policy	Changes the indirect tax policy associated with the row.
Indirect Tax rate	Changes the percentage to be applied to the amount for the indirect tax calculation.
Other Indirect tax policy	Changes any other indirect tax policies.
Other Indirect Tax rate	Changes any other indirect tax rates.
Advanced	
Payment Calendar	Changes the calendar that sets the dates on which to run collections or payment in the event that credit terms have been established.
Weight	Changes the weighting to be associated with the row to weight the values.
Non-deductible %	Changes the non-deductible percentage, if applicable to the indirect tax.

Cash management rules page (Financial simulation)

Admin

Operational database > Processes tile > select process > > Process setup (Data Processing section) > Cash Flow Planning > Financial simulation >

Application database > Navbar > Processes & Workflows > Process > select process > > Process definition(Data Processing section) > Cash Flow Planning > Financial simulation >

Purpose of the page

This page allows you to change the cash management rules to run financial simulations. For more details on financial simulations, CFP Data Processing - Financial Simulation in the dedicated section.

Buttons and/or links on the page

Field	Description
	• **Lines of Credit/Deposits**: opens a page to change FST items and lines of credit. • **Shift between lines of credit/deposits**: opens a page to change the rules for shifting amounts between the various lines and the run order.
Entities/Cash management rules mapping	Opens a page to change the relationships between the entities and the cash management rules.

See Lines of deposit and credits in the Cash Flow Planning section.

Data Processing: taxes

Contents

This section covers the following topics:

Data Processing related to taxes 491
Tax rules page 491
Taxes setup page 492
Deferred and prepaid taxes - Input accounts page 494
Direct taxes - Input accounts page 495
Deferred and prepaid taxes - Override output accounts page 495
Direct taxes requirements page 496

Data Processing related to taxes

Data processing types

Data processing related to taxes is divided based on the type of tax.

- Data processing on deferred and prepaid taxes: their impact is reported when there are temporary differences, due to entity and consolidation adjustments, between the values of the assets and liabilities shown in the annual financial statements and the values for tax purposes of consolidated entities. The affected accounts are those indicated in the tax rules. The deferred taxes calculation applies to the original scenario and can be run on entities or on the group. In calculations run on entities, the data processing is run on the contributor entities and categories, i.e. the amount type categories and entity journals. In calculations run on the group, however, the data processing is run on the consolidator categories and the consolidation journals are involved.
- Data processing related to direct taxes: this calculates the taxes for the year and only applies to amounts.

Monthly splitting rule for taxes for the year

A tax can be split monthly based on the statutory result or a weight. In the former case, the tax for the year is allocated to periods based on the statutory result for the period. In the latter case, however, it is allocated on the basis of the coefficient attributed to the monthly splitting of the tax (*Setup & Admin > Data processing > Cash flow planning > Advanced Financial Rules > Weight*). (*Navigation panel > Data processing > Cash Flow Planning > Advanced financial rules > Weight*). For more details, see Weight Types and Weights in the Cash Flow Planning section.

Tax rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes >

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes >

Purpose of the page

This page allows you to customise tax-related data processing for the selected process.

Page fields

Field	Description
Taxes setup	Opens a page to override the output accounts that the system will use for taxes.
Deferred and prepaid taxes - Input accounts	Opens a page to define the input accounts that the system will use to calculate deferred and prepaid taxes and establish the percentage value of those accounts that should be considered.
Direct taxes - Input accounts	Opens a page to define the input accounts that the system will use to calculate direct taxes.
Deferred and prepaid taxes - Override output accounts	Opens a page to override what is defined in the **Deferred and prepaid taxes** tab on the **Taxes setup** page, for each individual output account.

Taxes setup page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Taxes setup

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Taxes setup

Purpose of the page

This page allows you to override the output accounts that the system will use for taxes.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured in the system
Set	Tax from among those configured in the system

Deferred and prepaid taxes tab

Field	Description
Deferred Taxes P&L	
Annual impact account - debit	P&L account on which the system registers the annual impact as a debit or credit amount
Annual impact account - credit	
% variance account - debit	P&L account on which the impact of the adjustment to the tax fund/credits for prepaid taxes, resulting from the change in the rate compared with the previous year, is registered as a debit or credit amount.
% variance account - credit	
Debits for deferred taxes	
Normal account	Balance sheet account on which the payable for deferred tax is registered
Variation annual impact - debit	Variation account of the Deferred taxes fund account, in debit or credit, on which the tax adjustment due to the impact of the year's taxes is registered. This typically coincides with a variation account of the Deferred taxes fund. To keep track of both the impact of the year and the impact of the fund adjustment due to the FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation annual impact - credit	

Field	Description
Variation % variance - debit	Variation account of the Deferred taxes fund account, in debit or credit, on which the tax adjustment due to the change in rate compared with the previous year is registered.
Variation % variance - credit	
Credits for prepaid taxes	
Normal account	Normal balance sheet account on which the amount receivable for tax is registered. This account may coincide with the Deferred taxes fund if no distinction needs to be made between receivables and payables.
Variation annual impact - debit	Variation account of the Credits for Prepaid taxes account, in debit or credit, on which the tax adjustment due to the impact of the year's taxes is registered. This typically coincides with a variation account of the Credits for Prepaid taxes account. To keep track of both the impact of the year and the impact of the fund adjustment due to the FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation annual impact - credit	
Variation % variance - debit	Variation account, in debit or credit, of the Credits for prepaid taxes account on which the tax adjustment due to the change in rate compared with the previous year is registered.
Variation % variance - credit	

Direct Taxes tab

Field	Description
Direct taxes	
Taxes	P&L account on which the taxes are booked
Accrual - credit variation	Variation balance sheet account on which the accruals for the tax that has already accrued but has not yet been recognised are booked
Tax loss	P&L account from which to read the negative result for the year. This may correspond to the P&L account used to book the net result for the year.
Tax loss spreading: No. of years	Specifies the number of years for which the tax loss for a specific tax period can be deducted from the taxable income in subsequent years. If set to zero, there is no spreading.
Direct taxes monthly splitting rule	Monthly splitting rule to be applied to the taxes for the year.
Accounting	
Accrual - debit variation	Variation BS account of monthly accruals write off for the booking of tax at year end
Tax fund	Balance sheet account from which to read the tax debit/credit
Tax fund: variation account	Variation account of the **Tax fund** normal account used for booking the year's taxes at the end of the debit/credit year
Tax credits	
Tax credit account (P&L)	P&L contra-entry on which to define the tax credit
Tax credit account (BS variation)	BS variation account on which to define the tax credit

Direct taxes - Payments tab

Field	Description
Holidays	Allows you to shift the tax payments that fall on a holiday to a work day based on what is specified in the selected holiday.
Bank - credit variation	Banking account for the down payments and tax balances
Down payment	
Credits due to down payments	Balance sheet account for credit with the tax authorities for tax down payments
Statistical account: prev. year tax	Reference tax account of the previous year used for the calculation of down payments of the first year of planning. In subsequent years, the system uses the tax account.

Field	Description
Credits due to down payment variation	Variation account of the **Credits due to down payments** account defined during the down payment of taxes
Bank - debit variation	Write off variation of the banking account for down payments if the balance of the tax fund is in credit
Tax fund: down payment write off	Credit variation of the tax fund account for the down payment write off if the balance of the tax fund is in credit
Down payment %	Percentage down payment to be paid
Day	Day on which to pay the tax down payment
Period	Period in which to pay the tax down payment
Balance payment and down payment write off	
Down payment write off method	Write off method for the down payment made during the year. • **Fiscal year end**: the amount payable to the tax authority is written off with the balance of the credit due to down payments on 31/12. • **Balance payment**: the amount payable to the tax authority is written off with the balance of the credit due to down payments made upon the settlement of the tax liability.
Credit write off variation for down payments	Write off variation of the credits due to down payments account that the system uses at year end or upon payment of the tax balance, in order to make a sort of account transfer and move the balance of the down payment account to the tax fund
Tax balance payment fund	Debit variation of the tax fund account entered upon the tax balance payment
Day	Day on which to pay the tax balance
Period	Period in which to pay the tax balance

Deferred and prepaid taxes - Input accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Input accounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Input accounts

Purpose of the page

This page allows you to define the input accounts that the system will use to calculate deferred and prepaid taxes and establish the percentagevalue of those accounts that should be considered.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax. Identifies all of the accounts that contribute to the definition of the tax base for the calculation of deferred taxes.
Taxable income %/ Deductible taxes %	Percentage of the account subject to tax

Direct taxes - Input accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Direct taxes - Input accounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Direct taxes - Input accounts

Purpose of the page

This page allows you to define the input accounts that the system will use to calculate direct taxes.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax
% not subject to	Percentage of the account not subject to tax
% subject to current year	Percentage of the account subject to tax for the current year
% subject to year n+1	Percentage of the account subject to tax for the specified year n+. Allows you to manage the spreading of deductible accounts over several years.
% subject to year n+2	
% subject to year n+3	
% subject to year n+4	
% subject to year n+5	
% subject to year n+6	
Threshold account	Account on which to apply the **Threshold %** value in order to get the maximum value subject to tax
Threshold %	Percentage to apply to the threshold account to get the maximum value subject to tax. This is applied, for example, if there are maintenance costs related to assets that are only deductible up to a certain percentage value of the asset.

Deferred and prepaid taxes - Override output accounts page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Override output accounts

Operational database > Navigation Panel > Processes & Workflow > Process > select process > ⋮ > Process setup (Data Processing section) > Taxes > ✎ > Deferred and prepaid taxes - Override output accounts

Purpose of the page

This page allows you to apply overrides for each individual output account.

Attributes tab

Field	Description
Fiscal policy	Fiscal policy from among those configured
Set	Tax applied for the chosen fiscal policy
Account	Accounts sensitive to tax
Deferred Taxes P&L	
Annual impact account - debit	P&L account on which the system registers the annual impact as a debit or credit amount
Annual impact account - credit	
% variance account - debit	P&L account on which the impact of the adjustment to the tax fund/credits for prepaid taxes is registered, as a debit or credit amount. The impact of the adjustment is due to the rate change compared with the previous year.
% variance account - credit	
Debits for deferred taxes	
Normal account	Balance sheet account on which the payable for deferred tax is registered
Variation annual impact - debit	Variation account of the Deferred taxes fund account on which the tax adjustment due to the impact of the year's taxes is registered, as a debit or credit amount. This typically coincides with a variation account of the Deferred taxes fund.
Variation annual impact - credit	To track the impact of the year and the impact of the fund adjustment due to the change in FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation % variance - debit	Variation account of the Deferred taxes fund on which the tax adjustment due to the change in rate compared with the previous year is registered, as a debit or credit amount.
Variation % variance - credit	
Credits for prepaid taxes	
Normal account	Normal balance sheet account on which the amount receivable for tax is registered. If you do not want to distinguish between payables and receivables, this account may coincide with the Deferred taxes fund.
Variation annual impact - debit	Variation account of the Credits for Prepaid taxes account on which the tax adjustment due to the impact of the year's taxes is registered, as a debit or credit amount. This typically coincides with a variation account of the Credits for Prepaid taxes account.
Variation annual impact - credit	To track the impact of the year and the impact of the fund adjustment due to the change in FX rate, ad-hoc variation accounts identifying those variations must be created.
Variation % variance - debit	Variation account of the Credits for prepaid taxes account on which the tax adjustment due to the change in rate compared with the previous year is registered, as a debit or credit amount.
Variation % variance - credit	

Direct taxes requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Direct Taxes > Taxes >

Operational database > Navigation panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Direct taxes Taxes >

Purpose of the page

This page allows you to override the execution plan settings for direct taxes at the entity level.

Attributes tab

Field	Description
Entity	Entity on which to run the override
Entity Calculation	Overrides data processing managed at the entity level. • **No**: the system does not run the entity calculation on the selected entity. • **Yes**: the system runs the entity calculation on the selected entity. • **On other Entity**: the system uses the data of the selected entity for the calculation on another entity. In this case, it is necessary to specify the target entity.
Target entity	Only if **Entity Calculation** is set to **On other Entity**. Owned Entity

Data Processing: other data processing

Contents

This section covers the following topics:

Other data processing 498
Asset depreciation rules page 499
Customers/Asset categories attribution page 499
Dividend Requirements page 500

Other data processing

Section contents

This section groups together data processing that does not belong to the main modules of CCH Tagetik, namely the Consolidation, Cash flow planning, ETL, Carry forward, Allocations & Closing, Calculation logics, Validations, Balancing and Taxes modules.

Available data processing

Data Processing	Description
Monthly splitting by Account	Runs the monthly splitting in accordance with the rules defined in the **Monthly splitting rules** tab in the accounts table. The monthly splitting rules can be defined for Profit & Loss or Other Variations accounts, or for variation accounts of a Balance Sheet or Other Stocks nature. See Monthly splitting in the dedicated section.
Countervalue calculation	Automatically calculates the amounts field of gross amounts and intercompany amounts based on the original currency amount field. Applies the FX rates of the processed scenario/period. See Countervalue calculation in the Data Processing section.
Asset depreciation	Automatically generates the depreciation rates of an intangible or tangible asset present in a journal, when a depreciation plan on original scenarios has been defined for that asset. The data processing is performed on the contributor categories. The purpose is to calculate the depreciation plan for new investments by tax category. SeeAssets depreciation in the Data Processing section.
Dividends	Enables the calculation of the dividends to be distributed to entitled entities as remuneration for the capital invested. See Dividend Requirements Page.

Asset depreciation rules page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Other > Asset depreciation >

Operational database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Other > Asset depreciation >

Purpose of the page

This page allows you to access the page on which to override relationships between categories of assets and custom dimension 3 items.

Page fields

Field	Description
Custom dimension 3/Asset categories attribution	Opens a page to override the relationships between custom dimension 3 items and asset categories. The relationships are created by entity/entity node.

Customers/Asset categories attribution page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Other > Asset depreciation > > Attribution (Custom dimension 3)/Asset categories

Operational database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup (Data Processing section) > Other > Asset depreciation > > Attribution (Custom dimension 3)/Asset categories

Purpose of the page

This page allows you to associate the custom dimension 3 elements (assets) with an asset category, for every entity. Thus, cases in which the same asset is depreciated for several entities can also be handled.

Buttons and/or links on the page

Field	Description
Definition result	Shows the results of the relationships created.

Relationships tab

Field	Description
Custom dimension 3	Dimension on which, within the domain, it is necessary to manage assets, such as buildings, land, etc.
Entity	Individual entity or node of an entity hierarchy. In the latter case, the system considers all the entities related to the selected node as entities to be related to the asset.
Asset categories	Allows you to select a category of assets from among those that have been defined (*Setup&Admin > Data processing tile > Asset depreciation*)

Dividend Requirements page

Admin

Operational database > Processes tile > select process > ⋮ > Process setup (Data Processing section) > Other > Dividends >

Application database > Navigation Panel > Processes & Workflows > Process > select process > ⋮ > Process setup > (Data Processing section) Other > Dividends >

Purpose of the page

This page allows you to associate specific dividend distribution rules with specific entities.

Attributes tab

Field	Description
Entity	Entity on which the dividend is calculated and booked
Dividends distribution rule	Allows you to override rules configured in the system (*Setup&Admin > Data Processing > Dividend distribution rules*)

Notification emails

Contents

This section covers the following topics:

Notification emails 501
Send email events 502
Manage the sending of emails 504
Email templates page 505
Parametric e-mail elements 506

Notification emails

Introduction

CCH Tagetik can send automatic notification emails to the user when certain events occur within the application. To set this behaviour, it is necessary to configure an *email template*, or define the rules for sending emails and email content (email content, email originating event, recipients, etc.).

Email template configuration

To create email template it is necessary to define the following data:

- the event type related to the process originating the send email event (e.g. task completion of process workflows)
- the email format
- the subject and body of the email, in which place markers related to parametric elements can be inserted
- the recipients, i.e. single users or groups of users of CCH Tagetik .

For more details, see the email template configuration page. See "Email templates page" on page 505.

Parametric elements in email templates

Place markers can be inserted in the subject and body of the email template for parametric elements related to process data.

When sending the email, the system replaces the parametric elements with the specific process data that originated the send email event. For example, the string in the email template 'Entity ${entity} has been submitted' becomes 'Entity A00 has been submitted' when sent.

For more details on parametric elements. See "Parametric e-mail elements" on page 506.

Tracking the sending of automatic emails

The automatic sending of emails can be tracked in CCH Tagetik ‘s audit trail. See Procedure di gestione audit.

Email transmission protocol

CCH Tagetik uses the SMTP (Simple Mail Transfer Protocol) transmission protocol.

Depending on the chosen configuration, the following types of email session are possible:

Session	Configuration	Description
Mail Session Application Server	The SMTP session is configured in the application server.	The email sender is defined by the parameter of the *name mail.from* property of the configuration XML file.
Custom Mail Session	The SMTP session is configured via the repository.	The email sender is defined by the Repository's *mail from* parameter. The following types of sender are supported: • **Single**: the email's **From** field inherits the email address indicated in the Repository's *Default Mail From* field. • **User**: the email's **From** field inherits the email address indicated in the user settings.

Specific behaviour for sending by event type

Element	Description
Submission events	Either "Specific recipients" or "Recipients", or both, must be selected. The emails will not be sent to the user who originated the event, not even if they are on one of the lists of recipients.
IC matching cockpit events	"Specific recipients" must be selected. The emails will only be sent if the cockpit was opened with a relationship type other than Node. They will not be sent to the user who originated the event, not even if they are on one of the lists of recipients.
Events related to data processing	"Recipients" must be selected. Emails will also be sent to the user who originated the event if they are on the list of recipients.
Events related to the completion of tasks	When the event relates to a task included in a process, no recipient needs to be specified. The emails will be sent to those responsible for the subsequent task (if the sending of notification emails is enabled on the task) and to the user who originated the event if they are one of those responsible for the subsequent task.

Send email events

List of events that originated the sending of emails

The list of events that trigger the sending of emails is provided below:

Element	Description
Processes with approval workflows	
Entity submission	Sends the email when one of the entities is submitted.
Submission of the last entity below the Higher entity	Sends the email when the last child entity of a parent node is submitted. The email is sent to all users associated with the parent node.
Entity approval	Sends the email when, if there is an approval workflow for the entity, the certification task is run (i.e., when the entity passes to the "in submission" state and the related traffic light in the dashboard turns blue).
Reject submitted Entity	Sends the email when an entity changes from **Submitted** to **Rejected**.
Reject "Submission in progress" entity	Sends the email when an entity changes from **In Submission** to **Rejected** (cancelling the Approval step).
Journal approval	Sends the email when the journal approval tasks for which an approval workflow is provided are run (i.e., when the journal goes into "in submission" state).
"Submitted" journals rejection	Sends the email when a journal is rejected.
"Submission in progress" journals rejection	Sends the email when the journal status changes from **In Submission** to **Rejected** (cancelling the Approval step).
Reminder Before Task Due Date	Reminds the user of the due date by sending a **daily reminder** to all managers of the element. The reminder starts from the number of days prior to the specified deadline. For traditional processes, see Set deadline window. For processes with dimensions by step, see the Deadline Dates page.

Element	Description
Completion: Process task workflows	allows the task managers to be notified via e-mail when the previous task has been completed
Reject submitted Analytical Dimension	Sends email when an analytical dimension is rejected.
Send Summary Email for Rejected elements	when an element is rejected, it sends a reminder to the submission and approval task managers.
Generic event	
Send Summary Email on Task Completion	when a task is completed, a reminder of the next task is sent to the managers
Intercompany matching cockpit	
IC insertion is Complete	Sends the email when the insertion of the entity's intercompany entries is declared complete.
Carry forward IC insertion	Sends the email upon the carry forward of the insertion of intercompany entries related to an entity for which it had already been declared complete.
IC matching	Sends the email when the relationship between the entities is submitted/blocked.
Carry forward submitted IC relationship	Sends the email when a relationship between entities that have already been submitted is carried forward.
Unlock IC relationship	Sends the email when a previously blocked relationship is carried forward.
Reminder on Entity submission	Sends the email on the submission reminder dates set for the process. See Set deadline window. See Deadlines dates page.
Data processings	
Cashflow planning	Sends the email when the indicated data processing ends.
Closing	
Purge closing entries	
ETL routine for values	
Dictionary elements of an ETL dimension	
Lookup table elements	
ETL job for values	
ETL job for tables	
Consolidation area basic data processing	
ETL routine for tables	
Consolidation area basic data processing	
Consolidation area final data processing	
Preliminary data processing on Consolidation scenarios	
Group consolidation data processing	
Entity data processing	
Preliminary data processing on Original scenarios	
Snapshot	
Create snapshots automatically	Sends the email when a snapshot is created automatically.
Attachment	
Replace attachments	Sends the email when the attachments to a Collaborative Office document are replaced.
Production control	
Copy data versions	Sends the email when the copy data versions function is performed.
List value wizard	Sends the email when the purchase lists are defined using the wizard.
Integrity check	Sends the email when the Integrity check report that checks inconsistencies within data versions linked to a CCH Tagetik process is run.
Spreading	
Banking IC spreading	Sends the email at the end of IC Spreading data processing.

Manage the sending of emails

Application database > Data processing tile > Email templates

Application database > Data processing > Email templates

Sequence of procedures

To set up the sending of automatic emails regarding the process, the following procedures are necessary:

1. "Define the email recipients" below.
2. "Define the email contents" below.
3. "Abilitare l'invio di email sul processo" below.

Define the email recipients

1. Click to create a new email template.
2. In the **Attributes** tab, enter an identification code for the template in **Code**.
3. In **Email event type**, select the condition that triggers the automatic sending of the email.
4. In the **Recipients** tab, select the desired types of user in **Specific recipients**.
5. To send the email to specific users of the environment only, click ... in the **Recipients** field and select the desired users in the **Select elements** window.
6. To exclude specific users in the selected group from the email, click ... in the **Excluded Recipients** field and select the desired users in the **Select elements** window.
7. Repeat steps 4 to 6 to define the recipients of carbon copies (in CC) and blind carbon copies (in BCC).

Define the email contents

1. In the **Attributes** tab, select the desired format for the email text in **Email text type**.
2. Enter the subject of the email in **Subject**. To insert parametric elements. See List of parametric elements of email.
3. Enter the body of the email in **Body**. To insert parametric elements. See List of parametric elements of email.
4. Select **Enable** to enable the sending of the created template.
5. Click **Save**.

Abilitare l'invio di email sul processo

Application database > Processes tile > select process > ⋮ > Process setup (Data Processing Section)

Application database > Navbar > Processes & Workflows > Process > select process > ⋮ > Process definition (Data Processing Section)

Selezionare la casella **Invio mail** e fare clic su **Salva**.

Enable the sending of emails on the process

Application database > Processes tile > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Checking rules

Application database > Navigation Panel > Processes & Workflow > Process > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Checking rules

Select the **Notifications and events** box and click **Save**.

Email templates page

Admin

Application database > Data processing tile > Email templates

Application database > Data processing > Email templates

Application database > Processes tile > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Template notifications management >

Application database > Navigation Panel > Processes & Workflow > Process > select process with dimension by step > ⋮ > Process setup > (Submission and notifications) Template notifications management >

Purpose of the page

This page allows you to configure email templates for the sending of automatic notification emails.

Configuration tab

Element	Description
Attributes	Defines the features and contents of the template.
Recipients	Defines the recipients of the automatic email.

Fields in the Attributes tab

Element	Description
Code	Defines the template's identification code.
Email event type	Defines the event that originated the automatic sending of the email. See "Send email events" on page 502.
Email text type	Defines the email format.
Enable	Enables the sending of emails when the event defined in **Email event type** occurs.
Subject	Defines the email subject.
Body	Defines the content of the email.

Fields in the Recipients tab

Element	Description
Specific recipients	Defines the type of users who will receive the email and the contributor/submitter role of the users in the process. The options for groups of users vary based on the value defined for **Email event type**.
Recipients	Allows you to select specific users to whom to send the email. To be able to use this, sending to Contributors and/or Submitters must have been enabled in **Specific recipients**.
Excluded Recipients	Allows you to select specific users to be excluded from the sending of the email. If groups have been defined in **Specific recipients**, this allows you to exclude specific users from the group of users.
Specific recipients in Cc	Defines the type of users who will receive the email in carbon copy and the contributor/submitter role of users in the process. The options for groups of users vary based on the value defined for **Email event type**.
Recipients in Cc	Allows you to select specific users to whom to send the email in carbon copy. To be able to do this, sending to Contributors and/or submitters must have been enabled in **Specific recipients in CC**.
Recipients not in Cc	Allows you to select specific users to be excluded from the sending of the email in carbon copy. If groups have been defined in **Specific recipients in CC**, this allows you to exclude specific users from the group of users.

Element	Description
Specific recipients in Bcc	Defines groups of users who will receive the email in blind carbon copy and the contributor/submitter role of users in the process. The options for groups of users vary based on the value defined for **Email event type**.
Recipients in Bcc	Allows you to select specific users to whom to send the email in blind carbon copy. To be able to use this, sending to Contributors and/or Submitters must have been enabled in **Specific recipients in BCC**.
recipients not in BCC	Allows you to select specific users to be excluded from the sending of the email in blind carbon copy. If groups have been defined in **Specific recipients in BCC**, this allows you to exclude specific users from the group of users.

Buttons and/or links on the page

Element	Description
	Opens a window to enter the text.

Parametric e-mail elements

List of parametric elements

The list of available parametric elements for send e-mail events is provided below:

Element	Description
${process}	Process code.
${process.desc}	Description of the data collection process.
${scenario}	Scenario code.
${scenario.desc}	Scenario description.
${period}	Period code.
${period.desc}	Period description.
${entity}	Entity code (entity/node/journal).
${entity.desc}	Entity description (entity/node).
${entityname}	Value of the name assigned to the Entity dimension in the general configuration.
${dimension}	Dimension (entity/analytical dimension/custom dimension) code. Only for process hub.
${dimension.desc}	Description of the dimension (entity/analytical dimension/custom dimension). Only for process hub.
${dimension.codeDesc}	Code and description of the dimension (entity/analytical dimension/custom dimension). Only for process hub.
${rootUrl}	Address of the server with which the request that originated the event associated with the e-mail was started.
${step}	Step code.
${step.desc}	Step description.
${user}	Code of the user who originated the event.
${user.desc}	Description of the user who originated the event.
Submission events	
${journal}	Journal code, only for journal submission.
${journal.desc}	Journal description, only for journal submission.
${message}	Note added during an entity rejection step.
${rejectionNote}	Comment added during a dimension rejection step. Only for process hub.
${dimension.details}	Code, Description and Comment added in the dimension approval or rejection step. Only for event types "Send Summary Email for rejected elements" and "Summary Email on Task Completion". Only for process hub.
${daysBeforeExpiration}	Only with the option to send reminders for the submission of entities. Number of days before the submission deadline.
Intercompany matching events	
${cockpit}	Code of the intercompany matching cockpit.
${entityctp}	Counterparty entity code.
${entityctp.desc}	Counterparty entity description.
${customdim2}	Code of the custom dimension 2 element on the open intercompany cockpits with relationship type: by entity/custom dimension 2.

Element	Description
${customdim2.desc}	Description of the custom dimension 2 element on the open intercompany cockpits with relationship type: by entity/custom dimension 2.
${customdim2ctp}	Code of the counterparty custom dimension 2 element on the open intercompany cockpits with relationship type: by entity/custom dimension 2.
${customdim2ctp.desc}	Description of the counterparty custom dimension 2 element on the open intercompany cockpits with relationship type: by entity/custom dimension 2.
${customdim2name}	Value of the name assigned to custom dimension 2, used for open intercompany cockpits with relationship type: by Entity/Custom dimension 2.
Data processing events	
${*<parameter>*}	Data processing parameter chosen by the user (e.g. ${aziendaList}, ${scenarioPeriodoOriginarioList}, ${scenarioPeriodoConsolidamentoList}...).
${elaborationError}	If the data processing has failed, this is defined as *True*.
Task workflow task events	
${Usertype}	The possible values are: • 1: the entity is an entity or contributor node. • 2: the entity is a consolidator node.
${activity}	Code of the task performed.
${task}	Code of the task performed. Only for process hub.
${task.desc}	Description of the task performed. Only for process hub.

Snapshot

Contents

This section covers the following topics:

Snapshot management 508
Snapshot - Requirements page 508

Snapshot management

Application database > Processes tile > select process > > Process setup > (Data processing section) Snapshot >

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup (Data Processing section) > Snapshot >

Enable snapshots on the traditional process

To enable the snapshot utility, select the 'Snapshot' option in the 'Data Processing' section.

"This procedure allows you to select the dimensions based on which the snapshot will be carried out for the relevant process.

1. In **Run by**, select the time dimension on which to record the snapshot data.

   ***Note**: when the "By Process" time dimension is chosen, the snapshot scenario cannot be related to the process containing the scenarios to be copied.*

2. in **Dimensions on which to filter**, select the dimensions to be used for filtering the data to be copied onto the snapshot scenarios of the process.
3. Click **Save**.

If you are working on a financial planning process, you must also create a snapshot scenario for the *Event scenario*.

***Note**: Periods do not need to be opened for the Event scenario snapshot, since this is a system scenario that does not need to be loaded by the user.*

Snapshot - Requirements page

Admin

Application database > Processes tile > select process > > Process setup > (Data processing section) Snapshot >

Application database > Navbar > Processes & Workflows > Process > select process > > Process setup (Data Processing section) > Snapshot >

Purpose of the page

This page allows you to set the requirements for copying data from an original scenario onto snapshot scenarios, and vice versa to restore data from snapshot scenarios to original scenarios.

Page fields

Section	Description
Run by	Defines the time dimension from which to copy snapshot data: • **By Process** • **By Scenario** (includes all periods of the indicated scenario) • **By Scenario/Period**
Dimensions on which to filter	Defines the data to be included in or restored to the snapshot: • **Snapshot by entity**: snapshot data filtered by entity can be copied/restored; the desired entities can then be selected in the create or restore phase. If the snapshot is not defined by entity, the data processing can only been run if positioned on the root. • **Category**: snapshot data filtered by one or more category can be copied/restored; the desired categories can then be selected in the create or restore phase. • **<Custom dimension 1, 2, 3..5>.**: snapshot data filtered by one or more custom dimensions can be copied/restored; the desired custom dimensions can then be selected in the create or restore phase. ***Note**: when this parameter is not defined, if the snapshot is run by the administrator, the data processing automatically copies the FX rates, tax rates and interest rates. When the snapshot is created by the user, that data must be copied manually by the administrator.*

The processes cockpit

Contents

This section covers the following topics:

Process cockpit function 510
Process data management 510
Cockpits: common elements 511

Process cockpit function

Introduction

The process cockpit is the tool with which users work on processes. It has two views:

- the *contributor cockpit* which allows contributor users to perform data entry, run journals, run data processing and submit/reject data on the entities and steps of the process.
- the *consolidator cockpit* which allows consolidators to supervise the data entry activities of contributors and to proceed with data submission on nodes and steps of the process.

Users who access the process cockpit only see the entities (entities and nodes) for which they are authorised according to the user rights defined by the administrator. The cockpit is therefore structured differently depending on the user running it.

Process data management

Lock and unlock data

This function modifies the editability of data belonging to nodes and entities for specific steps. It acts on the possibility of manually entering the gross and intercompany FS balances and entity and consolidation journals into the system.

The system allows you to safely run the data processing, even during the data entry step. To prevent data from being changed while the data processing is underway, it allows you to temporarily lock the editability of an entity for several scenarios/periods, regardless of its submission status. Users cannot therefore edit that data, regardless of their rights or the submission status.

The editing of data processing data can be locked or unlocked from both the contributor cockpit and the consolidator cockpit. To do this, the following conditions must be met:

- Data processing must be enabled with the related function and for the role related to the user profile on the Repository (see I ruoli).
- For the contributor, there must be at least one of the original scenarios/periods visible to the user and belonging to the process with which the cockpit was accessed. The proposed entities are those that have been selected and/or belong to the nodes selected on the cockpit, which belong to the selected scenarios/periods, selected from the entities visible to the user that are not “only counterparty” or “consolidator’s only” in at least one of the original scenarios/periods (see "Contributor Cockpit" on page 512).
- For the consolidator, there must be at least one node to consolidate in the selection with which the data processing is run. The selected nodes to be consolidated will be prepared by the cockpit, visible to the user and belong to the process (see "Consolidator cockpit" on page 548).

Cockpits: common elements

User


Processes tile > select process > Contributor

Navigation panel > Contribute > Processes > select process > Contributor

Application database > Processes tile > select process > Consolidator

Application database > Navbar > Processes > select process > Consolidator

Buttons appearing on both cockpits

Button	Description
	Allows you to access the contributor or consolidator cockpit.
	Allows you to insert notes and/or attachments.  : notes and/or attachments present
	Creates a page bookmark that can be added to the **Favorites** section of the home page.  : bookmark already created
	Manage cockpit display preferences (e.g. visibility and width of columns, minimised areas of the display). The following actions are available: • **Save preferences** • **Restore preferences** Preferences remain valid for subsequent log-ins.  : preferences already set.
	Close the cockpit and return to the previous page.

The contributor cockpit

Contents

This section covers the following topics:

Contributor Cockpit ... 512
Contributor Cockpit page ... 513
Overview tab ... 514
Detail summary tab ... 516
Working in the Summary tab ... 518
Working in the Detail summary tab ... 518
Step tab ... 519
Organisation section of the <step> tab ... 520
Workflow section of the <step> tab ... 521
Working in the step tab ... 522
Performance Dashboard ... 523
Performance dashboard tab ... 524
Working in the Performance Dashboard tab ... 526
Working on process reports (contributor) ... 527
Actions section of Detail summary and step tabs ... 528
Preliminary checks ... 534
Restore ... 534
DTP activity cockpit ... 535
Partition data details window ... 536
Journals book window (for the contributor) ... 536
Drill down parameters page (ad-hoc analysis) ... 539
Allocations and closing: entries detail page ... 540
Pick-up check report window (contributor) ... 542
Copy amounts and journals window ... 543
Submission status window (contributor) ... 545
Entities submission status window ... 546
Lock data and Unlock data windows ... 547

Contributor Cockpit

What it allows you to do

The contributor cockpit allows contributor users to do the following:

- View summary information on data collection and submission status.
- Run actions on process steps, such as data entry, data processing, and data submission and/or rejection.

Information visible to the contributor user

In the cockpit, all contributors view the contributor steps or mixed contributor/consolidator steps of the task workflow. On the displayed steps, the user only sees the organisational hierarchy for which they are authorised to work and, within it, all the entities not labelled as “Only CTP” or “Only consolidator data” on which they are authorised to run operation or submission activities.

The contributor cockpit is therefore structured differently depending on the user viewing it, but also depending on the process characteristics. The number and type of activities and data processing also depends on the process rule settings.

The task workflow of steps

Task workflow activities can be viewed as a chart or a list. In contrast to the list, the chart allows you to distinguish between activities to be run in parallel or in sequence. In the chart, every activity is represented by an icon coloured according to the activity's progress status.


The list also contains details of every activity, namely the type of activity, the description, the progress status, the date the status last changed and the user who made that change. Activities can be accessed regardless of their order, but to declare one of them complete, all previous activities must have already been declared complete.

Therefore, the step cannot be submitted (submission task is grey) until all tasks have been completed.

Task workflow example

This example shows a task workflow containing both activities to be run obligatorily in sequence, and activities to be run in parallel. In particular, activities such as *Checkpoint* or *HR Analysis* cannot be run until the previous activity or group of activities is complete.

The *Expense analysis*, *Employee Transfer Management* and *Review Attrition Report* activities can be run and submitted in parallel, but only when the *Set Employee Work Hours* field has been filled.

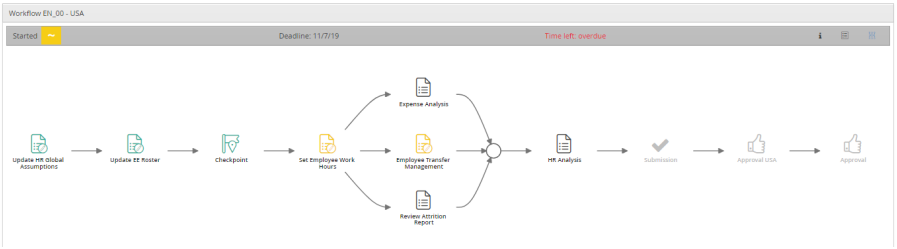

Details of the progress of individual activities.

Activity complete status can be set manually or applied automatically after the desired activity has been performed. Automatic completion takes place by default for activities that run data processing, or it can be overridden on the type of activity in the activity definition step.

Activities are considered optional when they are not significant for the purposes of submitting the entity. This rule is set by the administrator in the activity creation phase.

See "Workflow section of the <step> tab" on page 521.

Contributor Cockpit page

User

Processes tile > select process > Contributor


Navigation panel > Contribute > Processes > select process > Contributor

Purpose of the page

This page allows you to carry out all actions that are enabled on the processes, i.e.:

- enter data and journals
- run data processing and reports
- submit data

What it looks like

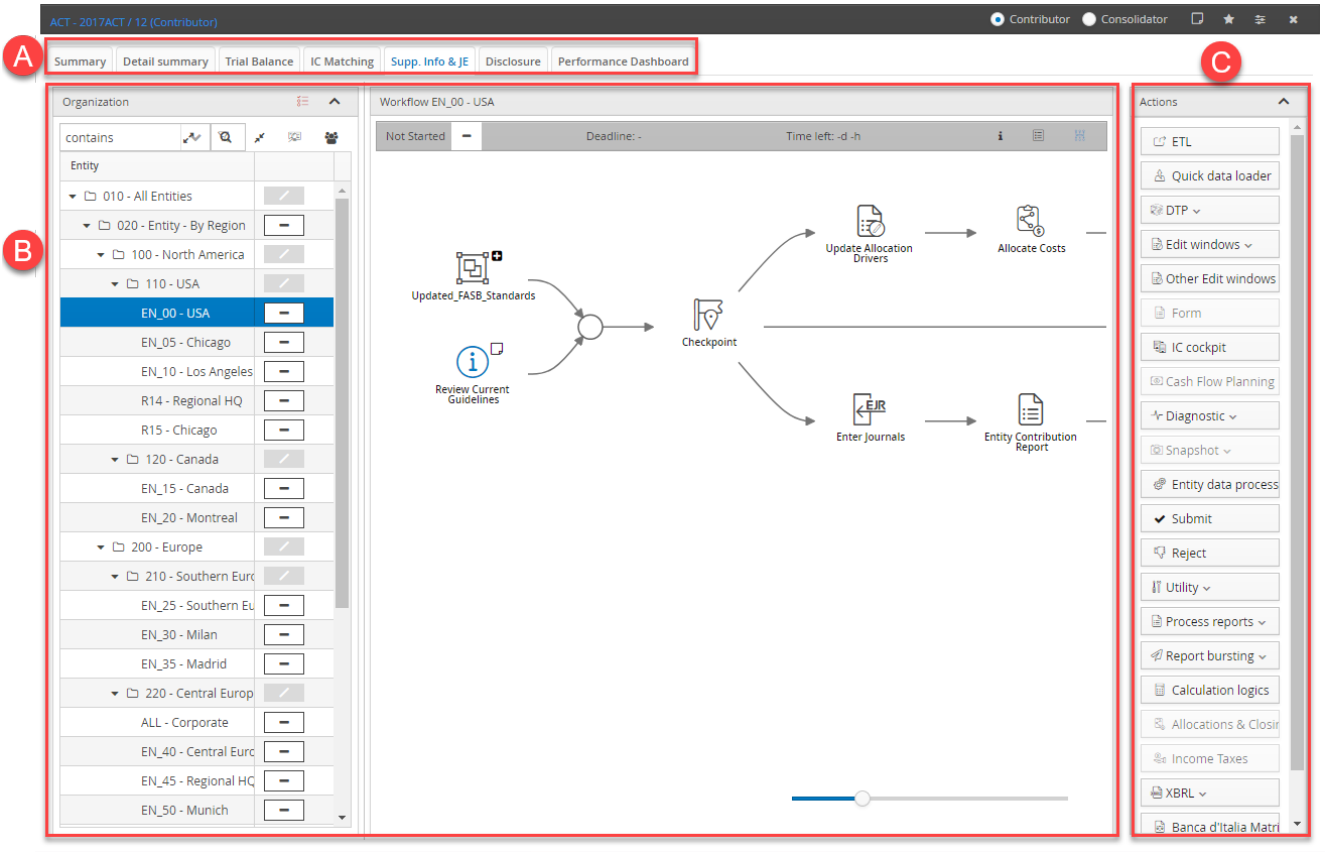

Element	Description
A	Navigation tabs
B	Specific content of the selected navigation tab
C	Actions section

Overview tab

User


Application database > Processes tile > select process > Contributor > Overview

Navigation panel > Contribute > Processes > select process > Contributor > Overview

Purpose of the tab

This tab allows you to view summary information on data submission status within steps of the specific process.

What it looks like

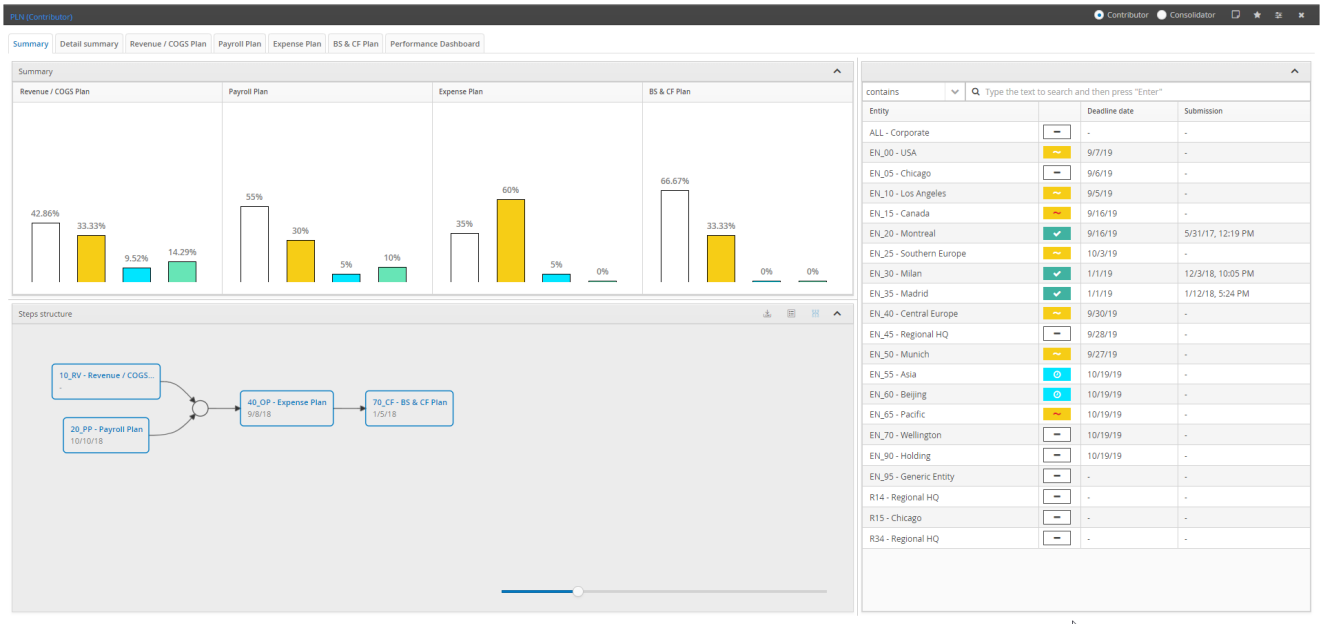

Page sections

Element	Description
Summary charts	Displays a bar chart for every step of the process. Every bar of the chart relates to a specific submission progress status and shows the percentage of entities that currently have that status. The colour of the bar shows the progress status for activities and submission: • White: activity to be started • Yellow: activity underway • Blue: submission underway • Green: submission complete
Steps structure	Displays the steps of the process as a chart or list. In contrast to the list, the chart allows you to distinguish between activities to be run in parallel or in sequence. The deadline is displayed for every step, if defined in the process settings.
List of entities	Displays the list of entities involved in the process. In particular, it displays the following: • status and percentage progress of data collection/processing/submission activities • submission deadline • date on which submission occurred When the user clicks on a submission status indicator in the step columns in the summary chart (see Indicatori di stato di avanzamento per fase), the list of entities displays the entities that currently have the selected status for the selected step.

Buttons and/or links in the Steps Structure section

Element	Description
	Download steps structure in XLS format.
	Display steps structure as a list.
	Display steps structure as a chart.
	Minimises the entire lower section of the pane, leaving only the title bar visible, and resizes the other areas to use all available space. Allows you to hide data not of interest to the user, and makes navigation easier on mobile devices (tablets or small notebooks).

Progress indicators by step

Element	Description
	The step is not significant and does not require activities for the entity.
	No activity has been performed yet. On a node, this indicates that none of the node's entities have performed activities.
	On an entity, this indicates that data collection and submission activities are underway. On a node, this indicates that the entities belonging to the node have different statuses.
	The entity has been submitted. All data is submitted and locked, ready to be processed.
	The entity has been rejected by the higher-level node manager. Other data can be entered.
	All of the node's entities have been submitted. The node can be certified.
	The approval process for approval tasks and submission tasks has not yet been completed for the entity.

Detail summary tab

User

Application database > Processes tile > select process > Contributor > Detail summary


Application database > Navbar > Processes > select process > Contributor > Detail Summary

Purpose of the tab

This page allows you to:

- View the progress status of the submission of each node and entity over the various steps.
- Run data processing, submit and reject data, run actions on the steps of one or several entities or one or several nodes.

What it looks like

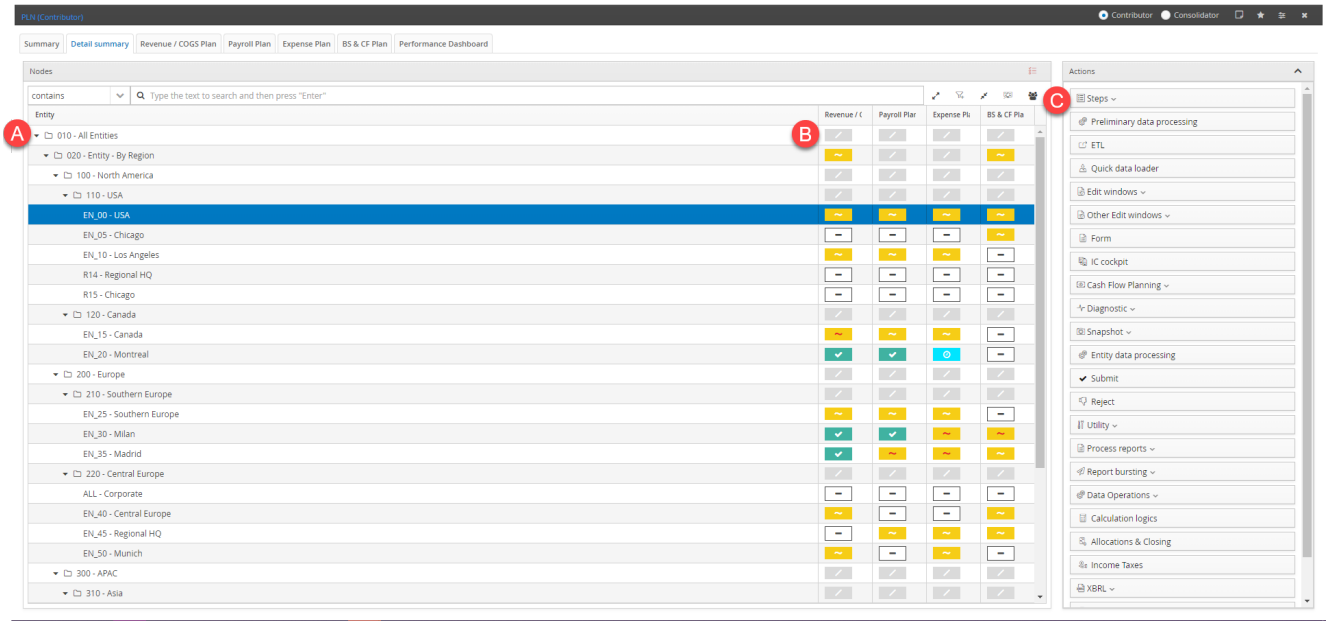

Element	Description
A	Section showing the list of nodes and entities of the process on which the user is authorised to work.
B	Section showing progress of nodes and entities for every step.
C	Section showing available actions for the selected nodes and entities.

Page sections

Element	Description
Nodes	List of the nodes underlying entities present in the organisational hierarchy associated with the process on which the user is authorised to work.
Columns <step>	Entity/node progress status by step.
Actions	Available actions for the selected entities/nodes.

Buttons and/or links in the Nodes section

Element	Description
	Enables multi-row selection to allow mass changes.
	Filters entities in the hierarchy based on what is set in the filter.
	Expands the organisational hierarchy's entity tree.
	Opens a window to select advanced search criteria.
	Compresses the organisational hierarchy's entity tree.
	Shows the log of submission/rejection/approval activities for the selected entities.
	Shows the users responsible for the selected entities.

Progress indicators by step

Element	Description
	The step is not significant and does not require activities for the entity.
	No activity has been performed yet. On a node, this indicates that none of the node's entities have performed activities.
	On an entity, this indicates that data collection and submission activities are underway. On a node, this indicates that the entities belonging to the node have different statuses.
	The entity has been submitted. All data is submitted and locked, ready to be processed.
	The entity has been rejected by the higher-level node manager. Other data can be entered.
	All of the node's entities have been submitted. The node can be certified.
	The approval process for approval tasks and submission tasks has not yet been completed for the entity.

Working in the Summary tab

User

Application database > Processes tile > select process > Contributor > Overview

Navigation panel > Contribute > Processes > select process > Contributor > Overview

Filter entities in the hierarchy

1. In the entity list section, click ⌄ and select the rule to filter.
2. Enter the word by which to filter and click 🔍: the search result will appear in a table.

View the percentage of entities with a specific status

In the summary charts section, move the mouse over the desired column: a tooltip will appear with the name of the progress status for the column and the percentage of entities that have that status.

View details of entities with a specific status

In the summary charts section, click on the desired bar: the entity list section will display the name of the step and the progress status in the header and the list of entities that have said progress status.

View the submission deadline of a step

In the step structure section, move the cursor over the desired step: a tooltip will appear with the name of the step and the relative submission deadline.

Working in the Detail summary tab

User

Application database > Processes tile > select process > Contributor > Detail summary

Application database > Navbar > Processes > select process > Contributor > Detail Summary

Filter entities in the hierarchy

1. In **Nodes**, click and select the rule to filter.
2. Enter the word by which to filter and click : the search result will appear in **Entity**.
3. (optional) To set advanced filters, click .

Run actions on entities

1. Select one or several entities or nodes.
2. In **Actions**, click on the button for the desired action or, if the button contains a sub-list of actions, click and select the specific desired action.
3. If the selected action requires other requirements or filters to be set, set them in the dedicated window.
4. Confirm the action.

Step tab

User


Application database > Processes tile > select process > Contributor > select step tab

Navigation panel > Contribute > Processes > select process > Contributor > select step tab

Purpose of the tab

This tab allows you to view data on the activities of a single step, run data processing, submit or reject data and perform actions on the step data.

What it looks like

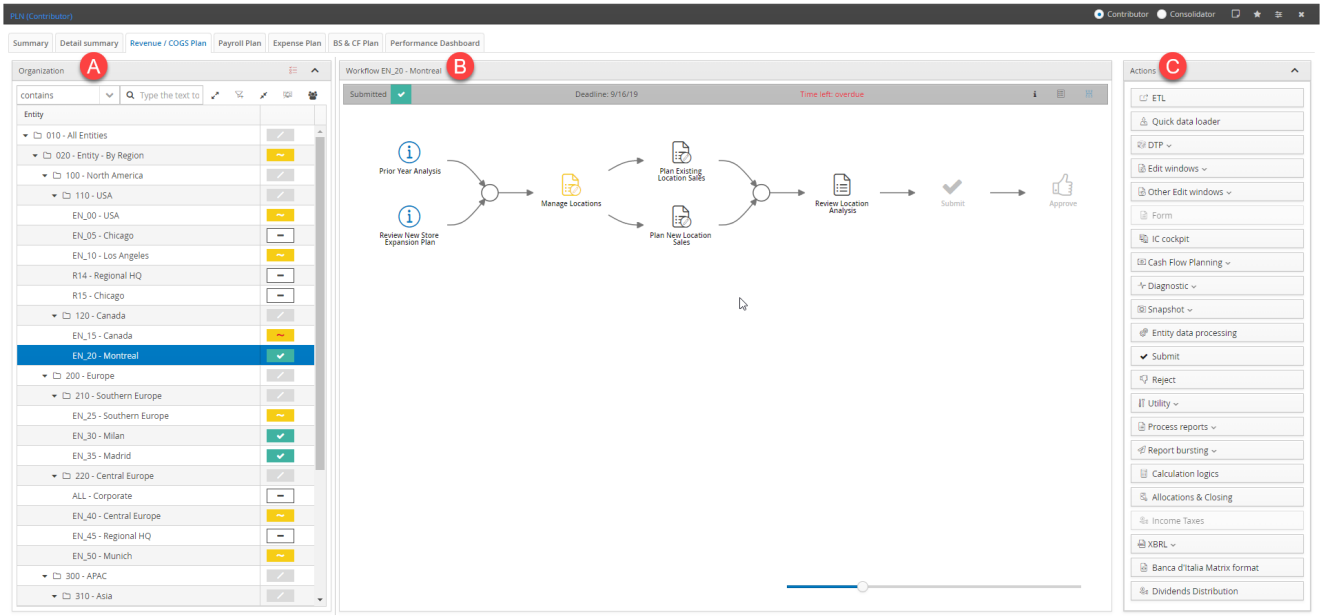

Element	Description
A	Organisation
B	Workflow/Actions
C	Actions

Elements in the tab

Element	Description
Organisation	Shows the following: • Entities present in the organisational hierarchy associated with the process on which the user is authorised. • Submission progress indicators for every entity.
workflow	Only displayed if a single entity is selected. Shows the workflow chart for the tasks of the selected entity.
Common actions	Only displayed if several entities are selected. For more details on multiple selection, see "Organisation section of the <step> tab" below). Shows the following: • the latest of the deadlines for submission defined in the process for the selected entities • the available actions on the group of entities, as common actions • the time remaining from today's date until the deadline • the list of individual actions by entity (from among those selected) and the status of each of them
Actions	Available actions for the selected nodes and entities. ***Note**: not displayed if several entities are selected.*

Organisation section of the <step> tab

User

Application database > Processes tile > select process > Contributor > select step tab

Navigation panel > Contribute > Processes > select process > Contributor > select step tab

Section buttons and/or links

Element	Description
	Enables multi-row selection to allow mass changes.
	Minimises the **Organisation** section, leaving only the title bar visible.
	Filters for a subset of elements. ***Note**: the entities to be displayed can be filtered by code or by description.*
	Expands the organisational hierarchy's entity tree.
	Opens a window to select advanced search criteria.
	Compresses the organisational hierarchy's entity tree.
	Shows the log of submission/rejection/approval activities for the selected entities.
	Shows the users responsible for the selected entities.

Progress by entity

Element	Description
	The step is not significant and does not require activities for the selected entity.
	No activity was carried out.
	Data collection and submission activities are underway.
	The entity has been submitted. All data has been submitted and locked, and can be processed.
	The entity has been rejected by the higher-level node manager. Other data can be collected.
	Submission has still not been completed for the entity.

Workflow section of the <step> tab

User

Application database > Processes tile > select process > Contributor > select step tab

Navigation panel > Contribute > Processes > select process > Contributor > select step tab

Section buttons and icons

Element	Description
	Shows the colour legend.
	Shows the activities as a list.
	Shows the activities as a chart.
	If present, this shows any notes inserted by the administrator.

Element	Description
	If present, this shows any attachments added by the administrator.
	Indicates that the user is not authorised to run the activity.
	Shows the grouped activities.

Progress indicators for the activity

Only with task workflow displayed in list view.

Element	Description
	Activities to be started
	• Activities in progress. • Activities to be rerun because the previous activity has been rerun.
	Activity completed
	Optional activities

Types of activity

See "Business Workflow task icons" on page 384.

Actions on the task workflow activities

Element	Description
Click on the activity icon	Opens the menu of actions available on the activity. • **Open form in Web** • **Open form in Excel** • **Run** • **Task is Complete** • **Set task as not complete**

Working in the step tab

User

Application database > Processes tile > select process > Contributor > select step tab

Navigation panel > Contribute > Processes > select process > Contributor > select step tab

Filter entities in the hierarchy

1. In **Nodes**, click ⌄ and select the rule to filter.
2. Enter the code or description by which to filter and click 🔍: the search result will appear in **Entity**.
3. (optional) To set advanced filters, click .

Display the workflow of tasks of an entity in a step

1. In **Organisation**, select the desired entity: the relative task workflow will appear in **Workflow**.
2. To change the display mode, select (list) or (chart).

View details of the last change to an activity

Move the cursor over the desired activity: a tooltip will appear with the date of the last change made to the activity and the name of the user who made it. This information is updated whenever the execution of the non-optional task ends without blocking errors or upon execution of **Task is Complete** or the **Set task as not complete**.

Run actions on the step

1. Select one or several entities or nodes.
2. In **Actions**, click on the button for the desired action or, if the button contains a sub-list of actions, click ⌄ and select the specific desired action.
3. If the selected action requires other requirements or filters to be set, set them in the dedicated window.
4. Confirm the action.

Open forms for a task workflow activity

1. Select an entity from the hierarchy: the workflow of the entity's tasks on the step will appear in **Workflow**.
2. Click on the icon relating to the desired data entry form, then choose **Open Form in Web** or **Open Form in Excel**.

Run or terminate an activity in the workflow

1. Select an entity from the hierarchy. The workflow of the entity tasks on the step will appear in **Workflow**.
2. Click on the icon for the desired activity, then choose **Run** or **Task is Complete**.

Act on entity activities in multi-select mode

1. Select the desired entities simultaneously: the **Actions** section will appear.
2. Click **Detailed task list**: the list of available activities on the selected entities will appear.
3. Select one or several activities: the **Done**, **To do** and **Run selected tasks** fields will appear at the bottom of the table.
4. Select the field related to the desired activity.

Run all data processing of grouped activities (chart view)

1. Select the desired entity.
2. Click ⚙⁺ and then on **Run**: all data processing of the selected grouped activities will run. The group can be opened and individual tasks can be run if you click **+** at the top, to the right of the icon.

Performance Dashboard

What is it for

The **Performance Dashboard** tab on the contributor cockpit allows you to view *metrics*, namely the following statistical data on submission activities:

- delay days compared to the scheduled submission date
- days of activity needed for data entry
- number of rejections carried out before definitive submission

The tab has two views:

- **Performance for process**, where it displays average statistical data calculated for all of the process's submitted entities.
- **Performance for entity**, where it displays real data for specific entities or selected nodes.

Data display options

In both views, data can be filtered by individual step, contributor type or mixed contributor/consolidator, or on all steps of the process.

In **Performance for entity** view, filters can be applied to the entities to display (e.g. level of child entities to display, or only entities that have run submission in time).

In **Performance for process** view, the metrics of the process in question can be compared with metrics of other processes. In this case, below the average calculated for the process, the following will be displayed:

- the average calculated for the compared process
- the difference between the averages of the process and the compared process, with an indication of whether the latter is higher, lower or the same as the average of the reference process.

Note :comparison with metrics from other processes only makes sense if processes having the same business workflow (and thus the same steps) are selected.

Performance dashboard tab

User


Application database > Processes tile > select process > Contributor > Performance Dashboard

Application database > Navbar > Processes > select process > Contributor > Performance Dashboard

Purpose of the tab

This tab allows you to view metrics or statistical data on the submission of the process or the submission of individual steps. The statistics are only calculated on entities already submitted.

What it looks like

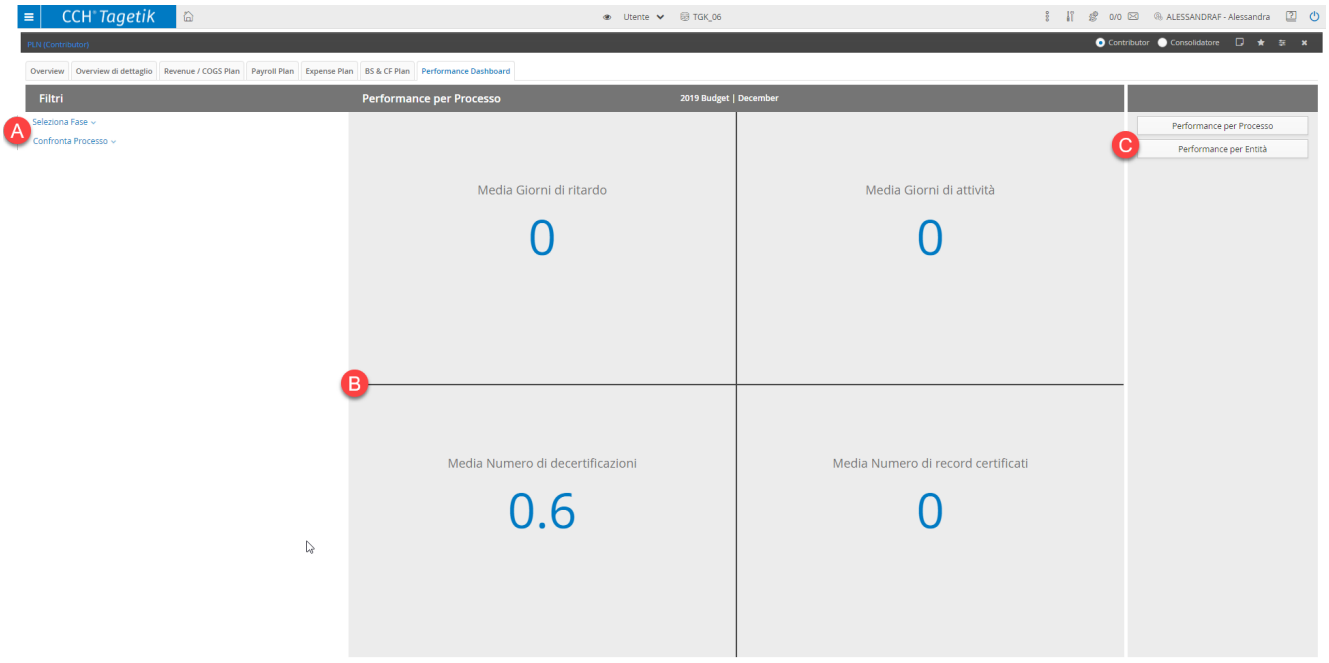

Element	Description
A	Filters
B	Display metrics section
C	Performance type selection

Elements in the tab

Element	Description
Filters	Filters on information to be displayed
Performance	Display metrics section

Element	Description
Performance type selection	Selection of performance type for which to display metrics
Additional information	Only displayed by selecting **Performance for Entity** and clicking on the columns in the chart of metrics by entity. Shows the following specific information for the relevant entity: • **Number of submitted records** • **Activity days** • **Number of submissions** • **Delay Days** • **Non-blocking errors**

Performance type selection options

Element	Description
Performance for process	In the **Performance** section, it displays performance metrics by process.
Performance for Entity	In the **Performance** section, it displays performance metrics by entity.

Options in the Filters section

Element	Description
Step selection	Selects the step or steps for which to display metrics. • **All the steps**: displays data on all steps of the process. • **<Step>**: displays data on the selected contributor or mixed contributor/consolidator step. selected
Compare process	Only for **Performance for process**. Selects another process with which to compare the metrics for the reference process. The following information will then be displayed in the **Performance** section: • metrics of the reference process • metrics of the compared process • difference between the metrics of the reference process and those of the compared process, with an indication of whether the average is higher, lower or the same. The comparison can only be performed with processes that manage the same number of cycles (submission by scenario/period or single submission).
Select metric	Only for **Performance for Entity**. Selects the metrics to display in the **Performance** section for the selected entity or entities. • Delay Days. See "Delay Days" on the next page. • Activity days. See "Activity days" on the next page. • Number of rejections. See "Number of rejections" on the next page.
Entity - Deploy	
Children	Only for **Performance for Entity**. Only displays data for the direct child entities of the selected node.
Lowest level	Only for **Performance for Entity**. Displays child entity data, down to the last level of the selected node. Selected by default.
On time submission	Only for **Performance for Entity**. Only displays entities that have performed submission by the deadline. Selected by default.
List of entities	Only for **Performance for Entity**. Allows you to select the node for which to display metrics according to the rules selected in **Entity - Deploy**.

Details of the Performance tab

Element	Description
Avg. Delay days	Only for **Performance for process**. Displays the average number of delay days in the submission of entities in the process. The average is calculated on the number of days between the submission deadline and the date of the last submission on the entities. The calculation only considers entities for which a submission deadline has been defined.
Avg. Activity days	Only for **Performance for process**. Displays the average number of days needed for data entry. The average is calculated from the data entry start date to the date of the last submission. The calculation only considers entities for which data entry has started.
Avg. Number of rejections	Only for **Performance for process**. Displays the average number of rejections carried out on the entities before definitive submission.
Delay Days	Only for **Performance for Entity**. Displays the average number of delay days in the submission of the entity. The average is calculated on the number of days between the submission deadline and the date of the last submission on the entity. The information is only available for entities for which a submission deadline has been defined.
Activity days	Only for **Performance for Entity**. Displays the average number of days needed for data entry. The average is calculated from the data entry start date to the date of the last submission. The information is only available for entities for which data entry has started.
Number of rejections	Only for **Performance for Entity**. Displays the average number of rejections carried out on the entity before definitive submission.
Entity progress bar	Only for **Performance for Entity**. Allows you to view all available metrics for the entity. • **Activity days** • **Number of rejections** • **Delay Days**

Options in the Performance section

Element	Description
Order	Only for **Performance for Entity**. This allows you to select how the displayed information will be ordered: • **Top 10**: the top 10 entities to have been submitted before the deadline. • **Top 5**: the top five entities to have been submitted before the deadline. • **Show all** (default) • **Bottom 5**: the last five to have been submitted. • **Bottom 10**: the last 10 to have been submitted.

Working in the Performance Dashboard tab

Application database > Processes tile > select process > Contributor > Performance Dashboard

Application database > Navbar > Processes > select process > Contributor > Performance Dashboard

View process metrics

1. In the performance types section, click **Performance for process**.
2. In **Filters** click **Step selection** and choose **All the steps**: the average of the metrics calculated on all steps of the process will appear in the **Performance for process** section.

View the metrics of a step

1. In the performance types section, click **Performance for process**.
2. In **Filters** click **Step selection** and choose the desired step: the step metrics will appear in the **Performance for process** section.

Compare the process with another process

1. In the performance types section, click **Performance for process**.
2. In **Filters** click **Step selection** and choose **All the steps**.
3. Click **Compare process**: the list of processes with which a comparison can be run will be displayed.
4. (Optional) To view non-active processes too, click **Include not active**.
5. Choose the desired process: the metrics calculated for the process in question, the metrics for the compared process, the differences between the averages of the two processes and an indication of whether the calculated differences are higher, lower or the same as the metrics of the process in question will appear in the **Performance for process** section.

View process metrics by entity

1. In the performance types section, click **Performance for Entity**.
2. In **Filters** click **Step selection** and choose **All the steps**.
3. Click **Select Metric**, then choose the desired metric.
4. In the list of entities, click on the desired entity: the metric calculated for the selected entity on all steps of the process will appear in the **Performance for Entity** section.
5. (Optional) Click on the entity's progress bar to view details of the metrics available for the entity.

View metrics of a step by entity

1. In the performance types section, click **Performance for Entity**.
2. In **Filters** click **Step selection** and choose the desired step.
3. Click **Select Metric**, then choose the desired metric.
4. In the list of entities, click on the parent node: the metric calculated for all the process's entities on the selected step will appear in the **Performance for Entity** section.
5. (Optional) To view details of the metrics available for the entity, click on the entity's progress bar.

View metrics for entity nodes

1. In the performance types section, click **Performance for Entity**.
2. In **Filters** click **Step selection** and choose the desired steps.
3. Click **Select Metric**, then choose the desired metric.
4. In **Entity - Deploy**, select the level of child entities to display for the desired node.
5. (Optional) To view entities that have run submission late, select **On time submission**.
6. In the list of entities, click on the desired node: the metric calculated on the step or steps selected for the node and any levels of child entities will appear in the **Performance for Entity** section.
7. (Optional) To view details of the available metrics, click on the progress bar if the node or entity.

Working on process reports (contributor)

Introduction

This module details some of the procedures for generating reports on data of the process open in the contributor cockpit.

Extract a report on consolidation journals

 Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Journals book

 Application database > Navbar > Processes > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Journals book

1. In the **Journals filter** section, select the type of journal to display, any category or node of categories by which to filter the journals and, if desired, indicate one or several journals of the selected scenario/period.
2. In the **Rows filter** section, select the accounts to be included in or excluded from the report (only main accounts, result accounts) and specify the type and/or nature of the rows to be recovered on the selected accounts (detail, variation, normal) and their origin.
3. In the **Scenario/period** section, select the desired scenario/period.
4. In **Grouping and Sorting**, define the grouping and sorting mode for the headers of journals and rows in the report table.

Generate an ad-hoc analysis report

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Ad-hoc analysis

Application database > Navbar > Processes > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Ad-hoc analysis

In the ad-hoc analysis filters table, the **Scenario**, **Period**, **Entity** and **Amount type** dimensions must be defined. Do the following on every row of every dimension.

1. In **Filters**, select the type of value to be included in the analysis, then set the desired value.
2. (Optional) To make the form display all details to the highest level for the analysed data, select the **Detail** option, then select the desired display mode.
3. (Optional) To add filters from other dimensions, click ⊕ and repeat steps 1 and 2 to set a new dimension filter on the new row.
4. To obtain the analysis results in XLSX format, click **Download**, otherwise click **Next** to view them in a pivot table.

Actions section of Detail summary and step tabs

User

Application database > Processes tile > select process > Contributor > select Detail summary/step tab

Application database > Navbar > Processes > select process > Contributor > select Detail summary/step tab

Element	Description
Steps	Only on the **Detail summary** tab. Allows you to move between tabs. See "Steps" on page 530.
Preliminary data processing	Only on the **Detail summary** tab. Allows you to run, for the selected entities, preliminary data processing on original scenarios for amounts and entity journals.
ETL	Allows you to run one of the ETL jobs that have been set up for the process. See ETL.
Quick Data Loader	Allows you to load data via the Quick Data Loader utility, as an alternative to ETL. See Quick Data Loader function.
DTP	Only on the **Step** tab. Allows you to run the Analytical Workspace's *Data Transformation Packages*. See " Data Transformation Package (DTP)" on page 9.

Element	Description
Edit windows	Allows you to enter original gross amounts, intercompany entries and entity journals via the web interface. See "Edit windows" on the next page.
Other Edit windows	Allows you to enter reconciliation accounts and notes via the web interface. See "Other Edit windows" on the next page.
Form	Allows you to access data entry forms.
IC cockpit	Allows you to run intercompany matching from a dedicated cockpit. See "The IC matching cockpit" on page 591.
Cash flow planning	Allows you to access Cash Flow Planning data processing management windows. See "Cash flow planning" on the next page.
Diagnostics	Allows you to run diagnostics and access the results log. See "Diagnostics" on page 531.
Snapshot	Only with Snapshot active. Allows you to create and restore snapshots. See Snapshot
Entity data processing	Allows you to run entity data processing enabled for the process on the original scenario. In submission by scenario/period processes, the list of scenarios to process can be edited. ***Note**: The user must select the original scenarios/periods and data processing to perform. The system only processes entities included in the scenario/period selected in the cockpit. To process entities present in process scenarios other than the one from which the cockpit was opened, the cockpit must be accessed by selecting the scenario/period in which the entity is present or the data processing must be run from the consolidator cockpit.*
Submit	Manage submission and approval activities for which the user is authorised, on the selected entities. • In the **Detail summary** tab, this opens a window to select the original scenarios/periods and step up to which you want to submit. • In a step tab, this automatically sets the value of the necessary parameters and runs the submission. See Data Processing > Submission.
Reject	Manage the rejection of entities selected by the higher node manager. • In the **Detail summary** tab, this opens a window in which you can select the original scenarios/periods and the step up to which you want to perform the rejection and potentially insert a note and the reasons for rejection. • In a step tab, this automatically sets the value of the necessary parameters and runs the rejection. See Data Processing > Submission.
Utilities	Allows you to copy amounts, entity journals and notes between scenarios, lock and unlock data entry, update the submission status of entities based on the data entered, and copy CFP data and overrides. See "Utilities" on page 531.
IC spreading	Only if intercompany spreading is enabled on the process and on data processing and if the process relationship type set to by entity/custom dimension 2. Allows you to run intercompany spreading data processing. See IC Spreading .
Process reports	Allows you to generate system reports, i.e. reports related to data processing and process data. See "Process reports" on page 532.
Report bursting	Allows you to manage report bursting data processing. See "Report bursting" on page 533.
Data Operations	Only on the **Detail summary** tab. Allows you to run operations related to the forecast and data calculation and monthly splitting on scenario data. See "Data Operations" on page 533.
Calculation logics	Allows you to run calculation logics en masse for the selected process, or filter calculation logics based on process scenarios and periods. See Processes cockpit - Contributor – Calculation logics .

Element	Description
Allocations & Closing	Allows you to run routines or rules of the execution plan for allocations and closing. See Allocazioni e closing > Overview.
Income Taxes	Allows you to calculate taxes for the year. The data processing only works on amounts, specifying deductible accounts, adjustments and tax credits.
XBRL	Allows you to select an instance to process, generate XBRL files and manage exported files. See Generate Xbrl instance.
Banca d'Italia Matrix format	Allows you to generate text files in the specific format that the Bank of Italy requires of Italian banks to produce regulatory data for supervisory purposes.
Dividends distribution	If a distribution rule is set for the entity, this allows you to run the dividend distribution for the selected entity.

Steps

Element	Description
<step name>	Opens the tab for the selected step.

DTP

Element	Description
Activity cockpit	Opens the DTP activity cockpit. See "DTP activity cockpit" on page 535.
Warnings report	Opens a window containing the report of the anomalies found by the data processing for Data Transformation Package tasks. See "Warnings report" on page 12.
Checking rules	Opens the window containing the report of the checking rules for Data Transformation Package tasks. See "Checking rules report" on page 11.

Edit windows

Element	Description
Edit Amounts	Opens a page to enter original gross amounts from the web interface. See Gross Amounts page.
Edit IC	Opens a page to enter intercompany entries from the web interface. See IC amounts page.
Edit Entity journals	Opens a page to enter entity journals from the web interface. See Entity journals.

Other Edit windows

Element	Description
Edit Reconciliation accounts	Allows you to edit reconciliation accounts via specific windows.
Edit Notes	Allows you to edit notes via specific windows.

Cash flow planning

Element	Description
Profit & Loss	Shows the (gross and intercompany) amounts of the entity's P&L accounts for the selected scenario. See The projected P&L.
Project variations	Opens the window with the list of (normal or variation) BS accounts associated with an accounting rule, with the possibility of entering overrides. See Projected Variations.
Balance sheet	Opens the window with the balances of the available initial actual balance sheet accounts (most recent balanced actual balance sheet) by entity. See Initial Actual Balance Sheet.
Accounting entries	Double-entry journals at the user's full discretion, used to manage specific or exceptional cases. See Accounting entries.

Element	Description
L/T Financing	Opens the window with the list of entries related to financing requests and repayment. See Finanziamenti.
Assets	Opens the window with all entries related to the management of assets. See Cespiti.
FX rate hedging	Opens the window with the list of all entries related to the management of FX rate hedging instruments. See Coperture su cambi.
Weights	Opens the window with the list of available weights for weighting values on one or several entities. See Tipi Pesi e Pesi.
Calendar	Opens the list with the available payment and collection schedules for one or several selected entities. See Calendario pagamento.
Show entries	Opens the window with all entries generated by the system after planning data processing. See Report Dettaglio movimenti.

Diagnostics

Element	Description
Diagnose	Runs diagnostics for the selected entities. • In the **Detail summary** tab, this opens a window with customisable filters. The options give you the opportunity to update the results log. • In a step tab, this automatically sets the value of the necessary parameters for the relevant step and runs the diagnostics directly. See Diagnostic data processing.
Diagnose and update log	Only in a step tab. Runs diagnostics for the selected entity and step and updates the diagnostic results log. In the Detail summary tab, you can choose to update the log in the diagnostics results window. See Diagnostic data processing.
Diagnostic results log	Opens the diagnostic results log for the selected entities. • In the **Detail summary** tab, this opens a window to choose the step. • In a step tab, it displays the log for the selected step only. See Logging diagnostic data.

Utilities

Element	Description
Copy amounts and journals	Copy amounts, notes and entity journals from one active original scenario to another. ***Note**: the source scenario must be visible to the user, while the target scenario must be editable by the user.* See "Copy amounts and journals window" on page 543.
Lock data	Prevents any user from editing the data of the selected entities/steps, regardless of their rights and regardless of submission. See "Lock data and Unlock data windows" on page 585.
Unlock data	Unlocks locked data entry for the selected entities/steps. See "Lock data and Unlock data windows" on page 547.
Update status based on data	Updates the data entry and submission status of the selected entities. If selected for nodes, all the entities of the selected node will be updated.
Reset submission states	Resets the submission status of all entities for the selected scenario/period. The reset includes submission statuses on the contributor, consolidator and intercompany cockpits, the workflow tasks, and the “task complete” declaration for data entry in the forms.
Copy CFP Data and Overrides	Copies principal data, any overrides, and inter-entity cash flow planning events between processes. See "Cash flow planning" on the previous page.
IC Spreading	Allows you to run data processing for intercompany spreading, which writes off the existing intercompany declarations and reallocates the amounts to CTP custom dimension 2 based on the declarations made by the counterparty, maintaining the original unbalanced amounts. See Spreading IC.

Process reports

Element	Description
Journals book	Allows you to extract a report with all the journals entered on the entities. See "Journals book window (for the contributor)" on page 536.
Ad-hoc analysis	Runs the data analysis via drill down onto the CCH Tagetik dimensions. See "Drill down parameters page (ad-hoc analysis)" on page 539.
Allocations and closing: entries detail	Displays the journal entries generated by the data processing for allocations and closing. See "Allocations and closing: entries detail page" on page 540.
Pick-up check report	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to control the effect generated by Equity pick-up data processing on entities. For every direct investment relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference. See "Pick-up check report window (contributor)" on page 542.
Pick-up query	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to analyse in detail the pick-up journals generated by the Equity pick-up data processing on entities. The report is only available if **Generate detailed information for the pick up query** has been selected in the pick-up rules for the Equity pick-up data processing. See Equity pick-up data processing.
Entities submission status	Only on the **Detail summary** tab. Allows you to extract a report showing the following for each node: • entity submission statuses for every step of the process • the user that made the most recent status change, with the relative date If nodes are selected, the report only includes the entities belonging to the selected nodes.
Submission status	Only on the **Detail summary** tab. Allows you to extract a report showing submission statuses of the selected entities and of the nodes to which they belong, in the various steps, based on the root. See "Submission status window (for the consolidator)" on page 588.
Submission Status grouped by Entity Node	Only on the **Detail summary** tab. This allows you to extract a report showing, for each contributor node, the number of entities submitted and not submitted in the various steps, regardless of user rights. Access to the report requires the function (0001937) to be included in the user's role.
Submission Status grouped by Consolidation Method.	Only on the **Detail summary** tab. This allows you to extract a report showing, for each consolidation method, the number of entities submitted and not submitted in the various steps, regardless of user rights. Access to the report requires the function (0001937) to be included in the user's role.
Report Intercompany	Permette di estrarre un report con le partite intercompany (saldi IC e scritture per azienda) esistenti tra aziende appartenenti allo stesso gruppo. Vedi capitolo del Data entry (System Reports - Intercompany Reports).

Report bursting

Element	Description
Show generated files	• Shows the files generated by the report bursting data processing. • Allows you to download the generated reports. • Allows you to view the log of reports already sent to users.
Generate	Allows you to generate reports en masse based on a previously defined Collaborative Office document or a web form.
Send	Allows you to distribute the generated reports via email or FTP.
Generate and send	Allows you to generate and distribute reports simultaneously.

Data Operations

Element	Description
Forecast models	Allows you to define and run a Forecast model on the scenarios associated with the selected process. See Modelli di Forecast.
Algebraic operations	Allows you to run sequences of operations that enter, on a scenario, data obtained by combining data from other scenarios. See Algebraic Operations.
Custom Splitting on Periods	Allows you to run a monthly splitting routine that defines the periodic data of one or several accounts based on the cumulated data for a certain period. See Periodicizzazioni Custom.

Snapshot

What a snapshot is: Link to the page:Content/DataModel/DM_Snapshot_c.htm

How to set it up: link to the pages: Content/DataModel/DM_Snapshot_r.htm, Content/Processi/Cruscotti/P_Snapshot_t.htm

Create

If the snapshot is defined by entity, you can run the data processing by selecting one or more entities or a node (in this case, the data processing is run for all entities in the node).

If the snapshot is not defined by entity, the data processing can only been run if positioned on the root.

Running of the snapshot on the financial workspace is not affected by the filter on the steps. Therefore, the result is the same whether you run it from the Detail summary or from the individual steps.

Running of the snapshot on the analytical workspace is affected by the filter on the steps. Therefore, if you run it from the Detail summary, CCH Tagetik makes a copy of all the datasets associated with the process, while if you execute it from the individual step, the program only copies the datasets associated with the selected step. It considers only the reporting layer partitions.

The system recovers the data of the AIH partitions that refer to the scenario and period dimensions and the dimensions on which it is filtering.

The snapshot applies the user restrictions only on the time dimensions of the snapshot.

Element	Description
Version number	The version number of the snapshot on which to copy the data
Description	Any description of the operation you intend to run
Comment	Any comment on the operation you intend to run

Original scenarios	one or more original scenarios from which to copy the data, if the time dimension of the snapshot is "By scenario" or by "Scenario/Period"
Period	one or more periods from which to copy the data, if the time dimension of the snapshot is by "Scenario/Period"
Category	one or more categories from which to copy the data, if the snapshot is managed "By category"
Custom dimension	one or more elements of the custom dimension X from which to copy the data, if the snapshot is managed "By custom dimension X"

NOTE: The data processing copies the FX rates, tax rates and interest rates only if no "Dimensions on which to filter" have been defined and the snapshot is run centrally from the root. In case of non-centralised use, these data must thus be copied in advance by the administrator.

NOTE: The copy does not calculate totals and keeps the original origins of the data.

Preliminary checks

Before creating the snapshot scenario, the system verifies:

- that none of the scenarios to copy have been stored offline
- for each scenario to copy, that the corresponding snapshot scenario has opened the same periods, and that those periods have not been locked
- that there is a snapshot scenario of the event scenario related to the process, where the scenario to copy is related to a financial planning process

Snapshots on AIH

Based on the process and partition types of the dataset, the partitions are selected as per the table:

Process type	Partitioning of the Dataset	Data selection criterion
Scenario / period	Not partitioned	• The scenario/period columns are required • If the snapshot type is By entity, the partition must have an Entity column • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Scenario / period	Partitioning by business cycle	• The scenario/period columns are not required • If the snapshot type is By entity, the partition must have an Entity column • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Scenario / period	Partitioning by business cycle and entity	• The scenario/period/entity columns are not required • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Single cycle	Not partitioned	• If the snapshot is By scenario, the scenario column is required • If the snapshot is By scenario/period, the period column is required • If the snapshot type is By entity, the partition must have an Entity column • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Single cycle	Partitioning by business cycle	• If the snapshot is By scenario, the scenario column is required • If the snapshot is By scenario/period, the period column is required • If the snapshot type is By entity, the partition must have an Entity column • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns
Single cycle	Partitioning by business cycle and entity	• If the snapshot is By scenario, the scenario column is required • If the snapshot is By scenario/period, the period column is required • The entity is not required • If the snapshot type is Also by other dimensions, the partition must have the respective Dimension columns

Restore

Through this operation, you can reload a snapshot scenario on the official scenario.

The process is the same as the one for creating a snapshot (insert link to Create)

You must specify the version number (**Version number**) of the snapshot scenario from which to copy the data.

CCH Tagetik reports a blocking error if you select a filter by dimension on which no snapshot was previously created.

DTP activity cockpit

User

Application database > Processes tile > select process > Contributor > step tab > (Actions section) DTP > Activity cockpit

Navigation panel > Contribute > Process > select process > Contributor > step tab > (Actions section) DTP > Activity cockpit

Purpose of the page

This page shows the list of activities that can be run relating to the DTP associated with *Data Transformation Package* tasks present in the workflow: the information present on each row relates to the last execution.

Activities are displayed following the order of the DTPs present in the workflow, and therefore by level and code. For tasks run in parallel, sorting by task code is applied.

The *DTP* activity cockpit is active only where an entity and a step are selected.

Note: You can select only rows belonging to the same Analytical Workspace to run tasks. If activities belonging to different DTP are selected, the activities will be processed following the order of the DTPs present in the workflow, therefore by level and code. For tasks run in parallel, sorting by task code is applied.

Column	Description
✔	Box to select the activity. Not selected by default.
AW - DTP	Shows the description of the AW and the description of the DTP to which that activity belongs.
Activity	Shows the code and the description of the activity. If this is part of a loop, the loop code is entered in round brackets before the activity code.
Dataset	Shows the description of the target dataset to which the activity is associated.
Type	Shows the description of the type assigned to the target dataset to which the activity is associated.
Start date	Shows the start date and time of the last time the activity was run.
End date	Shows the end date and time of the last time the activity was run.
User	Shows the user who last ran the activity.
Result	Shows the result of the last time the activity was run.
Data	Shows the icon to open the partition data details.

Icons and/or links on the page

Element	Description
	Indicates that the data processing related to the activity has been completed.
	Indicates that the data processing related to the activity is being processed.
	Indicates that it was not possible to complete the activity related to a *Data Transformation Package* task present in the workflow and associated with an Analytical Workspace DTP
	Indicates that that activity has not been run yet.
	Indicates that the data processing has been completed with at least one error. Click on the yellow traffic light to open a detail window showing the list of operations that generated that error during the last run, and the number of erroneous records found. If an operation with errors runs a check on a dataset, you can download a file containing the dataset rows containing errors. The first row of that file will contain the operation code and description and the message set for errors found during the check.

Buttons in the window

Element	Description
	Opens a pop-up to display the data contained in the Partition written by the specific activity. More details can be found on this page:"Partition data details window" below.
	Update the page.
	This is enabled only when activities are selected. When clicked, the data processing of the selected activities starts.

Partition data details window

User

Application database > Processes tile > select process > Contributor > step tab > (Actions section) DTP > Activity cockpit > 

Application database > Navbar > Processes > select process > Contributor > step tab > (Actions section) DTP >

Purpose of window

This window shows details of the data of an Analytical Workspace dataset partition populated by the activity contained in a task of the workflow associated with the process.

Window sections

Element	Description
Context information	Shows detailed dataset context information: • process • scenario • period • entity • dataset physical partition name
List of data	Shows the list of data loaded to the dataset.
Attributes	Allows you to change the editable attributes of the dataset data.

Specific instructions for editing data

Only users with the necessary rights can edit this data individually or en masse using multi-row selection in the **Attributes** section. The data in the table are only added after the changes have been saved.

The fields for which the **Personal data protection** option is selected cannot be included in a multi-row selection if the partition is in a calculation layer. The fields and terms contained in them cannot be found using the **Filter** function.

***Note**: an individual record cannot be added, removed or copied if the **Select all** option is selected.*

Journals book window (for the contributor)

User

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Journals book

Application database > Navbar > Processes > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Journals book

Purpose of window

Allows you to extract a report with all the journals entered on the entities.

Window sections

Section	Description
Report format	Allows you to select the format of the report.
Scenario /Period	Allows you to select the desired scenario/period.
Journals filter	Allows you to specify any filters to be applied to journal headers, in order to extract only the desired journals and limit the volume of data extracted. ***Note**: regardless of the filters applied, the system will only extract data from journals belonging to entities or consolidator nodes selected in the cockpit and in categories visible to the user.*
Rows filter	Allows you to specify any filters to be applied to journal rows, in order to extract only the desired rows and limit the volume of data extracted. ***Note**: regardless of the filters applied, only rows with amounts other than zero and rows on accounts visible to the user will be extracted.*
Grouping and Sorting	Allows you to specify how the extracted data is grouped and sorted.

Options in the sections

Element	Description
Report format	
XLSX	Generates the report in XLSX format.
PDF	Generates the report in PDF format. This format has some limitations and must be extracted without journals grouping and with rows grouping set to **summary with origin**. Additionally, for the journal rows, it only displays the main information. This report is not available for processes with relationship type equal to **by entity - custom dimension 2** or **by entity - synthetic custom dimension 2**.
Scenario /Period	
Scenario /Period	Mandatory field. • With the **Consolidation scenarios** type selected, this allows you to choose an active consolidation scenario/period that is visible to the user and linked to the process. • With the **Original scenarios** type selected, indicates the scenario/period from which the cockpit was accessed. Can only be changed in single submission processes.
Journals filter	
Category type	Journal type to be exported. ***Note**: only Entity Journals can be selected.*
Category	Only with **Category node** not selected. Allows you to select one or several categories from among those visible to the user. ***Note**: only Entity Journals can be selected.*
Category node	Only with **Category** not selected. Allows you to select a grouping of categories from among those with at least one category visible to the user. If a value is specified, the system extracts the journal data on categories belonging to the selected node, going down recursively to the last level.
Journal number	Allows you to select one or several journals belonging to the selected scenario/period.
Rows filter	
Show only main accounts	Only extracts the rows on the most important accounts involved in the journal, i.e. the accounts which are displayed as **Main accounts on Journals** in the data model. See .

Element	Description
Exclude Result accounts and Variation	Selected by default. The extraction excludes rows on accounts that belong to the set of result accounts specified from among the requirements of the process's calculation logics. In particular, the P&L result account, the BS result account and their variations (determined taking account only of control groups belonging to the process) are excluded.
Account type	If specified, this only allows you to recover the rows on the indicated account type: • **Detail** • **Variation** • **Normal** (default)
Account nature	If specified, this only allows you to recover rows on accounts of the specified nature: • **Profit & Loss** • **Balance Sheet** • **Memorandum** • **Other Variations** • **Other stocks**
Show Counterparty	Enters information related to the counterparty (counterparty entity, CTP custom dimension 2, transaction currency, transaction currency amount, total CTP amounts) in the reports.
Hide rows set to 0	The extraction excludes rows that, maintaining the same account, balance custom dimensions and counterparty.
Origin	Allows you to select one or several origins from among those that are consistent with the selected **Scenario Type**.
Grouping and Sorting	
Journals grouping	Ways in which journal headers must be grouped: • <empty field>: grouping by journal number • **Journals grouping**: grouping based on the **Grouping for Journals book** label set manually on the journal headers ***Note**: only Journals grouping can be selected.* • **Entity 2**: grouping for Entity 2 and extraction of consolidation journals only
Journals order	Ways in which journal headers can be ordered: • **Journal number** (default) • **Category / Journal number**
Rows grouping	Ways in which journal rows can be grouped: • **Analytic** (default): no grouping • **Synthetic**: grouping by account, custom dimensions and counterparty • **Synthetic with origin**: grouping by account, custom dimensions, counterparty and origin
Rows order	Ways in which journal rows can be ordered: • **Account/Origin** (default) • **Origin/Account**

Buttons in the window

Element	Description
Run	Runs the report. Once complete, the system displays a log window and downloads the report in XLSX format.
Cancel	Closes the window.

Drill down parameters page (ad-hoc analysis)

User

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Ad-hoc analysis

Application database > Navbar > Processes > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Ad-hoc analysis

Purpose of the page

This page allows you to run an analysis of the data, or extract numerical data of the financial model from the database and analyse it in the interface, using a pivot table, or in Excel, by downloading an XLSX file.

Page sections

Element	Description
Drill down parameters (or ad-hoc analysis filters)	Allows you to define the data on which to run the ad-hoc analysis. Every row identifies a dimension/hierarchy on which to filter the data.
Data processing management buttons	These allow you to view data from the analysis and/or download them in an XLSX file.

Details of the drill down parameters table

Element	Description
	Adds a row.
	Deletes a row.
Size	Allows you to select an element or hierarchy node of a dimension. ***Note**: for accounts, it is also possible to filter by control group, financial statement template or form.*
Filters	Allows you to define the values to be included in the analysis through search operators. • **=**: selects a specific element or node of the dimension. • **like**: selects all records for which the code is similar to the search term.
Detail	• Active: analytical data up to the highest level of detail is reported for every extracted element. • Not active: the analysed elements are filtered based on the requirement set in **Filters** and aggregated, without showing the details, at the level of the individual element.
Display mode	Only with **Detail** selected. Allows you to specify how the analysed elements are displayed. • **Code** • **Description** • **Code and description**

Data processing management buttons

Element	Description
Next	Closes the window and displays the data from the analysis in a pivot table.
Download	Downloads an XLSX file containing the analysed data. In the file, the **Pivot table** spreadsheet shows details of the analysed data in a pivot table, the **data** spreadsheet shows the list of the analysed data in a table.

Allocations and closing: entries detail page

User

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Allocations and closing: entries detail

Application database > Navbar > Processes > select process > Contributor > select Detail summary or step tab > select entity > (Actions section) > Process reports > Allocations and closing: entries detail

Purpose of the page

This page allows you to view adjustment entries generated by the system following allocation and closing data processing.

Page sections

Element	Description
Search filters area	Allows you to define search filters for adjustment entries.
Results area	Displays on every row the details of the entries generated for data processing (the routine and rule that generated the entry, the category with which it is labelled, the type of data processing that generated it, etc.).

Details of entry search filters

Element	Description
Scenario	Allows you to select the scenario.
Period	Allows you to select the period.
Entity	Allows you to select the entity.
Routine	Allows you to select the routine that generated the entry.
Rule	Allows you to select the rule that generated the entry.
Detail code	Allows you to select the detail code of the rule that generated the entry.
Entries grouping	Allows you to select the group of entries to which the entry belongs. ***Note**: useful if the data processing is run in one of the modes in which traceability is set to anything other than "disable".*
Journal number	Unique identifier of the entity journal generated by the system. Corresponds to the following information chain, separated by "_": • CLOSING • routine code • category code • entity code • currency code • 1 if the journal is to be reopened, 0 if the journal must remain closed

Element	Description
Entry type	Allows you to select the type of entry made in the data processing. The possible options are as follows. • **Allocations** • **Rounding** • **Set to 0** • **Scenario Target Matching** • **Accrual** • **Adjustment imposition** • **Periodic carry forward** • **Charged back** • **Charge back to delete**
Account	Allows you to select the account that generated the entry.
Custom dimension 1...5	Allows you to select a custom dimension.
CTP entity	Allows you to select the entry's counterparty entity.
Counterparty custom dimension 2	If the relationship type associated with the process for which the journal is being managed is **Entity/Custom dimension 2**/**Synthetic Entity/Custom dimension 2** and the management of custom dimension 2 is active. Allows you to select the counterparty custom dimension 2 on which the entry is made.
Currency	Allows you to select the entity currency.
Amount	Allows you to enter the amount of the entry expressed in the entity currency.
Invoice Currency	Allows you to select the invoice currency.
Transaction currency amount	Allows you to select the amount of the entry expressed in the invoice currency.
Entity of origin	Additional filters on the chain that make it possible to identify the steps that generated the entry. ***Note**: only visible if included in the traceability settings defined when running the data processing.* The possible traceability options are as follows. • **Disable**: the field is not defined. • **Last source**: the field contains the code of the dimension that generated the entry in the last step. E.g. if rule *001* requires cost centre *C01* to be allocated to cost centres *C02* and *C03*, and *C02* to be allocated to cost centre *C04*, then for the allocated *C04* data the system displays the last item of data that generated it, namely *C02*. • **Detail**: the field contains the chain of codes (separated by the "/" symbol) that identify the various steps that generated the entry. • **From Rule**: the field contains the chain of codes (separated by the "/" symbol) that identify the various steps that generated the entry, except for those related to rules not included during the run.
Account of origin	
Custom dimension 1...5 of origin	

Element	Description
Data processing type	Allows you to select the type of data processing that generated the entry. The possible options are as follows. • **Allocations** • **Account allocations** • **Reclassification** • **Transfer Price** • **Partial allocations** • **Scenario Target Matching** • **Calculated Target Matching (through "fixed %")** • **Calculated Target Matching (through "calculated %" as a ratio)**
Period length	Allows you to select a period length.
Carry forward	Allows you to specify whether the entry was configured as “Carry forward” in the subsequent scenario (**True**: entry to carry forward, **False**: no carry forward). The value of the entry corresponds with what was specified in the rule that generated the entry.
Numerator	Allows you to indicate the interval within which the data to be allocated, used to generate the entry, must be included.
Denominator	Allows you to indicate the interval within which the driver used to generate the entry must be included.
Origin	Allows you to identify the data processing that generated the entry. All entries are labelled by their origin, i.e. “PROC_CLOSING”.
User Upd	Allows you to identify the user that generated the entry.
Upd date	Allows you to select the interval of dates within which the entry was generated.

Buttons on the page

Element	Description
Remove filters	Removes all filters.
Apply	Shows details of entries corresponding to the selected filters.
	Allows you to add a filter.
	Removes the corresponding filter.
	Cancels the last action on the corresponding filter.

Pick-up check report window (contributor)

User

Application database > Processes tile > select process > Contributor > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Pick-up check report

Application database > Navbar Processes & Workflow > Process > select process > Contributor > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Pick-up check report

Purpose of window

This window allows you to download a report on equity pick-up data processing. In particular, it allows you to check the effect generated by equity pick-up data processing on entities. For every direct investment

relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference.

Fields in window

Element	Description
Scenario/period	Opens a window to select one or more scenarios/periods on which to define the value of the owner entity's financial investment.
Entity	Opens a window to select the owner entity.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Copy amounts and journals window

User

Application database > Processes tile > select process > Contributor > select Detail summary or step tab > select one or several entities or nodes > Utility > Copy original amount and journals

Application database > Navbar > Processes & workflow > Process > select process > Contributor > select Detail summary or step tab > select one or several entities or nodes > Utility > Copy original amount and journals

Purpose of window

This window allows you to copy the following:

- financial statement data and entity journals from one scenario/period to another and from one entity to another
- journals from one scenario/period to another and between entities and scenarios/periods

***Note**: the copying of financial statements and journals can be scheduled as a job task in the task workflow of the process steps. For more details, see "Copy amounts and journals task window" on page 581.*

Available options

Element	Description
Filter set	Allows you to select a set of filters from among those previously saved. ⋮: allows you to update, rename or delete the set.
Gross and notes	Copies Gross and notes.
Entity journals	Copies entity journals.
Customize	
Gross amount	Only for **Gross and notes**. Copies gross amounts.
Reconciliation account	Only for **Gross and notes**. Copies reconciliation accounts.
IC cockpit notes	Only for **Gross and notes**. Copies the notes inserted in the IC entry matching step.
IC amounts	Only for **Gross and notes**. Copies intercompany entries.
Notes	Only for **Gross and notes**. Copies the notes added to cells of forms.
User's details and date of origin	If selected, this records the user and date of the source data on the copied data. If not selected, it records the user as the user code that performed the copy and the date as the date/time at which the copy was performed.

Element	Description
Markup	Only for **Gross and notes**. To be applied to the copied amount to convert it into a different unit of measurement from the one used in **Copy From** in the scenario. 0: no coefficient to apply. For example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.
Transactional form	Copies data entered in one or more transactional forms. See .
Copy From	
Scenario	Source scenario(s) visible to the user. The copy can be performed from several scenarios at the same time, by choosing from among the active original scenarios on which the user is authorised.
Period	Source period. Only to be indicated if a single scenario has been selected in **Copy From**. If the period is not specified, the copy is performed from every period onto itself. This allows you to copy data for all open periods for the selected scenario. To copy data related to several but not all periods of the selected scenario, the copy must be repeated as any times as there are periods to be copied.
Entity	Only for **Gross and notes** and **Entity journals**. One or several source Entities. If the entity is not selected or if several entities are selected, the copy is performed from all entities onto themselves.
Advanced filters (Copy From)	
Origin	Enter the origin of the source data. These origins are set by default: • **BREAK_BACK** • **INPUT_DEFORM** • **INPUT_WEB** • **MAP** • **QDL** Only for **Entity journals** and **Consolidation journals**: the origin refers to the journal rows, not the header.
Category	Category on which to filter the source data.
Account nodes	Filters source data based on the accounts associated with one or more nodes of a given hierarchy defined on the account dimension.
Journal number	Only for **Entity journals** and **Consolidation journals**. Allows you to select individual source journals to further filter the data.
Select accounts from form	Filters source data based on the editable accounts present in one or several forms.
Transactional forms	Only if the copy is performed from transactional forms. Filters the source data based on the transactional forms.
Copy To	
Scenario	Active and original target scenario, editable by the user. Only one can be selected.
Period	One or several target periods. Must be indicated in the following cases: • The source period has been specified, so one or several target periods must be specified. • No source period has been specified and, in the source scenario, the periods are different from those of the target scenario. It does not have to be indicated in the following cases: • No source period has been specified. • The periods of the source scenario are identical to those of the target scenario.

Element	Description
Entity	Only for **Gross and note** and **Entity journals**. Target entity code. Must be indicated in order to copy data onto a single entity other than the one already indicated in **Copy From**. Should not be indicated in the following cases: • To copy data onto the same entity from which it will be read. • To copy data from several entities. In this case, the system performs the copy from all entities onto themselves.
Advanced filters (Copy To)	
Origin	Enter the origin that will be assigned to the copied data: • **COPY_GENERAL** • **COPY_ORIG**: the system keeps the source origin for the copied data. • **INPUT_WEB**
Category	Overrides the target category. If this is not specified, the copy is performed while keeping the source category the same.
Deletion policy: based on input account	If a filter is applied to the accounts, this indicates whether that filter will also be applied during the deletion of any data existing in the copy target tables. This is useful when, for example, after performing the copy filtered on a number of forms, the user wants to rerun the same copy but only for one or more forms without affecting the values of other copied forms.

Buttons on the page

Element	Description
Save new filters set	Saves the filters set, to be reused later.

Submission status window (contributor)

User

Application database > Processes tile > select process > Contributor > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Submission status

Application database > Navbar > Processes & Workflows > Process > select process > Contributor > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Submission status

Purpose of window

This window allows you to generate a record of the submission statuses of the selected entities and of the nodes to which they belong, in the various steps, based on the parent node.

Available options

Element	Description
Original scenarios/periods	Not editable. Scenario/period from which the cockpit was accessed.
Entities	By default, the field reports the entities selected in the cockpit. If nodes are selected, reports are extracted for the entities belonging to the selected nodes, going down recursively to the last level. If the pre-completed field is edited, entities with the following characteristics must be selected: • Belonging to the selected process and scenario/period, or belonging to at least one of the scenarios/periods of the process for single submission processes. • Not only counterparty or only consolidator. • Visible to the user. If no entity is selected, the submission statuses of all entities that meet the above requirements will be displayed.
Step	Business Workflow step associated with the process. Only contributor and mixed steps can be selected in the contributor cockpit.
Status	Submission activity progress status.
Advanced filters	
Entity consolidation method	Allows you to filter entities in the report based on the following consolidation methods: • **Cost** • **Equity** • **Line-by-line** • **Proportional**
<Attributes>	Filters the entities in the report based on the value of the specific attributes enabled in the **Entity** elements table.

Entities submission status window

User

Application database > Processes tile > select process > Contributor > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Entities submission status

Application database > Navbar > Processes & Workflows > Process > select process > Contributor > > select Detail summary > select one or several entities or nodes > (Actions section) > Process reports > Entities submission status

Purpose of window

This window allows you to generate a record of the submission statuses of the selected entities in various steps, with an indication of the user and the date on which the status was last changed.

Available options

Element	Description
Original scenarios/periods	Not editable. Scenario/period from which the cockpit was accessed.
Entities	By default, the field reports the entities selected in the cockpit. If nodes are selected, reports are extracted for the entities belonging to the selected nodes, going down recursively to the last level. If the pre-completed field is edited, entities with the following characteristics must be selected: • Belonging to the selected process and scenario/period, or belonging to at least one of the scenarios/periods of the process for single submission processes. • Not only counterparty or only consolidator. • Visible to the user. If no entity is selected, the submission statuses of all entities that meet the above requirements will be displayed.
Step	Business Workflow step associated with the process.
Status	Submission activity progress status.
Advanced filters	
Entity consolidation method	Allows you to filter entities in the report based on the following consolidation methods: • **Cost** • **Equity** • **Line-by-line** • **Proportional**
<Attributes>	Filters the entities in the report based on the value of the specific attributes enabled in the **Entity** elements table.

Lock data and Unlock data windows

User

Application database > Processes tile > select process > Contributor > Detail summary > select one or several entities or nodes > Utility > Lock data or Unlock data

Application database > Navbar > Processes & Workflows > Process > select process > Contributor > Detail summary > select one or several entities or nodes > Utility > Lock data or Unlock data

Purpose of window

This window allows you to lock or unlock data editability on nodes and entities and on specific steps.

***Note**: when editability is locked, the data cannot be edited by any user, regardless of their rights and regardless of submission.*

Available options

Element	Description
Original scenarios/periods	For processes with business cycles by scenario/period, this allows you to select the scenarios/periods that are visible to the user and belong to the process. By default, the scenario/period with which the cockpit was accessed is proposed. For processes with a single business cycle, the field is not editable and shows the list of all scenarios/periods belonging to the process on which you are working.
Entities	Non-editable field. Shows entities belonging to the nodes and to the selected scenarios/periods. Those nodes are the ones visible to the user, where **Only counterparty** or **Only consolidator** has not been selected in at least one of the selected original scenarios/periods.
Steps	Mandatory field. Allows you to select the steps on which to run data processing. The proposed steps are the contributor and mixed steps.

The consolidator cockpit

Contents

This section covers the following topics:

Consolidator cockpit ... 548
Consolidator cockpit page ... 550
Summary tab ... 551
Step tab ... 553
Organisation section of the <step> tab ... 554
Workflow section of the <step> tab ... 555
Consolidation scenarios tab ... 556
Customising the consolidator cockpit ... 558
Working in the Consolidation Scenarios tab ... 558
Working in the Summary and <step> tabs ... 558
Working on process reports (consolidator) ... 561
Actions section of the Overview and Step tabs ... 562
Actions section of the Consolidation scenarios tab ... 566
Copy Consolidation window ... 567
Interactive Entries View (IEV) ... 568
Drill down parameters page (ad-hoc analysis) ... 570
FX rate difference reserves analysis window ... 571
Financial investments - Net equity analysis window ... 572
Pick-up check report window (consolidator) ... 573
Journals book window (consolidator) ... 573
Change consolidation scope report window ... 575
Entity/Classifier Relationship page ... 576
Consolidation area scope page ... 577
Copy amounts and journals window ... 579
Copy amounts and journals task window ... 581
Net Result and Reserves Group Evolution analysis ... 584
Net Result and Reserves Group Evolution analysis window ... 584
Lock data and Unlock data windows ... 585
Copy consolidation on original ... 586
Copy consolidated on original window ... 587
Submission status window (for the consolidator) ... 588

Consolidator cockpit

What it allows you to do

The consolidator cockpit allows the consolidator to do the following:

- Manage all activities associated with the data collection process concerning consolidation nodes (entry of consolidation journals, submissions, approvals, data processing) in a simple and structured manner.
- Monitor in real time the progress of the activities of every consolidation and sub-consolidation node in order to meet deadlines.
- Monitor the status of consolidation data processing.

Information visible to the consolidator

In the cockpit, all consolidators view the consolidator steps or mixed contributor/consolidator steps of the task workflow. On the displayed steps, the user only sees the organisational hierarchy for which they are authorised to work and, within it, the entities or nodes for which the financial statements need to be consolidated. They do not see the scenarios or periods stored offline or inactive consolidation scenarios.

The consolidator cockpit is therefore structured differently depending on the user viewing it, but also depending on the process characteristics. The number and type of available activities and data processes also depends on the process rule settings.

Data processing status of nodes by consolidation scenario

In the cockpit's **Consolidation scenarios** tab, a status indicator is associated with every consolidation node/scenario. The indicator shows whether or not the node of the specific consolidation scenario needs to be re-processed to obtain consistent consolidation data in the event of changes to input data (e.g. following the entry of a gross amount, or an intercompany declaration).

In some cases, the node status indicator may also remain red at the end of the data processing. This could happen in the following cases, for example:

- If a gross amount has been edited on an entity and the consolidator does not have write permissions for the entity on the original scenario.
- If the original scenario was locked immediately after the original data was edited without data processing having been run.

If necessary, the data processing may not be limited to the selected node only. In fact, the system assesses whether it is also necessary to process other nodes that have not had their data directly edited. The purpose is to create consolidated data in line with the consolidation rules set by the administrator/consolidator user. One example of this is data processing for net equity reclassification.

Consolidation data processing according to process submission type

In general, processes involve either submission by scenario/period or single submission.

For single submission processes, the node status indicator remains red until all periods of the process have been processed.

Single submission processes

In single submission processes, consolidation is performed on all the scenarios/periods by default. When a period is modified, however, the default consolidation mode (impacted mode) only reruns consolidation for the modified period. This behaviour does not consider the impact that the modification of a specific period may have indirectly on the other periods of the process.

When working in a process with periods that are interconnected for logical reasons, you can deactivate impacted mode and then rerun the consolidation on all periods without any filter on the edited data.

For details on impacted consolidation mode, see Modalità di elaborazione Impacted.

Element	Description
Consolidation with periodic calculation	Periodic consolidation is used for accounts in which values accumulate over the year, and particularly accounts of a P&L nature. The values are copied from previous periods and the contribution of the processing period is added. Consolidation is performed systematically on the combination of periods and, even if one or a few periods are modified, the system reruns the consolidation on all periods of the process. For example, if periods 1 to 12 (or from January to December) are consolidated, but only period 5 (May) is modified, the system reruns consolidation on all the process's periods after period 5.
Consolidation with progressive calculation	Progressive consolidation is used for accounts for which it is necessary to have a photograph of the situation at the processing period closing date, and particularly those of a BS nature. In this case, to avoid mass data processing, if one or a few periods are modified, the system only reruns consolidation on the period preceding the last consolidated period.

In the interface, an indicator on the period shows whether the period has already been consolidated (green) or is to be consolidated (red). The indicator therefore varies based on the presence of modifications on significant nodes.

A node is significant when at least one of its entities is part of a consolidation scenario. Therefore, some nodes may only be significant in some periods. Non-significant nodes are shown in grey.
The system checks whether a node is significant based on the run period consolidation area and the previous one. A node may therefore be grey when in reality it is significant for previous periods. Custom data processing can be run in order to override the data processing for those nodes.

The task workflow of steps


Task workflow activities can be viewed as a chart or a list. In contrast to the list, the chart allows you to distinguish between activities to be run in parallel or in sequence. In the chart, every activity is represented by an icon coloured according to the activity's progress status.

The list also contains details of every activity, namely the type of activity, the description, the progress status, the date the status last changed and the user who made that change. Activities can be accessed regardless of their order, but to declare one of them complete, all previous activities must have already been declared complete.

Therefore, the step cannot be submitted (submission task is grey) until all tasks have been completed.

Task workflow example

This example shows the task workflow activities as a flow chart. The first three activities can be run in parallel. However, the others must be run in sequence. For example, the gross margin analysis activity cannot be run unless the previous planning activity has been completed.

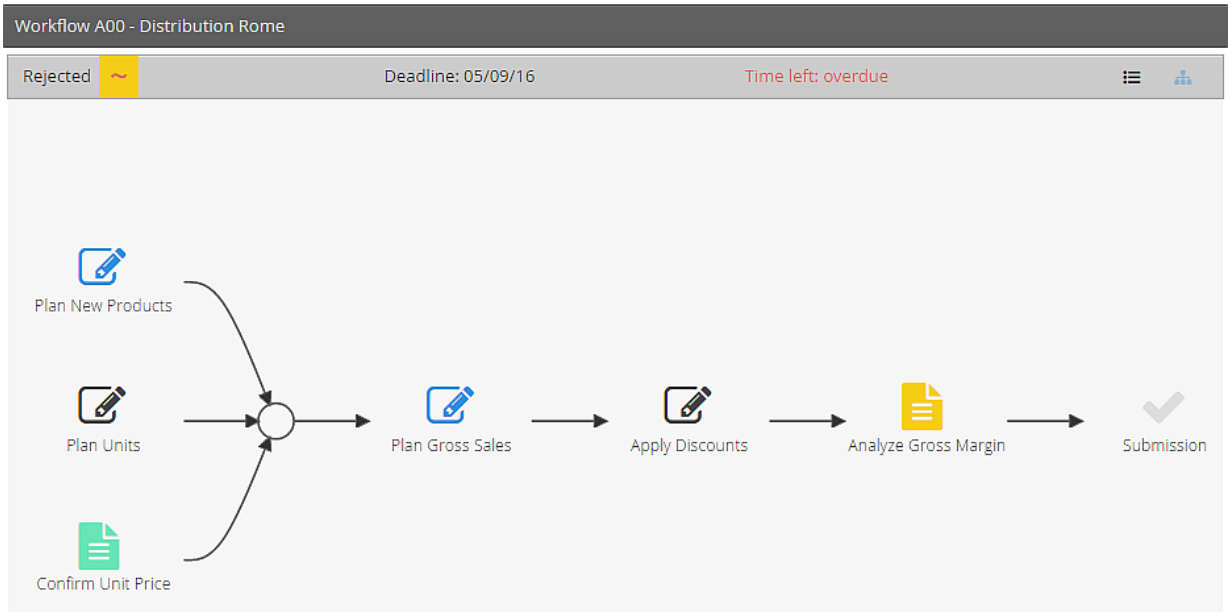

Details of the progress of individual activities.

Activities can be declared completed either manually or automatically, after the activity in question has been run. Automatic completion takes place by default for activities that run data processing, or can be overridden on any activity in the definition step.

Activities that are not significant for the purposes of submitting the entity are optional. This rule is set by the administrator when creating the activity.

Consolidator cockpit page

User


Application database > Processes tile > select process > Consolidator

Application database > Navbar > Processes > select process > Consolidator

Purpose of the page

This page allows you to monitor and manage the activities planned for groups that must submit consolidated financial statements.

What it looks like

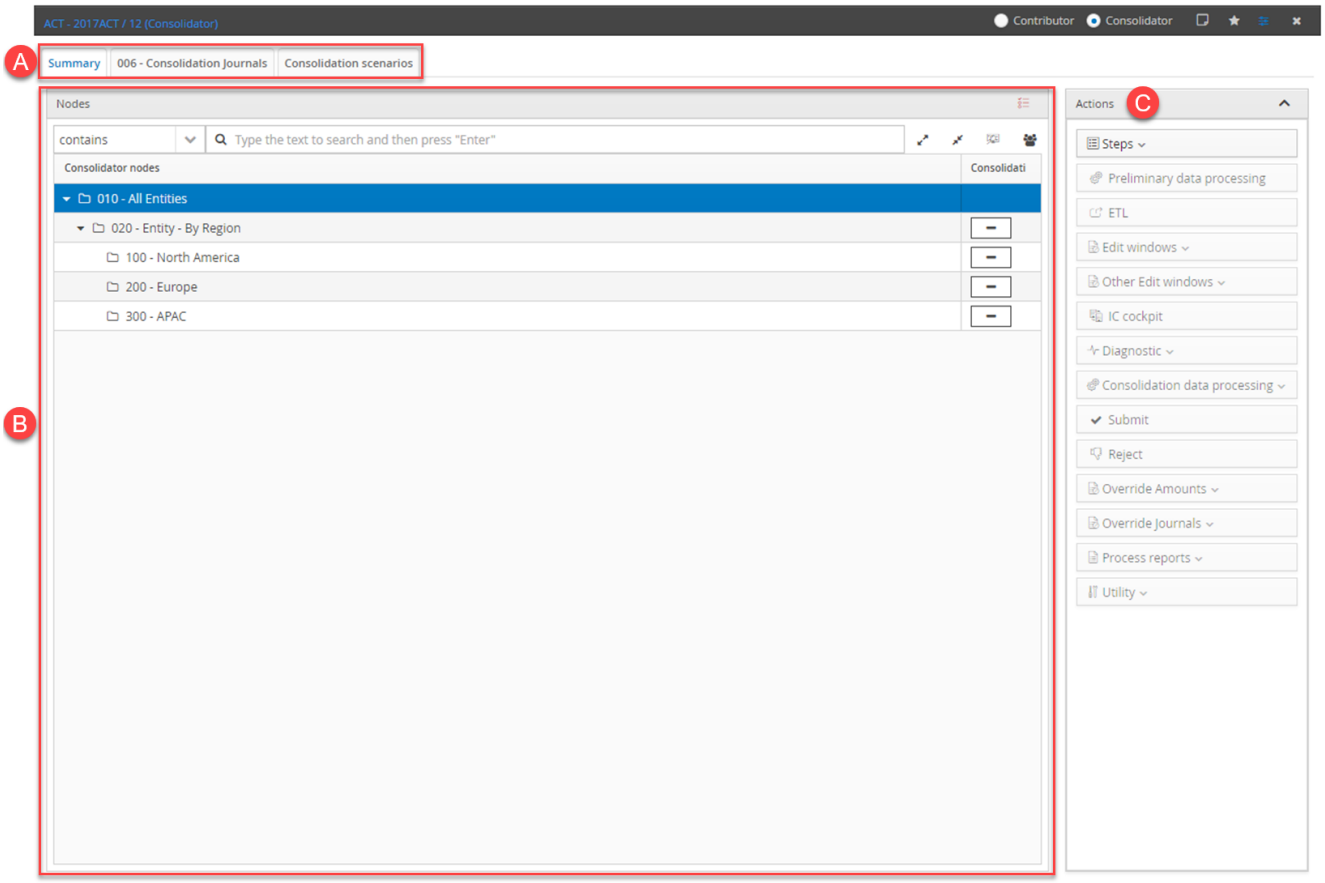

Element	Description
A	Navigation tabs
B	Specific content of the selected navigation tab
C	Actions section

Summary tab

User

Application database > Processes tile > select process > Consolidator > Summary


Application database > Navbar > Processes > select process > Consolidator > Summary

Purpose of the page

This page makes it possible to:

- See the summary information on data collection/submission status.
- See the overall submission progress for each consolidation node.
- Run specific actions on selected nodes.

What it looks like

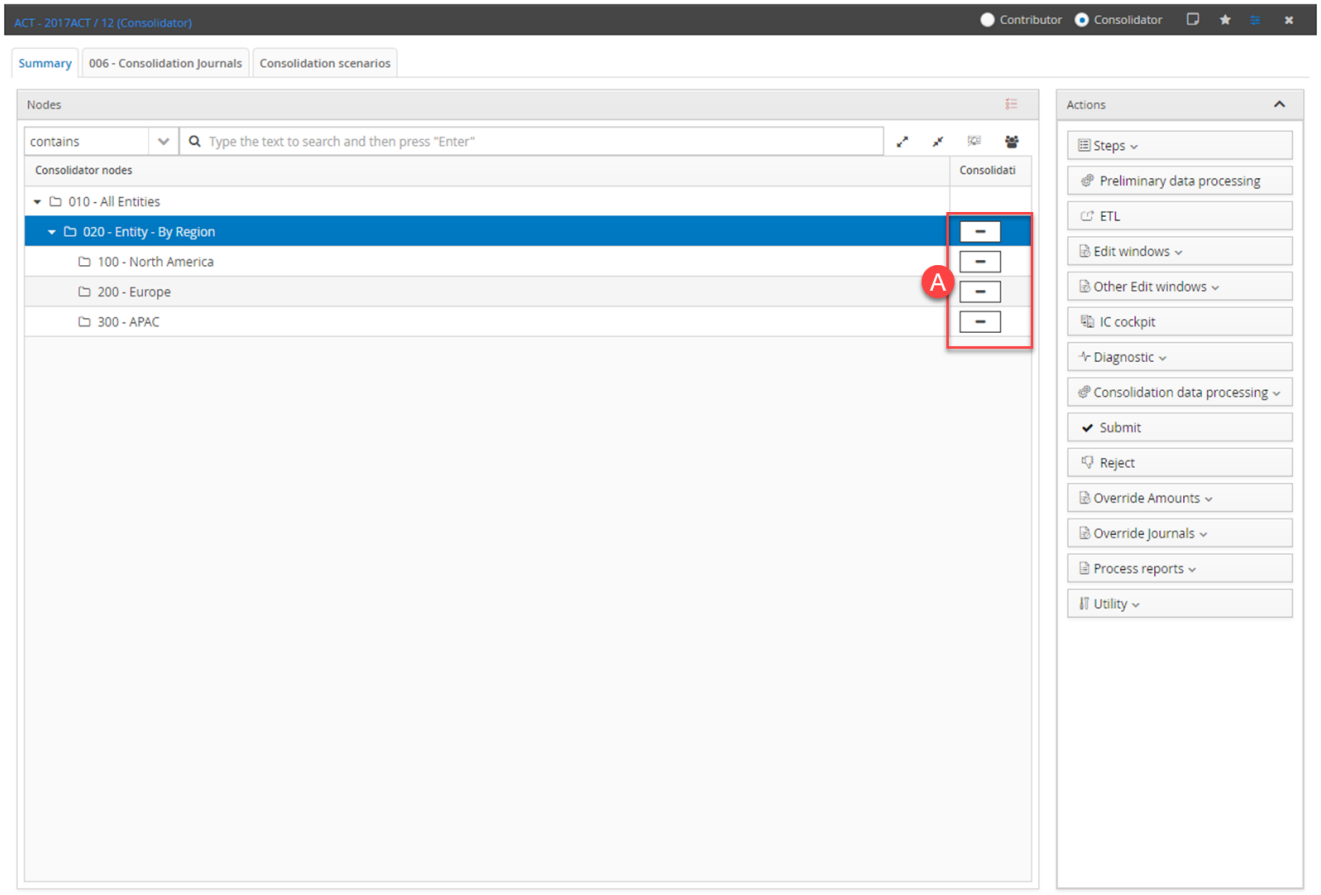

Element	Description
A	Submission progress indicators for each step.
Nodes	Elements present in the organisational hierarchy associated with the process on which the user is authorised.
Actions	Available actions for each activity that can be run on the selected nodes. See "Actions section of the Overview and Step tabs" on page 562 and "Actions section of the Consolidation scenarios tab" on page 566.

Buttons and/or links in the Nodes section

Element	Description
	Enables multi-row selection to allow mass changes.
	Filters entities in the hierarchy based on what is set in the filter.
	Expands the organisational hierarchy's entity tree.
	Compresses the organisational hierarchy's entity tree.
	Shows the log of submission/rejection/approval activities for the selected entities.
	Shows the users responsible for the selected entities.

Progress indicators by step

Element	Description
	Step not significant for the entity. No activity available or requested for the entity.
	No activity was carried out.
	Data collection and submission activities are underway.
	The entity has been submitted. All data is submitted and locked, ready to be processed.
	The entity has been rejected by the higher-level node manager. Data collection is available again.
	The approval process for the entity is not yet complete.

Step tab

User


Application database > Processes tile > select process > Consolidator > select step tab

Application database > Navbar > Processes > select process > Consolidator > select step tab

Purpose of the page

This page allows you to view information on the status of submissions and the activities to be completed for the nodes of the consolidator of a specific step.

What it looks like

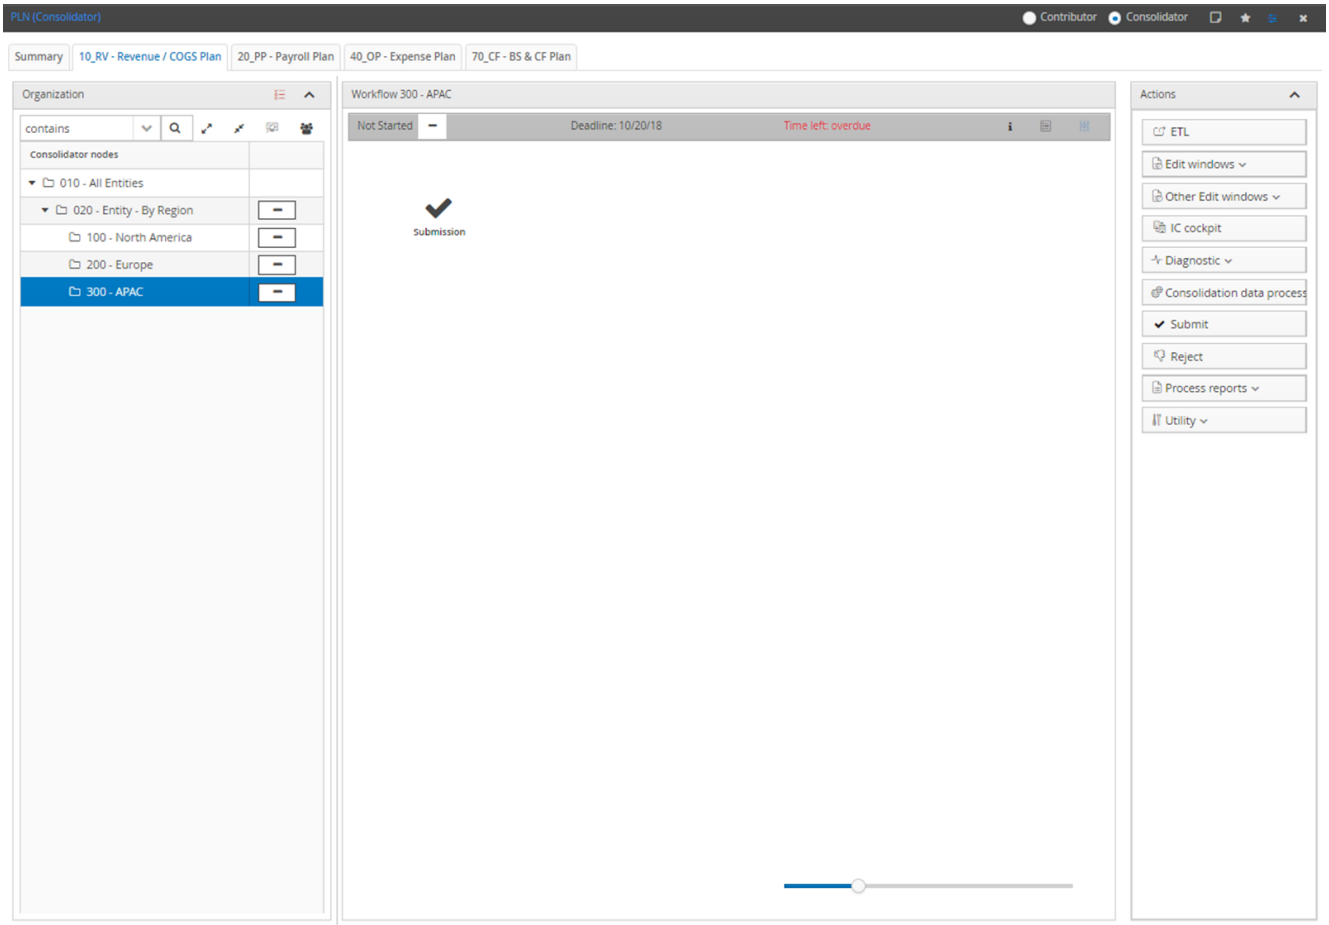

Element	Description
Organisation	Shows the following: • Entities present in the organisational hierarchy associated with the process on which the user is authorised. • Submission progress indicators for every entity.
workflow	Shows the workflow chart for the tasks of the selected entity.
Actions	Available actions for each activity that can be run on the selected entities.

Organisation section of the <step> tab

User

Application database > Processes tile > select process > Consolidator > select step tab

Application database > Navbar > Processes > select process > Consolidator > select step tab

Section buttons and/or links

Element	Description
	Enables multi-row selection to allow mass changes.
	Minimises the **Organisation** section, leaving only the title bar visible.

Element	Description
	Filters for a subset of elements. ***Note**: the entities to be displayed can be filtered by code or by description.*
	Expands the organisational hierarchy's entity tree.
	Compresses the organisational hierarchy's entity tree.
	Shows the log of submission/rejection/approval activities for the selected entities.
	Shows the users responsible for the selected entities.

Progress by entity

Element	Description
	The step is not significant and does not require activities for the selected entity.
	No activity was carried out.
	Data collection and submission activities are underway.
	The entity has been submitted. All data has been submitted and locked, and can be processed.
	The entity has been rejected by the higher-level node manager. Other data can be collected.
	Submission has still not been completed for the entity.

Workflow section of the <step> tab

User

Application database > Processes tile > select process > Consolidator > select step tab

Application database > Navbar > Processes > select process > Consolidator > select step tab

Section buttons and icons

Element	Description
	Shows the colour legend.
	Shows the activities as a list.
	Shows the activities as a chart.
	If present, this shows any notes inserted by the administrator.
	If present, this shows any attachments added by the administrator.
	Indicates that the user is not authorised to run the activity.
	Shows the grouped activities.

Progress indicators for the activity with listed tasks

Element	Description
	Activities to be started
	• Activities in progress. • Activities to be rerun because the previous activity has been rerun.
	Activity completed
	Optional activities

Types of activity

See "Business Workflow task icons" on page 384.

Actions on the task workflow activities

Element	Description
Click on the activity icon	Opens the menu of actions available on the activity. • **Open form in Web** • **Open form in Excel** • **Run** • **Task is Complete** • **Set task as not complete**

Consolidation scenarios tab

User


Application database > Processes tile > select process > Consolidator > select Consolidation Scenarios

Application database > > Navigation panel > Processes > select process > Consolidator > select Consolidation Scenarios

Purpose of the tab

This tab shows information on the data processing status of consolidation nodes on the consolidation scenario and allows you to run consolidation data processing in *Impacted* mode, or only on data for which the data processing is pertinent.

What it looks like

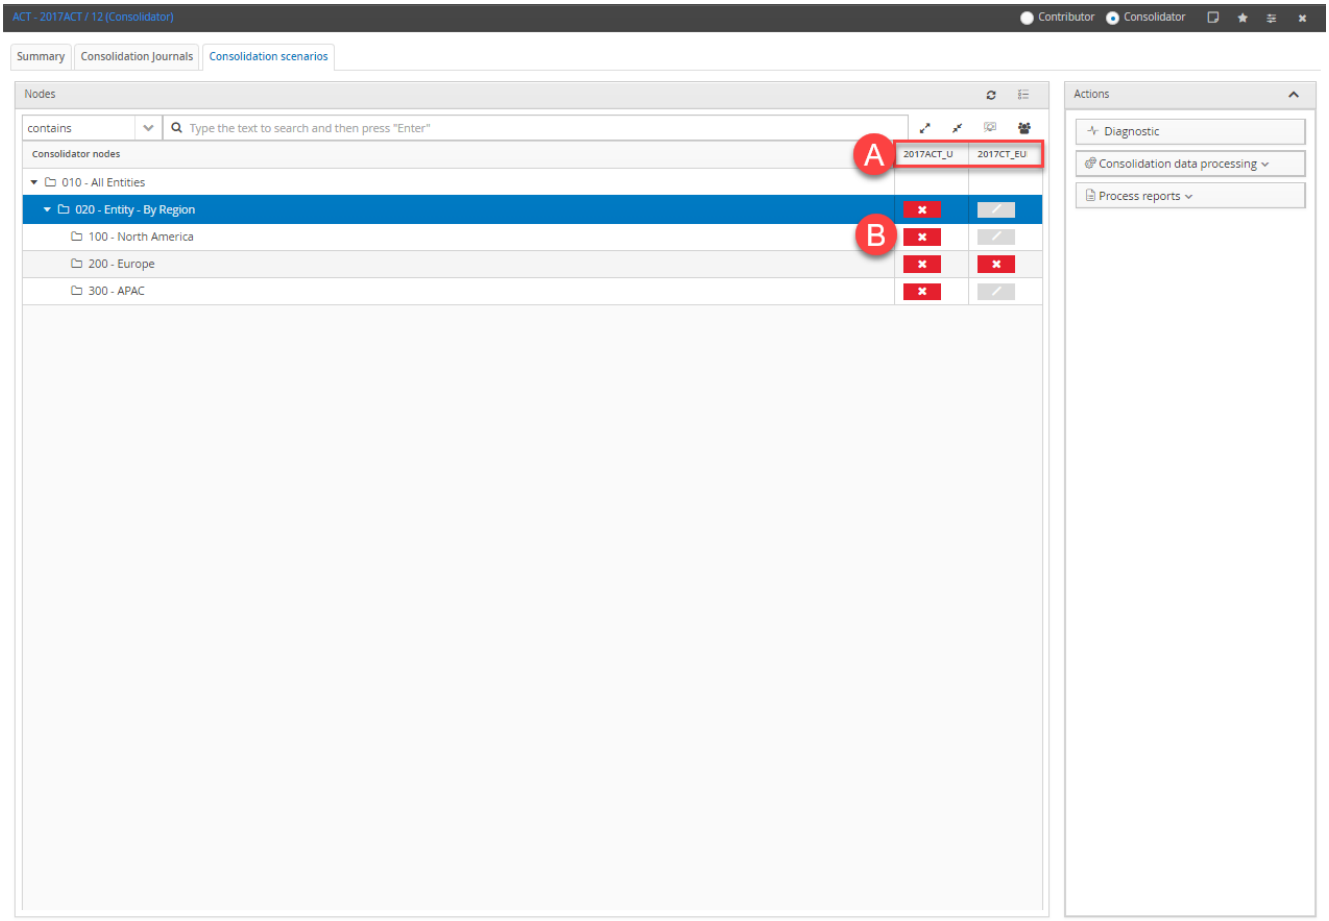

Element	Description
A	Consolidation scenarios **(B)**: in front of the scenario code, this indicates that the scenario is locked.
B	Node data processing status indicators.
Nodes	Shows the entities present in the organisational hierarchy associated with the process on which the user is authorised. : reloads Impacted status. Updates the status indicator.
Actions	Available actions for the selected node

Progress indicators by node

Element	Description
	Node not significant for the consolidation scenario. Contains no entities for a certain consolidation scenario or the entities it contains have no data to process (e.g. all entities of the node have been assessed using the at cost consolidation rule).
	Node to be reprocessed to obtain consistent data on the consolidation scenario.
	Node on which all consolidation data processing has already been run.

Customising the consolidator cockpit

Edit the header of the step tab

Main toolbar > > Settings

1. In the **Point of view** section, in **Step visualization on cockpit tabs** select the information to be booked (**Only Code**, **Only Description** or **Code and Description**).
2. Click **Save** and then on **OK**.

Working in the Consolidation Scenarios tab

Application database > Processes tile > select process > Consolidator > select Consolidation Scenarios

Application database > > Navigation panel > Processes > select process > Consolidator > select Consolidation Scenarios

Update node status indicators

This procedure allows you to check whether contribution data has been edited.

In **Nodes**, click : the data processing status indicators will be updated.

Process a non-significant node

1. Select the node to process.
2. In **Actions**, click **Consolidation data processing** and select **Custom**: the **Consolidation data processing** window will appear.
3. (Optional) In **Original Scenarios/Periods**, add any desired scenarios/periods to the scenario/period with which access was gained.
4. (Optional) To only process data edited after the last consolidation data processing, select **Process only modified data**.
5. Select the data to process (entity, group, area).
6. In Consolidation scenarios/periods, select one or several consolidation scenarios/periods on which to run the data processing.
7. To start the data processing, click **Run**.

Working in the Summary and <step> tabs

Filter entities in the hierarchy

Application database > Processes tile > select process > Consolidator > Summary/step tab

Application database > Navbar > Processes > select process > Consolidator > Summary/step tab

1. In **Nodes**, click and select the rule to filter.
2. Enter the word by which to filter and click : the search result will appear in **Consolidator nodes**.

Select several nodes

Application database > Processes tile > select process > Consolidator > select step tab

Application database > Navbar > Processes > select process > Consolidator > select step tab

***Note**: to activate multiple selection, by clicking on .*

To select several nodes simultaneously.

1. Select the desired nodes simultaneously by pressing the CONTROL key. The **Multiple entity values (...)** section will appear, containing only buttons related to activities concerning several nodes (e.g. the simultaneous submission of three nodes).

The section displays the following:

- the code and description of the selected nodes, visible when you move the cursor over the section header
- the latest of the deadlines for submission defined in the process for the selected nodes
- the remaining time until the latest deadline, from today's date

View the task workflow of a node in a step

Application database > Processes tile > select process > Consolidator > select step tab

Application database > Navbar > Processes > select process > Consolidator > select step tab

1. In **Organisation**, select the desired node: the relative task workflow will appear in **Workflow**.
2. To change the display mode, select (list) or (graph).

View details of the last change to an activity

Application database > Processes > select process > Consolidator > select step tab > select desired entity

Move the cursor over the desired activity: a tooltip will appear with the date of the last change made to the activity and the name of the user who made it. This information is updated whenever the execution of the non-optional task ends without blocking errors or upon execution of **Task is Complete** or the **Set task as not complete**.

Run all data processing of grouped activities (chart view)

Application database > Processes tile > select process > Consolidator > select step tab > select desired entity

Application database > Navbar > Processes > select process > Consolidator > select step tab > select desired entity

Click and then on **Run**: all data processing of the selected grouped activities will run.

Work on an activity from the list (list view)

Application database > Processes > select process > Consolidator > select step tab > select desired entity >

Application database > Navbar > Processes > select process > Consolidator > select step tab > select desired entity >

1. On the desired activity row, click on the progress icon.
2. Select the desired item.

Work on node activities in multi-selection mode

Application database > Processes tile > select process > Consolidator > select step tab

Application database > Navbar > Processes > select process > Consolidator > select step tab

***Note**: to activate multiple selection by clicking on .*

1. Select the desired nodes simultaneously by holding down the CONTROL key: the **Multiple entity values (...)** section will appear.

2. In the **Multiple entity values (...)** section, click **Detailed task list**: the list of activities of the selected entities will appear.
3. Do the following:

To work on...	Then...
one activity	1. On the desired activity row, click on the progress icon. 2. Select the desired item.
several activities	1. Select the desired activities simultaneously: the **Done**, **To do** and **Run selected tasks** fields will appear. 2. Select the field related to the desired activity.

Copy data from one scenario

Application database > Processes tile > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy Consolidation

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Utility > Copy Consolidation

1. Select the desired type of copy.
2. Set the fields as desired.
3. To start the copy, click **Run**.

***Note:**: for the **Original and Consolidation** and **Only Consolidation** copies, the system deploys the consolidation area on completion of the copy.*

Copy consolidation scenario data onto an original scenario/period

Application database > Processes tile > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy consolidation on original

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Utility > Copy consolidation on original

1. Set the fields as desired.
2. To start the copy, click **Run**.

Lock or unlock data of a scenario/step

Application database > Processes tile > select process > Consolidator > select Summary/step tab

Application database > Navbar > Processes > select process > Consolidator > select Summary/step tab

1. Select one or several nodes to consolidate.
2. In **Actions** click **Utility**.
3. Do the following:

If you are in this tab...	Then...
Summary	1. Select **Lock data** or **Unlock data** according on the activity you want to run. 2. Set the fields as desired. 3. Click **Run**.
<step>	Select **Lock data** or **Unlock data** depending on the activity you want to run: the action will be performed automatically.

Schedule the copying of amounts and journals

Application database > Data processing > Jobs

Application database > Navbar > Processes > select process > Consolidator > select step tab

1. Click on the desired job.
2. Click ⋮, then on **Show graph** and **Edit**.
3. Click **Other activities**.
4. Drag the **Copy amounts and journals** activity onto the work panel: the **Task** window will appear.
5. Set the fields as desired, then click **OK**.

Working on process reports (consolidator)

Introduction

This module details some of the procedures for generating reports on data of the process open in the consolidator cockpit.

Extract a report on consolidation journals

Application database > Processes tile > select process > Consolidator > select Summary or step tab > select entity > (Actions section) > Process reports > Journals book

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Process reports > Journals book

1. In the **Journals filter** section, select the type of journal to display, any category or node of categories by which to filter the journals and, if desired, indicate one or several journals of the selected scenario/period.
2. In the **Rows filter** section, select the accounts to be included in or excluded from the report (only main accounts, result accounts) and specify the type and/or nature of the rows to be recovered on the selected accounts (detail, variation, normal) and their origin.
3. In the **Scenario/period** section, specify the type of scenario/period to be included in the report (consolidation scenarios or original scenarios) and select the desired scenario/period.
4. In **Grouping and Sorting**, define the grouping and sorting mode for the headers of journals and rows in the report table.

Generate a report on the net result and reserves group evolution

Application database > Processes tile > select process > Consolidator > select tab > select entity > (Actions section) > Process reports > Net Result and Reserves Group Evolution analysis

Application database > Navigation panel > Processes > Consolidator > select tab > select entity > (Actions section) > Process reports > Net Result and Reserves Group Evolution analysis

1. In **Actions**, click **Process reports** and then on **Net Result and Reserves Group Evolution analysis**.
2. Click ··· next to **Consolidation area**: the **Items selection** window will open.
3. Select one or more scenarios/periods corresponding to the process's consolidation area.
4. Click ··· next to **Category node**: the **Items selection** window will open.
5. Select the node of categories on which to filter the data.
6. In **Type**, select the display mode for the consolidation journals in the report.
7. To view the detailed report of the individual adjustments with the relative journal number, select **Show journal number**.
8. Cl **Apply**: a preview of the generated report will appear.
9. To download the report in PDF format, click . To generate the report in Excel format, click .

***Note**: in the **Journal number** column, click on the desired link to view details of the entire journal.*

Generate an ad-hoc analysis report

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Ad-hoc analysis

Application database > Navbar > Processes > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Ad-hoc analysis

In the ad-hoc analysis filters table, the **Scenario**, **Period**, **Entity** and **Amount type** dimensions must be defined. Do the following on every row of every dimension.

1. In **Filters**, select the type of value to be included in the analysis, then set the desired value.
2. (Optional) To make the form display all details to the highest level for the analysed data, select the **Detail** option, then select the desired display mode.
3. (Optional) To add filters from other dimensions, click ⊕ and repeat steps 1 and 2 to set a new dimension filter on the new row.
4. To obtain the analysis results in XLSX format, click **Download**, otherwise click **Next** to view them in a pivot table.

Actions section of the Overview and Step tabs

User

Application database > Processes tile > select process > Consolidator > select Summary/step tab

Application database > Navbar > Processes > select process > Consolidator > select Summary/step tab

Actions

Element	Description
Steps	Only on the **Overview** tab. Allows you to move between tabs. See "Steps" on the facing page.
Preliminary data processing	Only on the **Overview** tab. Allows you to run preliminary data processing (carry forward) on a selected scenario/period and potentially limit it by consolidator node, entity, step and category.
ETL	Allows you to run one of the ETL jobs that have been set up for the process.
Edit windows	Allows you to edit original gross amounts, intercompany entries, entity journals and consolidation journals from the web. See "Edit windows" on the facing page.
Other Edit windows	Allows you to enter reconciliation accounts and notes via the web interface. See "Other Edit windows" on the facing page.
Intercompany Cockpit	Allows you to run intercompany matching from a dedicated cockpit.
Financial investments congruence	Allows you to run diagnostics and access the results log. See "Financial investments congruence" on page 564.
Consolidation Data Processing	Allows you to run consolidation data processing on the selected nodes and node entities. ***Note**: selecting the highest-level consolidation node is not equivalent to processing all entities. For example, for data processing by counterparty, only entities directly belonging to the node and entities in pairs of entities belonging to different consolidation nodes will be generated.* To process all entities, you must select all consolidation nodes. The quickest method is to position the cursor on the highest-level consolidation node, right click and choose the “Select cascade” option. See "Consolidation Data Processing" on page 564.
Calculation logics	Allows you to do the following: • Run all calculation logics related to the selected process. • Run the logics, filtering them based on scenarios and periods present in the process. See Processes cockpit - Contributor – Calculation logics .

Element	Description
Submit	Runs the submission activities for which it is enabled on the selected nodes. • On the **Overview** tab, this opens a window to select the original scenarios/periods and step up until which you want to submit. • In a step tab, this automatically sets the value of the necessary parameters and runs the submission directly.
Reject	Allows the higher node manager to reject the selected nodes. • On the **Overview** tab, this opens a window in which you can select the original scenarios/periods and the step up until which you want to reject and potentially insert a note and the reasons for rejection. • In a step tab, this automatically sets the value of the necessary parameters and runs the rejection directly.
Override Amounts	Only on the **Overview** tab. Integrates the final data generated by the system. This is typically needed when, as the final outcome, the amount information to be extracted from the reporting system needs to be identical to data already made public at a previous time (if the consolidation tool is changed, for example). For amounts, only carry forwards can be overridden on the original scenario. In fact, the other rows can be added from the management window for the original rows without needing to override them. See Data entry > Override Amounts and Journals.
Override journals	Only on the **Overview** tab. Integrates the final data generated by the system. This is to extract journal information identical to data officially made public at a previous time (if the consolidation tool is changed, for example). See Data entry > Override Amounts and Journals.
Process reports	Allows you to generate reports on data, entities and process configuration. See "Process reports" on the next page.
Utility	Allows you to copy amounts, journals and consolidation data and lock and unlock data entry. See "Utility" on page 565.

Steps

Element	Description
<step name>	Opens the tab for the selected step.

Edit windows

Element	Description
Edit Amounts	Opens a page to edit original gross amounts from the web. See Data entry > Amounts > Gross amounts.
Edit Intercompany	Opens a page to edit intercompany entries from the web. See Data entry > Amounts > IC Amounts.
Edit Entity journals	Opens a page to edit entity journals from the web. See Data entry > Journals > Entity Journals.
Edit Consolidation journals	Allows you to manually insert consolidation journals directly from the web via specific windows. See Data entry > Journals > Consolidation Journals.

Other Edit windows

Element	Description
Edit Reconciliation accounts	Allows you to edit reconciliation accounts via specific windows. See Reconciliation accounts page.
Edit Notes	Allows you to edit notes via specific windows.

Financial investments congruence

Element	Description
Diagnose	Runs diagnostics for the selected entities. If run from the **Summary** tab, a window showing the customisable filters will open. If run from a step tab, this automatically sets the value of the necessary parameters for the step in question and runs the diagnostics directly. See Data processing > Diagnostics.
Diagnose and update log	**Summary** tab. Runs diagnostics for the selected entity and step and updates the diagnostic results log. See Data processing > Diagnostics.
Diagnostic results log	Opens the diagnostic results log for the selected entities. In the **Summary** tab, this opens a window to choose the step. In a step tab, it displays the log for the selected step only. See Data processing > Diagnostic > Diagnostic results log

Consolidation Data Processing

Consolidation data processing is only performed on entities belonging to the selected nodes. Selecting the highest-level consolidation node does not mean that all entities will be processed. For example, for data processing by counterparty, only entities directly belonging to the node and entities in pairs of entities belonging to different consolidation nodes will be generated.

In other words, if you want to process all entities, you must select all consolidation nodes. The quickest method is to position the cursor on the highest-level consolidation node, right click and choose the “Select cascade” option.

Element	Description
Standard	Automatically run data processing enabled for the process, on both the original scenario and the consolidation scenario.
Custom	Allows you to run data processing enabled for the process, making it possible to select the original and consolidation scenarios to process and decide the type of data processing to run (entity, group, area).

Process reports

Element	Description
Interactive Entries View	It allows the Consolidator user to analyse the consolidated data, detail them for the different dimensions, with the possibility of going back to the original data and the detail of the adjustments. See " Interactive Entries View (IEV)" on page 568.
Journals book	Allows you to extract a report with all the journals entered on the entities. See "Journals book window (for the contributor)" on page 536.
Ad-hoc analysis	Runs the data analysis via drill down onto the CCH Tagetik dimensions. See "Drill down parameters page (ad-hoc analysis)" on page 570.
FX rate difference reserves analysis	Analyses variations and the effects of the FX rate difference reserve in relation to the opening financial year (historic FX rate, annual net result, intercompany entries, other accounts not at the final FX rate and FX rate difference). See "FX rate difference reserves analysis window" on page 571.
Financial investments - Net equity analysis	Summarises the data for financial investments, net equity, consolidation eliminations for financial investments/net equity, minority shareholdings and net equity reclassification (NER) of entities belonging to the selected consolidation scenario/period.
Net Result and Reserves Group Evolution analysis	Allows you to analyse changes to net equity and annual net result for each entity belonging to a given consolidation area. See "Net Result and Reserves Group Evolution analysis window" on page 584.

Element	Description
Pick-up check report	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to control the effect generated by Equity pick-up data processing on entities. For every direct investment relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference.
Pick-up query	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to analyse in detail the pick-up journals generated by the Equity pick-up data processing on entities. The report is only available if **Generate detailed information for the pick up query** has been selected in the pick-up rules for the Equity pick-up data processing. For more details on the data processing pick-up rules, see .Equity Pick-Up.
Submission status	Only on the **Overview** tab. Allows you to extract a report showing submission statuses of the selected entities and of the nodes to which they belong, in the various steps, based on the root. See "Submission status window (for the consolidator)" on page 588.
Submission Status grouped by Entity Node	Only on the **Overview** tab. This allows you to extract a report showing, for each contributor node, the number of entities submitted and not submitted in the various steps, regardless of user rights. Access to the report must be gained using the functions for the role (0001937).
Submission Status grouped by Consolidation Method	Only on the **Overview** tab. This allows you to extract a report showing, for each consolidation method, the number of entities submitted and not submitted in the various steps, regardless of user rights. Access to the report requires the function (0001937) to be included in the user's role.
Change consolidation scope report	Allows you to extract a report on variations in the consolidation area. The report shows the consolidation rules and entities for the two selected scenarios. The run window asks you to select a consolidation scenario/period and decide whether you want to compare it with the carry forward scenario or a specific scenario/period. The report can be displayed in full view mode or show the differences only. See "Change consolidation scope report window" on page 575.
Consolidation area perimeter	This shows the deployed consolidation area tables, with all information on the entities included in it (divided into line-by-line and at equity) for consolidators that are not administrators and cannot view them from the process configuration. See "Consolidation area scope page" on page 577.
Entity/Classifier Relationships	Only visible if financial investment reclassification data processing is enabled in the process. Shows the Entity/Reclassification variable relationships for consolidation scenarios belonging to the Process. See "Entity/Classifier Relationship page" on page 576.

Utility

Element	Description
Copy amounts and journals	Copies amounts, notes, entity journals and consolidation journals from one scenario to another chosen from among the active original scenarios. ***Note**: the source scenario must be visible to the user, while the target scenario must be editable by the user.* See "Copy amounts and journals window" on page 579.
Copy Consolidation	Copies data from one scenario/period to another. Copies both the data tables and the master tables linked to them (scenarios, mergers, consolidation areas). Once complete, the consolidation area is deployed. See "Copy Consolidation window" on page 567.

Element	Description
Copy consolidation on original	Copies data from one consolidation scenario to the specified original scenario/period. Consolidable amount type data is copied onto the gross amounts and IC amounts of the specified original scenario/period/entity and category. See "Copy consolidated on original window" on page 587.
Lock data	Runs data processing to lock/unlock data editability for the selected entities/steps. Running the “lock” operation means that the data cannot be edited by any user, regardless of their rights and regardless of submission status. See "Lock data and Unlock data windows" on page 585.
Unlock data	Unlocks locked data entry for the selected entities/steps. See "Lock data and Unlock data windows" on page 585.

Actions section of the Consolidation scenarios tab

User

Application database > Processes tile > select process > Consolidator > select Consolidation Scenarios

Application database > > Navigation panel > Processes > select process > Consolidator > select Consolidation Scenarios

Actions

Element	Description
Diagnostics	Allows you to run diagnostics, filtering the main dimensions (e.g. consolidation scenario, steps, amount types). Diagnostics can be run on both the selected consolidator nodes and the entities/contributor nodes themselves. See Diagnostic.
Consolidation Data Processing	Allows you to run consolidation data processing on the selected nodes and node entities. ***Note**: selecting the highest-level consolidation node is not equivalent to processing all entities. For example, for data processing by counterparty, only entities directly belonging to the node and entities in pairs of entities belonging to different consolidation nodes will be generated.* To process all entities, you must select all consolidation nodes. See "Consolidation Data Processing" below.
Process reports	Allows you to generate reports on data, entities and process configuration. See "Process reports" below.

Consolidation Data Processing

Element	Description
Standard	Opens a window showing the elements for which data have been edited and allows you to run data processing on these data.
Custom	Runs data processing enabled for the process, making it possible to select the original and consolidation scenarios to process and decide the type of data processing to run (entity, group, area).

Process reports

Element	Description
Journals book	Extracts a report with all journals entered on the selected nodes and on entities belonging to the selected nodes. See "Journals book window (consolidator)" on page 573.
Ad-hoc analysis	Runs the data analysis via drill down onto the CCH Tagetik dimensions. See Ad-hoc analysis.

Element	Description
FX rate difference reserves analysis	Analyses variations in and the effects of the FX rate difference reserve in relation to the opening financial year (historic FX rate, annual net result, intercompany entries, other accounts not at the final FX rate and FX rate difference).
Financial investments - Net equity analysis	Summarises the data for financial investments, net equity, consolidation eliminations for financial investments/net equity, minority shareholdings and net equity reclassification (NER) of entities belonging to the selected consolidation scenario/period.
Net Result and Reserves Group Evolution analysis	Allows you to analyse changes to net equity and annual net result for each entity belonging to a given consolidation area. See "Net Result and Reserves Group Evolution analysis window" on page 584.
Pick-up check report	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to control the effect generated by Equity pick-up data processing on entities. For every direct investment relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference.
Pick-up query	Only visible if Equity pick-up data processing on entities is active in the process. Allows you to analyse in detail the pick-up journals generated by the Equity pick-up data processing on entities. The report is only available if **Generate detailed information for the pick up query** has been selected in the pick-up rules for the Equity pick-up data processing. For more details on the data processing pick-up rules, see Equity Pick-Up.
Change consolidation scope report	Extracts a report on variations in the consolidation area. The report shows the consolidation rules and entities for the two selected scenarios. The run window asks you to select a consolidation scenario/period and decide whether you want to compare it with the carry forward scenario or a specific scenario/period. The report can be displayed in full view mode or show the differences only.
Consolidation area scope	This shows the deployed consolidation area tables, with all information on the entities included in it (divided into line-by-line and at equity) for consolidators that are not administrators and cannot view them from the process configuration.
Entity/Classifier Relationships	Only visible if financial investment reclassification data processing is enabled in the process. Shows the Entity/Reclassification variable relationships for consolidation scenarios belonging to the process.

Copy Consolidation window

User

Application database > Processes tile > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy Consolidation

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Utility > Copy Consolidation

Purpose of window

Copies data from one scenario/period to another. The utility copies both the data tables and the master tables linked to them (scenarios, mergers, consolidation areas).

Available options

Element	Description
Original and Consolidation	Copies original and consolidation scenarios.
Only Original	Copies between original scenarios.
Only Consolidation	Copies between consolidation scenarios.

Element	Description
Copy From	
Original scenario	Only for **Original and Consolidation** and **Only Original**. Source scenario
Consolidation scenario	Only for **Original and Consolidation** and **Only Consolidation**. Source consolidation scenario from among those linked to the selected original period scenario.
Period	Source period(s). If the scenario in **Copy From** is the same as the scenario in **Copy to**, the period must be specified and different; a period/scenario cannot be copied onto itself. If the period is not specified or several periods are selected, the copy is performed from a period onto itself.
Copy to	
Original scenario	Only for **Original and Consolidation** and **Only Original**. Target scenario. This is pre-completed with the scenario selected from the process cockpit. See "Cockpits: common elements" on page 511.
Consolidation scenario	Only for **Original and Consolidation** and **Only Consolidation**. Target consolidation scenario. The user can choose from among all consolidation scenarios belonging to the selected original scenario/period (for “Original and Consolidation”) or all consolidations scenarios belonging to the selected process (for “Only Consolidation”).
Period	Target period. This is pre-completed with the period selected from the process cockpit. To be set when the scenarios in **Copy From** and **Copy to** are the same. If they are, they must be different from the source period. Do not set this in the following cases: • The **Period** field in **Copy From** is not set. • Several source periods have been selected.
Data filters	
Account	Account on which to filter the source data. This can be defined by indicating individual accounts or a node of a hierarchy defined on the account dimension.
Category	Category on which to filter the source data. This can be defined by indicating individual categories or a node of group of categories.
Advanced options	
Keep user upd and date upd	If selected, this reports the user and date of the source data on the copied data. If not selected, it reports the code of the user who ran the copy and the date/time at which the copy was performed.
Copy data model for scenario/period	If selected, the system also copies tables containing information that depends on the scenario/period. Before performing the copy, the system deletes any pre-existing data from the target scenario/period. The origin of the copied data is the one present on the source data.
Copy the submission status	Only for **Original and Consolidation** and **Only Original**. Copies tables containing submission information.

Interactive Entries View (IEV)

Application Database > Navigation Panel > Processes > Select Process > Consolidator > Select Overview > Select Entities > (Actions section) > Process Report > Interactive Entries View (path from standard process)

Application Database > Navigation Panel > Processes > select process > Report icon > Interactive Entries View (path from multi-organisation process)

Introduction

The Interactive Entries View (IEV) report allows the Consolidator user to analyse the consolidated data, detail them for the different dimensions, with the possibility of going back to the original data and the detail of the adjustments.

Data navigation and analysis are eased by filtering functions, selection of data granularity and the possibility of grouping dimensions and displaying subtotals.

Tabs on the page

Please find below the most important fields.

Element	Description
Filters	allow you to pick the portion of data to be displayed. Very useful for 'targeted' data surveys. The use of filters can have a positive effect on the performance of the report and makes it easier to navigate the data. It is also possible to select dimensional elements through the selection of hierarchical nodes. Selecting the node always deploys the list of elements.
Columns	allow you to select and sort in the results grid the dimensions to be displayed and the ascending or descending order of the elements contained in each column. ***IMPORTANT**: Activating a dimension means not only seeing it 'in rows', but it means disaggregating the data and displaying more rows for more detailed information.*
Groupings	allow you to identify the dimensions whose elements will be displayed in homogeneous groups divided by a separating line. The visualisation facilitates navigation and understanding of the data, while the possibility of displaying subtotals on the amounts provides useful aggregate information for data analysis.

Presets

The user has the option of setting up and saving configurations for launching the report, which can then be reused for subsequent accesses.

The configurations that can be saved are those defined in the tabs:

- Filters
- All Columns

Groupings

Thus the following are not included:

- Consolidation area
- Segment

Presets are very useful to speed up report set-up time and to achieve better performance.

Filtering data from the results grid

From the results grid by right-clicking the mouse, it is possible to filter the data in two ways: Filter by size: opens the filter panel and highlights the size of the cell selected in the grid, Filter by cell: opens the filter panel and highlights the size of the cell selected in the grid, automatically filling in the filter field with the value selected in the grid. Note: It is not possible to filter from a multi-selection of cells.

Exporting data to Excel

The report provides an export for analysis on Excel. By clicking on the appropriate icon, records are exported to an Excel spreadsheet. The export is not a mere transposition of the displayed records as the data are queried again in conjunction with the export. This is why the system signals if you launch the export without having pressed the 'Apply' button after editing the filters. If the number of exported records is too high, the system prevents export.

Accessing the detail of a journal

The report provides an export for analysis on Excel. By clicking on the appropriate icon, records are exported to an Excel spreadsheet. The export is not a mere transposition of the displayed records as the data are queried again in conjunction with the export. This is why the system signals if you launch the export without having pressed the 'Apply' button after editing the filters. If the number of exported records is too high, the system prevents export.

Reading data from the original scenario

The report is able to read and display data from the original scenario. Simply activate the dimensions 'Entity journal currency amount' and 'Entity journal currency'. Additional columns show the currency and

amounts on the original scenario, respectively.

Analysing data based on Segment Information

By activating the Segment option, the displayed data are shown as if the Entities selected in the filters belonged to a segment of the group. In other words, data belonging to consolidation adjustments between Entities outside the selection and also those between an Entity in the selection and an Entity outside the selection are excluded. The Segment option shall be used in the presence of Entity filters that return at least two Entities but not all Entities in the group.

Achieving better performance

Broadly speaking, the time is extended if:

- the number of records is substantial
  - Filter the report by the data section of interest
  - Reduce the granularity of data by deselecting columns whose analysis is not essential
- the query is also launched on the original scenarios
- If you are not interested in the data on the original scenario, deactivate the columns "Entity journal currency amount" and "Entity journal currency".
- multiple changes are made to the report configuration

When changes are made to the Columns and Subtotals tabs, the report automatically starts updating the results in the grid. The data query starts after one second to allow for different configuration changes. The report may experience high response times.

***Note**: we recommend using Presets to optimise performance and the browsing experience.*

Other information

The report cannot be launched on historical period scenarios. The user name and user date are not included in the report because they are in many cases incompatible with the data displayed. Example in the case of displaying both original data and consolidated data, or in the case where a split of the data by counterpart is requested. All possible details, including user name and user date, are instead available when accessing the detail of an Entity or Consolidation journal. Origins are those of the consolidation scenario. For example, the origins 'INPUT_WEB', 'INPUT_DEFORM' become 'INPUT' The filter on the Adjustment Number is not available.

Drill down parameters page (ad-hoc analysis)

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Ad-hoc analysis

Application database > Navbar > Processes > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Ad-hoc analysis

Purpose of the page

This page allows you to run an analysis of the data, or extract numerical data of the financial model from the database and analyse it in the interface, using a pivot table, or in Excel, by downloading an XLSX file.

Page sections

Element	Description
Drill down parameters (or ad-hoc analysis filters)	Allows you to define the data on which to run the ad-hoc analysis. Every row identifies a dimension/hierarchy on which to filter the data.
Data processing management buttons	These allow you to view data from the analysis and/or download them in an XLSX file.

Details of the drill down parameters table

Element	Description
	Adds a row.
	Deletes a row.
Size	Allows you to select an element or hierarchy node of a dimension. ***Note**: for accounts, it is also possible to filter by control group, financial statement template or form.*
Filters	Allows you to define the values to be included in the analysis through search operators. • **=**: selects a specific element or node of the dimension. • **like**: selects all records for which the code is similar to the search term.
Detail	• Active: analytical data up to the highest level of detail is reported for every extracted element. • Not active: the analysed elements are filtered based on the requirement set in **Filters** and aggregated, without showing the details, at the level of the individual element.
Display mode	Only with **Detail** selected. Allows you to specify how the analysed elements are displayed. • **Code** • **Description** • **Code and description**

Data processing management buttons

Element	Description
Next	Closes the window and displays the data from the analysis in a pivot table.
Download	Downloads an XLSX file containing the analysed data. In the file, the **Pivot table** spreadsheet shows details of the analysed data in a pivot table, the **data** spreadsheet shows the list of the analysed data in a table.

FX rate difference reserves analysis window

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > FX rate difference reserves analysis

Application database > Navbar > Processes > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > FX rate difference reserves analysis

Purpose of window

This window allows you to download a report with results of the FX rate difference reserves analysis. This data processing analyses variations in the FX rate difference reserves compared with the opening year, and shows the various effects (Historic FX rate, Annual net result, Intercompany, Other accounts not at the final FX rate and FX rate difference).

Fields in window

Element	Description
Consolidation scenario/period	Opens a window to select the consolidation scenario/period on which to run the analysis.
Amount Type	Allows you to select the type of amount to analyse. • **Converted** • **Consolidable**
Account to analyze	Allows you to select the account on which to run the analysis.
Entity	Allows you to select the entity on which to run the analysis.
Category	Allows you to select the category on which to run the analysis.
Analysis method	Allows you to select the type of analysis. • **Detailed analysis of reserve entries** • **Analysis of the original data in aggregated reserve entries**
Contribution by entity	The report shows details of the values that entities contribute to the consolidable amount.
Contribution by entity/category	The report shows details of the values that entities/categories contribute to the consolidable amount.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Financial investments - Net equity analysis window

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Financial investments - Net equity analysis

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Process reports > Financial investments - Net equity analysis

Purpose of window

This page allows you to download the data analysis report on financial investments, net equity, consolidation eliminations for investments/net equity, minority shareholdings and net equity reclassification (NER) of entities belonging to the selected consolidation scenario/period.

Fields in window

Element	Description
Consolidation scenario/period	Opens a window to select one or more scenarios/periods on which to run the analysis.
Child entity	Opens a window to select the child entity on which to run the analysis.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Pick-up check report window (consolidator)

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Pick-up check report

Application database > Navbar > Processes > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Pick-up check report

Purpose of window

This window allows you to download a report on equity pick-up data processing. In particular, it allows you to check the effect generated by equity pick-up data processing on entities. For every direct investment relationship, the report compares the value of the owner entity's financial investment with the net equity of the owned entity, inclusive of pick-up journals, and calculates the difference.

Fields in window

Element	Description
Scenario/period	Opens a window to select one or more scenarios/periods on which to define the value of the owner entity's financial investment.
Entity	Opens a window to select the owner entity.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Journals book window (consolidator)

User

Application database > Processes tile > select process > Consolidator > select Summary or step tab > select entity > (Actions section) > Process reports > Journals book

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Process reports > Journals book

Purpose of window

Allows you to extract a report with all the consolidation journals on the selected nodes.

Window sections

Section	Description
Report format	Allows you to select the format of the report.
Scenario /Period	Allows you to select the desired scenario/period.
Journals filter	Allows you to specify any filters to be applied to journal headers, in order to extract only the desired journals and limit the volume of data extracted. ***Note**: regardless of the filters applied, the system will only extract data from journals belonging to entities or consolidator nodes selected in the cockpit and in categories visible to the user.*

Section	Description
Rows filter	Allows you to specify any filters to be applied to journal rows, in order to extract only the desired rows and limit the volume of data extracted. ***Note**: regardless of the filters applied, only rows with amounts other than zero and rows on accounts visible to the user will be extracted.*
Grouping and Sorting	Allows you to specify how the extracted data is grouped and sorted.

Options in the sections

Element	Description
Report format	
XLSX	Generates the report in XLSX format.
PDF	Generates the report in PDF format. This format has some limitations and must be extracted without journals grouping and with rows grouping set to **summary with origin**. Additionally, for the journal rows, it only displays the main information. This report is not available for processes with relationship type equal to **by entity - custom dimension 2** or **by entity - synthetic custom dimension 2**.
Scenario /Period	
Scenario type	Set the desired scenario type. • **Original scenarios** • **Consolidation scenarios**: extracts consolidable amount data ***Note**: field is not visible to contributor users, who can only extract data from original scenarios.*
Scenario /Period	Mandatory field. • With the **Consolidation scenarios** type selected, this allows you to choose an active consolidation scenario/period that is visible to the user and linked to the process. • With the **Original scenarios** type selected, indicates the scenario/period from which the cockpit was accessed. Can only be changed in single submission processes.
Journals filter	
Category type	Journal type to be exported. If not specified, both entity journals and consolidation journals will be extracted. The XLSX report contains one spreadsheet for entity journals and one spreadsheet for consolidation journals. In the PDF report, journals follow one another in the same file. Those journals appear on different spreadsheets in the XLSX report and in sequence in the PDF report.
Category	Only with **Category node** not selected. Allows you to select one or several categories from among those visible to the user. Allows you to select the Entity Journals, Consolidator Entity Journals and Consolidation Journals category types, in line with the value selected in **Category type**.
Category node	Only with **Category** not selected. Allows you to select a grouping of categories from among those with at least one category visible to the user. If a value is specified, the system extracts the journal data on categories belonging to the selected node, going down recursively to the last level.
Journal number	Allows you to select one or several journals belonging to the selected scenario/period.
Rows filter	
Show only main accounts	Only extracts the rows on the most important accounts involved in the journal, i.e. the accounts which are displayed as **Main accounts on Journals** in the data model. See .
Exclude Result accounts and Variation	Selected by default. The extraction excludes rows on accounts that belong to the set of result accounts specified from among the requirements of the process's calculation logics. In particular, the P&L result account, the BS result account and their variations (determined taking account only of control groups belonging to the process) are excluded.

Element	Description
Account type	If specified, this only allows you to recover the rows on the indicated account type: • **Detail** • **Variation** • **Normal** (default)
Account nature	If specified, this only allows you to recover rows on accounts of the specified nature: • **Profit & Loss** • **Balance Sheet** • **Memorandum** • **Other Variations** • **Other stocks**
Show Counterparty	Enters information related to the counterparty (counterparty entity, CTP custom dimension 2, transaction currency, transaction currency amount, total CTP amounts) in the reports.
Hide rows set to 0	The extraction excludes rows that, maintaining the same account, balance custom dimensions and counterparty.
Origin	Allows you to select one or several origins from among those that are consistent with the selected **Scenario Type**.
Grouping and Sorting	
Journals grouping	Ways in which journal headers must be grouped: • <empty field>: grouping by journal number • **Journals grouping**: grouping based on the **Grouping for Journals book** label set manually on the journal headers • **Entity 2**: grouping for Entity 2 and extraction of consolidation journals only
Journals order	Ways in which journal headers can be ordered: • **Journal number** (default) • **Category / Journal number**
Rows grouping	Ways in which journal rows can be grouped: • **Analytic** (default): no grouping • **Synthetic**: grouping by account, custom dimensions and counterparty • **Synthetic with origin**: grouping by account, custom dimensions, counterparty and origin
Rows order	Ways in which journal rows can be ordered: • **Account/Origin** (default) • **Origin/Account**

Buttons in the window

Element	Description
Run	Runs the report. Once complete, the system displays a log window and downloads the report in XLSX format.
Cancel	Closes the window.

Change consolidation scope report window

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Change consolidation scope report

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Process reports > Change consolidation scope report

Purpose of window

This window allows you to extract a report on changes to the consolidation area, which shows the entities and consolidation rules of the two selected scenarios.

Fields in window

Element	Description
Consolidation scenario/period	Opens a window to select a scenario/period for which to extract the report.
Compare with	Defines the element with which to compare the consolidation scenario/period. • **Carryforward scenario** • **Specific scenario/period**: opens a window to select a specific scenario/period.
Display mode	Defines the display mode for data in the report. • **Full view**: shows all extracted data. • **Only differences**: only shows data that represents differences between the compared scenarios.

Buttons in the window

Element	Description
Cancel	Closes the window.
Run	Closes the window and downloads the report in XLSX format.

Entity/Classifier Relationship page

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Entity/Classifier Relationships

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Process reports > Entity/Classifier Relationships

Purpose of the page

This page allows you to view the entity/reclassification relationships for consolidation scenarios belonging to the process.

For every filter set, a search operator can be defined in order to filter the data based on properties chosen by the user. The following options are available:

- contains
- does not contain
- starts with
- does not start with
- ends with
- does not end with
- is null
- is not null
- equals
- not equals

Page sections

Element	Description
search filter area	Allows you to define relationship search filters.
Results area	Displays details of an entity/classifier relationship on each row.

Details of entry search filters

Element	Description
Scenario	Allows you to select the relationship scenario or identify groups of scenarios.
Period	Allows you to select the relationship period or identify groups of periods.
Entity	Allows you to select the relationship entity or identify groups of entities.
Classifiers	Allows you to select the relationship classifiers or identify groups of classifiers.
Element	Allows you to select the relationship element or identify groups of elements.
Origin	Allows you to select the relationship origin or identify groups of origins.
User Upd	Allows you to select the user that created the relationship or identify groups of users.
Date Upd	Allows you to enter the interval in which the relationship was created.

Buttons on the page

Element	Description
Remove filters	Removes all filters.
Apply	Shows details of relationships corresponding to the selected filters.
	Allows you to add a filter.
	Removes the corresponding filter.
	Cancels the last action on the corresponding filter.

Consolidation area scope page

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Consolidation area scope

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Process reports > Consolidation area scope

Purpose of the page

This page allows you to view the deployed consolidation area tables, with all information on the entities included in it (divided into line-by-line and at equity) for consolidators that are not administrators and cannot view them from the process configuration.

For every filter set, a search operator can be defined in order to filter the data based on properties chosen by the user. The following options are available:

- contains
- does not contain
- starts with
- does not start with
- ends with

- does not end with
- is null
- is not null
- equals
- not equals

Page tabs

Element	Description
Deployed	Shows the outcome of the configurations and overrides run on the individual consolidation area.
Equity Owner Entities	Shows the table's deployment with details of equity owners.

Filters in Deployed


Element	Description
Scenario	Allows you to select the scenario.
Period	Allows you to select the period.
Entity	Allows you to select the entity.
Consolidation method	Allows you to select the consolidation method used.
Direct ownership %	Allows you to select the owner entity's direct ownership percentage in the owned entity.
Equity ratio %	Allows you to select the owner entity's equity ratio percentage in the owned entity.
Actual ownership %	Allows you to select the owner entity's actual ownership percentage in the owned entity.
Consolidation %	Allows you to select the consolidation percentage.
Deconsolidation method	Allows you to select the deconsolidation method used.
Period of the first Consolidation	Allows you to select the first period in which consolidation was carried out.
Origin	Allows you to select the consolidation origin.
User Upd	Allows you to select the user that originated the consolidation.
Date Upd	Allows you to select the time interval in which the consolidation was carried out.

Filters in Equity Owner Entities

Element	Description
Scenario	Allows you to select the scenario.
Period	Allows you to select the period.
Owner entity	Allows you to select the owner entity.
Owned entity	Allows you to select the owned entity.
<custom dimension 2> Financial investments	Allows you to select a financial investment value for every item of cust. dim. 2.
Consolidation method	Allows you to select the consolidation method used.
Equity ratio %	Allows you to select the owner entity's equity ratio percentage in the owned entity.
Origin	Allows you to select the consolidation origin.
User Upd	Allows you to select the user that originated the consolidation.
Date Upd	Allows you to select the time interval in which the consolidation was carried out.

Buttons on the page

Element	Description
Remove filters	Removes all filters.
Apply	Shows consolidation data corresponding to the selected filters.

Element	Description
	Allows you to add a filter.
	Removes the corresponding filter.
	Cancels the last action on the corresponding filter.

Copy amounts and journals window

User

Application database > Processes tile > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy amounts and journals

Application database > Navbar > Processes > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy amounts and journals

Purpose of window

This window allows you to copy the following:

- financial statement data and entity journals from one scenario/period to another and from one entity to another
- journals from one scenario/period to another and between entities and scenarios/periods

***Note**: the copying of financial statements and journals can be scheduled as a job task in the task workflow of the process steps. For more details, see "Copy amounts and journals task window" on page 581.*

Available options

Element	Description
Filter set	Allows you to select a set of filters from among those previously saved. ⋮: allows you to update, rename or delete the set.
Gross and notes	Copies Gross and notes.
Entity journals	Copies entity journals.
Consolidation journals	Copies consolidation journals.
Customize	
Gross amount	Only for **Gross and notes**. Copies gross amounts.
Reconciliation account	Only for **Gross and notes**. Copies reconciliation accounts.
IC cockpit notes	Only for **Gross and notes**. Copies the notes inserted in the IC entry matching step.
IC amounts	Only for **Gross and notes**. Copies intercompany entries.
Notes	Only for **Gross and notes**. Copies the notes added to cells of forms.
User's details and date of origin	If selected, this records the user and date of the source data on the copied data. If not selected, it records the user as the user code that performed the copy and the date as the date/time at which the copy was performed.
Markup	Only for **Gross and notes**. To be applied to the copied amount to convert it into a different unit of measurement from the one used in **Copy From** in the scenario. 0: no coefficient to apply. For example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.
Transactional form	Copies data entered in one or more transactional forms. See .

Element	Description
Copy From	
Scenario	Source scenario(s) visible to the user. The copy can be performed from several scenarios at the same time, by choosing from among the active original scenarios on which the user is authorised.
Period	Source period. Only to be indicated if a single scenario has been selected in **Copy From**. If the period is not specified, the copy is performed from every period onto itself. This allows you to copy data for all open periods for the selected scenario. To copy data related to several but not all periods of the selected scenario, the copy must be repeated as any times as there are periods to be copied.
Entity	Only for **Gross and notes** and **Entity journals**. One or several source Entities. If the entity is not selected or if several entities are selected, the copy is performed from all entities onto themselves.
Entity 1	Only for **Consolidation journals**. Filters the source data based on the first entity of the relationship.
Entity 2	Only for **Consolidation journals**. Filters the source data based on the second entity of the relationship.
Advanced filters (Copy From)	
Origin	Enter the origin of the source data. These origins are set by default: • **BREAK_BACK** • **INPUT_DEFORM** • **INPUT_WEB** • **MAP** • **QDL** Only for **Entity journals** and **Consolidation journals**: the origin refers to the journal rows, not the header.
Category	Category on which to filter the source data.
Account nodes	Filters source data based on the accounts associated with one or more nodes of a given hierarchy defined on the account dimension.
Journal number	Only for **Entity journals** and **Consolidation journals**. Allows you to select individual source journals to further filter the data.
Select accounts from form	Filters source data based on the editable accounts present in one or several forms.
Transactional forms	Only if the copy is performed from transactional forms. Filters the source data based on the transactional forms.
Copy To	
Scenario	Active and original target scenario, editable by the user. Only one can be selected.
Period	One or several target periods. Must be indicated in the following cases: • The source period has been specified, so one or several target periods must be specified. • No source period has been specified and, in the source scenario, the periods are different from those of the target scenario. It does not have to be indicated in the following cases: • No source period has been specified. • The periods of the source scenario are identical to those of the target scenario.

Element	Description
Entity	Only for **Gross and note** and **Entity journals**. Target entity code. Must be indicated in order to copy data onto a single entity other than the one already indicated in **Copy From**. Should not be indicated in the following cases: • To copy data onto the same entity from which it will be read. • To copy data from several entities. In this case, the system performs the copy from all entities onto themselves.
Advanced filters (Copy To)	
Origin	Enter the origin that will be assigned to the copied data: • **COPY_GENERAL** • **COPY_ORIG**: the system keeps the source origin for the copied data. • **INPUT_WEB**
Category	Overrides the target category. If this is not specified, the copy is performed while keeping the source category the same.
Deletion policy: based on input account	If a filter is applied to the accounts, this indicates whether that filter will also be applied during the deletion of any data existing in the copy target tables. This is useful when, for example, after performing the copy filtered on a number of forms, the user wants to rerun the same copy but only for one or more forms without affecting the values of other copied forms.

Buttons on the page

Element	Description
Save new filters set	Saves the filters set, to be reused later.

Copy amounts and journals task window

User

Application database > Data Processing tile > Jobs > Choose Job > ⋮ > Show graph > Edit > Other activities > Copy amounts and journals

Application database > Navbar > Data Processing tile > Jobs > Choose Job > ⋮ > Show graph > Edit > Other activities > Copy amounts and journals

Purpose of window

This window allows you to schedule the copying of amounts and journals.

Available options

Element	Description
Gross amount	Copies gross amounts.
Entity journals	Copies entity journals.
Consolidation journals	Copies consolidation journals.

General parameters

Element	Description
Amount type	Source data type: • **Original** • **Proportional** • **Converted** • **Consolidable**
Markup	Coefficient to be applied to the copied amount to convert it into a different unit of measurement from the one used in **Copy From** in the scenario. 0: no coefficient to apply. ***Note**: for example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.*
User's details and date of origin	If selected, this records the user and date of the source data on the copied data. If not selected, it records the user as the user code that performed the copy and the date as the date/time at which the copy was performed.
Copy From	
Scenario	Source scenario(s).
Period	Source period. If the period is not specified, the copy is performed for every period, onto itself. This allows you to copy data for all open periods for the selected scenario. To copy data for several periods, you can use multi-selection if you want to copy only some of the scenario periods onto their target scenario counterparts. If you want to copy individual periods onto periods other than the target scenario, you need to repeat the copy function as many times as there are periods to be copied.
Copy to	
Process	Target process.
Scenario	Active original target scenario onto which to copy user-editable data. Only one can be selected.
Period	Target period. To be indicated in the following cases: • If the source period has been specified then that and the target periods should be specified. • The source period has not been specified and the open periods for the source scenario are different from those of the target scenario. This does not need to be indicated if the source period has not been specified and the open periods for the source scenario are the same as those of the target scenario.
Advanced filters (Copy From)	
Origin	Enter the origin of the source data. These origins are set by default: • **BREAK_BACK** • **INPUT_DEFORM** • **INPUT_WEB** • **MAP** • **QDL**
Account hierarchy	Filters the source data according to the indicated hierarchy.
Account node	Filters source data based on one or more accounts related to the nodes of a given hierarchy defined on the account dimension.
Form	Filters source data based on the accounts present in the form or in the specified forms.
Advanced filters (Copy to)	
Origin	Enter the origin of the copied data: • **COPY_GENERAL** • **COPY_ORIG**: the system keeps the source origin for the copied data. • **INPUT_WEB**

Element	Description
Origin to delete	• **COPY_GENERAL** • **COPY_ORIG**: the system keeps the source origin for the copied data. • **INPUT_WEB**
Deletion policy: based on input account	If a filter is applied to the accounts, this indicates whether that filter will also be applied during the deletion of any data existing in the copy target tables. This is useful when, for example, after performing the copy filtered on a number of forms, the user wants to rerun the same copy but only for a certain form without affecting the values of other copied forms.

Gross amounts & Entity journals

Element	Description
Gross amount customisation	
Gross amount	Copies gross amounts.
Reconciliation account	Copies reconciliation accounts.
IC cockpit notes	Copies the notes inserted in the IC entry matching step.
IC amounts	Copies intercompany amounts.
Notes	Copies the notes inserted in the cells of a form.
Transactional form	Copies data entered in one or more transactional forms.
Copy From	
Entity	Source entity(ies). If the entity is not selected or if several entities are selected, the copy is performed from an entity onto itself.
Copy to	
Entity	Copy target entity code. This must be indicated to copy data onto a different entity from the one previously indicated in **Copy From**. This does not need to be indicated in the following cases: • if you want to copy data onto the same entity from which it will be read • if you want to copy data from several entities. In this case, the system performs the copy from an entity onto itself.
Gross amounts: advanced filters (Copy From)	
Category	Category on which to filter source data
Note - Category	Category on which to filter source notes
Transactional form - Category	Category on which to filter source data entered in transactional forms
Form	The system filters the data entered in the accounts contained in the selected forms
Gross amounts: advanced filters (Copy to)	
Category	Overrides the target category. If this is not specified, the data is copied onto the same category.
Note - Category	Overrides the category onto which to copy notes. If this is not specified, notes are copied onto the same category.
Transactional form - Category	Overrides the category onto which to copy data entered in transactional forms. If this is not specified, the data is copied onto the same category.
Entity journals: advanced filters (Copy From)	
Category	Overrides the category for which to filter the source journals.
Journal number	Filter journals based on journal number code.
Entity journals: advanced filters (Copy to)	
Category	Overrides the category onto which to copy journals. If this is not specified, the copy is performed while keeping the source category the same.

Consolidation journals

Element	Description
Copy From	
Entity 1	Filters the source data based on the first entity of the relationship.
Entity 2	Filters the source data based on the second entity of the relationship.

Element	Description
Copy to	
Advanced filters (Copy From)	
Category	Category on which to filter the source data.
Journal number	Allows you to select individual source journals to further filter the source data.
Advanced filters (Copy to)	
Category	Overrides the target category. If this is not specified, the copy is performed while keeping the source category the same.

Net Result and Reserves Group Evolution analysis

Report contents

For every entity, the system shows the impacts on net equity and on the annual results for the amount and entity adjustment categories. This is done both in local currency for the original scenario and in the consolidation currency for the consolidation area selected at the start.

The impact of consolidation journals can be shown in **Aggregated and Consolidated** mode or in **Contribution** mode. In **Aggregated and Consolidated** mode, the report shows the following:

1. entity data, i.e. amounts and adjustments by entity
2. total of all entities, equivalent to the aggregated figure
3. consolidation journals
4. grand total showing the consolidated figure

In **Contribution** mode, the consolidation journals in the report are attributed in part to the various entities for which entries have been made in the same rows. The same journal can appear several times based on the number of entities involved in the journal itself.

Columns relating to equity show the sum of the impacts on the balance sheet accounts and normal accounts which, in the chart of accounts, have **Net Equity** entered in the **Use for setup** field.

Net Result and Reserves Group Evolution analysis window

User

Application database > Processes tile > select process > Consolidator > select tab > select entity > (Actions section) > Process reports > Net Result and Reserves Group Evolution analysis

Application database > Navigation panel > Processes > Consolidator > select tab > select entity > (Actions section) > Process reports > Net Result and Reserves Group Evolution analysis

Purpose of window

This window allows you to analyse changes to net equity and the annual results for each entity of a given consolidation area.

Available options

Element	Description
Consolidation Areas	Allows you to choose the consolidation area belonging to the process from among those visible to the user.
Category node	Optional. Allows you to choose the node of categories according to which the displayed data should be filtered.

Element	Description
Type	Display mode for the consolidation journals in the report: • **Aggregated and Consolidated**: the report shows the entity data (amounts and adjustments by entity) before the total of all entities. The total is equal to the aggregated figure. After the aggregated figure, the system shows all the consolidation journals and a grand total showing the consolidated figure. • **Contribution**: With the "Contribution" option enabled consolidation journals are attributed in part to the various entities for which entries have been made in the same rows.
Show journal number	If selected, the report shows the individual changes, with journal numbers. It also allows you to open a window from the report to view details of the entire journal. If not selected, the report shows changes grouped by category.

Buttons on the page

Element	Description
Apply	Generates the report according to the settings.
	Downloads the report in PDF format with data relating to the selected run parameters. ***Note**: it may take several minutes to generate reports in PDF format.*
	Downloads the report in Excel format with data relating to the run parameters selected the last time the **Apply** button was pressed in the application.

Lock data and Unlock data windows

User

Application database > Processes tile > select process > Consolidator > Summary > select one or several nodes > (Actions section) > Utility > Lock data > Unlock data

Application database > Navbar > Processes > select process > Consolidator > Summary > select one or several nodes > (Actions section) > Utility > Lock data > Unlock data

Purpose of window

This window allows you to lock or unlock data editability on nodes and entities and on specific steps.

***Note**: when editability is locked, the data cannot be edited by any user, regardless of their rights and regardless of submission.*

Available options

Element	Description
Original scenarios/periods	For processes with business cycles by scenario/period, this allows you to select the scenarios/periods that are visible to the user and belong to the process. By default, the scenario/period with which the cockpit was accessed is proposed. For processes with a single business cycle, the field is not editable and shows the list of all scenarios/periods belonging to the process on which you are working.
Consolidator Nodes	Mandatory non-editable field. Shows selected nodes that are to be consolidated by the cockpit and visible to the user.
Run also on entities	Also runs data processing on entities belonging to the selected consolidation nodes and on contributor steps. Selected by default.

Element	Description
Entities	Non-editable field. Shows entities belonging to the consolidation nodes and to the selected scenarios/periods. Those nodes are the ones visible to the user, where **Only counterparty** or **Only consolidator** has not been selected in at least one of the selected original scenarios/periods. The data processing is also run on entities (belonging to the selected consolidation nodes and on the contributor steps) which only have **Run also on entities** selected.
Steps	Mandatory field. Allows you to select the steps on which to run data processing. With **Run also on entities** selected, the proposed steps are all those associated with the process. Otherwise, the proposed steps are the consolidator and mixed contributor/consolidator steps.

Copy consolidation on original

When to use the copy function

It is useful to use the copy function in the following situations:

- When you want to copy a sub-holding's consolidation from the consolidation scenario to the original of a fictitious entity representing that sub-consolidate. This allows you not to consolidate all entities together.
- When you want to change the unit of measurement of a processed consolidation. In fact, the result of the consolidation can be copied onto a fictitious entity or a fictitious scenario using a specific coefficient and then running balancing on the original scenario.

How data are copied

Before copying data, the system deletes any original gross amounts and IC amounts, as applicable, from the target scenario/period/entity/category. IC amounts are only deleted if the **Keep CTP** option has been selected. Deletion takes place according to the value entered in the **Deletion Policy** field.

When performing the copy, the system defines the gross amounts and intercompany entries. To do this, it reads the consolidated data tables, filtering on the **Consolidable** amount type and adds those data under the same **Scenario**, **Period**, **Account**, **Custom dimension 1, ... 5**, **CTP Entity** and **CTP Custom dimension 2**.

Currency and amounts

The currency of the copied data is the currency indicated for the entity in the target data collection process. The copied data amounts are obtained according to the following rules:

When...	Then the system...
The account **Conversion type** is **None**	copies the account.
the source declaring entity currency is different from that of the target	copies the account amount, converts it at the final FX rate for the target currency and multiplies it by the coefficient indicated in the run window.
both values are the same	copies the account amount and multiplies it by the coefficient indicated in the run window.

For intercompany entries, the system defines the **Invoice Currency** and **Document currency amount** as follows:

- With the values of the corresponding fields on the source data, if the source data are consolidated amounts or consolidated rows of entity journals.
- With the journal currency and the amount expressed in the journal currency, if the source data are consolidated rows of consolidation journals.

All copied data is marked with **COPY_CONSOLIDATED**.

Copy IC data onto entities of the sub-consolidate

Selecting the **Copy IC to entities on the sub-consolidate** field has the following effects:

- The matching cockpit, which only works on the original category, is not affected by these intercompany operations.

- The declared intercompany operations to entities of the sub-consolidate are cloned and written off. This prevents capacity problems for entities that have declared intercompany operations to entities of the sub-consolidate.
- Eliminations, which function on the basis of the global consolidation scenario, are run with the system reading the sum of the original category and the IC category.

Copy consolidated on original window

User

Application database > Processes tile > select process > Consolidator > select Summary/step tab > select entity > (Actions section) > Utility > Copy consolidation on original

Application database > Navbar > Processes > select process > Consolidator >select Summary/step tab > select entity > (Actions section) > Utility > Copy consolidation on original

Purpose of window

This window allows you to copy data from one consolidated scenario/period onto an original scenario/period.

Available options

Element	Description
Custom dimension	
Scenario /Period	Target scenario/period. For processes to be submitted by scenario/period, the field reports the scenario/period selected in the process cockpit.
Category for Gross Amounts	Target category onto which to copy gross amounts
Category for IC Amounts	Target category onto which to copy intercompany amounts
Consolidation Scenario to Entity mapping	
Consolidation Scenario to Entity mapping	Consolidation scenarios linked to the selected target original scenario/period. For consolidation scenarios from which you want to copy data onto the original, you must indicate the target entity.
Options	
Deletion Policy	Deletion policy to be applied to rows of data that may be present on the target original scenario/period/entity/category. See "Deletion Policy" on the next page.
Apply Coefficient	Coefficient to be applied to the copied amount to convert it into a different unit of measurement from the one used in the source scenario. Only valid if the conversion type of the target account is not equal to **None**. 0: no coefficient to apply. ***Note**: for example, to convert EUR into thousands of EUR, enter 1000 as the coefficient.*
Category	Source category. Allows you to specify a node from the group of categories to further filter the source data.

Element	Description
Keep CTP	If selected, this copies the information related to the counterparty entity and the counterparty custom dimension 2 for the copied data.
Copy IC to the entities on the sub-consolidate	Only enabled when **Keep CTP** is selected. Specifies whether intercompany data should be processed. See "Copy IC data onto entities of the sub-consolidate" on page 586. If selected: • The system copies non-deleted intercompany transactions declared by entities of the sub-consolidate onto a fictitious entity and onto the specified IC category. • Writes off and declares intercompany transactions that had been declared as being made to entities of the sub-consolidate as being made to the fictitious entity. These entries are performed on the specified IC category. If not selected, the system acts as follows: • It copies non-eliminated intercompany transactions of the sub-consolidate onto the fictitious entity. • It does not copy intercompany transactions declared as being made to entities of the sub-consolidate since the individual entities of the sub-consolidate do not belong to the “global” consolidation scenario.

Deletion Policy

Element	Description
All	Copies all data present in the consolidation scenario, regardless of their origin. Before doing this, the system deletes the existing data from the target original scenario/period/entity/category.
All excluding carry forward	Copies all data present in the consolidation scenario, except for data with origin **PRCO_RESTORE - Consolidation - Carry forward**. Before doing this, the system deletes, for the same scenario/period/entity/category, all data except for data with origin **PREL_RESTORE - Original - Carry forward** that may be present in the target original scenario. Data related to initial balances are not copied.
Only from the copy	Before copying, the system deletes, for the same scenario/period/entity/category, all data with origin **COPY_CONSOLIDATED - Copy consolidated amount on original amount** that may be present in the target scenario. This data are generated by a previous consolidated copy on the original. Therefore, all the data entered in the target original scenario with origin other than **COPY_CONSOLIDATED - Copy consolidated amount on original amount** remain. Data related to initial balances are not copied.

Submission status window (for the consolidator)

User

Application database > Processes tile > select process > Consolidator > select Summary > select entity > (Actions section) > Process reports > Submission status

Application database > Processes tile > select process > Consolidator > select tab > select entity > (Actions section) > Process reports > Submission status

Purpose of window

This window allows you to generate a record of the submission statuses of the selected entities and of the nodes to which they belong, in the various steps, based on the parent node.

Available options

Element	Description
Original scenarios/periods	Not editable. Scenario/period from which the cockpit was accessed.
Entities	By default, the field reports the entities selected in the cockpit. If nodes are selected, reports are extracted for the entities belonging to the selected nodes, going down recursively to the last level. If the pre-completed field is edited, entities with the following characteristics must be selected: • Belonging to the selected process and scenario/period, or belonging to at least one of the scenarios/periods of the process for single submission processes. • Not only counterparty or only consolidator. • Visible to the user. If no entity is selected, the submission statuses of all entities that meet the above requirements will be displayed.
Step	Business Workflow step associated with the process.
Status	Submission activity progress status.
Advanced filters	
Entity consolidation method	Allows you to filter entities in the report based on the following consolidation methods: • **Cost** • **Equity** • **Line-by-line** • **Proportional**
<Attributes>	Filters the entities in the report based on the value of the specific attributes enabled in the **Entity** elements table.

The IC Cockpit

Contents

This section covers the following topics:

The matching process 590
The IC matching cockpit 591
IC cockpit opening window 592
IC cockpit page 594
IC entry management page 599
IC cockpit reports 602
Link cockpits and processes 604
Invoice IC matching 604
IC matching by invoice 605
Working with IC Spreading 606
Create IC Cockpits page 607

The matching process

Introduction

In CCH Tagetik, the term “matching” means the process of balancing intercompany entries between companies in the same group. Matching therefore represents an attempt to make the amounts that a declaring entity presents to a counterparty entity consistent with the corresponding amounts that the counterparty presents to the declaring entity.

Matching, together with the elimination of intercompany entries, is one of the fundamental processes for consolidation and can be carried out thanks to the definition of dedicated logics; see Matching logics and intercompany elimination.

Matching and eliminations ensure that transactions between controlled entities in the same group are not presented at the consolidated level

The matching process can start when all the IC declarations that can be inserted have been inserted. If the relationship between the two entities is not correctly balanced, the managers of the two entities must collaborate to ensure that relationship respects the previously defined balancing rules.

Example

Declaring Entity	Account	CTP	Product	Amount
A00	Product Revenues	B00	Antivirus	$ -125 (€ -96)
B00	Commercial costs	A00	Antivirus	€ 100

In this example, entity A00 has sold “Antivirus” products worth $ 125 (around € 96 at the current FX rate) and entity B00 has declared a purchase cost of € 100 to A00. Generally, this happens between two entities in the same group and generates an unbalanced elimination journal. The relationship between A00 and B00 can be balanced in two different ways.

If...	Then...
one of the two entities has made an error.	one or both of the amounts must be corrected.
the data are correct for both entities.	the missing amount must be inserted in a special account (**Reconciliation accounts**) that justifies the unbalanced amount in the IC relationships.

In this example, the difference of € 4 can be identified as the “FX rate difference”: B00 has declared a cost of € 100 for each purchase of the antivirus product but A00 has declared a profit of € 96 because it registered the amount on a different day with a different FX rate. Therefore, both of the amounts are correct and the unbalanced amount is due to an external factor.

Declaring Entity	Account	CTP	Product	Amount
A00	Product Revenues	B00	Antivirus	$ -125 (€ -96)
B00	Commercial costs	A00	Antivirus	€ 100
A00	Exchange rate diff.		Antivirus	€ -4

IC matching details

Matching can be done according to one of the following methods:

Relationship type	Description
By Entity	Matching is done at the entity level. In the IC cockpit, the individual entities involved in the relationships between entities are listed.
By Entity / Custom dimension 2	Only visible if the Relationship Type is Entity/Custom dimension 2 for the data collection process. Allows you to match the intercompany entries at a more detailed level than the entity level. *For example, for entities that operate in different sectors where the consolidator needs to produce aggregated data for each line of business. The data included in the IC declarations are collected by also specifying the line of business from which the revenues or expenses are obtained.* The IC cockpit displays not only the individual entities in the relationship but also the specific custom dimensions 2 items.
By Entity Node	Matching is done at the node level instead of by individual entity. The nodes used for this analysis are those of the first level of the entity hierarchy associated with the process. The IC cockpit displays the entity nodes and not the individual entities. All the entities of the node are therefore detailed in the management page (IC entry management page).

The IC matching cockpit

What it allows you to do

The IC matching cockpit allows you to compare the amounts declared by each entity with the declarations of the respective counterparties and then insert the reconciliation accounts where the IC relationships are balanced.

In particular, it allows you to perform the following actions:

- manage approval/submission (and rejection) status
- manage IC Matching/Elimination activities at the “holding company” level and at the individual “entity” level. Ideally, this can take place up to the last level, so as not to lose traceability for each insertion or for how the final figures were generated.

Displayed amounts

The amounts displayed on each row of the IC cockpit represent the IC relationships between the various entities in the group. For every relationship/matching rule combination, the values and any unbalanced amounts present on the declared IC relationships:

- the first amount includes the IC entries between the entities of the relationship when the first entity has inserted the IC entries on the primary accounts and the second entity has inserted them on the dependent accounts
- the second amount includes the IC entries between the entities of the relationship when the second entity has inserted the IC entries on the primary accounts and the first entity has inserted them on the dependent accounts

The amount displayed is determined by the contribution of the IC entries, the entity journals with defined counterparty and the reconciliation accounts for the categories belonging to the step/cockpit to be matched and the matching logic.

The amounts are displayed in the currency indicated when the cockpit was opened (IC cockpit opening window) using the conversion rule specified in each matching rule. This means that in the case of period average FX rate rules, the amounts in the IC cockpit are calculated taking into account the amounts on all periods that are less than or equal to the selected period. An appropriate coefficient, calculated on the basis of the period FX rate and the previous period FX rate is applied to the amount of every period.

IMPORTANT: Whenever the IC cockpit has to work with split source data (period display, period average FX rate), all scenarios/periods involved in the calculation must be either online or offline.

***IMPORTANT**: when running the balancing check, the threshold value set on the rule is converted into the IC cockpit currency. The FX rate used for the conversion is the final FX rate.*

Actions on the relationship between entities

From the IC cockpit, and from the indicator that shows the status of the relationship between entities in particular, certain actions can be run in order to change the status of the entity and the relationship.

In single certification processes, actions run on the entities and on the relationships (e.g. IC insertion is complete, submit IC data, etc.) are registered simultaneously on all scenarios/periods linked to the process.

If scenarios/periods are added to/removed from the process when data collection and submission activities have been started, it is a good rule to reset the submission states. See the Reset submission states in the contributor cockpit in the Processes section.

***IMPORTANT**: if you do not want to run the reset, the colours of the IC cockpit traffic lights may not be correct and error messages could be returned in the audit.*

IC cockpit opening window

User

Processes tile > select process > Contributor > Detail summary tab > (Actions) IC Cockpit

Navbar > Processes & Workflows > Process > select process > Contributor > Detail summary tab > (Actions) IC Cockpit

Processes tile > select process > Consolidator > Detail summary tab > (Actions) IC Cockpit

Navbar > Processes & Workflows > Process > select process > Consolidator > Detail summary tab > (Actions) IC Cockpit

from a workflow task > select task that requires the running of the IC cockpit > Run

Purpose of window

This window allows you to configure the parameters and filters for opening the intercompany matching cockpit. The parameters are shown on two pages in the same window.

Buttons in the window

Button	Description
Previous	Shows the previous page of parameters to be configured.
Next	Shows the next page of parameters to be configured.
Run	Opens the IC matching cockpit according to the set parameters.
Reverse	Closes the window without opening the IC matching cockpit.

Fields in window

Field	Description
Process	Shows the selected process when entering the cockpit, and is not editable.
Show on columns	If the selected process is a single submission process, it allows you to choose what is displayed on the IC cockpit columns: • **IC matching logics**: the scenario/period can be selected from a list. • **Scenario/Period**: the IC matching logics can be selected from a list. In the IC cockpit, therefore, it is not the matching logics but the scenarios/periods that will be shown on the columns. If you also choose to view P&L on periodic data (or on logics at the period average FX rate), the data of each scenario/period will be shown considering the period length of the last significant scenario/period of the process. When the IC matching cockpit reports and the FX rate differences detail report are exported for all scenarios/periods, they take account of the period length of the individual scenario/period and therefore, different values may be found in the event that the periods are of different lengths.
Scenario /Period	For scenario/period submission processes, the field is defined with the scenario/period selected on accessing the cockpit and it cannot be edited. For single submission processes, the field is defined with the last significant scenario/period of the process (if it is visible to the user and is not offline). The user can change this scenario/period, unless the scenarios/periods are not shown in a column.
Step/Cockpit	Step/cockpit for which to run matching ***Note**: the IC cockpit with the highest code present on the lowest step will be shown by default.*
Show P&L on periodic data	If selected, the amounts are shown considering the period value rather than the cumulated value. The displayed figure is the difference between the amounts present on the selected period and the amounts present on the previous period, applying the appropriate FX rates. This setting only has an effect on matching logics with a P&L or Other Variations accounts filter. By clicking on amounts from the IC cockpit, you can thus see the following information: • **Show IC**: the periodic values with amounts converted to the Cockpit amount. However, the displayed IC entries cannot be edited. • **Edit IC**: the cumulated IC entries. The transactions of the period can be inserted.  **IMPORTANT**: For the period value to be displayed correctly, all scenarios/periods involved in the calculation must be either offline or online.
Cockpit currency	Currency with which the cockpit is opened. The chosen preferred currency is proposed.
Relationship type	The way in which you want to run matching, see Matching method.
Entity	Only displayed if the 'by Entity Node' relationship type is not selected. Entities selected in the cockpit; cannot be edited. If nodes are selected, the Entities belonging to those nodes are displayed.

Field	Description
Entity node	Only shown if the “by Entity Node” relationship type is selected. Nodes selected in the cockpit, not editable. If entities are selected, the cockpit displays the nodes to which those entities belong.
Show non-editable entities	Only displayed if the 'Entity Node' relationship type is not selected. Also shows the relationships in which the selected entities are involved, even if they cannot be edited by the user.
Exclude relationships between entities that belong to the same node	Only shown if the “by Entity Node” relationship type is selected. Only relationships between entities belonging to different nodes are shown.
CTP entity	Only displayed if the “by Entity Node” relationship type is not selected. Filters for the counterparty entities that you want to be displayed in the IC cockpit.
CTP Entity Node	Only shown if the “by Entity Node” relationship type is selected. Filters the counterparty nodes that you want to be displayed in the IC cockpit.
CTP Entity filter by consolidation scenario	Allows you to select a consolidation scenario to populate the list of counterparty entities that will be used for opening the cockpit. To match IC relationships between the entities belonging to a specific consolidation scenario, the IC cockpit must be accessed from a consolidation node and the consolidation scenario that includes the desired entities must be elected in this field.
IC matching logic	Matching logics/rules to be shown in the cockpit columns.
Account nature filter	Filters the IC matching logics, displaying only those with accounts of the specified nature in the cockpit.
Show only columns with related data	Default settings. If selected, only IC matching logics that have at least one associated figure or do not influence the outcome of the matching will be shown. For example, those which are linked to entities/matching logics not to be matched or those with unbalanced amounts below the threshold, if the **Show unbalanced amounts above the threshold** option is selected. ***IMPORTANT**: deselect this option to see all the columns in the IC cockpit.*
Manual matching greater than	Shows only the pairs of relationships/IC matching logics for which there is manual matching greater than the specified value.
Presence of FX rate differences greater than	Shows only the pairs of relationships/IC matching logics for which there is FX rate differences greater than the specified value.
Unbalanced amounts	Shows only the pairs of relationships/IC matching logics for which the unbalanced amount exceeds one of the following thresholds: **Unbalanced amount above the threshold**: the threshold is defined for every rule. **Unbalanced amount above**: the threshold is the value indicated in the field below. ***IMPORTANT**: to run the balancing check, the threshold value is converted into the IC cockpit currency. The FX rate used for the conversion is the final FX rate.*
Hide Balanced rules	This can only be set if the **Unbalanced amounts** option is selected. Only unbalanced pairs of relationships/IC matching logics will be shown.
Ignore currency	If selected, CCH Tagetik ignores the currency for the IC matching logics for which balancing by individual currency is required. Useful for running a check that does not take account of any declarations made on incorrect currencies.
Detect errors in the Setup	If selected, before displaying the cockpit CCH Tagetik runs preliminary checks on the validity of the configuration.

IC cockpit page

Processes tile > select process > Contributor > Detail summary tab > (Actions) IC Cockpit

Navbar > Processes & Workflows > Process > select process > Contributor > Detail summary tab > (Actions) IC Cockpit

Processes tile > select process > Consolidator > Detail summary tab > (Actions) IC Cockpit

Navbar > Processes & Workflows > Process > select process > Consolidator > Detail summary tab > (Actions) IC Cockpit

from a workflow task > select task that requires the running of the IC cockpit > Run


Purpose of the page

This page shows the IC relationships between the various entities. In particular, a row is shown for every pair of entities that declare IC amounts in accounts present in an IC matching rule. The displayed accounts depend on the filters set in the cockpit opening window and on the user rights.

The IC matching rules related to the process, or those indicated in the opening window, are shown on the columns. Every column represents a logic/rule, normally with a different group of accounts. For every relationship/matching logic combination, two amounts are typically shown, representing the unbalanced amount (see Displayed amounts).

For single submission processes only, if the **Scenario/Period** option is selected as **Show on columns** in the opening window, the scenarios/periods are shown on the columns and the matching logics can be selected from a drop-down menu.

What it looks like

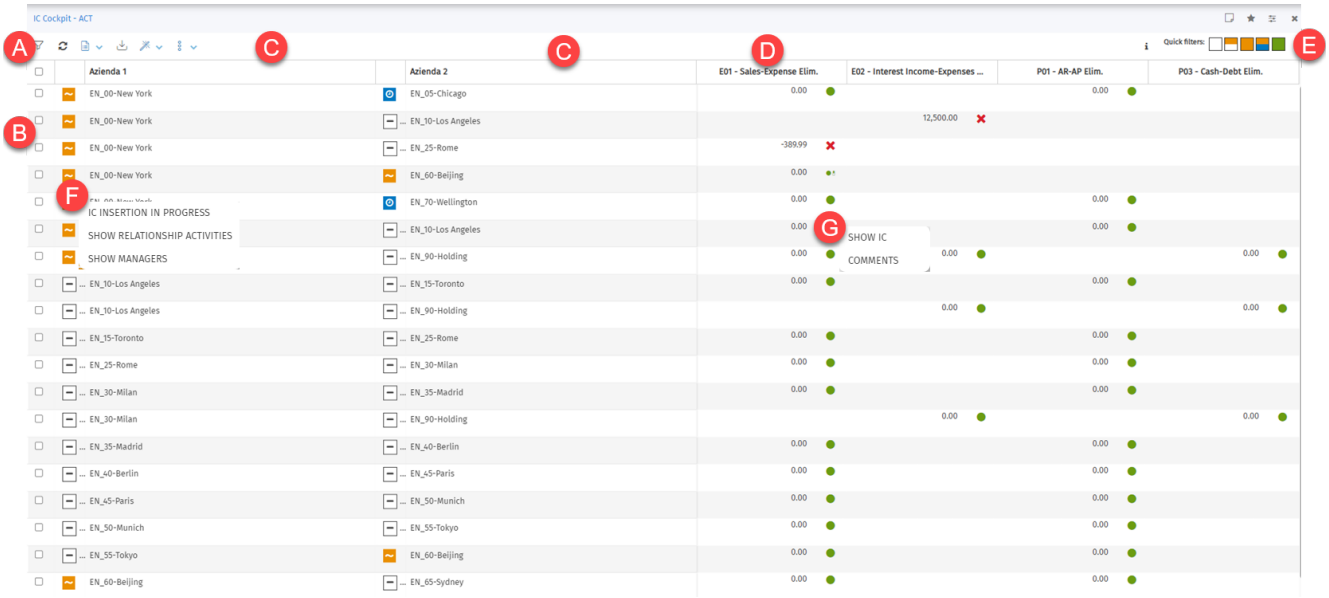

Element	Description
To	Tool bar
B	List of inter-company relationships. Within the relationships, Entities are sorted alphabetically.
C	Entities, or nodes of entities, part of the relationship and specific targets, depending on the selected relationship type.
D	Matching logic applied or scenario/period, depending on the submission type and on the **Show on columns** option
E	Filter displayed relationships by status
F	Indicator and actions on the IC data management status
G	Indicator and actions on the unbalanced amount

Actions on this page

Element	Description
	Allows you to extract reports from the IC Cockpit. See IC cockpit reports.
	**Actions on Entities**: allows you to run the same operation on several selected entities. The same actions can be run for individual entities, see Activities from the IC data management status indicator. Multiple actions are only available on cockpits that do not have the option 'Allow IC matching even without Balancing' enabled.
	Actions on multiple relationships: allows you to run the same operation on several selected relationships. The same actions can be run for individual relationships, see Activities from the IC data management status indicator. Multiple actions are only available on cockpits that do not have the option 'Allow IC matching even without Balancing' enabled. **IC relationship by invoice**: allows you to set the run parameters and start the relative data processing, see IC Matching window - Invoice matching. Only visible if invoice matching has been activated.
	Shows the legend of symbols and colours shown on the page.
Quick filters	Allows you to filter the relationships shown in the list by relationship status.
IC data management step indicator	Indicates the current status of the relationship between the entities and the IC data processing status. Also shows you a list of actions that can be run on the entity.
Unbalanced amount indicator	Indicates the current status of the unbalanced amount and displays a list of actions that can be run on it.

Quick filters

Allow you to filter the displayed relationships and see matching statuses when multiple actions are run. The filters follow the criteria below.

Symbol	Description
 **White**	Shows only relationships in which the status of both entities is **IC insertion in progress**.
 **White/yellow**	Shows only relationships in which the status of one of the entities is **IC insertion in progress**, while the status of the other entity is **IC insertion is complete**.
 **Yellow**	Shows only relationships in which the status of both entities is **IC insertion is complete**.
 **Yellow/Blue**	Shows only relationships in which the status of one of the entities is **IC insertion is complete**, while the status of the other entity is **Waiting for matching**.
 **Green**	Shows only relationships in which the status of both entities is **Submitted**.

Several filters can be selected at once.

IC data management status

The status of the relationship between two entities is shown by the indicator for each entity that forms part of a relationship.

Symbol	Description
	The entity is still inserting the IC entries and matching cannot yet be carried out.
	The entity has finished inserting the IC entries. The matching process can only start once both entities in the relationship have this status.
	The entity has made the relationship available for submission. Before moving to this status, the system checks that the intercompany amounts are balanced. From this moment on, the IC entries between the two entities will no longer be edited. However, it is possible to return to the previous status (YELLOW) as long as the second entity has not completed the submission process.
	The relationship between the entities is submitted and the IC entries between the two entities can no longer be edited. Moving from GREEN to YELLOW, or the rejection of the relationship, can only be performed by the consolidator user of the node to which the relationship belongs.

Balancing indicator

This indicator is shown for every amount and indicates the current balancing status.

Symbol	Description
	• Relationship = 0, the relationship/matching logic is perfectly balanced. • Relationship ≠ 0, the relationship/matching logic is unbalanced but the unbalanced amount is lower than the threshold value defined in the IC matching rule. In both cases, the relationship can be submitted.
	Balanced amount or unbalanced amount below the threshold with reconciliation account: the relationship can be submitted. The relationship/matching logic has been balanced manually by declaring an amount on the reconciliation accounts.
	Balanced amount or unbalanced amount below the threshold with comments: the relationship can be submitted. Comments on the amount are present.
	Balanced amount or unbalanced amount below the threshold with reconciliation account and comments: the relationship can be submitted. The relationship/matching logic has been balanced manually by declaring an amount on the reconciliation accounts. Comments on the amount are present.
	The relationship/matching logic is unbalanced and the unbalanced amount exceeds the threshold set in the rule: the relationship cannot be submitted.
	Unbalanced amount above the threshold despite the presence of reconciliation accounts: the relationship cannot be submitted.
	Unbalanced amount above the threshold with comments: the relationship cannot be submitted. Comments on the amount are present.
	Unbalanced amount above the threshold despite the presence of reconciliation accounts and comments: the relationship cannot be submitted. Comments on the amount are present.

Activities from the IC data management status indicator

The IC data management status indicator displays a menu so you can run the following operations. Only the operations available for the specific entity are shown.

Operation	Description	Conditions
IC insertion is complete	This operation indicates that the entity has completed the insertion of IC data. The traffic light changes from WHITE to YELLOW for all of the entity's relationships as the "IC inserted" information relates to total contra-entries.	Only for entities with WHITE status
IC insertion in progress	This operation indicates that you want to restore the possibility of editing IC data. The traffic light changes from YELLOW to WHITE for all of the entity's relationships.	Only for entities with YELLOW status
Lock IC data for submission	This operation makes the relationship available for submission. Before changing to BLUE status, the system checks that: • there are no forms open in data entry mode on the entity whose data is being locked • the intercompany amounts are balanced, or that the matching rules present on the cockpit are balanced or have unbalanced amounts below the threshold • the reconciliation accounts are of an amount below the threshold defined on the matching rule. ***Note**: this check is not performed if the user is the relationship Consolidator.* • if reconciliation accounts for other accounting have been defined for the cockpit, that the various defined pairs of debit/credit accounts are balanced or have unbalanced amounts below the threshold defined in the process validation rule If some of the checks are not passed, the relative causes are shown in a dedicated window. If it is only the checks on intercompany balancing and reconciliation accounts for other accounting that are not passed, the Consolidator can lock the data in any case. In fact, the warning window shows the **Override submission** button.	Only for entities with YELLOW status
Submit IC data	The declaring entity's traffic light changes from YELLOW to GREEN and the counterparty's traffic light changes from BLUE to GREEN. Before changing to GREEN status, the system checks that the intercompany amounts are balanced, showing the relative causes in a dedicated window. The Consolidator can submit the relationship in any case.	Only for entities with YELLOW status when the other entity is BLUE
Unlock IC data	The traffic light changes from BLUE to YELLOW. The user does not make the relationship available for submission and wants to continue to insert IC entries.	Only for entities with BLUE status
Reject IC data	Both traffic lights (that of the declaring entity and that of the counterparty) change from GREEN to YELLOW. This operation can only be run by the relationship Consolidator.	Only for entities with GREEN status
Show relationship activities	Opens a window that shows the history of activities carried out on the relationship (user, operation type, duration, date).	Only from the menu opened from the indicator
Show managers	Opens a window that lists the users authorised to run activities on the relationship. Certain users can be hidden using the **Exclude from the managers list in the IC cockpit** option in the user settings table.	Only from the menu opened from the indicator

***IMPORTANT**: only from **Actions on multiple relationships**, the **Lock/Submit IC data** action allows you to submit the relationship in a single action, provided that submission rights on both entities.*

Activities from the balancing indicator

The balancing indicator displays a menu to run the following operations. Only the operations available for each relationship/IC matching logic are shown.

Operation	Description
Edit IC	Only displayed if the relationship submission step has not started yet, or if the two entities in the relationship have WHITE or YELLOW status. Opens an editable window to manage IC entries and the reconciliation accounts inserted by the entities in the relationship. See IC entry management page.
Show IC	Only displayed if the relationship submission step has started, or if one of the two entities in the relationship has BLUE status or both of them have GREEN status. Opens a read-only window showing the IC entries and reconciliation accounts inserted by the entities in the relationship. See IC entry management page.
Details	Only shown if the Show P&L on periodic data option is selected when the cockpit is opened (see **IC cockpit opening window**) or in the case of IC matching logics whose conversion type is at the period average FX rate. Opens a read-only window with the amounts and totals converted into the cockpit currency.
Further information	Opens the **Comments** page to insert comments, load or remove attachments justifying the values inserted. Every comment refers to the set of IC entries identified by the traffic light. these comments can be used to add historical information on the data submission.
Manual matching	This needs the component related to **Transaction Matching** to be active. Opens a window to match the intercompany relationships at the transaction level. The non-matched relationships are shown and you can match them manually For more documentation on Transaction Matching, see the specific documentation available in the CCH Tagetik community.
Review matching	This needs the component related to **Transaction Matching** to be active. Shows in read-only mode the reports that have already been matched manually at the transaction level.

IC entry management page

IC cockpit > balancing indicator of an amount > Edit IC/Show IC


Purpose of the page

The purpose of this page is to display and potentially manage the IC entries inserted by the entities in the relationship.

If...	Then...	AND...
an editable IC entry has been selected.	only the **Edit IC** menu option will be available.	the page shows the **Edit IC** tab and allows you to manage the IC entries inserted by the entities in the relationship by inserting or editing the relative data.
a non-editable IC entry, or a relationship that is ready to be submitted or has already been submitted has been selected.	only the **Show IC** menu option will be available.	the page will show the **Show IC** tab and show information on the IC entries in read-only mode.

***Note**: if the "**Eliminate / Match for single currency**" option is active for the IC matching rule and the "**Ignore currency**" option is deactivated in the cockpit opening window, the IC lists and reconciliation accounts will be displayed for the individual currency.*

What it looks like

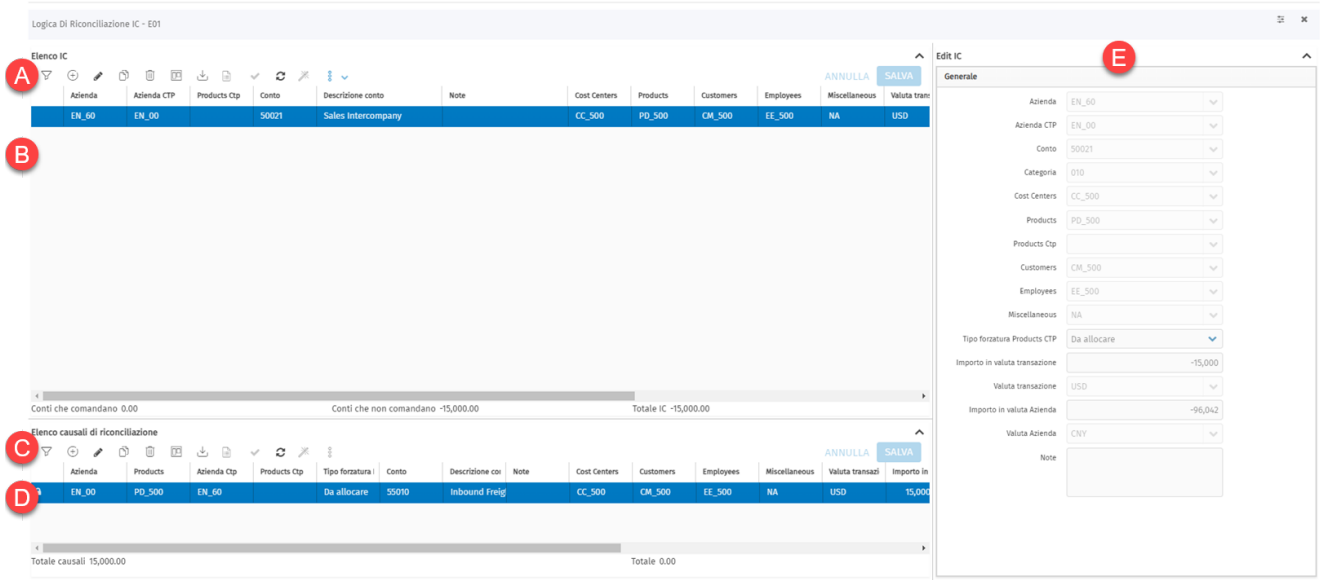

Element	Description
A	IC declarations tool bar
B	List of IC declarations inserted by the entities
C	Reconciliation accounts tool bar
D	Reconciliation accounts list
E	Panel with a list of IC declarations or reconciliation accounts

Actions on this page

Element	Description
	If possible, it allows you to edit the data in the relevant section.
	Allows you to run, as a check, the validations that the system runs on saving. Among other things, this checks that the user has inserted all the mandatory elements and provides a detailed warning if necessary.
	**Comments on the IC data**: Only available in the intercompany declarations tool bar. Opens a window to insert comments, load or delete attachments related to the values inserted for the IC entry.

Fields in the IC list section

This section allows you to view and manage the intercompany declarations between the two entities of the relationship.

Field	Description
Entity	Entity declaring the Intercompany amount
CTP entity	Entity to which the declaration is made
Account	Account, which allows IC amounts from configuration, on which the declaration is made
Category	Category on which the IC declaration was inserted, belonging to the process, the cockpit and the IC matching logic
Custom dimensions	Custom dimensions on which the IC declaration was inserted. Only shown if enabled in configuration and only if the **Manage custom dimension on amounts** option is active in the process's advanced rules.
CTP Custom dimension 2	Custom dimension 2 to which the declaration is made. Only shown if the cockpit's Relationship Type is Entity / Custom Dimension 2, if enabled in configuration, and if the **Manage custom dimension 2 on amounts** option is active in the process's advanced rules.

Field	Description
CTP custom dimension 2 override type	Override type for the counterparty custom dimension 2: • **to allocate** • **none** • **override** Only shown if the cockpit's Relationship Type is Entity / Custom Dimension 2, if custom dimension 2 is enabled in configuration, if IC spreading is active and function 0002274 is enabled for the user
Transaction currency	Transaction currency. Only shown if the transaction currency is managed on IC amounts in the gross amounts rules and the process's IC amounts. If not filled in, it will be defined as the entity currency.
Transaction currency amount	Amount expressed in the transaction currency. Only shown if the transaction currency is managed on IC amounts in the gross amounts rules and the process's IC amounts. If not filled in, it will be defined as the amount in the entity currency.
Entity currency amount	Amount expressed in the currency of the declaring entity
Entity currency	The currency of the declaring entity
Cockpit amount	Amount in transaction currency converted into the cockpit currency
FX rate diff.	Difference between the amount in the entity currency converted into the cockpit currency and the amount in the transaction currency converted into the cockpit currency
Notes	Any explanatory notes on the IC declaration
Adjustments	Indicates whether the IC declaration relates to an entity journal.

The following additional fields are only shown if the **Enable additional fields on IC** option is not set to "No" in the process rules (see Amount & Intercompany rules in the Data Entry section).

Field	Description
Invoice number	Identifier of the original document. Used by the automatic relationship procedure to relate documents that have the same number to each other.
Invoice date	Document date. Used by the automatic relationship procedure to relate documents that have the same date to each other.
Accounting date	Date on which the document was booked.
Document Type	Type of document (document, invoice or accrual)
Sent/Received	Indicates whether the document has been sent or received.
Invoice matching number	Number updated by the automatic invoices relationship procedure. This can be edited manually for manual matching.

Fields in the Reconciliation accounts list section

This section allows you to view and manage the inserted reconciliation accounts between the two entities in the relationship.

The displayed data can be edited under the following conditions:

- Both entities must have declared the insertion of IC data to be complete, unless the **Allow the insertion of reconciliation accounts with IC data entry in progress** option has been enabled in the process (see Amount & Intercompany rules page).
- The entity to which the reconciliation accounts inserted in the cockpit are attributed must be indicated in the **Accounts inserted by**" field present on the relevant IC matching rule and this field is defined as follows:
  - **Entity that has primary accounts** (default): only the entity that has made declarations on a "primary account" can justify the difference in the declarations on reconciliation accounts.
  - **Entity that has dependent accounts**: as above, but in this case the entity is the one that made declarations on the "dependent accounts".
  - **Both**: both entities can insert amounts on the reconciliation accounts. This option ensures the greatest possible flexibility in the matching process.

The displayed fields are the same as those in the IC list section (Fields in the IC list tab), with the following exceptions:

Field	Description
Account	Accounts defined as reconciliation accounts for the relevant IC matching rule
Category	By default, the “Reconciliation accounts category” indicated in the IC cockpit definition
Adjustments	Not present

IC cockpit reports

Introduction

Various reports can be generated from the IC cockpit in order to check data and understand the reasons why IC declarations have not been related or balanced. The reports can be generated either on the contributor side or the consolidator side, based on the data that can be seen in the cockpit.

To generate this report, you must first run the relative data processing, which is only available under the following conditions:

- the cockpit includes matching logics with 'Invoice matching' option enabled (see IC Matching and Elimination Logics)

-the Enable additional fields on IC option in the process rules is not set to 'No' (see Amount & Intercompany rules in the Data Entry module)

IC matching cockpit report

This report displays the intercompany rows that contribute to the result shown in the IC cockpit. In this report, you can highlight the result by relationship and view additional information (notes and information for each document).

This report shows the following information:

- intercompany data
- the reconciliation accounts inserted to balance those data
- the FX rate differences resulting from the conversion of data to the currency used to view them in the cockpit.

The amounts and any subtotals displayed in the report are converted into the cockpit currency and shown as follows:

If...	Then...
the **Show P&L on periodic data** option is selected on opening the cockpit.	the amounts are shown considering the periodic (monthly) value rather than the cumulated value. ***Note**: this option only has an impact on matching logics with a Profit & Loss or Other Variations accounts filter.*
matching logics at the period average FX rate are present in the cockpit.	for those logics, the amounts are shown with a different FX rate applied for every period of the year.

Particular cases for single submission processes

For single submission processes, if you choose to export all scenarios/periods, for logics at the period average FX rate or in case of periodic display, the data of every scenario/period are calculated taking account of the period length of the individual scenario/period. If the IC cockpit has been opened with scenarios/periods displayed in columns, there may be different data from the data generated by the report because, in the IC cockpit, the data of every scenario/period are shown considering the period length of the last significant scenario/period of the process.

IC matching cockpit report by custom dimension

This report displays the intercompany rows that contribute to the result shown in the IC cockpit, highlighting the results by custom dimension.

To run the report, you must indicate the custom dimensions for which you want to view the subtotals. You can also ask to view only unbalanced relationships by custom dimension.

If the IC cockpit is opened with relationship type set to “by entity/custom dimension 2”, you cannot highlight the result for custom dimension 2, since the relationships are identified by entity/custom

dimension 2 - CTP entity/CTP custom dimension 2, and therefore the highlighting of custom dimension 2 is already implicit.

This report shows the following information:

- intercompany data
- the reconciliation accounts inserted to balance those data
- the FX rate differences resulting from the conversion of data to the currency used to view them in the cockpit.

The data are grouped according to the chosen custom dimensions.

The amounts and any subtotals displayed in the report are converted into the cockpit currency and shown as follows:

If...	Then...
the **Show P&L on periodic data** option is selected on opening the cockpit.	the amounts are shown considering the periodic (monthly) value rather than the cumulated value. ***Note**: this option only has an impact on matching logics with a Profit & Loss or Other Variations accounts filter.*
matching logics at the period average FX rate are present in the cockpit.	for those logics, the amounts are shown with a different FX rate applied for every period of the year.

Particular cases for single submission processes

For single submission processes, if you choose to export all scenarios/periods, for logics at the period average FX rate or in case of periodic display, the data of every scenario/period are calculated taking account of the period length of the individual scenario/period. If the IC cockpit has been opened with scenarios/periods displayed in columns, there may be different data from the data generated by the report because, in the IC cockpit, the data of every scenario/period are shown considering the period length of the last significant scenario/period of the process.

FX rate differences detail report

This report allows you to check the data and understand the reasons why IC declarations have not been related. To generate this report, you must first run the relative data processing, which is only available under the following conditions:

- matching logics with the **Invoice matching** option enabled must be present in the cockpit (see IC Matching and Elimination Logics tab)
- the **Enable additional fields on IC** option must not be set to “No” in the process rules (see Amount & Intercompany rulesAmount & Intercompany rules in the Data Entry section)

Particular cases for single submission processes

For single submission processes, if you choose to export all scenarios/periods, for logics at the period average FX rate or in case of periodic display, the data of every scenario/period are calculated taking account of the period length of the individual scenario/period. If the IC cockpit has been opened with scenarios/periods displayed in columns, there may be different data from the data generated by the report because, in the IC cockpit, the data of every scenario/period are shown considering the period length of the last significant scenario/period of the process.

Manual reconciliation accounts detail report

This report shows the reconciliation accounts inserted to balance the intercompany data present in the IC cockpit which require the consolidator’s approval in the account submission step. These are the reconciliation accounts above the threshold specified in the IC matching logic.

Report on IC set notes

This report shows the notes inserted on the “IC sets” (IC relationship/matching logic) shown in the intercompany cockpit.

Report on IC data notes

This report shows the notes linked to the intercompany data used for the IC cockpit calculation.

Invoice matching report

This report allows you to check the data and understand the reasons why IC declarations have not been related. To generate this report, you must first run the relevant data processing (see IC matching by invoice).

This report contains the following information:

• matched IC declarations

• unrelated IC declarations

You can decide whether to view only related IC declarations that are balanced, or only those which are unbalanced.

Link cockpits and processes

Insert an IC cockpit into the process

Operational database > Processes tile > select process > > Process D efinition (Data Processing Section) > Basic Consolidation > IC eliminations and matching >

This procedure allows previously created IC cockpits to be associated with the processes and step (see IC Cockpit Creation).

1. On the **Eliminations and IC matching** page, in the **IC cockpits** section, click **Add IC cockpit**: the fields necessary for selecting the desired cockpit will appear.
2. In **Cockpit**, select the cockpit to be associated with the process.
3. In **Step**, select the desired step.
4. Click **Save**.
5. To see the matching logics involved, click **IC matching logics - Definition result**.
6. To see the categories involved, click **Categories - Definition result**.

This page allows you to configure IC cockpits so you can relate them to steps of the process and thus check the intercompany matching and elimination procedure via an IC matching cockpit.

Invoice IC matching

Introduction

Limiting the IC matching process to the relationship between entities may not be sufficient. Therefore, it may be necessary to work at a more detailed level, managing certain additional information such as the date and invoice number.

In such cases, it is useful to have a tool that simplifies the process of invoice matching between the IC declarations of an entity and the declarations of a counterparty on the basis of information related to the invoice. A dedicated report allows you to check the related and unrelated IC declarations; see Invoice matching report.

Activate invoice matching

To activate the invoice matching, you have to:

- Select the **Invoice matching** option in the **Matching** tab for the desired logics; see IC Matching and Elimination Logics tab.

- Active the collection of additional information for IC declarations (see the Amount & Intercompany rules page in the Processes section).



IMPORTANT: the matching logic must have primary accounts and dependent accounts.

Run IC matching by invoice

Once the additional information on the invoice has been collected, it is possible to run the matching data processing.

Processes tile > select process > Contributor > Detail summary tab > (Actions) IC Cockpit

Navbar > Processes & Workflows > Process > select process > Contributor > Detail summary tab > (Actions) IC Cockpit

Processes tile > select process > Consolidator > Detail summary tab > (Actions) IC Cockpit

Navbar > Processes & Workflows > Process > select process > Consolidator > Detail summary tab > (Actions) IC Cockpit

from a workflow task > select task that requires the running of the IC cockpit > Run

1. From the IC matching cockpit, select the desired relationships.
2. Click > IC  **matching by invoice - Data processing.** See IC matching by invoice.

The data processing automatically feeds the **Invoice Matching Number** field of the IC declarations of both Entities involved in the matching logic.

Manually match an IC declaration by invoice

In some cases, automatic matching between IC declarations is not possible. This happens, for example, if an entity has inserted the booking date instead of the invoice date.

IC cockpit > balancing indicator of an amount > Edit IC/Show IC

1. Select the desired declaration.
2. In the **Edit IC** panel, insert the same number used in the counterparty entity's IC declaration in the **Invoice matching number** field.

Note: Invoice matching numbers generated by the system can be edited, but the number inserted manually cannot start with $.

Interactions on the IC matching process

The invoice matching process does not affect the general IC matching process. This means that you can declare that the IC insertion is complete, or submit the relationships even if not all of the IC declarations are balanced. The insertion of additional fields does changes nothing, neither at the IC matching cockpit level nor at the elimination journal level.

While the invoice matching process is influenced by the IC matching process, the matching data processing can only be run before the account is ready for submission (one entity with a BLUE traffic light, another entity with a YELLOW traffic light).

IC matching by invoice

(from the IC cockpit) select the desired relationships > > IC relationship by invoice > Data processing

(from the IC cockpit) select the desired relationships > > IC relationship by invoice > Data processing

Purpose of window

This window allows you to configure the run parameters of the matching by IC invoice data processing.

Fields in window

Field	Description
Dimensions to analyze	Dimensions to be assessed in the IC declaration matching step of the entity with journals on primary accounts with the IC declarations of the entity with journals on dependent accounts. The available dimensions are: • Amount • Invoice number • Invoice date It is not possible to select only Amount. If the values of the selected dimensions fields are equal, CCH Tagetik feeds the **Invoice matching number** field of the IC declarations of both entities involved in the matching logic. The invoices are matched automatically by generating a matching number made up of the $ symbol followed by a sequential number. For non-matched IC declarations, no matching number is generated and the field remains empty.
Tolerance threshold for the amount matching	Threshold of tolerance on the difference between the amounts for which certain IC declarations are not matched. This is useful, for example, to avoid considering all decimal numbers. The threshold currency is the currency defined as preferred in the list of currencies (see Currencies list in the section on the Data Model).
Matching mode	**Sum up IC declarations:** 1. CCH Tagetik calculates the total for the selected dimensions. 2. The system assigns the same invoice relationship number to the declarations that satisfy the relationship rules only if the sum of the entity's IC declarations and the primary accounts is equal to the sum of the entity's IC declarations and the dependent accounts. **For a single IC declaration:** 1. CCH Tagetik examines every declaration of the primary entity. 2. For each one, it examines the list of the dependent entity's declarations to find the first one that satisfies the matching rules and any threshold. **IMPORTANT**: in this case, the dependent entity's IC declarations that are being used can no longer be used by the system for another automatic relationship.
Keep manual matching	Cancels and regenerates the automatic relationships only, and the manual Invoice matching number defined by the user is maintained.

Working with IC Spreading

Introduction

The IC Spreading feature can be activated for processes on which you want to run Entity/Custom Dimension 2 matching, or those for which the Relationship Type is Entity/Custom Dimension 2. This is useful when you do not want to specify the counterparty custom dimension 2 in IC data entry.

This feature writes off the existing IC declarations and reallocates the amounts to CTP custom dimension 2 based on the declarations made by the counterparty, maintaining the original unbalanced amounts (see IC Spreading in).

IC Spreading can enabled by selecting the option **Show override CTP Custom Dimension 2 type** (see Amount & Intercompany rules page in the Processes section) and is run from the Contributor cockpit (see Actions section of the Detail summary and Steps tabs in the Processes section) by clicking on **IC Spreading**.

Working in the IC cockpit when IC Spreading is enabled

When IC spreading is enabled, if the IC cockpit is accessed with relationship type set to by Entity, the cockpit shows the data excluding rows whose origin is “IC Spreading”.

If, however, the IC cockpit is accessed with relationship type set to by Entity/Custom dimension 2, the cockpit only considers rows whose origin is “IC Spreading”, allowing you to see the data reallocated by the data processing.

Create IC Cockpits page


Data Processing tile > Basic Consolidation > IC matching and elimination logics > IC cockpit

Navbar > Data Processing tile > Basic Consolidation > IC matching and elimination logics > IC cockpit

Purpose of the page

This page allows you to configure IC cockpits so you can relate them to steps of the process and thus check the intercompany matching and elimination procedure via an IC matching cockpit.

What it looks like

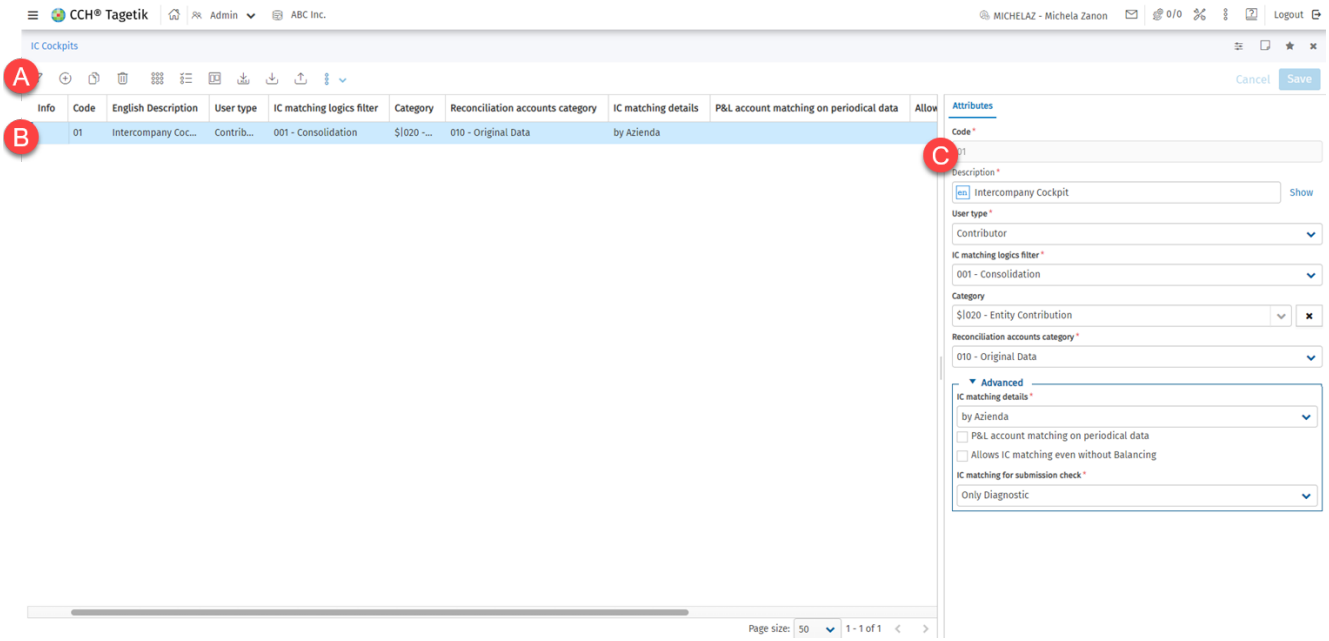

Element	Description
A	Tool bar
B	List of configured IC cockpits
C	Tab for configuring the attributes of individual IC cockpits

Actions on this page

Element	Description
	**Reconciliation accounts for other accounting**: opens a page to configure the accounts, both debit and credit, to be used as the reconciliation accounts in the matching logics associated with the selected IC cockpit. These accounts are used when a relationship in the IC matching cockpit is locked/submitted. In fact, the system checks whether the reconciliation accounts are balanced for the various defined debit/credit account pairs. If the same account is specified as the debit and credit account, the balancing check is performed for the individual account.

IC cockpit attributes

Field	Description
Code	Unique code of the IC cockpit
Description	Description of the IC cockpit in all enabled system languages
User type	Defines the type of user that can use the cockpit (Contributor or Consolidator). “Consolidator” IC cockpits cannot be accessed from the contributor cockpit.
IC matching logics filter	Specifies a group of IC matching and elimination logics managed in the IC cockpit.
Category	Specifies the categories on which to insert intercompany entries in the IC cockpit. You can specify a single category or a group of categories. They also depend on the user type. **User type** / **Category that can be selected** Contributor: Amount or entity journals Consolidator: Consolidator amount or consolidator entity journals If nothing is specified, all available categories that are consistent with the selected user type will be considered. In the IC matching cockpit, these categories are intersected with those of the child matching logics of the selected **Matching logics filter**.
Reconciliation accounts category	Specifies the default category on which to insert the reconciliation accounts in the IC cockpit. They depend on the type of user. **User type** / **Category that can be selected** Contributor: Amount or entity journals Consolidator: Consolidator amount or consolidator entity journals The following restrictions must be respected: **If the Category field is...** / **Then the Reconciliation accounts category must be...** a single category: the same category a group of categories: part of the same group Not set, or “$ALL - All elements”: some of the selected **IC matching logics filter** child reconciliation logic categories. In the IC matching cockpit, this category is intersected with those of the child matching logics of the selected **IC matching logics filter**.

Field	Description
Advanced	
IC matching details	Specifies the matching method. • *by Entity* (default) • *by Entity / Custom Dimension 2* to match the intercompany entries at a more detailed level than the entity level.  *For example, use this for entities that operate in various sectors where you want to aggregate the data by line of business.* ***Note**: in the IC matching cockpit, matching by Entity / Custom Dimension 2 is only allowed if the Relationship Type is also Entity / Custom Dimension 2 for the data collection process.*
P&L account matching on periodical data	If selected, the IC matching cockpit shows the amounts considering the periodic (monthly) value instead of the cumulated value. Only valid for P&L accounts and variation accounts. The following actions are possible from the IC cockpit: • View the periodic values with amounts converted to the Cockpit amount. However, the displayed IC entries cannot be edited. • View the cumulated IC entries and insert the transactions for the period.
Allows IC matching even without Balancing	If selected, the IC matching cockpit allows you to match a relationship without balancing on one or several matching logics. In particular: • It is not necessary to make the IC insertion complete declaration for the entities of the relationships. • If you block/submit a relationship, the balancing of matching logics is not verified.
IC matching for submission check	Indicates the severity to be attributed to matching errors detected by the diagnostics. ***Note**: IC matching diagnostics only check that all the possible relationships calculated/calculable by the cockpit have been matched.* • **Do not run** (default). The diagnostics does not run the IC matching check. • **Non blocking**. The check is run and the unmatched relationships are marked with Non-blocking severity. • **Blocking**. The check is run and the unmatched relationships are marked with Blocking severity. • **Only Diagnostic**. The check is only performed if requested by the running customised diagnostics. When diagnostics are run automatically from the cockpit or from other data processing, the check is not performed.

Deployment

In some cases, in Tagetik it is possible to insert a synthetic parametrization by using the nodes of the aggregation structures. The synthetic information is managed by specific windows named definition window.

In order to make the data processes that use the synthetic information more efficient, Tagetik provides a deployment tool which is able to read the information defined in the definition windows as well as the aggregation structure in order to understand how the nodes are made and, with one single deployment data processing, to define a series of "deployed" tables containing very detailed information.

So the deployment prevents the system from having to run the deployment information more than once, causing delay, whenever it needs to use collected aggregated information.

Moreover, the deployment allows obtaining the modifications made to the elements of a hierarchy without having to update the definition windows every time.

 Therefore, it is necessary to run the deployment whenever a modification is made to the parametrization, since the "deployed" tables provide a detailed picture of the synthetic definition at a precise moment in time. So any modification made later, will be acquired by the system by rerunning the deployment.


The Deployment can be run:

- via **General Deployment**, in this case, all elements present in the selected elements tables will be run;
- inside a Job, in this case, you can select the specific elements you want to deploy.
- via **Workflow Task** , launched from "Process cockpit function" on page 510

General Deployment

The General Deployment window can be accessed from the **General Deployment** tile via Navbar > Tools > General Deployment

The window shows the deployments tree;

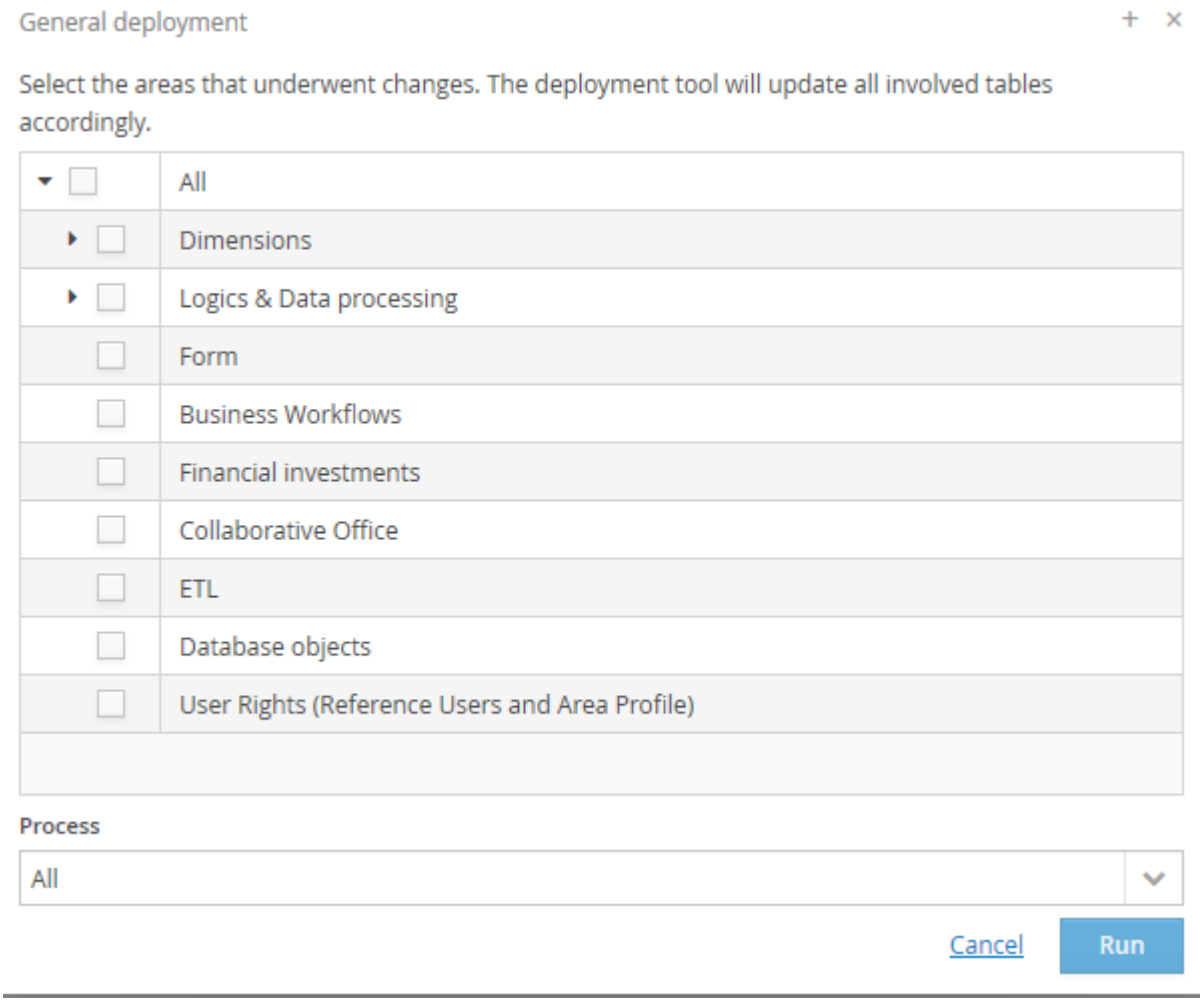

In order to select the deployments to be run, it is possible to:

- select each deployment by ticking the related check-box;
- select all the deployments of a group by ticking the corresponding outer check-box;


It is possible to filter the execution by specifying an application process.

In case of deployment of user rights on the Entity dimension's restrictions, the system processes only the organizational hierarchy related to the selected application process.

In the **Advanced filters** box, it is possible to further filter the execution by:

- Original Scenario or Period
- Consolidation Scenario or Period
- Entity dimension's hierarchies
- User

By clicking on "Schedule", it is possible to organize the execution of the deployment based on the parameters set up by the user (for further details, see the "Scheduling" chapter)

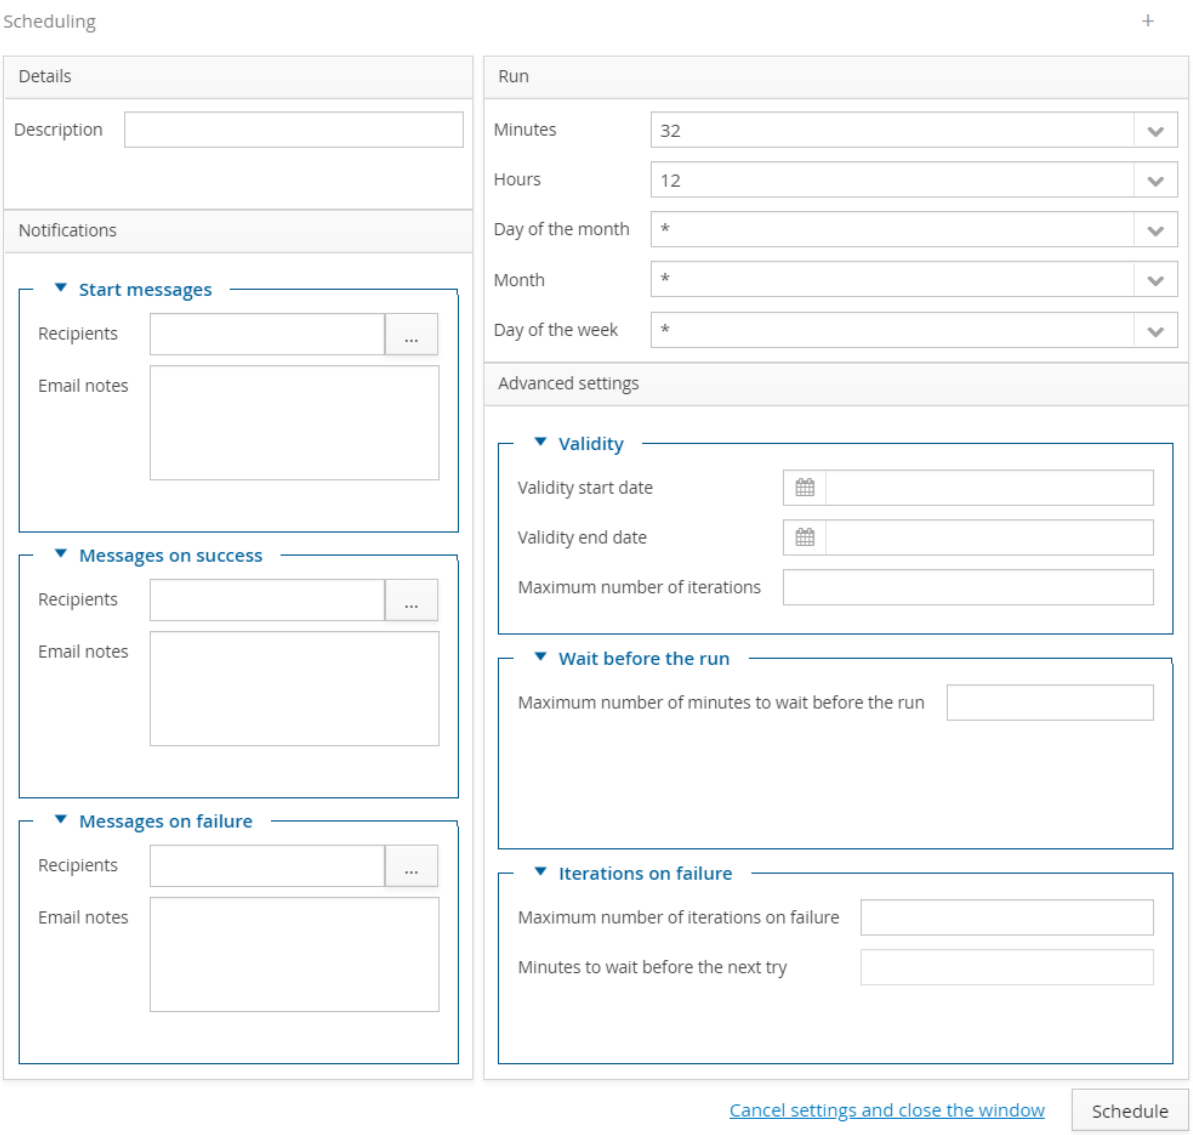

Whereas, selecting "Run" launches the data processing. Once completed, the **Data processing is complete** window pops up showing the performed operations and the exportable detail log.

Please note that in some cases the deployment can involve a big amount of data and therefore its execution could take very long time. So, whenever possible, it is recommended that you limit the area of data (e.g. by specifying the application process) for which the deployment must be run and run only the deployments that are really needed.