User Manual

Intelligent Disclosure

This manual provides an overview of Intelligent Disclosure and its main functions for managing disclosure processes in CCH Tagetik.

Version: 5.3.SP36

Wolters Kluwer
CCH® Tagetik
wolterskluwer.com

Table of contents

The Intelligent Disclosure System vi

Intelligent Disclosure Settings vii

Intelligent Disclosure setup viii

Features disabled on Web Client ix

Introduction to the Word interface x

Configure the Word add-in xii

Server connection configurations xii

Access the Collaborative Office functions in Word xiii

Features disabled on Web Client xiv

Documents xv

New document creation procedure xv

Editing a document xvi

Duplicating a document xvii

Delete a document xviii

Download a document xix

Adding a part to the document xix

Create Multilinked status xxi

Unlink a document part xxi

Detach Multilinked document part xxii

Document structure xxiii

Open a Tagetik document xxiv

Document structure xxiv

Document outline from the Library panel xxiv

Manage the Outline of a document xxv

User rights on documents xxvi

Application of user rights defined in SharePoint xxvi

Application of user roles defined in CCH Tagetik xxvii

Document settings page xxix

Document User Rights definition xxxi

Document Workflow Management xxxiv

Objects of the document xxxix

Rich Text Object ..... **xxxix**
Add a Table to the Document ..... **xl**
Add a Chart to the Document ..... **xliii**
Adding an Amount in the Document ..... **xlvi**
Adding a Dimension Attribute to the Document ..... **xlix**
Adding a Free Object to the Document ..... **xlix**
Display the document objects list ..... **li**
Cut, Copy and Paste Object ..... **li**
Keeping track of changes ..... **lii**
Managing Objects ..... **liii**
Adding an object to the document ..... **liv**
Editing and deleting an object ..... **lv**
Export object list ..... **lviii**
Reference scenario ..... **lix**
Reference between objects ..... **lxi**
Update document objects ..... **lxiii**
Handling manual changes on tables and charts ..... **lxiii**
Handling manual changes on tables with Flag Style ..... **lxiv**
Supported fonts when updating image objects ..... **lxvi**
Document part updates panel ..... **lxix**
Update document parts ..... **lxix**
View the Sources of a document ..... **lxx**
The Migration Tool ..... **lxxiii**
Migrating Documents from Collaborative Office to Intelligent Disclosure ..... **lxxiii**
Exporting and Importing a Document ..... **lxxvii**
'Export differences with source' functionality ..... **lxxix**
Intelligent Disclosure Audit ..... **lxxx**
Sources ..... **lxxxi**
Change the Database source of a document ..... **lxxxi**
Integration with Seahorse for iXBRL ..... **lxxxii**

The Intelligent Disclosure PowerPoint Add-in interface **lxxxiv**

Introduction to the PowerPoint interface ..... **lxxxiv**
Configuring the Power Point add-in ..... **lxxxv**
Accessing Intelligent Disclosure features in Power Point ..... **lxxxv**

Working on a presentation lxxxvi
Object List lxxxvii
Buttons on the page lxxxvii
Edit an object lxxxvii
Deleting an object lxxxvii
Adding a Dimension Attribute lxxxviii
Adding Rich Text lxxxviii
Adding an Amount to the presentation lxxxix
Adding a table to a presentation xci
Table insertion restrictions xcii
Adding a Visual to the Presentation xcii
Slide Generator xciii

The Intelligent Disclosure System

Introduction

Intelligent Disclosure is the process of communicating relevant and reliable information about a company's performance, activities and financial and non-financial data to various stakeholders, such as investors, managers, employees, customers, auditors and the public.

Intelligent Disclosure aims to provide a complete and consistent picture of a company's condition, achievements, challenges and prospects, as well as the context and factors influencing them. Intelligent Disclosure has applications in various areas such as reporting, transparency, decision-making, evaluation, learning and improvement.

What is it for

CCH Tagetik Intelligent Disclosure is a solution that enables users to produce high quality financial reports in less time and with less effort. It also enables users to communicate effectively with internal and external stakeholders through a clear and consistent narrative.

Intelligent Disclosure features

The CCH Tagetik Intelligent Disclosure Solution enables the creation, management and disclosure of financial and non-financial reports with a high level of accuracy, consistency and efficiency. It allows users to collaborate on the same document in real time, using a single data source from the CCH Tagetik platform.

CCH Tagetik Intelligent Disclosure allows users to:

- Create dynamic reports that can be updated with the latest data and calculations from CCH Tagetik and external sources
- Apply consistent formatting and branding to all reports and documents
- Incorporate charts, tables and other visual elements to improve readability and clarity of reports
- Add comments and information on results and context
- Define several versions of the same document or parts thereof and then compare them
- Keeping track of changes and revisions made by different users and reviewers

Ways of working on documents

The actions that can be performed on documents depend on the tool used.

Element	Actions on documents
Word Add-in	• Document structure creation and management
SharePoint interface	• Creating and managing the organisation of documents into folders

Access to the disclosure system

Depending on the task to be performed, the disclosure functions are accessed either from the SharePoint web interface, or from Word.

To...	Then...
access from Word	Start Word with your Office user and configure the add-in. See "Configure the Word add-in" on page xii.
access from Word Web	Log in with your Office account to your organisation's Microsoft 365 site to open a Word Web document and configure the add-in

***IMPORTANT**: Compared to Word-accessible documents, web documents have limitations (see Features supported by web documents).*

For further details on the information required for the correct use of theadd-in see.

Origin of the data

Depending on the needs of the project, it is possible to manage forms in documents whose data comes from the Financial Workspace and exploits the dimensions of CCH Tagetik, or data from the Analytical Workspace. Analytical Workspaces are used when customised dimensions are needed in the project that complement the dimensions of CCH Tagetik.

For more details on Financial Workspaces, see Le dimensioni di CCH Tagetik.

For more details on Analytical Workspaces, see Form su dati degli Analytical Workspace.

Intelligent Disclosure Settings


Admin

Repository > Collaborative Office 2.0 Settings (beta)

Purpose of the page

This page allows you to integrate Collaborative Office with the CCH Tagetik solution and the Microsoft 365 suite of the user's organisation.

What it looks like

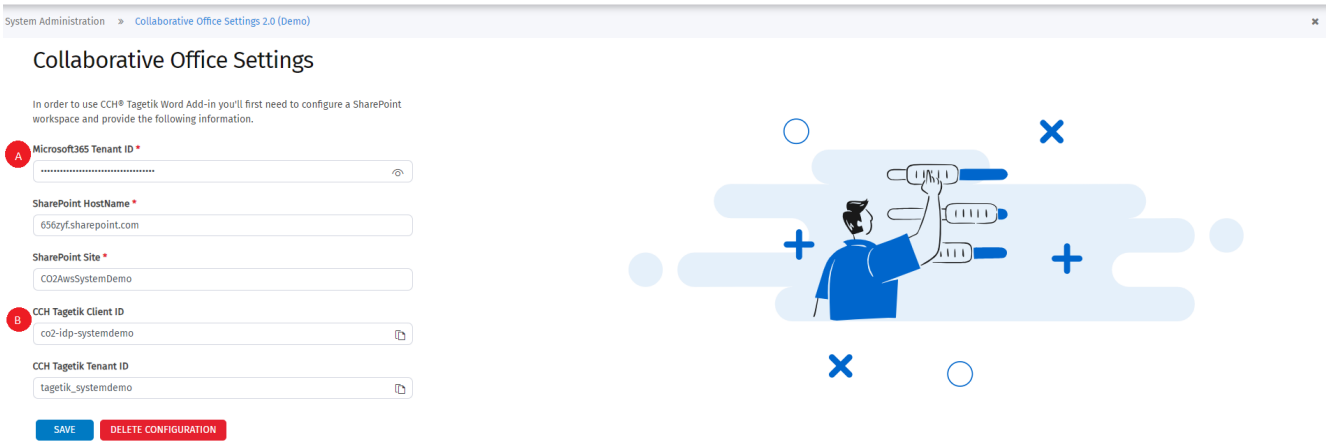

Element	Description
A	Microsoft 365 configurations of the user's organisation.
B	Configurations needed to use the Collaborative Office Add-in correctly are visible at the end of the integration process.

Buttons on the page

Depending on the step of the integration process that the user is in, the window will show three different types of button.

Element	Description
Save	Allows you to save the inserted configurations and run the integration process (visible before the integration process has started).
In progress..	Indicates that the integration process is underway but has not yet finished (visible when the integration process is underway).
Delete configuration	Allows you to delete the inserted configurations (visible once the integration process has been successfully completed).
Copy Configuration	Allows you to save the configurations needed to add a new configuration in the Add-In Word

IMPORTANT: The integration process could take a long time to complete. In case of problems, it is recommended to contact Support.

Intelligent Disclosure setup

To configure the new Collaborative Office solution, it is necessary for:

- an CCH Tagetik administrator to define the SharePoint settings in the CCH Tagetik web application
- an administrator of the client organisation's Microsoft 365 suite to configure the Add-In via their own Microsoft 365 Admin centre

CCH Tagetik Admin Setup

Repository > Intelligent Disclosure Settings (beta)

IMPORTANT: *before proceeding, you must have certain settings defined in the Microsoft 365 suite of the user's organisation.*

1. Insert the **Microsoft365 Tenant ID** of the user's organisation
2. Insert the **SharePoint Hostname** of the user's organisation. The hostname is visible in the URL used to connect to the SharePoint site (e.g. https://hostname/sites/sitename)
3. Insert the name **of the SharePoint Site** of the user's organisation that will be used to save Collaborative Office documents.
4. Click **Save**.

   ***Note**: at the end of the integration process, the system will show **the Client ID** and the **CCH Tagetik Tenant ID** to be used in the add-in configuration.*

Microsoft Office 365 Admin Setup

The Add-in can be set up:

- **centrally by a Microsoft 365 administrator user**, which means that the add-in will be installed by the administrator for all of the organisation's users or for a group of users
- **by an individual user**, which means that each individual user will install the add-in themselves

To distribute the add-in, follow the steps described below:

- open the Microsoft 365 home page and sign in
- choose App Launcher and Admin
- choose "Settings > Integrated apps" from the navigation menu
- choose "Load customised apps" at the bottom of the page

- in the “Load applications to distribute”
  - select “Office Add-in” in the App type menu in the “Load applications to distribute” section
  - choose to load the manifest file (.xml) from your own computer or enter the link to the file in the “Choose how to load the application” menu
  - validate the manifest file
- in the “Add users” section, choose the users to whom you want to distribute the application
- in the “Accept required permissions”, grant all the authorisations required by the Collaborative Office solution by clicking on the “Accept authorisations” button
- click on the “Finish deployment” button and wait for the distribution to complete

Once distribution is complete, the Intelligent Disclosure Add-in will be available both in the desktop application and the web application and all users will be able to complete their own installation. For more details, see Install the Intelligent Disclosure Add-in from Microsoft Word.

Features disabled on Web Client

CCH Tagetik Intelligent Disclosure for Word is available in both Web and Desktop versions of Word. While the Desktop version offers a full suite of features, the Web version provides a more streamlined experience, designed primarily for viewing and consulting the information in the document.

The following section details the features disabled in the Web version of Word.

Documents:

- for document parts recursive updating is not allowed, when clicking the **Update** button on the Ribbon the system displays the message **This functionality is currently not available with the Word Web version**, the use of the Desktop application is recommended.

Objects


- Checkbox and Dropdown objects are not supported in the Web application, it is possible to create and edit these objects using the Desktop application.
- Objects (Table,Chart,Amount,Cel Field) can be added but the user will see the buttons (Update and Save) disabled in Edit mode.
- When inserting objects of Chart type from the Web Application, the content of the object occupies the entire width of the document. To overcome this behaviour, we recommend inserting objects as images using the Desktop Application
- for the Object List functionality, upon clicking the **Available Updates** button the system displays the message **This functionality is currently not available with the Word Web version**, the use of the Desktop application is recommended.

Introduction to the Word interface

Introduction

Once the dedicated add-in is installed, the **CCH® Tagetik** tab appears among the standard Word tabs. From the toolbar of this tab, panels can be opened to perform all Intelligent Disclosure functions enabled for the connected user.

What it looks like

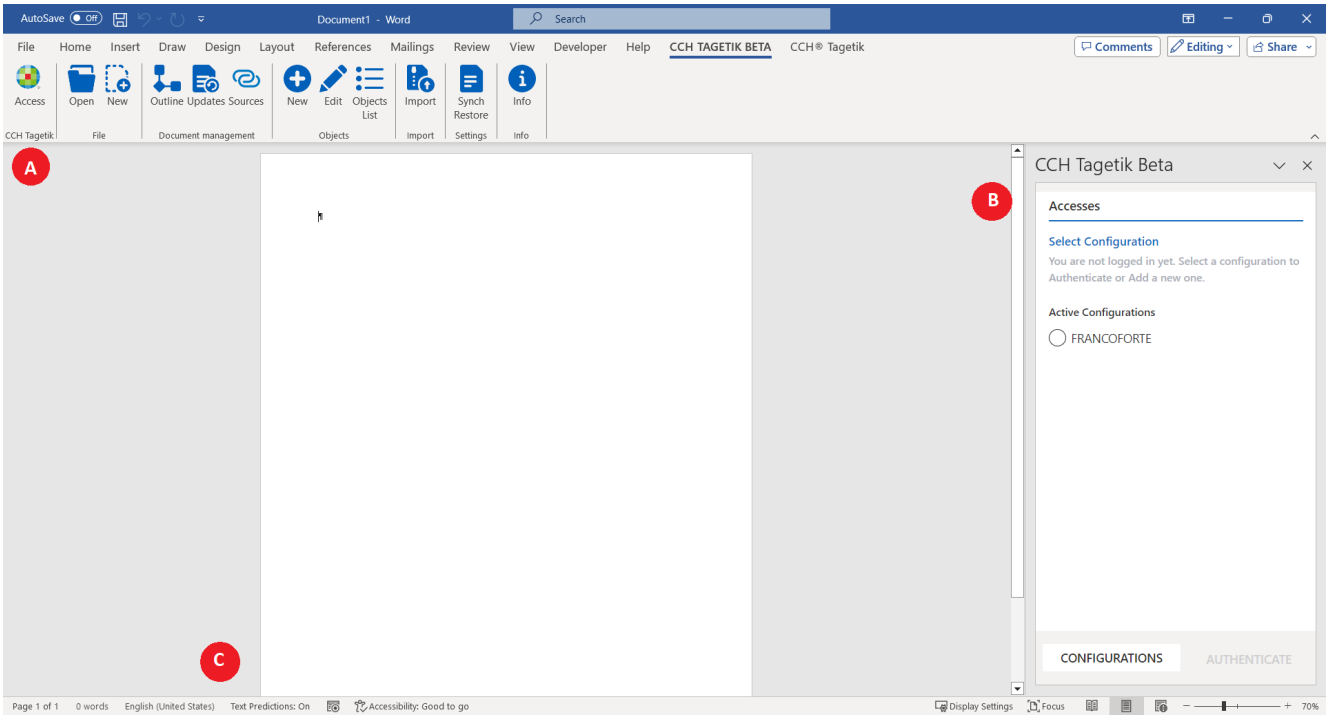

Element	Description
To	Tool bar
B	Right-hand panel
C	Work desktop

Tool bar

Enables access to all Intelligent Disclosure functions of CCH Tagetik and shows enabled buttons according to the role of the connected user.

Buttons in the toolbar CCH Tagetik

This toolbar is always visible and shows the elements needed to work in the different macro functions of Intelligent Disclosure. The buttons are grouped in seven different areas: **CCH Tagetik**, **Files, Document**

Management, Objects, Import, Settings and Information.

Content	Description
CCH Tagetik	
Accesses	Opens the ***Accesses*** panel where the list of user-defined configurations is shown and allows the user to select which configuration to authenticate to. When accessing the panel for the first time, no active configurations are displayed, click **CONFIGURATIONS** and the ***Configurations*** panel opens, where configurations can be added. ***Note**: If the user has opened a document created on one of the configurations in the list, the latter is selected by default.*
File	
Open	Opens the ***Library*** panel showing the list of available documents. It also allows documents in the list to be opened, viewed and exported.
New	Allows you to create a document.
CMS Tree Management	
Structure	Displays the structure of the open document.
Updates	Allows you to update the child document parts of the open document.
Sources	Displays the sources, internal and external, of the open document and its parts
Objects	
New	Allows an object to be added to the open document.
Edit	Allows you to edit the object selected in the open document.
Object List	Displays the list of objects in the open document and allows them to be updated.
Tools	
Import	Allows importing a previously exported document.
Synchronize	Allows the massive saving of the properties and attributes of each object in the open document on the database tables.
Information	
Information	Shows information on the Add-in.

Configure the Word add-in

Background

Before adding a new configuration in the add-in, you must integrate Intelligent Disclosure with the CCH Tagetik solution and the organisation's Microsoft 365 suite. For more information, see "Intelligent Disclosure setup" on page viii.

Server connection configurations

New connection to the server

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > Accesses

1. In the **Accesses** panel, click **CONFIGURATIONS** then *.png* **Add Configuration**
2. In **Display name**, assign a name to the new configuration.
3. In **CCH Tagetik Tenant ID***, type the CCH Tagetik tenant ID of the user's organisation.
4. In **CCH Tagetik Client ID***, type the CCH Tagetik client ID of the user's organisation.
5. (Optional) Click **Show advanced** then **CCH Tagetik URL**, to type the connection address of the Tagetik application to which to connect and **Identity provider URL** to type the address of the system providing the authentication service.
6. Click Save button

You can also create a new connection by exporting an existing connection and re-importing it.

Export of connections to the server

Word Add-in > CCH® Tagetik DisclosureRibbon bar > Accesses

1. In the **Access** panel, click **CONFIGURATIONS**
2. In the Configuration panel, click **Import/Export** then choose **Export**

Once processing is complete, the system notifies the user that the export process has completed and generated a file named "configuration.json" in the Download folder configured in the operating system in use.

Import of connections to the server

Word Add-in > CCH® Tagetik DisclosureRibbon bar > Accesses

1. In the **Access** panel, click **CONFIGURATIONS**
2. In the Configuration panel, click **Import/Export** then choose **Import**
3. The user selects the "configuration.json" file containing the configurations to import.
4. For each imported configuration, the system produces one of the following outputs:

File json content	Output
Non-existing configuration	Add the configuration to the **Configuration** panel with • *Display Name* • *CCH Tagetik Tenant ID* • *CCH Tagetik Client ID* • (Optional) *CCH Tagetik URL and Identity provider URL* by clicking *Show Advanced*
Configuration with the existing name (*Display Name*)	Add the configuration to the **Configuration** panel with • *Display Name_N where N is an incremental number* • *CCH Tagetik Tenant ID* • *CCH Tagetik Client ID* • (Optional) *CCH Tagetik URL and Identity provider URL* by clicking *Show Advanced*
Existing configuration (with the same *CCH Tagetik Tenant ID*)	No configuration added and warning message "The following configurations could not be imported *Display Name (CCH Tagetik Tenant ID)*"
Configuration without one or more mandatory fields (*Display Name*, *CCH Tagetik Tenant ID*, *CCH Tagetik Client ID*)	No configuration added and warning message "The following configurations could not be imported *Display Name (CCH Tagetik Tenant ID)*"

Edit a connection to the server

Word Add-in > CCH® Tagetik DisclosureRibbon bar > Accesses

1. In the **Accesses** panel, click **CONFIGURATIONS** then on the desired configuration card.
2. Edit as desired.
3. Click Save button .

Delete connection to the server

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > Accesses

1. In the **Accesses** panel, click **CONFIGURATIONS** then on the desired configuration card.
2. Click **Delete**, then **Yes, Delete** to confirm the deletion of the connection or **No, cancel** to cancel the deletion and return to configuration management.

   ***Note**: if the system detects configurations that are "In use" by the user when configuration management is accessed, those configurations cannot be deleted.*

Access the Collaborative Office functions in Word

Manage the Accesses Panel

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > Accesses

This procedure allows you to authenticate yourself in the add-in and thus access the Intelligent Disclosure functions.

1. Click Accesses: the ***Accesses*** side panel will open.
2. Click **Name of the Configuration** that you want to access, from among the active configurations.
3. Click **AUTHENTICATE**: the ***login*** window will open.
4. Enter **Name** and **Password** used to access CCH Tagetik .
5. Click **Sign in**.

   ***Note 1**: after authentication, the configuration will be "In use" and its Name will be shown on every panel of the application.*

***Note 2**: The CO_WordAddin language is set by the application CPM > User settings > General > Application language (Italian, English and French are currently available).*

Features disabled on Web Client

CCH Tagetik Intelligent Disclosure for Word is available in both Web and Desktop versions of Word. While the Desktop version offers a full suite of features, the Web version provides a more streamlined experience, designed primarily for viewing and consulting the information in the document.

The following section details the features disabled in the Web version of Word.

Documents:

- for document parts recursive updating is not allowed, when clicking the **Update** button on the Ribbon the system displays the message **This functionality is currently not available with the Word Web version**, the use of the Desktop application is recommended.

Objects

- Checkbox and Dropdown objects are not supported in the Web application, it is possible to create and edit these objects using the Desktop application.
- Objects (Table,Chart,Amount,Cel Field) can be added but the user will see the buttons (Update and Save) disabled in Edit mode.
- When inserting objects of Chart type from the Web Application, the content of the object occupies the entire width of the document. To overcome this behaviour, we recommend inserting objects as images using the Desktop Application
- for the Object List functionality, upon clicking the **Available Updates** button the system displays the message **This functionality is currently not available with the Word Web version**, the use of the Desktop application is recommended.

Documents

Introduction

A document can be considered as a container, or a template, in which the basic information is defined and later used to create the Word document used by end users to enter information (comments, tables, etc.).

You can create new documents and collaborate to create them with other users simultaneously.
You can also import a document if you have an existing file.

When a document is created by the add-in, a “Document.docx” file is created in the documents collection of the SharePoint website dedicated to the application and an empty document is opened in the respective app.
These files associated with the application can also be opened and edited from the web application, as well as from the desktop.

> ***Note**: When the document is edited from the web version, all changes are saved automatically.*
> *In contrast to the online version, you must explicitly save the document before exiting to keep changes made from the desktop.*
> *For this reason, to avoid the loss of data and facilitate collaborative editing, it is recommended to enable Word’s automatic save function before starting to work with documents.*

Organise documents in folders

Documents can be organised in folders from SharePoint by accessing the site dedicated to the application from the web. Organising documents in folders within the Documents section rather than in Library Collections may depend on various needs (scope, importance, etc.).

New document creation procedure

Word Add-in > CCH® Tagetik Disclosure ribbon bar > File > New

1. Define the General Information of the document
2. Define Document Parameters (Optional)
3. Define Advanced Document Settings

Define the General Information of the document

Word Add-in > ribbon bar > File > New > General tab

1. In the *General* tab of the ***New Document*** section, enter the Document **Name** and **Description**
2. Select the SharePoint folder in which to save the document.
3. Select the language, in which to display the descriptions of the objects in the document, from the list of available languages retrieved from the Languages configuration on CCH Tagetik
4. Click **Next** to switch to the **Parameters** tab

Define Document Parameters (Optional)

Word Add-in > ribbon bar > File > New > Source Tab

1. On the General tab of the New Document tab, enter the Document Name and Description.
2. Select the SharePoint folder in which to save the document.
3. Select the language, in which the descriptions of objects in the document are to be displayed, from the list of available languages retrieved from the Languages configuration in CCH Tagetik
4. Click **Next** to switch to the **Parameters** tab

Define Advanced Document Settings

Word Add-in > ribbon bar > File > New > Advanced tab

1. Select an available **Style Template** from the drop-down menu to apply to your document, or leave the default Word **template** unchanged. The template style will be applied to the created document after which the user can make use of all the styles in the Home>Word Style section (Paragraph - Style - Table - List)
2. Select an available **Language/Country** from the drop-down menu to apply to the numeric format according to the region. Once the menu has been selected, the user can browse the list of countries by using the scroll bar or by typing in the exact region from the search bar at the top. When clicked, the system selects the language that will be used for the numeric fields.
3. Select a **numerical format** from the available formats in the drop-down menu (#,##0.0; -#,##0.0 default value) or define a custom format. The character used to separate thousands or decimals will be converted according to the selected *language/country*. In the case of custom formats, it is advisable to comply with the international conventions involving the dot "." as decimal separator and the comma ',' as thousand separator.

   IMPORTANT. It is possible to create a customised numeric format consisting of a 'numeric identifier' to define the formatting of numeric data. For example: use the numeric format identifier #,##0**,** 'ths' or #,##0**,,** 'mills' to obtain values in thousands and millions;Use the numeric format identifier '-' to replace the numeric value zero with this output format. The format identifier '-' placeholder zero replaces the zero with the corresponding indentifier; otherwise, the zero is displayed as the result.
4. Select a format for **the percentages** from the available formats in the drop-down menu (0.0% default value) or define a custom format.
5. Select a **date format** from the available formats in the drop-down menu (m/d/yy default value) or define a custom format. The representation of dates will be converted according to the selected *language/country*. With custom formats, it is advisable to follow international conventions of using the letter 'd' to indicate the day, the letter 'm' to indicate the month and the letter 'y' to indicate the year.
6. Select a format for image objects from the available formats in the drop-down menu (PNG default value).
7. Select a resolution for image objects from the available resolutions in the drop-down menu (Low Resolution (150 ppi) default value).
8. Click **Create** to create the new document.
9. Click on **Previous** to return to the previous tabs.

IMPORTANT *The advanced settings defined in the document will only be applied to document objects that inherit the format from the parent document.*

IMPORTANT The selected *style* will be applied to the root document and in case of part creation this will be inherited as long as the OnliLinked state is maintained.

Editing a document

A document can be edited at any time via the Document Management feature where all entries defined during creation can be modified.

Document editing procedures sequence

- Modifying general information
- Modifying document parameters
- Modifying document formats

Modifying an existing document

Word Add-in > CCH® Tagetik Disclosure *ribbon bar* > *Document Management* > *Structure*

1. Open the document to be edited
2. Click on **Structure**: the ***Document Structure*** panel opens **- *X***
3. Select document from structure
4. Click the **Edit** button at the bottom of the panel
5. Change document name to .docx extension - Note (upon saving, the system displays a message informing the user that on Sharepoint the document name is not aligned, it is necessary to check the correspondence manually. Make the changes manually on Sharepoint)
6. Change additional information (if any)
7. Change the language (if desired) using the dropdown with the list of available languages. The language (retrieved from the Languages configuration on CPM) influences the descriptions of objects in the document
8. Click **Save** to save the changed information in the General Tab
9. Click **Previous** to return to the document structure

Modifying Document Parameters

CCH® Tagetik Disclosure *ribbon bar* > *Document Management* > *Structure*

1. Follow steps number 1,2,3,4 of the procedure **edit an existing document**.
2. Click on the **Parameters** Tab to display the list of Databases
3. If parameters were never defined during creation, click **Toggle** to activate the application database
4. Click on the card opening arrow
5. Click on **Add Dimension**
6. Select a dimension from the list shown by the system e.g. **Entity**
7. Click on the **Dimension Field**
8. Select the node/lowest level element from a Flat list or hierarchy e.g. **Entity - EN_00 - New york**
9. Click on **Confirm**
10. If at least one parameter has been defined on the database card opening arrow
11. Click on the dimension already entered e.g. **Entity - New York**
12. Click on the X icon to delete the item
13. Click on the field to add a new item from the Hierarchy or Flat list
14. Click on **Add Dimension** and choose a new dimension to add
15. Select the X icon if you want to delete a previously added dimension
16. Click **Save** to save the changes made to the Parameters
17. Click **Previous** to return to the document structure

Modifying document formats

CCH® Tagetik Disclosure *ribbon bar* > *Document Management* > *Structure*

1. Follow steps number 1,2,3,4 of the procedure **edit an existing document**.
2. Click on the **Advanced** Tab to display the document formats.
3. Click **Decimal Separator**
4. Change one of the entries > Full stop, comma, or superscript '
5. Click on **Thousand Separator**
6. Change one of the entries > Comma **Selected by default**, Full stop . superscript ' or None
7. Click on **Field Number** to change the Number format already entered "€ #,##0.00;€ -#,##0.00;€ 0 "
8. Click on **Percentage field** to change the already entered Number format "#,##0.00 %;-#,##0.00 %;0 % "
9. Click on the **dropdown Select Default**
10. Choose the date format from the list (d/m/yy default)
11. Or click on the **Customised Radio Button**
12. Enter a valid date format
13. Click **Create** to save changes made to Formats
14. Click **Previous** to return to the document structure

Duplicating a document

A document in the Document Library can be duplicated through the Roll Forward option.

Duplicating a Tagetik document

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > Document Management > Structure > Roll Forward

1. Open a master document from the Library: ribbon bar > File > Open > double-click on document x
2. Click on **Structure**: the ***Document Structure - Document x*** tab opens
3. Select the root document to duplicate
4. Click Roll Forward
5. Enter a document name in the required field
6. the location where the document will be saved is by default *Shared Documents*
7. Select the location field to change the location where the duplicate document will be saved
8. Choose the folder and click **Select**
9. If there is at least one object on the document as an attachment source, the system displays a default off switch located on the right-hand side of the panel. Enabling the button allows the user to duplicate attachments in xlsx format in the chosen path, otherwise the system ignores the function and the user continues to duplicate only the structure of the selected document
10. Click the enabled **Next** button
11. select the down arrow to display the parameters inherited from the document
12. Click on **Add Dimension**
13. select a dimension from the list and choose an element from the hierarchies
14. If the system has other associated databases, the user can enable them from the toggle and add the relevant dimensions
15. Select the **Next** button to go to the third step named Formatting
16. The user can change the formatting, in particular can change both the template and the country language to be applied to the numeric format (see Create a document)
17. or kept as it is.
18. Click Roll Forward to create the document
19. Click on **Previous** to return to the Parameters tab.

    *Note - If the entered document name is similar to the one being duplicated, or if the structure contains partial documents already present in the destination folder, clicking the **Next** button will cause the system to block the user and display a warning message "**Document already exists**", along with a list of the affected documents*

Likewise, if the user has enabled the toggle switch and the names of the attached files already exist in the destination folder, the system will block the user and display a warning message "**Document already exists**", including a list of the relevant files

Click **Edit** to go back and change the name or choose another location.

Delete a document

A document can be deleted at any time, if it is closed, by navigating through the Library to its location and using the **Delete** option. The document will also be automatically deleted from SharePoint

Delete an existing document from the Library

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > File > Open*

1. Click **Open**: the ***Library*** panel will open
2. Double click on the folder where the document to be deleted is saved
3. Single click the document and click on the ***Outline*** button
4. Click on the three dots ⋮ next to document to be deleted
5. Select the ***Delete*** option.
6. The System will delete the document and inform the user that this has been successful by showing the following message: "Deletion successfully completed"

Delete a document part from the outline of a document

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > Documents management > Outline >* ⋮

1. Open a document from the Library
2. Click **Open**: the ***Library*** panel will open
3. Double click on the folder in which the document is saved
4. Double click on the document to be opened
5. Click **Outline**

6. Select the child document inserted in the outline
7. Click on the three dots ⋮ next to the document to be deleted
8. Select the ***Delete*** option.
9. The System will delete the document and inform the user that this has been successful by showing the following message: “Deletion successfully completed”

Download a document

Procedure

CCH® Tagetik Disclosure > ribbon bar > open file > download document

This is the procedure for downloading the document

1. Click on the **Open** icon to display the list of documents in the library
2. Click on
3. Select the document to download.

   ***Note**: visible documents are Tagetik documents that the user can access.*
4. Select the document parts you want to include in the document to be downloaded
5. Click on the button at the bottom right "Download a copy"
6. Download the document

***IMPORTANT**: icons are only present in those documents the user is allowed to download*

***Note**: downloaded documents are stored locally in the Download folder.*

Adding a part to the document

The internal structure of a document is given by the definition of a certain set of child documents called document "parts". Document parts represent the single part of the parent document (chapter, section, paragraph, ...) and enclose the various contents entered by users (text, images, tables, etc.). The structure may have several levels (hierarchical structure) or only one level (flat structure). The structure of a document can be managed when the document is open from the *Structure* panel,

Procedures for adding a document part

These procedures allow you to add a document part.

- Adding a new document part
- Adding a new document part from an existing one
- Adding a new document part from existing non CCH Tagetik

.

Adding a new document part

1. Open the document
2. Click on **Structure *(ribbon bar > Documents Management > Structure)***
3. Click on the document to which you want to add the document part; the document is highlighted in the structure

4. Click **Add**, the *New Document* tab pops up
5. Click **Create New**, the tab *Create new document part from scratch* pops up
6. Enter **Document Name (mandatory)**
7. Enter **Additional Information (optional**)
8. Specify the **Location** where the document part is saved (by default, the location where the parent document is saved is displayed)
9. Click **Next > Create** to create the document part and add it to the open document, or
10. Switch on the **Application Databases** toggle among those visible to the user
11. Click **Add** Dimension to add dimensions to the document
12. Click on the three dots of each added dimension to specify its values by selecting a node/lowest level element from a flat list or hierarchy. Values can be selected by navigating through the list of results or by using the *Search* function. This function is supported by version 5.3.29.0 of CCH Tagetik and later.

    ***Note**: Dimension values defined in the parent document are inherited by default, the user may however decide to switch off the **Inherit from parent document** toggle and specify new values.*

13. Click **Previous** to return to previous tab

After successfully completing the creation data processing, the created document part will be visible in the structure and its content control will be visible in the open document.

Note: Once the document has been created, it inherits the style template for the metadata section from the root document. During the writing phase, the user can apply the same templates used in the parent document.

Adding a new document part from an existing one

1. Open the document
2. Click on **Structure *(ribbon bar > Documents Management > Structure)***
3. Click on the document to which you want to add the document part: the document is highlighted in the structure
4. Click **Add**: the *New Document* tab pops up
5. Click on **CCH Tagetik** : the tab *Create a new document part from existing* opens, displaying the list of document roots saved in the Shared Folder or in user-*defined folders in* the dedicated SharePoint Site
6. Click on a *root document*: the document is highlighted in the list
7. Click on **Structure**: this opens a new tab in which you can view all the document parts that make up the document root selected in the previous tab
8. Click on a *document part* to be added: the document part is highlighted in the structure
9. Click on **Link** to add it to the document, or
10. Click on **Library** to return to the previous tab

After successfully completing the creation data processing, the created document part will be visible in the structure and its content control will be visible in the open document.

Note. Once a Tagetik document chosen from the document list is linked, it continues to retain all its own metadata including the style template.

Note. If the linked document part has child document parts, these will also be linked to the document. In the Document Structure, the **militlinked** icon will be shown for document parts that are linked to several documents.

Add a new document part by cloning a document part from the structure

1. Open the document
2. Click on **Structure *(ribbon bar > Documents Management > Structure)***
3. Click on the top-level document part in the open document structure. Only these parts can be cloned.
4. Click Clone.

At the end of the process, the new document part will be visible in the structure immediately after the original. The name will be identical to that of the cloned part, followed by the time the cloning was completed (hours, minutes, seconds), and the updated content will be visible within the document.

Note

In the document part clone:

- any **workflow** statuses of the original document part will be **reset**
- **Access rights** will be maintained. For example, if the user only has the right to view the original document part, the same right will also apply to the cloned document part
- any parameters inherited from the document root will continue to be inherited

Adding a new document part from existing non CCH Tagetik

1. Open the document
2. Click on **Structure *(ribbon bar > Documents Management > Structure)***
3. Click on the document to which you want to add the document part: the document is highlighted in the structure
4. Click **Add**: the *New Document* tab pops up
5. Click on **Sharepoint**: the tab *Create a new document part from existing non pops up,* CCH Tagetikshowing the list of non documents saved in the *Shared Folder* CCH Tagetikor in user-defined folders in the dedicated SharePoint Site
6. Click on the *document* to be added: the document is highlighted in the list
7. Click **Next**: the tab with general information on the document opens
8. Enter **Additional Information (optional**)
9. Click **Next > Create** to create the document part and add it to the open document, or
10. Switch on the **Application Databases** toggle among those visible to the user
11. Click **Add** Dimension to add dimensions to the document
12. Click on the three dots of each added dimension to specify its values by selecting a node/lowest level element from a flat list or hierarchy. Values can be selected by navigating through the list of results or by using the *Search* function. This function is supported from version 5.3.29.0 of CCH Tagetik onwards.

    Note: *Dimension values defined in the parent document are inherited by default, the user may however decide to switch off the Inherit from parent document toggle and specify new values.*

13. Click Previous to return to the previous tab

After successfully completing the creation data processing, the created document part will be visible in the structure and its content control will be visible in the open document.

Note: Once a Non-Tagetik document chosen from the document list is linked, it continues to retain all its own metadata including the style template.

Create Multilinked status

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > Documents management > Outline >*  *Select a document with the chain symbol > click on Edit.*

When a Tagetik or SharePoint document is linked to another existing document, the System shows a chain symbol to the right of the document added to the outline
Following the status change, the linked document will be contained in two or more parent documents and becomes independent in terms of Language, parameters and Metadata.

From then on, if the user selects the document and enters the Edit step, the editable Language field is shown on the first tab, and you can make changes and save by navigating the Parameters and Advanced (Metadata) tabs.

Once a document linked to several documents has been saved, you can set the Language - Parameters and Advanced properties independently.
The same is true for document parts linked to all the added objects

Note - If a recursive update is run from the parent document, the visible contents of parts with Multilinked status inherit from the document part and not from the Root.

Unlink a document part

After linking a document part using the Add function in the outline of an open document, the user can unlink the document using the dedicated option via the three dots ⋮ visible to the right of that document.

Then the document is unlinked, it becomes onlylinked but does not lose the features of a multilinked document with the chain icon. To change the status of the document, you must proceed with the Detach step.

Unlink a document part

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > Documents management > Outline > ⋮ > Unlink

1. Open a document root from the Library: ribbon bar > File > Open > click on the document x
2. Double click on the document x in the outline with the document closed
3. Click **Outline** from the ribbon, the ***Document outline - document x*** panel will open
4. Click on the three dots ⋮ of the previously linked document part in the outline
5. Click **Unlink**
6. The system will show a “completed successfully” message
7. And the document part will no longer be visible below the outline of the document where it was located
8. Lastly, the content control with all the automatically visible content will no longer be shown

Note. unlinking a multilinked document means that it will only be contained under one outline but will keep the Multilinked icon. The user can choose whether to keep this status or run a detach.

Detach Multilinked document part

Word Add-in > CCH Tagetikribbon bar > Document Management > Structure > ⋮ > click on Detach.

After a Tagetik or Sharepoint document is linked and its state changes from Onlylinked to Multilinked, the user can decide to return the document to its previous state other than Multilinked from one of the two structures where the document is included. The operation is named Detach.

Sequence to Detach a Multilinked Document

1. Select the **Open** button from the ribbon bar
2. Double-click on the **parent document**
3. Click ***Document Structure*** on the Ribbon bar
4. Select the document part with the Chain symbol to the right
5. Click on the **Three Dots** ⋮
6. Select the **Detach** option
7. Enter a different name for the document
8. Set a path where the new document will be saved.

   IMPORTANT: If the name is already present, the system blocks the user and displays a warning message.
   By reselecting the **EDIT** button, the user can change the previously entered name rejected by the system.
9. Change parameters, Metadata or leave them unchanged
10. Click the **Detach** button
11. Eventually, the system displays the document in the structure with the new name and the chain icon will no longer be visible

Note. Detachment of a document is performed for all documents in the structure down to the sub-children, unless they are saved in another existing folder.

IMPORTANT When a Root document with its children is linked into the structure of another document, the Detach function is not available and the user can disconnect this document using the **Unlink** functionality. To disconnect the child document parts, it will be necessary to use the **Detach** function available after disconnecting the Root document.

Sequence to Detach an Onlylinked Document

When a document is Onlylinked but has the chain icon because it has been detached from another parent, the user must perform a further detach by bringing the document back to its initial state.

1. Select the **Open** button from the ribbon bar
2. Double-click on the **parent document**
3. Click ***Document Structure*** on the Ribbon bar
4. Select the document part with the Chain symbol to the right
5. Click on the **Three Dots**
6. Select the **Detach** option
7. Document Name and Path cannot be changed
8. Enter additional information or leave the field unchanged
9. Select the **Next** button
10. Change parameters or leave them unchanged
11. Click the **Detach** button
12. Eventually, the system displays the document in the structure without the chain icon

Document structure

Definition

The document **structure** shows how the document is broken down.
A **document part** is a section of the document that contains specific information or content, such as a cover page, table of contents, executive summary, legal notice or main body. Each document part may have different properties, such as layout, style, parameters and user rights. It is possible to manage the structure according to the status of the document, open or closed.

Managing the structure of an open document

Word > CCH Tagetik > in Document Management > Structure

The following actions can be performed from the structure of an open document:

- Opening a document part by double-clicking on it
- Modifying a part of the document structure
- Adding a new document part
- Deleting a document part, only for top-level child document parts of the open document
- Cloning a document part, only for top-level child document parts of the open document
- Modifying the properties of a document part
- Exporting a document part
- Exporting differences between source data and document data

Managing the structure of a closed document

Word > CCH Tagetik > Open > Select Root (library tab) > Document Part > in Document Manager > Structure

***Note**: the library shows root documents.*

The following actions can be performed from the structure of a closed document:

- Opening a document part by clicking the Open button in the ribbon bar
- Dragging and dropping document parts to rearrange document order
- Deleting a document part (available for all levels)
- Exporting a document part
- Exporting differences between source data and document data

Open a Tagetik document

Open a document

Word Add-in > CCH Tagetikribbon bar > File > Open

This procedure allows you to open a document created and saved on Sharepoint.

1. Click **Open**
2. In the ***Library*** panel, pinpoint the document you want to open using the *Search* functionality and click on the document name
3. In the **Structure** panel, double-click on the root document or a sub-part of the document.

The System will open the document, or its sub-part, showing the Name above, based on the User rights on the document.

Document structure

Word > CCH Tagetik > Documents Management > Outline

***IMPORTANT**: it is only possible to navigate and work on the Outline if the Document is open, see Opening a Document in Tagetik*

Purpose of the page

On this page, you can open the Structure panel, which shows the name of the document and its elements, if any.

Interaction with each document and its management are governed by the user's rights on the document.

Elements of the document structure

Element	Description
Document na	Parent document in bold and document parts (if created) visible in the structure
⋮	allows the user to work on each document
arrow	allows you to expand the list of child documents linked to an existing document in the structure

Section buttons

Element	Description
Edit	Allows you to modify the general information - parameters and formatting defined during creation
Duplicate	Allows you to create a copy of an existing document while retaining all the information defined during creation
Add	Allows you to add a new document to the document structure or link an existing document

***IMPORTANT**: buttons are activated by selecting a document in the structure.*

Document outline from the Library panel

Word > CCH Tagetik > File > Open > Select document > Outline

***IMPORTANT**: the outline can only be changed if the document is closed.*

Purpose of the page

On this page, the following activities can be managed:

- Edit the Mapping of associated databases
- Manage the outline of a document by changing the document location order
- Open any document in the outline (double click)
- Export any document in the outline (using the actions button)
- Delete the document root

Buttons on the page

Element	Description
DB mapping	Allows you to move the configurations inherited from a specific database and map them onto another available one.
Manage Outline	Allows you to change the outline of a document by changing the location of every document part, linking and unlinking them from every document that is present
Library	Allows you to go back to the Library where all Tagetik document are visible.

Manage the Outline of a document

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > File > Open > select the document > Manage Outline

Change the outline of a document

This procedure allows you to change the outline of a document and/or document part after creating a document and building up a outline.

1. Select **Open**
2. Click on **parent document**
3. Click on ***Manage outline*** at the top right-hand corner
4. Keep a document part selected and either swap its position with another document part in the same document, or drag it below another document to include it as a child.
5. Release the mouse button to complete the change of position
6. Click **Save** at the bottom right-hand corner

   The system will launch a data processing and, on completion, you will receive a success message

Note: you can make up to three moves before starting the data processing. The system will notify the user with a Warning message. The two operations allowed are:

1. save and launch the operation
2. select the Back button to cancel.

***IMPORTANT**: all edited documents must be closed, otherwise the system will block the user and show a "Failed" message*

***Note**:Once the operation is complete, the user can open the document and verify the structural changes, including the new positions of the Content Controls within the document. Some may no longer visible if placed under other documents as includes (including objects).*

If the system detects available updates for the add-in on authentication, the update will be requested. The user name and password must be entered again once the update is finished.

User rights on documents

Introduction

Intelligent Disclosure documents are stored in SharePoint and so the SharePoint user rights management system can be used to control who can access, edit or delete documents.

> ***Note.*** *This manual is not intended to be a complete guide for managing SharePoint user rights. For more information, see the official Microsoft documentation on Permission levels in SharePoint.*

User rights in SharePoint

SharePoint user rights define the permissions assigned to users or groups of users to run actions on SharePoint *Sites*, *Collections*, *Folders* or *Documents*. User rights can be inherited from the higher level, or interrupted and customised at the lower level.

There are various types of user permissions in SharePoint: Total Control, Edit, Read, Contribution, Approval, etc. Every user right defines a set of actions that the user can run on the SharePoint element.

Example 1.
If it is useful to assign rights to a site, all the collections, folders and documents within that site will inherit the same user rights, unless inheritance is interrupted and different user rights are assigned to a specific collection, folder or document.

Rights can be assigned to a user or a group of users. A group of users is a collection of users who share the same right. Using user groups can help to simplify and optimise the management of user rights: the same right can be assigned to several users simultaneously, and even easily update or remove the right for the whole group.

Example 2.
A user with the Read right can only view and download the element; whereas a user with the Edit right can also add, edit or delete the element. You can also create customised user rights by selecting the specific actions that you want to permit or deny.

Intelligent Disclosure user roles

Intelligent Disclosure user roles identify the permissions that can be assigned to users to access and run actions using the additional Intelligent Disclosure component.
The user rights defined in SharePoint also apply to Intelligent Disclosure documents.

The difference between SharePoint user rights and Intelligent Disclosure user roles

SharePoint user rights control access to and actions on SharePoint elements, while Intelligent Disclosure user roles control access to and actions on data within documents.
For example, a user with the Read right in SharePoint can view and download an Intelligent Disclosure document, but may not be able to edit or update the data within the document, depending on their user roles in Tagetik.
The management of User Rights in ID must consider both SharePoint user rights and Tagetik user roles. SharePoint user rights will determine who can access, edit or delete documents, while Tagetik user roles will determine who can add, edit or update the data within documents. For more information on Tagetik user roles, see User role application

Best Practices

- Use user groups to assign SharePoint access rights to several users simultaneously and to simplify the management of access rights.
- Use the concept of inheritance to apply the same SharePoint access rights to all elements within a site or a collection, unless the access rights are customised for a specific element.
- Use reports on SharePoint access rights to monitor and check the assignment of or changes to access rights.

Application of user rights defined in SharePoint

Within a list of documents (see **Application Panels**), each document is shown with a specific font colour:

- **black**: the user has rights on the document (read or write)
- **grey**: the user has no rights on the document.

Application panels

The impacts of user rights are manifested on the following pages of the application:

Panel	Description
Library	Open document root panel, accessible from the **Open** button on the tool bar
Outline	Outline panel accessible in two ways: • **Library** button on the tool bar, and single click on a document • with a document already open, **Outline** button on the tool bar
Sources	Sources panel, accessible from the **Sources** button on the tool bar

Application of user roles defined in CCH Tagetik

Introduction

In Tagetik Software S.r.l., the management of user roles on the Word Add-In is defined by the following two modules:

- *Intelligent Disclosure Admin*
- *Intelligent Disclosure User*

The *Intelligent Disclosure Admin* module contains the authorisations for managing the structure of the collaborative document, and the *Intelligent Disclosure User* module those for managing the contents of the collaborative document.

In the Repository of Tagetik Software S.r.l., user roles - containing all or part of these authorisations depending on specific needs - are defined and associated with the application users of the AddInWord.

IMPORTANT: User roles so defined are to be associated with application users in the Repository; no configuration is due for users with reference to application DBs. In addition, if the user to be configured to access the Word Addin is to have no other function in the Repository, it is advisable to create a *custom role* with the functions of the disclosure module of interest in it.

This information is automatically propagated to the Addin Word in two ways:

- per individual user: when creating / editing / deleting roles, **Users/Roles mapping**, for the specific user on the Repository in Tagetik Software S.r.l., on the Users page
- global: upon completion of the role update procedure **Sync all users in external services** for all users listed in the Repository in Tagetik Software S.r.l., on the Users page

User roles are applied when the user tries to access a feature of the AddIn Word, making an entire application panel or a specific operational element of it accessible (e.g. button, link)

Specifically, when the users click on one of the buttons on the toolbar, they will have access to the relevant functional panel if allowed by their role, otherwise a message stating they do not have the proper rights will pop up.

Within each functional panel, then, each operational element (button, link) will be enabled or disabled depending on the user's role.

Listed below are the panels accessible from the toolbar and the operational elements that can be enabled according to the modules available for the AddInWord.

Application Panels

Below, for each Application Panel, you will find the relevant ribbon icon to click on to reach it and the modules that guarantee accessibility.

The accessibility of the application panel is either linked to a specific module (Intelligent Disclosure Admin, Intelligent Disclosure User) or is unrestricted (ALL).

Icon/Panel	Module
Access/Accesses	ALL
Open/Library	ALL
New/New Document	Intelligent Disclosure Admin
Outline/Outline	ALL
Updates/Document Part to update	Intelligent Disclosure User
Sources/Sources	ALL
New/New Object	Intelligent Disclosure User
Edit/Edit	Intelligent Disclosure User
Objects List/Objects List	ALL
Import/Import	Intelligent Disclosure Admin
Synch Restore/Unsynchronized Server Objects	Intelligent Disclosure User
Info/Info	ALL

Operational Elements

Below are the application panel containing each operational element and the modules that guarantee its accessibility.

Accessibility to the operational elements of the application panel is either linked to a specific module (Intelligent Disclosure Admin, Intelligent Disclosure User) or is unrestricted (ALL).

Operating Element/Panel	Module
Manage Structure / Library	Intelligent Disclosure Admin
Edit / Outline	Intelligent Disclosure Admin
Duplicate / Outline	Intelligent Disclosure Admin
Add / Outline	Intelligent Disclosure Admin
Unlink / Outline	Intelligent Disclosure Admin
Detach / Outline	Intelligent Disclosure Admin
Delete / Outline	Intelligent Disclosure Admin
Export / Outline	ALL
Available Updates / Objects List	Intelligent Disclosure User
Get Changes / Updates	Intelligent Disclosure User

Document settings page

Admin

Repository> Intelligent Disclosure > Documents Settings

Page purpose


From this page, you can manage user rights for Intelligent Disclosure within the solution CCH Tagetik , i.e. assign native SharePoint rights for accessing documents and/or Tagetik rights for defining the document approval process.

***IMPORTANT**: The user rights functionality in CCH® Tagetikis only fully available if the M365 admin has given permission for **allsite.full control.** Granting permission enables the management of **SharePoint**'s **permission levels**, which otherwise can only be managed from the SharePoint user interface. Whether or not permission is granted, the user rights functionality allows the management of the native permissions of CCH® Tagetik **(Submit** and **Approved Level**s **des**cribed below). For information on how to grant permission see PDF document in Community How to Guide for the first set-up.*

***IMPORTANT:** To manage permissions for a user belonging to a domain group, the user must access the SharePoint environment integrated in the product solution at least once.*

To manage permissions for a domain group, the group must be included in a SharePoint group.

What it looks like

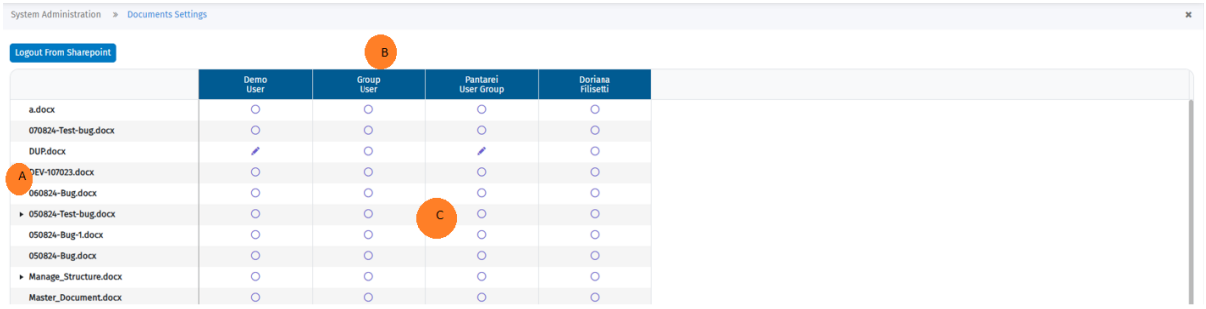

Element	Description
A	Collaborative document list
B	Users and Groups
C	User rights grid

Buttons on the page

The following buttons are available on the page:

Element	Description
☐	Associated with each document; once the desired documents have been selected, it will be possible to check and manage the relevant user permissions
■■■	Visible after selecting a single document; opens the drop-down menu containing the **Add** item. If multiple documents are selected, it will not be visible.
Add	Menu item to add, edit, delete user rights on the document. Accessible only in the case of single document selection
Add	Button only visible when multiple documents are selected, allows you to add, edit, delete user rights to selected documents
Selected N/10	Label only visible when more than one document is selected; indicates the number of documents (N) selected, maximum 10
Logout from SharePoint	To log out of SharePoint

Element	Description
▶	To expand the grid display to subpart documents
▼	To compress the grid display to the root document only
Show More	Enables the list of documents to be incremented by an additional 20; it is displayed to increment both the list of root documents and the list of their subparts

User rights and icons

In the grid, icons are displayed according to the user's rights on the document. Rights are divided into the following types:

- native **SharePoint** rights, as specified in the Microsoft documentPermission levels in SharePoint)
- native rights of **CCH Tagetik**: *Submit*, *Level 1 A*pprove, Level 2 Approve, Level 3 Approve, Level 4 Approve, Level 5 Approve

The SharePoint native rights classified in CCH Tagetik include the following categories:

- *Set-up*
- *Contribute*
- *Read-Only*
- *No Access*

The icons, divided according to the type of user rights, are as follows, in order of priority:

Icon	User rights	Allocation Rules
	Approve right (any level) assigned to the document or SharePoint's native Set-Up right	if the permission level includes at least one of: **delete** document, delete document versions and change permissions;
	Submit right assigned to the document, i.e. SharePoint's native Contribute right	if the permission level does not include any of the permissions for the icon , and at least one of the document's edit permissions.
	SharePoint Native Read-Only Right	if the permission level does not include any of the permissions for the icons and , and if at least one of the permissions is **view** of the document and its versions;
	No rights assigned to the document or SharePoint's native No Access right	if the permission level does not include any of the permissions for the following icons: .

***IMPORTANT**: the allocation rules are valid for **SharePoint** native rights*

***IMPORTANT**: In the case of both single and group permission(s), the one with the highest priority prevails in the Add-in (according to the order of the icons in the table).*

***IMPORTANT**: the **owner user** always has **Full Control** permission level assigned to any document, regardless of assignments/deletions made on the user.*

Approval Process configuration in CCH Tagetik

The user assigns the Submission permission and approval levels for the document.

In particular, up to 5 approval levels can be assigned: Approval *Level 1, Approval Level 2, Approval Level 3, Approval Level 4, Approval Level 5.*

Associating a document with a user or a group of users requires defining permissions for *submission* and for approval (the latter may be an additional step after submission).

It is possible to assign a singe approval level (among the five available), multiple levels (not necessarily consecutive), or even all levels.

***IMPORTANT**: Submission permission and one approval level can be assigned to one or more users or user groups. However, each user or user group can be assigned no more than one of these permissions.*

***IMPORTANT**:Any changes to the permission settings, for a given document, only take effect in the approval process if the document is in a prior approval state.*

When assigning an approval level, CCH Tagetik displays the user-modifiable *Enable Edit* button, pre-set to *false*.

Note: The *Enable Edit* button can be enabled on the same document for multiple users/user groups. Moreover, a user/group of users can also have the *Enable Edit* button enabled on several documents at the same time

Document User Rights definition

Repository> Intelligent Disclosure> Documents Settings

Document user rights definition procedure.

Access the user rights management window

1. click **Login To SharePoint**
2. enter credentials

Consult user rights defined on a document

This procedure allows you to consult user rights on one or more documents.

1. Select one or more collaborative documents on the check box associated with the document name
2. CCH Tagetik populates the grid with only those users and user groups who have rights (native to SharePoint and/or Tagetik Software S.r.l.) and for only those documents of interest shows an appropriate icon linked to the permission configured for the user.

IMPORTANT Although a user may be assigned several permissions, CCH Tagetik shows only one icon and does so based on the following priority rules:

- if only a native SharePoint or CCH Tagetik right is granted, its icon is shown as described in Document Settings;
- if native SharePoint and CCH Tagetik rights are granted at the same time, the icon referring to the former is always shown;
- if multiple SharePoint native rights are granted, the icon of the most prioritised permission is shown in the order: *Set-up*, *Contribute*, *Read-Only*, *No Access*.

By hovering over the grid cell for the user and the document, CCH Tagetik displays a label containing the list of configured permissions for the user

Adding user rights to a document

This procedure allows user rights to be added to an individual document

1. Select the collaborative document or one of its subparts on the check box associated with the document name
2. Click 
3. Select **Add**

4. In the **Add user rights** window enter in the search field at least3 consecutive characters of the first name, surname, or e-mail address of the user or group of users to whom you wish to add the right, and click on the button to start the search; select the one of interest from those returned by the search operation.
5. Click **Confirm Operation**
6. In the **Add user/group rights** window, click **Add Permissions**. N**ote: If the selected document is currently in a workflow progress state, a warning message will appear at the top of the window: "By adding this permission, you will change the status of the already approved document part." Please be careful.**"
7. Select one of the menu items available : **Submission, Level 1 Approval, Level 2 Approval, Level 3 Approval, Level 4 Approval, Level 5 Approval**, and the permission levels configured in SharePoint (for more information see the official Microsoft document Permission levels in SharePoint.) **Note**: To assign the **Enable Edit** permission, once an Approval Level has been selected, enable the Enable Edit button.
8. Click **Confirm Operation**

IMPORTANT: for a given document, the user can be assigned only one of the following: Submission, Level 1 Approval, Level 2 Approval, Level 3 Approval, Level 4 Approval, Level 5 Approval

Adding User Rights to Multiple Documents

This procedure allows user rights to be added to several documents at the same time

1. Select the documents of interest by clicking on the check box associated with the document name with the left mouse button
2. Select **Add** from the grid
3. In the **Add user rights** window enter in the search field at least 3 consecutive characters of the first name, last name, or e-mail address of the user or user group whose rights you wish to revoke, and click the button to start the search; click on the result of interest returned.

   IMPORTANT: the warning message *'All previous and existing permissions will be overwritten*' is shown at the top of the window
4. Click the **Confirm Operation** button
5. In the **Add user/group rights** window click **Add Permissions**
6. Select one of the available options: **Submission, Level 1 Approval, Level 2 Approval, Level 3 Approval, Level 4 Approval, Level 5 Approval**, and the permission levels configured in Sharepoint (for more information see the official Microsoft document Permission levels in SharePoint)

   Note: To assign the **Enable Edit** permission, once an Approval Level has been selected, enable the *Enable Edit* button
7. Click the **Confirm Operation** button

IMPORTANT: for a given document, the user can be assigned only one of the following: Submission, Level 1 Approval, Level 2 Approval, Level 3 Approval, Level 4 Approval, Level 5 Approval.

Note: the Confirm Operation button is only editable if at least one permission is assigned to the user

Delete user rights on a single document

This procedure allows you to delete user rights on a document

1. Select the collaborative document, or a sub-part thereof, by clicking on the check box associated with the document name with the left mouse button
2. Click on the button icon 
3. Select the **Add** menu item
4. In the **Add user rights** window enter in the search field at least3 consecutive characters of the first name, surname, or e-mail address of the user or user group whose rights you wish to revoke, and click on the button to start the search; click on the result of interest returned
5. Click the **Confirm Operation** button

6. In the **Add user/group rights** window, click on the icon associated with the right to be revoked
Note: Removing the Approval Level removes the *Enable Edit* permission, if any
7. Click the **Confirm Operation** button

note: the **Confirm Operation** button is only editable if at least one permission is assigned to the user

Delete the rights of all users on a single document

This procedure deletes the permissions of all users for the selected document.

1. Select the root document, or a sub-part of it, by left-clicking on the check box next to the name
2. Click on the button icon
3. Click on the menu item **Clean Permissions,** selectable only if the grid contains at least one column
4. Click the **Continue** button in the pop-up that displays the warning message "The delete permissions operation will be run for all users on the selected document. Are you sure that you want to continue?" and the information note:"Owner type permissions will not be deleted
5. Click the **Continue** button

***IMPORTANT**: For **owner** users of the site, deletion includes both native Sharepoint and CCH Tagetik permissions; for **member** users of the site, deletion only includes native Sharepoint permissions CCH Tagetik*

Deleting all users' rights on several documents

This procedure allows you to delete the permissions of all users for selected collaborative documents.

1. Select the documents - between 2 and 10 in number - by left-clicking on the check box next to the name of each one.
2. Click on the **Clean Permissions** button icon visible above the grid
3. Click the **Continue** button in the pop-up that displays the warning message "The delete permissions operation will be run for all users on the selected document. Are you sure that you want to continue?" and the information note:"Owner type permissions will not be deleted
4. Click the **Continue** button

IMPORTANT: For **owner** users of the site, deletion includes both native Sharepoint and CCH Tagetik permissions; for **member** users of the site, deletion only includes native Sharepoint permissions CCH Tagetik

Modifying user rights on a document

This procedure allows for modification of user's rights on a single document.

1. Select an individual collaborative document, or a sub-part thereof, by clicking on the check box associated with the document name with the left mouse button
2. Click on the user right icon, as described in section "User rights and icons", for the user of interest.

   Note: the icon can be edited only if a single document has been selected

3. In the Add user/group rights window, change the user rights, following the procedures below:
   - to add:

   a) click on the **Add Permissions** button

   b) Select one of the available menu items: *Submission, Level 1 Approval, Level 2 Approval, Level 3 Approval, Level 4 Approval, Level 5 Approval*, and the permission levels configured in SharePoint (for more information see the official Microsoft document Permission levels in SharePoint)

   Note: To assign the **Enable Edit** permission, once an Approval Level has been selected, enable the *Enable Edit* button

- to delete:

a) In the Add user/group rights window, click on the icon associated with the right to be revoked

Note: Removing the Approval Level removes the *Enable Edit* permission, if any

4. Click the **Confirm Operation** button
5. Upon completion of the above procedure, CCH Tagetik displays the user's updated permission icon in the grid.

IMPORTANT: for a given document, the user can be assigned only one of the following: Submission, Level 1 Approval, Level 2 Approval, Level 3 Approval, Level 4 Approval, Level 5 Approval

Document Workflow Management

Introduction

The AddinWord provides for the collaborative document to be associated with a *status* representing the progress of the document's processing. Moreover, the AddInWord provides the user with the interactive tools to induce the status change at the same time as the completion of a document editing step.

Information on the status of the document is made available to the user in graphic form by means of a suitably-coloured icon next to the name of the document itself, and by clicking on the aforementioned icon, the AddInWord proposes possible actions to the user to induce the change of status.

In particular, during the processing phase by contributor users, the document is in the initial *Not Started* state; once the document's drafting is completed, and any approval phases during which it remains in the *Waiting for Approval* state, the document finally reaches the *Submitted* state. At any point in this process, the document can be moved to the *Rejected* state, and once the document has been processed, the described approval process can be retraced.

Graphic elements and information content of the document status

In the position immediately preceding the name of the collaborative document, an icon of a specific colour is shown, depending on the *status*, according to the model in the table below, where its functional significance is indicated for each.

Icon	Status	Status description
	Not relevant	Not relevant document. No processing is provided for the document.
	Not Started	Document for which no activity has been carried out yet
	In Progress	Document for which data collection and submission activities are in progress. ***Note**: status only visible for document structure nodes.*
	Waiting for Approval	Document awaiting approval by another user; current user does not have approval rights to the document
	Waiting for Approval	Document awaiting user approval; the current user has approval rights to the document
	Submitted	Submitted document.

Icon	Status	Status description
	**Rejected**	Rejected document. Data collection is available again.

Document status icons are available in the following panels in which AddInWord shows the structure of the collaborative document.

In particular, the following table shows the panel and the actions to be performed to reach them.

Panel	Actions
Document structure	Open the document, click the **Document Structure** button in the ribbon bar
Document structure	click the **Open** button in the ribbon bar, then select the document in the **Library** panel

Progress status

By hovering over the status icon and clicking its button (left or right), the AddInWord proposes to the user in a pop-up menu the allowed actions for the document's progress status.

The planned actions are:

- **Submission**: performs the submission of the document. Once completed, the document status will be **Submitted** if there are no approving users, otherwise it will be Waiting for Approval
- **Approve**: performs document approval. Once completed, the document status will be **Submitted** if there are no next-level approver users**,** otherwise it will be Waiting for Approval.
- **Reject**: performs document rejection, following which the document status will be **Rejected**

The AddinWord shows in the pop-up menu the allowed actions based on the current document status, as shown in the table below

Current Status	Actions
Not relevant	
Not Started	**Submission**
In Progress	**Submission**
Waiting for Approval	**Approve**, **Reject**
Submitted	**Reject**
Rejected	**Submission**

A user who is enabled for the **Submission** operation will see, in the contextual menu, the information about the next user—if any—who will handle the document as the next approver. The label will appear as *Submit to* when there is a single user, or *Submit to Multiple Users* in case of multiple approvers.

The user who is enabled for the **Approve** operation will see, in the context menu, information about the date in UTC and the last user who approved the document, displayed as *Submitted by*.

The user who is not enabled for the **Approve** operation will see, in the context menu, information about the date in UTC and the next user who will handle the document, displayed as *Submitted to* in the case of a single user, *Submitted to* Multiple Users, in the case of multiple users.

IMPORTANT: **Not relevant** status is automatically assigned to a document for whichthere are no users with Submission permission;

The status **In Progress** is automatically assigned to a document whose subparts are in the status Waiting for Approval or Submitted;

IMPORTANT: **Submission** permission**/Level 1 Approve** ,...,Level 5 Approve on a document is granted to the user as defined on the user rights management page(Intelligent Disclosure - Documents Settings)

Document Submission Process

A document Submission is completed once it is in **Submitted** status.

To reach this status, the authorised user must first perform the **Submission** operation, following which the document reaches this status:

- **Submitted**: in the event that there is no user/user group with *Approve* permissions*(Level 1 Approve,.., Level 5 Approve) on the d*ocument, as indicated in *Intelligent Disclosure - Documents Settings*
- **Waiting for Approval**: in case there is at least one user/user group with **Approve** permissions*(Level 1 Approve,.., Level 5 Approve) on the d*ocument, as indicated in *Intelligent Disclosure - Documents Settings*

In the first case, the document will reach the *Submitted* status immediately after the *Submission* operation.

Whereas, in the second case, after the Submission operation the document switches to the Waiting for Approval status, and only moves to the Submitted status once all approval steps have been completed. Each approval step corresponds to an approval level for which at least one user holds permission on the document (see Document Setup Page).

The approval steps follow the ascending order, from the first (Level 1 Approve) to the last (Level 5 Approve). Only the next-level users can take charge of the document, and only after the corresponding approval step has been completed.

In particular, the user enabled for the *Approve* operation for that approval step will see the icon with a white-background hourglass ; otherwise, they will see an icon with a blue-background hourglass.

A document can be *Submitted* and *Approved* by the user only once all the checks described below are met:

- **Rights Check** : the user is enabled for the *Submission* or Approve operation when they hold the corresponding permission on the document, as defined on the Intelligent Disclosure – Documents Settings page.
- **Status check**:
  - to enable the *Submission* action, the status of the document must be either Not *Started, In Progres*s, Rejected;
  - to enable the *Approve* action, the status of the document must be *Waiting for Approval* and the user must be enabled for that approval step
- **Structure** check: for the Submission action, the status of any child documents is either *Submitted* or *Not Relevant*

Document Rejection Process

The rejection of a document occurs when it is in the **Rejected** status.

To get to this status, the enabled user must run the **Reject** operation

A document can be *Rejected* by the user once all checks below are met:

- **Status check**: to enable the *Reject* action, the document status must be either *Submitted* or *Waiting for Approval*
- **Rights check**:
  - for a root document in *Submitted* status, the user can *Reject* it if they have *Submission* or *Approve* rights (Level 1 Approve,...,Level 5 Approve) **on the document**
  - for a subpart document in *Submission* status, the can *Reject* it if they have *Submission* or *Approve* rights (Level 1 Approve,..,Level 5 Approve) **on the parent document** ;
  - for a document in *Waiting for Approval* status, the user Reject it if they have an Approve right **on the document** (Level 1 Approve,...,*Level 5 Approve) that is* higher than the last completed approval step *;*
- **Structure check**: the parent document is not in *the Submitted* or *Waiting for Approval* status

IMPORTANT: in the case of a multi-linked document, the above checks must be met on all document structures to which the document is linked

When the user runs the Reject operation, CCH Tagetik Word AddIn changes the document status as follows:

1) For a *Submitted* document the status will be:

- *Rejected*, if there are no users enabled to write to the submitted document, as defined in the Approval Process Configuration in CCH Tagetik

- *Waiting for Approval*, if there is at least one user enabled to write to the submitted document. In this case, the document is assigned to the user enabled with a higher approval level.

2) For a document *Waiting for Approval* the status will be:

- *Rejected*, if there are no users with an approval level lower than that of the document who are enabled to write to the submitted document.

- *Waiting for Approv*al, if there is at least one user with an approval level lower than that of the document who is enabled to write to the submitted document. In this case, the document is assigned to the authorized user with a higher approval level.

Lock/Unlock the collaborative document

At the same time as the *Submitted* or *Waiting for approval* status is reached, the collaborative document will be accessible in read-only mode (document *lock*).

When the collaborative document gets into *Rejected* status *(* document unlock), the document will again be accessible in write mode.

IMPORTANT: document *lock*/*unlock* are only available when the document is closed.

At the same time as *locking* the document, the AddInWord performs the following actions on the document:

- When the **New**, **Edit**, **Updates** buttons in the ribbon bar are clicked, the message **Read-only document** is displayed in the functionality panel
- the **Available Updates** menu item, which can be reached by clicking the **Object List** button in the ribbon bar, is disabled.

By *unlocking* the document, however, the usability of the above-mentioned functionality is restored.

Edit submitted data

As an exception to the process described in the section "Lock/Unlock of the collaborative document", Tagetik WordAddIn allows the authorised user to temporarily access the locked document in writing mode.

The user is enabled in CCH Tagetik as specified in the section 'Approval Process configuration in CCH Tagetik' by activating the *Enable Edit* toggle of the user's approval level.

The document can be accessed in write mode when the user uses the *Enable Edit* functionality; once the changes have been completed, the user releases the document using the *Disable Edit* functionality

Enable Edit

When the enabled user is the next approver of the document, the *Enable Edit* functionality is available in the status transition context menu.

Upon the user's click, the following actions are performed by the CCH Tagetik Word Add-In:

- the document is opened in an editable mode in a new instance of Microsoft Word, exclusively for the user who has run *Enable Edit*; for all other users, the document remains accessible in read-only mode;

- the side panel of CCH Tagetik WordAddIn displays an orange banner reading 'Remember to DISABLE data editing' only for the user who has run *Enable Edit*

- in the Outline panel, the document is highlighted in orange exclusively for the user who has run *Enable Edit*

- in the Outline panel the status icon is changed to a white background padlock  for the next approvers of the document, to a blue background padlock  for all others

- *Reject* and *Approve* actions are disabled in the context menu

Note: The Enable Edit feature notifies the user of an error if the document is already open.

Note: The user cannot access more than one document in write mode at the same time.

Once Enable Edit has been successfully executed, the user can exclusively make changes to the document, even at a later time. Finally, to make changes available to other users, the user must run the *Disable Edit* function.

IMPORTANT: If the document needs to be opened manually, it is recommended to use the functionality provided by the CCH Tagetik Word Add-In, rather than navigating the SharePoint integrated into the solution.

Disable Edit

To run the *Disable Edit* function, the user must perform the following actions:

- saves and closes the document;

- in the pop-up displayed by Microsoft Word '*Others won't be able to see your changes until you check in' Do you want to check in now?*" preferably selects *"No*"

Note: If 'Yes' is selected, Microsoft Word displays the Check In pop-up. Here the user selects *OK* and then opens the document to complete the procedure.

- in a new instance of Microsoft Word, the user accesses the Outline panel with the document closed, opens the context menu by clicking the blue padlock icon on the white background  of the highlighted document and finally clicks the *Disable Edit* menu item.

Upon the user's click, CCH Tagetik WordAddIn:

- removes the banner and removes the highlighting of the document

- restores the status icon: blue hourglass with white background  for the next approvers of the document, blue hourglass with blue background  for all others

- enables *Reject* and *Approve* actions

- restores the document to read-only access for users

Objects of the document

Define

Document objects are elements that enable documents to be enriched with content, including dynamic content. Objects make it possible, for example, to retrieve a table, number, text, etc. directly from the Tagetik Database and/or Excel files.

Types of objects

Objects can be divided into various types and classified according to their origin:

- Updatable objects:
  - Objects from Tagetik **(*Table*,*Graph*, *Amount from Tagetik, Amount from Tagetik form* and *Formatted Text*):** these objects allow you to retrieve values from the Tagetik database
  - **Objects from Excel (*Table*,*Graph* and *Amount*)**: these objects allow values to be retrieved from Excel files saved on the SharePoint site for the application
  - Reference Object *(Component Instance)*: these objects allow values to be retrieved from other objects of type *Component*
- Objects that can't be updated:
  - **Free objects (*Checkbox, Free text* and *Drop*down**)**:
    unlike the standard ojctes of Microsoft Office, these objects can leverage the full functionality of the Add-in and allow a checkbox, text or a dropdown list to be inserted into a document.

To add an object to the document, use the**'New**' function available *CCH® Tagetik Disclosure Ribbon bar > Objects > New* and follow the procedure for inserting the object.

IMPORTANT: It is not possible to nest updatable objects. For example, if you try to insert an object of *Import* type inside a *Table* object, the operation will be prevented and the user will be notified of the failed insertion.

Rich Text Object

Environmental, social and governance (ESG) reporting

The term **ESG** encompasses a wide range of environmental, social and governance considerations that can have an impact on a company's ability to generate value. It is used to integrate non-financial aspects into financial performance, corporate strategy and decision-making.

- **Environmental:** issues related to the environment, natural systems including land, air, water and ecosystems.
- **Social:** issues related to society, the people rights and the well-being of the communities in which a company operates.
- **Governance:** issues related to the company's decision-making process, management practices and corporate governance structure.

Alongside traditional financial reporting, **ESG** data can outline a complete picture of a company, leading to significant benefits in terms of improved access to capital, compliance with regulatory changes, enhanced corporate performance and improved corporate reputation and stakeholder engagement.

Integration with the ESG Solution of CCH® Tagetik

The **pre-packaged ESG** solution developed by CCH® Tagetik makes use of the **Analytical Information Hub** that collects data from multiple sources, standardizes it and transforms it into actionable, common, standardised and comparable metrics that allow companies to see data year-by-year and compare results and performance between different companies.

Using the **Rich Text** object, such data can be included within **Intelligent Disclosure** documents to prepare environmental, social and governance reporting that enables stakeholders, including investors, companies, regulators, communities and non-governmental organisations (NGOs) to make informed decisions.

***IMPORTANT**: This functionality is supported by **version 5.3.29.0 of** CCH® Tagetik and later.*

Add a Table to the Document

Word Add-in > CCH® Tagetik Disclosureribbon bar > Objects > New

This procedure allows a table whose area has been defined in a Form of CCH Tagetik or in an external source (Excel file) to be added to the document.

1. Open the document in edit mode
2. Place the cursor in the section of the document where you wish to insert the object
3. Click on **New**: the **New object** window will pop up

Adding a Table from Form Tagetik Software S.r.l.

To add a table to the document whose area has been defined in a Form of CCH Tagetik:

In the ***General*** tab:

1. Enter the **Name** of the object
2. Click on the **Object Type** dropdown and select *Table*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

In the ***Source*** tab :

1. Click CCH Tagetik
2. Select the **Application Database** from those available in the drop-down menu. The databases that can be selected are those associated with the user who logged in. If an object has already been added to the document, the system displays the previously selected database as the default value.

   Note: *the* ***Copy Configuration*** *button can be used to paste the matrix configurations copied from the Excel addin using the Copy Area/Chart utility.*

3. Click on the three dots to navigate the form tree and select the desired **form** or type the first three characters of the form to be searched (code or description) into the search bar to make a quick selection

   Note: *Search functionality is supported from version 5.3.29.0 onwards.*

4. Select a **Sheet** from those defined for the Form
5. Select the **Area** from those defined for the Form

   Note: *If the selected form has no sheet/area defined, the system displays a message 'No sheet/area available'.*

6. Click **Next** to go to the next tab

In the ***Parameters*** tab:

1. Click on the three dots for each mandatory parameter (*): this opens the panel allowing parameter selection

   Note: ***If the selected form has no parameters, the system displays the message 'There are no parameters for this form' and the user can move on to the next form.***

2. Select a hierarchy/grouping for the dimension to which the parameter refers
3. Select in the dimension tree a single element/node, or several elements/nodes (multi-selection is possible)
4. Click on **Confirm** to add the selected items and return to the ***Parameters*** tab
5. Click **Next** to go to the next tab or **Previous** to return to previous tabs

IMPORTANT. *If a value has been selected in the document for the dimension to be defined, the* ***Inherit from parent document*** *toggle is switched on and the dimension value selected in the parent document is shown as the default value. The user may decide not to inherit the value from the parent document by turning off the toggle and selecting a new value.*

Note. If the inherited parameter is the *Scenario* dimension and only one value is selected for this parameter in the document from which it is inherited, then it will be possible to select a *Reference Scenario* from those available (see Reference Scenario). To do so, click on **Show Options,** below the value of the inherited Scenario.

In the **Advanced** tab:

1. Choose **Document root** to format *Number*, *Percentage* and *Date* values with the formats defined in the document root
2. Choose **Source** (default) to keep the format of Numbers, Percentages and Dates defined on the source
3. Click **Insert** to add the table to the document, or
4. Click on **Previous** to return to previous tabs.

Adding a Table from Form as an Image

To add a table in the document whose area has been defined in a Form of CCH Tagetik as an image:

In the ***General*** tab:

1. Enter the **Name** of the object
2. Click on the **Object Type** dropdown and select *Table*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

In the ***Source*** tab :

1. Click CCH Tagetik
2. Select the application database from those available in the drop-down menu. The databases that can be selected are those associated with the user who logged in.

   Note: ***If an object has already been added to the document, the system displays the previously selected database as the default value.***

3. Click the Action button to select the **Form**
4. Select a **Sheet** from those defined for the Form
5. Select **the Area** from those defined for the Form

   Note*: If the selected form has no sheet/area defined, the system displays a message 'No sheet/area available'.*

6. Click on **Insert as image**
7. Inherit the *Format* and *Resolution* values defined in the document root, or
8. Turn off the **Inherit Format** toggle
9. Select an **Image Format** from: *JPEG*, *PNG*, *SVG*, *EMF* or *TIFF* ("SVG, TIFF, and EMF image formats are only supported by the Desktop application)
10. Select an **Image Resolution** from: *Low Resolution (150 ppi)*, Standard Resolution (300 ppi) or High Resolution (600 ppi) if a *JPEG or PNG* type format was selected as the image format

IMPORTANT *To maintain the style used in the image objects each time the document is updated, Tagetik Software S.r.l. has made available an extensive list of the most commonly used fonts. If you wish to use customised or licensed fonts that are not among those available, you can request their addition by following the procedure How to request the addition of fonts not available in the Application Server (Cloud users only).*

In the ***Parameters*** tab:

1. Click on the three dots for each mandatory parameter (*): this opens the panel allowing parameter selection

   Note: ***If the selected form has no parameters, the system displays the message 'There are no parameters for this form' and the user can move on to the next form.***

2. Select a hierarchy/grouping for the dimension to which the parameter refers
3. Select in the dimension tree a single element/node, or several elements/nodes (multi-selection is possible)
4. Click on **Confirm** to add the selected items and return to the ***Parameters*** tab
5. Click **Next** to go to the next tab or **Previous** to return to previous tabs

IMPORTANT If a value is selected in the document for the dimension to be defined, the "Inherit fr***om parent document"*** *toggle is switched on and the dimension value selected in the parent document is shown as the default value. The user may decide not to inherit the value from the parent document by turning off the toggle and selecting a new value.*

In the **Advanced** tab:

1. Choose **Document root** to format *Number*, *Percentage* and *Date* values with the formats defined in the document root
2. Choose **Source** (default) to keep the format of Numbers, Percentages and Dates defined on the source
3. Click **Insert** to add the table to the document, or
4. Click on **Previous** to return to previous tabs.

Adding a Table from Excel

To add a table whose area has been defined in an Excel file to the document:

In the ***General*** tab:

1. Enter the **Name** of the object
2. Click on the **Object Type** dropdown and select *Table*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

In the ***Source*** tab :

1. Click on **Microsoft Excel**
2. Select the desired external source Excel file residing on the SharePoint by navigating the menu **File**
3. Select the desired sheet from the **Sheet** menu options
4. Select the desired area from the **Area** menu options
5. **Note**: If the selected file has no sheet/area defined, the system displays a message*"No sheet/area available*".
6. Click **Next** to go to the next tab or **Previous** to return to previous tabs

In the **Advanced** tab:

1. Choose **Document root** to format *Number*, *Percentage* and *Date* values with the formats defined in the document root
2. Choose **Source** (default) to keep the format of Numbers, Percentages and Dates defined on the source
3. Click **Insert** to add the table to the document, or
4. Click on **Previous** to return to previous tabs.

Add a Table from Excel as an Image

To add a table whose area has been defined in an Excel file as an image to the document:

In the ***General*** tab:

1. Enter the **Name** of the object
2. Click on the **Object Type** dropdown and select *Table*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

In the ***Source*** tab :

1. Click on **Microsoft Excel**
2. Select the desired external source Excel file residing on the SharePoint by navigating the menu **File**
3. Select the desired sheet from the **Sheet** menu options
4. Select the desired area from the **Area** menu options

   Note*: If the selected file has no sheet/area defined, the system displays a message"No sheet/area available".*

5. Click on **Insert as image**
6. Inherit the *Format* and *Resolution* values defined in the document root, or
7. Turn off the **Inherit Format** toggle
8. Select an **Image Format** from: *JPEG*, *PNG*, *SVG*, *EMF* or *TIFF* ("SVG, TIFF, and EMF image formats are only supported by the Desktop application)
9. Select an **Image Resolution** from: *Low Resolution (150 ppi)*, Standard Resolution (300 ppi) or High Resolution (600 ppi) if a *JPEG or PNG* type format was selected as the image format

IMPORTANT *To maintain the style used in the image objects each time the document is updated, Tagetik Software S.r.l. has made available an extensive list of the most commonly used fonts. If you wish to use customised or licensed fonts that are not among those available, you can request their addition by following the procedure How to request the addition of fonts not available in the Application Server (Cloud users only).*

In the **Advanced** tab:

1. Choose **Document root** to format *Number*, *Percentage* and *Date* values with the formats defined in the document root
2. Choose **Source** (default) to keep the format of Numbers, Percentages and Dates defined on the source
3. Click **Insert** to add the table to the document, or
4. Click on **Previous** to return to previous tabs.

Add a Chart to the Document

Word Add-in > CCH® Tagetik Disclosureribbon bar > Objects > New

This procedure allows a Chart defined in a CCH Tagetik Form or in an external source (Excel file) to be added to the document.

1. Open the document in edit mode
2. Place the cursor in the section of the document where you wish to insert the object
3. Click on **New**: the **New object** window will pop up

Add a chart from Form CCH Tagetik

To add a Chart defined in a Form to the document from CCH Tagetik:

In the ***General*** tab:

1. Enter the **Name of** the object
2. Click on **Object** Type and select *Graph*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

In the ***Source*** tab:

1. Click on **Tagetik**
2. Select the application database from those available in the drop-down menu. The databases that can be selected are those associated with the user who logged in. If an object has already been added to the document, the system displays the previously selected database as the default value.**Note**: the **Copy Configuration** button can be used to paste the matrix configurations copied from the Excel add-in using the *Copy Area/Chart* utility.
3. Click on the three dots ⋮ to select the *Form*
4. Select a **Sheet** from those defined for the form
5. Select a **chart** from those defined for the selected form

   Note: If the selected form has no chart defined, the system displays a message "No chart available"

6. Click **Next** to go to the next tab or **Previous** to return to the previous tabs.

In the ***Parameters*** tab:

1. Click on Actions for each mandatory parameter (*): this opens the parameters selection panel

   Note: If the selected form has no parameters, the system displays the message "No parameters available for this form" and the user can move on to the next tab.

2. Select a hierarchy/grouping for the dimension to which the parameter refers
3. Select in the dimension tree a single element/node, or several elements/nodes (multi-selection is possible)
4. Click on **Confirm** to add the selected items and return to the ***Parameters*** tab
5. Click **Next** to go to the next tab or **Previous** to return to previous tabs

IMPORTANT. *If a value has been selected in the document for the dimension to be defined, the* ***Inherit from parent document*** *toggle is switched on and the dimension value selected in the parent document is shown as the default value. The user may decide not to inherit the value from the parent document by turning off the toggle and selecting a new value.*

Note. If the inherited parameter is the *Scenario* dimension and only one value is selected for this parameter in the document from which it is inherited, then it will be possible to select a *Reference Scenario* from those available (see Reference Scenario). To do so, click on **Show Options,** visible just below the value of the inherited Scenario.

Add a Chart from Form CCH Tagetikas an Image

To add a Chart defined in a Form from CCH Tagetik as an image to the document, the procedure is the same as that described for adding a Chart from a Form except that the user in the *Source* tab will have to

In the ***General*** tab:

1. Enter the **Name** of the object
2. Click on **Object** Type and select *Chart*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

1.

1. Click on **Insert as image**
2. Inherit the *Format* and *Resolution* values defined in the Root document (default value), or
3. Turn off the **Inherit Format** toggle **and:**
4. Select an **Image Format** from: *JPEG*, *PNG*, *SVG*, *EMF* or *TIFF* ("SVG, TIFF, and EMF image formats are only supported by the Desktop application)
5. Select an **Image Resolution** from: *Low Resolution (150 ppi)*, Standard Resolution (300 ppi) or High Resolution (600 ppi) if a *JPEG or PNG* type format was selected as the image format

IMPORTANT. To preserve the style used in image objects during each document update, a wide selection of the most commonly used fonts has been made available. If you wish to use customised or licensed fonts that are not among those available, you can request their addition by following the procedure described in 'How to request the addition of fonts not available in the Application Server'.

Add a Chart from Excel

To add a Chart defined in an Excel file:

In the ***General*** tab:

1. Enter the **Name** of the object
2. Click on **Object** Type and select *Chart*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

In the ***Source*** tab :

1. Select the desired external source Excel file residing on the SharePoint by navigating the menu **File**
2. Select the desired sheet from the **Sheet** menu options
3. Select the desired chart from the **Chart** menu options

   Note: If the selected sheet has no chart defined, the system displays a message "No charts available"

4. Click **Next** to go to the next tab or **Previous** to return to previous tabs

In the **Advanced** tab:

1. Choose **Document root** to format Number, Percentage and Date values with the formats
2. defined in the document root
3. Choose **Source** (default) to keep the format of Numbers, Percentages and Dates defined on the source
4. Click **Insert** to add the table to the document, or
5. Click **Previous** to return to previous tabs

Add a Chart from Excel as an Image

To add a Chart defined in an Excel file as an image, the procedure is the same as described for adding a Chart from Execl except that the user in the *Source* tab will have to:

1.

1.

   Click on **Insert as image**

2.

   Inherit the *Format* and *Resolution* values defined in the Root document, or

3.

   Turn off the **Inherit Format** toggle

4.

   Select an **Image Format** from: *JPEG*, *PNG*, *SVG*, *EMF* or *TIFF* ("SVG, TIFF, and EMF image formats are only supported by the Desktop application)

5.

   Select an **Image Resolution** from: *Low Resolution (150 ppi)*, Standard Resolution (300 ppi) or High Resolution (600 ppi) if a *JPEG* or *PNG* type format was selected as the image format

IMPORTANT. To preserve the style used in image objects during each document update, a wide selection of the most commonly used fonts has been made available. If you wish to use customised or licensed fonts that are not among those available, you can request their addition by following the procedure described in 'How to request the addition of fonts not available in the Application Server'.

Adding an Amount in the Document

Word Add-in > CCH Tagetikribbon bar > Objects > New

Depending on the data source of the value associated with the amount, this procedure allows one of the following types of **Amount** objects to be inserted into the document:

- **Amount from Tagetik database**
- **Amount from Excel file**
- **Amount from Tagetik Form**

IMPORTANT. It is not possible to nest updatable objects. For example, if an attempt is made to insert a *Dimension Attribute* object type within a *Table or Rich Text* object , the operation will be prevented and the user will be notified of the failed entry.

Below are the procedures to be followed based on the different types of object.

Prerequisites

Before inserting an **Amount** object, the following steps must be performed:

1. **Open the document in edit mode.**
2. **Place the cursor** in the section of the document where you wish to insert the object.
3. Click **New**: the **New Object** panel pops up.

In the *General* tab:

1. Enter the **Name** of the object
2. Click on Object **Type** and select *Amount*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

Adding an Amount from Database CCH Tagetik

This procedure allows you to add an Amount using the database as a source CCH® Tagetik

1. Open the document in **edit** mode
2. Place the cursor in the section of the document where you wish to insert the object
3. Click on **New**: the *New object* window will pop up

In the ***Source*** tab:

1. Click Tagetik Software S.r.l.
2. Select the Application Database from those available in the drop-down menu. Visible Databases are those associated with the authenticated user.**Note.** **Note**: if an object has already been added to the document, the system displays the previously selected database as the default value.

   *The system displays the **Financial** option as selected by default, and the user can proceed by :*

1. Selecting one or more values for each of the three dimensions required to identify the Amount (Scenario, Account, and Period).
2. Clicking on the three dots next to the dimension to configure the dimension, specifically:

- Click **Select From**; the system displays the **Size Grouping** and the list of **Groupings/Hierarchies** defined for the dimension

- Select the desired **Grouping/Hierarchy**. The system will display the list of dimension values belonging to the Grouping/Hierarchy
- Click a single value or a value node by navigating the results list, or use the Search bar to make a quick selection (multi-selection is supported)

1. Click **Add Dimension** and repeat the previous steps for each dimension to identify the Amount, or
2. Click **Next** to go to the next tab

After selecting the **Analytical** option, the user can:

- Select the Workspace and Dataset in which specific numerical measurements are available
- Amount

After selecting the *Next* button, the system displays the Parameters tab which contains the parameters required to retrieve the amount value related to the partition entered in the Dataset.

Note: If a value has been selected in the document for the dimension to be defined, the **Inherit from parent document** toggle is switched on and the dimension value selected in the parent document is shown as the default value. The user may decide not to inherit the value from the parent document by turning off the toggle and selecting a new value.

- If a value has been selected in the document for the dimension to be defined, the **Inherit from parent document** toggle is switched on and the dimension value selected in the parent document is shown as the default value. The user may decide not to inherit the value from the parent document by turning off the toggle and selecting a new value.
- If the inherited parameter is the Scenario dimension and only one value is selected for this parameter in the document from which it is inherited, then it will be possible to select a Reference Scenario from those available (see Reference Scenario). To do so, click on Show Options, below the value of the inherited Scenario.

In the ***Advanced*** tab:

1. Select the format type by choosing either **As number (default)** or **As percentage**
2. Turn on the **Inherit Format** toggle to format the number/percentage according to the formats defined in the document root, or
3. Select a **Default** format from the options available in the drop-down menu, or define a **Custom** format, making sure to follow international conventions that use the period "." as decimal separator and the comma ',' as thousand separator. The character used to separate thousands or decimals will be converted according to the language of the document.
4. Click **Insert** to add the Amount to the document, or
5. Click on **Previous** to return to previous tabs.

Note. Once the data entry process is complete, the amount will appear in the document with the same formatting as the paragraph where it was entered.

Customized format

A customised numeric and/or percentage format can be created using an 'identifier' to define the formatting of the data. Some examples are provided below:

- use the numeric format identifier #,##0 'ths' or #,##0 'mills' to obtain values in thousands and millions;
- use the numeric format identifier '-'. It can be used to replace the numeric value zero with this output format. The format identifier '-' placeholder zero replaces the zero with the corresponding identifier; otherwise, the zero is displayed as the result.

Adding an Amount from Tagetik Form

This procedure allows you to add an Amount using data from a Tagetik Form.

In the *Source* tab :

1. Click on **CCH Tagetik Form**
2. Select the **Application Database** from those available in the drop-down menu. Visible Databases are those associated with the authenticated user.

   Note: If an object has already been added to the document, the system displays the previously selected database as the default value.
3. Click on the three dots next to **Form** and select the form in which the amount to be entered in the document was defined, specifying:
   - The name of the **Sheet,** and
   - the **Cell,** meaning the position of the amount in the form, specified by row and column format
4. Click **Next** to go to the next tab
5. Click on Previous to return to previous tabs.

In the *Advanced* tab:

- Click on **Document root,** to apply the formatting of the amount according to the settings defined in the *Document Root*
- Click on **Source,** to apply the formatting of the amount according to the settings defined in the *Source*

In the *Advanced* tab:

IMPORTANT: The character used to separate thousands or decimals will be converted according to the language of the document.

1. Click **Insert** to add the Import into the document, or
2. Click on **Previous** to return to previous tabs.

IMPORTANT: once the data entry process is complete, the amount will be displayed in the document with the same formatting as the paragraph where it was inserted.

Adding an Amount from Excel File

This procedure allows you to add an Amount using data from an Excel file.

In the *Source* tab :

1. Click on ***Microsoft Excel***
2. Click on ⋮ to browse the folders in the SharePoint site dedicated to the application, then select **The excel file has been uploaded**
3. Configure the following details:
   - **Sheet,** expand the drop-down menu and select the excel sheet
   - **Area**, expand the drop-down menu and select the area containing the amount to be added, or
   - **Custom selection**, specify the column row containing the amount to be added
4. Click **Next** to go to the next tab

In the *Advanced* tab:

- Click on **Document root,** to apply the formatting of the amount according to the settings defined in the *Document Root*
- Click on **Source,** to apply the formatting of the amount according to the settings defined in the *Source*
- *Default*

***IMPORTANT**: The character used to separate thousands or decimals will be converted according to the language of the document.*

1. Click **Insert** to add the Import to the document, or
2. Click on **Previous** to return to previous tabs.

IMPORTANT: once the data entry process is complete, the amount will be displayed in the document with the same formatting as the paragraph where it was inserted.

Adding a *Dimension Attribute* to the Document

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > Objects > New

This procedure allows an attribute, i.e. a textual expression from the CCH Tagetik database (e.g. code, company name, etc.) to be added to the document.

1. Open the document in edit mode
2. Place the cursor in the section of the document where you wish to insert the object
3. Click on **New**: the **New object** window will pop up

In the ***General*** tab:

1. Enter the **Name** of the object
2. Click on Object **Type** and select *Attribute Dimension*
3. Insert **additional information** if necessary
4. Click **Next** to go to the next tab

In the ***Source*** tab:

1. Select the Application Database from those available in the drop-down menu. The databases that can be selected are those associated with the user who logged in.

   ***Note**: If an object has already been added to the document, the system displays the previously selected database as the default value.*

2. Select the **dimension** from those available in the drop-down menu or type the first three characters of the dimension to be searched for (code or description) into the search bar to make a quick selection

   ***Note**: The Search functionality is supported by version 5.3.29.0 and later.*

3. Select **the Attribute** from those available for the chosen dimension
4. Click **Insert** to add the attribute to the document, or
5. Click **Previous** to return to previous tab

***IMPORTANT: Scenario** and **Period** must be selected for the **Currency** dimension to enter the attributes **Average Fx rate**, **Final FX rate**, **Period FX rate**.*

IMPORTANT: It is not possible to nest updatable objects. For example, if an attempt is made to insert a Dimension Attribute object type within a Table or Rich Text object , the operation will be prevented and the user will be notified of the failed entry.

Adding a Free Object to the Document

Word Add-in > CCH TagetikRibbon bar > Objects > New

This procedure allows a *free object* to be added to the document.

1. Open the document in edit mode
2. Place the cursor in the section of the document where you wish to insert the object
3. Click on **New**: the **New object** window will pop up

Adding a Checkbox

1. Enter the **Name** of the object
2. Click on Object **Type** and select *Checkbox*
3. Insert **Additional Information** if necessary, and
4. Click on **Insert**

Add Text

1. Enter the **Name** of the object
2. Click on Object **Type** and select *Text*

Add Free Text

In the **General** tab:

1. Select **Free Text**
2. Click **Insert** to insert a Free Text into the document

***Note**: Other objects such as **Imports**, **Dimensional Attributes**, etc. can be inserted within the free text. If a **Table** is inserted in-line with the text, it will be placed in the next paragraph to avoid loss of formatting.*

Add Formatted Text CCH® Tagetik

***IMPORTANT**: This functionality is supported by version 5.3.29.0 of CCH® Tagetikand later.*

In the **General** tab:

1. Select **CCH® Tagetik Formatted Text**
2. Click **Next** to go to the next tab

In the **Source** tab :

1. Select an **Application Database** from the drop-down menu
2. Select an **Analytical Workspace** and
3. Select one of the **Datasets** defined for the selected *Analytical Workspace*
4. Select the **Rich Text** to be added
5. Click **Next** to go to the next tab

In the **Parameters** tab:

1. Select a value for each **Dimension** used in the dataset
2. Click **Insert** to insert the **Rich Text** into the document

***IMPORTANT**: Rich Text can only be updated if the external source (Rich Tex Endpoint) where the rich texts will be saved has been defined for the Application Database selected when inserting the object. For further details see Rich Text Endpoint.*

Add a Dropdown

In the **General** tab:

1. Enter the **Name** of the object
2. Click on Object **Type** and select *Dropdown*
3. Insert **Additional Information** if necessary, and
4. Click **Next** to go to the next tab

In the **Source** tab :

1. Specify in the **Display name** box the value to be used as the list item
2. Specify in the **Value** box the value to be stored if a user selects this item in the document object
3. Click **Add Item** to add another value to be used as a list item and repeat steps 1 to 2 for each item to be added to the list

   ***Note**: There must be at least two items to be displayed in the list. Only after adding an item to the two default ones will it be possible to delete one of them.*

4. Click on **Insert**

***IMPORTANT**: The list items will be displayed in the document Dropdown in the same order as specified in the **Source** tab. However, it is possible to change the display order by placing the cursor on the icon, holding down the mouse button and dragging the item to the new position.*

Display the document objects list

Add-in Word CCH® Tagetik Disclosure ribbon bar > Objects > Objects List

Purpose of the page

This page displays the list of all objects in the open document, and allows the user to update objects reading from external sources (Tagetik and Excel). The order in which objects are displayed in the list is the order in which they are inserted into the document, and a single click on the object in the list shifts the focus to the document where the object was inserted.

Object Types

Object type	Description
Table	It represents a table retrieved from a form of Tagetik Software S.r.l. or from an external source (excel file on SharePoint) and is displayed in the document as a Word table.
Chart	It represents a chart retrieved from a form of Tagetik Software S.r.l. or from an external source (excel file on SharePoint) and is displayed in the document as a Word chart.
Check box	Word check-box
Drop down	Drop down of Word.
Text	The Text type object can be: • **Free Text.** Free text and/or number • **Rich Text.** Represents the configured text field as formatted and defined in the dataset selected when inserting the object
Amount	It represents a value retrieved from the CCH Tagetik database or from an external source (excel file on SharePoint) and is displayed in the document as a number.
Dimensional attribute	It represents a value retrieved from the CCH Tagetik database (description, attribute, etc.) and is displayed in the document as a text expression.

Buttons on the page

Button	Description
Available updates	Opens the *Available Updates* tab showing the list of document objects that can be updated.
Change tracker	Opens the *Change tracker* tab of the object where all changes made to the object are tracked. For further details see Keeping track of changes

Cut, Copy and Paste Object

When you need to copy an object several times or move an object already inserted elsewhere in the same document, you can use the **Copy**, **Cut** and **Paste** actions, available in the CCH Tagetik Ribbon bar, in the *Object Management* section.

Note: Several objects can be selected at the same time to copy or move them in the document, and the selection can also include portions of text. In the following, the Copy, Cut and Paste object procedures also apply in the case of several selected objects.

Copy and Paste Object

CCH Tagetik ribbon bar > Object Management > Copy
This procedure is useful for duplicating an existing object within the same document.

1. To select the object to be copied, click on the object in the open document to highlight its selection box
2. To copy an object, click on the icon : the *Copy* tab opens, informing the user that the object has been copied successfully
3. Place the cursor where you want to insert the new object.
4. To paste the copied object, click on the icon : this opens the *Edit* tab where the user can modify the configurations of the new object. The **displayed name** of the new object will be the same as the copied object plus the suffix '_COPY'

   Note: the **Paste** icon can only be used after clicking *Copy and/or Paste*.

At the end of the paste operation, the new object:

- will be visible in the document at the position indicated by the cursor
- will be updated with the latest data from the source
- will be visible in the object list at the position where it appears in the document

IMPORTANT: Some restrictions on *Paste Object* functionality.

- The paste function can only be used within the same document where the copy was made
- It is not possible to perform the paste operation within a Content Control of an object or of a document part
- Document parts cannot be copied or cut

Cut and Paste Object

CCH Tagetik ribbon bar > Object Manager > Cut
This procedure is useful for moving an existing object within the same document.

1. To select the object to be moved, click on the object in the open document to highlight its selection box
2. To cut the object, click on the icon : the object will be removed from the document
3. To paste the copied object, click on the icon .

Keeping track of changes

Introduction

Working in auto-save mode on documents, all changes made to the document and objects are automatically shared with all users working on the document; therefore, no updates need to be saved when changes are made.

In order to keep track of all the changes (edits, deletions, additions and moves) made to the text of the document by the users working on it, it is possible to activate Word's Review function.

Changes on objects, on the other hand, are always recorded. To view all changes made by users to objects in the document, you can use the Changes panel.

***IMPORTANT**: The change tracker functionality is currently run in preview mode on Microsoft Azure.*

Display changes to an object

To access the changes panel of an object, you need to open the 'Object List' panel of the document and, for the object whose changes you wish to view, click on the icon  ; the object's changes panel will open and show a list of cards sorted by date representing the changes made to the object over time by one or more users.

Types of changes

The changes panel keeps track of all changes made to the object, including deletion and restoration. In the list of changes to an object, each card represents an action made on the object (addition, modification, deletion, etc.). Each change will be displayed in a different colour (blue for additions, orange for changes and red for deletions).

> ***Note.** The delete action will only be displayed when the user restores the document from SharePoint to a version in which the object was present.*

Using the change panel

From the changes panel of an object, expanding a card will display additional information, such as who made the change and when. For each card, you can click on the arrow to access the details of the change. Each card will display different information depending on the type of object. For all objects, each card will display the following information:

Word Add-in >CCH Tagetik> ribbon bar > Object List > Track Change icon

- **Date and time** when the change was made
- **Type of** change
- **User** who made the change
- **Current Value and Previous Value (only in case of changes).** For all objects, general information such as *Name*, *Type* and any *additional information* will be displayed. In addition to this general information, depending on the type of object, it will be possible to have further details about the change. For example, in the case of a Tagetik table object, information on the data source (*Application, Form, Sheet, etc.*), any parameter values selected, and inherited formatting *(from Source or Document root*) will be displayed.

Managing Objects

Modifying objects

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > Objects > Edit

This procedure allows all the information associated with the object to be changed, with the exception of the **Object Type** and **Source Format** (CCH Tagetik or Microsoft Excel).

1. Click **Edit**
2. Insert changes
3. Confirm changes with **Save**

***IMPORTANT**: This procedure allows you to make an object a **Component** by turning on the **Component** toggle, located at the top right of the **General** tab. Exceptions are **Checkbox**, **Dropdown** and **Free Text** objects.*

***IMPORTANT**: the formats and resolution of image objects and the formats of amount objects, if inherited from the document, may only be changed after deactivating the **inheritance** toggle*

For further details on **Components** and **Component Instances**, see Reference between Objects

Deleting Objects

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > Objects > Delete

This procedure allows an object to be removed from a document.

1. Click **Delete**
2. Confirm cancellation

   ***Note**: If not confirmed, the object will be displayed again in the **General** tab.*

Adding an object to the document

This page describes how to add an object to the document. The types of objects that can be added in the document are:

- Checkbox
- Free text
- Dropdown
- Attribute dimension
- Amount
- Table
- Chart

Sequence of procedures to add an object to the document

1. "Define Object Source (only for objects reading from Tagetik database or Excel file)" below
2. Define the Source of the object
3. " Define Object Parameters (only for objects reading from Tagetik Form)" below
4. "Defining Advanced Settings" on the facing page

Define the General Information of the object

Word Add-in > CCH TagetikRibbon bar > Objects > New > General

1. Open the document in which you wish to insert the object
2. Click on **New**: the ***New object*** window will pop up
3. Define *Object Name*, *Object Type* and enter any *additional information*
4. Click **Next** to go to the next tab

Define Object Source (only for objects reading from Tagetik database or Excel file)

Word Add-in > CCH TagetikRibbon bar > Objects > New > Source

1. Specify the source from which to retrieve numerical data from Tagetik's database and/or attached files
2. Specify all the information required to retrieve the numerical data to be entered. This information varies depending on the object to be added
3. Click **Next** to go to the next tab

Define Object Parameters (only for objects reading from Tagetik Form)

Word Add-in > CCH TagetikRibbon bar > Objects > New > Parameters

1. Click on the three dots for each mandatory parameter (*): The panel opens showing the dimension on which the parameter was defined.
2. Select a node/lowest level element for the dimension from a Flat list or hierarchy
3. Click on **Confirm** to confirm your selection or **Cancel** to cancel it and return to the *Parameters* tab
4. Click **Next** to go to the next tab

Note. It is not necessary to specify any dimension value for parameters that are not mandatory.

Defining Advanced Settings

Word Add-in > CCH TagetikRibbon bar > Objects > New > Advanced

1. Choose the format to be applied to the numerical values of the object
2. Select a format from those available or define a custom one
3. Click on **New**: the ***New object*** window will pop up
4. Define *Object Name*, *Object Type* and enter any *additional information*
5. Click **Next** to go to the next tab

Editing and deleting an object

Sequence of procedures for modifying an object

The following procedures describe how to edit and delete an object in a Tagetik document

1. Modifying a Checkbox or Free Text
2. Modifying a Dropdown
3. Modifying an Attribute Dimension
4. Modifying an amount
5. Modifying a table or chart
6. Deleting an object

Modifying Checkbox or Free Text objects

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > Objects > Edit*

1. Select a Checkbox or Free Text object in the document
2. Click **Edit**: this opens the ***Edit Object*** tab from where you can:
3. Click **Delete** to delete the Checkbox or Free Text object from the document
4. Change the name
5. or edit the additional information
6. Click **Save** to save the changes just made 'Edit object completed'

Modifying a Dropdown Object

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > Objects > Edit*

1. Select a dropdown object in the document
2. Click on **Edit**: the ***Edit Object*** tab opens:
3. Click the ***Delete*** button to delete the dropdown object from the document
4. Change the name
5. or edit the additional information
6. Click **Save** to save the changes just made for General information only
7. Click on the **Source** Tab to edit the Name and Value fields or delete a row by selecting the bin
8. or click **Add Item** to add a new row
9. Insert name and value in the mandatory fields
10. Click ***Save*** to save the changes made to the source data as well

Edit an Attribute Dimension object

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > Objects > Edit*

1. Select an Attribute Dimension object on the document
2. Click **Edit**: the ***Edit AttributeDim*** tab opens where you can:
3. Click **Delete** to delete the Attribute Dimension object from the document
4. Click on the **Update** enabled button to update the data where server-side changes have been made
5. Change the name
6. or edit the additional information
7. Click **Save** to save the changes just made for General information only
8. Click on the ***Source*** Tab to display the source fields filled in
9. Click on ***Application*** to select another database if the user has other associated DBs
10. Click on ***Dimension***
11. Select another dimension from the List shown by the system other than the one chosen previously

12. Click on the Dimension field just added by the system
13. Choose an item from the hierarchy or Flat list eg. **Entity - New York** or more than one element
14. Click the ***Attribute*** Dropdown
15. Select another attribute from the list displayed by the system
16. Click the ***Save*** button to save the changes made for the Source Tab as well

    Note *if the user has added or wants to add a Currency dimension and selects the following Attributes from thedropdown Attribute → Average Fx rate - Final FX rate and Period FX rate the system adds Scenario & Period as mandatory dimensions to be filled in/edited to finalise the object entry.*

Modifying an amount object

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > Objects > Edit*

1. Select an Amount object on the document
2. Click on **Edit**: the ***Edit Amount*** tab pops up where you can:
3. Click **Delete** to remove the Amount object from the document
4. Click on the **Update** enabled button to update the data where server-side changes have been made
5. Change the name
6. or edit the additional information
7. Click **Save** to save the changes just made for General information only
8. Click on the ***Source*** Tab to display the source fields filled in

In the case of an amount added from a database - the **Format** *as* field set to Tagetik:

9. Click on the ***Application*** dropdown to select another database if there are other DBs associated with the user
10. Click on the ***Account*** field
11. Choose an item from the hierarchy list dropdown e.g. **Account - Default view | Balance sheet** or more than one item
12. Select the ***Confirm*** button to return to the previous page by adding the item(s)
13. or the **Cancel** button to not confirm and return to the previous screen
14. Click on the **Scenario** field
15. Choose an item from the hierarchy list dropdown e.g. **Scenario - 2022 Budget** or more than one item
16. Select the ***Confirm*** button to return to the previous page by adding the item(s)
17. or the **Cancel** button to not confirm and return to the previous screen
18. Click on the **Period** field
19. Select only one item from the flat list e.g. **10 - October**
20. Select the ***Confirm*** button to return to the previous page by adding the item
21. Click on the ***Insert*** button to insert the Amount object in the document

If you want to add a new dimension, click on **Add Dimension** and select an item from the list shown by the system

- Click on the newly added dimension field
- select the item(s) from the hierarchy or flat list and select the **Confirm** button to add the item

In the case of an amount added from an external source (excel file on Sharepoint) - the **Format as** field is to be filled in with *Excel*:

9. Click on **File** to select another external source from Sharepoint
10. Click **Sheet** to select a sheet from the external source file
11. Select the **Select Area** option and then click on **Area** to select the area or select the **Custom Selection** option and indicate the cell containing the amount in the Cell field

22. Click on the **Advanced** tab to reach the second Advanced 3/3
23. The user can change a previously chosen value as Number or Percentage, switch between the two Formats

24. Enable or disable the Inherit Format toggle to maintain or not maintain inheritance from the document formatting.
25. Click on **SAVE** at the bottom right of the side panel, and the System will update:
    - only Metadata (if it only the Object Name was edited)
    - Metadata and Refresh (if Object Name and/or Additional info and/or Dimensional values were edited)

Modifying a Table Object

Word Add-in > CCH® Tagetik Disclosure *ribbon bar* > *Objects* > *Edit*

1. Select a table object in the document
2. Click on **Edit**: the ***Edit Table*** tab pops up where you can:
3. Click **Delete** to remove the table object from the document
4. The **Data** and **Style** toggles are always displayed as active by the system
5. If the user selects the **Update** enabled button and the **Data** and **Style** toggles are enabled, the System will launch an update while maintaining the Manual overrides, otherwise the Table will be updated without maintaining them
6. Change the name
7. or edit the additional information
8. Click **Save** to save the changes just made for General information only
9. Click on the ***Source*** Tab to display the source fields filled in

In the case of a table added from a database - the **Format As** field is to be valued with *Tagetik*:

9. Click on ***Application*** to select another database if the user has other associated databases
10. Select the ***Table*** Object
11. Insert additional information (optional)
12. Click the enabled ***Next*** button to reach the second Source Tab 2/4
13. Click on ***Application*** to change Database (set by default if only one DB is associated with the user)
14. Click on the **Form** field
15. Select another Form defined under folder and saved on the previously selected Database
16. If the selected form has no sheet/area defined, the system displays a message 'No area available'.
17. Click on **Sheet**
18. Select another available option from the list
19. Click on **Area**
20. Select another available option from the list
21. Click on the **Parameters** Tab to access the third Parameters Tab 3/4

    - If the table does not have any parameters set, the system displays the message "No parameters available for this form" and the user can choose whether to return to the previous screen by selecting **Previous** or select the **Next** button again to go to the last formatting step.
    - If the Table has previously set Dimensional Parameters, the System displays the dimensions already filled at the creation stage, the user can either click on a dimension and choose another one by enabling the **Save** button, or decide to keep the parameters and go to the Advanced Tab.
    - If the table has previously set Non-Dimensional Parameters (such as Data, Text, Dictionary, Flag, Numerical) the user can click on the three dots ⋮ of one dimension and choose another and select **Confirm**, otherwise they can decide to keep the parameters and go to the Advanced Tab.

Note the mandatory parameters have an asterisk and if you choose Account - scenario - period as a parameter, these are always set as mandatory.

In the case of a table added from an external source (excel file on Sharepoint) - the field **Format as** filled with *Excel*:

9. Click on **File** to select another external source from Sharepoint
10. Click **Sheet** to select a sheet from the external source file
11. Click on **Area** to select the area of the table of interest

22. Click on the **Advanced** Tab to access the fourth and last Advanced Tab 4/4
23. Change the formatting by selecting the desired option:
24. **Document root** - the Table will be inserted and formatted according to the settings declared when creating the Document in the ADVANCED section under Document Structure.
25. **Source** (selected by default) the System displays the Formatted Table according to the one in CCH Tagetik excel with the same Formatting.
26. or the user may leave the option unchanged
27. Click on the '**SAVE**' button at the bottom right of the side panel and the System will update:
    - only Metadata (if it only the Object Name was edited)
    - Metadata and Refresh (if edited Object Name, Sources, Parameters and Formatting)

Deleting an object

Word Add-in > CCH® Tagetik Disclosure *ribbon bar* > *Objects* > *Edit*

1. Select an object on the document
2. Click **Edit**: the ***Edit Object*** tab pops up
3. Click ***Delete*** to delete the object from the document
4. To confirm deletion, press the **yes** command shown by the system

Export object list

The object list export feature allows the user to check all the information related to the objects in a document and all linked parts. The 'Export Object List' option is available from the structure panel of an open document after selecting the three dots.

Note: If the user starts processing a document where no objects are present, the system returns an error message informing the user that there are no objects in the hierarchy.

If there is at least one object in the hierarchy, the system processes the file in xlsx format and if a document in the structure has no object, it is not listed.

Exported Object List Information

- Document: name of the document where the object is present
- Object type: type of object
- Object name: the name of the object defined during insertion
- Object additional information : additional information
- Keep manual overrides on date: true/false depending on whether toggle is on or off
- Keep manual overrides on style: true/false depending on whether toggle is on or off
- Source: The source where the object is retrieved from
- Application: the database in which the object is present
- Analytical Workspace: N/A for all objects except for Financial Amount
- Data configurations: N/A for all objects except for Financial Amount
- Rich text: N/A for all objects except for Rich text object, for which the exact value is displayed
- File/format: Name of the form in the database
- Sheet: the name of the excel file sheet where the object is present
- Area/cell: the name of the excel file area where the object is located
- Dimensions/parameters: names of dimensions or parameters configured during creation

- Attribute dimensions: N/A for all objects. Populated only if the object is Attribute Dimension object type with name
- Component: N/A when the object has only been added, True if the user has enabled the button, False if the user has disabled it
- Instance: N/A for all objects, True if object is an instance of a component object
- Reference Instance: the name of the object and the file where the object is located are displayed
- Lock: True if the object is locked by the user, false if it is unlocked and available to all users

Note: The message 'Inactive Object' appears when the object is no longer active

Important: Make sure that the document's autosave option is enabled before starting the data processing, so that all information aligned to the document is exported.

Export Object List

The 'Export Objects' option allows the user to view all active objects within the entire structure. These objects are listed in an Excel file that is saved to the user's personal computer.

When a user opens the Tagetik document, navigates to its structure by selecting the three dots next to the relevant document, and clicks the 'Export Objects' option, the system—once data processing is launched—checks whether objects are present throughout the entire structure, including linked part documents

Note. If no objects are present in the structure, the system stops processing and displays a warning message informing the user that no objects are available.

If, on the other hand, the system finds at least one object in the structure when data processing is launched, the process starts and an Excel file is downloaded locally. The files contains references to the object and the document in which it is located.

There are two cases in which the object is not shown in the exported file:

1. If an object is available in the DataBase and not in the Document
2. If an object is available in the document but not in the DataBase

When an object is available in the document but is no longer active e.g. (the document is restored to another version and the object's status has changed) the exported file displays the entry 'Inactive Object' in the last column."

IMPORTANT: After manually editing object values, make sure that the document has completed saving the changes and its status is Saved before exporting the object list. If the document is still being saved, any changes will not be reflected in the exported excel file.

Reference scenario

Introduction

Together with the period, the scenario represents the time dimension of Tagetik. The scenario is used to insert data such as amounts, journals and consolidation data. For each scenario, the 'previous scenario' and the 'next scenario' can also be defined in order to perform all closing and carry forward journals across two fiscal years. Moreover, the scenarios can be associated with one another through the definition of five scenarios called 'reference scenarios'. This correlation is useful for:

- comparing data in current, previous and following scenarios, according to a time-based logic.
- comparing budget data or forecasts against actual data, for example during the reporting phase.

Intelligent Disclosure and Reference Scenario

To simplify the updating and management of complex documents, Intelligent Disclosure allows the selection of a **Reference Scenario** as a parameter for Tagetik data source objects. In such objects, in order to use the **Reference Scenario** as the parameter value, it is necessary that:

- the *Scenario* parameter is an object parameter
- the *Scenario* parameter is inherited from the document ("*Inherited from document*" button on)
- the inherited Scenario parameter has only one value defined on the document

When both conditions are met, you can decide to select a **reference Scenario** of the inherited Scenario and update the document object based on the chosen reference. The objects from CCH Tagetik for which a reference scenario can be defined are: *Chart Table*, *Amount* and *Rich Text*. The Reference Scenario management function is available from the *Parameters* tab by opening the objects in *Edit* mode

The ability to select a **Reference Scenario** greatly simplifies document analysis and update tasks, and is particularly useful during the roll-forward process when moving from one year to the next. Using a reference scenario allows you to:

- automatically apply filters consistent with the year or version of the document
- minimise manual intervention when creating a copy of a document
- make sure that all objects reading data from CCH Tagetik point to the correct scenario

Let's look at an example to better understand how the **Reference Scenario** works.

> ### Example
>
> Let's assume that our document contains two table objects: **"Current year table"** and **"Previous year table"**, both using a data source from **Tagetik form**.
>
> Table objects **inherit the value of the Scenario from the document**. Specifically, a **Reference Scenario** with the value **Previous** has been defined on the 'Previous year table', since the goal is to compare the data of the current scenario with those of the previous scenario
>
> When preparing the document for the **new fiscal year**, the user performs a **Roll Forward** of the current document, specifying the **new Scenario value.**
>
> For example, if the Scenario in the source document is *'FY2026', then 'FY2027*' will be set as the new Scenario value during Roll Forward.
>
> At the end of the Roll Forward, the user will first **align** and then update the **copied document.**
>
> In this way, the data in the tables will be updated according to the **new Scenario** and the **reference** that is dynamically attached to the inherited Scenario, without the user having to open and modify each individual object.
>
> For example:
>
> - if the Document Scenario is '*FY2026*', the '**Previous**' reference will automatically point to '*FY2025*';
> - if the Document Scenario is '*FY2027*', the '**Previous**' reference will automatically point to '*FY2026*'.

Important. In cases where the *Scenario* is defined as a mandatory parameter and the value of the **Reference Scenario** can no longer be retrieved — for example because the inherited *Scenario* is no longer available or because the *Scenario* parameter inherits more than one value — the object cannot be updated and the system will display an error message.

How to select the Reference Scenario

Word Add-in > CCH Tagetik*ribbon bar > Objects > Edit*

This procedure allows a **Reference Scenario** to be selected from the *Edit* panel for a document object that inherits the value of the scenario parameter from the document itself.

1. Open the document
2. Select the object for which a **Reference Scenario** is to be defined and click on **Edit** in the ribbon
3. Select the *Parameters* tab and then click on **Show Options** (only visible if only one value has been defined for the inherited Scenario)

4. Select a **Reference Scenario** from those available for the inherited scenario value (hovering over the selected value displays the value of the reference scenario)
5. Save

After saving, the document object will be updated according to the selected **Reference Scenario** .

Reference between objects

When using a document, one may need to refer to another object, such as a **table** located in another page or in another **document**.

This is when the concept of reference between objects comes into play. The idea is to use a **Component** as a data source for other objects called **Component Instances.** This ensures that any changes to the original data are automatically reflected in all instances, thus keeping the information consistent.

For example, if the numbers or style of the source table change, all references to that table will update accordingly. This inter-object reference system helps maintain data consistency across multiple documents, ensuring that the final numbers remain identical regardless of the document being worked on.

Contents

This section covers the following topics:

- How does reference between objects work?
- Components and Component Instances
- Table Reference (Example: Creating a reference between tables)
- Updating and Deleting an Instance
- Instance Formats

How does reference between objects work?

In an ID document, it is possible to refer to the content of an object from other documents and thus keep the information consistent across all files. The objects representing the data source are the Component objects, i.e. they are the root from which all other instances of that data come from. Instances of such information, i.e. objects whose data comes from another object, are Component Instances.

Components and Component Instance

Objects that can become Component and can therefore be instantiated by other objects in the same or other documents are:

- Table and Chart (from form or excel)
- Rich Text
- Amount (from form or excel)
- Dimension Attribute

Components are marked with a visible indicator when entering object editing and in the Object List. Component Instances are marked with the indicator.

Table Reference

The example below shows the steps to follow in order to insert a Component Instance object whose reference is a Component object of Table type into the document. This procedure is valid for all types of component objects.

Example: Creating a reference between tables

After adding a table to the document, it is possible to create an instance of it.

To make the table a Component:

1. Select the table in the document
2. Click Edit on the toolbar. The table editing panel pops up
3. Switch on the Component button and click **Save**

To create an instance of such a component:

1. Open the document in which the instance is to be inserted
2. Click on **New Object** in the toolbar. The New Object panel pops up
3. Enter Object **Name**
4. Select the Component Instance in the Object Type list. The component selection tab opens, showing a list of all component objects, the type of data source (Table, Chart, etc.), the name of the component object, and the name of the document in which it is inserted.
5. Select a component from the list and click **Select**. The General tab pops up, displaying information on the instance being entered:
   - Instance object name
   - Object and document name of the selected component
   - Additional Instance Information

6. Click Insert, or

Click on Object Type and select Component Instance again to return to the component list and select a new component

After successfully entering the instance, the content of the selected component object will be displayed inside the document, and the information of the instanced object will be shown in the instance tab, read-only and divided into several tabs according to the type of component object.

Note: In cases where manual data and/or style overrides have been made on the component, these overrides will also be kept in its instance, whereas any overrides applied to the instance will be overwritten at the end of the update.

***IMPORTANT**: If a Component object no longer exists because it has been deleted or because it is no longer defined as a component, the instance that referenced it can no longer be updated. In this case, the instance can be deleted by entering object edit mode.*

Updating and Deleting an Instance

A component instance can be updated or deleted by opening the object in edit mode and using the Update and/or Delete buttons.

Both actions only affect the instance object and not the instantiated components. Updating Component Instances can only be done through a single object update and is excluded from multiple and recursive updating.

Instance Formats

The formats of numbers, percentages and dates that in Components are inherited from the Data Source, will also be applied in the same way in Component Instances.

Whereas, formats that are inherited from the parent document in the Components will not be applied to the instances, but, in such cases, the instances will inherit the formats from their parent document.

Note. Even for those formats that follow different conventions in different languages, the document language will be that of the instance and not that of the component.

Update document objects

Word Add-in CCH® Tagetik Disclosureribbon bar > Objects > Edit

This procedure allows you to update an object inserted into the open document which reads from an external source (Tagetik and Excel).

1. Open the document
2. Select the object to be updated and click **Edit** in the multifunction bar
3. Click **Update** in the edit object panel

   ***Note**: the user will be notified of the completion and outcome of the update, and the system will replace the data present in the document that has just been successfully updated. In case of errors/warnings, a link will be provided to access the error details panel.*

Word Add-in CCH® Tagetik Disclosureribbon bar > Objects > Objects List

This procedure allows you to update objects present in the open document which read from an external source (Tagetik and Excel).

1. Open the document and click **Objects List** to update the objects in the document: the objects list panel will open
2. Click **Available updates** to access a list of objects that can be updated
3. Select the objects to update
4. Click on **Update**

   ***Note**: the system will notify the user of the completion and outcome of the update and replace the data present in the document that has just been successfully updated. In case of errors/warnings, the system will provide a link to access the error details panel.*

Handling manual changes on tables and charts

Introduction

After a table has been inserted into a document, the values within it and its style can be changed manually. It is possible to use **maintain Data** and **Style features** to keep these changes each time the object is updated, and not overwrite them with the content read from the source.

Below are procedures on how to keep **data changes** for **Table** objects and **styles** for **Table and Chart** objects, and how to restore values read from the source should you decide to overwrite these changes.

How to Keep Data Changes in the Table

Add-in Word > CCH Tagetik Table ObjectEdit - RibbonTable ObjectKeep overrides on - DataToggle set - ONUpdate

Manual changes to the data of a table are understood to be all changes made by the user to text values, numbers, dates, etc. contained within the table cells. To keep or not keep any changes made to the data of a document table, it is necessary to open the **Edit** tab of the object and switch the 'Data' toggle on or off. In detail:

- With the "Data" toggle **on**, if the data available on the table in the document are different from those read from the source, the values read on the document will be kept after the table update data processing is completed.
- With the 'Data' toggle **off**, on the other hand, data values will always be read back from the source and any manual changes to the data will be lost at the end of the table update data processing

This option is not affected by where the table update is requested by the user (single, multiple or recursive update).

***IMPORTANT**: After manually editing table values, make sure that the document has completed saving the changes and its status is Saved before updating it. If the document is still being saved, any changes to the table will be lost even if the Data toggle is switched on.*

How to Keep Manual Changes by Data for Multi-object Update

Word add-ins > CCH® Tagetik Disclosure *ribbon bar > Object list available updates > Table or Chart selectedLaunch update*

Before launching the update, the user edits, adds or deletes characters in one or more cells and sets the Toggle ON via EDIT mode.

1. Select the Object List option from the ribbon
2. Click on available updates
3. select one or more checkboxes relating to the tables or charts on the document visible in the panel
4. Select the down arrow of the **Update** button and choose one of the three available options:

- **Update** (takes into account the status of the Flags set on each objects)
- **Keep all changes** (maintain overrides made regardless of Flag status)
- **Full Reset** (restores the Table/Chart to its source state)

5. Click on the button and launch the desired update

Note *if an object is selected that is not a Table or Chart the System does not display the arrow to choose options, whereas if at least one selected object is a Table or Chart the System displays the arrow and the user can still launch the update.*

Note*: If the table structure, known as cardinality, is altered by adding or deleting a row or column, at the end of the update operation, the System will not perform the changes and will display a Warning message* ***"manual changes will not be made for cardinality change".***

How to keep manual changes for Data and launch a recursive update

Word add-ins > CCH Tagetik ribbon bar > UpdatesDocument Part to Update > Update and Get Changes

Having a Table or Chart added in a document part, after making manual changes and setting the Data Toggle to On or Off the user can launch an update recursively displaying on the Master document the Table with or without changed content depending on the option chosen.

1. Select the **Updates** button from the ribbon
2. Select the document(s) to be updated recursively
3. Click on the button with the option **Update and get changes**
4. Set On the Toggle **include data in the update** and select **Update** leaving Off the other Toggles
5. The System launches the recursive update and displays the Table or Chart contained in the document part with the changed data taking into account the Data Flags set On or Off
6. Set On the **Include Data in Update** Toggle and select one of the two enabled options and click the **Update** Button

- **Enables** full object restoration (the System launches a recursive update restoring the content of the document parts as per source)
- **Keep all overrides** (the system launches the recursive update and displays the Table or Chart contained in the document parts with the changed data without taking into account the set Data Flags)

Note*: If the table structure, known as cardinality, is altered by adding or deleting a row or column, at the end of the update operation, the System will not perform the changes and will display a Warning message* ***"manual changes will not be made for cardinality change".***

Handling manual changes on tables with Flag Style

Introduction

The table inserted in a document can be modified by the user and maintained in the document through two distinct options **Data** and **Style.**

Below are procedures on how a table maintains manual changes by style by overwriting all changes made by a user otherwise present on the source.

Note *Before making any manual changes, it is mandatory to keep the Word sheet autosave set to ON and wait until the document status is Saved before launching any update. If the status remains on Saving, the user can force the saving by selecting the Save button in the top left corner.*

Maintaining Manual Changes by Style

Add-in Word > CCH® Tagetik Disclosure*Table ObjectEdit - RibbonTable ObjectKeep overrides on - StyleToggle set - ONUpdate*

Since a table is made up of rows and columns, manual modifications by Style means anything that is modified that affects the table structure or the chart compared to the source. At this point, the user can edit the structure of a table by going to the Table object's edit menu, setting the Style toggle to On and launching an update via the **[Update]** button.

Here is a list of all manual changes allowed by Word by first selecting the object and Layout Table

- Row/column distribution
- Set row height/column length
- RowRule application for one/more rows
- Row Options (Right click - Table Properties - Row Tab - Flag On Allow row to break across pages
- Autofit (Autofit contents - Autofit Windows - Fixed column Width)
- Text orientation of a cell (all orientation directions)
- Cell Margin - Option Table (Top - Bottom - Left - Right)
- Allow Autofit at table level - Cell Margin - Table Option (Automatically resize to fit contents) Flag On
- Table Alignment - Right click - Table Properties - Table Tab - Alignment (left, centre.right) Preferred with percentage or centimetres
- Cell Space - Table Option - Allow spacing between cells set on with centimetres set

IMPORTANT: Any changes related to ***Colour, Font, Style, Effect, Shadow, Highlight, Size, Bold, Italic, Underline, Strikethrough, Double-strikethrough, Emboss, Emphasis mark, superscript, subscript, Hidden, Outline and Resize*** of table object cells will not be retained after updating.

Note *The row and column merge split is not maintained*

Note *the Layout Table option also affects all tables inserted as images*

Here is a list of all manual changes allowed by Word by first selecting the Table and Table Design object from the ribbon

- Shading (colour for a single cell)
- Edges - Top/bottom/left/right **Note-** Horizontal/Vertical is not maintained
- Edge thickness
- Edge Styles
- Border Painter
- Pen colour
- Diagonal up/down
- Table Style options

Note *Table style is not maintained*

The system launches a data processing and finishes keeping the changes made by the user.

Note *If the table structure, known as cardinality, is altered by adding or deleting a row or column, at the end of the update operation, the System will not perform the changes and will display a Warning message* ***"manual changes will not be made for cardinality change".***

If the user wishes to restore the Table before the changes by data, a restore data processing can be launched from the Edit Panel of the selected Table object by selecting the down arrow of the **Update** Button and selecting the **FULL RESET** option

Add-in Word > CCH TagetikTable ObjectEdit - RibbonTable ObjectToggle set - ON or OFFUpdate dropdown>FULL RESET

Note *the system does not take into account the Data toggle configuration set to ON or OFF*

Maintaining Manual Changes by Style for Multi-object Update

Word add-ins > CCH® Tagetik Disclosure *ribbon bar > Object list available updates > Table or Chart selectedLaunch update*

Before launching the multi-object update, the user modifies the table as desired by design or layout by following the procedure **Maintain manual changes by Style** and set the Style Toggle **ON** via **EDIT** mode through the procedure Multi-object Updates

Note: If the table structure, known as cardinality, is altered by adding or deleting a row or column, at the end of the update operation, the System will not perform the changes and will display a Warning message **"manual changes will not be made for cardinality change".**

Maintain manual changes by Style and launch a recursive update

Word add-ins > CCH® Tagetik Disclosure *ribbon bar > UpdatesDocument Part to Update > Update and Get Changes*

Having a Table or Chart added in a document part, after making manual changes for all tables by design or layout by setting the Style Toggle On or leaving it Off, the user can launch a recursive update displaying on the Master document the Table with or without modified content depending on the option chosen.

The steps to follow are given under Maintain Manual Changes by Data and launch a recursive update of the topic ManualChanges Data

> ***Note**: If the table structure, known as cardinality, is altered by adding or deleting a row or column, at the end of the update operation, the System will not perform the changes and will display a Warning message **"manual changes will not be made for cardinality change".***

Supported fonts when updating image objects

In order to maintain the style used in image objects each time the document is updated, Tagetik Software S.r.l. has made available an extensive list of the most commonly used fonts. Some unavailable fonts will be replaced with an alternative font. The alternative font used will be compatible with the metric and will not cause layout problems in documents.

***IMPORTANT**: If you wish to use customised or licensed fonts that are not among those available, you can request their addition by following the procedure How to request the addition of fonts not available in the Application Server (Cloud users only)*

List of Available Fonts

Here are the available fonts, which can also have several styles and weights (e.g. Bold, Semi-bold, Heavy, Light, etc.).

A-F	G-M	N-Z
Arial Arial Black	Gabriola	Nirmala UI Nirmala UI Semilight
Bahnschrift	Gadugi	NSimSun
Calibri Calibri Light	Georgia	Palatino Linotype
Cambria Cambria Math	Impact	PMingLiU-ExtB
Candara Candara Light	Ink Free	SansSerif

A-F	G-M	N-Z
Comic Sans MS	Javanese Text	Segoe MDL2 Assets Segoe Print Segoe Script Segoe UI Segoe UI Black Segoe UI Emoji Segoe UI Historic Segoe UI Light Segoe UI Semibold Segoe UI Semilight Segoe UI Symbol
Consolas	Leelawadee UI Leelawadee UI Semilight	Serif
Constantia	Lucida Console Lucida Sans Unicode	SimSun SimSun-ExtB
Corbel Corbel Light	Malgun Gothic Malgun Gothic Semilight	Sitka Banner Sitka Display Sitka Heading Sitka Small Sitka Subheading Sitka Text
Courier New	Marlett	Sylfaen

A-F	G-M	N-Z
Dialog DialogInput	Microsoft Himalaya Microsoft JhengHei Microsoft JhengHei Light Microsoft JhengHei UI Microsoft JhengHei UI Light Microsoft New Tai Lue Microsoft PhagsPa Microsoft Sans Serif Microsoft Tai Le Microsoft YaHei Microsoft YaHei Light Microsoft YaHei UI Microsoft YaHei UI Light Microsoft Yi Baiti	Symbol
Ebrima	MingLiU-ExtB MingLiU_HKSCS-ExtB	Tahoma
Franklin Gothic Medium	Mongolian Baiti	Times New Roman
	Monospaced	Trebuchet MS
	MS Gothic MS PGothic MS UI Gothic	Verdana
	MV Boli	Webdings
	Myanmar Text	Wingdings
		Yu Gothic Yu Gothic Light Yu Gothic Medium Yu Gothic UI Yu Gothic UI Light Yu Gothic UI Semibold Yu Gothic UI Semilight

Alternative Fonts in the Application Server

When a font is not available in the Application Server, the system will automatically replace the missing font with the default font **Arial**. At the end of the update processing, the user will receive a **Warning** notification

advising that the alternative font has been replaced.

The following table lists the fonts for which an alternative font is available in the Application Server:

Font name	Alternative font name
Aptos	Calibri

IMPORTANT: the alternative font for **Source Sans** is **Source Sans 3**. However, the latter is currently not available in the Application Server. Its addition can be requested by following the procedure indicated in *How to request the addition of fonts not available in the Application Server (Cloud users only)*

Document part updates panel

Word > CCH Tagetik > Documents management > Updates

Purpose of the page

This allows you to view and update the document parts of an **open document**.

Document parts list

Element	Description
Select All	Selects all the document parts present in the document.
Document name	Indicates the name of the document part

Buttons on the page

Element	Description
Get Changes	Runs the data processing that updates, in the open document, the available content in the selected document part.
Update and Get Changes	Opens the ***Update options*** panel. The following update options are available: • **Include data in the update (Off):** the content of the selected document part and the child document parts will be brought into the open parent document and all intermediate document parts • **Include data in the update (On):** the objects present in the selected document part and in the child document parts will be updated, and the updated content will be brought into the open parent document and all intermediate document parts.
i	Opens the *teaching bubble* to provide information on the update buttons.

Update document parts

Update procedures: best practices

To ensure that the information is correct, in case of changes to data or any changes made in the lower sections that make up the document, it is recommended to update the document. A document update may consist of getting the changes made to child document parts or first updating the objects present in the child document parts, reading the value of the data from the respective data sources, and then receiving their updated content in the open document.

Get Changes

Word > CCH Tagetik tab > Documents management > Updates > Get Changes

This procedure allows you to bring the content of the child document parts into the open document.

1. Open a document, click *Updates*: the Document Part to update panel will open
2. Click the check box of the document part to be updated or ***Select All*** to select all of them
3. Click on the **Get Changes** button

Update and Get Changes (*"Include data in the update"* - Off)

Word > CCH Tagetik tab > Documents management > Updates > Update and Get Changes

This procedure allows you to bring the content of the child document parts into the open document and into all intermediate document parts.

1. Open a document, click *Updates*: the Document Part to update panel will open
2. Click on the check box of the document part to be updated or ***Select All*** to select all of them
3. Click on the **Update and Get changes** button: the *Update options* panel will open
4. Click on **Update**

IMPORTANT: *the document part that will be opened will not be updated and a Warning message will be shown.*

Update and Get Changes (*"Include data in the update"* - On)

Word > CCH Tagetik tab > Documents management > Updates > Update and Get Changes

This procedure allows you to bring the "updated" content of the child document parts into the open document and into all intermediate document parts.

1. With a document open, click *Updates*: the Document Part to update panel will open
2. Click on the check box of the document part to be updated or ***Select All*** to select all of them
3. Click on the **Update and Get changes** button: the *Update options* panel will open
4. Enable the ***Include data in the update*** option
5. Click on **Update**

IMPORTANT: *the document part that will be opened will not be updated and a Warning message will be shown.*

View the Sources of a document

The sources of a document show the origin of the data shown in the objects (table, graphs, amount and attribute dimension). The sources of a document can be of two types:

- **Tagetik:** Tagetik databases in the configuration
- **Excel:** Excel files saved on the SharePoint site configured for the application

View the sources of a single document

Word > CCH Tagetik > Document Management > Sources

This procedure allows you to view the sources of a single root document or part of it.

1. Select the document of interest in the **Sources** window; either the open document or a document belonging to the same structure can be selected.
2. The window shows:

- searchable list of sources associated with the document, presented in alphabetical order; in particular, where present, Tagetik sources are shown first and then Excel sources
- field for punctual search of sources; by editing in the search field, the system filters the sources in

the above-mentioned list
- **back** button; clicking the button shows the document structure in the **Sources** window

***Note**: Should there be more than one source application database for the document, the source list will indicate the reference database before each source.*

Display document structure sources

Word > CCH Tagetik > Document Management > Sources

This procedure allows you to display the sources of a structure:

1. Click *View all Sources* in the **Sources** window
2. The window shows:

- searchable list of sources associated with structure documents, displayed in alphabetical order; in particular, where present, Tagetik sources are shown first and then Excel sources
- field for punctual search of sources, by editing in the search field, the system filters the sources in the above-mentioned list
- **back** button; clicking the button shows the document structure in the **Sources** window

***Note**: Should there be more than one application database associated with the sources of a document, the source list will indicate the reference database before each source.*

The Migration Tool

Introduction

The Automatic Migration Tool enables the transition fromCCH Tagetik Collaborative Office to Intelligent Disclosure.

This tool not only safeguards the integrity of existing documents, but also makes the following new Intelligent Disclosure functionalities available:

- **Advanced Collaboration**: allows multiple users to access and edit documents simultaneously, with real-time updates, facilitating faster teamwork.
- **Simplified user experience**: the intuitive and modern interface facilitates document editing and settings management, reducing the learning curve and increasing productivity.
- **Version control**: automatic versioning eliminates the need for manual action and provides easy access to previous versions of documents.
- **Centralised installation of add-ons**: installation and updating of add-ons is handled via a centralised deployment in the Microsoft 365 console, eliminating manual tasks for users.
- **Data Integration**: allows users to retrieve data from different databases CCH Tagetikand external sources within a single document, and create comprehensive and integrated reports.
- **Advanced Sharing, Commenting and Tagging**: provides advanced user interaction that enhances communication and collaboration.

For further details on the migration tool see Non-Migrated Functionalities and Migration Procedures.

Migrating Documents from Collaborative Office to Intelligent Disclosure

Requirements

The following conditions are required to start the process of migrating documents from Collaborative Office to Intelligent Disclosure:

- Access to Collaborative Office and Intelligent Disclosure systems
- CCH Tagetik role to export and import documents
- Document structure and contained objects must be updated

Migration procedure

1. Exporting documents from Collaborative Office
2. Importing Documents into Intelligent Disclosure

Exporting documents from Collaborative Office

application database > Folder > Master document > Export (Ribbon) > to intelligent disclosure > select the Export Folder > OK

This procedure allows a document and its contents to be exported.

1. Access Collaborative Office
2. Click on the application DB to export
3. Click ✚ to expand the documents folder
4. Select **Master document** (not archived) visible in the structure
5. Select **Export**
6. Click on **A Intelligent disclosure**
7. Choose the local path where to save the exported file with **.zip** extension

***Note**: Any archived documents must be restored before proceeding with the export.*

***Note**: Only one Master Document can be exported at a time.*

***IMPORTANT**: Before proceeding with the export, please check that the following characters \, /, :, *, ?, ", <, >, | are not present in the Document Part descriptions. If they are present, the import system will automatically replace such characters with a space*

Importing Documents into Intelligent Disclosure

application database > Import (ribbon) > Sharepoint folder > Exported.zip file > Import

***IMPORTANT**: Before accessing CCH TagetikIntelligent disclosure upload the file.zip exported from the Collaborative office to the tenant's dedicated Sharepoint space.*

This procedure allows a document and its contents to be imported.

1. Access Intelligent Disclosure
2. Navigate to the Document Import Tool Section from the ribbon
3. Select the target folder
4. Select the file with .zip extension located in the previously uploaded sharepoint folder
5. Select the target folder
6. Select **import**
7. Check Documents Uploaded and visible from the Library Panel
8. Open the document and check that all parts of the document, attachments and contained objects are imported and displayed correctly.

Note: Only one Master Document can be exported at a time.

IMPORTANT: Once documents have been migrated, they can no longer be produced using Report Bursting. For features not supported in Intelligent Disclosure, consider alternative workflows that can provide similar features. Though some functionality may not be migrated, the new system offers advanced features that will enhance your document management experience.

Functionality Migration Report

Below is the list of functionalities migrated to CCH Tagetik Intelligent Disclosure:

Collaborative Office	Intelligent Disclosure
Master document	**Parent document**
Document parts	**Document parts**

Collaborative Office	Intelligent Disclosure
Document Metadata	Metadata of the original document. For example: • Document language • Default Settings (Period Scenario Account) • Numerical values • Percentage values • Values for Date • Filters
Matrix as Table	Table from CCH Tagetik Form
Matrix as image	Table from CCH Tagetik form as image
Chart read from matrix as image	Chart from CCH Tagetik Form
Amount	Amount from CCH Tagetik
Cell field	Attribute Dimension
Rich Text	Free text
Rich text	Rich text
Insert object from Excel attachment	Table from CCH Tagetik Excel
Area as image from Excel attachment	Table as image from CCH Tagetik
Chart as image	Chart as image from CCH Tagetik Excel
Cell from excel attachment	Cell from Microsoft Excel
Bookmark	**Component**
Reference	**Component instance**
Object inserted in header or footer	After migration, objects are not displaced and can be edited.
Locked object	**Lock object**
Link to iXBRL	After migration, the document retains the inserted tags.

Functionality not automatically migrated

Below is a list of the functionalities that were present on the Collaborative Office but not automatically migrated to Intelligent Disclosure and any recovery options:

Collaborative Office	Intelligent Disclosure	Reset option
Start and End Filter	Document part filters can be set up.	You can define the dimension value set in the **Initial Filter** object as a parameter of the document part. In this way, all objects in the document part can inherit this value. See Adding a Part to the Document
Reference document for use as an attachment	The attachment can be linked to the object by searching directly in SharePoint and can be shared among all documents	Attachments are stored in the SharePoint site dedicated to the application and are accessible from all documents on the site
Style template	The styles will be retained and the template will be available among the word styles.	It is possible to load the template previously saved or retrieved from the zip file and load it from CPM to be reapplied to the document at Roll Forward
Non-part document	The concept of a non-part document is no longer available in the new solution.	Reset option not currently managed
Ability to link Workflow to Process	Features not supported.	Reset option not currently managed.
User rights	User rights must be created manually in the new solution	It is possible to restore user rights management from the User Rights section on documents
Workflow	Workflows must be created manually in the new solution	Workflow management can be restored by consulting the Document setting page
Archived documents	Documents must be de-archived in order to be exported to the new solution.	Reset option not currently managed
Borders mapping	Borders remain mapped even after migration.	Enable the **Keep Style** option to display the borders when the object is next updated. For new objects, on the other hand, borders can be applied directly to the word document as a manual style modification.
Table size	After migration, the table does not change in size	Enable the **Keep Style** option to display the borders when the object is next updated. For new objects, however, the table size can be changed directly in the word document as a manual style change.

Collaborative Office	Intelligent Disclosure	Reset option
Snapshot	Past snapshots of the document will not be migrated. Snapshots are no longer required in the new solution due to the availability of the automatic version	Reset option not currently managed
Free Table & Object from another file	The content in the document will be available but the objects will not be displayed as CCH Tagetik objects	Reset option not currently handled, non-Tagetik contents may remain in the document as word objects
Custom formatting on a single table cell	Any customised formatting applied to a single cell of a table will not be considered at the next update in the new solution	It is possible to restore the Formatting management. See Formatting section
Parameteriser option in document settings	Not available in the new solution	Reset option not currently managed

Features not supported

Below is the list of functionalities currently not available in Intelligent Disclosure, but already included in the product roadmap and planned for release soon:

Collaborative Office	Intelligent Disclosure
Validation rules	It is currently not possible to perform data validation by defining custom rules.
Free text type reference objects	Intelligent Disclosure supports components for objects with a source (both Excel and CCH Tagetik), but does not support components for text objects
Advanced Workflow Features	The following Workflow features are not supported: • multi-approval: only one approval level is allowed • Edit submitted data: the document part must be rejected before data can be modified • generic task • sending reminder e-mails
Dedicated reports	The report to check discrepancies with the source is not yet available.
Propagating headers and footers	Intelligent Disclosure does not support customised logic to define how headers and footers should be propagated in different layers
Scheduling of updates	Object updates can only be performed when a user is authenticated in the Word add-in

Exporting and Importing a Document

Exporting a Tagetik document

This procedure allows a document to be exported in one of the following ways:

- Browsing through the library
- Exporting and Importing a Document

Export by browsing through the library

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > File > Open >*

1. Click **Open**: the ***Library*** tab opens
2. Select a document root
3. Click on **Structure** in the bottom right-hand corner
4. Click on the three dots for the document to be exported (root or doc part) in the tab
5. Select the **Export** option
6. The system displays the **Export - select folder** mode
7. Select the path where the .zip file will be saved
8. Click the **Export** enabled button at the bottom right
9. The system launches the data processing, confirming the end of execution with a message "Export was run successfully".
10. The file saved on Sharepoint with the format *nomedocument_hour.zip* contains the linked children if present and all objects

Exporting and Importing a Document

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > Document Management > Structure*

1. Open a root document from the Library: ribbon bar > File > Open > double-click on document x
2. Click on **Structure**: the ***Document Structure*** panel opens ***- document x***
3. Click on the three dots for the document to be exported (root or doc part) in the tab
4. Select the **Export** option
5. The system displays the **Export - select folder** mode
6. Select the path where the .zip file will be saved
7. Click the **Export** enabled button at the bottom right
8. The system launches the data processing, confirming the end of execution with a message "Export was run successfully".
9. The file saved on Sharepoint with the format *nomedocument_hour.zip* contains the linked children if present and all objects

Note *If the user launches the operation several times, the system does not limit the executions because each export data processing generates a file with a different time.*

Importing from the Open Document Structure

Word Add-in > CCH® Tagetik Disclosure *ribbon bar > Import >*

1. Select the **Import** button
2. The system displays the **Import - select package** mode
3. Select the path where the file with the extension documentname_hour_.zip was saved
4. Click on the enabled **Next** button in the bottom right-hand corner
5. Choose the path where you want to import the file (shared or folder)
6. Click the **Import** button
7. The system launches the data processing and confirms the execution is completed with the message "Import is completed".
8. A folder with the name of the imported zip file will be created and saved in the selected path, which will also contain the children if present

Note *if the same document with the extension .zip is imported more than once, the system displays in the Import - select a folder tab with a yellow background and a warning message "A folder with the same name as the package already exists - You can select another folder or rename the one you are about to create".*

1. Select the **Rename** button to switch to folder name change mode
2. or select the **Cancel** button to cancel the path and choose an alternative one
3. type a different name in the **Folder Name** field
4. Click again on the **Import** button to restart the data processing
5. or select the **Previous** button to return to the warning message

Note When a document is imported and it contains a Table or Chart object with Microsoft Excel source, the system determines the new path where the objects are present e.g. New folder/Table or Chart.xlsx

'Export differences with source' functionality

Introduction

When finalising the document, it may be necessary to check the consistency of the data between the objects in the document and those in its source, and to assess, for example, whether:

- to update the subject in the document according to the latest information
- to make manual changes where necessary

To gain a clear view of any differences before proceeding with the update, and to identify, for each object in the document, all data-level discrepancies compared to the source, you can use the **Export Differences** functionality

How to run the functionality

Word Add-in > CCH IDS > Outline > Export differences

To generate the difference file with the source from the Outline tab:

1. Click on the *Other* icon (three dots) next to the document you want to check for differences
2. Select the **Export Differences** option

At the end of the data processing, the system notifies the user that the export process has been completed and generates an *Excel* file named *Document_DifferencesWithSource_Timestamp*' in the Download folder configured in the operating system in use.

> ***Note.*** *It is possible to generate difference exports for all document types in the structure, be it a root document or an intermediate node or a lowest level element (document part). If a node-type document is selected, the information contained in the generated excel file will refer to all objects contained in the selected document and its child documents. It is possible to export differences from both the open and closed document outline.*

Comparison logic

To generate the report of the differences between the values of the objects in the document and those of the data source, the system performs a comparison between:

- **The current value of the object in the document**, taking into account any data overwrites
- **The value that the object would take if it were updated** by applying any formatting options defined at document or object level (e.g. Numeric, percentage and date formatting; Language settings).

This approach ensures that the differences in the exported file reflect not only the raw data of the source, but also the final result that would be displayed in the document after updating, respecting the configured formatting. Any differences in style, however, are not considered.

The objects whose differences can be evaluated are all the objects below except for image type objects (tables and graphs):

- Table
- Rich Text
- Amount
- Dimensional attribute
- Component instance

Differences Export File

The excel file generated by the *Export Differences* functionality will show a row for each updatable object for which the system has detected a discrepancy between the value (numeric or textual) in the document and its source, and the following columns:

- **Document part**: document name
- **Type of object**: object type (e.g. *Table, Rich text, Amount, Attribute dimension*)
- **Object name**: name of object

- **Source type**: *Microsoft Excel* or *CCH Tagetik*
- **Source name**:
  - File *name* if the source is Excel or *Code - Description* if the source is a Form, for Table and Amount objects
  - Dimension attribute, for Attribute Dimension objects
- **Excel area**: name of the area defined in the source
- Source **value**: data present in the source
- **Document value**: data present in the document
  - Row (only for **Object type** equal to *Table*)
  - Column (only for **Object type** equal to *Table*)
- **Note**: any additional information, errors/warnings.

Empty fields may indicate missing data in the source (e.g. Area not found) or in the document (e.g. Row/Column not found because cardinality has changed from its source) or information not relevant to the **object type**.

Important. In cases where the content of a **Rich text** object exceeds **30,000 characters**, the value displayed in both the document and the source may be **truncated**.

This behaviour does not affect the logical comparison of data, but it is important to take this into account when checking for differences.

Intelligent Disclosure Audit

The Audit functionality in Intelligent Disclosure allows you to keep track of the operations performed by the user in CCH Tagetik Word Addin from the moment they log in, by recording the actions performed, the entities involved and the timing.

Audit

To view the audit of the user's actions on CCH Tagetik Word Addin, you have to log into CCH Tagetik, where the information is actually stored.

More specifically, once logged in, you need to follow the path: *Repository > Audit*

At this point, CCH Tagetik shows the user the Audit page displaying the user's actions.

For further details, please refer to the Audit section of CCH Tagetik user manual

Origin of the data

In the above-mentioned audit page, the actions performed by the user are identified by the prefix [Word Addin], followed by the specific type of operation. The table below lists the possible user actions and their description.

Origin code	Description
[Word Addin] User Authentication	Authentication and user role
[Word Addin] Document Root Creation	Document creation
[Word Addin] Document Root edit	Document modifications
[Word Addin] Document Root deletion	Document deletion
[Word Addin] Table Object addition	Table object creation
[Word Addin] Table Object Edited	Edit table object

[Word Addin] Table Object deleted	Table object deletion
[Word Addin] Chart Object addition	Addition of Chart object
[Word Addin] Chart Object edit	Edit Chart object
[Word Addin] Chart Object deleted	Chart object deletion
[Word Add-in] Document status changed	Edit document status
[Word Addin] Amount Object Addition	Amount object creation
[Word Addin] Amount Object Edited	Amount object modification
[Word Addin] Amount Object deleted	Amount object deletion
[Word Addin] Document Structure Management	Document structure modification
[Word Addin] Document Root DB Mapped	Objects remap
[Word AddIn] Recursive Update request	Update and Get Changes
[Word AddIn] WF Permissions Add	Permissions Add
[Word AddIn] WF Permissions Revoke	Permissions Revoke
[Word AddIn] Export document request	Export Document
[Word AddIn] Import document request	Import Document
[Word Add-in] Document status change	Submit/Approve/Reject document

Audit Detail

This page - which can be reached from the main Audit page in the previous paragraph by clicking the Actions ⋮ button and selecting the Details menu item - shows the outcome and details of the action performed by the user in the CCH Tagetik Word Addin.

In particular, the following sections are populated for each action performed in CCH Tagetik Word Addin

Section	Description
Log	Contains the outcome of the operation
Date	Detailed Action Info

For further details, please refer to the details section of Audit in CCH Tagetik.

Sources

There are two types of sources:

- **Internal**: system objects (documents, forms, reports)
- **External**: Excel files saved on the SharePoint configured for the application.

Note: to view a document's sources, open the document first. See the Open Document procedure.

Change the Database source of a document

Word Add-in > CCH® Tagetik Disclosure Ribbon bar > File > Open > select the document > DB Mapping

Manage the Database mapping of a document

After creating a document with the relative parameters associated with one or more active databases, this procedure allows you to change the database source from the Library panel.

1. Click **Open**
2. Select the **parent document**
3. Select ***DB Mapping***
4. Activate one or several checkboxes

5. Click **Next**.

If...	Then...
the selected documents have no Database configured for Parameters or Tagetik objects	the system will not show cards with the **Remap** button disabled and the **Back** button enabled
a document has a database configured	the system will show a card with the name of the document.docx at the top and the name of the set database at the centre, e.g. **DB1**
the **Select DB** button is selected	the system will show a window with the databases to select

6. Select a Database, e.g. **DB2**
7. Click **Remap**

***IMPORTANT**: at the end of the procedure, the system will run the data processing and show a "data processing completed successfully" message*
If the document is opened at the end of the data processing, the system will show an error message and inform the user that the document is open

> ***Note**: At the end of the data processing, the source will be changed for all the parameters and objects related to the documents that they inherited from that database. The edit step will show the new database(e.g. **DB2**).*
> *The DB Mapping function shows you the Database that has been chosen in the centre of the card, in line with the header.*

Integration with Seahorse for iXBRL

Introduction

Seahorse is an application aimed at generating files in iXBRL format to be made available to regulators.

CCH® Tagetik Disclosure Add-in allows you to forward documents to Seahorse and access the application integrated within the solution.

The service is active for the following profiles:

- administrator with a licence to use iXBRL (function '0004021 - iXBRL' enabled)
- contributor (enabled to '0004266: iXBRL - User').

Configuration of Service Provider in CCH Tagetik

On the Settings page (see Document Settings), users with an administrator profile see the **Service Provider** label along with a drop-down menu listing the available service providers.

IMPORTANT: The list of Service Providers is configured in Seahorse by the user with the role 'Service Provider Admin'.

IMPORTANT After selecting/updating the service provider, the information is automatically acquired in CCH Tagetik.

Link to Seahorse

The iXBRL button is available in the ribbon bar of CCH Tagetik Word Add-in.

When an authorized user with a contributor or administrator profile clicks the iXBRL button, the home page of the Seahorse application, integrated into the solution, opens in the user's browser.

The user is finally logged into Seahorse without the need for further action.

IMPORTANT The login to Seahorse will not be successful if the Service Provider is not defined in CCH Tagetik (see ServiceProviderTagetik). In that case, CCH Tagetik Word Add-in displays the blocking message 'No Service Provider found' in the side panel.

Document configuration for forwarding to Seahorse

An authorized user with an administrator profile activates the iXBRL toggle for a root document that is intended to be forwarded to Seahorse.

The iXBRL toggle is visible in the creation(Create Document) and editing windows of the root document(Edit Document).

IMPORTANT: the iXBRL toggle is only visible if the Service Provider Configuration in CCH Tagetik has been completed

(see Service Provider Configuration in Tagetik)

Document forwarding from CCH® Tagetik Disclosure Word Add-in to Seahorse

For the root document configured according to (Document configuration for forwarding to Seahorse), the authorized user with a Contributor profile forwards the document by selecting the menu option **Send a Copy to iXBRL**

This item is available in the two **Document Structure** panels and is shown to the users when they select the root document and click the ⋮ button:

Panel	Path
Document structure	click the **Open** button in the ribbon bar, then select a root document in the **Library** panel
Document structure	when the document is open, click the **Structure** button in the ribbon bar

IMPORTANT: The feature for forwarding documents to Seahorse can only be applied to root documents configured according to (Document configuration for forwarding to Seahorse)

When the Contributor selects **Send a Copy to iXBRL**, CCH® Tagetik Disclosure Word Add-in forwards a copy of the document to Seahorse.

CCH® Tagetik Disclosure word Add-in notifies the user once the operation is complete.

Note: In the label of the menu item "Send a Copy to iXBRL" CCH® Tagetik Disclosure Word Add-in displays the date and time of the most recent document forwarding.

The Intelligent Disclosure PowerPoint Add-in interface

Introduction


Once the add-in is installed, the **CCH® Tagetik Disclosure** tab appears among the standard PowerPoint tabs. From this tab, the user can open panels to perform all enabled Intelligent Disclosure functions.

Introduction to the PowerPoint interface

Ribbon Bar

Enables access to all Intelligent Disclosure functions of CCH Tagetik and shows enabled buttons based on the role of the connected user.

What it looks like

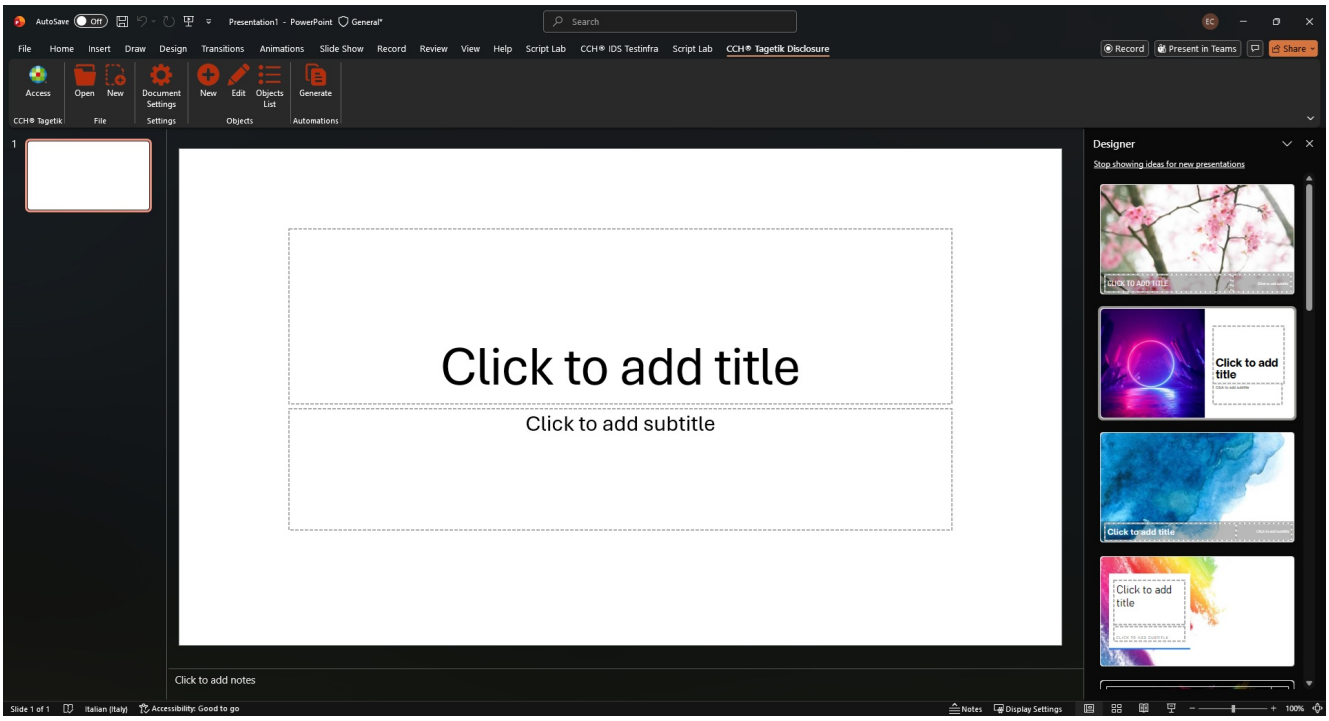

Page fields

Please find below the most important fields.

Contents	Description
Access	Opens the panel showing the list of user-defined configurations, allowing you to choose one on which to perform authentication. In the case of first-time access, no configuration will be visible. Therefore, you must click on the **CONFIGURATIONS** button to enter one. ***Note:*** *if the user has opened a document created on one of the configurations in the list, the latter is selected by default.*
Open	Opens the panel showing the ***Library*** with the list of available presentations.

Contents	Description
New	Allows you to create a new presentation.
Document Options	Allows you to change basic document settings such as the ***language*** or add/remove ***Dimensions***.
New	Allows you to add an object to the slide.
Edit	Allows you to edit an object selected in the slide.
Object List	Displays the list of objects in the open document and allows you to update or delete them.
Generate	Allows you to create new slides from a selected one.

Configuring the Power Point add-in

Background

Before adding a new configuration, it is necessary to integrate the Intelligent Disclosure and CCH Tagetik solution with the organisation's Microsoft 365 suite. For information see Document User Rights Definition. Moreover, the minimum version of PowerPoint installed on the machine must be 2601 (Build 19127.20532). Once the add-in is configured, Sharepoint will display an Intelligent Disclosure column that is essential for distinguishing native presentations from Intelligent Disclosure ones. This column must not be changed by the user, otherwise it will cause the add-in to malfunction.

Configure a new connection to the server

Ribbon Bar CCH Tagetik > Access

1. In the **Accesses** panel, click on **CONFIGURATIONS**. Select **ADD.**
2. Under **Display Name**, enter the desired name for the configuration.
3. In the **CCH Tagetik Tenant ID** field, enter the organisation's Tenant ID.
4. In the **CCH Tagetik Client ID** field, enter the organisation's Client ID.
5. In the advanced (and optional) **CCH Tagetik URL** field, type in the Tagetik application connection address to connect to. In the (optional) **Identity provider URL** field, enter the address of the system providing the authentication service.
6. Click **Save** to save the configuration.

The panel also includes the **Paste Configuration** option, which allows you to paste all values (except for the name, which must always be entered by the user) copied from the **Intelligent Disclosure settings** window.

Edit a connection to the server

Ribbon Bar CCH Tagetik > Access

1. In the **Accesses** panel, click on **CONFIGURATIONS**. Select the pencil icon next to the configuration you want to change.
2. Make the desired changes.
3. Click **Save** to save changes

Deleting a Server Connection

Ribbon Bar CCH Tagetik > Access

1. In the **Accesses** panel, click on **CONFIGURATIONS**. Select the pencil icon next to the configuration you wish to delete.
2. Click on **Delete** and confirm the deletion of the configuration.

Note: if the configuration concerned is the one in use, you must log out before proceeding with deletion.

Accessing Intelligent Disclosure features in Power Point

Managing the Accesses Panel

Power Point add-ins > CCH® Tagetik Disclosureribbon bar > Accesses

This procedure allows you to authenticate and use the Intelligent Disclosure features in PowerPoint.

1. Click on **Accesses**: the ***Accesses*** side tab opens.
2. Click on the **Name of the Configuration** you wish to access among the active ones.
3. Click on **Authentication**: the **login** window opens .
4. Enter the **Name** and **Password** used to access CCH Tagetik .
5. Click **Sign in**.

Working on a presentation

When a presentation is created using the add-in, a .ppt file is created in the document library of the SharePoint site dedicated to the application. Once created, the presentation is opened in the app. The file that is created in the SharePoint directory specified during creation can be opened in both the desktop and web versions of PowerPoint.

Creating a presentation

To create a presentation using Intelligent Disclosure, just click on **New** in the File section of the **Ribbon Bar** of the add-in after logging in. After that, a panel will open with a form to be filled in to create a new presentation. You can create a presentation from scratch or convert an existing one stored on SharePoint. In the first case, click the “From scratch” button. In the second case, click the “SharePoint” button, select a presentation created with native PowerPoint, and complete the form as you would for a presentation created from scratch.

Due to current SharePoint limitations, presentations created by converting native presentations do not support files with a total size exceeding 30 MB, including any templates.

Defining the general information of a presentation

CCH Tagetik Ribbon Bar > File > New > From Scratch

1.In the first step, enter the following general information: Document Name*, Additional Information, Target*, Document Language*.
2.In the second step, you can add Dimensions (Period, Entity, Scenario, etc.) retrieved from the available Databases.
3. In the last step, you can choose a template available on CPM, enter formatting options for decimal numbers, percentages and image formats.

Once these steps are completed, the presentation will be created. If successful, it will be displayed in a new window. Otherwise, an error message will be displayed.

Part of this information can be changed in the Settings section of the ribbon bar, as follows:

CCH Tagetik Ribbon Bar > Settings > Document Settings

1. Additional Information and the document language can be edited the General tab of the panel.
2. In the Dimensions tab, you can add additional dimensions or remove those that were selected during document creation.
3. In the Advanced tab, you can modify previously entered formatting options.

To convert a presentation from a .pptx file stored on SharePoint and created natively in PowerPoint, click the “SharePoint” button after clicking “New” in the File section of the ribbon. Next, in the displayed folders list, identify and select the desired file. The next steps are the same as those described above.

Uploading a Power Point template

To insert a Powerpoint template and use it as the basis for a new presentation, the following procedure must be followed within the CPM

1. Select Intelligent Disclosure
2. Select Template Library
3. Click on the Upload button in the top right-hand corner
4. Enter the name of the template (mandatory)
5. Load the template by dragging it or using the Select File button just below

***IMPORTANT**: The template must be in .pptx or .potx format*

Object List

This panel displays the list of all objects in the slides and allows the user to update objects reading from external sources (Tagetik and Excel).

Object Types

Object type	Icon	Description
Table	AS IN WORD	A table retrieved from Tagetik forms or from an Excel file
Visual	AS IN WORD	An illustration retrieved from Tagetik forms or an Excel file
Amount	AS IN WORD	A value retrieved from a Tagetik database, Tagetik form or Excel file
Dimension attribute	AS IN WORD	A textual expression taken from the CCH Tagetik Database (e.g. code, company name, etc.) to be added to the document
Rich Text	AS IN WORD	A rich text retrieved from CPM

Buttons on the page

Button	Description
Available updates	Allows one or more objects to be updated in order to obtain any new values present at source
Manage objects	Deletes one or more objects from the slides

Edit an object

CCH Tagetik Ribbon Bar > Objects > Edit

All object-related information can be modified through this procedure, except for the **Object Type** and the **Source Format** (CCH Tagetik or Microsoft Excel). For an object to be modified, it must remain selected until the modification process is completed. Conversely, a notification indicating the change in selection will be displayed.

In the **General panel**

1. Change name and/or additional information
2. Confirm changes by clicking on **Save**

In the **Source, Parameters and Advanced panels**

1. Edit the desired fields
2. Confirm changes by clicking **Update**.

Deleting an object

It is possible to delete an object from the following panels:

- **Edit**
- **Object List**

Deleting an object from the Edit panel

CCH Tagetik Ribbon Bar > Edit

1. Select the table within the slide

2. Click on Edit in the Objects section of the Ribbon Bar

3. In the panel that opens, click **Delete**
4. Confirm choice

Deleting an object from the Objects list panel

CCH Tagetik Ribbon Bar > Objects

1. Open the **Object List** panel from the Objects section of the Ribbon Bar
2. From the top of the panel that opens, select **Manage Objects**
3. Select the table from the object list
4. Click **Delete**
5. Confirm your choice.

Adding a Dimension Attribute

CCH Tagetik Ribbon Bar > Objects > New

A Dimension attribute can be added to the presentation to enable updatable descriptions. To do so, in the General tab:

1. Click on New in the object section of the Ribbon Bar.
2. Fill in the form with the mandatory fields and, under Object Type, make sure you select Dimension Attribute

In the Source tab:

1. Select the **Application Database** from those available in the drop-down menu. The databases that can be selected are those associated with the user who logged in.
2. Select a Dimension
3. Select an Account
4. Select an Attribute
5. Click on Insert

Adding Rich Text

CCH Tagetik Ribbon Bar > Objects > New

A Rich Text can be added to the presentation to enable updatable descriptions. To do so, in the **General** tab:

1. Click on New in the object section of the Ribbon Bar.
2. Fill in the form with the mandatory fields and, under Object Type, make sure you select Rich Text.

In the **Source** tab :

1. Select the **Application Database** from those available in the drop-down menu. The databases that can be selected are those associated with the user who logged in.
2. Select a Workspace
3. Select a Dataset
4. Select a **Rich Text**

In the **Parameters** tab:

1. Click on ⋮ for each mandatory parameter (*): this opens the parameter selection panel.
2. Select a **hierarchy/grouping** for the dimension to which the parameter refers

3. Select in the dimension tree a single element/node, or several elements/nodes (multi-selection is possible)
4. Click on **Insert.**

Adding an Amount to the presentation

CCH Tagetik Ribbon Bar > Objects > New

Depending on the data source from which the value associated with the amount originates, this procedure allows one of the following types of **Amount** objects to be inserted into the document:

1. **Amount from Tagetik database**
2. **Amount from Excel file**
3. **Amount from Tagetik Form**

Below you will find the procedures for each source. For all amounts, in the *General* tab:

1. Click on New in the object section of the Ribbon Bar.
2. Fill in the form with the mandatory fields and, under Object Type, make sure you select Amount.

Add a financial amount from CCH Tagetik Database

In the *Source* tab :

1. Click on *CCH Tagetik*
2. Select the Application Database from those available in the drop-down menu. The Databases associated with the authenticated user will be displayed.
3. Make sure you have selected *Financial* (default option)
4. Select one dimension for each of the three required to identify the Amount**(Scenario**, **Account** and **Period**)
5. Add any optional dimensions via the 'Add Dimension' option.
6. Click on *Next*

In the *Advanced* tab:

1. Select the format type by choosing either **As number (default)** or **As percentage**
2. Select a **Default** format from those available in the drop-down menu or define a **Custom** format, taking care to respect international conventions requiring the dot "." as decimal separator and the comma ',' as thousand separator. The character used to separate thousands or decimals will be converted according to the language of the document.
3. Click on **Insert** to add the Amount to the document, or on **Previous** to return to previous tabs.

Once the data entry process is complete, the amount will appear in the document with the same formatting as the paragraph where it was entered.

It is possible to create a customised numeric and/or percentage format defined by a specific 'identifier'. Here are some examples:

- use the numeric format identifier #,##0 'ths' or #,##0 'mills' to obtain values in thousands and millions;
- use the numeric format identifier '-'. It can be used to replace the numeric value zero with this output format. The format identifier '-' placeholder zero replaces the zero with the corresponding identifier; otherwise, the zero is displayed as the result.

Adding an Analytical Amount from CCH Tagetik Database

In the *Source* tab :

1. Click on *CCH Tagetik*
2. Select the Application Database from those available in the drop-down menu. Visible Databases are those associated with the authenticated user.
3. Make sure you have selected *Analytical*
4. Select a Workspace, a Dataset and an Amount from the respective drop-down menus.
5. Click on *Next*

In the *Parameters* tab:

1. Select Mandatory Parameters
2. Select any optional parameters

In the *Advanced* tab:

1. Select the format type by choosing either **As number (default)** or **As percentage**
2. Select a **Default** format from those available in the drop-down menu or define a **Custom** format, taking care to respect international conventions involving the dot " as decimal separator and the comma ',' as thousand separator. The character used to separate thousands or decimals will be converted according to the language of the document.
3. Click on **Insert** to add the Amount to the document, or on **Previous** to return to previous tabs.

Once the data entry process is complete, the amount will appear in the document with the same formatting as the paragraph where it was entered.

It is possible to create a customised numeric and/or percentage format defined by a specific 'identifier'. Here are some examples:

1. use the numeric format identifier #,##0 'ths' or #,##0 'mills' to obtain values in thousands and millions;

- use the numeric format identifier '-'. It can be used to replace the numeric value zero with this output format. The format identifier '-' placeholder zero replaces the zero with the corresponding identifier; otherwise, the zero is displayed as the result.

Adding an Amount from a CCH Tagetik Form

In the *Source* tab :

1. Click on **CCH Tagetik Form**

1. Select the **Application Database** from those available in the drop-down menu. Visible Databases are those associated with the authenticated user.

1. Click on the three dots next to **Form** and select the form in which the amount to be entered in the presentation was defined.
2. Select either 'Select area' or 'Custom selection'.
3. In the first case, select an Area from those available. In the second case, add a cell, that is, the location of the amount in the form, specified by row and column.
4. Click Next

In the *Advanced* tab:

1. Select Source (default) to keep the formats of Numbers, Percentages and Dates defined in the source.
2. Click on *Insert* to add the amount to the presentation or on *Previous* to return to previous tabs

Adding an Amount from Excel

In the *Source* tab :

1. Click on Microsoft Excel
2. Click the dots to navigate through the folders of the SharePoint site dedicated to the application and select the desired Excel file.
3. Select either 'Select area' or 'Custom selection'.
4. In the first case, select an Area from those available. In the second case, add a cell, that is, the location of the amount in the form, specified by row and column.
5. Click on *Next*.

In the *Advanced* tab:

1. Choose Source (default) to keep the formats of Numbers, Percentages and Dates defined on the source.
2. Click on *Insert* to add the amount to the presentation or on *Previous* to return to previous tabs

Adding a table to a presentation

CCH Tagetik Ribbon Bar > Objects > New

Tables from different data sources can be added to a presentation.

For all tables, in the *General* tab:

1. Click on New in the object section of the Ribbon Bar.
2. Fill in the form with the mandatory fields and, under Object Type, make sure you select Table.

Below are the procedures to be followed depending on the selected source.

Adding a Table from Tagetik Software S.r.l. Form

In the *Source* tab :

1. Select CCH Tagetik
2. Select the **Application Database** from those available in the drop-down menu. The databases that can be selected are those associated with the user who logged in.
3. Click on ⋮ to browse the form tree and select the desired form, or type the first three characters of the form to be searched (code or description) into the search bar to make a quick selection
4. Select a Sheet from those defined for the Form
5. Select the Area from those defined for the Form
6. Click Next to switch to the *Parameters* tab

In the *Parameters* tab:

1. Click on ⋮ for each mandatory parameter (*): this opens the parameter selection panel.
2. Select a hierarchy/grouping for the dimension to which the parameter refers
3. Select in the dimension tree a single element/node, or several elements/nodes (multi-selection is possible)
4. Click on **Confirm** to add the selected items and return to the tab ***Parameters***
5. Click **Next** to go to the next tab or **Previous** to return to previous tabs

Parameters can also be inherited if dimensions were chosen when creating the document or if these were added in Document Settings in the Ribbon Bar. To inherit a Parameter, simply enable the "Inherit from parent document" option above each Parameter.

In the *Advanced* tab:

1. Choose Source (default) to keep the formats of Numbers, Percentages and Dates defined on the source.
2. Click on *Insert* to add the table to the document or on *Previous* to return to previous tabs

Adding a Table from CCH Tagetik Form as an Image

To insert a table as an image within a presentation, simply enable the option located at the bottom of the *Source* tab. Once enabled:

1. Select a *format* from those available
2. Select the *resolution* from those available

The remaining operations are the same as those described in the procedure for inserting a table.

Adding a Table from Excel

In the *Source* tab :

1. Select **Microsoft Excel**
2. Select the **Excel file** from those available by navigating the menu. Excel files correspond to those in **Sharepoint**.
3. Select a Sheet from those available in the File
4. Select the Area from those available in the selected sheet
5. Click Next to switch to the *Advanced* tab.

Note that for Excel files, the *Parameters* tab is not available.

In the *Advanced* tab:

1. Choose Source (default) to keep the formats of Numbers, Percentages and Dates defined on the source.
2. Click on *Insert* to add the table to the document or on *Previous* to return to previous tabs

Add a table from Excel as an Image

To insert a table as an image within a presentation, simply enable the option at the end of the *Source* tab. Once enabled:

1. Select a *format* from those available
2. Select the *resolution* from those available

The remaining operations are the same as those described in the procedure for inserting a table from Excel.

Table insertion restrictions

PowerPoint applies **more restrictive** rules than Excel: many tables that 'look correct' in Excel may **not be accepted** or may be changed automatically. **In PowerPoint, table structure is more important than style.** Colours, borders and fonts **only work correctly if the table is structurally consiste**nt:
number of columns, width, row height and actual cell presence must be logical and consistent.

When the structure is not consistent, PowerPoint may **automatically change the appearance** (e.g. by adapting columns, resizing text or altering borders) or **reject the table entry altogether**, especially in cases of copy/paste from Excel. When applying **global styles to a table** (such as fonts, alignment, colours or borders), these are automatically extended to **all cells**, regardless of their content or role (headings, totals, notes, etc.). The main critical aspect is that **global styles may conflict with styles manually applied to individual cells**, resulting in unexpected or difficult-to-manage outcomes.

The following must be avoided:

- Columns too narrow for text (minimum 15 pixels)
- Text wrapping (it would be cut off in PowerPoint).
- Too narrow columns with long text
- Columns used as graphic spacers
- Text that does not fit inside the column
- Rows too narrow
- Truncated or overlapping text
- Rows used as graphic spacers

Adding a Visual to the Presentation

 *CCH Tagetik Ribbon Bar > Objects > New*

Within a presentation, you can add Visuals defined in a CCH Tagetik Form or in an Excel file. Visuals are special objects that allow graphs and shapes to be inserted within a slide. A Shape is a set of shapes defined in a data source and having complex formatting. It can only be inserted as an image in SVG format.

1. Click on New in the object section of the Ribbon Bar
2. Fill in the form with the mandatory fields and, under Object Type, make sure you select Visual

Adding a Visual from Tagetik Software S.r.l. Form

In the *Source* tab :

1. Select CCH Tagetik
2. Select the **Application Database** from those available in the drop-down menu. The databases that can be selected are those associated with the user who logged in.
3. Click on the three dots to navigate the form tree and select the desired one or type the first three characters of the form to be searched (code or description) into the search bar to make a quick selection

4. Select a Sheet from those defined for the Form
5. Select a Graph or a Shape from those defined for the Form

Click Next to switch to the *Parameters* tab.

In the *Parameters* tab:

1. Click on the three dots for each mandatory parameter (*) to open the parameter selection panel.
2. Select a hierarchy/grouping for the dimension to which the parameter refers
3. Select in the dimension tree a single element/node, or several elements/nodes (multi-selection is possible)
4. Click on **Confirm** to add the selected items and return to the tab ***Parameters***
5. Click **Next** to go to the next tab or **Previous** to return to previous tabs

Parameters can also be inherited if dimensions were chosen when creating the document or if these were added in Document Settings in the Ribbon Bar. To inherit a Parameter, simply enable the "Inherit from parent document" option above each Parameter

In the *Advanced* tab:

1. Choose Source (default) to keep the formats of Numbers, Percentages and Dates defined on the source.
2. Click on *Insert* to add the table to the document or on *Previous* to return to the previous tabs

Adding a Visual from Tagetik Software S.r.l. Form as an image

To insert a Visual as an image within a presentation, simply enable the option located at the bottom of the *Source* tab. Note that for a Shape, this option is selected by default and cannot be changed since, as referred to in **paragraph 6.1**, a Shape may only be inserted as an image in SVG format. Once enabled:

1. Select a *format* from those available
2. Select the *resolution* from those available

Adding a Visual from Excel

In the *Source* tab :

1. Select **Microsoft Excel**
2. Select the **Excel file** from those available by navigating the menu. Excel files correspond to those in **Sharepoint**.
3. Select a Sheet from those available in the File
4. Select the Visual from those available in the selected sheet
5. Click Next to switch to the *Advanced* tab.

Note that for Excel files, the *Parameters* tab is not available.

In the *Advanced* tab:

1. Choose Source (default) to keep the formats of Numbers, Percentages and Dates defined on the source.
2. Click on *Insert* to add the table to the document or on *Previous* to return to previous tabs

Adding a Visual from Excel as an Image

To insert a Visual as an image within a presentation, simply enable the option located at the bottom of the *Source* tab. Note that for a Shape, this option is selected by default and cannot be changed since, as mentioned above, a Shape may only be inserted as an image in SVG format. Once enabled:

1. Select *format* from those available
2. Select the *resolution* from those available.

Slide Generator

The Slide Generator is a feature that allows multiple slides to be automatically generated from one or more existing slides by varying user-selected parameters or dimensions.

How to generate slides

1. Select one or more slides
2. In the Ribbon Bar, Automations section, click on **Generate**.
3. From the panel that opens, select the reference parameters. Choose a parameter and a **dimension**.

At the end of the operation, N slides will be generated, each with different parameters.

***IMPORTANT**: Slide generator does not distinguish between dimensions and parameters. It shows a single list containing all parameters and all dimensions not included in the parameters. After selecting the values and running the generation operation:*

- the value of the parameter will also be used for objects using dimensions
- dimensions will never be used for parameters.