

ascii

David Hajage

November 23, 2009

ascii
by David Hajage

Contents

1	news	1
1.1	2009/10/28	1
1.2	2009/10/24	1
1.3	2009/10/24	1
1.4	2009/07/16	1
1.5	2009/05/11	1
1.6	2009/04/27	2
1.7	2009/04/08	2
2	short example	2
3	what ascii provides	2
4	features/options	2
5	ascii examples	3
5.1	sessionInfo	4
5.2	vector	4
5.3	matrix	4
5.4	data.frame	5
5.5	row (and col) headings	5
5.6	summary.table	7
5.7	labeled list	7
5.8	glm	8
5.9	describe	9
5.10	CrossTable	12
5.11	plot	13
5.12	other outputs	14
6	convert	15
7	more informations	16
8	ascii for real	16

List of Tables

1	A simple matrix	2
2	VADeaths	5
3	iris	6
4	glm.D93	9
5	anova glm.D93	9

ascii is a R package for writing **asciidoc**, **txt2tags**, **reStructuredText** or **org** documents with embedded R code.

1 news

1.1 2009/10/28

- "results=ascii" for all drivers
- method for `fTable` objects
- method for `packageDescription` objects
- method for `sessionInfo` objects
- fix warning with `asciidoc` list output

1.2 2009/10/24

- small bug fix

1.3 2009/10/24

- version 0.3
- `list.type` can be "label"
- `ascii.simple.list` method
- `rownames` and `colnames` arguments
- `cgroup` for `txt2tags` output
- improve col alignment in `txt2tags` output
- **sphinx** driver and output
- **org** driver and output
- improve row and col span (`cgroup` and `rgroup`)
- remove `SweaveAscii()` function
- `AsciiDoc()`, `T2t()`, `Sphinx()` and `Org()` (wrapper for `Sweave("file.Rnw", RweaveXx-x)`)

1.4 2009/07/16

- version 0.2
- digit and format accept matrix, (each cell can have its own number of digits and format)
- new arguments (`cgroup`, `rgroup`, ...) to define major column and row headings like in `Hmisc::latex()` (only for `asciidoc` output)
- column style and alignment use cell specifiers
- remove `SweaveSyntaxAscii` (bug when `]` is used inside `Sexpr:[]`)

1.5 2009/05/11

- `\SweaveOpts{}` now works
- add `SweaveSyntaxAscii(SweaveOpts:[], Sexpr:[])`
- add a simple wrapper for `Sweave()` (`SweaveAscii()`) that use `RweaveAsciiDoc` and `SweaveSyntaxAscii` as default

1.6 2009/04/27

- add a `caption.level` argument
- improve `ascii.describe` output (package `Hmisc`)

1.7 2009/04/08

- update `DESCRIPTION` (with homepage)
- support for `describe` function in package `Hmisc`

2 short example

```
<<>>=
x <- matrix(1:4, 2, 2)
x
@
```

gives :

```
> x <- matrix(1:4, 2, 2)
> x
      [,1] [,2]
[1,]     1     3
[2,]     2     4
```

```
<<results=ascii,echo=FALSE>>=
ascii(x, caption = "A simple matrix", width = 30)
@
```

gives :

Table 1 A simple matrix

1.00	3.00
2.00	4.00

3 what ascii provides

ascii provided :

- a generic method for common R objects: `ascii()`. Default argument depends of R object,
- several Sweave drivers: `RweaveAsciidoc()`, `RweaveT2t()`, `RweaveReST()` and `RweaveOrg()`.
- some simple wrappers for Sweave ("yourfile.Rnw", `RweaveXxx`) named `Asciidoc()`, `T2t()`, `ReST()` and `Org()`.

4 features/options

See `?ascii` for a complete description of all arguments.

	asciidoc	txt2tags	rest	org
Arguments				
<code>include.rownames</code>	yes	yes	yes	yes
<code>include.colnames</code>	yes	yes	yes	yes
<code>rownames</code>	yes	yes	yes	yes

	asciidoc	txt2tags	rest	org
colnames	yes	yes	yes	yes
format	yes	yes	yes	yes
digits	yes	yes	yes	yes
decimal.mark	yes	yes	yes	yes
na.print	yes	yes	yes	yes
caption	yes	yes	yes	yes
caption.level	yes	yes	yes	yes
width	yes	no	no	no
frame	yes	yes (all or none)	no	no
grid	yes	no	no	no
valign	yes	no	no	no
header	yes	yes	yes	yes
footer	yes	yes	no	no
align	yes	yes	no	no
col.width	yes	no	no	no
style	yes	yes	yes	yes
tgroup	yes	yes	yes	no
n.tgroup	yes	yes	yes	no
talign	yes	yes	no	no
tvalign	yes	no	no	no
tstyle	yes	yes	yes	no
bgroup	yes	no	yes	no
n.bgroup	yes	no	yes	no
balign	yes	no	no	no
bvalign	yes	no	no	no
bstyle	yes	no	yes	no
lgroup	yes	no	yes	no
n.lgroup	yes	no	yes	no
lalign	yes	no	no	no
lvalign	yes	no	no	no
lstyle	yes	no	yes	no
rgroup	yes	no	yes	no
n.rgroup	yes	no	yes	no
ralign	yes	no	no	no
rvalign	yes	no	no	no
rstyle	yes	no	yes	no
list.type	yes	yes	yes	yes
condense	yes	yes	yes	yes
Output				
html	yes	yes	yes	yes
docbook	yes	yes	no	yes
latex	yes (experimental)	yes	yes (col and row spans not implemented yet)	yes
Feature				
syntax color	yes (but not for R...)	no	yes	yes

5 ascii examples

ascii provides methods for:

```
> methods(ascii)
[1] ascii.anova*          ascii.aov*
[3] ascii.aovlist*        ascii.cast_df*
[5] ascii.character*      ascii.coxph*
```

```

[7] ascii.CrossTable*      ascii.data.frame*
[9] ascii.default*         ascii.density*
[11] ascii.describe*        ascii.describe.single*
[13] ascii.factor*          ascii.ftable*
[15] ascii.glm*             ascii.htest*
[17] ascii.integer*         ascii.list*
[19] ascii.lm*              ascii.matrix*
[21] ascii.numeric*         ascii.packageDescription*
[23] ascii.prcomp*          ascii.sessionInfo*
[25] ascii.simple.list*     ascii.smooth.spline*
[27] ascii.summary.aov*     ascii.summary.aovlist*
[29] ascii.summary.glm*     ascii.summary.lm*
[31] ascii.summary.prcomp*  ascii.summary.table*
[33] ascii.survdiff*        ascii.table*
[35] ascii.ts*              ascii.zoo*

```

Non-visible functions are asterisked

5.1 sessionInfo

```

> ascii(sessionInfo())
R version::
  R version 2.10.0 (2009-10-26), i486-pc-linux-gnu
locale::
  LC_CTYPE=fr_FR.UTF-8, LC_NUMERIC=C, LC_TIME=fr_FR.UTF-8, LC_COLLATE=fr_FR.UTF-8, LC_MONETARY=C, LC_MESSAGES=fr_FR.UTF-8, LC_PAPER=fr_FR.UTF-8, LC_NAME=C, LC_ADDRESS=C, LC_TELEPHONE=C, LC_MEASUREMENT=fr_FR.UTF-8, LC_IDENTIFICATION=C
attached base packages::
  stats, graphics, grDevices, utils, datasets, methods, base
other attached packages::
  ascii_0.4, proto_0.3-8
loaded via a namespace (and not attached)::
  tools_2.10.0

```

R version R version 2.10.0 (2009-10-26), i486-pc-linux-gnu

locale LC_CTYPE=fr_FR.UTF-8, LC_NUMERIC=C, LC_TIME=fr_FR.UTF-8, LC_COLLATE=fr_FR.UTF-8, LC_MONETARY=C, LC_MESSAGES=fr_FR.UTF-8, LC_PAPER=fr_FR.UTF-8, LC_NAME=C, LC_ADDRESS=C, LC_TELEPHONE=C, LC_MEASUREMENT=fr_FR.UTF-8, LC_IDENTIFICATION=C

attached base packages stats, graphics, grDevices, utils, datasets, methods, base

other attached packages ascii_0.4, proto_0.3-8

loaded via a namespace (and not attached) tools_2.10.0

5.2 vector

```

> ascii(1:4)
|=====
| 1.00 | 2.00 | 3.00 | 4.00
|=====

```

1.00	2.00	3.00	4.00
------	------	------	------

5.3 matrix

```
> ascii(VADeaths, include.rownames = T, include.colnames = T, caption = "VADeaths ↵",
+       header = T, col.width = c(1, 2, 2, 2, 2, 2), valign = "middle",
+       align = "lrrrr", frame = "topbot")
.VADeaths
[frame="topbot",valign="middle",options="header",cols="1,2,2,2,2"]
|=====
<.^|      >.^| Rural Male >.^| Rural Female >.^| Urban Male >.^| Urban Female
<.^| 50-54 >.^| 11.70      >.^| 8.70          >.^| 15.40      >.^| 8.40
<.^| 55-59 >.^| 18.10      >.^| 11.70         >.^| 24.30      >.^| 13.60
<.^| 60-64 >.^| 26.90      >.^| 20.30         >.^| 37.00      >.^| 19.30
<.^| 65-69 >.^| 41.00      >.^| 30.90         >.^| 54.60      >.^| 35.10
<.^| 70-74 >.^| 66.00      >.^| 54.30         >.^| 71.10      >.^| 50.00
|=====
```

Table 2 VADeaths

	Rural Male	Rural Female	Urban Male	Urban Female
50-54	11.70	8.70	15.40	8.40
55-59	18.10	11.70	24.30	13.60
60-64	26.90	20.30	37.00	19.30
65-69	41.00	30.90	54.60	35.10
70-74	66.00	54.30	71.10	50.00

5.4 data.frame

```
> ascii(iris[1:10, ], include.rownames = F, caption = "iris", width = 75,
+       align = "c", valign = "bottom", frame = "topbot", grid = "none")
.iris
[frame="topbot",grid="none",valign="bottom",options="header",width="75%"]
|===== ↵
^.>| Sepal.Length ^.>| Sepal.Width ^.>| Petal.Length ^.>| Petal.Width ^.>| ↵
Species
^.>| 5.10          ^.>| 3.50          ^.>| 1.40          ^.>| 0.20          ^.>| setosa
^.>| 4.90          ^.>| 3.00          ^.>| 1.40          ^.>| 0.20          ^.>| setosa
^.>| 4.70          ^.>| 3.20          ^.>| 1.30          ^.>| 0.20          ^.>| setosa
^.>| 4.60          ^.>| 3.10          ^.>| 1.50          ^.>| 0.20          ^.>| setosa
^.>| 5.00          ^.>| 3.60          ^.>| 1.40          ^.>| 0.20          ^.>| setosa
^.>| 5.40          ^.>| 3.90          ^.>| 1.70          ^.>| 0.40          ^.>| setosa
^.>| 4.60          ^.>| 3.40          ^.>| 1.40          ^.>| 0.30          ^.>| setosa
^.>| 5.00          ^.>| 3.40          ^.>| 1.50          ^.>| 0.20          ^.>| setosa
^.>| 4.40          ^.>| 2.90          ^.>| 1.40          ^.>| 0.20          ^.>| setosa
^.>| 4.90          ^.>| 3.10          ^.>| 1.50          ^.>| 0.10          ^.>| setosa
|===== ↵
```

5.5 row (and col) headings

```
> library(reshape)
> ff_d <- melt(french_fries, id = 1:4, na.rm = TRUE)
> toto <- cast(ff_d, treatment + subject ~ variable, mean, margins = "treatment")
> ascii(toto[, -1], lgroup = c("Treatment", paste("Treatment:",
+       as.character(unique(toto[, 1])))), n.lgroup = c(1, table(toto[,
+       1])), rstyle = "s", lalign = "middle")
[options="header"]
|=====
.1+.^| Treatment | subject | potato | buttery | grassy | rancid | painty
.13+.^| Treatment: 1 | 3      | 6.22  | 0.37   | 0.19   | 2.11   | 3.11
```

Table 3 iris

Sepal.Length	Sepal.Width	Petal.Length	Petal.Width	Species
5.10	3.50	1.40	0.20	setosa
4.90	3.00	1.40	0.20	setosa
4.70	3.20	1.30	0.20	setosa
4.60	3.10	1.50	0.20	setosa
5.00	3.60	1.40	0.20	setosa
5.40	3.90	1.70	0.40	setosa
4.60	3.40	1.40	0.30	setosa
5.00	3.40	1.50	0.20	setosa
4.40	2.90	1.40	0.20	setosa
4.90	3.10	1.50	0.10	setosa

```
| 10      | 9.96 | 6.75 | 0.58 | 4.02 | 1.38
| 15      | 3.36 | 0.72 | 0.42 | 3.96 | 3.26
| 16      | 6.50 | 3.26 | 0.76 | 4.12 | 1.23
| 19      | 9.38 | 3.06 | 2.02 | 5.36 | 2.77
| 31      | 8.84 | 0.44 | 0.09 | 5.94 | 3.21
| 51      | 10.68 | 2.64 | 1.05 | 5.15 | 1.96
| 52      | 5.06 | 0.81 | 0.88 | 4.29 | 2.65
| 63      | 6.78 | 0.03 | 0.00 | 6.05 | 3.85
| 78      | 3.62 | 0.73 | 0.54 | 1.50 | 3.49
| 79      | 8.06 | 0.28 | 0.34 | 0.57 | 0.00
| 86      | 4.18 | 1.77 | 0.81 | 5.49 | 4.11
| (all)   | 6.89 | 1.78 | 0.65 | 4.07 | 2.58
.13+.^| Treatment: 2 | 3      | 6.74 | 0.59 | 0.11 | 3.14 | 2.48
| 10      | 9.99 | 6.98 | 0.47 | 2.15 | 0.82
| 15      | 4.41 | 1.31 | 0.34 | 2.29 | 2.06
| 16      | 6.45 | 3.37 | 1.05 | 3.40 | 0.46
| 19      | 8.64 | 2.45 | 1.14 | 5.41 | 4.16
| 31      | 8.03 | 0.62 | 0.16 | 6.05 | 5.06
| 51      | 9.98 | 3.79 | 1.57 | 4.67 | 2.25
| 52      | 5.51 | 1.02 | 1.18 | 4.22 | 2.19
| 63      | 8.41 | 0.10 | 0.01 | 5.09 | 4.36
| 78      | 3.78 | 0.29 | 0.76 | 1.55 | 2.73
| 79      | 7.94 | 0.69 | 0.26 | 1.03 | 0.00
| 86      | 3.99 | 2.06 | 0.78 | 4.52 | 2.84
| (all)   | 7.00 | 1.97 | 0.66 | 3.62 | 2.46
.13+.^| Treatment: 3 | 3      | 5.29 | 0.77 | 0.09 | 2.86 | 2.87
| 10      | 10.03 | 6.45 | 0.14 | 3.11 | 0.69
| 15      | 3.96 | 0.99 | 0.44 | 2.55 | 2.37
| 16      | 6.86 | 2.70 | 1.12 | 3.20 | 0.56
| 19      | 8.74 | 1.73 | 2.07 | 7.24 | 3.90
| 31      | 9.03 | 0.65 | 0.17 | 6.58 | 5.13
| 51      | 10.22 | 3.13 | 1.35 | 4.92 | 2.54
| 52      | 5.47 | 0.86 | 0.77 | 3.16 | 2.66
| 63      | 8.06 | 0.07 | 0.12 | 6.18 | 3.10
| 78      | 4.00 | 0.70 | 0.67 | 1.19 | 3.52
| 79      | 7.73 | 0.57 | 0.12 | 1.18 | 0.03
| 86      | 3.87 | 1.63 | 0.94 | 4.11 | 3.03
| (all)   | 6.97 | 1.72 | 0.68 | 3.87 | 2.53
=====
```

Treatment	subject	potato	buttery	grassy	rancid	painty
Treatment: 1	3	6.22	0.37	0.19	2.11	3.11
	10	9.96	6.75	0.58	4.02	1.38
	15	3.36	0.72	0.42	3.96	3.26
	16	6.50	3.26	0.76	4.12	1.23
	19	9.38	3.06	2.02	5.36	2.77
	31	8.84	0.44	0.09	5.94	3.21

Treatment	subject	potato	buttery	grassy	rancid	painty
	51	10.68	2.64	1.05	5.15	1.96
	52	5.06	0.81	0.88	4.29	2.65
	63	6.78	0.03	0.00	6.05	3.85
	78	3.62	0.73	0.54	1.50	3.49
	79	8.06	0.28	0.34	0.57	0.00
	86	4.18	1.77	0.81	5.49	4.11
	(all)	6.89	1.78	0.65	4.07	2.58
Treatment: 2	3	6.74	0.59	0.11	3.14	2.48
	10	9.99	6.98	0.47	2.15	0.82
	15	4.41	1.31	0.34	2.29	2.06
	16	6.45	3.37	1.05	3.40	0.46
	19	8.64	2.45	1.14	5.41	4.16
	31	8.03	0.62	0.16	6.05	5.06
	51	9.98	3.79	1.57	4.67	2.25
	52	5.51	1.02	1.18	4.22	2.19
	63	8.41	0.10	0.01	5.09	4.36
	78	3.78	0.29	0.76	1.55	2.73
	79	7.94	0.69	0.26	1.03	0.00
	86	3.99	2.06	0.78	4.52	2.84
	(all)	7.00	1.97	0.66	3.62	2.46
Treatment: 3	3	5.29	0.77	0.09	2.86	2.87
	10	10.03	6.45	0.14	3.11	0.69
	15	3.96	0.99	0.44	2.55	2.37
	16	6.86	2.70	1.12	3.20	0.56
	19	8.74	1.73	2.07	7.24	3.90
	31	9.03	0.65	0.17	6.58	5.13
	51	10.22	3.13	1.35	4.92	2.54
	52	5.47	0.86	0.77	3.16	2.66
	63	8.06	0.07	0.12	6.18	3.10
	78	4.00	0.70	0.67	1.19	3.52
	79	7.73	0.57	0.12	1.18	0.03
	86	3.87	1.63	0.94	4.11	3.03
	(all)	6.97	1.72	0.68	3.87	2.53

5.6 summary.table

```
> ascii(summary(table(1:4, 1:4)))
* Number of cases in table: 4
* Number of factors: 2
* Test for independence of all factors:
** Chisq = 12, df = 9, p-value = 0.2133
** Chi-squared approximation may be incorrect
```

- Number of cases in table: 4
- Number of factors: 2
- Test for independence of all factors:
 - Chisq = 12, df = 9, p-value = 0.2133
 - Chi-squared approximation may be incorrect

5.7 labeled list

```
> ascii(version)
platform::
i486-pc-linux-gnu
```

```

arch::
  i486
os::
  linux-gnu
system::
  i486, linux-gnu
status::

major::
  2
minor::
  10.0
year::
  2009
month::
  10
day::
  26
svn rev::
  50208
language::
  R
version.string::
  R version 2.10.0 (2009-10-26)

```

platform i486-pc-linux-gnu

arch i486

os linux-gnu

system i486, linux-gnu

status, major 2

minor 10.0

year 2009

month 10

day 26

svn rev 50208

language R

version.string R version 2.10.0 (2009-10-26)

5.8 glm

```

> counts <- c(18, 17, 15, 20, 10, 20, 25, 13, 12)
> outcome <- gl(3, 1, 9)
> treatment <- gl(3, 3)
> d.AD <- data.frame(treatment, outcome, counts)
> glm.D93 <- glm(counts ~ outcome + treatment, family = poisson())
> glm.D93
Call:  glm(formula = counts ~ outcome + treatment, family = poisson())

```

Coefficients:

(Intercept)	outcome2	outcome3	treatment2	treatment3
3.045e+00	-4.543e-01	-2.930e-01	8.717e-16	4.557e-16

Degrees of Freedom: 8 Total (i.e. Null); 4 Residual

Null Deviance: 10.58

```

Residual Deviance: 5.129      AIC: 56.76
> ascii(glm.D93, caption = "glm.D93")
.glm.D93
[options="header"]
|=====
|      | Estimate | Std. Error | z value | Pr(>|z|) |
| (Intercept) | 3.04      | 0.17      | 17.81   | 0.00     |
| outcome2    | -0.45     | 0.20      | -2.25   | 0.02     |
| outcome3    | -0.29     | 0.19      | -1.52   | 0.13     |
| treatment2  | 0.00      | 0.20      | 0.00    | 1.00     |
| treatment3  | 0.00      | 0.20      | 0.00    | 1.00     |
|=====
> ascii(anova(glm.D93), caption = "anova glm.D93", include.rownames = T)
.anova glm.D93
[options="header"]
|=====
|      | Df   | Deviance | Resid. Df | Resid. Dev |
| NULL  |      |          | 8.00      | 10.58      |
| outcome | 2.00 | 5.45     | 6.00      | 5.13       |
| treatment | 2.00 | 0.00     | 4.00      | 5.13       |
|=====

```

Table 4 glm.D93

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	3.04	0.17	17.81	0.00
outcome2	-0.45	0.20	-2.25	0.02
outcome3	-0.29	0.19	-1.52	0.13
treatment2	0.00	0.20	0.00	1.00
treatment3	0.00	0.20	0.00	1.00

Table 5 anova glm.D93

	Df	Deviance	Resid. Df	Resid. Dev
NULL			8.00	10.58
outcome	2.00	5.45	6.00	5.13
treatment	2.00	0.00	4.00	5.13

5.9 describe

```

> library(Hmisc)
> label(esoph$agegp) <- "Age group"
> label(esoph$alcgp) <- "Alcohol group"
> label(esoph$stobgp) <- "Tobacco group"
> label(esoph$ncontrols) <- "Number of control"
> label(esoph$age) <- "Age"
> units(esoph$age) <- "Years"
> ascii(describe(esoph))
.esoph
* 6 Variable
* 88 Observations

*agegp : Age group*

|=====
| n | missing | unique |
| 88 | 0      | 6      |
|=====

```

```

=====
|      | 25-34 | 35-44 | 45-54 | 55-64 | 65-74 | 75+
| Frequency | 15   | 15   | 16   | 16   | 15   | 11
| %         | 17   | 17   | 18   | 18   | 17   | 12
=====

*alocgp : Alcohol group*

=====
| n | missing | unique
| 88 | 0      | 4
=====

0-39g/day (23, 26%), 40-79 (23, 26%), 80-119 (21, 24%), 120+ (21, 24%)

*tobgrp : Tobacco group*

=====
| n | missing | unique
| 88 | 0      | 4
=====

0-9g/day (24, 27%), 10-19 (24, 27%), 20-29 (20, 23%), 30+ (20, 23%)

*ncases*

=====
| n | missing | unique | Mean | .05 | .10 | .25 | .50 | .75 | .90 | .95
| 88 | 0      | 10     | 2.273 | 0.0 | 0.0 | 0.0 | 1.0 | 4.0 | 5.3 | 6.0
=====

=====
|      | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 8 | 9 | 17
| Frequency | 29 | 16 | 11 | 9 | 8 | 6 | 5 | 1 | 2 | 1
| %         | 33 | 18 | 12 | 10 | 9 | 7 | 6 | 1 | 2 | 1
=====

*nccontrols : Number of control*

=====
| n | missing | unique | Mean | .05 | .10 | .25 | .50 | .75 | .90 | .95
| 88 | 0      | 30     | 11.08 | 1.0 | 1.0 | 3.0 | 6.0 | 14.0 | 29.1 | 40.0
=====

lowest:  1  2  3  4  5, highest: 40 46 48 49 60

*age : Age [Years]*

=====
| n | missing | unique
| 88 | 0      | 6
=====

=====
|      | 25-34 | 35-44 | 45-54 | 55-64 | 65-74 | 75+
| Frequency | 15   | 15   | 16   | 16   | 15   | 11
| %         | 17   | 17   | 18   | 18   | 17   | 12
=====

```

ESOPH

- 6 Variable
- 88 Observations

agegp : Age group

n	missing	unique
88	0	6

	25-34	35-44	45-54	55-64	65-74	75+
Frequency	15	15	16	16	15	11
%	17	17	18	18	17	12

alcgp : Alcohol group

n	missing	unique
88	0	4

0-39g/day (23, 26%), 40-79 (23, 26%), 80-119 (21, 24%), 120+ (21, 24%)

tobgp : Tobacco group

n	missing	unique
88	0	4

0-9g/day (24, 27%), 10-19 (24, 27%), 20-29 (20, 23%), 30+ (20, 23%)

ncases

n	missing	unique	Mean	.05	.10	.25	.50	.75	.90	.95
88	0	10	2.273	0.0	0.0	0.0	1.0	4.0	5.3	6.0

	0	1	2	3	4	5	6	8	9	17
Frequency	29	16	11	9	8	6	5	1	2	1
%	33	18	12	10	9	7	6	1	2	1

ncontrols : Number of control

n	missing	unique	Mean	.05	.10	.25	.50	.75	.90	.95
88	0	30	11.08	1.0	1.0	3.0	6.0	14.0	29.1	40.0

lowest: 1 2 3 4 5, highest: 40 46 48 49 60

age : Age [Years]

n	missing	unique
88	0	6

	25-34	35-44	45-54	55-64	65-74	75+
Frequency	15	15	16	16	15	11
%	17	17	18	18	17	12

5.10 CrossTable

```
> library(descr)
> ascii(CrossTable(warpbreaks$wool, warpbreaks$tension, dnn = c("Wool",
+   "Tension")))
*Cell Contents*

* N
* Expected N
* Chi-square contribution
* N / Row Total
* N / Col Total
```

```

* N / Table Total

[options="header"]
|=====
.1+s|   | L       | M       | H       | Total
.6+s| A | 9       | 9       | 9       | 27
| 9.0 | 9.0    | 9.0    |         |
| 0.000 | 0.000 | 0.000 |         |
| 0.333 | 0.333 | 0.333 | 0.500
| 0.500 | 0.500 | 0.500 |         |
| 0.167 | 0.167 | 0.167 |         |
.6+s| B | 9       | 9       | 9       | 27
| 9.0 | 9.0    | 9.0    |         |
| 0.000 | 0.000 | 0.000 |         |
| 0.333 | 0.333 | 0.333 | 0.500
| 0.500 | 0.500 | 0.500 |         |
| 0.167 | 0.167 | 0.167 |         |
.2+s| Total | 18     | 18     | 18     | 54
| 0.333 | 0.333 | 0.333 |         |
|=====

*Statistics for All Table Factors*

Pearson's Chi-squared test::
  Chi^2 = 0      d.f. = 2      p = 1

```

Cell Contents

- N
- Expected N
- Chi-square contribution
- N / Row Total
- N / Col Total
- N / Table Total


	L	M	H	Total
A	9	9	9	27
	9.0	9.0	9.0	
	0.000	0.000	0.000	
	0.333	0.333	0.333	0.500
	0.500	0.500	0.500	
	0.167	0.167	0.167	
B	9	9	9	27
	9.0	9.0	9.0	
	0.000	0.000	0.000	
	0.333	0.333	0.333	0.500
	0.500	0.500	0.500	
	0.167	0.167	0.167	
Total	18	18	18	54
	0.333	0.333	0.333	

Statistics for All Table Factors

Pearson's Chi-squared test Chi^2 = 0 d.f. = 2 p = 1

5.11 plot

```
> library(ggplot2)
> p <- qplot(price, ..density.., data = diamonds, geom = "freqpoly",
+   binwidth = 1000, colour = color)
> print(p)
```

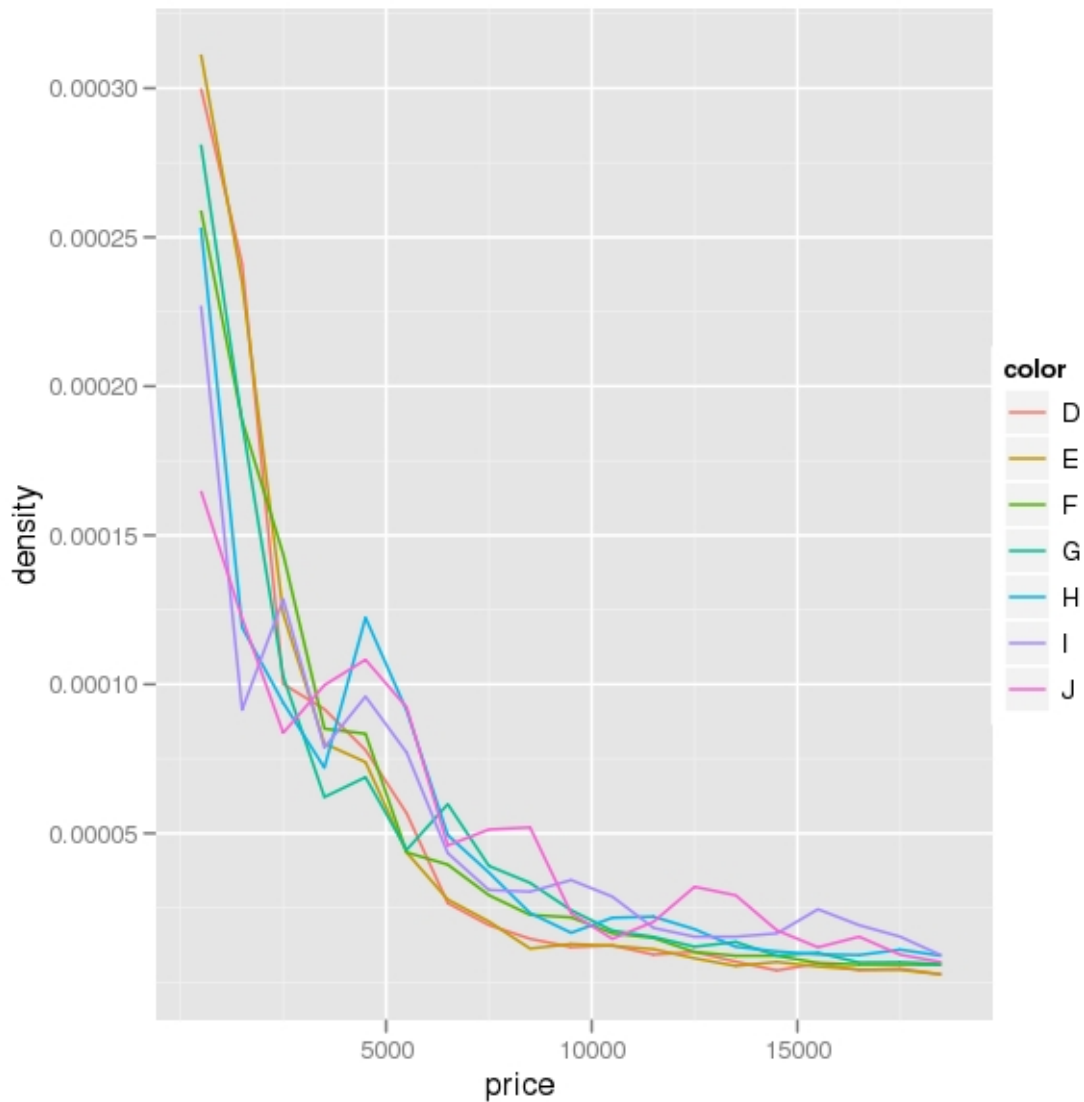

5.12 other outputs

```
> library(reshape)
> names(airquality) <- tolower(names(airquality))
> aqm <- melt(airquality, id = c("month", "day"), na.rm = TRUE)
> res <- cast(aqm, month ~ variable, mean, margins = "grand_row")
> res
```

month	ozone	solar.r	wind	temp	
1	5	23.61538	181.2963	11.622581	65.54839
2	6	29.44444	190.1667	10.266667	79.10000
3	7	59.11538	216.4839	8.941935	83.90323
4	8	59.96154	171.8571	8.793548	83.96774
5	9	31.44828	167.4333	10.180000	76.90000
6 (all)	42.12931	185.9315	9.957516	77.88235	

```
> print(ascii(res), "t2t")
|| month | ozone | solar.r | wind | temp |
| 5      | 23.62 | 181.30 | 11.62 | 65.55 |
```



```
| 6      | 29.44 | 190.17 | 10.27 | 79.10 |
| 7      | 59.12 | 216.48 | 8.94  | 83.90 |
| 8      | 59.96 | 171.86 | 8.79  | 83.97 |
| 9      | 31.45 | 167.43 | 10.18 | 76.90 |
| (all)  | 42.13 | 185.93 | 9.96  | 77.88 |
> print(ascii(res), "rest")
+-----+-----+-----+-----+
| month | ozone | solar.r | wind  | temp  |
+=====+=====+=====+=====+
| 5      | 23.62 | 181.30  | 11.62 | 65.55 |
+-----+-----+-----+-----+
| 6      | 29.44 | 190.17  | 10.27 | 79.10 |
+-----+-----+-----+-----+
| 7      | 59.12 | 216.48  | 8.94  | 83.90 |
+-----+-----+-----+-----+
| 8      | 59.96 | 171.86  | 8.79  | 83.97 |
+-----+-----+-----+-----+
| 9      | 31.45 | 167.43  | 10.18 | 76.90 |
+-----+-----+-----+-----+
| (all)  | 42.13 | 185.93  | 9.96  | 77.88 |
+-----+-----+-----+-----+
> print(ascii(res), "org")
|-----+-----+-----+-----+
| month | ozone | solar.r | wind  | temp  |
|-----+-----+-----+-----+
| 5      | 23.62 | 181.30  | 11.62 | 65.55 |
| 6      | 29.44 | 190.17  | 10.27 | 79.10 |
| 7      | 59.12 | 216.48  | 8.94  | 83.90 |
| 8      | 59.96 | 171.86  | 8.79  | 83.97 |
| 9      | 31.45 | 167.43  | 10.18 | 76.90 |
| (all)  | 42.13 | 185.93  | 9.96  | 77.88 |
|-----+-----+-----+-----+
```

Follow those links to see real examples:

- [with text2tags](#)
- [with reStructuredText](#)
- [with org](#)

6 convert

Sweave process creates a `yourdocument.xxx` file from `yourdocument.Rnw`.

```
Sweave("yourdocument.Rnw", RweaveXxx)
```

You can convert it to html format with the following command:

```
asciidoc yourdocument.txt
or
txt2tags -t html yourdocument.t2t
or
rst2html-highlight --stylesheet-path=pygments-default.css -s rest.rst rest.html
or
Alt-X org-export-as-html
```

or to other formats...

For example, you can see the source of [this documentation](#), the file [generated by Sweave](#), the same file in [docbook format](#), the same file [converted to pdf](#) with `dblatex`, and the same file [converted to odt](#) with `docbook2odf`.

7 more informations

asciidoc <http://www.methods.co.nz/asciidoc>

txt2tags <http://txt2tags.sourceforge.net>

docutils and reStructuredText <http://docutils.sourceforge.net/>

org-mode <http://orgmode.org/>

There is another way to create org documents with embedded R code : [org-babel](#). Thanks to [Erik Iverson](#) for informing me about org-mode and org-babel.

8 ascii for real

- Derek H. Ogle has written [some vignettes](#) for the book ‘Analysis and Interpretation of Freshwater Fisheries Data’ using [ascii](#).
- [This blog](#) uses [ascii](#) and [blogpost](#) to generate and publish post.
- [This blog](#) too but with [another method](#).