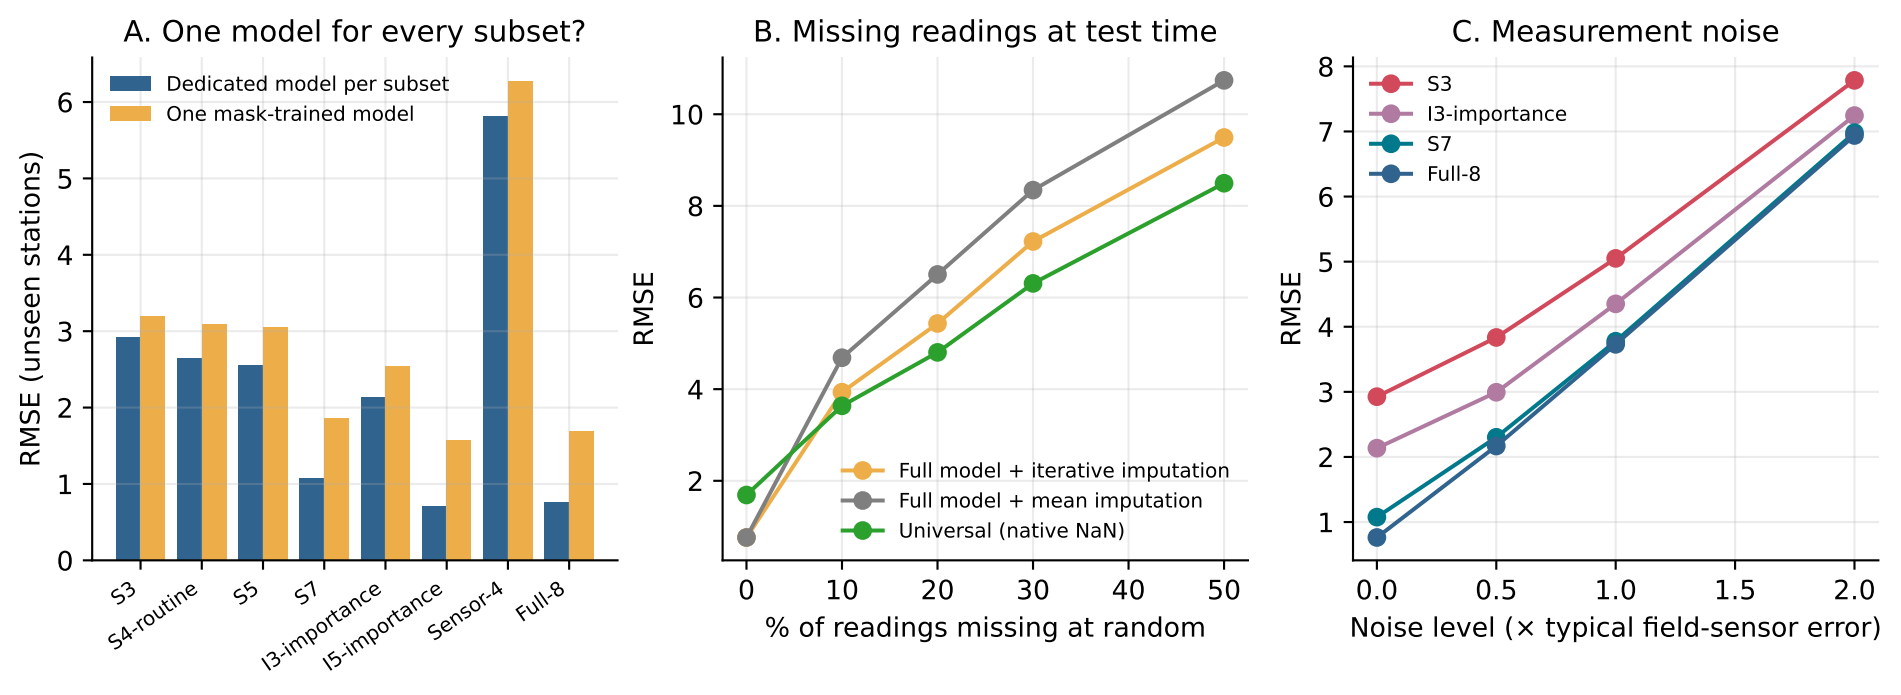
A. One model for every subset?
Dedicated model per subset
One mask-trained model
RMSE (unseen stations)
0
1
2
3
4
5
6
S3
S4-routine
S5
S7
I3-importance
I5-importance
Sensor-4
Full-8
B. Missing readings at test time
RMSE
2
4
6
8
10
0
10
20
30
40
50
% of readings missing at random
Full model + iterative imputation
Full model + mean imputation
Universal (native NaN)
C. Measurement noise
RMSE
1
2
3
4
5
6
7
8
0.0
0.5
1.0
1.5
2.0
Noise level (× typical field-sensor error)
S3
I3-importance
S7
Full-8