## car viz.R

## xuchen

2021-09-20


```
library(tidyverse)
```

```
## Warning: package 'tidyverse' was built under R version 3.6.2
## -- Attaching packages ------ tidyverse 1.3.1 --
## v ggplot2 3.3.5
                      v purrr
                              0.3.4
## v tibble 3.1.4
                      v dplyr
                              1.0.7
## v tidyr
          1.1.3
                   v stringr 1.4.0
                     v forcats 0.5.1
## v readr
           2.0.1
## Warning: package 'ggplot2' was built under R version 3.6.2
## Warning: package 'tibble' was built under R version 3.6.2
## Warning: package 'tidyr' was built under R version 3.6.2
## Warning: package 'readr' was built under R version 3.6.2
## Warning: package 'purrr' was built under R version 3.6.2
## Warning: package 'dplyr' was built under R version 3.6.2
## Warning: package 'forcats' was built under R version 3.6.2
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()
                  masks stats::lag()
# call built-in data mtcars.
data(mtcars)
# Select only car models where mpg<20
mtcars_mpg2 <- mtcars[mtcars$mpg < 20,]</pre>
# Reduce the variables to mpg, cyl, disp, hp, gears
mtcars_mpg2 <- mtcars_mpg2[, c(1,2,3,4,10)]
# read the R file hand_functions.R so that it can be used
# notice that with echo = TRUE
source(file = "hand_functions.R", echo = TRUE)
##
## > sum_special <- function(df_x) {</pre>
        try(if (!is.data.frame(df_x))
## +
## +
            stop("Input data must be a data frame."))
        sp_means <- apply(df_ .... [TRUNCATED]</pre>
# Now use the function from hand_functions.R
sp_out <- sum_special(mtcars_mpg2)</pre>
```

```
# library(esquisse)
#
# esquisser(data = mtcars_mpg2, viewer = "browser")

ggplot(mtcars_mpg2) +
   aes(x = disp, y = mpg) +
   geom_point(shape = "bullet", size = 4L, colour = "#B22222") +
   geom_smooth(span = 0.5) +
   theme_minimal()
```

## `geom\_smooth()` using method = 'loess' and formula 'y ~ x'

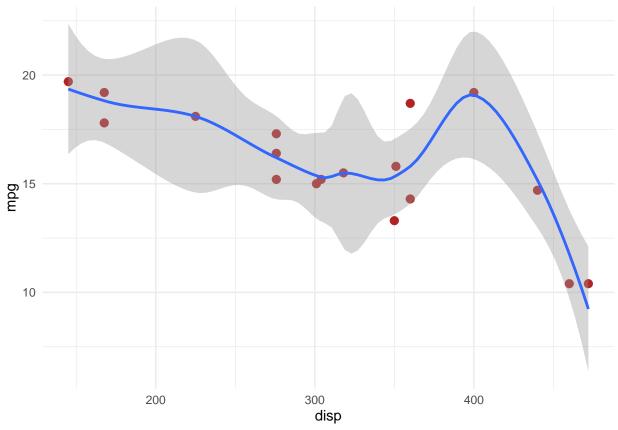

```
# note that this boxplot cannot be made with esquisse() unless
# the data is adjusted. What adjustment is needed?

ggplot(mtcars_mpg2, aes(x=as.factor(cyl), y=mpg)) +
   geom_boxplot(fill="slateblue", alpha=0.2) +
   xlab("cyl")
```

