

Web Development

>> HTML: Tables

This lecture is based on lectures prepared by Dr. Mohammed Misbhauddin | Updated and Modified by Dr. Mohamed Eltaweel

Tables use in HTML before CSS

- They were used before for layout styling, but this was delaying the loading of pages, currently, Tables are used only for organizing data .
- Used to store tabular data so it is easy to read!
- The table is included in the <table> tag
- A table consists of rows and columns

<table>

<tr>	<td>.....</td>	<td>.....</td>	<td>.....</td>	</tr>
<tr>	<td>.....</td>	<td>.....</td>	<td>.....</td>	</tr>

</table>

```

<body>
<table style="width:100%" border="1">
<caption>Students Results</caption>
  <tr>
    <th>Name</th>
    <th>Course</th>
    <th>Grade</th>
  </tr>
  <tr>
    <td>Ahmed</td>
    <td>Database</td>
    <td>80</td>
  </tr>
  <tr>
    <td>Ola</td>
    <td>Database</td>
    <td>74</td>
  </tr>
  <tr>
    <td>Hossam</td>
    <td>Information systems</td>
    <td>90</td>
  </tr>
</table>
</body>

```

Students Results		
Name	Course	Grade
Ahmed	Database	80
Ola	Database	74
Hossam	Information systems	90

Table Headers

- Tables in HTML5 are separated into head, body and foot
- `<thead>` tag can be thought of as containing information about a table header
- `<tbody>` tag containing the actual tabular data
- `<tfoot>` tag is used to summarize the data in the bottom

```
<table>  
  
<thead> <tr> <th>.....</th> <th>.....</th> </tr> </thead>  
<tbody> <tr> <td>.....</td> <td>.....</td> </tr>  
          <tr> <td>.....</td> <td>.....</td> </tr> </tbody>  
  
</table>
```

Column Span

- Merging Columns Together
- Use “colspan” attribute

<td colspan="3">

Grades for Students		

Row Span

- Merging Rows Together
- Use “rowspan” attribute
- **rowspan** cannot cross **thead** or **tbody** boundaries

<td rowspan="2">		

Table Attributes

- Optional Table Attributes
 - **border** - sets the thickness of the border
 - **bgcolor** – sets the background color
 - **align**={Left | Center | Right}
 - **width**={px (pixels) | % (percent)}
 - **cellspacing** – Increase distance between the cells
 - **cellpadding** – White space between cell border and cell data

Cell Attributes

- **Row Attributes**

- **align** – Horizontal Alignment (right, center, left)
- **valign** – Vertical Alignment (top, center, bottom)

- **Column Attributes**

- **colspan** – Horizontal Span (Merging Columns)
- **rowspan** – Vertical Span (Merging Rows)
- **align** – Horizontal Alignment
- **valign** – Vertical Alignment

Assignment

		First	Second	Third	Total
	Quiz	8	10	8	26
	Major	30	35	40	105
	<i>Total</i>				126

HINTS

- To make text bold, include it inside the `<strong>` tag
- To make a text italic, include it inside the `<em>` tag

Summary

- Start Tags include attributes that add extra information on how the content is handled by the browser
- Tables are used to organize data on a webpage
- Tables are divided into thead, tbody and tfoot
- Tables rows and columns are specified using **tr** (table row) and **td** (table data) [th for table header).
- Rows and columns can be merged together using **rowspan** and **colspan** attributes

Forms

- HTML Forms are required, when you want to collect some data from the site visitor.

Ex: during user registration you would like to collect information such as name, email address, credit card, etc.

```
<form >
```

```
    First name: <input type = "text" name = "first_name" />
```

```
    <br>
```

```
    Last name: <input type = "text" name = "last_name" />
```

```
</form>
```

Form Attributes

- **action**

- Backend script ready to process your passed data.

- **method**

- Method to be used to upload data. The most frequently used are **GET** and **POST** methods.

- **target**

- Specify the target window or frame where the result of the script will be displayed. It takes values like `_blank`, `_self`, etc.

Method Attribute

1- GET: The form-data can be sent as URL variables in name/value pairs

- Useful for form submissions where a user wants to bookmark the result
- Example:
 - `<form action="/action_page.php" method="get">`
 - [URL:https://...../action_page.php?fname=John&lname=Doe](https://...../action_page.php?fname=John&lname=Doe)

GET

```
<!DOCTYPE html>
<html>
<body>

<p>This form will be submitted using the GET method:</p>

<form action="/action_page.php" target="_blank"
method="get">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="Heba">
<br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Zaki">
<br><br>
  <input type="submit" value="Submit">
</form>
|
</body>
</html>
```

This form will be submitted using the GET method:

First name:

Last name:

← → ↻ 🔒 /action_page.php?fname=Heba&lname=Zaki 📦 🔍 ☆

📱 Apps 📁 Imported From IE 🌐 Google Translate 📺 Lesson 13: While Lo... ★ Bookmarks

Submitted Form Data

Your input was received as:

fname=Heba&lname=Zaki

The server has processed your input and returned this answer.

Method Attribute

2- POST : Appends the form data inside the body of the HTTP request (the submitted form data is not shown in the URL)

- Has no size limitations.
- Example:
 - `<form action="/action_page.php" method="post">`
 - [URL:https://...../action_page.php](https://...../action_page.php)
 - Inside the action_page.php:
Your input was received as:
fname=Heba&lname=Zaki
The server has processed your input and returned this answer.

POST

```
<!DOCTYPE html>
<html>
<body>

<p>This form will be submitted using the POST method:</p>

<form action="/action_page.php" target="_blank" method="post">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="Heba"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Zaki"><br>
<br>
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

This form will be submitted using the POST method:

First name:

Last name:

← → ↻ 🔒 ls.com/action_page.php 📱 🔍 ☆ ⌵ Pause

📱 Apps 📁 Imported From IE 🗣️ Google Translate

Submitted Form Data

Your input was received as:

fname=Heba&lname=Zaki

The server has processed your input and returned this answer.

Form Attributes

- **enctype**

- The enctype attribute specifies how the form-data should be encoded when submitting it to the server.
- **Note:** The enctype attribute can be used only if method="post".

Value	Description
application/x-www-form-urlencoded	Default. All characters are encoded before sent (spaces are converted to "+" symbols, and special characters are converted to ASCII HEX values)
multipart/form-data	No characters are encoded. This value is required when you are using forms that have a file upload control
text/plain	Spaces are converted to "+" symbols, but no special characters are encoded

Form Text Input Controls

There are three types of text input used on forms –

- **Single-line text input controls** – This control is used for items that require only one line of user input.
- **Password input controls** – This is also a single-line text input but it masks the character as soon as a user enters it.
- **Multi-line text input controls** – This is used when the user is required to give details that may be longer than a single sentence (**<textarea>**)tag.

Attributes for Form Text Input Controls

Attribute & Description

type

Indicates the type of input control and for text input control it will be set to **text**.

name

Used to give a name to the control which is sent to the server to be recognized and get the value.

value

This can be used to provide an initial value inside the control.

size

Allows to specify the width of the text-input control in terms of characters.

maxlength

Allows to specify the maximum number of characters a user can enter into the text box.


Form File Upload Box

This box is used to allow a user to upload a file to your web site:

```
<form>  
    <input type = "file" name = "fileupload" accept = "image/*" />  
</form>
```


Button Controls

Type & Description
submit This creates a button that automatically submits a form.
reset This creates a button that automatically resets form controls to their initial values.
button This creates a button that is used to trigger a client-side script when the user clicks that button.
image This creates a clickable button but we can use an image as background of the button.

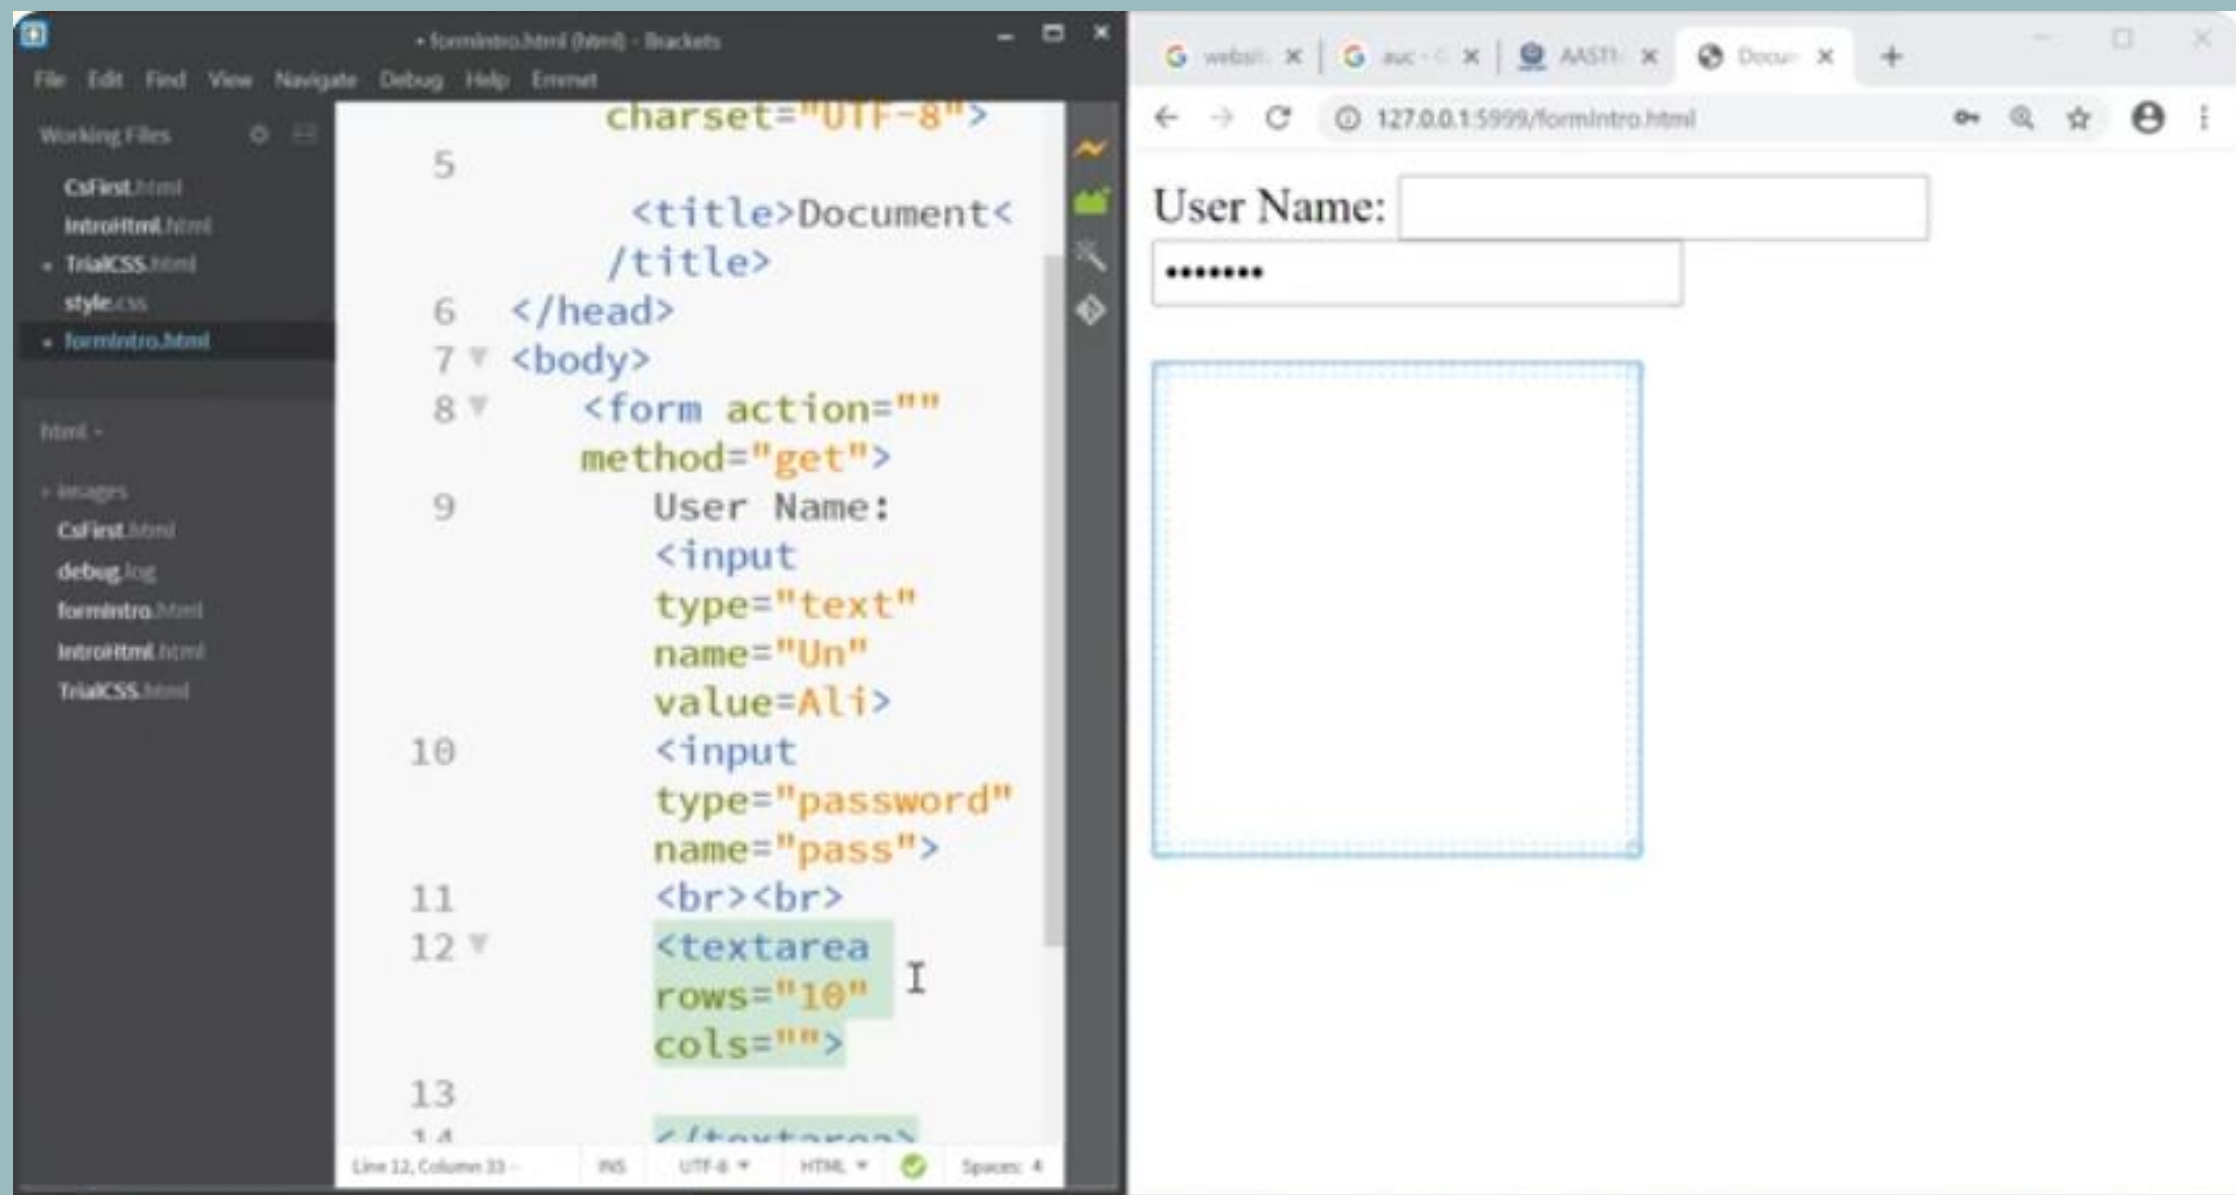

```
9      User Name:
      <input
      type="text"
      name="Un"
      size="4">
10     <input
      type="password"
      name="pass">
11     <br><br>
12     <input
      type="submit"
      value="Sign in">
13
14     <input
      type="reset"
      value="clear
      all">
15
16 </form>
17
18 </body>
```



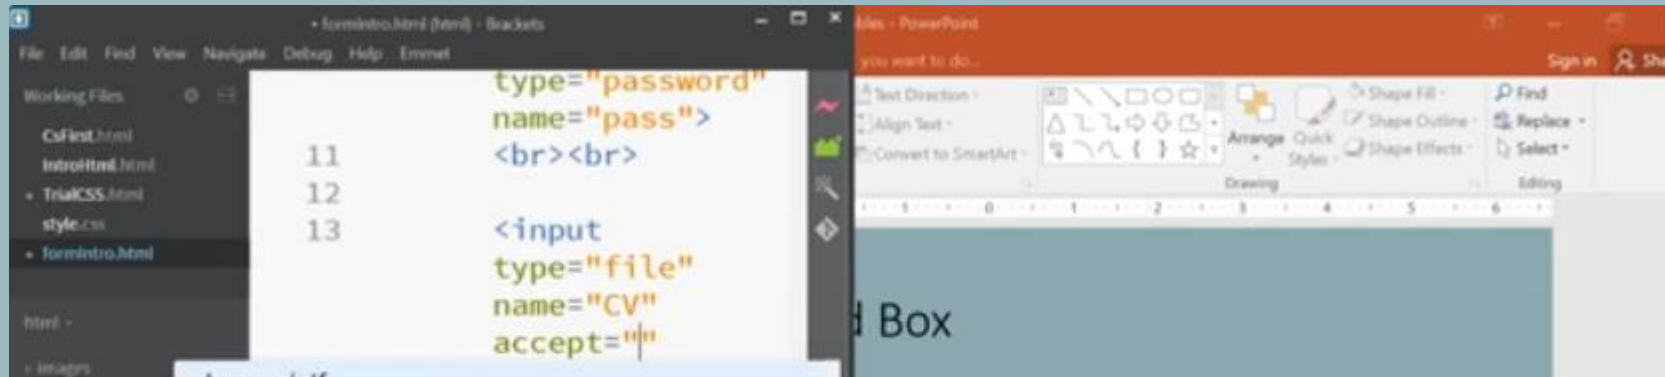

image/gif
image/jpeg
image/tiff
image/x-MS-bmp
image/x-photo-cd
image/x-png
image/x-portable-greymap

