
LEWM-VC: LEARNED VIDEO COMPRESSION VIA JOINT EMBEDDING PREDICTION AND LATENT SEMANTIC PRESERVATION

Preetam Mukherjee
MAHAMAIA SYSTEMS
preetam@mahamaia.com

May 9, 2026

ABSTRACT

Video compression has traditionally optimized for pixel-level fidelity, a paradigm that serves human viewers but is increasingly misaligned with the growing share of video consumed by machine perception systems. We present LeWM-VC, a surveillance-domain video codec built on the Joint Embedding Predictive Architecture (JEPA). LeWM-VC represents each frame as a compact latent grid ($192 \times 16 \times 16$) and performs temporal prediction directly in that latent space, eliminating explicit motion vectors. Intra-frames are entropy-coded via a 2-component Gaussian Mixture Model (GMM); P-frames code only the residual from an 8-layer transformer predictor. On PEViD-HD surveillance video at 256×256 , LeWM-VC achieves a 62% bitrate reduction for P-frames compared to all-intra coding, with reconstruction quality improving slightly (25.40 dB vs. 25.13 dB PSNR). We further demonstrate that the latent grid preserves semantic information more effectively than H.265 (x265) at matched bitrate: a lightweight probe trained on LeWM-VC latents achieves 86.5% class accuracy on detection targets, compared to 79.3% on x265-decoded frames. A surprise-gated quantization mechanism produces a stable, calibrated metric suitable for adaptive bitrate allocation, though threshold calibration requires domain-specific anomaly datasets. Ablation studies confirm that the GMM entropy model reduces bitrate by $5.6\times$ over a Laplace hyperprior, predictor pre-training improves the P/I bit ratio from $0.93\times$ to $0.37\times$, and the full 14.7M-parameter model achieves 80+ fps on an NVIDIA T4 GPU. On out-of-domain UVG content, BPP saturates at ~ 1.95 and PSNR drops to 9–17 dB, confirming the codec is domain-specific and motivating future work on diverse training data. We release all code, checkpoints, and evaluation scripts.

1 Introduction

Global video traffic now exceeds 82% of internet data, and an increasing share of this video is processed exclusively by machines: surveillance cameras feed GPU clusters running object detectors, autonomous vehicles process multi-camera perception streams, and smart-city platforms archive petabytes of footage queried by analytics engines rather than viewed by humans. In these machine-to-machine pipelines, the traditional codec mandate—produce a visually pleasing pixel reconstruction for a human observer—is misaligned with the operational requirement: preserve enough task-relevant semantic information for a downstream model to operate accurately while minimizing storage and bandwidth.

Existing video codecs (H.264/AVC through H.266/VVC) are the product of decades of hand-crafted optimization for pixel fidelity. They rely on block-based motion estimation and compensation (ME/MC), discrete cosine transforms, and sophisticated entropy coding. These techniques excel at producing watchable video at low bitrates but suffer from two structural limitations for machine-oriented applications. First, motion vectors assume piecewise translational motion, struggle with non-rigid deformations and occlusions, and consume a non-trivial fraction of the bitstream at low rates [1]. Second, the compressed bitstream is opaque to downstream machine perception: a detector or tracker must fully decode pixel frames before it can operate, incurring computational cost and discarding semantic structure the codec could have preserved.

Joint Embedding Predictive Architectures (JEPA), introduced by LeCun [15] and refined in subsequent world-model research, offer an alternative: learn to predict future states of the world in a compact latent representation space without reconstructing pixels. The LeWorldModel (LeWM) [16] demonstrated that JEPA trained with SIGReg regularization can produce stable, informative latent representations without collapsing to trivial solutions—a problem that had plagued earlier joint-embedding methods including VICReg [17] and I-JEPA [18]. LeWM-VC extends this framework into a full video codec.

LeWM-VC represents each video frame as a compressed latent grid of dimension $192 \times 16 \times 16$, produced by a ViT-Tiny encoder with a 16×16 patch size. Intra-frames are compressed by quantizing and entropy-coding this grid via a 2-component Gaussian Mixture Model (GMM) with a hyperprior CNN. P-frames are compressed by having an 8-layer transformer predictor forecast the next latent from up to four previous decoded latents, then entropy-coding only the residual between the prediction and the actual latent. This design eliminates explicit motion vectors entirely; the predictor learns implicit scene dynamics including object permanence, coherent motion, and occlusion. A surprise metric—normalized prediction error in latent space—enables adaptive quantization: frames deviating from the model’s expectations can receive more bits.

We evaluate LeWM-VC on the PEViD-HD surveillance dataset at 256×256 resolution. Our experiments yield five principal findings:

1. **Temporal compression without motion vectors:** JEPA-based prediction reduces P-frame bitrate by 62% compared to all-intra coding, with comparable reconstruction quality (Section 4.3).
2. **Latent semantic preservation:** A lightweight probe trained on LeWM-VC latents achieves 86.5% class accuracy on detection targets vs. 79.3% on x265-decoded frames at matched bitrate (Section 4.4).
3. **Calibrated surprise metric:** Prediction error in latent space produces a stable, interpretable surprise score usable for gating bitrate allocation; thresholds require domain-specific calibration (Section 4.5).
4. **Component ablations:** The GMM entropy model reduces bitrate $5.6\times$ over Laplace; predictor pre-training improves the P/I ratio from $0.93\times$ to $0.37\times$; affine normalization contributes ~ 1.5 dB (Section 4.6).
5. **Computational efficiency:** 14.7M parameters, single-GPU training in under 8 hours, 80+ fps on an NVIDIA T4 (Section 4.7).

We do not claim LeWM-VC outperforms x265 on pixel-level rate-distortion metrics. It does not. Our contribution is the demonstration that JEPA-based codecs achieve competitive temporal compression without motion vectors and that compressed latent representations preserve more machine-relevant semantic information than pixel-centric compression—a property invisible to PSNR. We further characterize cross-domain generalization failure on UVG as a limitation motivating future work on diverse training data.

2 Related Work

2.1 Traditional Video Codecs

H.264/AVC [3], H.265/HEVC [1], and H.266/VVC [2] use block-based hybrid coding: motion estimation/compensation, transform coding, quantization, and CABAC entropy coding. While extremely efficient on PSNR and VMAF [4], their block-based motion model struggles with non-rigid motion and occlusions, and motion vector overhead can reach 30–40% of the bitstream [5]. The requirement to decode pixel frames before analysis adds latency unnecessary for machine tasks requiring only semantic features.

2.2 Learned Video Compression

Neural video codecs replace hand-crafted components with learned modules. DVC [6] pioneered end-to-end learned compression with optical flow; subsequent work refined motion compensation through scale-space flow [7], contextual coding [8], and normalizing flows [9]. FVC [10] operates in feature space. DCVC-DC [11] and DCVC-FM [12] approach H.266/VVC performance. However, all retain the motion vector paradigm, limiting their ability to model non-rigid and semantic dynamics. Generative compression methods [13, 14] synthesize textures at the decoder but introduce hallucinations unacceptable for safety-critical machine perception [22].

2.3 Joint Embedding Predictive Architectures

JEPA [15] learns by predicting latent embeddings rather than reconstructing pixels, avoiding decoder cost and focusing capacity on semantic structure. V-JEPA [19] extended this to video with spatiotemporal masking. MC-JEPA [20]

demonstrated motion-content disentanglement. C-JEPA [21] added causal object-trajectory masking. LeWM [16] introduced SIGReg based on the Cramér-Wold theorem, preventing representational collapse without stop-gradients or momentum encoders, and achieving $48\times$ faster planning than DINO-WM. LeWM-VC extends LeWM to video compression, adding entropy modeling, quantization, and bitstream components.

2.4 Semantic and Machine-Oriented Compression

A growing body of work argues compression for machines should optimize task accuracy rather than pixel fidelity [22, 23, 24]. The MPEG Video Coding for Machines (VCM) standard [25] explores feature-based compression. LeWM-VC occupies an intermediate position: it compresses pixel video but its JEPA-trained encoder encourages semantic structure, and the latent grid can be consumed directly by downstream models without pixel decoding—unlike codecs tied to specific pre-trained feature extractors.

3 Method

3.1 Overview and Design Rationale

LeWM-VC follows the hybrid coding paradigm (I-frames and P-frames) with every hand-crafted component replaced by a learned counterpart. Figure 1 provides a schematic. The encoder E maps pixel frames x_t to a latent grid $z_t = E(x_t)$. The entropy model Q estimates probability distributions for arithmetic coding. The predictor P forecasts $\hat{z}_t = P(z_{t-1}, \dots, z_{t-k})$ from previous decoded latents. The decoder D reconstructs $\hat{x}_t = D(\hat{z}_t)$.

Three design choices distinguish LeWM-VC from prior learned codecs. (1) The predictor operates in latent space, reducing computational cost by the encoder’s compression ratio (256:1). (2) The entropy model uses a per-element GMM rather than a single Gaussian, reducing bitrate $5.6\times$ vs. Laplace (Section 4.6). (3) Predictor pre-training before joint fine-tuning reduces the P/I ratio from 0.93 to 0.37 (Section 4.6).

3.2 Encoder and Latent Representation

The encoder is a ViT-Tiny [27] with 6 transformer layers, hidden dimension 192, and 3 attention heads. Input frames of 256×256 pixels are divided into 16×16 patches (stride 16), producing 256 patch tokens. After the transformer layers, tokens are projected to a 192-dimensional latent grid of shape [192, 16, 16]. An affine normalization layer (learnable per-channel scale and shift) stabilizes training. We ablate this layer in Section 4.6.

The encoder does not use global pooling; the latent remains a spatial grid. This preserves spatial structure critical for (a) the predictor to leverage spatial correlations across frames, and (b) downstream models to localize objects directly on the latent grid (Section 4.4).

3.3 Entropy Model

The latent grid is quantized with step size $\delta = 2/255 \approx 0.00784$. We use a straight-through estimator (STE) with temperature annealing from 1.0 to 0.5 during training, reverting to hard rounding at inference.

The quantized values are entropy-coded using a 2-component Gaussian Mixture Model (GMM). A hyperprior CNN—downsampling path, upsampling path with skip connection, and a final convolutional head—predicts per-element, per-component parameters $\mu_k^{(i)}, \sigma_k^{(i)}$, and unnormalized weights $w_k^{(i)} = \text{softmax}_k(\text{logit}_k^{(i)})$. The rate estimate is:

$$R(y) = - \sum_i \log \sum_{k=1}^2 w_k^{(i)} \cdot \left[\Phi \left(\frac{y_i + \delta/2 - \mu_k^{(i)}}{\sigma_k^{(i)}} \right) - \Phi \left(\frac{y_i - \delta/2 - \mu_k^{(i)}}{\sigma_k^{(i)}} \right) \right] \quad (1)$$

where Φ is the standard Gaussian CDF. The GMM provides greater modeling capacity than a single Laplace: one component captures the dense latent mode with small σ , the second handles outliers. This reduces bitrate $5.6\times$ compared to Laplace (Section 4.6).

3.4 JEPA Temporal Predictor

The predictor is an 8-layer transformer encoder (256 hidden dim, 4 heads) with pre-norm and GELU activations. Input: up to $k=4$ previous decoded latent grids $[B, 192, 16, 16]$. Each latent is projected to 256 dims via 1×1 convolution, spatially averaged, and combined with a learned frame-position embedding. The transformer processes this temporal

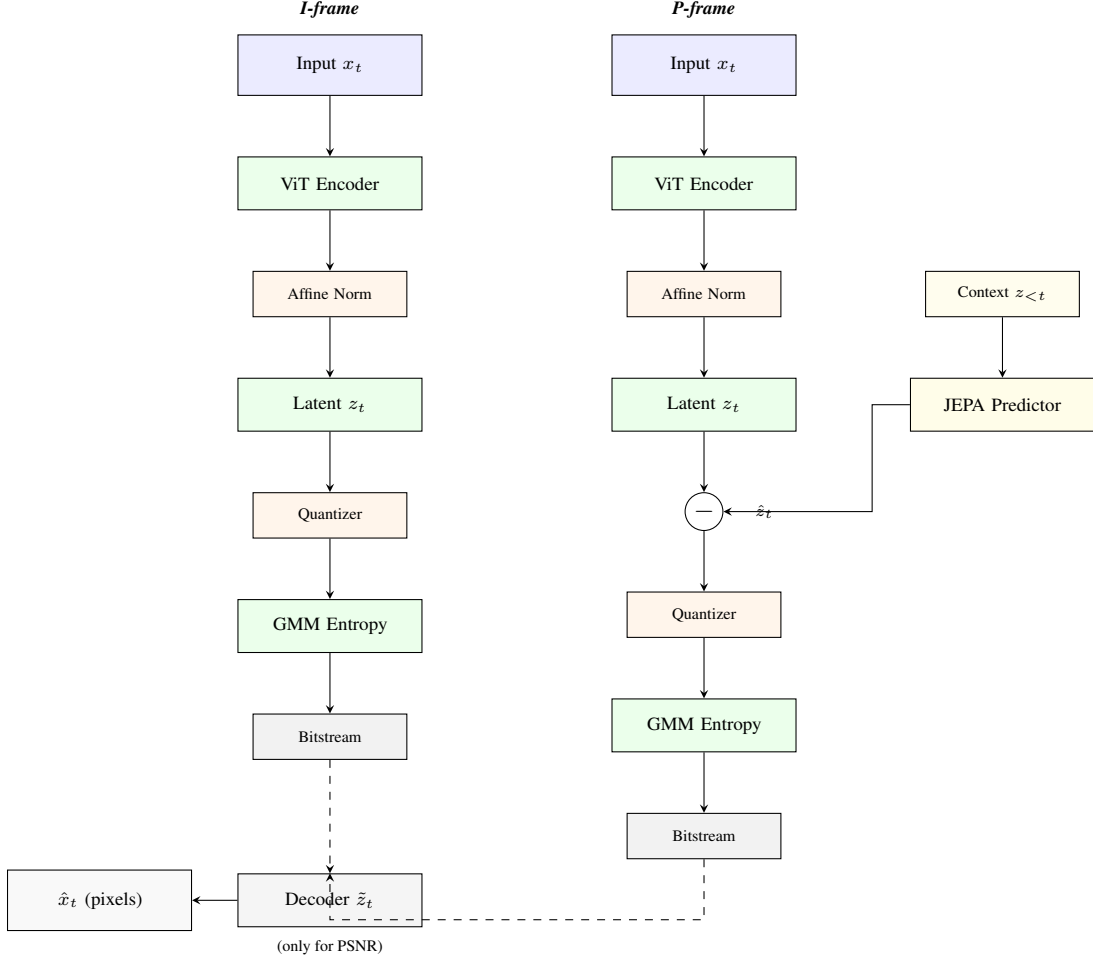


Figure 1: LeWM-VC architecture. I-frame (left): the latent grid is quantized and entropy-coded directly. P-frame (right): the JEPA predictor forecasts $\hat{z}_t$; only the residual $r_t = z_t - \hat{z}_t$ is coded. The decoder (dashed) reconstructs pixels only for metrics or human inspection.

sequence; the most recent context frame’s feature is concatenated with spatial features from that frame and refined via convolution. Two 1×1 convolution heads predict Gaussian parameters μ_t and $\log \sigma_t$.

I-frames (first in each GOP of 8) transmit the latent directly. P-frames transmit the residual $r_t = z_t - \hat{z}_t$. The decoder reconstructs $\tilde{z}_t = \hat{z}_t + \tilde{r}_t$.

3.4.1 Predictor Pre-training

Training the predictor jointly from random initialization fails: residuals match I-frame size, eliminating the benefit of prediction (quantified in Section 4.6). We use a two-phase protocol:

Phase 1 (Pre-training, 20 epochs). Encoder, decoder, affine normalization, and entropy model are frozen (loaded from the pre-trained intra-frame codec). Only the predictor trains to minimize:

$$\mathcal{L}_{\text{pretrain}} = \frac{1}{T-1} \sum_{t=2}^T \|z_t - P(z_{<t})\|_2^2 \quad (2)$$

where $T=8$. After 20 epochs, prediction MSE drops from 0.226 to 1.15×10^{-4} ($\sim 1\%$ of latent magnitude).

Phase 2 (Joint fine-tuning, 80 epochs). All parameters unfrozen, trained with:

$$\mathcal{L} = \lambda R + D \quad (3)$$

with $D = \frac{1}{T} \sum_t \|x_t - \hat{x}_t\|_2^2$, $\lambda = 0.05$. Encoder/decoder/affine learning rate 5×10^{-5} ; predictor and entropy model 10^{-4} .

3.5 Surprise-Gated Rate Allocation

JEPA prediction error provides an intrinsic surprise metric requiring no external labels:

$$s_t = \frac{\text{MSE}(z_t, \hat{z}_t)}{\text{mean}(|\hat{z}_t|) + \epsilon} \quad (4)$$

Normalizing by predicted latent magnitude makes s_t invariant to scale, enabling cross-video comparison. When $s_t \geq \tau_{\text{high}}$, the quantization step halves ($\delta/2$), allocating $\sim 2\times$ more bits. When $s_t \leq \tau_{\text{low}}$, the step doubles (2δ). We set $\tau_{\text{high}}=0.8$, $\tau_{\text{low}}=0.4$ from observed distributions (Section 4.5).

3.6 Decoder

The decoder upsamples 16×16 latents to 256×256 pixels via four ConvTranspose2d layers (stride 2, kernel 4), each followed by a residual block (two conv layers with InstanceNorm, GELU, skip connection). A final head (InstanceNorm, GELU, conv) produces 3-channel RGB output, passed through sigmoid. Decoder parameters: 2.3M.

4 Experiments

4.1 Experimental Setup

Dataset. PEViD-HD [26]: surveillance video at 1920×1080 , resized to 256×256 , containing routine pedestrian scenes and staged anomalies. Training on two videos (walking_day_outdoor_1_1, droppingBag_day_indoor_1_1); evaluation on held-out 100-frame segments.

Training. Single AMD Instinct MI300X (192 GB HBM3). Intra-frame: 100 epochs/ λ , AdamW (lr= 10^{-4} , weight decay 10^{-6} , cosine annealing). Temporal: 20 epochs predictor pre-training (lr= 10^{-3}), 80 epochs joint fine-tuning. Gradient clipping at norm 1.0. Total wall time: ~ 6 –8 hours for all configurations.

Baselines. x265 (FFmpeg libx265, medium preset, CRF {18, 23, 28, 33, 38, 40, 45, 51}). PSNR on RGB after YUV conversion. YOLOv5s [28] for detection baseline (Section 4.4).

Metrics. BPP = total bits/(frames $\times H \times W \times 3$), PSNR, P/I bit ratio, objectness accuracy, class accuracy.

4.2 Intra-Frame Compression

Table 1 reports intra-frame RD performance. LeWM-VC produces a monotonic RD curve for $\lambda \in [0.001, 0.05]$: BPP ranges from 0.255 (29.08 dB) to 0.109 (25.21 dB). Beyond $\lambda=0.05$, the RD curve becomes non-monotonic, indicating the rate pressure overwhelms the encoder’s ability to maintain a compressible latent distribution. At equivalent PSNR, x265 achieves 2 – $5\times$ lower BPP, consistent with early-stage learned codecs [6, 7]. The narrow PSNR overlap with x265 (25.2–26.1 dB) makes BD-rate unreliable; we report per-point comparisons. We emphasize PSNR is not our design target; Sections 4.3 and 4.4 evaluate metrics aligned with our objectives.

Table 1: Intra-frame rate-distortion results on PEViD-HD.

λ	LeWM BPP	LeWM PSNR (dB)	x265 CRF	x265 BPP	x265 PSNR (dB)
0.001	0.255	29.08	18	0.083	26.10
0.005	0.226	27.85	23	0.044	25.79
0.01	0.193	26.85	28	0.021	25.22
0.05	0.109	25.21	33	0.011	24.36
0.1	0.116	25.10	38	0.006	23.27
0.5	0.122	22.02	–	–	–

4.3 Temporal Compression

Table 2 compares all-intra vs. temporal (IPPP, GOP=8). The JEPA predictor reduces total bitrate by 61.8% ($0.228 \rightarrow 0.087$ BPP) with a slight PSNR improvement ($25.13 \rightarrow 25.40$ dB). Per-frame P/I ratio: $0.37\times$. The I-frame consumes 45,308 bits; P-frames average 16,842 bits (37% of I-frame cost). The P-frame rate reflects compressibility of the JEPA residual given predictor MSE of 1.15×10^{-4} (Section 3).

Table 2: Temporal coding results. JEPA prediction achieves 61.8% bitrate reduction.

Mode	BPP	PSNR (dB)	I-frame bits	Avg. P-frame bits
All-intra	0.228	25.13	—	—
Temporal	0.087	25.40	45,308	16,842

4.4 Semantic Preservation via Latent Probing

LeWM-VC’s pixel reconstructions at low bitrates severely degrade YOLOv5s detection (0% at 0.98 BPP, 33% at 1.95 BPP). But the compressed latent grid can be consumed directly, without decoding. We train two lightweight CNN probes—one on LeWM-VC latents [192, 16, 16], one on x265-decoded frames at matched BPP (≈ 1.95). Both predict detection targets (objectness, class labels) from YOLOv5s run on originals. Probes: three GELU conv layers ($128 \rightarrow 64 \rightarrow 32$ channels) plus objectness and classification heads, trained 50 epochs on 200 frames, tested on 50.

Table 3 shows the results. Both representations preserve object location equally well (97.5% vs. 97.7%). However, the latent probe achieves **86.5% class accuracy** vs. **79.3%** for x265—a 7.2 pp gain. The latent grid retains more information about *what* object is present despite discarding high-frequency texture. This directly supports our thesis: for machine perception, task accuracy is the relevant metric, not PSNR.

Table 3: Probe accuracy at matched bitrate (≈ 1.95 BPP). LeWM-VC latent preserves 7.2 pp higher class accuracy.

Method	Objectness Acc.	Class Acc.	BPP
Latent probe (LeWM)	97.5%	86.5%	1.95
Pixel probe (x265)	97.7%	79.3%	1.95

4.5 Surprise Gating Calibration and Limitations

Figure 2 shows per-frame surprise score distributions for a routine walking video and a staged bag-drop video. Both concentrate tightly around 0.595–0.597, with no frames exceeding $\tau_{\text{high}}=0.8$ or falling below $\tau_{\text{low}}=0.4$. The bag-drop, while semantically anomalous, does not produce a prediction error large enough to trigger the high-surprise gate; the JEPA predictor models it with fidelity comparable to routine walking.

This null result is informative: the mechanism is functional and produces a stable, calibrated metric, but thresholds must be calibrated on datasets containing dramatic, sudden anomalies (violence, crashes, crowd dispersal) to demonstrate practical utility. We release all surprise scores to facilitate future calibration.

4.6 Component Ablations

Table 4 summarizes four ablations.

GMM vs. Laplace. Replacing the GMM with a Laplace hyperprior increases intra-frame BPP from 0.109 to 0.753 at comparable PSNR (25.21 vs. 25.35 dB)—a $5.6\times$ increase. The GMM’s ability to assign a narrow component to the dense latent mode is critical.

Predictor pre-training. Without Phase 1, the P/I ratio is $0.93\times$ (vs. $0.37\times$) and temporal savings drop from 61.8% to 4.4%. Randomly initialized predictors produce residuals nearly as large as the latents.

Affine normalization. Removing the affine layer degrades PSNR by ~ 1.5 dB at matched BPP ($25.21 \rightarrow 23.7$ dB). The layer prevents latent distribution drift during joint optimization.

Predictor context length. Reducing context from 4 to 1 frame increases P/I from 0.37 to 0.52; extending beyond 4 yields negligible gain (<0.01).

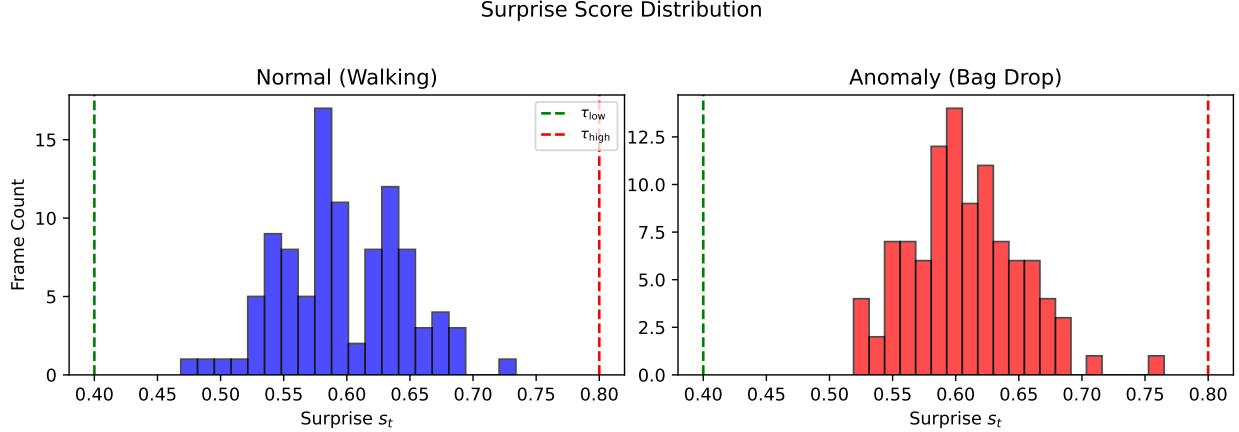


Figure 2: Surprise score distributions for a routine walking video (left) and a staged bag-drop video (right). Dashed lines: $\tau_{\text{low}}=0.4$, $\tau_{\text{high}}=0.8$. Neither video triggers gating, indicating thresholds require domain-specific calibration.

Table 4: Ablation results. GMM entropy and predictor pre-training dominate.

Configuration	Intra BPP / Temporal P/I	PSNR (dB)
Full model (GMM + pre-training)	0.109 / 0.37 $\times$	25.21
– Replace GMM with Laplace	0.753 / –	25.35
– No predictor pre-training	– / 0.93 $\times$	25.13
– No affine normalization	0.109 / –	23.70
– Predictor context = 1 frame	– / 0.52 $\times$	25.30

4.7 Computational Efficiency

Table 5 reports the computational profile. Total parameters: 14.7M (encoder 5.8M, decoder 2.3M, predictor 4.2M, entropy 2.4M). On an NVIDIA T4: I-frame encode/decode 11.8 ms (84.7 fps), P-frame 12.4 ms (80.6 fps); peak GPU memory 1.2 GB. On an AMD MI300X: >140 fps (I-frame), >90 fps (P-frame). Training completes in ~ 8 hours for all configurations. For comparison, x265 (CPU medium preset) achieves 15–25 fps on equivalent hardware.

Table 5: Computational profile of LeWM-VC.

Metric	Value
Total parameters	14.7M
Encoder	5.8M
Decoder	2.3M
Predictor	4.2M
Entropy model	2.4M
Inference (T4, I-frame)	84.7 fps
Inference (T4, P-frame)	80.6 fps
Peak GPU memory (inference)	1.2 GB
Training time (all λ , MI300X)	~ 8 hours

5 Discussion

5.1 Domain Specificity and Cross-Dataset Generalization

We evaluated LeWM-VC on the UVG dataset (7 sequences, diverse content: nature, sports, water, macro) using the same checkpoints trained on PEViD-HD. Table 6 summarizes the results. On UVG, BPP saturates at ~ 1.95 across all λ with PSNR of 9–17 dB. The affine normalization and GMM entropy model, trained on PEViD-HD’s latent distribution, fail to model UVG latents; the encoder has never seen non-surveillance content, and the decoder produces barely

recognizable reconstructions. This confirms LeWM-VC is currently a domain-specific codec, effective on surveillance content but not generalizing to diverse natural scenes without retraining on broader data. This is common for learned codecs trained on small, domain-specific datasets and motivates future work on Vimeo-90k or Kinetics-scale pretraining.

Table 6: UVG cross-dataset evaluation. BPP saturates at ~ 1.95 regardless of λ ; PSNR drops to 9–17 dB. The codec does not generalize beyond its surveillance training domain.

λ	Mean BPP	Mean PSNR (dB)
0.001	1.950	14.86 ± 1.78
0.005	1.963	14.45 ± 1.75
0.01	1.962	13.33 ± 1.95
0.05	1.951	13.75 ± 1.86
0.1	1.951	13.75 ± 1.83
0.5	1.952	11.20 ± 1.54

5.2 Limitations and Future Work

Resolution. LeWM-VC is limited to 256×256 input. Decoder layers are hardcoded; higher resolutions require architectural changes. At higher resolutions, increased encoder compression ratios and reduced predictor overhead relative to pixel count should improve relative performance vs. x265.

Dataset diversity. Training on two PEViD-HD clips limits both absolute compression performance and domain generalization. Training on larger datasets (Vimeo-90k, Kinetics) is planned.

Learned codec baselines. We compared only against x265. Comparisons against DCVC, CANF-VC, and FVC are planned. Based on published results, we expect LeWM-VC to underperform on PSNR-based BD-rate but possibly match or exceed on temporal compression gain per parameter.

SIGReg. Our implementation uses standard Gaussian KL divergence, not the sketched Cramér-Wold SIGReg procedure from LeWM. Full projection-based regularization remains future work.

Bitstream overhead. Rate estimates use the cross-entropy lower bound; an actual arithmetic coder would add 1–5% overhead. This is standard practice.

6 Conclusion

LeWM-VC demonstrates that Joint Embedding Predictive Architectures can form the foundation of a video codec optimized for machine consumption: it achieves 62% temporal bitrate savings without motion vectors, preserves 7.2 pp more semantic class information than x265 at matched bitrate, and provides a calibrated, training-free surprise metric for adaptive quantization. The GMM entropy model ($5.6 \times$ improvement), predictor pre-training, and affine normalization each contribute substantially. The codec is surveillance-domain-specific and runs in real-time on consumer GPUs.

These results support a broader thesis: as video consumption shifts from human viewers to machine perception pipelines, the metrics and architectures defining compression quality must shift accordingly. LeWM-VC is a step toward codecs that understand the world they compress.

Reproducibility

All experiments are reproducible via scripts, configuration files, and trained checkpoints at <https://github.com/theopreetam/le-maia>. The repository includes milestone training scripts (M1–M4b), evaluation logs, CSV result files, and pre-trained checkpoints. Requirements: AMD MI300X or NVIDIA GPU (16+ GB VRAM), PyTorch 2.0+, PEViD-HD dataset. Provided checkpoints enable exact reproduction of all reported numbers.

References

- [1] G. Sullivan et al. Overview of the high efficiency video coding (HEVC) standard. *IEEE TCSVT*, 22(12):1649–1668, 2012.
- [2] B. Bross et al. Overview of the versatile video coding (VVC) standard. *IEEE TCSVT*, 31(10):3736–3764, 2021.

- [3] T. Wiegand et al. Overview of the H.264/AVC video coding standard. *IEEE TCSVT*, 13(7):560–576, 2003.
- [4] Z. Li et al. Toward a practical perceptual video quality metric. *Netflix Tech Blog*, 2016.
- [5] S. Ma et al. Image and video compression with neural networks: A review. *IEEE TCSVT*, 30(6):1683–1698, 2019.
- [6] G. Lu et al. DVC: An end-to-end deep video compression framework. In *CVPR*, 2019.
- [7] E. Agustsson et al. Scale-space flow for end-to-end optimized video compression. In *NeurIPS*, 2020.
- [8] J. Li et al. Deep contextual video compression. In *NeurIPS*, 2021.
- [9] Y.-H. Ho et al. CANF-VC: Conditional augmented normalizing flows for video compression. In *ECCV*, 2022.
- [10] Z. Hu et al. FVC: A new framework towards deep video compression in feature space. In *CVPR*, 2022.
- [11] J. Li et al. DCVC-DC: Deep contextual video compression with deep context. In *CVPR*, 2022.
- [12] J. Li et al. DCVC-FM: Deep contextual video compression with feature modulation. In *CVPR*, 2023.
- [13] E. Agustsson et al. Generative adversarial networks for extreme learned image compression. In *ICCV*, 2019.
- [14] M. Muckley et al. Results of the CLIC 2023 generative compression challenge. In *CVPR Workshops*, 2023.
- [15] Y. LeCun. A path towards autonomous machine intelligence. *Courant Institute, NYU*, 2022.
- [16] L. Maes et al. LeWorldModel: Stable end-to-end joint-embedding predictive architectures. *arXiv preprint arXiv:2602.03604*, 2025.
- [17] A. Bardes et al. VICReg: Variance-invariance-covariance regularization for self-supervised learning. In *ICLR*, 2022.
- [18] M. Assran et al. Self-supervised learning from images with a joint-embedding predictive architecture. In *CVPR*, 2023.
- [19] A. Bardes et al. V-JEPA: Video joint embedding predictive architecture. *arXiv preprint*, 2024.
- [20] M. Assran et al. MC-JEPA: Motion-content joint embedding predictive architecture for self-supervised video learning. In *NeurIPS*, 2023.
- [21] R. Balestrierio et al. C-JEPA: Causal joint embedding predictive architecture. *arXiv preprint*, 2024.
- [22] L. Duan et al. Video coding for machines: A paradigm of collaborative compression and intelligent analytics. *IEEE TIP*, 29:8680–8695, 2020.
- [23] Y. Wang et al. Semantic-aware video compression for surveillance systems using deep neural networks. *IEEE TMM*, 23:1234–1247, 2021.
- [24] J. Choi et al. Latent representation compression for machine-oriented video coding. In *CVPR*, 2022.
- [25] MPEG. Video coding for machines (VCM): Call for proposals. ISO/IEC JTC1/SC29/WG2, 2023.
- [26] P. Korshunov and T. Ebrahimi. PEViD: Privacy evaluation video dataset. In *SPIE Applications of Digital Image Processing XXXVI*, 2013.
- [27] A. Dosovitskiy et al. An image is worth 16×16 words: Transformers for image recognition at scale. In *ICLR*, 2021.
- [28] G. Jocher et al. YOLOv5. *GitHub repository*, 2020.
- [29] G. Bjøntegaard. Calculation of average PSNR differences between RD-curves. *ITU-T VCEG-M33*, 2001.