



Previous Latent Grids
($192 \times 16 \times 16$)

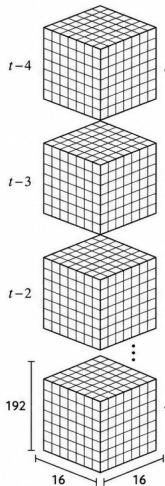

1×1 Conv
Projection
($192 \rightarrow D$)

Spatial Average
+
Frame Position
Embeddings
($\rightarrow (T-1) \times D$)

8-Layer
Transformer Encoder

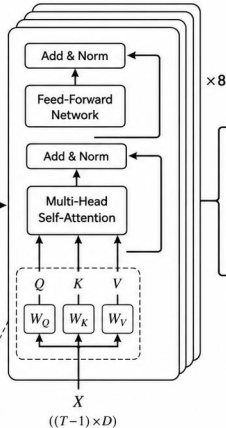

$\times 8$

μ_t
($((T-1) \times D)$)

$\log \sigma_t$
($((T-1) \times D)$)

Residual
 $r_t = z_t - \hat{z}_t$
($((T-1) \times D)$)

where
 z_t : target latents
($((T-1) \times D)$)
 $\hat{z}_t \sim \mathcal{N}(\mu_t, \sigma_t^2 I)$
($((T-1) \times D)$)

Self-Attention
(per head)

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^T}{\sqrt{d}}\right) V$$

$$Q = XW_Q, \quad K = XW_K, \quad V = XW_V$$

$T-1$: number of previous frames
 D : transformer hidden dim
 d : per-head dimension
 W_* : learnable projection matrices