

Session 5: Conditional Statements Topics: If, Else If Ladder, Nested If, Switch Case. Example: "Study Mood Bot" – takes user's input and prints motivation message

Tasks

1.

Create a simple IPL Fan Bot that takes your favorite IPL team name as input and uses if-else-if statements to print a unique cheer message for each team (e.g., 'Go Mumbai Indians!', 'Chennai Super Kings for the win!'). If the team is not recognized, print 'Team not found!'

```
#include <stdio.h>
```

```
#include <string.h>
```

```
int main()
```

```
{
```

```
    char team[50];
```

```
    printf("Enter your favorite IPL team: ");
```

```
    scanf("%s", team);
```

```
    if (strcmp(team, "MI") == 0)
```

```
    {
```

```
        printf("Go Mumbai Indians!\n");
```

```
    }
```

```
    else if (strcmp(team, "CSK") == 0)
```

```
    {
```

```
        printf("Chennai Super Kings for the win!\n");
```

```
    }
```

```
    else if (strcmp(team, "RCB") == 0)
```

```
    {
```

```
        printf("Play Bold with Royal Challengers Bengaluru!\n");
```

```
    }
```


```
else if (strcmp(team, "KKR") == 0)
{
    printf("Come on Kolkata Knight Riders!\n");
}
else if (strcmp(team, "GT") == 0)
{
    printf("Go Gujarat Titans!\n");
}
else if (strcmp(team, "RR") == 0)
{
    printf("Halla Bol! Rajasthan Royals!\n");
}
else if (strcmp(team, "SRH") == 0)
{
    printf("Orange Army! Sunrisers Hyderabad!\n");
}
else if (strcmp(team, "PBKS") == 0)
{
    printf("Let's go Punjab Kings!\n");
}
else if (strcmp(team, "DC") == 0)
{
    printf("Come on Delhi Capitals!\n");
}
else if (strcmp(team, "LSG") == 0)
{
    printf("Go Lucknow Super Giants!\n");
}
```

```

else
{
    printf("Team not found!\n");
}

return 0;
}

```

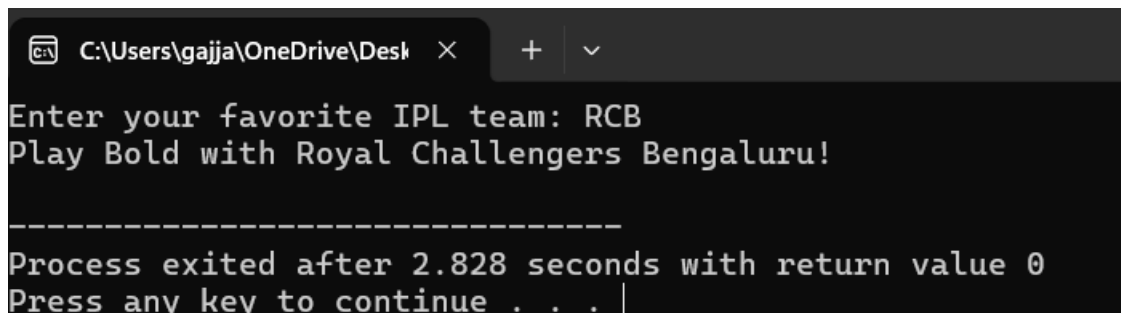

```

C:\Users\gajja\OneDrive\Desktop >
Enter your favorite IPL team: RCB
Play Bold with Royal Challengers Bengaluru!
-----
Process exited after 2.828 seconds with return value 0
Press any key to continue . . .

```

2.

Build a Zomato-style food suggestion tool: take the user's preferred meal time ('breakfast', 'lunch', 'dinner', or 'snack') and use a switch-case statement to suggest a popular dish for that time. If the input doesn't match any meal, suggest 'Try some fruits!'.

```
#include <stdio.h>
```

```

int main()
{
    int choice;

    printf("Select your meal time:\n");
    printf("1. Breakfast\n");
    printf("2. Lunch\n");
    printf("3. Dinner\n");
    printf("4. Snack\n");

    printf("Enter your choice: ");
}

```

```
scanf("%d", &choice);
```

```
switch (choice)
```

```
{
```

```
    case 1:
```

```
        printf("Suggestion: Try some Masala Dosa!\n");
```

```
        break;
```

```
    case 2:
```

```
        printf("Suggestion: Try some Gujarati Thali!\n");
```

```
        break;
```

```
    case 3:
```

```
        printf("Suggestion: Try some Paneer Butter Masala with Naan!\n");
```

```
        break;
```

```
    case 4:
```

```
        printf("Suggestion: Try some Samosa!\n");
```

```
        break;
```

```
    default:
```

```
        printf("Try some fruits!\n");
```

```
}
```

```
return 0;
```

```
}
```

```
C:\Users\gajja\OneDrive\Desk  X + v
Select your meal time:
1. Breakfast
2. Lunch
3. Dinner
4. Snack
Enter your choice: 1
Suggestion: Try some Masala Dosa!

-----
Process exited after 3.106 seconds with return value 0
Press any key to continue . . . |
```

3.

Create a Flipkart discount calculator that asks the user for the total cart amount. Use nested if statements to check: if amount > 2000, apply 20% discount; else if amount > 1000, apply 10% discount; else, no discount. Print the final amount to pay.

Hint: Use nested ifs to check each discount slab.

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    float amount;
```

```
    float discount;
```

```
    float discountAmount;
```

```
    float finalAmount;
```

```
    printf("Enter total cart amount: ");
```

```
    scanf("%f", &amount);
```

```
    if (amount > 2000)
```

```
    {
```

```
        discount = 20;
```

```
discountAmount = amount * discount / 100;
finalAmount = amount - discountAmount;

printf("20%% discount applied.\n");
}
else
{
    if (amount > 1000)
    {
        discount = 10;

        discountAmount = amount * discount / 100;
        finalAmount = amount - discountAmount;

        printf("10%% discount applied.\n");
    }
    else
    {
        discount = 0;
        discountAmount = 0;
        finalAmount = amount;

        printf("No discount applied.\n");
    }
}


printf("Cart Amount: %.2f\n", amount);
printf("Discount Amount: %.2f\n", discountAmount);
```

```

printf("Final Amount to Pay: %.2f\n", finalAmount);

return 0;
}

```

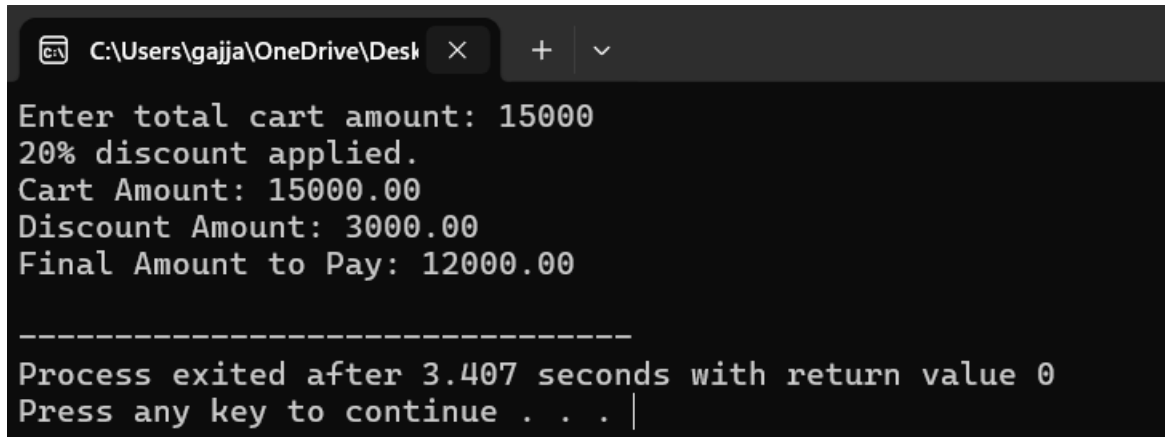

```

C:\Users\gajja\OneDrive\Desktop
Enter total cart amount: 15000
20% discount applied.
Cart Amount: 15000.00
Discount Amount: 3000.00
Final Amount to Pay: 12000.00

-----
Process exited after 3.407 seconds with return value 0
Press any key to continue . . . |

```

4.

Write a program that takes a user's age and checks eligibility for three things using if-else statements: if age ≥ 18 , print 'Eligible for Driving License'; if age ≥ 21 , also print 'Eligible for Credit Card'; if age ≥ 25 , also print 'Eligible for Car Rental'. Print all applicable messages for the given age.

```
#include <stdio.h>
```

```

int main()
{
    int age;

    printf("Enter your age: ");
    scanf("%d", &age);

    if (age  $\geq 18$ )
    {
        printf("Eligible for Driving License\n");
    }
}

```

```
else
{
    printf("Not eligible for Driving License\n");
}

if (age >= 21)
{
    printf("Eligible for Credit Card\n");
}
else
{
    printf("Not eligible for Credit Card\n");
}

if (age >= 25)
{
    printf("Eligible for Car Rental\n");
}
else
{
    printf("Not eligible for Car Rental\n");
}

return 0;
}
```



C:\Users\gajja\OneDrive\Desk



Enter your age: 21

Eligible for Driving License

Eligible for Credit Card

Not eligible for Car Rental

Process exited after 2.018 seconds with return value 0

Press any key to continue . . .