

Session 13: File HandlingTopics:Open, write, read, close files.Modes: r, w, a.Example: Write and read “daily goals.txt.”

Tasks

1.

Create a file called playlist.txt and write the names of your top 3 favorite songs from Spotify into it using write mode (w).

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    FILE *file;
```

```
    file = fopen("playlist.txt", "w");
```

```
    if(file == NULL)
```

```
    {
```

```
        printf("File could not be opened.");
```

```
        return 1;
```

```
    }
```

```
    fprintf(file, "Tum Hi Ho\n");
```

```
    fprintf(file, "Perfect\n");
```


```
    fprintf(file, "Kesariya\n");
```

```
    fclose(file);
```


```
    printf("Songs written successfully.");
```

```
    return 0;
```

```
}
```

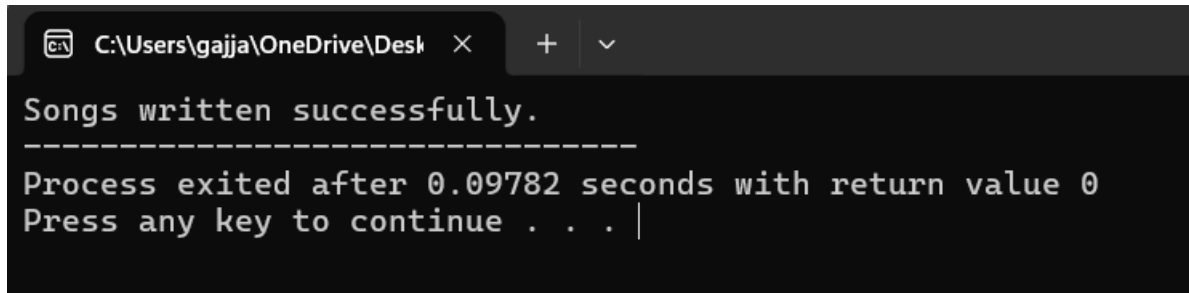

```
C:\Users\gajja\OneDrive\Desktop >
Songs written successfully.
-----
Process exited after 0.09782 seconds with return value 0
Press any key to continue . . . |
```

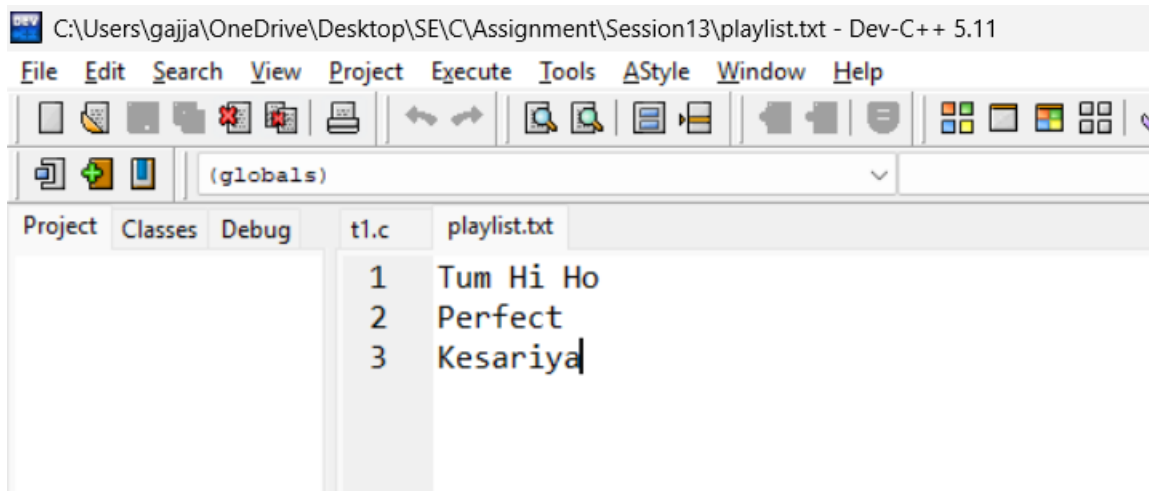

```
C:\Users\gajja\OneDrive\Desktop\SE\C\Assignment\Session13\playlist.txt - Dev-C++ 5.11
File Edit Search View Project Execute Tools AStyle Window Help
(globals)
Project Classes Debug t1.c playlist.txt
1 Tum Hi Ho
2 Perfect
3 Kesariya
```

2.

Open playlist.txt in read mode (r) and display each song name on a separate line in the console.

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    FILE *file;
```

```
    char song[100];
```

```
    file = fopen("playlist.txt", "r");
```

```
    if(file == NULL)
```

```
    {
```

```
        printf("File could not be opened.");
```

```

        return 1;
    }


    printf("My Playlist:\n");

    while(fgets(song, sizeof(song), file) != NULL)
    {
        printf("%s", song);
    }

    fclose(file);

    return 0;
}

```

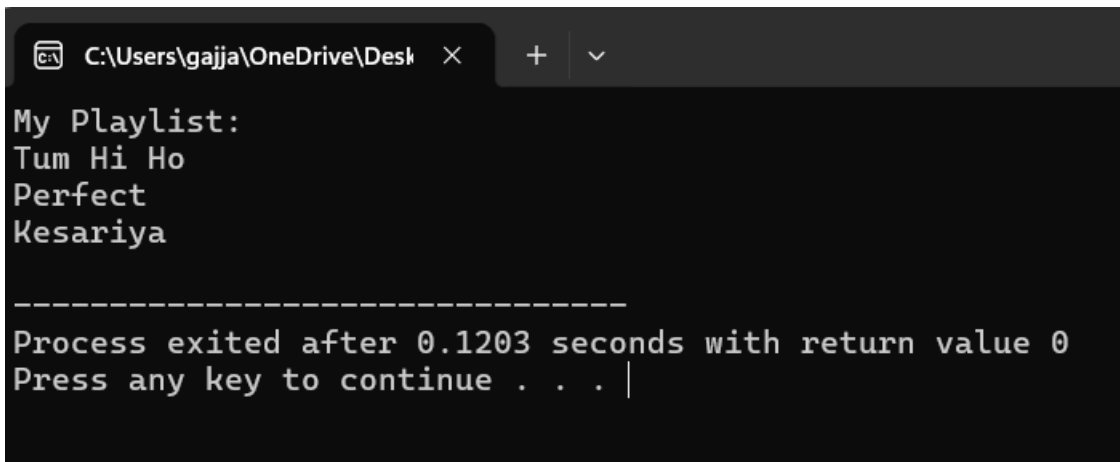

```

C:\Users\gajja\OneDrive\Desktop
My Playlist:
Tum Hi Ho
Perfect
Kesariya

-----
Process exited after 0.1203 seconds with return value 0
Press any key to continue . . . |

```

3.

Add two more song names to playlist.txt without deleting the existing ones by opening the file in append mode (a).

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
FILE *file;

file = fopen("playlist.txt", "a");


if(file == NULL)
{
    printf("File could not be opened.");
    return 1;
}

fprintf(file, "Love Story\n");
fprintf(file, "Until I Found You\n");


fclose(file);

printf("Songs added successfully.");

return 0;
}
```

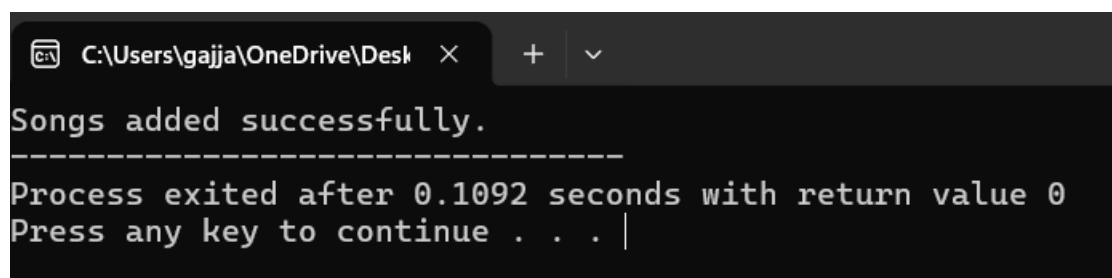

```
C:\Users\gajja\OneDrive\Desktop >
Songs added successfully.
-----
Process exited after 0.1092 seconds with return value 0
Press any key to continue . . . |
```

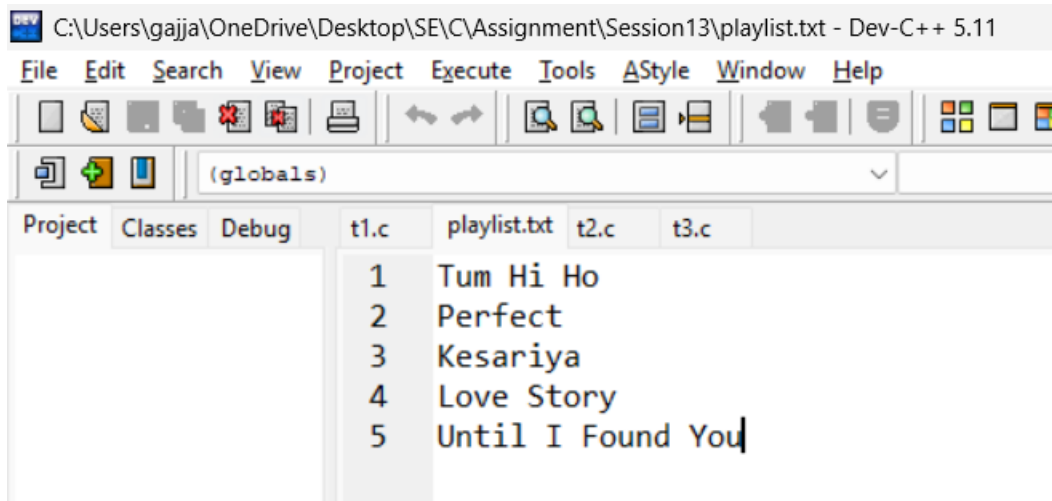

4.

Write a program that reads all song names from playlist.txt and prints only those that contain the word 'love' (case-insensitive).
Hint: Use the 'in' keyword or equivalent string method for filtering.

```
#include <stdio.h>
```

```
#include <string.h>
```

```
#include <ctype.h>
```

```
int main()
```

```
{
```

```
    FILE *file;
```

```
    char song[100];
```

```
    char lower[100];
```

```
    file = fopen("playlist.txt", "r");
```

```
    if(file == NULL)
```

```
    {
```

```
        printf("File could not be opened.");
```

```
        return 1;
```

```
    }
```

```
printf("Songs containing 'love':\n");

while(fgets(song, sizeof(song), file) != NULL)
{
    int i;

    strcpy(lower, song);

    for(i = 0; lower[i] != '\0'; i++)
    {
        lower[i] = tolower(lower[i]);
    }

    if(strstr(lower, "love") != NULL)
    {
        printf("%s", song);
    }
}

fclose(file);

return 0;
}
```



C:\Users\gajja\OneDrive\Desk



```
Songs containing 'love':  
Love Story
```

```
-----  
Process exited after 0.1101 seconds with return value 0  
Press any key to continue . . . |
```