DOT-Domain - complete model reference

0.3.0-rc.1 | 77 public types | Core Mermaid relationships and a complete supporting-type inventory

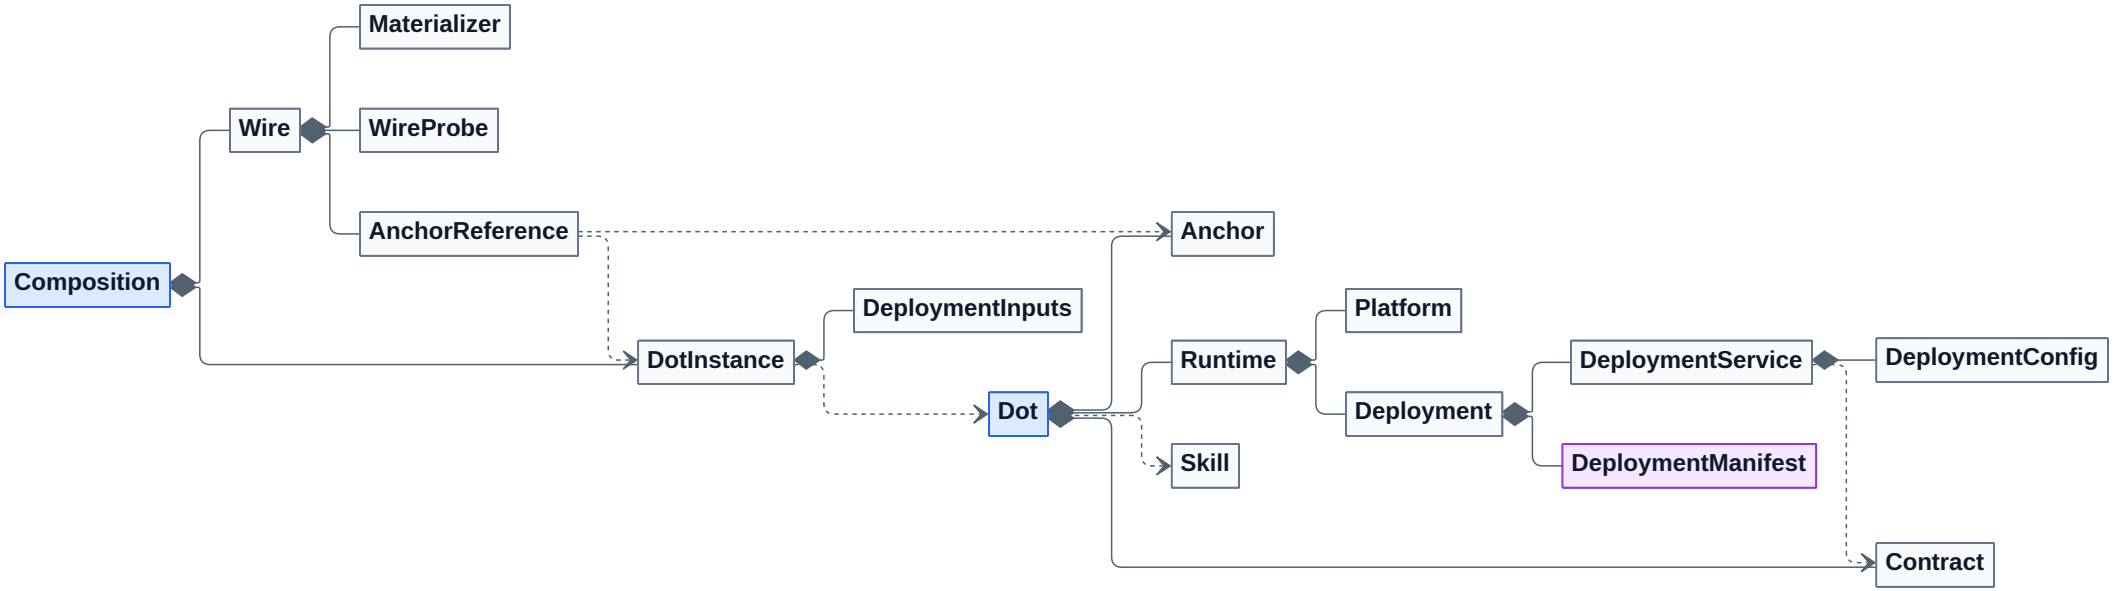

Diamond: containment | Solid arrow: typed association | Dashed arrow: ID/name reference | Blue: aggregate root | Purple: manifest base

Dot
Metadata / Version

Contract
ContractPayload / ContractStandard / DataFormat

Anchor
AnchorContract / AnchorDirection / AnchorRequirement / AnchorRole

Platform
PlatformEngine

DeploymentManifest
DeploymentManifestType / DockerCompose / DockerImage / DockerImageTag / EnvFile / HelmChart / HelmValues / KubernetesManifest / Vagrantfile / WebAssemblyExecution / WebAssemblyModule

DeploymentService
AnchorBinding / ServicePort

DeploymentConfig
CdiDeviceRequirement / ConfigFile / EnvironmentVariable / OciLinuxNamespace / OciRuntimeRequirements / VolumeMount

Composition
ContractInput / ExposedAnchor

Wire
NetworkBinding / OperationParameterBinding / SecurityBinding / SecurityParameterBinding / ServicePortReference / ServiceReference / WireSecurity

Materializer
MaterializerTarget / MaterializerType / MaterializerValueFrom

DeploymentInputs
CdiDeviceBinding / ComposeWorkloadBinding / DeploymentConfigFile / DeploymentEnvironment / DeploymentVolumeSource / KubernetesWorkloadBinding / OciRuntimeGrant / SecretReference / ServiceWorkloadBinding

WireProbe
AsyncAPIProbe / AsyncAPIProbeAuthentication / AsyncAPIProtocol / GRPCProbe / GRPCResponseMatch / GraphQLOperation / GraphQLProbe / GraphQLTransport / JSONExpectation / OpenAPIProbe

All 77 public model types are represented. Scalars, accessors and validation implementation helpers are omitted. Full individual-class Mermaid graph and field-level detail: DOT-Domain/README.md. Java models and generated schemas are authoritative; resolved execution details/state belong to the CLI.