



Travail collaboratif : NextCloud

Mise en place de la VM nextcloud et des services LDAP et gestion de fichier.

<i>ÉTUDIANT</i> S	MASURI Benoît - RODDE Edan
<i>ACTIVITÉ</i>	AP3.1 - Travail collaboratif

1. Tutoriel installation de Nextcloud sous Fedora

Nextcloud est un serveur web, qui permet de faire de la supervision, d'avoir des agendas personnels et partagés, des fichiers personnels et partager.

Voici les paramètres que j'ai choisi dans Proxmox :

Créer: Machine virtuelle

Général

Nœud: sio-pve-3

VM ID: 86501

Nom: 865FED044S1

Pool de ressources: POOL865

Ajouter à la haute dispo: ☐

Créer: Machine virtuelle

Système d'exploitation

Utiliser une image de média (ISO)

Stockage: ISO

Image ISO: r-dvd-x86_64-44-1.7.iso

Système d'exploitation de l'invité:

Type: Linux

Version: 7.x - 2.6 Kernel

Créer: Machine virtuelle

Système

Carte graphique: Par défaut

Machine: q35





Micrologiciel

BIOS: Par défaut (SeaBIOS)


Contrôleur SCSI: VirtIO SCSI single

Agent QEMU: ☒

Ajouter un module TPM: ☐

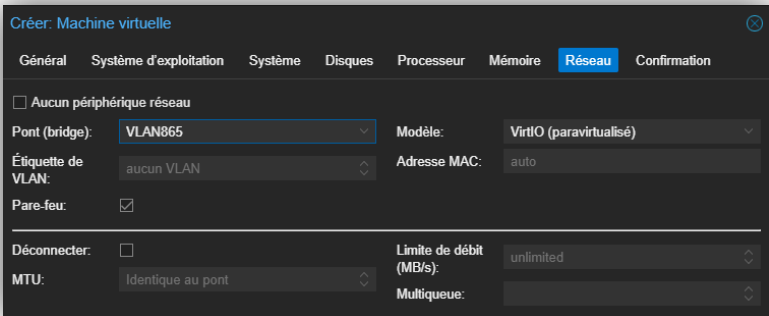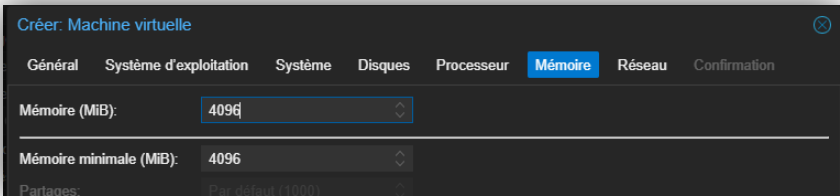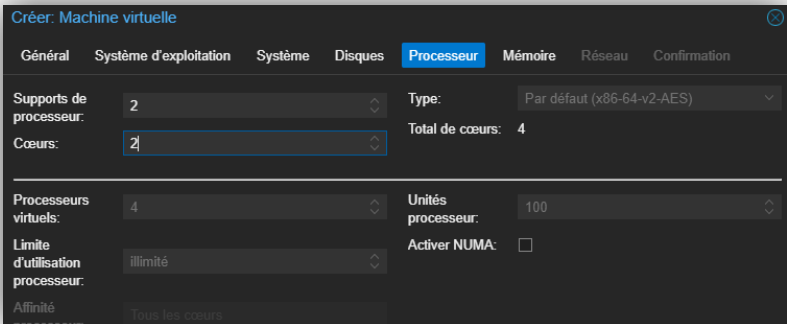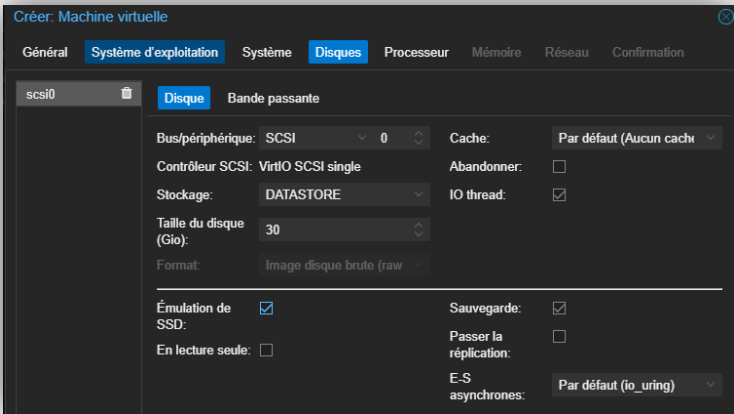

Installation de la machine virtuelle sous Fedora.

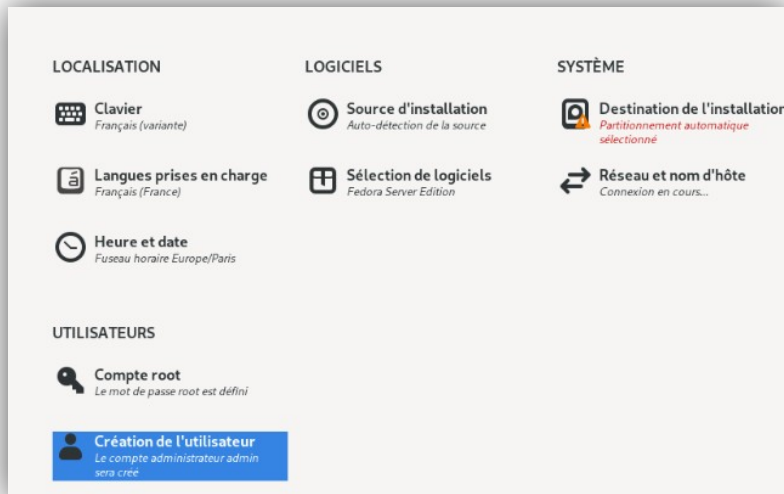

Root
plrtspa

TUTORIEL : INSTALLATION DU SERVEUR

Étape 1 : Configuration de la carte réseau Définition d'une adresse IP statique sur le réseau DMZ :

```
nmcli connection add type ethernet con-name ens18 ifname ens18
nmcli connection modify ens18 ipv4.addresses 172.20.62.1/24
nmcli connection modify ens18 ipv4.method manual
nmcli connection modify ens18 ipv4.gateway 172.20.62.254
nmcli connection modify ens18 ipv4.dns 8.8.8.8
nmcli net off
nmcli net on
```

ip a

```
2: ens18: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state
up default qlen 1000
    link/ether bc:24:11:b6:d3:23 brd ff:ff:ff:ff:ff:ff
    altname enp0s18
    altname enxbc2411b6d323
    inet 172.20.62.1/24 brd 172.20.62.255 scope global noprefixroute ens18
        valid_lft forever preferred_lft forever
    inet6 fe80::c4e2:eabe:f92a:2a50/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
```

Étape 2 : Installation des paquets et dépendances

```
dnf upgrade -y
```

```
dnf install -y httpd mariadb-server mariadb php php-fpm php-mysqlnd php-gd php-json php-  
intl php-mbstring php-xml php-zip php-curl php-opcache php-process php-ldap php-bcmath  
php-gmp policycoreutils-python-utils
```

```
systemctl enable --now httpd mariadb php-fpm
```

```
systemctl status httpd mariadb php-fpm
```

```
sept. 27 00:56:56 MODFEDO44S1 (httpd)[24035]: httpd.service: Referenced but unset environment variable evaluates to an empty string: C
sept. 27 00:56:56 MODFEDO44S1 httpd[24035]: AH00558: httpd: Could not reliably determine the server's fully qualified domain name, usi
sept. 27 00:56:56 MODFEDO44S1 systemd[1]: Reloaded httpd.service - The Apache HTTP Server.
sept. 27 00:56:56 MODFEDO44S1 httpd[18957]: Server configured, listening on: port 80

● mariadb.service - MariaDB 11.8 database server
   Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: disabled)
   Drop-In: /usr/lib/systemd/system/service.d
            └─10-timeout-abort.conf
   Active: active (running) since Tue 2026-09-22 17:51:09 CEST; 6 days ago
   Invocation: 3a8869284e6444e8bfef7756eba86578
     Docs: man:mariabdb(8)
           https://mariadb.com/kb/en/library/systemd/
   Process: 12352 ExecStartPre=/usr/libexec/mariadb-check-socket (code=exited, status=0/SUCCESS)
   Process: 12376 ExecStartPre=/usr/libexec/mariadb-prepare-db-dir mariadb.service (code=exited, status=0/SUCCESS)
   Process: 12647 ExecStartPre=/bin/sh -c [ ! -e /usr/bin/galera_recovery ] && VAR= || VAR="/usr/bin/galera_recovery"; [ $? -eq 0 ]
   Process: 12664 ExecStartPost=/usr/libexec/mariadb-check-upgrade (code=exited, status=0/SUCCESS)
   Process: 12695 ExecStartPost=/bin/rm -f /run/mariadb/wsrep-start-position (code=exited, status=0/SUCCESS)
  Main PID: 12649 (mariabdb)
    Status: "Taking your SQL requests now..."
     Tasks: 10 (limit: 4617)
  Memory: 91.1M (peak: 120.1M)
     CPU: 56.922s
   CGroup: /system.slice/mariadb.service
           └─12649 /usr/libexec/mariabdb --basedir=/usr

sept. 22 17:51:09 MODFEDO44S1 mariadb-prepare-db-dir[12599]: you need to be the system 'mysql' user to connect.
sept. 22 17:51:09 MODFEDO44S1 mariadb-prepare-db-dir[12599]: After connecting you can set the password, if you would need to be
sept. 22 17:51:09 MODFEDO44S1 mariadb-prepare-db-dir[12599]: able to connect as any of these users with a password and without sudo
sept. 22 17:51:09 MODFEDO44S1 mariadb-prepare-db-dir[12599]: See the MariaDB Knowledgebase at https://mariadb.com/kb
sept. 22 17:51:09 MODFEDO44S1 mariadb-prepare-db-dir[12599]: Please report any problems at https://mariadb.org/jira
sept. 22 17:51:09 MODFEDO44S1 mariadb-prepare-db-dir[12599]: The latest information about MariaDB is available at https://mariadb.org/
sept. 22 17:51:09 MODFEDO44S1 mariadb-prepare-db-dir[12599]: Consider joining MariaDB's strong and vibrant community:
sept. 22 17:51:09 MODFEDO44S1 mariadb-prepare-db-dir[12599]: https://mariadb.org/get-involved/
sept. 22 17:51:09 MODFEDO44S1 (mariabdb)[12649]: mariadb.service: Referenced but unset environment variable evaluates to an empty stri
sept. 22 17:51:09 MODFEDO44S1 systemd[1]: Started mariadb.service - MariaDB 11.8 database server.

● php-fpm.service - The PHP FastCGI Process Manager
   Loaded: loaded (/usr/lib/systemd/system/php-fpm.service; disabled; preset: disabled)
   Drop-In: /usr/lib/systemd/system/service.d
            └─10-timeout-abort.conf
   Active: active (running) since Thu 2026-09-24 08:19:44 CEST; 5 days ago
   Invocation: ca6cbcc479f40baa55f54ef22393197
  Main PID: 18947 (php-fpm)
    Status: "Processes active: 0, idle: 9, Requests: 303, slow: 0, Traffic: 0.10req/sec"
     Tasks: 10 (limit: 4617)
  Memory: 140.7M (peak: 318M)
     CPU: 35.933s
   CGroup: /system.slice/php-fpm.service
           └─18947 "php-fpm: master process (/etc/php-fpm.conf)"
             └─18949 "php-fpm: pool www"
               └─18950 "php-fpm: pool www"
                 └─18951 "php-fpm: pool www"
                   └─18952 "php-fpm: pool www"
                     └─18953 "php-fpm: pool www"
                       └─19239 "php-fpm: pool www"
                         └─19243 "php-fpm: pool www"
                           └─19250 "php-fpm: pool www"
                             └─28713 "php-fpm: pool www"

sept. 24 08:19:44 MODFEDO44S1 systemd[1]: Starting php-fpm.service - The PHP FastCGI Process Manager...
sept. 24 08:19:44 MODFEDO44S1 systemd[1]: Started php-fpm.service - The PHP FastCGI Process Manager.
```

Étape 3 : Création de la base de données SQL , création du schéma de base de données et de l'utilisateur dédié MariaDB :

```
mariadb
CREATE DATABASE nextcloud CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci;
CREATE USER 'nextcloud_user'@'localhost' IDENTIFIED BY 'P@ssw0rd'; GRANT ALL
PRIVILEGES ON nextcloud.* TO 'nextcloud_user'@'localhost';
FLUSH PRIVILEGES;
EXIT;
```

Étape 4 : Déploiement de l'application Nextcloud Téléchargement de la dernière version stable, extraction et application des permissions pour Apache :

```
cd /tmp
curl -O https://download.nextcloud.com/server/releases/latest.tar.bz2
tar -xjvf latest.tar.bz2 -C /var/www/html/
mkdir -p /var/www/html/nextcloud/data
chown -R apache:apache /var/www/html/nextcloud
chmod -R 755 /var/www/html/nextcloud
```

Étape 5 : Sécurisation SELinux et Pare-feu Configuration des autorisations pour le contexte de sécurité SELinux et ouverture des flux Web :

```
semanage fcontext -a -t httpd_sys_rw_content_t "/var/www/html/nextcloud(/.*)?"
restorecon -R /var/www/html/nextcloud
setsebool -P httpd_can_network_connect on
setsebool -P httpd_can_connect_ldap on
firewall-cmd --permanent --add-service=http --add-service=https
firewall-cmd --reload
sed -i 's/opcache.memory_consumption = 128/opcache.memory_consumption = 512/'
/etc/php.ini
systemctl restart php-fpm
```

Étape 6 : Contournement du problème de timeout du Magasin d'applications

```
sudo -u apache php /var/www/html/nextcloud/occ config:system:set has_internet_connection  
--type=boolean --value=true
```