



Grain

See what happened in your packages while you weren't looking — and how each change was built.

REPOSITORY



acme/monorepo



acme/monorepo

1,284 packages · analyzed 4 min ago



openpanel/studio

412 packages · analyzed 2 h ago



northwind/platform

876 packages · analyzed yesterday



Other...

analyze a GitHub repository

Open canvas

Pre-analyzed repositories open instantly. Anything else is analyzed on demand — about 40 seconds.

Repository field — three states

One slot in the landing card. The select is replaced in place; nothing else on the page moves.

A · DEFAULT

acme/monorepo

▼

Pre-analyzed repositories, newest analysis first. Last item is Other...

B · OTHER... CHOSEN

←

https://github.com/owner/repo |

Analyze

Select is swapped for the URL field in the same slot. Focus lands in the field. The back arrow restores the select and discards what was typed.

C · INVALID URL

←

github.com/acme |

Analyze


⚠ That isn't a repository URL — Grain needs an owner and a repo, like github.com/acme/monorepo.

Validates on submit and on blur, never per keystroke. Field carries aria-invalid and aria-describedby pointing at this line.

Analyzing github.com/acme/monorepo

58%

Step 3 of 5 · about 25 seconds left



- ✓

Resolved repository

1,284 packages · 3,910 dependency edges
- ✓

Read the dependency graph

built in 2.1 s
- C

Fetching pull requests

42 of 100
- Attributing changes to packages


waiting
- Summarizing how each change was built

waiting

JUST READ

- #4251 Streaming list virtualization → render-engine, package-2
- #4233 Fix text measurement on retina → render-engine
- #4210 Dark mode token pass → design-tokens, render-engine
- #4182 Added global site settings → settings-core, render-engine, app-1

Analysis keeps running if you close this tab. Grain will have the canvas ready when you come back.

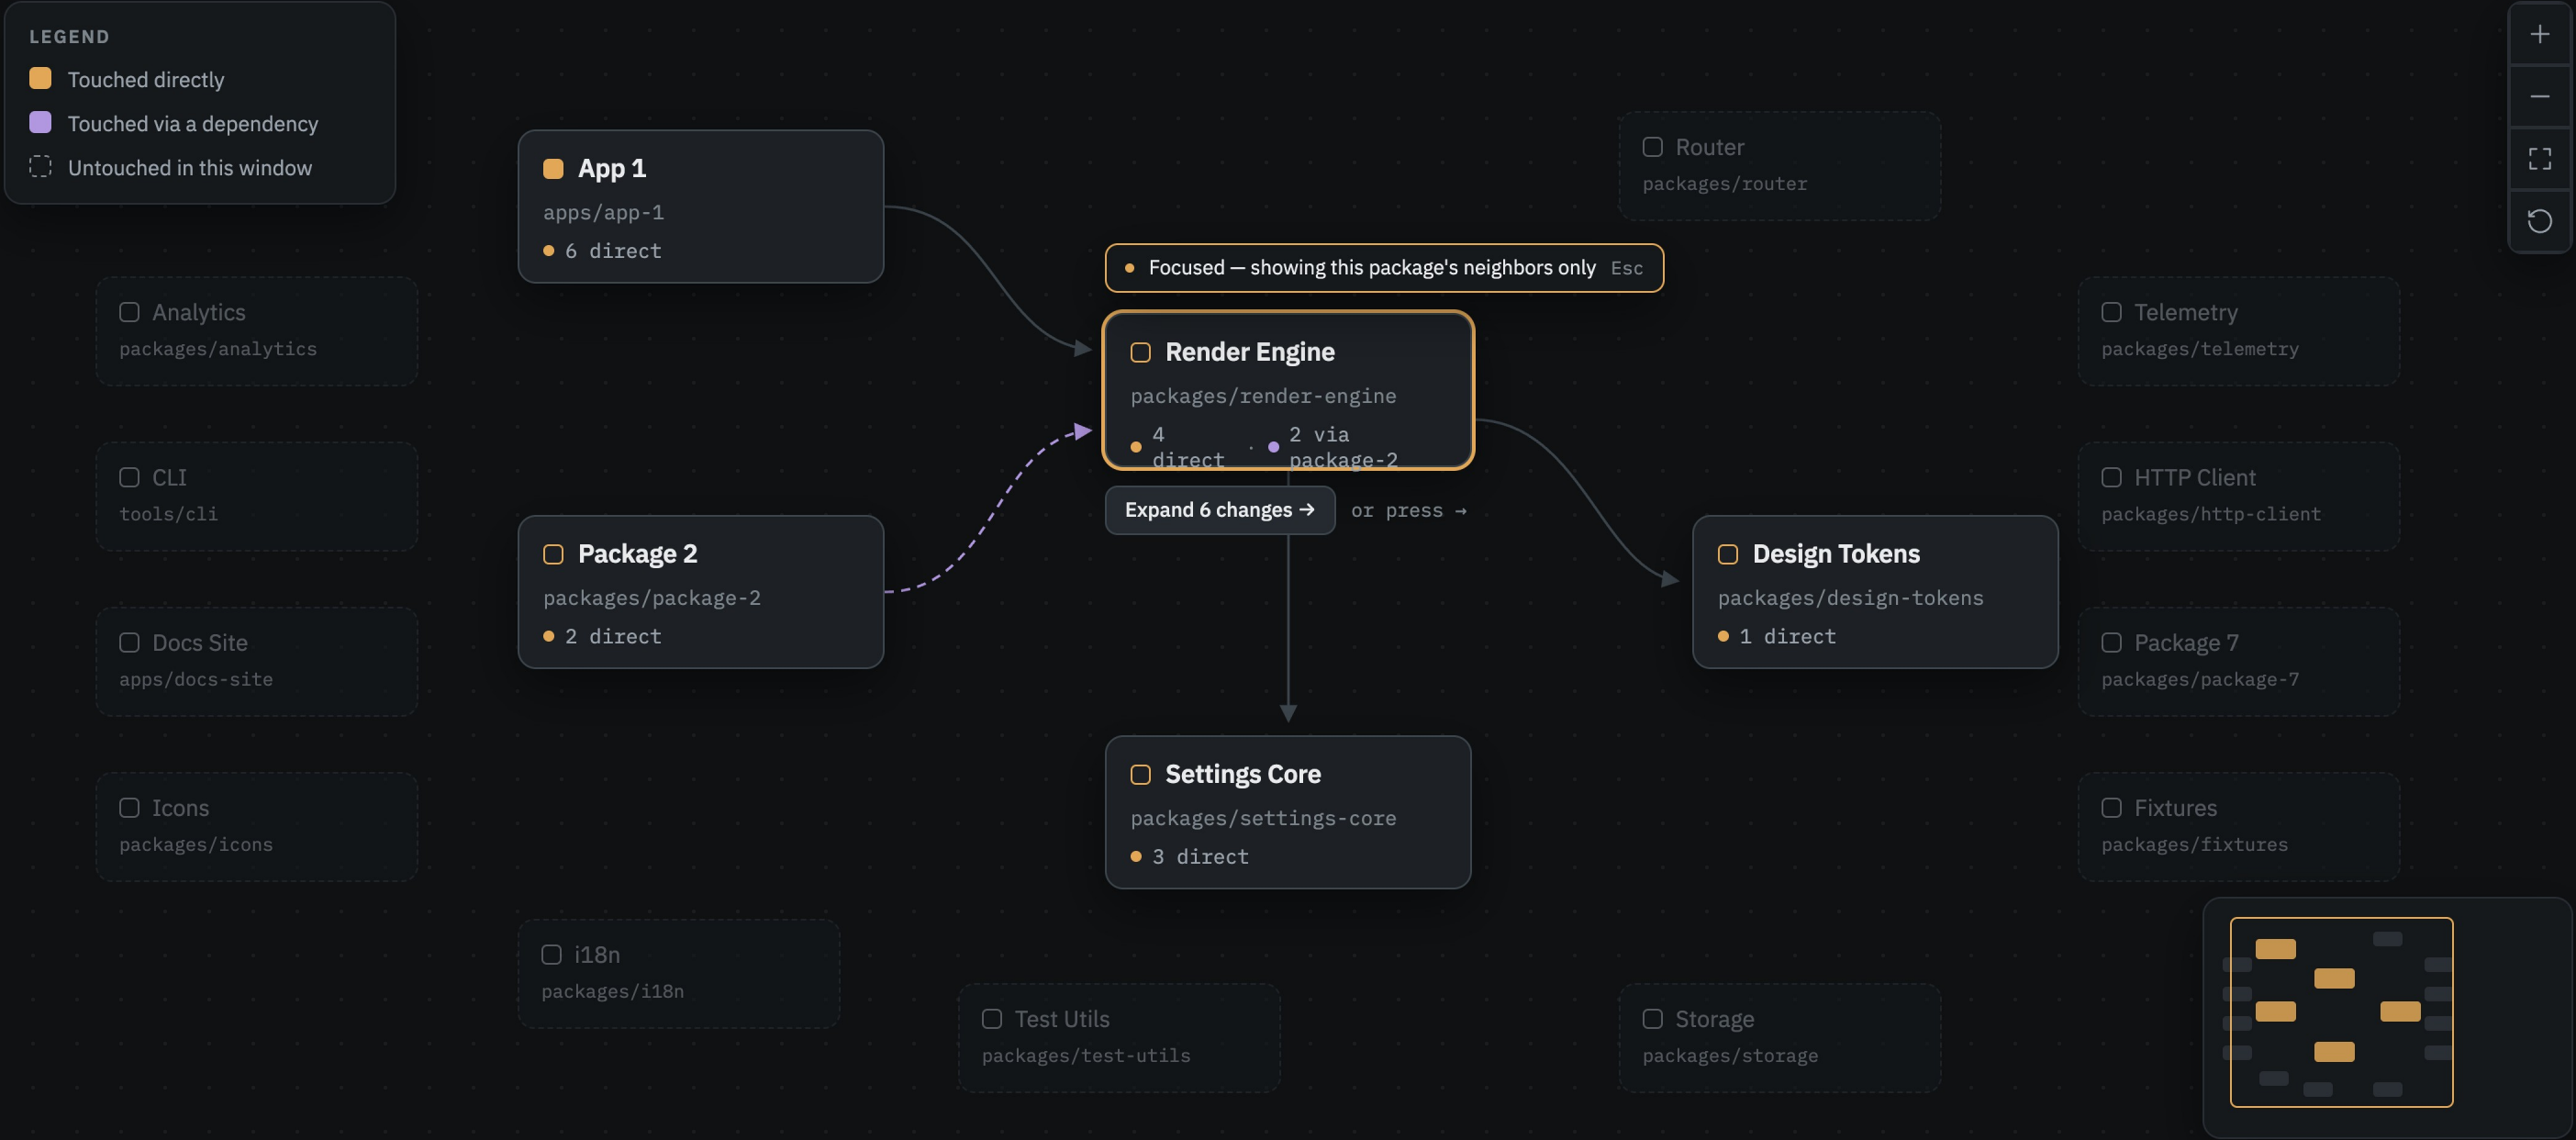

☐ **Render Engine**

packages/render-engine

● 4 direct · ● 2 via package-2

6 changes landed here between Aug 24 and Sep 7 — grouped by change, not by commit.

Added global site settings

● direct

#4182 · maya.k · merged Aug 28

render-engine settings-core app-1

APPROACH

Wired site settings straight into the render config instead of going through the existing settings resolver.

3 steps >

Dark mode token pass

● via design-tokens

#4210 · s.okafor · merged Sep 2

design-tokens render-engine

APPROACH

Added a second token table read at paint time rather than resolving tokens once when the theme loads.

2 steps >

Fix text measurement on retina

● direct

#4233 · l.nguyen · merged Sep 5

render-engine

APPROACH

Rounded measured glyph widths inside the layout pass; the measurement cache is still keyed on CSS pixels.

4 steps >

Streaming list virtualization

● via package-2

#4251 · maya.k · merged Sep 9

package-2 render-engine

APPROACH

Introduced a parallel render path for virtualized lists. The original path is untouched, so both now have to be changed together.

5 steps >

ALSO TOUCHED

☒ App 1

6 direct >

☐ Settings Core

3 direct >

☐ Package 2

2 direct >


☐ Design Tokens


1 direct >

12 untouched packages hidden while a package is expanded.

● Reached indirectly

Two of these changes never name render-engine in their PR. They are reached through package-2 and design-tokens.



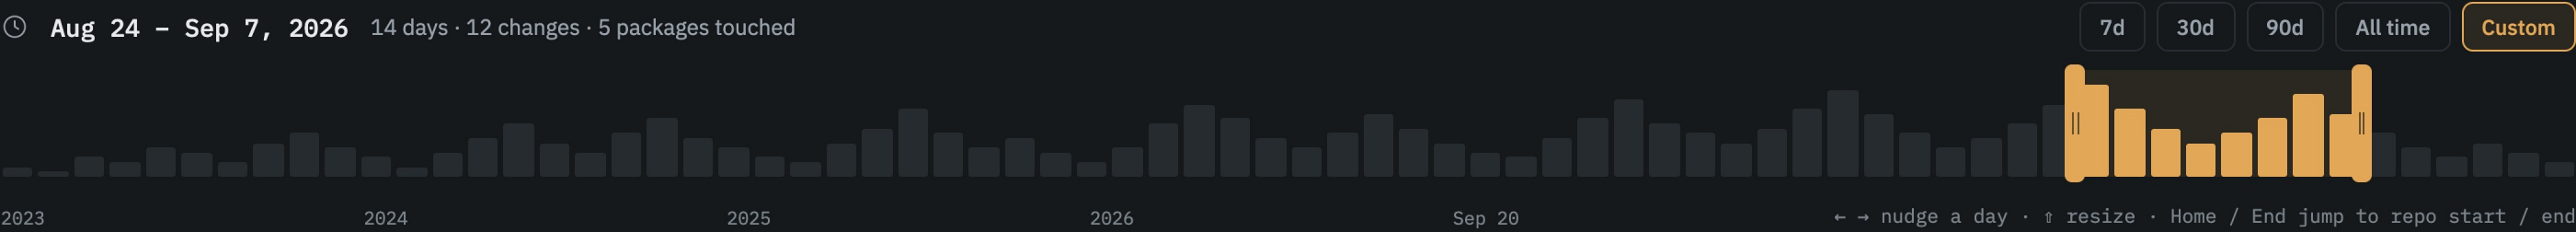

Added global site settings

#4182 · maya.k · merged Aug 28

render-engine

settings-core

app-1

APPROACH

Wired site settings straight into the render config instead of going through the existing settings resolver.







HOW IT WAS BUILT 3 steps, in the order they were built — not commit order.



 Step 3 is where this change entered render-engine. Grain shows what happened and stops there — no review, no score, no gate.

Next change →

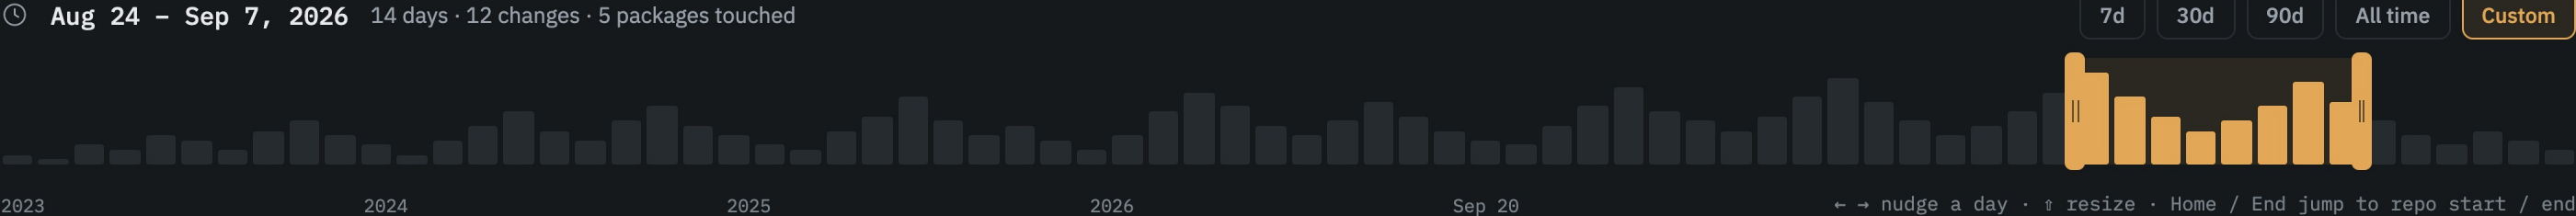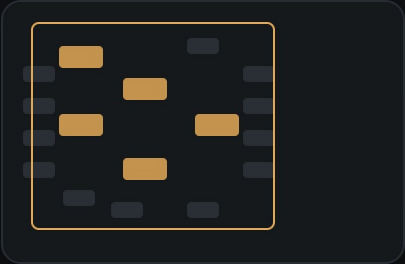

 Analysis stopped at step 3 of 5

GitHub returned 502 while fetching pull requests for acme/monorepo. 42 of 100 were already fetched and are kept — retrying resumes from there rather than starting over.

```
17:04:22 GET /repos/acme/monorepo/pulls?page=5 → 502
x-request-id: 8c1f42a0-9d33-4e81-b0c2-77e1f2a4c910
```

Retry from step 3

Choose another repository

Nothing was written to your repo.

SAME LAYOUT, OTHER FAILURES

Repository not found



Grain can't see github.com/acme/private-thing. It may be private, renamed, or misspelled.

Back

Edit the URL

GitHub rate limit spent



60 requests an hour without a token. The limit resets at 4:41 PM — 23 minutes from now.

Retry at 4:41 PM

Add a token

LEGEND

 Touched directly

 Touched via a dependency

 Untouched in this window

Replay tour

Keyboard shortcuts

How Grain reads a PR

☐ Analytics

packages/analytics

☐ CLI

tools/cli

☐ Docs Site

apps/docs-site

☐ Icons

packages/icons

 App 1

apps/app-1

 6 direct

☐ Package 2

packages/package-2

 2 direct

☐ Render Engine

packages/render-engine

 4 direct

 2 via package-2

☐ Router

packages/router

☐ Design Tokens

packages/design-tokens

 1 direct

☐ Telemetry

packages/telemetry

☐ HTTP Client

packages/http-client

☐ Package 7

packages/package-7

☐ Fixtures

packages/fixtures

2 of 4

Scrub to a window



Drag either handle to set a range — the two weeks you were away, a sprint you weren't on. The histogram behind the track is change volume across the whole life of the repo, so you can see where activity clustered before you scrub. Everything above the slider is driven by this range.



Skip tour

Back

Next



THE TOUR

 Your packages, dimmed and lit what the map shows


 **Scrub to a window** the time slider

 Open a package changes, not commits

 Open a change how it was built

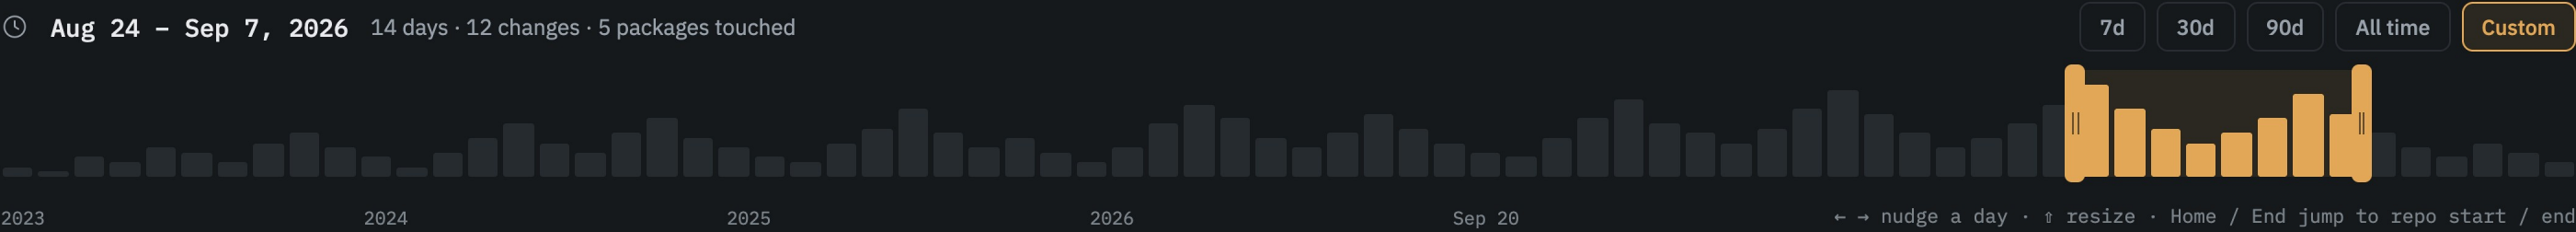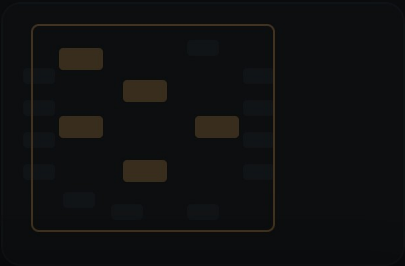

Time slider — anatomy Persistent at the bottom of every canvas screen. It drives everything above it.

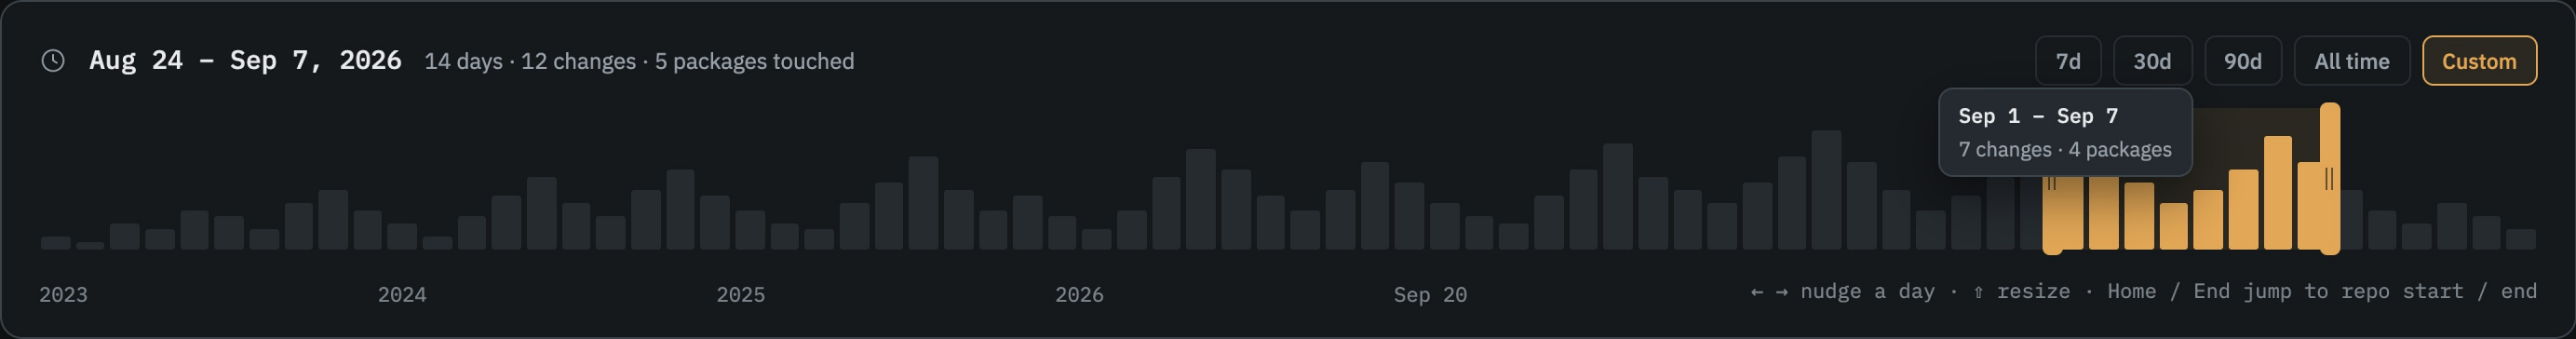

REST

Handles sit flush with the track edge.

DRAGGING

The moving handle widens and the date readout follows it live.

HANDLE FOCUSED

Tab reaches each handle; a 2px ring, not a color change, marks focus.

PRESET APPLIED

Picking a preset moves both handles and swaps the Custom pill for it.

Histogram — merged changes per bucket across the repo's whole life. Bars inside the range are lit; outside they stay muted.

Range, not a point — two handles, always. There is no single-date mode.

Dates are spelled out — the track is for aim, the readout is the truth. Never make someone read a position.

Hover — a bucket tooltip gives its dates and counts before you commit to scrubbing.

