


Imperative Recipe API

```
public class MakePublic extends Recipe {  
    public String getDisplayName() {  
        return "Make Class Public";  
    }  
    @Override  
    protected JavaVisitor<ExecutionContext> getVisitor() {  
        return new ChangeTypeVisitor();  
    }  
    private class MakePublicVisitor  
        extends JavaVisitor<ExecutionContext> { /* .. */ }  
}  
class JavaVisitor<P> extends TreeVisitor<J, P> {  
    J visitStatement(Statement statement) {}  
    J visitAnnotatedType(J.AnnotatedType annotatedType) {}  
    J visitAnnotation(J.Annotation annotation) {}  
    J visitAssert(J.Assert azzert) {}  
    J visitAssignment(J.Assignment assign) {}  
    J visitAssignmentOperation(J.AssignmentOperation assignOp) {}  
    // ...  
}
```



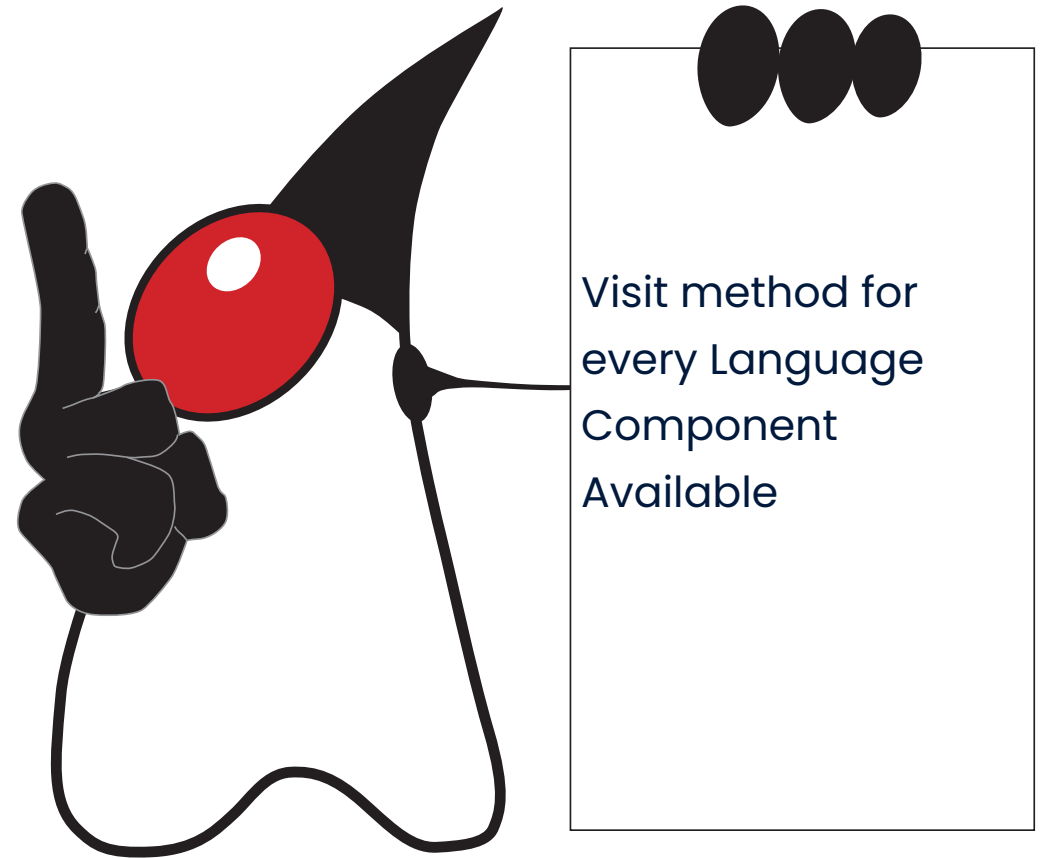

Exercise 4 – Basics of Imperative Recipes



<https://qr.de/8Ekx23>

1. Advance Test
2. Understand existing Visitors
3. Advance Visitor

Optional: Run againsts Apache Maven and study.