Hands-on Lab: Create Tables using SQL Scripts and Load Data into Tables

Estimated time needed: 30 minutes

In this lab, you will learn how to run SQL scripts to create several tables at once, as well as how to load data into tables from .csv files.

Software Used in this Lab

In this lab, you will use <u>IBM Db2 Database</u>. Db2 is a Relational Database Management System (RDBMS) from IBM, designed to store, analyze and retrieve the data efficiently.

To complete this lab you will utilize a Db2 database service on IBM Cloud. If you did not already complete this lab task earlier in this module, you will not yet have access to Db2 on IBM Cloud, and you will need to follow this lab first:

• Hands-on Lab: Sign up for IBM Cloud, Create Db2 service instance and Get started with the Db2 console

Database Used in this Lab

The database used in this lab is an internal database. You will be working on a sample HR database. This HR database schema consists of 5 tables called **EMPLOYEES**, **JOB HISTORY**, **JOBS**, **DEPARTMENTS** and **LOCATIONS**. Each table has a few rows of sample data. The following diagram shows the tables for the HR database:

SAMPLE HR DATABASE TABLES **EMPLOYEES** B_DATE L_NAME SEX ADDRESS SALARY JOB_ID E1001 John 123456 1976-01-09 М 5631 Rice, OakPark,IL 100 100000 30001 980 Berry In, Elgin,IL 200 123457 1972-07-31 E1002 E1003 Steve Wells 123458 1980-08-10 291 Springs, Gary, IL JOB HISTORY **JOBS** EMPL ID MIN SALARY MAX SALAR JOB IDENT | JOB TITLE E1001 2000-01-30 100 100 Sr. Architect 60000 100000 E1002 2010-08-16 200 200 Sr.SoftwareDeveloper 60000 80000 E1003 2016-08-10 300 Jr.SoftwareDeveloper 60000 40000 **DEPARTMENTS** LOCATIONS MANAGER_ID LOC_ID LOCT_ID Architect Group 30001 L0001 L0001 2 L0002 Software Development 30002 L0002 L0003 7 Design Team 30003 L0003

Objectives

After completing this lab, you will be able to:


- Create tables using SQL scripts
- Load data into tables

NOTE: Make sure that you are using the CSV file and datasets from the same instruction file.


Exercise 1: Create tables using SQL scripts

In this exercise, you will learn how to execute a script containing the CREATE TABLE commands for all the tables rather than create each table manually by typing the DDL commands in the SQL editor.


- 1. Download the script file to your computer:
 - o HR Database Create Tables Script.sql
- 2. Login to IBM Cloud and go to the Resource List where you can find the Db2 service instance that you created in a previous lab under Services section. Click on the Db2-xx service. Next, click on Go to UI button.

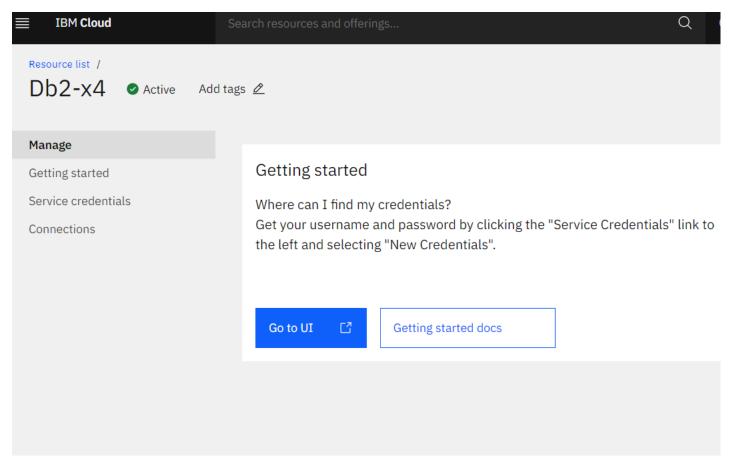

3. Click on **SQL** on the left corner and click the +icon

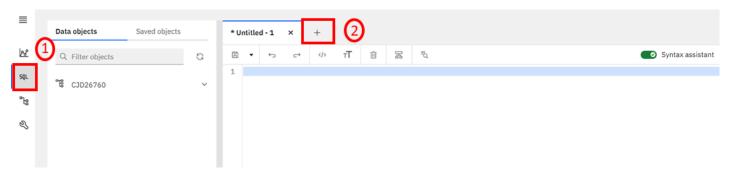


Select the From File option.

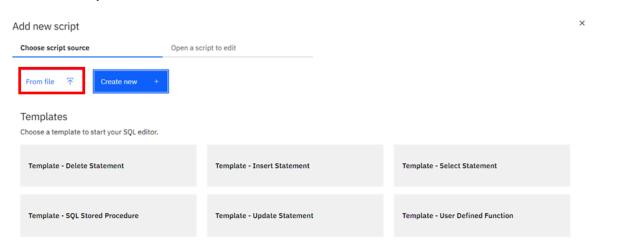


- 4. Locate the file HR_Database_Create_Tables_Script.sql that you downloaded to your computer earlier and open it.
- 5. Once the statements are in the SQL Editor tool, you can run the queries against the database by selecting the Run All button.


Run SQL

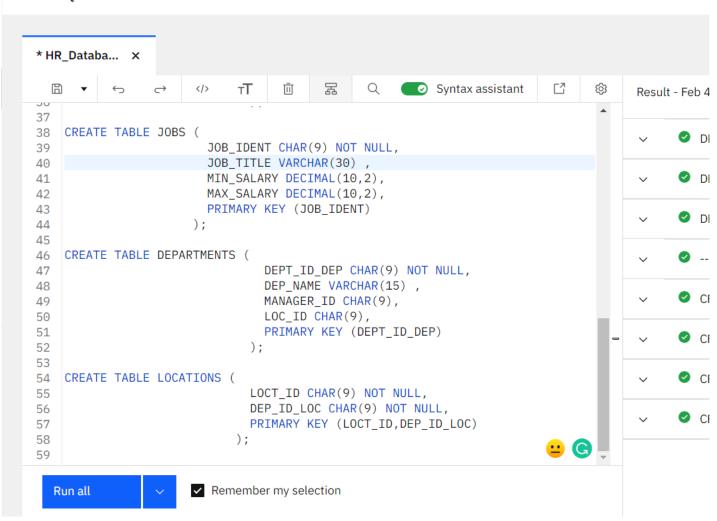


- 6. On the right side of the SQL editor window you will see a Result section. Clicking on a query in the Result section will show the execution details of the job like whether it ran successfully, or had any errors or warnings. Ensure your queries ran successfully and created all the tables.
 - Note: You may see several errors before the successful creation of the tables. These errors relate to the dropping (removal) of any pre-existing version of these tables. You can ignore these errors.

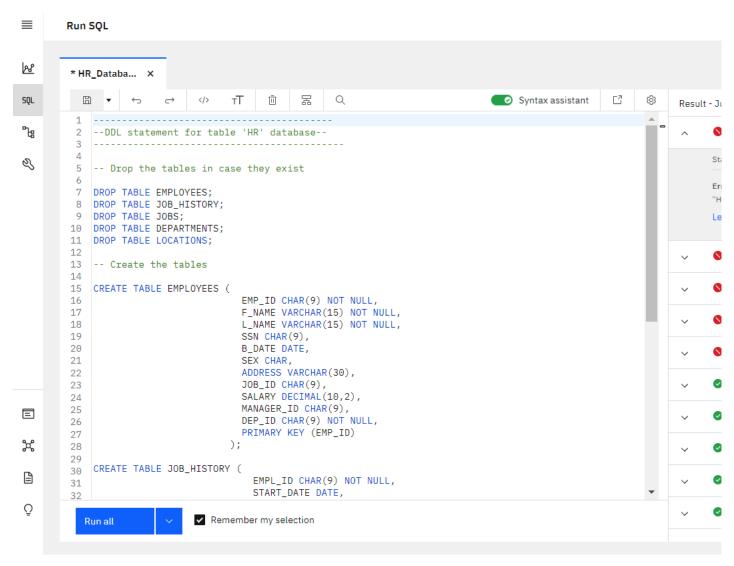


7. Now you can look at the tables you created. Click on the data icon and then click on Tables tab

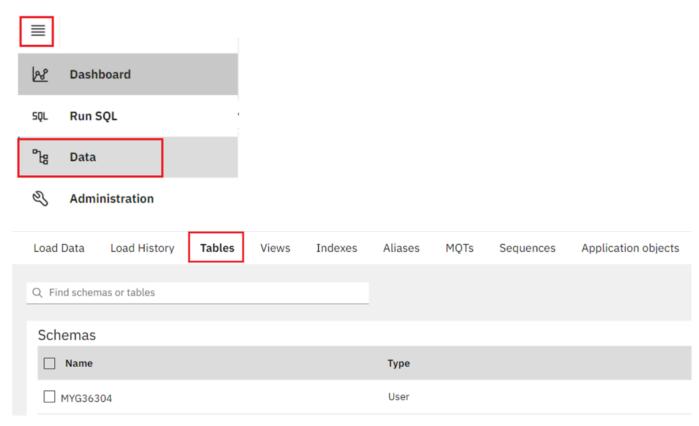

8. Select the Schema corresponding to your Db2 userid. It typically starts with 3 letters (not SQL) followed by 5 numbers (but will be different from the MYG36304 example below). Then on the right side of the screen you should see the 5 newly created tables listed RTMENTS, EMPLOYEES, JOBS, JOB_HISTORY and LOCATIONS (plus any other tables you may have created in previous labs e.g. PETSALE, PETRESCUE, etc.).

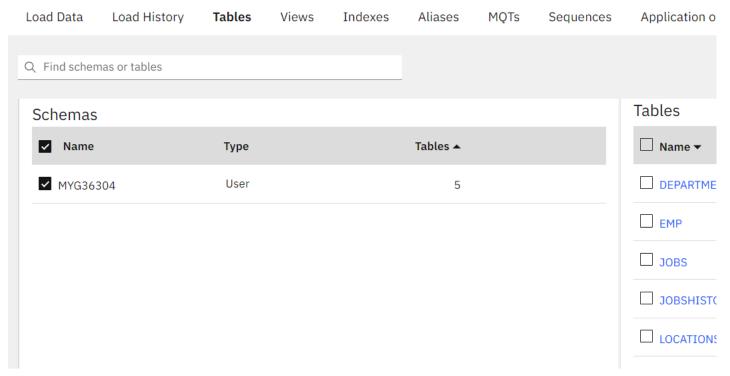

9. Click on any of the tables and you will see its Table Definition (that is, its list of columns, data types, etc).

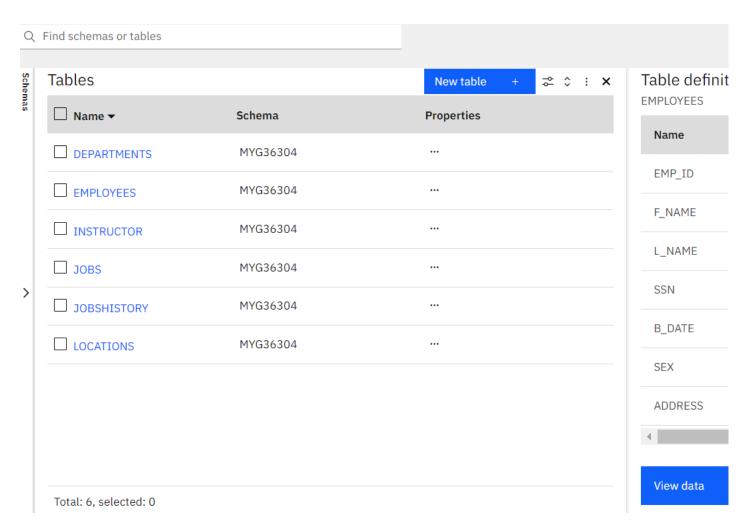

Exercise 2: Load data into tables


In this exercise, you will learn how data can be loaded into Db2. You could manually insert each row into the table one by one, but that would take a long time. Instead, Db2 (and almost every other database) allows you to load data from .CSV files.

The steps below explain the process of loading data into the tables you created earlier in exercise 1.


- 1. Download the 5 .csv files below to your local computer:
 - o <u>Departments.csv</u>
 - Employees.csv
 - o <u>Jobs.csv</u>
 - Locations.csv
 - JobsHistory.csv

Note: For learners who are encountering issues with loading from .csv in Db2 using Firefox, they can download the .txt files and try with those. To download the .txt files, simply right-click on the file and select Save link As and save the file in local system.


- o <u>Departments.txt</u>
- Employees.txt
- Jobs.txt
- <u>Locations.txt</u>
- JobsHistory.txt
- 2. In the Db2 Console, from the 3-bar menu icon in the top left corner, click Load, and then select Load Data.




3. On the Load Data page that opens, ensure My Computer is selected as the source. Click on the browse files link.

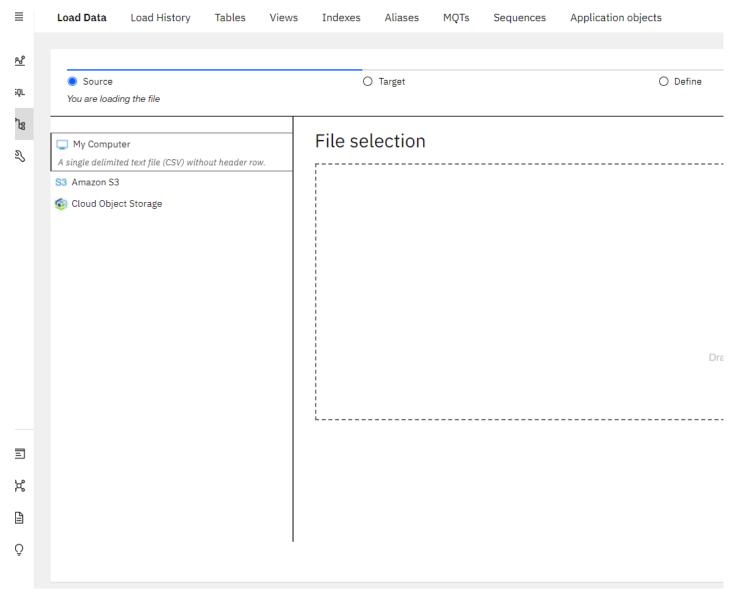


4. Choose the file Employees.csv that you downloaded to your computer and click Open.

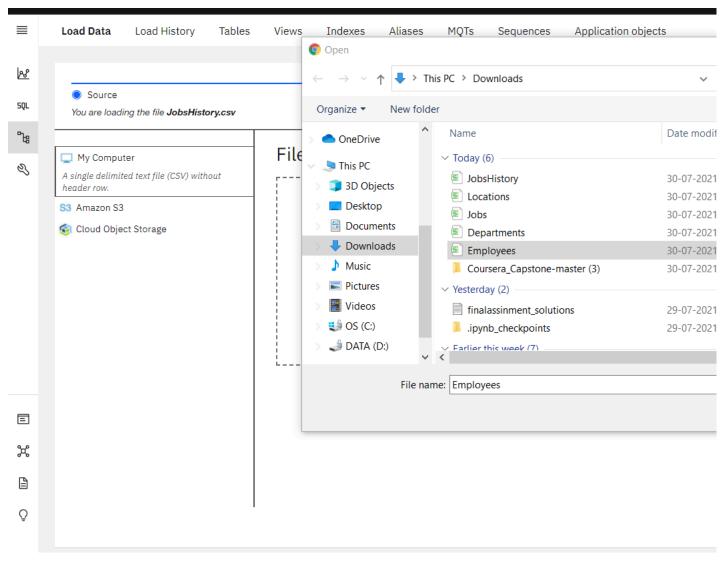


5. Once the File is selected, click **Next** in the bottom right corner.

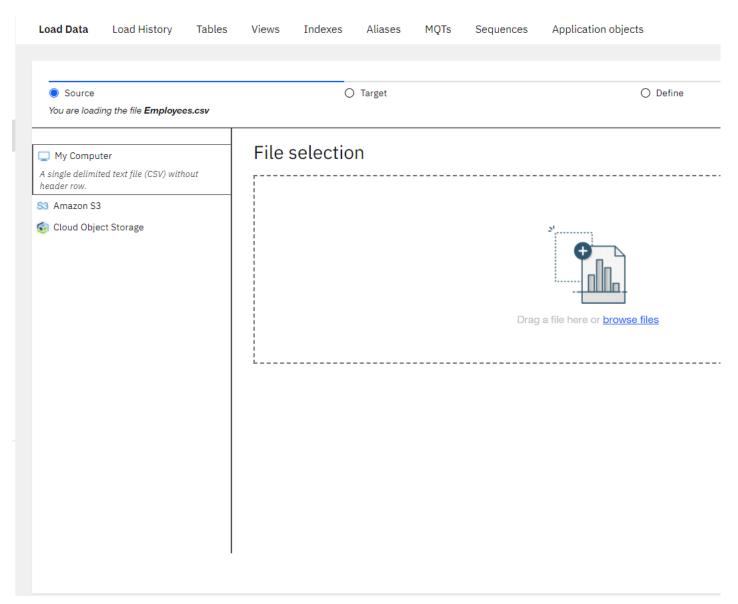

^{6.} Select the schema for your Db2 Userid (the one where you created the tables earlier). It will show all the tables that have been created in this schema previously, including the Employees table. Select the EMPLOYEES table, and in the new Table Definition tab that appears, choose Overwrite table with new data (note the warning message), then click Next. Select the Employees table.

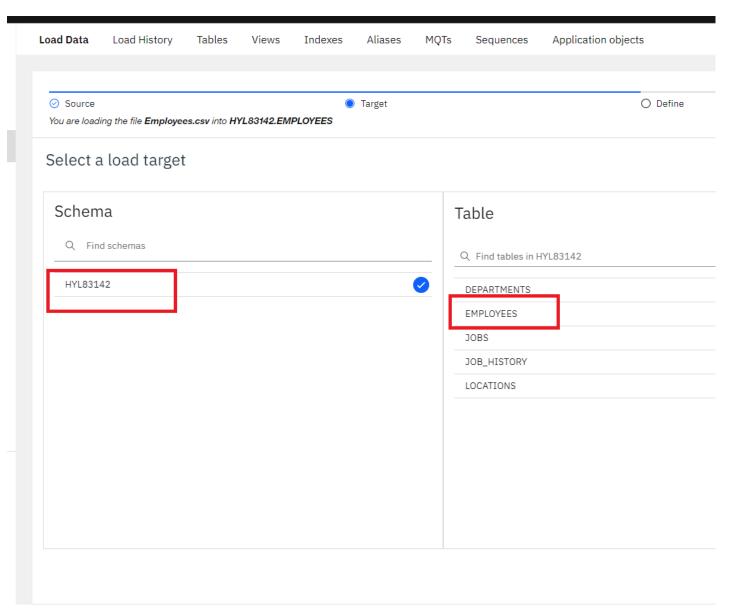

7. Since the source data files do not contain any rows with column labels, turn off the setting for Header in first row.

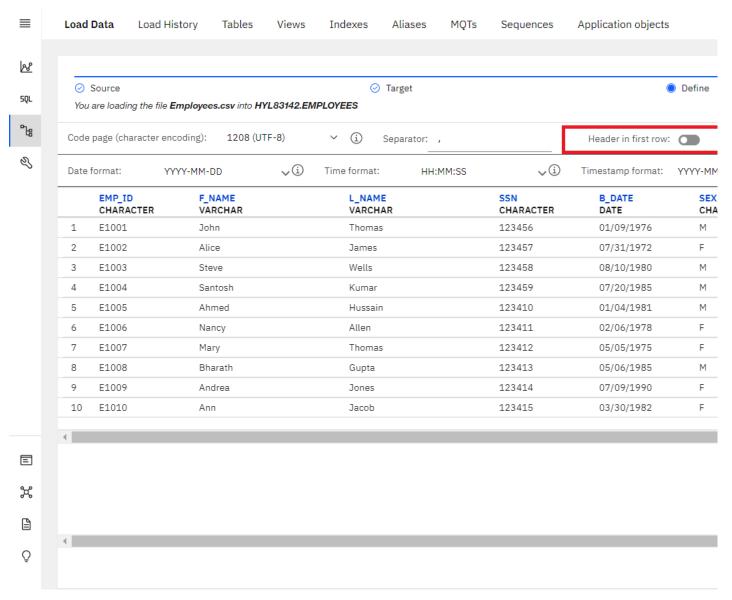


8. Click Next. Review the load settings and click Begin Load in the bottom right corner.

Source ou are loading to	he file Employees.csv into HYL831		Target				⊘ Define
	Review settings						
	Summary						Option Maximum number of
	Code page: 1208 (Default)						
	Separator:	, (Default)	, (Default) HH:MM:SS (Default)				
	Time format:	HH:MM:SS					
	Date format:	YYYY-MM-	DD (Default	i)			
	Timestamp format:	YYYY-MM-	YYYY-MM-DD HH:MM:SS (Default)				
	String delimiter:	(Default)					

^{9.} After loading has completed, you will notice that you were successful in loading all 10 rows of the Employees table. If there are any **Errors** or **Warnings**, you can see them on this screen.

Load details My computer Target Employees.csv HYL83142.EMPLOYEES Status Settings The data load job succeede You can now work with your data. 10 10 Rows read Rows loaded Rows rejected Start time 07/30/2021 3:51:29 PM End time 07/30/2021 3:51:34 PM

10. Click on the **Tables** tab and then select the **EMPLOYEES** table and then click on **View data**.

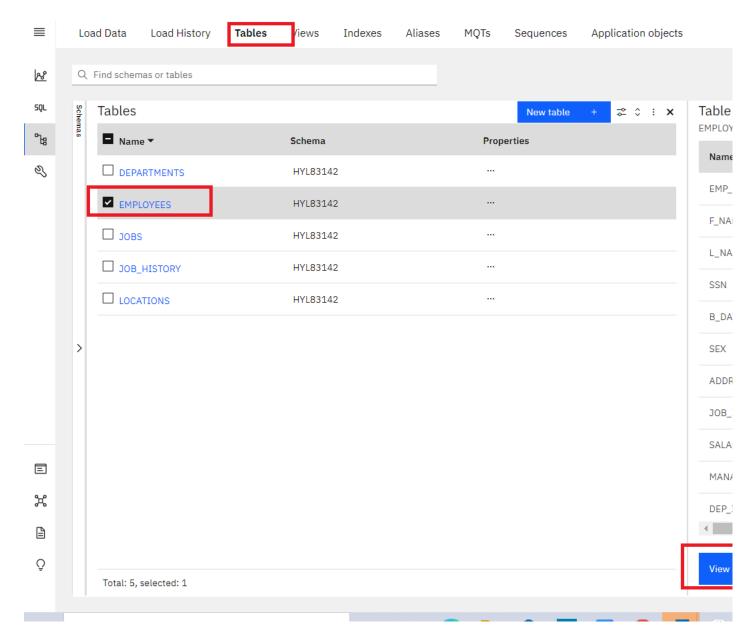

11. Now you can view the table data.

						•••						
<u>₩</u>	HVI 931/1	HYL83142.EMPLOYEES										
5QL	H1L03142	TITLOSI42.LITII LOTELS										
B												
Ø	EMP_ID	F_NAME	L_NAME	SSN	B_DATE	SEX	ADDRESS					
	E1001	John	Thomas	123456	1976-01-09	М	5631 Rice, OakPark					
	E1002	Alice	James	123457	1972-07-31	F	980 Berry In, Elgin,					
	E1003	Steve	Wells	123458	1980-08-10	М	291 Springs, Gary,I					
	E1004	Santosh	Kumar	123459	1985-07-20	М	511 Aurora Av, Auro					
	E1005	Ahmed	Hussain	123410	1981-01-04	М	216 Oak Tree, Gene					
	E1006	Nancy	Allen	123411	1978-02-06	F	111 Green Pl, Elgin					
	E1007	Mary	Thomas	123412	1975-05-05	F	100 Rose Pl, Gary,I					
	E1008	Bharath	Gupta	123413	1985-05-06	М	145 Berry Ln, Nape					
≡	E1009	Andrea	Jones	123414	1990-07-09	F	120 Fall Creek, Gar					
×	E1010	Ann	Jacob	123415	1982-03-30	F	111 Britany Springs					
Õ												

MQTs

Sequences

Aliases

Application objects

- 12. Now it's your turn to load data to the remaining 4 tables of the HR database LOCATIONS, JOB_HISTORY, JOBS, and DEPARTMENTS from the remaining source files.
- 13. Click **Load More Data** and then follow the steps from **Step 3** above again to load the remaining 4 tables. **IMPORTANT** Make sure you perform the steps in **Step 7** for each of the 4 remaining file loads.

Congratulations! You have completed this lab, and you are ready for the next topic.

Author(s)

Load Data

Load History

Tables

Views

Indexes

- Rav Ahuja
- Sandip Saha Joy

Skills Network