

Hands-on Lab: Improving Performance of Slow Queries in MySQL



Estimated time needed: 45 minutes

In this lab, you will learn how to improve the performance of your slow queries in MySQL, which can be particularly helpful with large databases.

Objectives

After completing this lab, you will be able to:

1. Use the EXPLAIN statement to check the performance of your query
2. Add indexes to improve the performance of your query
3. Apply other best practices such as using the UNION ALL clause to improve query performance

Software Used in this Lab

In this lab, you will use [MySQL](#). MySQL is a Relational Database Management System (RDBMS) designed to efficiently store, manipulate, and retrieve data.




To complete this lab, you will utilize the MySQL relational database service available as part of the IBM Skills Network Labs (SN Labs) Cloud IDE. SN Labs is a virtual lab environment used in this course.

Database Used in this Lab

The Employees database used in this lab comes from the following source: <https://dev.mysql.com/doc/employee/en/> under the [CC BY-SA 3.0 License](#).

The following entity relationship diagram (ERD) shows the schema of the Employees database:

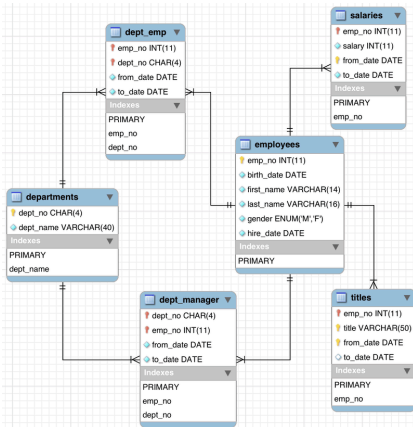

The first row of each table is the table name, the rows with keys next to them indicate the primary keys, and the remaining rows are additional attributes.

Exercise 1: Load the Database

Let's begin by retrieving the database and loading it so that it can be used.

1. In the menu bar, select Terminal > New Terminal. This will open the Terminal.

To download the zip file containing the database, copy and paste the following into the Terminal:

```
wget https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DB0231EN-SkillsNetwork/datasets/employeesdb.zip
```

```

theia@theiadocker-: /home/project$ wget https://cf-courses-data.s3.us.cloud-object-
ets/employeesdb.zip
--2021-10-12 20:08:23-- https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cl
Resolving cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud (cf-courses-data.s3.
45
Connecting to cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud (cf-courses-data
245|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 36689578 (35M) [application/zip]
Saving to: 'employeesdb.zip'

employeesdb.zip          100%[=====
2021-10-12 20:08:25 (30.3 MB/s) - 'employeesdb.zip' saved [36689578/36689578]

theia@theiadocker-: /home/project$ █

```

2. Next, we'll need to unzip its contents. We can do that with the following command:

```
unzip employeesdb.zip
```

```

theia@theiadocker-: /home/project$ unzip employeesdb.zip
Archive: employeesdb.zip
  creating: employeesdb/
  creating: employeesdb/sakila/
 inflating: employeesdb/load_salaries2.dump
 inflating: employeesdb/test_versions.sh
 inflating: employeesdb/objects.sql
 inflating: employeesdb/load_salaries3.dump
 inflating: employeesdb/load_dept_emp.dump
 inflating: employeesdb/test_employees_sha.sql
 inflating: employeesdb/Changelog
  creating: employeesdb/images/
 inflating: employeesdb/employees_partitioned_5.1.sql
 inflating: employeesdb/test_employees_md5.sql
 inflating: employeesdb/README.md
 inflating: employeesdb/employees.sql
 inflating: employeesdb/load_titles.dump
 inflating: employeesdb/employees_partitioned.sql
 inflating: employeesdb/load_dept_manager.dump
 inflating: employeesdb/sql_test.sh
 inflating: employeesdb/load_departments.dump
 inflating: employeesdb/load_salaries1.dump
 inflating: employeesdb/show_elapsed.sql
 inflating: employeesdb/load_employees.dump
 inflating: employeesdb/sakila/README.md
 inflating: employeesdb/sakila/sakila-mv-data.sql
 inflating: employeesdb/sakila/sakila-mv-schema.sql
 inflating: employeesdb/images/employees.jpg
 inflating: employeesdb/images/employees.png
 inflating: employeesdb/images/employees.gif
theia@theiadocker-: /home/project$ █

```

3. Now, let's change directories so that we're able to access the files in the newly created **employeesdb** folder.

```
cd employeesdb
```

Check the line next to **theia@theiadocker**. If it reads **/home/project/employeesdb**, then you have successfully changed directories!

```


theia@theiadocker-: /home/project$ unzip employeesdb.zip
Archive:  employeesdb.zip
  creating: employeesdb/
  creating: employeesdb/sakila/
  inflating: employeesdb/load_salaries2.dump
  inflating: employeesdb/test_versions.sh
  inflating: employeesdb/objects.sql
  inflating: employeesdb/load_salaries3.dump
  inflating: employeesdb/load_dept_emp.dump
  inflating: employeesdb/test_employees_sha.sql
  inflating: employeesdb/Changelog
  creating: employeesdb/images/
  inflating: employeesdb/employees_partitioned_5.1.sql
  inflating: employeesdb/test_employees_md5.sql
  inflating: employeesdb/README.md
  inflating: employeesdb/employees.sql
  inflating: employeesdb/load_titles.dump
  inflating: employeesdb/employees_partitioned.sql
  inflating: employeesdb/load_dept_manager.dump
  inflating: employeesdb/sql_test.sh
  inflating: employeesdb/load_departments.dump
  inflating: employeesdb/load_salaries1.dump
  inflating: employeesdb/show_elapsed.sql
  inflating: employeesdb/load_employees.dump
  inflating: employeesdb/sakila/README.md
  inflating: employeesdb/sakila/sakila-mv-data.sql
  inflating: employeesdb/sakila/sakila-mv-schema.sql
  inflating: employeesdb/images/employees.jpg
  inflating: employeesdb/images/employees.png
  inflating: employeesdb/images/employees.gif
theia@theiadocker-: /home/project$ cd employeesdb
theia@theiadocker-: /home/project/employeesdb$

```

4. Start the MySQL service session using the Start MySQL in IDE button directive.

Open MySQL Page in IDE

5. On the launching page, click on the **Create** button.

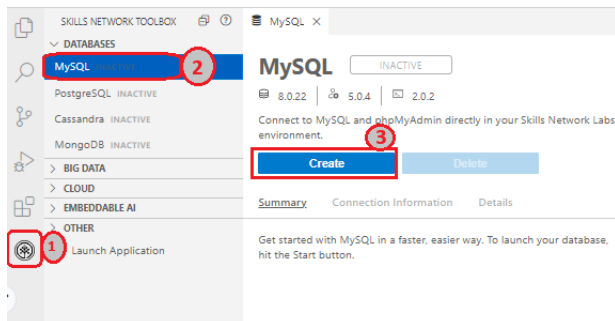

6. With your password handy, we can now import the data. You can do this by entering the following into the Terminal:

```
mysql --host=mysql --port=3306 --user=root --password -t < employees.sql
```

When prompted, enter the password that was displayed under the **Connection Information** section when MySQL started up.

Please note, you won't be able to see your password when typing it in. Not to worry, this is expected!!


7. Your data will now load. This may take a minute or so.

When you've finished loading the data, you'll see the following:

```
theia@theiadocker-pratikshav:/home/project/employeesdb$ mysql --host=mysql --port=3306 --user=root --password -t < employees.sql
Enter password:
+-----+
| INFO |
+-----+
| CREATING DATABASE STRUCTURE |
+-----+
| INFO |
+-----+
| storage engine: InnoDB |
+-----+
| INFO |
+-----+
| LOADING departments |
+-----+
| INFO |
+-----+
| LOADING employees |
+-----+
```

This means that your data has been imported.

8. To enter the MySQL command-line interface, return to your MySQL tab and select **MySQL CLI**.

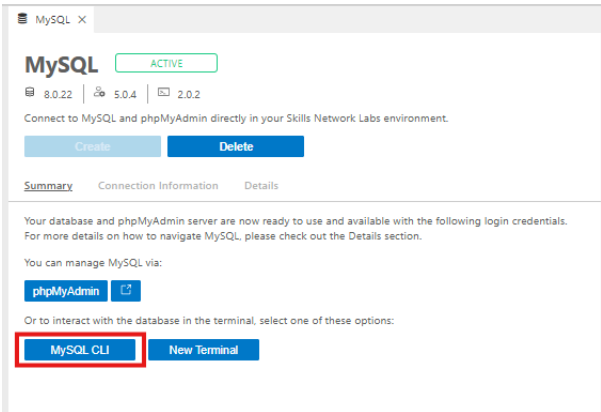

9. Recall that the name of the database that we’re using is **Employees**. To access it, we can use this command:

```
use employees
```

```
mysql> use employees
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
```

10. Let’s see which tables are available in this database:

```
show tables;
```

```
mysql> show tables;
+-----+
| Tables_in_employees |
+-----+
| current_dept_emp    |
| departments         |
| dept_emp            |
| dept_emp_latest_date |
| dept_manager        |
| employees           |
| salaries            |
| titles              |
+-----+
8 rows in set (0.01 sec)

mysql> 
```

In this database, there are 8 tables, which we can confirm with the database’s ERD.

Now that your database is all set up, let’s take a look at how we can check a query’s performance!

Exercise 2: Check Your Query's Performance with EXPLAIN

The EXPLAIN statement, which provides information about how MySQL executes your statement, will offer you insight about the number of rows your query is planning on looking through. This statement can be helpful when your query is running slow. For example, is it running slow because it’s scanning the entire table each time?

1. Let’s start with selecting all the data from the **employees** table:

```
SELECT * FROM employees;
```

```
theia@theia-docker: /home/project/test_db-master ×
499955 | 1961-10-23 | Kankanahalli | Zucker | M | 1993-03-06 |
499956 | 1959-01-08 | Zhonghua | Crooks | F | 1994-10-12 |
499957 | 1956-10-08 | Steen | Keohane | M | 1987-02-25 |
499958 | 1957-05-08 | Srinidhi | Theuretzbacher | F | 1989-12-17 |
499959 | 1956-01-29 | Lillian | Setiz | M | 1991-11-08 |
499960 | 1952-12-02 | Gaetan | Veldwijk | F | 1989-09-16 |
499961 | 1962-10-02 | Holgard | Nanard | F | 1988-07-04 |
499962 | 1956-03-28 | Yongqiao | Dalton | M | 1995-06-20 |
499963 | 1962-03-14 | Danny | Lenart | F | 1989-08-07 |
499964 | 1958-02-24 | Randy | Matzov | M | 1988-11-10 |
499965 | 1961-12-07 | Ronghao | Morrow | F | 1985-05-26 |
499966 | 1955-12-04 | Mihalis | Crabtree | F | 1985-06-13 |
499967 | 1954-04-21 | Bangqing | Bodoff | M | 1996-08-15 |
499968 | 1959-03-07 | Dharmaraja | Ertl | M | 1991-10-08 |
499969 | 1960-09-02 | Masanao | Ducloy | M | 1992-02-16 |
499970 | 1963-03-25 | Danai | Hedayat | M | 1994-08-06 |
499971 | 1963-12-28 | Uwe | Uludag | M | 1989-02-26 |
499972 | 1957-07-25 | Katsuo | Leuchs | F | 1989-11-23 |
499973 | 1963-06-03 | Lobel | Taubman | M | 1994-02-01 |
499974 | 1956-09-10 | Shuichi | Piazza | F | 1989-09-16 |
499975 | 1952-11-09 | Masali | Chorvat | M | 1992-01-23 |
499976 | 1963-08-20 | Guozhong | Felder | M | 1988-12-26 |
499977 | 1956-06-05 | Martial | Weisert | F | 1996-09-17 |
499978 | 1960-03-29 | Chiranjit | Kuzuoka | M | 1990-05-24 |
499979 | 1962-10-29 | Prasadram | Waleschkowski | M | 1994-01-04 |
499980 | 1959-06-28 | Gino | Usery | M | 1991-02-11 |
499981 | 1955-01-02 | Yunming | Mitina | F | 1991-03-07 |
499982 | 1954-08-25 | Mohammed | Pleszkun | M | 1986-02-21 |
499983 | 1955-08-29 | Uri | Juneja | F | 1989-08-28 |
499984 | 1959-08-31 | Kaijung | Rodham | M | 1985-09-11 |
499985 | 1964-12-26 | Gila | Lukaszewicz | M | 1997-02-11 |
499986 | 1952-07-22 | Nathan | Ranta | F | 1985-08-11 |
499987 | 1961-09-05 | Rimli | Dusink | F | 1998-09-20 |
499988 | 1962-09-28 | Bangqing | Kleiser | F | 1986-06-06 |
499989 | 1954-05-26 | Keiichiro | Lindqvist | M | 1993-10-28 |
499990 | 1963-11-03 | Khaled | Kohling | M | 1985-10-10 |
499991 | 1962-02-26 | Pohua | Sichman | F | 1989-01-12 |
499992 | 1960-10-12 | Siamak | Salverda | F | 1987-05-10 |
499993 | 1963-06-04 | DeForest | Mullainathan | M | 1997-04-07 |
499994 | 1952-02-26 | Navin | Argence | F | 1990-04-24 |
499995 | 1958-09-24 | Dekang | Lichtner | F | 1993-01-12 |
499996 | 1953-03-07 | Zito | Baaz | M | 1990-09-27 |
499997 | 1961-08-03 | Bernhard | Lenart | M | 1986-04-21 |
499998 | 1956-09-05 | Patricia | Breugel | M | 1993-10-13 |
499999 | 1958-05-01 | Sachin | Tsukuda | M | 1997-11-30 |
300024 rows in set (0.34 sec)

mysql>
```

As you can see, all 300,024 rows were loaded, taking about 0.34 seconds.

2. We can use EXPLAIN to see how many rows were scanned:

```
EXPLAIN SELECT * FROM employees;

499963 | 1962-03-14 | Danny | Lenart | F | 1989-08-07 |
499964 | 1958-02-24 | Randy | Matzov | M | 1988-11-10 |
499965 | 1961-12-07 | Ronghao | Morrow | F | 1985-05-26 |
499966 | 1955-12-04 | Mihalis | Crabtree | F | 1985-06-13 |
499967 | 1954-04-21 | Bangqing | Bodoff | M | 1996-08-15 |
499968 | 1959-03-07 | Dharmaraja | Ertl | M | 1991-10-08 |
499969 | 1960-09-02 | Masanao | Ducloy | M | 1992-02-16 |
499970 | 1963-03-25 | Danai | Hedayat | M | 1994-08-06 |
499971 | 1963-12-28 | Uwe | Uludag | M | 1989-02-26 |
499972 | 1957-07-25 | Katsuo | Leuchs | F | 1989-11-23 |
499973 | 1963-06-03 | Lobel | Taubman | M | 1994-02-01 |
499974 | 1956-09-10 | Shuichi | Piazza | F | 1989-09-16 |
499975 | 1952-11-09 | Masali | Chorvat | M | 1992-01-23 |
499976 | 1963-08-20 | Guozhong | Felder | M | 1988-12-26 |
499977 | 1956-06-05 | Martial | Weisert | F | 1996-09-17 |
499978 | 1960-03-29 | Chiranjit | Kuzuoka | M | 1990-05-24 |
499979 | 1962-10-29 | Prasadram | Waleschkowski | M | 1994-01-04 |
499980 | 1959-06-28 | Gino | Usery | M | 1991-02-11 |
499981 | 1955-01-02 | Yunming | Mitina | F | 1991-03-07 |
499982 | 1954-08-25 | Mohammed | Pleszkun | M | 1986-02-21 |
499983 | 1955-08-29 | Uri | Juneja | F | 1989-08-28 |
499984 | 1959-08-31 | Kaijung | Rodham | M | 1985-09-11 |
499985 | 1964-12-26 | Gila | Lukaszewicz | M | 1997-02-11 |
499986 | 1952-07-22 | Nathan | Ranta | F | 1985-08-11 |
499987 | 1961-09-05 | Rimli | Dusink | F | 1998-09-20 |
499988 | 1962-09-28 | Bangqing | Kleiser | F | 1986-06-06 |
499989 | 1954-05-26 | Keiichiro | Lindqvist | M | 1993-10-28 |
499990 | 1963-11-03 | Khaled | Kohling | M | 1985-10-10 |
499991 | 1962-02-26 | Pohua | Sichman | F | 1989-01-12 |
499992 | 1960-10-12 | Siamak | Salverda | F | 1987-05-10 |
499993 | 1963-06-04 | DeForest | Mullainathan | M | 1997-04-07 |
499994 | 1952-02-26 | Navin | Argence | F | 1990-04-24 |
499995 | 1958-09-24 | Dekang | Lichtner | F | 1993-01-12 |
499996 | 1953-03-07 | Zito | Baaz | M | 1990-09-27 |
499997 | 1961-08-03 | Bernhard | Lenart | M | 1986-04-21 |
499998 | 1956-09-05 | Patricia | Breugel | M | 1993-10-13 |
499999 | 1958-05-01 | Sachin | Tsukuda | M | 1997-11-30 |
300024 rows in set (0.37 sec)

mysql> EXPLAIN SELECT * FROM employees;
+----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra |
+----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | employees | NULL | ALL | NULL | NULL | NULL | NULL | 298980 | 100.00 | NULL |
+----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)

mysql>
```

Notice how EXPLAIN shows that it is examining 298,980 rows, almost the entire table! With a larger table, this could result in the query running slowly.

So, how can we make this query faster? That's where indexes come in!

Exercise 3: Add an Index to Your Table

1. To begin, let's take at the existing indexes. We can do that by entering the following command:

```
SHOW INDEX FROM employees;
```

```
mysql> mysql> show indexes from employees;
```

Table	Non_unique	Key_name	Seq_in_index	Column_name	Collation	Cardinality
employees	0	PRIMARY	1	emp_no	A	29942

1 row in set (0.00 sec)

```
mysql> █
```

Remember that indexes for primary keys are created automatically, as we can see above. An index has already been created for the primary key, **emp_no**. If we think about this, this makes sense because each employee number is unique to the employee, with no NULL values.

2. Now, let's say we wanted to see all the information about employees who were hired on or after January 1, 2000. We can do that with the query:

```
SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

```
mysql> SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

emp_no	birth_date	first_name	last_name	gender	hire_date
47291	1960-09-09	Ulf	Flexer	M	2000-01-12
60134	1964-04-21	Seshu	Rathonyi	F	2000-01-02
72329	1953-02-09	Randi	Luit	F	2000-01-02
108201	1955-04-14	Mariangiola	Boreale	M	2000-01-01
205048	1960-09-12	Ennio	Alblas	F	2000-01-06
222965	1959-08-07	Volkmar	Perko	F	2000-01-13
226633	1958-06-10	Xuejun	Benzmuller	F	2000-01-04
227544	1954-11-17	Shahab	Demeyer	M	2000-01-08
422990	1953-04-09	Jaana	Verspoor	F	2000-01-11
424445	1953-04-27	Jeong	Boreale	M	2000-01-03
428377	1957-05-09	Yucai	Gerlach	M	2000-01-23
463807	1964-06-12	Bikash	Covnot	M	2000-01-28
499553	1954-05-06	Hideyuki	Delgrande	F	2000-01-22

13 rows in set (0.17 sec)

As we can see, the 13 rows returned took about 0.17 seconds to execute. That may not seem like a long time with this table, but keep in mind that with larger tables, this time can vary greatly.

3. With the EXPLAIN statement, we can check how many rows this query is scanning:

```
EXPLAIN SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

```
mysql> EXPLAIN SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

id	select_type	table	partitions	type	possible_keys	key	key_len	ref
1	SIMPLE	employees	NULL	ALL	NULL	NULL	NULL	NUL

1 row in set, 1 warning (0.01 sec)

```
mysql> █
```

This query results in a scan of 299,423 rows, which is nearly the entire table!

By adding an index to the **hire_date** column, we'll be able to reduce the query's need to search through every entry of the table, instead only searching through what it needs.

4. You can add an index with the following:

```
CREATE INDEX hire_date_index ON employees(hire_date);
```

The CREATE INDEX command creates an index called **hire_date_index** on the table **employees** on column **hire_date**.

```
mysql> CREATE INDEX hire_date_index ON employees(hire_date);
```

```
Query OK, 0 rows affected (0.82 sec)
Records: 0 Duplicates: 0 Warnings: 0
```

```
mysql> █
```

5. To check your index, you can use the `SHOW INDEX` command:

```
SHOW INDEX FROM employees;
```

Now you can see that we have both the `emp_no` index and `hire_date` index.

```
mysql> SHOW INDEX FROM employees;
+-----+-----+-----+-----+-----+-----+-----+
| Table      | Non_unique | Key_name      | Seq_in_index | Column_name | Collation | Car |
+-----+-----+-----+-----+-----+-----+-----+
| employees  | 0          | PRIMARY       | 1            | emp_no      | A         |    |
| employees  | 1          | hire_date_index | 1            | hire_date   | A         |    |
+-----+-----+-----+-----+-----+-----+-----+
2 rows in set (0.01 sec)
```

With the index added,

6. Once more, let's select all the employees who were hired on or after January 1, 2000.

```
SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

```
mysql> SELECT * FROM employees WHERE hire_date >= '2000-01-01';
+-----+-----+-----+-----+-----+-----+-----+
| emp_no | birth_date | first_name | last_name | gender | hire_date |
+-----+-----+-----+-----+-----+-----+-----+
| 108201 | 1955-04-14 | Mariangiola | Boreale   | M      | 2000-01-01 |
| 60134  | 1964-04-21 | Seshu       | Rathonyi  | F      | 2000-01-02 |
| 72329  | 1953-02-09 | Randi       | Luit      | F      | 2000-01-02 |
| 424445 | 1953-04-27 | Jeong       | Boreale   | M      | 2000-01-03 |
| 226633 | 1958-06-10 | Xuejun      | Benzmuller | F      | 2000-01-04 |
| 205048 | 1960-09-12 | Ennio       | Alblas    | F      | 2000-01-06 |
| 227544 | 1954-11-17 | Shahab      | Demeyer   | M      | 2000-01-08 |
| 422990 | 1953-04-09 | Jaana       | Verspoor  | F      | 2000-01-11 |
| 47291  | 1960-09-09 | Ulf         | Flexer    | M      | 2000-01-12 |
| 222965 | 1959-08-07 | Volkmar     | Perko     | F      | 2000-01-13 |
| 499553 | 1954-05-06 | Hideyuki    | Delgrande | F      | 2000-01-22 |
| 428377 | 1957-05-09 | Yucai       | Gerlach   | M      | 2000-01-23 |
| 463807 | 1964-06-12 | Bikash      | Covnot    | M      | 2000-01-28 |
+-----+-----+-----+-----+-----+-----+-----+
13 rows in set (0.00 sec)

mysql> █
```

The difference is quite evident! Rather than taking about 0.17 seconds to execute the query, it takes 0.00 seconds—almost no time at all.

7. We can use the `EXPLAIN` statement to see how many rows were scanned:

```
EXPLAIN SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

```
mysql> EXPLAIN SELECT * FROM employees WHERE hire_date >= '2000-01-01';
+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table      | partitions | type | possible_keys | key |
+-----+-----+-----+-----+-----+-----+-----+
| 1  | SIMPLE      | employees  | NULL       | range | hire_date_index | hire_date_index |
+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)

mysql> █
```

Under **rows**, we can see that only the necessary 13 columns were scanned, leading to the improved performance.

Under **Extra**, you can also see that it has been explicitly stated that the index was used, that index being `hire_date_index` based on the `possible_keys` column.

Now, if you want to remove the index, enter the following into the Terminal:

```
DROP INDEX hire_date_index ON employees;
```

This will remove the `hire_date_index` on the `employees` table. You can check with the `SHOW INDEX` command to confirm:


```
mysql> DROP INDEX hire_date_index ON employees;
Query OK, 0 rows affected (0.02 sec)
Records: 0 Duplicates: 0 Warnings: 0
```

```
mysql> SHOW INDEX FROM employees;
```

Table	Non_unique	Key_name	Seq_in_index	Column_name	Collation	Cardinality
employees	0	PRIMARY	1	emp_no	A	299423

1 row in set (0.00 sec)

Exercise 4: Use an UNION ALL Clause

Sometimes, you might want to run a query using the OR operator with LIKE statements. In this case, using a UNION ALL clause can improve the speed of your query, particularly if the columns on both sides of the OR operator are indexed.

1. To start, let's run this query:

```
SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
```

499920	1953-07-18	Christ	Murtagh	M	1986-04-17
499933	1957-10-21	Chuant	Riesenh	F	1993-05-28
499936	1954-02-11	Chiranj	Himler	M	1994-10-31
499947	1960-02-06	Conrado	Koyama	F	1989-02-19
499948	1953-05-24	Cordelia	Paludet	M	1993-01-28
499956	1959-01-08	Zhonghua	Crooks	F	1994-10-12
499966	1955-12-04	Mihalis	Crabtree	F	1985-06-13
499975	1952-11-09	Masali	Chorvat	M	1992-01-23
499978	1960-03-29	Chiranj	Kuzuoka	M	1990-05-24

28970 rows in set (0.20 sec)

This query searches for first names or last names that start with "C". It returned 28,970 rows, taking about 0.20 seconds.

2. Check using the EXPLAIN command to see how many rows are being scanned!

- [Hint \(Click Here\)](#)
- [Solution \(Click Here\)](#)

Once more, we can see that almost all the rows are being scanned, so let's add indexes to both the **first_name** and **last_name** columns.

3. Try adding an index to both the **first_name** and **last_name** columns.

- [Hint \(Click Here\)](#)
- [Solution \(Click Here\)](#)

4. Great! With your indexes now in place, we can re-run the query:

```
SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
```

499881	1952-12-01	Christoph	Schneeberger	F	1987-10-29
499889	1956-01-29	Charlene	Hasham	F	1988-03-19
499908	1953-07-19	Toong	Coorg	F	1988-12-02
499916	1962-01-09	Florina	Cusworth	F	1997-05-18
499920	1953-07-18	Christ	Murtagh	M	1986-04-17
499933	1957-10-21	Chuant	Riesenh	F	1993-05-28
499936	1954-02-11	Chiranj	Himler	M	1994-10-31
499947	1960-02-06	Conrado	Koyama	F	1989-02-19
499948	1953-05-24	Cordelia	Paludet	M	1993-01-28
499956	1959-01-08	Zhonghua	Crooks	F	1994-10-12
499966	1955-12-04	Mihalis	Crabtree	F	1985-06-13
499975	1952-11-09	Masali	Chorvat	M	1992-01-23
499978	1960-03-29	Chiranj	Kuzuoka	M	1990-05-24

28970 rows in set (0.16 sec)

Let's also see how many rows are being scanned:

```
EXPLAIN SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
```



```
mysql> EXPLAIN SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table      | partitions | type | possible_keys | key |
+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE      | employees | NULL       | ALL | first_name_index,last_name_index | NULL |
+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

With indexes, the query still scans all the rows.

5. Let's use the UNION ALL clause to improve the performance of this query.

We can do this with the following:

```
SELECT * FROM employees WHERE first_name LIKE 'C%' UNION ALL SELECT * FROM employees WHERE last_name LIKE 'C%';
```

```
| 492481 | 1953-01-16 | Chikara | Czap | M | 1990-05-23 |
| 496850 | 1957-12-26 | Cheong  | Czap | F | 1994-10-26 |
+-----+-----+-----+-----+-----+
29730 rows in set (0.11 sec)
```

As we can see, this query only takes 0.11 seconds to execute, running faster than when we used the OR operator.

Using the EXPLAIN statement, we can see why that might be:

```
mysql> EXPLAIN SELECT * FROM employees WHERE first_name LIKE 'C%' UNION ALL SELECT * FROM
+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table      | partitions | type | possible_keys | key |
+-----+-----+-----+-----+-----+-----+-----+
| 1 | PRIMARY     | employees | NULL       | range | first_name_index | first_name_index |
| 2 | UNION       | employees | NULL       | range | last_name_index  | last_name_index  |
+-----+-----+-----+-----+-----+-----+-----+
2 rows in set, 1 warning (0.00 sec)
```

As the EXPLAIN statement reveals, there were two SELECT operations performed, with the total number of rows scanned sitting at 54,790. This is less than the original query that scanned the entire table and, as a result, the query performs faster.

Please note, if you choose to perform a leading wildcard search with an index, the entire table will still be scanned. You can see this yourself with the following query:

```
SELECT * FROM employees WHERE first_name LIKE '%C';
```

With this query, we want to find all the employees whose first names end with "C".

When checking with the EXPLAIN and SHOW INDEX statements, we can see that although we have an index on **first_name**, the index is not used and results in a search of the entire table.

Under the EXPLAIN statement's **possible_keys** column, we can see that this index has not been used as the entry is NULL.

```
| 498090 | 1954-09-02 | Marc      | Fujisawa | F | 1988-09-21 |
| 498599 | 1957-11-18 | Marc      | Awdeh    | M | 1986-07-25 |
| 499661 | 1963-06-30 | Eric      | Demeyer  | M | 1994-08-05 |
+-----+-----+-----+-----+-----+
1180 rows in set (0.18 sec)
```

```
mysql> EXPLAIN SELECT * FROM employees WHERE first_name LIKE '%C';
+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table      | partitions | type | possible_keys | key | key_len | ref |
+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE      | employees | NULL       | ALL | NULL          | NULL | NULL    | NULL |
+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

```
mysql> SHOW INDEX from employees;
+-----+-----+-----+-----+-----+-----+-----+
| Table      | Non_unique | Key_name      | Seq_in_index | Column_name | Collation | Card |
+-----+-----+-----+-----+-----+-----+-----+
| employees | 0          | PRIMARY       | 1            | emp_no      | A         |      |
| employees | 1          | first_name_index | 1            | first_name  | A         |      |
| employees | 1          | last_name_index  | 1            | last_name   | A         |      |
+-----+-----+-----+-----+-----+-----+-----+
3 rows in set (0.00 sec)
```

On the other hand, indexes do work with trailing wildcards, as seen with the following query that finds all employees whose first names begin with “C”:

```
SELECT * FROM employees WHERE first_name LIKE 'C%';
```

492080	1961-08-02	Cullen	Whittlesey	F	1997-01-12
495632	1958-05-16	Cullen	Pollock	M	1992-01-21

```
11294 rows in set (0.04 sec)
```

```
mysql> EXPLAIN SELECT * FROM employees WHERE first_name LIKE 'C%';
```

id	select_type	table	partitions	type	possible_keys	key
1	SIMPLE	employees	NULL	range	first_name_index	first_name_index

```
1 row in set, 1 warning (0.01 sec)
```

Under the EXPLAIN statement’s **possible_keys** and **Extra** columns, we can see that the **first_name_index** is used. With only 20,622 rows scanned, the query performs better.

Exercise 5: Be SELECTive

In general, it’s best practice to only select the columns that you need. For example, if you wanted to see the names and hire dates of the various employees, you could show that with the following query:

```
SELECT * FROM employees;
```

499998	1956-09-05	Patricia	Breugel	M	1993-10-13
499999	1958-05-01	Sachin	Tsukuda	M	1997-11-30

```
300024 rows in set (0.26 sec)
```

```
mysql> EXPLAIN SELECT * FROM employees;
```

id	select_type	table	partitions	type	possible_keys	key	key_len	ref
1	SIMPLE	employees	NULL	ALL	NULL	NULL	NULL	NULL

```
1 row in set, 1 warning (0.01 sec)
```

Notice how the query loads 300,024 rows in about 0.26 seconds. With the EXPLAIN statement, we can see that the entire table is being scanned, which makes sense because we are looking at all the entries.

If we, however, only wanted to see the names and hire dates, then we should select those columns:

```
SELECT first_name, last_name, hire_date FROM employees;
```

Patricia	Breugel	1993-10-13
Sachin	Tsukuda	1997-11-30

```
300024 rows in set (0.17 sec)
```

```
mysql> EXPLAIN SELECT first_name, last_name, hire_date FROM employees;
```

id	select_type	table	partitions	type	possible_keys	key	key_len	ref
1	SIMPLE	employees	NULL	ALL	NULL	NULL	NULL	NULL

```
1 row in set, 1 warning (0.00 sec)
```

As you can see, this query was executed a little faster despite scanning the entire table as well.

Give this a try!

Practice Exercise 1

Let’s take a look at the **salaries** table. What if we wanted to see how much each employee earns?

When running the query, keep in mind how long it takes the query to run and how many rows are scanned each time.

- First, let’s select all the rows and columns from this table.
 - [Hint \(Click Here\)](#)
 - [Solution \(Click Here\)](#)
- Now, let’s see if there’s a way to optimize this query. Since we only want to see how much each employee earns, then we can just select a few columns instead of all of them. Which ones would you select?

- ▶ [Hint \(Click Here\)](#)
- ▶ [Solution \(Click Here\)](#)

Practice Exercise 2

Let's take a look at the **titles** table. What if we wanted to see the employee and their corresponding title?

Practice by selecting only the necessary columns and run the query!

- ▶ [Hint \(Click Here\)](#)
- ▶ [Solution \(Click Here\)](#)

Conclusion

Congratulations! Now, not only can you now identify common causes to slow queries, but you can resolve them by applying the knowledge that you have gained in this lab. Equipped with this problem-solving skill, you will be able to improve your queries performance, even in large databases.

Author(s)

Kathy An

Other Contributor(s)

Rav Ahuja

© IBM Corporation 2023. All rights reserved.