

OpportunityHub: An Integrated Mobile Application for Opportunity Discovery, Application Tracking, and AI-Assisted Interview Preparation

Dhruv Maheshwari (230953526)
Manas Laxman Kudipady (230953530)
Mayur Das (230953414)
Priyanshu Sharma (230953520)
School of Computer Engineering
Manipal Institute of Technology, Manipal, India

Abstract—This report presents OpportunityHub, an Android application designed to solve a common problem for students and early professionals: opportunity discovery, application management, and interview preparation are usually fragmented across multiple platforms. The proposed system unifies internship/job/hackathon discovery, profile-aware recommendations, saved opportunity management, application pipeline tracking, analytics, and AI-assisted interview practice in a single mobile workflow. The implementation follows an MVVM-based architecture with Room for local persistence, WorkManager for periodic background tasks, Retrofit/OkHttp for network integration, and a hybrid interview evaluation pipeline that supports both local scoring and AI-backed feedback. The system also supports a live interview mode with speech recognition, interviewer voice playback, optional Amazon Polly proxy synthesis, and follow-up prompting. To improve reliability in unstable network conditions, the application uses local-first persistence and pending sync operation queues with retry control. The project demonstrates that a carefully integrated mobile-first solution can improve user continuity from opportunity discovery to interview readiness while remaining practical for resource-constrained and intermittently connected environments.

Index Terms—Android application, opportunity recommendation, AI interview preparation, MVVM, Room database, WorkManager, offline-first sync, career analytics

I. INTRODUCTION

In current student and entry-level job ecosystems, internship and job opportunities are distributed across many websites and social channels. Users typically face three disconnected workflows:

Discovering relevant opportunities. Tracking applications and deadlines. Preparing for interviews.

When these workflows are not unified, users often lose momentum, miss deadlines, or prepare inconsistently for technical and behavioral interviews. Existing platforms may be strong in one area (for example, listings or coding practice), but they rarely provide an integrated end-to-end experience optimized for mobile usage.

OpportunityHub addresses this gap by combining opportunity discovery, recommendation, tracking, and interview preparation in one Android application.

A. Research Gap (Broad)

The reviewed ecosystem reveals a practical integration gap:

Opportunity platforms focus on listing and search but provide limited structured application tracking. Tracking tools generally do not include intelligent recommendation or profile-aware ranking. Interview preparation tools are detached from actual application pipeline state. Many solutions do not provide robust offline-first behavior for unstable connectivity.

B. Research Question

How can an Android application integrate opportunity discovery, recommendation, tracking, and AI interview preparation in a single user flow while preserving usability and operational reliability under variable network conditions?

C. Research Objectives

Build a unified mobile workflow for discovering, saving, applying, and tracking opportunities. Design and implement a profile-aware recommendation mechanism for ranking opportunities. Provide interview preparation through question banks, answer evaluation, readiness metrics, and live interview simulation. Support reliability through local persistence, background synchronization, and fallback mechanisms. Provide analytics and export features for user decision support.

D. Research Contribution

This work contributes an integrated, production-style Android architecture that combines:

Multi-factor opportunity recommendation. Offline-first data handling with queued sync operations. AI-assisted and local fallback interview evaluation. Live voice interview interaction with speech and optional Polly-based synthesis. Application analytics and CSV export for user-level review.

E. Paper Roadmap

Section 2 reviews related work and articulates the research gap. Section 3 defines objectives. Section 4 explains design and methodology. Section 5 discusses societal and environmental contribution. Section 6 presents advanced concepts used.

Section 7 reports results and discussion. Section 8 concludes. Section 9 states limitations. Section 10 outlines future scope. Section 11 lists references. Section 12 provides author details.

II. LITERATURE SURVEY

A. Literature Summary

The current ecosystem includes opportunity portals, coding preparation tools, interview simulators, and productivity trackers. However, integration remains limited.

B. Comparative Review of Research Papers

Table I summarizes representative research papers that influence recommendation and AI-evaluation design, and clarifies the practical gap addressed by this work.

C. Feature Comparison with Existing Platforms

Table II summarizes feature-level coverage across representative platforms and highlights the integrated scope of OpportunityHub.

D. Analysis of Research Gap

The survey indicates multiple unresolved gaps:

Methodological Gap: Existing tools optimize isolated modules (listings, tracking, or interview prep), not a complete pipeline. **Practical-Knowledge Gap:** Users need one mobile workflow that transitions from discovery to interview execution without context switching. **Evidence Gap:** Offline-first behavior with queue-based sync and retry strategies is underemphasized in student career tools. **Usability Gap:** Voice-interactive interview rehearsal with fallback behavior is uncommon in mainstream student-focused apps.

This project addresses these gaps through a unified architecture and implementation that connects all stages in one application lifecycle.

III. OBJECTIVE

Develop an Android platform that centralizes internships, jobs, and hackathons. Rank opportunities using profile-aware recommendation scoring. Provide searchable and filterable lists with save/apply actions. Track application statuses across pipeline states (saved, applied, interview, rejected, accepted). Build an AI interview module with domain selection, scoring, and readiness tracking. Provide a live interview mode with speech recognition, speaking pace estimation, follow-up prompts, and interviewer voice output. Ensure reliability with Room persistence, periodic workers, and pending sync operation retry logic. Provide analytics and export capabilities for user review.

IV. DESIGN AND METHODOLOGY

A. Software Requirements (SR)

Android Studio and Gradle-based Android build pipeline. Java 17 and Kotlin interoperability. Android SDK (minSdk 24, target/compile SDK configured in project). Room database for local persistence. Retrofit and OkHttp for API integration. WorkManager for periodic sync and notifications. Compose + Material 3 UI components. CameraX and Android Speech APIs for live interview mode.

B. System Architecture

The project follows MVVM with a repository abstraction:

View Layer: Compose-based activities/fragments for Home, Saved, Tracker, AI Interview, Roadmap, Analytics, and Profile. **ViewModel Layer:** State management, filtering, scoring injection, and UI orchestration. **Repository Layer:** Network-first retrieval with local fallback, write-through updates, and merge logic. **Persistence Layer:** Room entities for opportunities, applications, interview data, user profile, and pending sync operations. **Worker Layer:** Periodic sync, daily recommendation notifications, and deadline reminders.

C. Dataset and Data Generation Strategy

Opportunity generation supports a curated+randomized pool, including internships, jobs, and hackathons. Local fallback seeding inserts 60 opportunities when cache is empty. Full synthetic generation utilities support larger pools (up to 120 in utility methods). Interview question datasets are domain-specific (SDE, ML, Web, Android, HR) with topic, difficulty, expected keywords, and sample answers.

D. Recommendation Methodology

Recommendation combines multiple weighted signals:

Role/type match. Location match. Paid preference match. Skill matches. Remote preference. Deadline proximity (in preference-mode path).

Score-derived outputs:

Recommendation ranking values stored per opportunity. Match percentage injected for UI display. Top-N selection used for recommended sections and notifications.

E. Interview Evaluation Methodology

The interview pipeline supports two evaluation modes:

AI Evaluation Mode: Uses remote evaluation client for score, feedback, strengths, improvements, and verdict. **Local Fallback Mode:** Keyword overlap and answer quality heuristics when AI evaluation is unavailable.

Live interview mode includes:

Speech recognition with partial/final transcript handling. Non-answer retry strategy with controlled thresholds. Follow-up question generation when response depth is insufficient. Speaking pace estimate using words-per-minute. Voice output using Polly proxy when configured, with automatic TTS fallback.

F. Offline Sync and Reliability Methodology

Application writes are attempted online first when possible. On offline/error conditions, writes persist locally and enqueue pending operations. Pending operations maintain retry metadata and error context. Background sync attempts replay operations in batches and removes successful entries. Sync workers and task schedulers provide periodic recovery.

Source / Platform	Core Strength	Typical Limitation Relative to This Study
LinkedIn Jobs	Large professional network and listing coverage	Tracking and interview preparation are not deeply integrated into one closed-loop flow
Indeed	Broad job discovery with search filters	Personal readiness coaching and interview simulation are limited
Internshala	Internship-focused discovery for students	End-to-end interview preparation and analytics are not tightly coupled
HackerEarth / Devpost	Hackathon discovery and participation	Multi-category pipeline tracking (job + internship + hackathon) is usually external
LeetCode / HackerRank	Strong technical problem practice	Application workflow integration is absent
Pramp / mock interview tools	Interview simulation	Opportunity recommendation and application tracking are external
Generic task/reminder apps	Deadline and reminder management	No domain-specific recommendation and interview intelligence
Career spreadsheets/manual tracking	Full user control	High maintenance overhead, no intelligent ranking, no real-time feedback

Research Paper	Core Contribution	Limitation Relative to This Study
G. Adomavicius and A. Tuzhilin [21]	Formal survey and taxonomy of recommender system paradigms and extension directions	Method-level treatment; does not provide an integrated mobile workflow from discovery to interview readiness
R. Burke [22]	Hybrid recommendation strategies that combine multiple signals and models	Focused on recommendation formulation; no application pipeline tracking or interview-preparation integration
Y. Koren, R. Bell, and C. Volinsky [23]	Matrix-factorization approach for collaborative filtering at scale	Requires large historical interaction data and does not directly address cold-start student profiles or explainable mobile UX
T. Burrows, I. Gurevych, and B. Stein [24]	Comprehensive review of automatic short-answer grading methods and evaluation trends	Concentrates on grading tasks; does not couple scoring with live voice interaction and end-to-end career workflow context
A. Vaswani et al. [25]	Transformer architecture enabling modern sequence modeling and language understanding	Foundational model architecture paper, but not a domain-specific interview coaching or mobile reliability solution
J. Devlin et al. [26]	Pretrained contextual language representations for downstream NLP quality gains	Improves language modeling quality, but does not define integrated offline-first mobile system design for career platforms

TABLE I
COMPARISON OF REPRESENTATIVE RESEARCH PAPERS AND UNRESOLVED INTEGRATION GAPS

G. High-Level Algorithmic Pseudocode

Algorithm 1: Opportunity Ranking

Input: Opportunity list O and user profile P . **Output:** Ranked list R .

For each opportunity o in O , compute score s from weighted matches (role, location, paid, skills, re-

mote), set $o.\text{recommendationScore} = s$, compute and set $o.\text{matchPercentage}$, sort O by recommendationScore in descending order, and return the top-ranked list R .

Algorithm 2: Interview Evaluation with Fallback

Input: Question q and answer a . **Output:** Evaluation e .

If a is blank, return low-score feedback. attempt AI evalua-

Feature	LinkedIn/Indeed	Internshala	Hackathon	Coding	Mock Interview	OpportunityHub
Multi-category opportunity discovery (jobs + internships + hackathons)	✓	✓	✓	✗	✗	✓
Structured application pipeline tracking	✓	✓	✗	✗	✗	✓
Interview simulation support	✗	✗	✗	✓	✓	✓
AI-assisted answer evaluation	✗	✗	✗	✓	✓	✓
Voice-based live interview mode	✗	✗	✗	✗	✗	✓
Offline-first local persistence with sync retry	✗	✗	✗	✗	✗	✓
Integrated analytics and export workflow	✓	✗	✗	✓	✗	✓
End-to-end mobile workflow from discovery to interview readiness	✗	✗	✗	✗	✗	✓

TABLE II
FEATURE COMPARISON ACROSS REPRESENTATIVE PLATFORMS (✓ SUPPORTED, ✗ NOT SUPPORTED)

tion. if AI succeeds, persist the AI result. otherwise compute a local keyword/heuristic score, generate verdict and improvement suggestions, and persist progress while updating readiness metrics.

H. Request-Response Process Flow Architecture

This subsection provides report-ready architecture flow designs showing how request/response cycles move through UI, ViewModel, repository, local storage, and external services.

I. End-to-End Component Interaction

J. Sequence A: Opportunity Discovery Request/Response

K. Sequence B: Application Write + Offline Sync Queue

L. Sequence C: AI Interview Evaluation (AI + Local Fallback)

M. Sequence D: Live Interview Voice Loop (STT to Polly/TTS)

N. Request/Response Contract Snapshot

These flows ensure a resilient mobile-first architecture where user-visible actions always produce timely local responses, even when remote services fail.

O. API Endpoint Inventory

This subsection lists the endpoint surface currently used by the application and classifies each endpoint by purpose, request shape, response contract, authentication model, and owning module.

P. HTTP Endpoint Inventory (Implemented)

Q. Local Mock API Surface (Non-HTTP)

The project also uses an in-process mock API service for development and offline simulation. These are API-like operations but do not expose network URLs.

R. Endpoint Readiness Notes

Opportunity discovery is already backed by a real public HTTP endpoint (Remote). AI interview scoring is already backed by a real LLM endpoint (Groq). Voice synthesis uses a configurable API Gateway + Lambda proxy endpoint for Amazon Polly. Application tracker and interview list sync currently rely on MockApiService. In production, these should be replaced with authenticated backend REST endpoints (for example, /applications, /interview/questions, /analytics/stats).

V. CONTRIBUTION TOWARDS THE SOCIETY AND ENVIRONMENT

Career Accessibility: Consolidates fragmented workflows, reducing cognitive and time burden for students and early professionals. **Skill Development:** Encourages structured interview practice with actionable feedback loops. **Inclusion Through Mobile-first Design:** Supports day-to-day use on common Android devices and intermittent connectivity. **Reduced Operational Waste:** Digital application tracking and reminders reduce dependence on ad-hoc manual note-taking and repeated effort. **Scalable Educational Utility:** The architecture can be reused in placement cells and institutional career support ecosystems.

A. Low-Level Design (LLD)

B. High-Level Design (HLD)

The application follows a layered pattern:

Presentation Layer: Compose screens for main workflows and interactions. **Domain/Logic Layer:** Recommendation and interview logic components. **Data Layer:** Repositories coordinating local+remote data strategy. **Persistence and Sync Layer:** Room entities, pending operation queues, periodic workers. **Device Integration Layer:** Speech recognition, TextToSpeech, CameraX, notification channels.

VI. USE OF ADVANCED CONCEPTS

MVVM architecture with reactive LiveData state propagation. Compose Material 3 UI with multi-screen state handling. Offline-first synchronization through queued pending operations and retry policies. WorkManager periodic jobs for sync and recommendations. Multi-factor recommendation and profile-aware scoring. Local and AI hybrid interview evaluation strategy. Live interview voice loop combining STT, adaptive prompting, and TTS/Polly output. CSV export for analytics portability. CameraX integration for real-time interview preview. SharedPreferences-driven personalization (theme, roadmap completion).

VII. RESULTS AND DISCUSSIONS

A. Functional Results

Table 1 summarizes feature-level implementation outcomes.

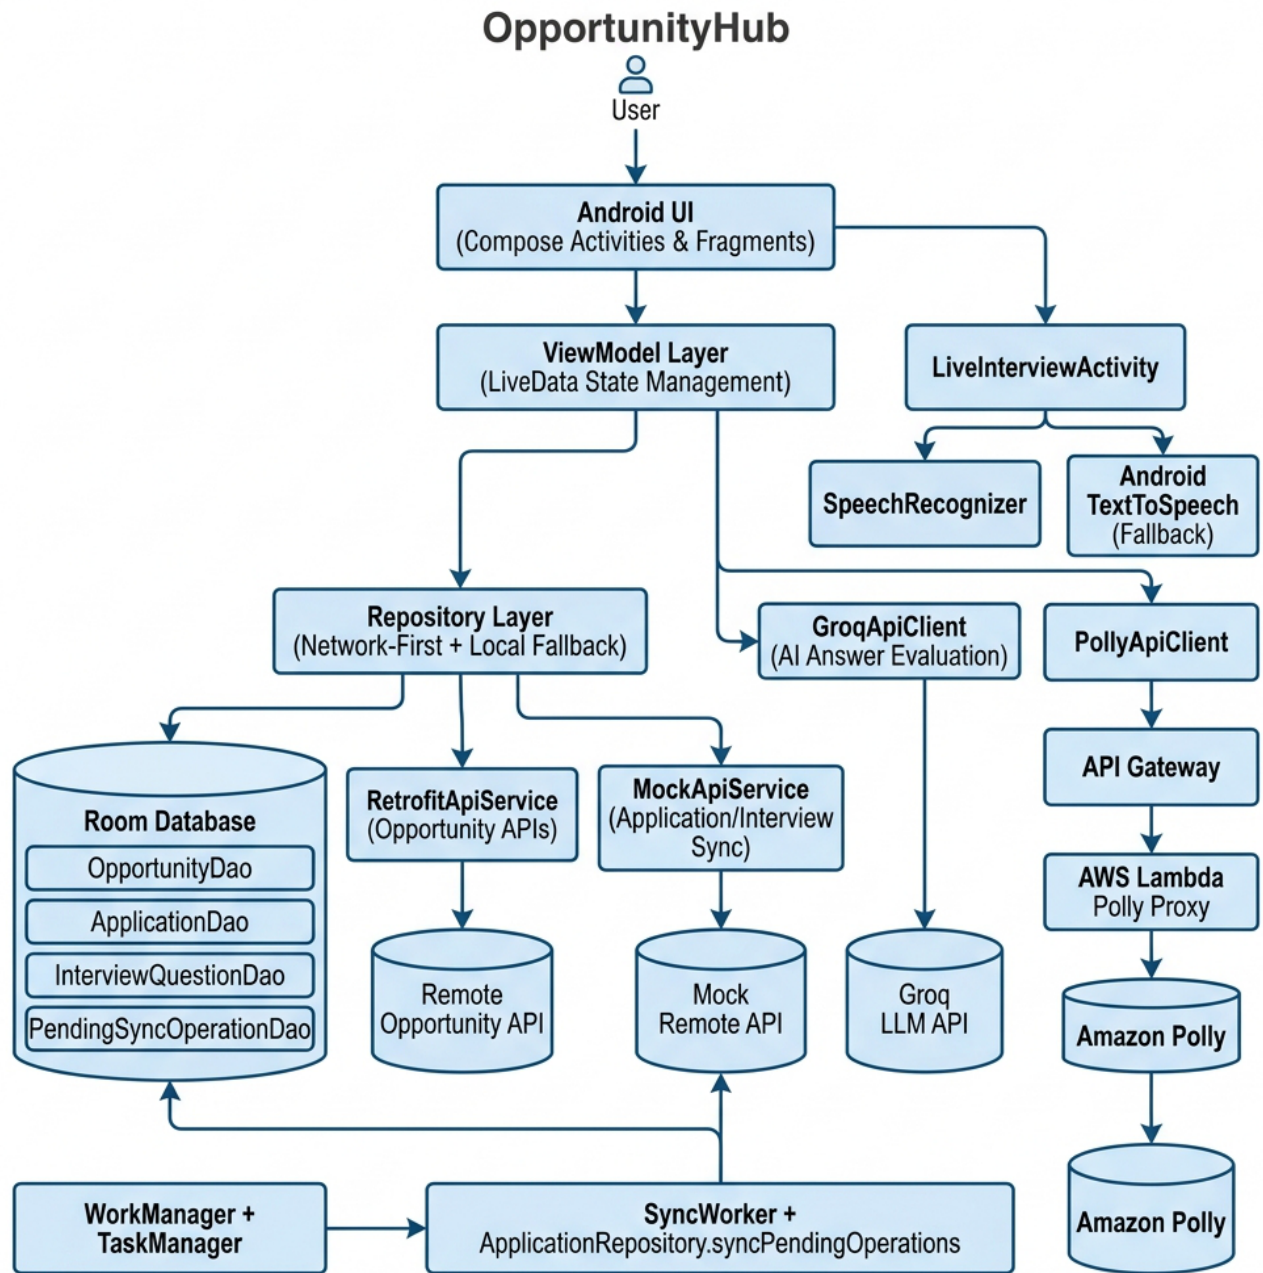


Fig. 1. Fig. 1. 4.8.1 End-to-End Component Interaction

Feature Area	Implemented Outcome
Unified feed	Internship/job/hackathon listing with search and multi-chip filtering
Recommendation	Profile-aware ranking and match percentage display
Save/apply flow	Save toggling and applied-state transition from listing cards
Tracker	Status filtering, edit/delete actions, sync-now control, pending sync visibility
AI Interview	Domain selection, question loading, answer evaluation, session score flow
Live Interview	Camera preview, speech capture, pace estimation, adaptive follow-up, spoken interviewer responses
Analytics	Total/interview/offer metrics, success rate, readiness indicators, donut chart, CSV export
Roadmap	Personalized roadmap generation and completion persistence
Background automation	15 minute sync worker + daily

B. Observed Quantitative/Configuration Evidence

Recommendation output supports top-ranked subsets for UI and notifications. Local fallback seeding inserts 60 opportunities when no cache exists. Live interview plan uses a multi-turn structure (intro, technical set, probe, behavioral, closing). Sync system includes pending operation batching and retry control. Unit-test files exist for sync helper logic (application/opportunity/interview merge helpers).

Opportunity Discovery Request/Response Flow (Mobile App)

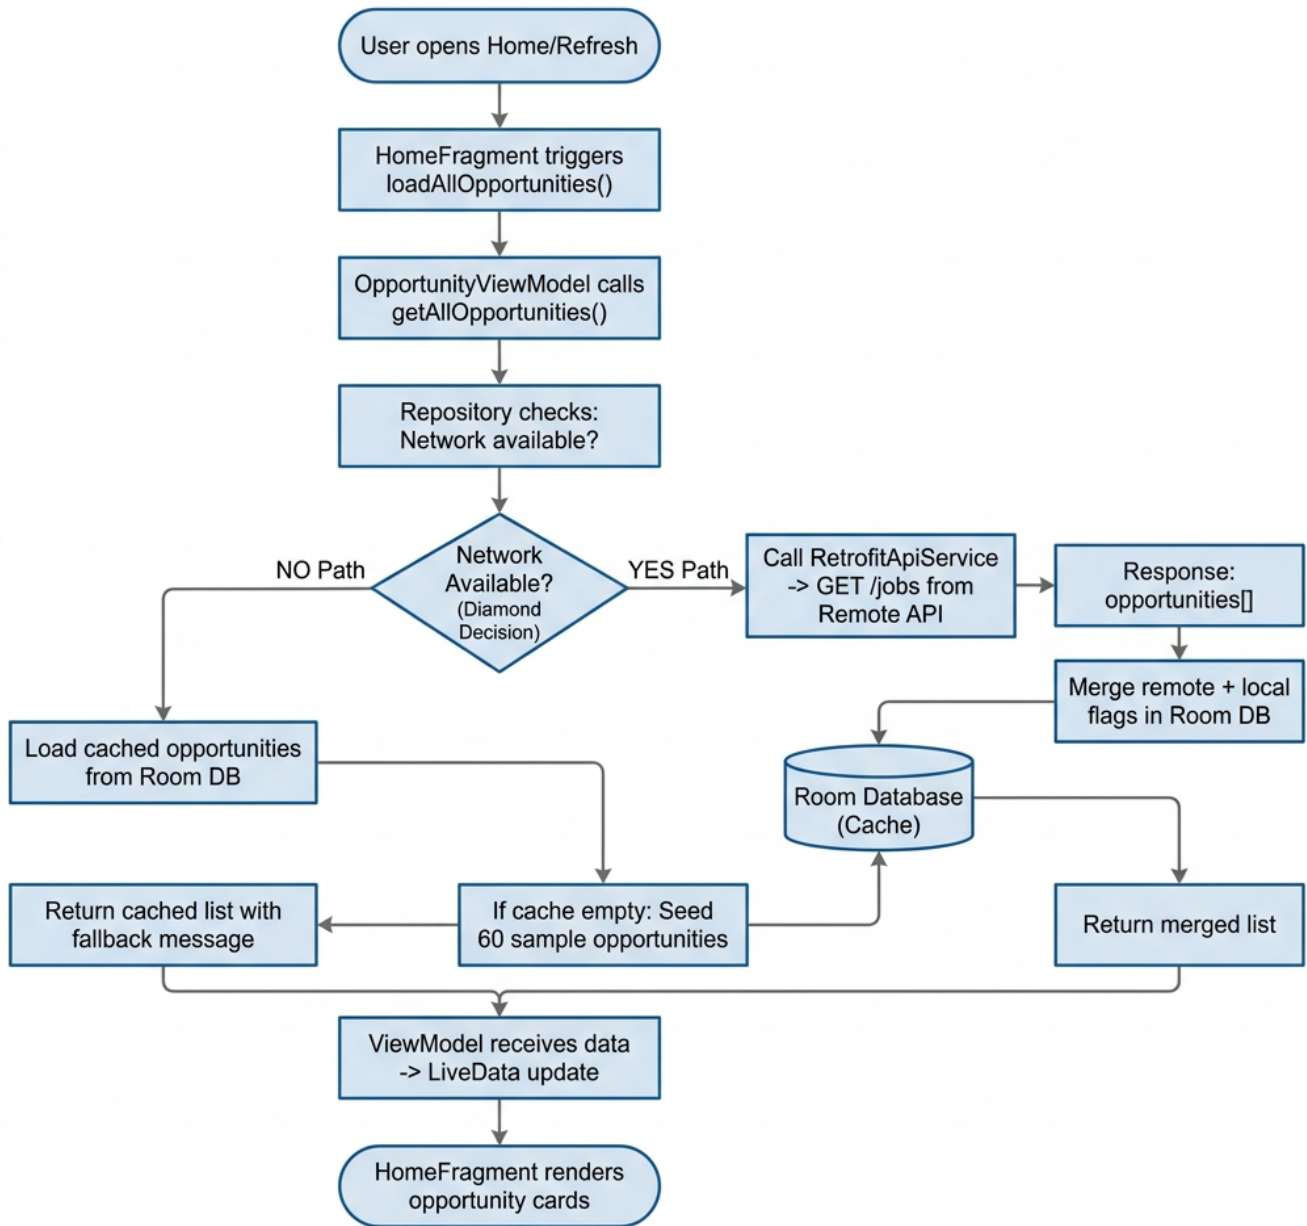


Fig. 2. Fig. 2. 4.8.2 Sequence A: Opportunity Discovery Request/Response

C. Build and Validation Discussion

Project build behavior is environment-dependent due to machine-specific SDK/JDK local paths. A prior build log in project artifacts indicates successful Gradle build in a properly configured environment. On the current machine, build validation was blocked by invalid local JDK/SDK path references.

D. Discussion

The project successfully demonstrates integration value: users can move from discovery to interview preparation without

leaving the app context. The strongest practical contribution is the combination of profile-aware recommendations, resilient offline behavior, and live interview simulation. Compared to single-purpose tools, this integrated flow reduces context switching and supports continuity. The architecture is extensible for real APIs and institutional adoption.

VIII. CONCLUSION

OpportunityHub presents a comprehensive Android solution for opportunity lifecycle management. It unifies discovery, recommendation, tracking, analytics, and interview preparation in a

Application Write + Offline Sync Queue

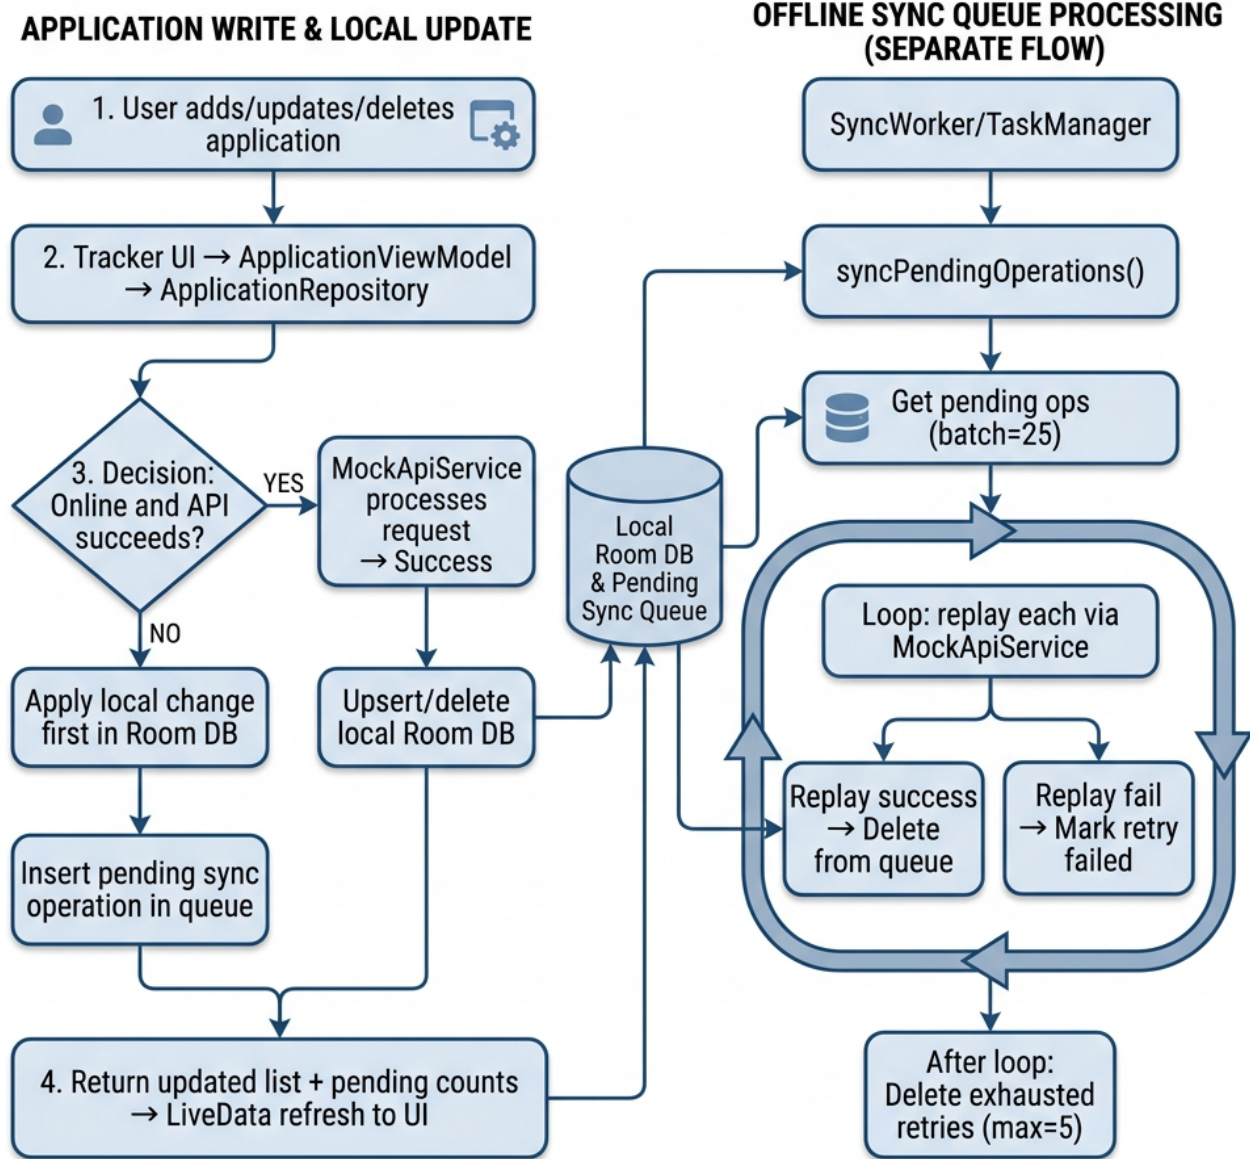


Fig. 3. Fig. 3. 4.8.3 Sequence B: Application Write + Offline Sync Queue

coherent mobile system. The implementation combines modern Android architecture (MVVM, Room, WorkManager, Compose) with reliability-focused strategies (local fallback, queued sync, retry logic) and intelligent interaction features (AI evaluation and live voice interview flow). The project demonstrates that a mobile-first integrated platform can significantly improve consistency and readiness across the student career journey.

IX. STUDY LIMITATIONS

Build reproducibility currently depends on correcting machine-specific local SDK/JDK paths. Resume parsing from

raw PDF bytes is keyword-based and may miss structured PDF semantics. Some data flows still rely on mock API service behavior and need production API hardening. Default single-user assumptions (for example, fixed mock user ID) limit multi-user realism. Full-scale instrumented testing on diverse devices/emulators was constrained by environment configuration.

X. FUTURE SCOPE

Integrate production opportunity APIs and authenticated user accounts. Add stronger resume parsing using robust document

AI Interview Evaluation (AI + Local Fallback)

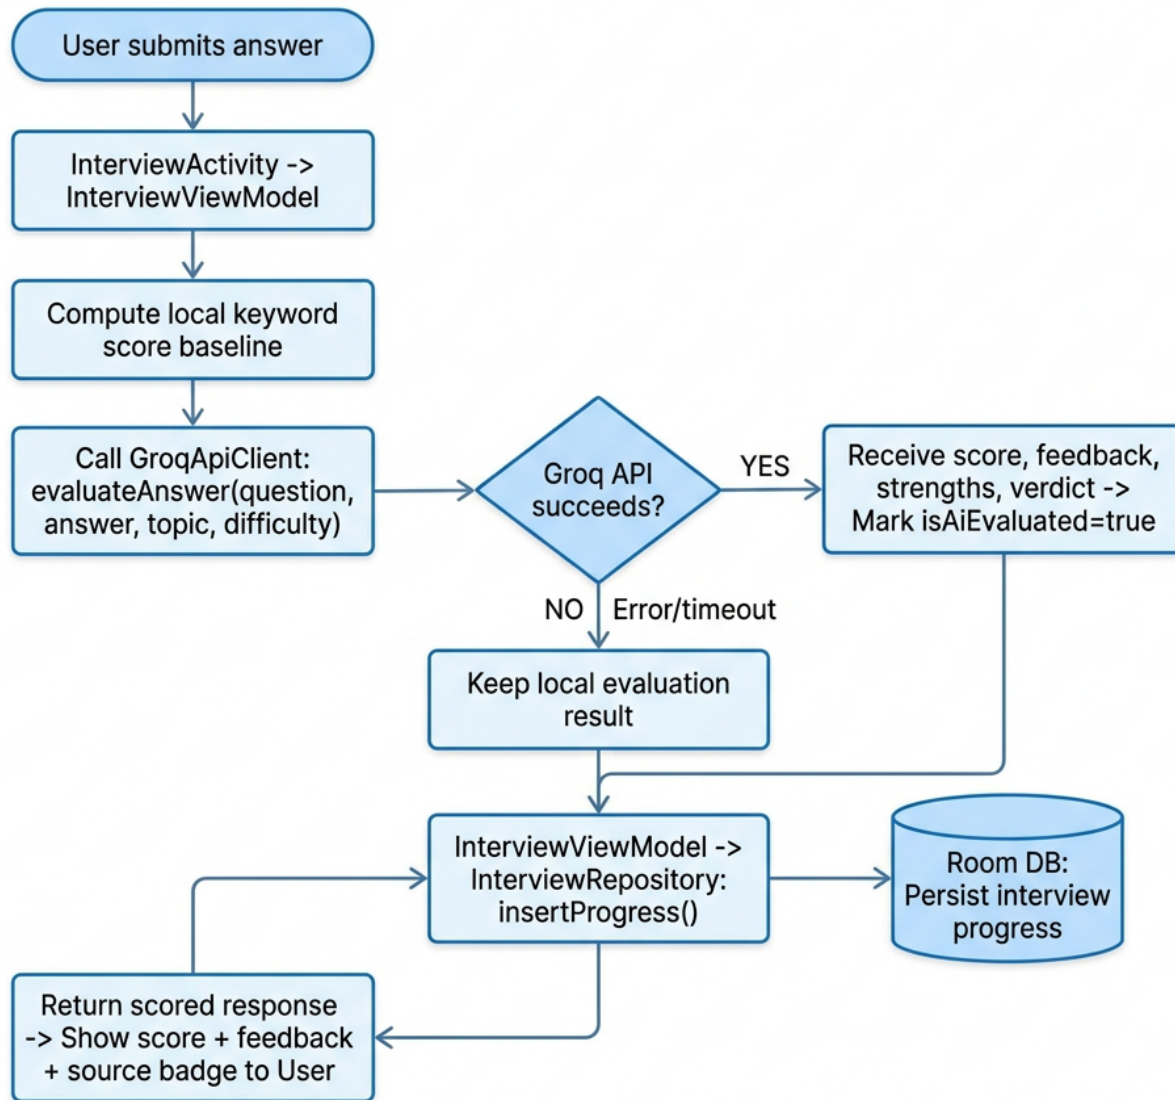


Fig. 4. Fig. 4. 4.8.4 Sequence C: AI Interview Evaluation (AI + Local Fallback)

parsing pipelines. Extend recommendation with learning-to-rank, implicit feedback, and temporal modeling. Add richer interview analytics (topic weakness trajectories, confidence bands, adaptive sequencing). Expand roadmap generation with milestone deadlines and mentor feedback loops. Add CI/CD pipeline for automated unit/instrumented test execution. Improve privacy/security with encrypted local storage and finer-grained sync conflict strategies.

Live Interview Voice Loop (STT to Polly/TTS)

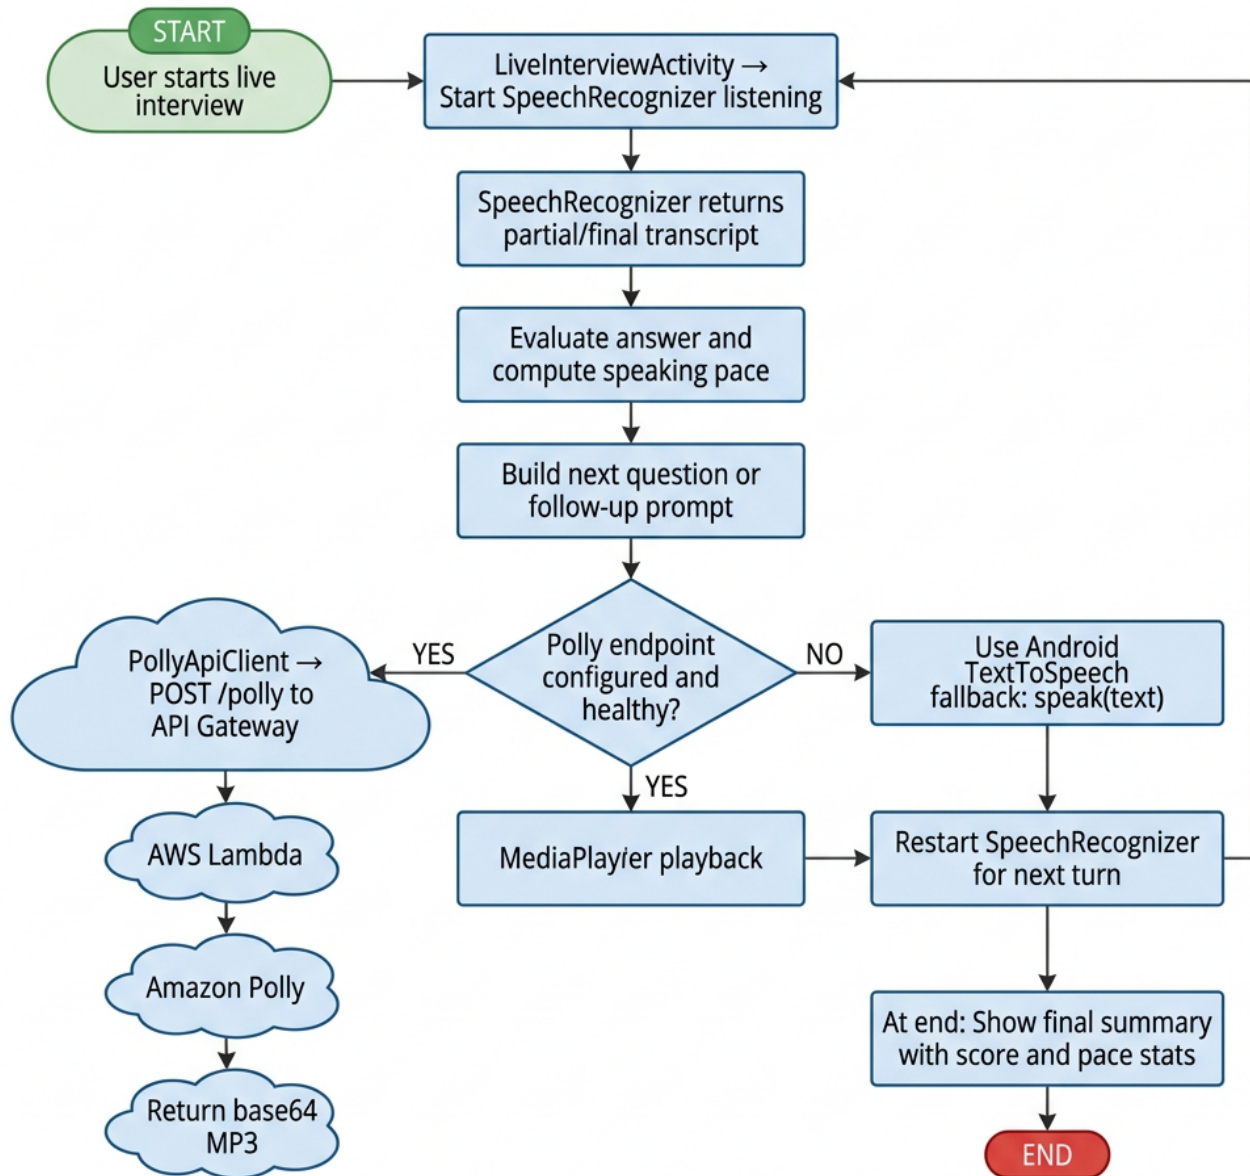


Fig. 5. Fig. 5. 4.8.5 Sequence D: Live Interview Voice Loop (STT to Polly/TTS)

Flow	Request	Response	Fallback Behavior
Opportunity fetch	GET opportunities via RetrofitApiService	List<Opportunity>	Load cached Room data; seed local sample if empty
Application write	insert/update/delete application via MockApiService	success/fail callback	Write local first and enqueue pending_sync_operations
Pending sync replay	batched replay of queued operations	per-op success/fail	increment retry count; remove after max retries
Interview evaluation	evaluateAnswer(question, answer, topic, difficulty) via GroqApiClient	score, feedback, strengths, improvements, verdict	use local keyword-based evaluation
Polly synthesis	POST /polly body: text, voiceId, engine, outputFormat	base64 MP3 audio (audio/mpeg)	fallback to Android Text-ToSpeech

Endpoint ID	Base URL	Path	Method	Purpose	Request Contract	Response Contract	Auth	Consumed By
OPP-LIST-01	https://remotive.com	/api/remote-jobs	GET	Fetch remote job opportunities and search results	Query params: limit (int), search (string, optional)	JSON with jobs[]; mapped to Opportunity model in app	None	RetrofitApiService OpportunityRepository
AI-EVAL-01	https://api.groq.com	/openai/v1/chat/completions	POST	Evaluate interview answers and stateful interview chat	JSON body: model, messages, max_tokens, temperature	choices[0].message.content parsed to score/feedback/verdict	Bearer token (GROQ_API_KEY)	GroqApiClient InterviewViewModel
PLY-01	endpoint	/polly	POST	Polly synthesis via proxy	JSON: text, voiceId, engine, outputFormat	Base64 MP3 from Lambda proxy	None (demo)	PollyClient
PLY-02	endpoint	/polly	OPTIONS	CORS preflight	No body	200 with CORS headers	None	API GW

Service	Operation	Transport Type	Current Role
MockApiService	fetchApplications, addApplication, updateApplication, deleteApplication	In-process method call	Simulated backend for application tracker write-through flow
MockApiService	fetchQuestionsByDomain, fetchAllQuestions	In-process method call	Simulated interview question backend
MockApiService	fetchUserStats	In-process method call	Simulated analytics summary backend

Module	Key Responsibilities
model	Entity/state definitions for opportunities, applications, interview, user profile
database (Room + DAO)	Local CRUD, query filtering, pending sync storage
repository	Network-first fetch, local fallback, sync-merge, write-through operations
viewmodel	UI state orchestration, filtering, scoring, analytics aggregation
ui/fragments + activities	User interactions, rendering, workflow control
ai	Recommendation scoring, resume keyword extraction, interview evaluation logic
worker	Background sync and notification routines
util	Data generators, diagnostics, export, helpers

REFERENCES

- [1] Android Developers, “Guide to app architecture,” [Online]. Available: <https://developer.android.com/topic/architecture>
- [2] Android Developers, “WorkManager overview,” [Online]. Available: <https://developer.android.com/topic/libraries/architecture/workmanager>
- [3] Android Developers, “Room persistence library,” [Online]. Available: <https://developer.android.com/training/data-storage/room>
- [4] Android Developers, “CameraX architecture,” [Online]. Available: <https://developer.android.com/media/camera/camerax>
- [5] Android Developers, “SpeechRecognizer,” [Online]. Available: <https://developer.android.com/reference/android/speech/SpeechRecognizer>
- [6] Android Developers, “TextToSpeech,” [Online]. Available: <https://developer.android.com/reference/android/speech/tts/TextToSpeech>
- [7] Android Developers, “Jetpack Compose,” [Online]. Available: <https://developer.android.com/jetpack/compose>
- [8] Square, “Retrofit,” [Online]. Available: <https://square.github.io/retrofit/>
- [9] Square, “OkHttp,” [Online]. Available: <https://square.github.io/okhttp/>
- [10] Google, “Material Design 3,” [Online]. Available: <https://m3.material.io/>
- [11] Amazon Web Services, “Amazon Polly Developer Guide,” [Online]. Available: <https://docs.aws.amazon.com/polly/>
- [12] LinkedIn, “Jobs on LinkedIn,” [Online]. Available: <https://www.linkedin.com/jobs/>
- [13] Indeed, “Job Search,” [Online]. Available: <https://www.indeed.com/>
- [14] LeetCode, “Interview preparation resources,” [Online]. Available: <https://leetcode.com/>
- [15] HackerRank, “Technical skill practice platform,” [Online]. Available: <https://www.hackerrank.com/>
- [16] Devpost, “Hackathon platform,” [Online]. Available: <https://devpost.com/>
- [17] HackerEarth, “Hackathons and developer assessments,” [Online]. Available: <https://www.hackerearth.com/>
- [18] Firebase, “Authentication and cloud services documentation,” [Online]. Available: <https://firebase.google.com/docs>
- [19] M. Fowler, “Microservices,” [Online]. Available: <https://martinfowler.com/articles/microservices.html>
- [20] IEEE Xplore, “Mobile and cloud software reliability studies,” [Online]. Available: <https://ieeexplore.ieee.org/>
- [21] G. Adomavicius and A. Tuzhilin, “Toward the Next Generation of Recommender Systems: A Survey of the State-of-the-Art and Possible Extensions,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 17, no. 6, pp. 734–749, 2005.
- [22] R. Burke, “Hybrid Recommender Systems: Survey and Experiments,” *User Modeling and User-Adapted Interaction*, vol. 12, no. 4, pp. 331–370, 2002.
- [23] Y. Koren, R. Bell, and C. Volinsky, “Matrix Factorization Techniques for Recommender Systems,” *Computer*, vol. 42, no. 8, pp. 30–37, 2009.
- [24] T. Burrows, I. Gurevych, and B. Stein, “The Eras and Trends of Automatic Short Answer Grading,” *International Journal of Artificial Intelligence in Education*, vol. 25, no. 1, pp. 60–117, 2015.
- [25] A. Vaswani *et al.*, “Attention Is All You Need,” in *Advances in Neural Information Processing Systems (NeurIPS)*, pp. 5998–6008, 2017.
- [26] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, “BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding,” in *Proc. NAACL-HLT*, pp. 4171–4186, 2019.