


	c0	c1	c2	c3	c4	c5	c6	c7
r0	0	1	2	3	4	5	6	7
r1	8	9	10	11	12	13	14	15
r2	16	17	18	19	20	21	22	23
r3	24	25	26	27	28	29	30	31
r4	32	33	34	35	36	37	38	39
r5	40	41	42	43	44	45	46	47

2-D board. Block (blockIdx=(1,1), blockDim=4x2) owns cols 4..7, rows 2..3.

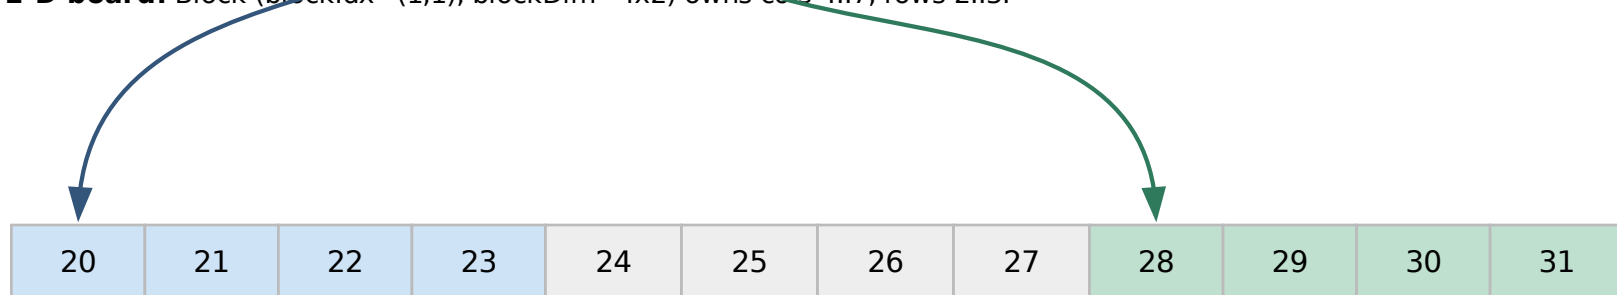

run A = row 2 (one warp, threadIdx.y=0) gap = cols - bx = 4 cells (not in the block) run B = row 3 (one warp, threadIdx.y=1)

1-D memory (same cells, row-major): two contiguous 4-runs, cols-bx apart -- NOT 8 contiguous cells.