




Postman – Guide til GraphQL (+ fleksibel opslagslogik)

Af Maria Niemann Madsen, FLS (manie@kds.dk)




Klimadatastyrelsen

- Trin 1: I dit Workspace, lav en ny GraphQL fil
 - Vælg "New" og derefter "GraphQL"

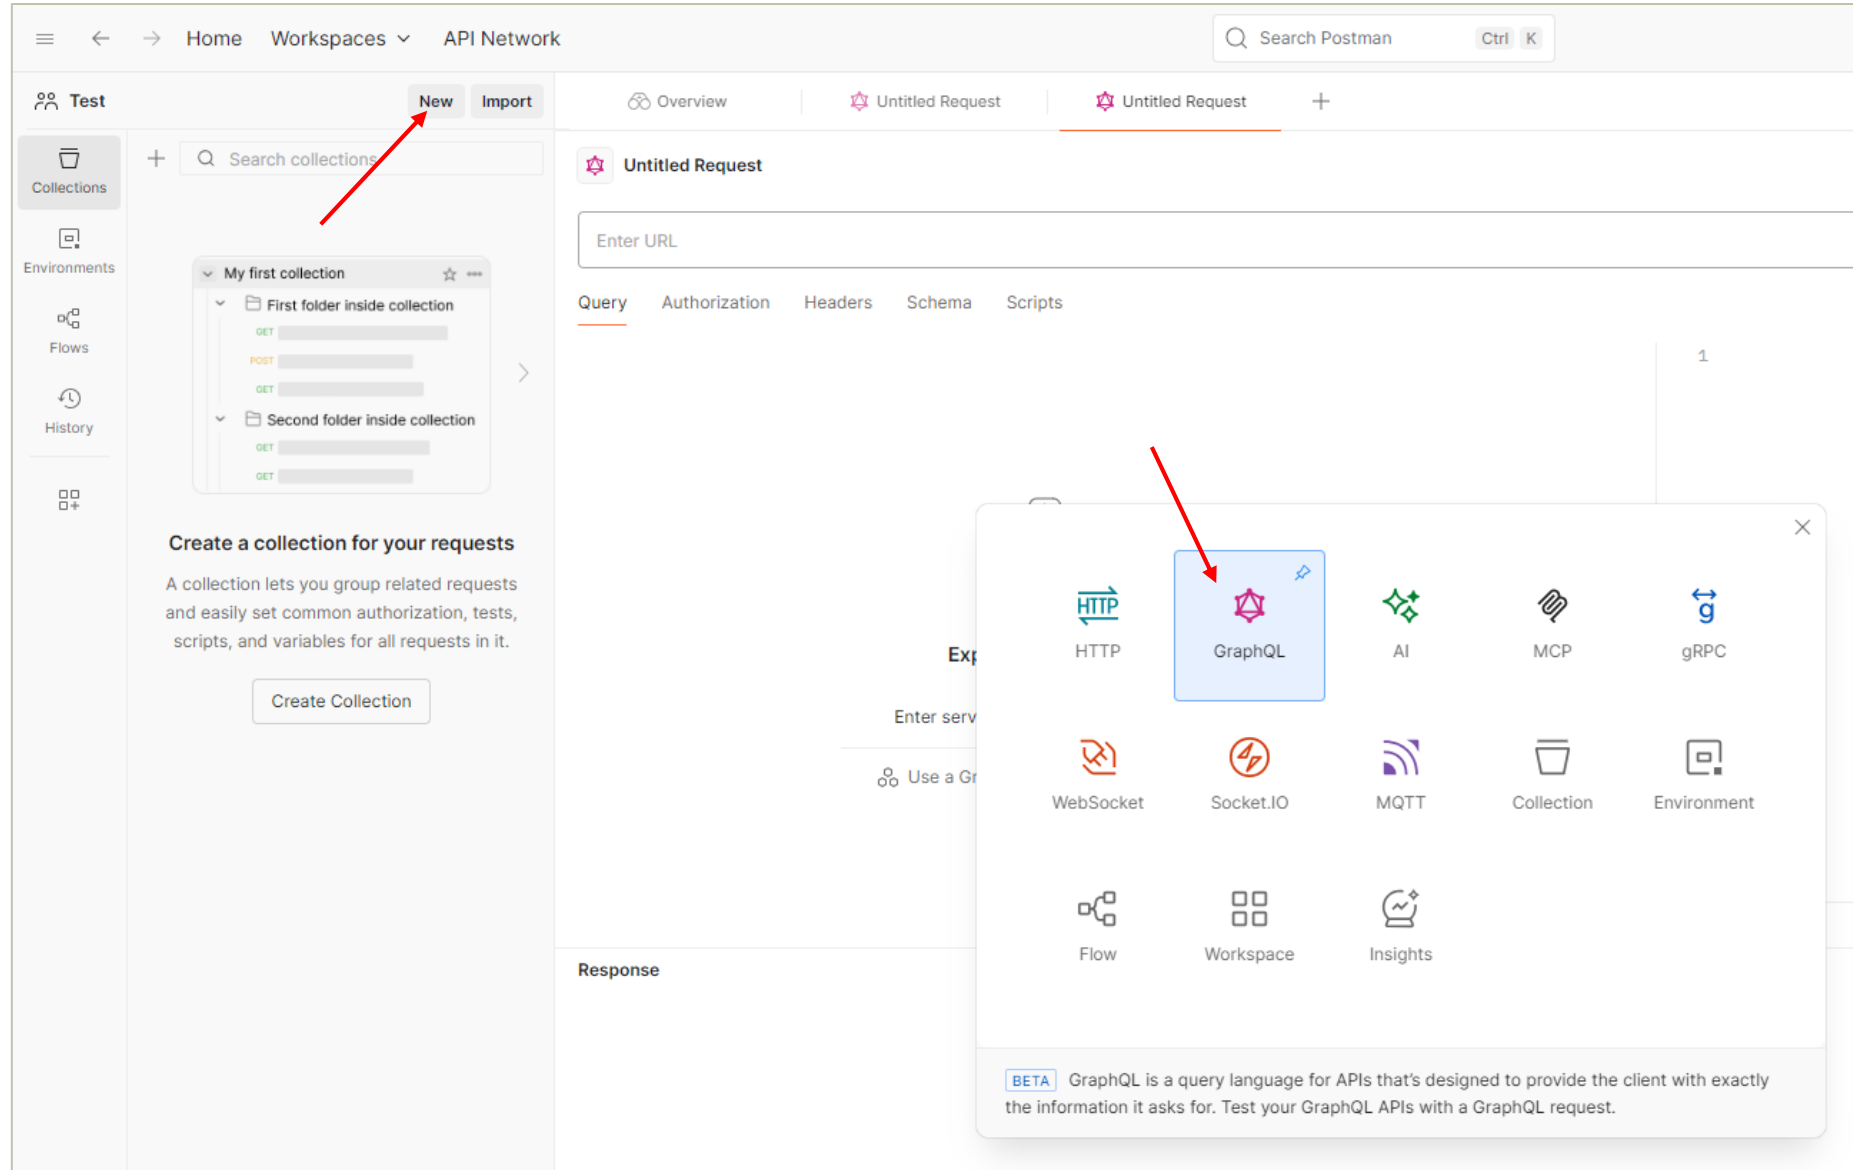

- Trin 2: Gem filen og opret en ny Collection

Tryk her

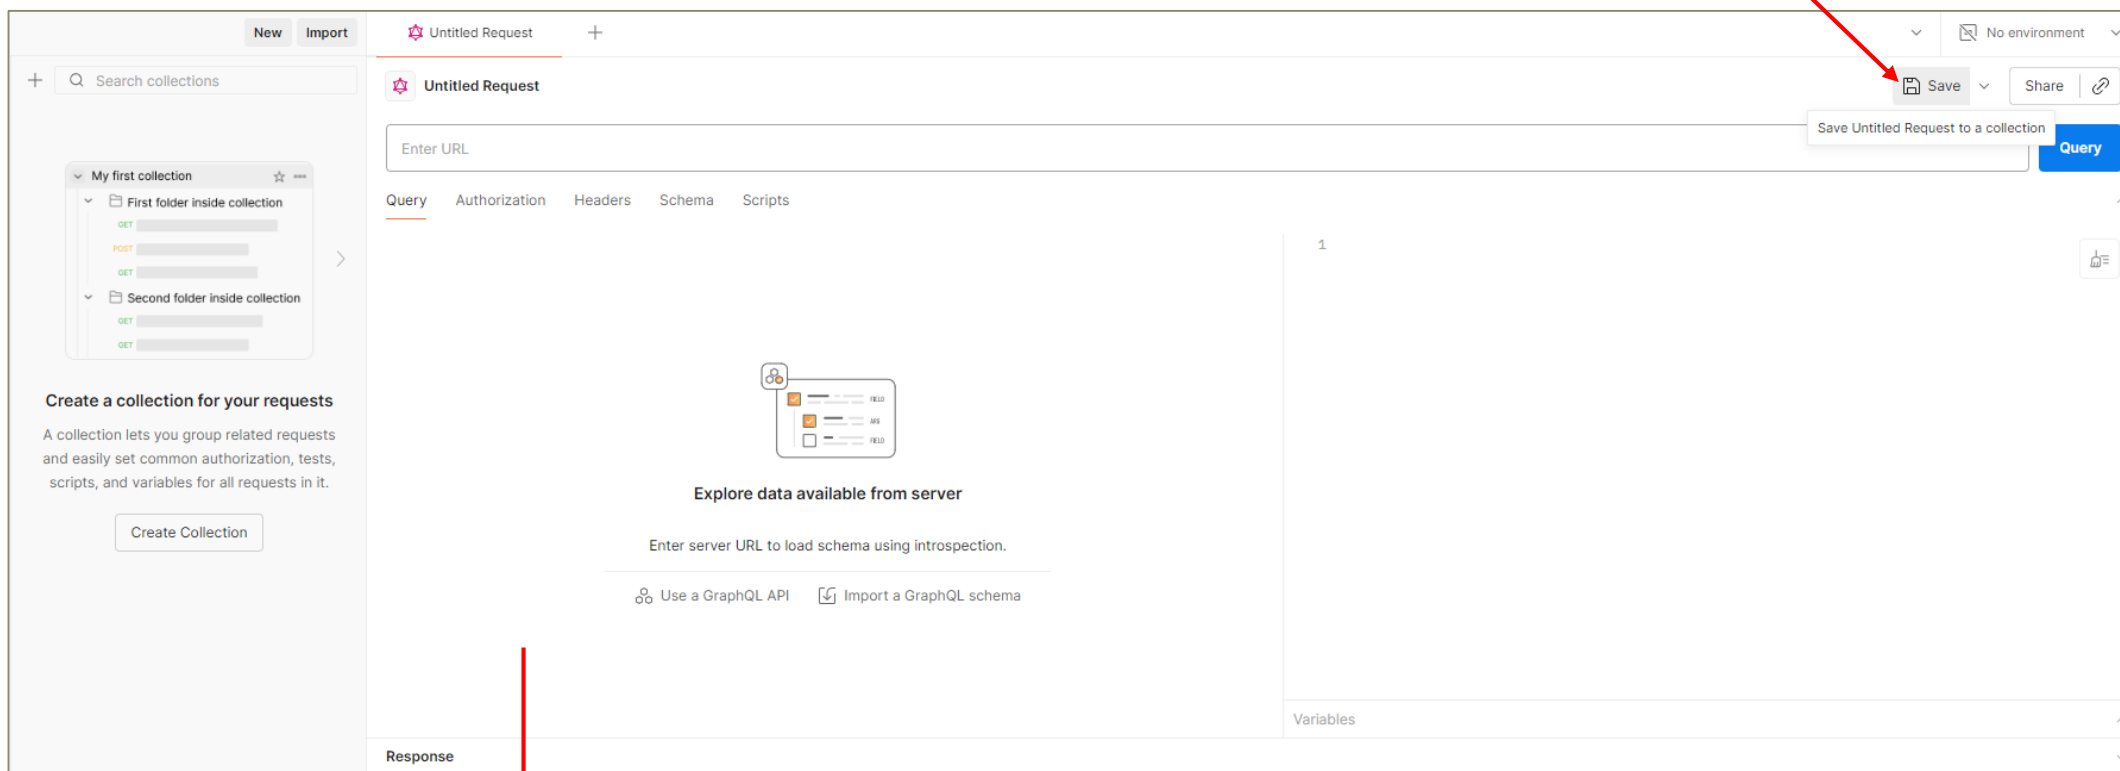

Giv din GraphQL
fil et navn


Giv din nye
collection et navn

Save request to a collection

Request name
Test GraphQL

Collection name ⓘ
Test Collection

Cancel Save

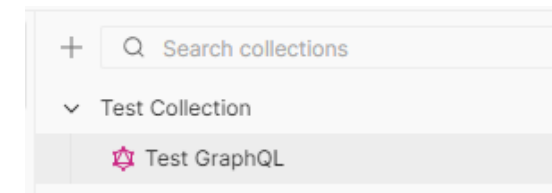

- Trin 3: Indlæs GraphQL Skema

- Indsæt et Skema URL fx...
- Datafordeler fleksibel: <https://test06-graphql.datafordeler.dk/flexible/v1/schema?apikey=XXXXXXXX>
- Datafordeler fleksibel current: <https://test06-graphql.datafordeler.dk/flexibleCurrent/v1/schema?apikey=XXXXXXXX>

The screenshot shows the GraphQL Playground interface. A red box labeled "Din nye GraphQL fil" points to the "Test GraphQL" tab. Another red box labeled "Tryk her" points to the "Schema" tab in the top navigation bar. A third red box labeled "Og derefter tryk her" points to the "Import a GraphQL schema" link. A fourth red box labeled "Indsæt Skema URL" points to the "Enter a URL" input field in the expanded import dialog.

Din nye GraphQL fil

Tryk her

Og derefter tryk her

Indsæt Skema URL

- Trin 4: Indsæt URL for at connecte til databasen (nødvendigt for at køre en query)
- *Datafordeler fleksibel*: <https://test06-graphql.datafordeler.dk/flexible/v1?apikey=XXXXXXX>
- *Datafordeler fleksibel current*: <https://test06-graphql.datafordeler.dk/flexibleCurrent/v1?apikey=XXXXXXX>

The screenshot shows the GraphQL Playground interface. At the top, there's a header with 'Test GraphQL', 'Overview', and 'Test Collection'. Below this, a 'Test Collection / Test GraphQL' section contains an 'Enter URL' input field and a 'Query' button. A red box with the text 'Indsæt URL for at connecte til databasen' points to the 'Enter URL' field. Below the input field, there's a tabbed interface with 'Query', 'Authorization', 'Headers', 'Schema', and 'Scripts'. The 'Schema' tab is selected, and a green dot is visible on its tab. A red box with the text 'Når en grøn prik kommer frem er skemaet indlæst' points to this green dot. Below the tabs, there's a 'Search fields' input field. A red box with the text 'Tryk her for at komme hen til den fane hvor du kan lave din GraphQL query' points to the 'Query' tab. The main area displays a list of schema types under the 'Query' section, including 'BBR_BBRSag', 'BBR_BygningEjendomsrelation', 'BBR_Bygning', 'BBR_Ejendomsrelation', 'BBR_Enhedsrelation', 'BBR_Enhedsrelation', 'BBR_Etage', 'BBR_FordelingAfFordelingsareal', 'BBR_Fordelingsareal', and 'BBR_GrundJordstykke'. The right side of the interface shows a 'Variables' section and a 'Response' section at the bottom.

Når en grøn prik kommer frem er skemaet indlæst

Indsæt URL for at connecte til databasen

Enter URL

Query

Tryk her for at komme hen til den fane hvor du kan lave din GraphQL query

Search fields

Query

- > ☐ BBR_BBRSag BBR_BBRSagConnection
- > ☐ BBR_BygningEjendomsrelation BBR_BygningEjendomsrelationConnection
- > ☐ BBR_Bygning BBR_BygningConnection
- > ☐ BBR_Ejendomsrelation BBR_EjendomsrelationConnection
- > ☐ BBR_Enhedsrelation BBR_EnhedsrelationConnection
- > ☐ BBR_Enhedsrelation BBR_EnhedsrelationConnection
- > ☐ BBR_Etage BBR_EtageConnection
- > ☐ BBR_FordelingAfFordelingsareal BBR_FordelingAfFordelingsarealConnection
- > ☐ BBR_Fordelingsareal BBR_FordelingsarealConnection
- > ☐ BBR_GrundJordstykke BBR_GrundJordstykkeConnection

Variables

Response

- Lav din GraphQL – Vælg en entitet

Søg din ønskede entitet frem

The screenshot shows the GraphQL Playground interface. At the top, the URL bar contains a URL with an API key, which is highlighted in yellow with the text "Det her er vores api-key 😊". Below the URL bar, the "Query" tab is selected. On the left, a search bar contains the text "dar". Below the search bar, a list of entities is shown, with "DAR_Husnummer" selected. On the right, the GraphQL query is displayed:

```
1 query DAR_Husnummer {  
2   DAR_Husnummer(  
3     registreringstid: "2025-10-02T12:05:00.00Z"  
4     virkningstid: "2025-10-02T12:05:00.00Z"  
5   )  
6 }  
7
```

 At the bottom left, the "Response" section is visible. Red arrows point from the annotations to specific parts of the interface: one to the search bar, one to the selected entity, one to the query text, and one to the date input fields.

Tryk på entiteten, og så dukker den op i højre side

Registreringstid og virkningstid skal udfyldes fx i format: YYYY-MM-DDThh:mm:ss.ssZ (Hvis man bruger flexible current er det kun virkningstid)

- Lav din GraphQL – Betingelser

The screenshot shows the GraphQL Playground interface. At the top, there's a navigation bar with 'Test GraphQL', 'Overview', and 'Test Collection'. Below that, the 'Test Collection / Test GraphQL' section shows the API URL: `https://test06-graphql.datafordeler.dk/flexible/v1?apikey=`. A yellow box highlights the API key field with the text 'Det her er vores api-key 😊'. The 'Query' tab is selected, showing a search bar with 'dar'. Below the search bar, the 'DAR_Husnummer' type is expanded, showing various filters. The 'where' filter is selected, and the 'startsWith' filter is chosen for the 'adgangsadressebetegnelse' field, with the value 'Sankt Kjelds Plads' entered. A red box highlights the 'where' filter with the text 'Tryk på "where" hvis du vil have betingelser'. Another red box highlights the 'startsWith' filter with the text 'Vælg en betingelse fx "adgangsadressebetegnelse", og vælg fx "startsWith" og skriv din value'. The query editor on the right shows the resulting GraphQL query:

```
1 query DAR_Husnummer {
2   DAR_Husnummer(
3     registreringstid: "2025-02-10T12:05:00.00Z"
4     virkningstid: "2025-02-10T12:05:00.00Z"
5     where: { adgangsadressebetegnelse: { startsWith: "Sankt Kjelds Plads" } }
6   ) {
7   }
8 }
9
10
```

 The 'Variables' section is empty.

Tryk på "where" hvis du vil have betingelser

Vælg en betingelse fx "adgangsadressebetegnelse", og vælg fx "startsWith" og skriv din value

```
1 query DAR_Husnummer {
2   DAR_Husnummer(
3     registreringstid: "2025-02-10T12:05:00.00Z"
4     virkningstid: "2025-02-10T12:05:00.00Z"
5     where: { adgangsadressebetegnelse: { startsWith: "Sankt Kjelds Plads" } }
6   ) {
7   }
8 }
9
10
```

- Lav din GraphQL – Output

Scroll ned til nodes og tryk KUN på pilen for at åbne nodes og se det output du kan få

The screenshot shows the GraphQL Playground interface. At the top, there's a 'Test GraphQL' tab and a 'Test Collection' section. The URL bar contains 'https://test06-graphql.datafordeler.dk/flexible/v1?apikey=' followed by a yellow box containing 'Det her er vores api-key 😊'. Below the URL bar are tabs for 'Query', 'Authorization', 'Headers', 'Schema', and 'Scripts'. The 'Query' tab is active, showing a search bar with 'dar' and a query editor with the following code:

```
1 query DAR_Husnummer {
2   DAR_Husnummer(
3     registreringstid: "2025-02-10T12:05:00.00Z"
4     virkningstid: "2025-02-10T12:05:00.00Z"
5     where: { adgangsadressebetegnelse: { startsWith: "Sankt Kjelds Plads" } }
6   ) {
7     nodes {
8       adgangspunkt
9     }
10  }
11 }
12
```

On the left side, there's a schema explorer with a search bar. It shows a tree structure with 'nodes' selected. Below 'nodes', there are two fields: 'adgangsbetegnelse' and 'adgangspunkt'. The 'adgangspunkt' field is checked. A red arrow points from the 'adgangspunkt' field in the schema explorer to the 'adgangspunkt' field in the query editor. Another red arrow points from the 'nodes' field in the schema explorer to the 'nodes' field in the query editor. A third red arrow points from the 'adgangspunkt' field in the schema explorer to the 'adgangspunkt' field in the query editor. A fourth red arrow points from the 'adgangspunkt' field in the schema explorer to the 'adgangspunkt' field in the query editor. A fifth red arrow points from the 'adgangspunkt' field in the schema explorer to the 'adgangspunkt' field in the query editor.

Annotations:

- Hvis du trykker på denne boks vil ALLE outputs blive tilføjet
- Tryk på de output entiteter du vil se, fx "adgangspunkt"

Variables

Response

- Lav din GraphQL – Fleksibel opslagslogik output

Test GraphQL | Overview | Test Collection | +

Test Collection / Test GraphQL

https://test06-graphql.datafordeler.dk/flexible/v1?apikey= **Det her er vores api-key ☺** Query

Query | Authorization | Headers | Schema | Scripts

dar

time filter applied.

☒ husnummerErPlaceretPaaJordstykke MAT_JordstykkeConnection

Field representing the result of a to-many left-join from DAR_Husnummer.jordstykke to MAT_Jordstykke.id_lokalid wit applied.

☐ first Int ARG
Returns the first _n_ elements from the list.

☐ after String ARG
Returns the elements in the list that come after the specified cursor.

> ☐ where MAT_JordstykkeFilterInput ARG

> ☐ pageInfo PageInfo!
Information to aid in pagination.

> ☐ edges [MAT_JordstykkeEdge!]
A list of edges

☒ nodes [MAT_Jordstykke!]
A flattened list of the nodes.

☒ arealberegningstype String!
Grunddatamodel info: type: Arealberegningstype multiplicity: 1 URI: https://data.gov.dk/model/profile/mu/ prefLabel (da): arealberegningstype definition (da): angivelse af beregningstypen for arealet på det på dbName: arealberegningstype sequenceNumber: 51 legalSource: https://www.retsinformation.dk/eli/lta/2018-06-01/111

☐ arealbetegnelse String
Grunddatamodel info: type: CharacterString multiplicity: 0..1 dbName: arealbetegnelse sequenceNumber: 52

Response

```
1 query DAR_Husnummer {
2   DAR_Husnummer(
3     registreringstid: "2025-02-10T12:05:00.00Z"
4     virkningstid: "2025-02-10T12:05:00.00Z"
5     where: { adgangsadressebetegnelse: { startsWith: "Sankt Kjelds Plads" } }
6   ) {
7     nodes {
8       adgangspunkt
9       husnummerErPlaceretPaaJordstykke {
10        nodes {
11          arealberegningstype
12        }
13      }
14    }
15  }
16 }
17
```

Output for den originale entitet

Relationsentitet

Valgt output for relationsentitet

Hvis du trykker på den her boks tilføjer du ALT output

For relationsentiteter skal man også tilføje hvilke output de skal give

Scroll ned i bunden af "nodes" for at se fleksibel opslagslogik relationsentiteter

• Sidste trin – KØR!

Tip: I "Environments" i venstre bjælke kan du lave et nyt environment hvor du kan gemme dine variable – fx din API key eller dine database URL så du nemt kan kalde dem herfra

