





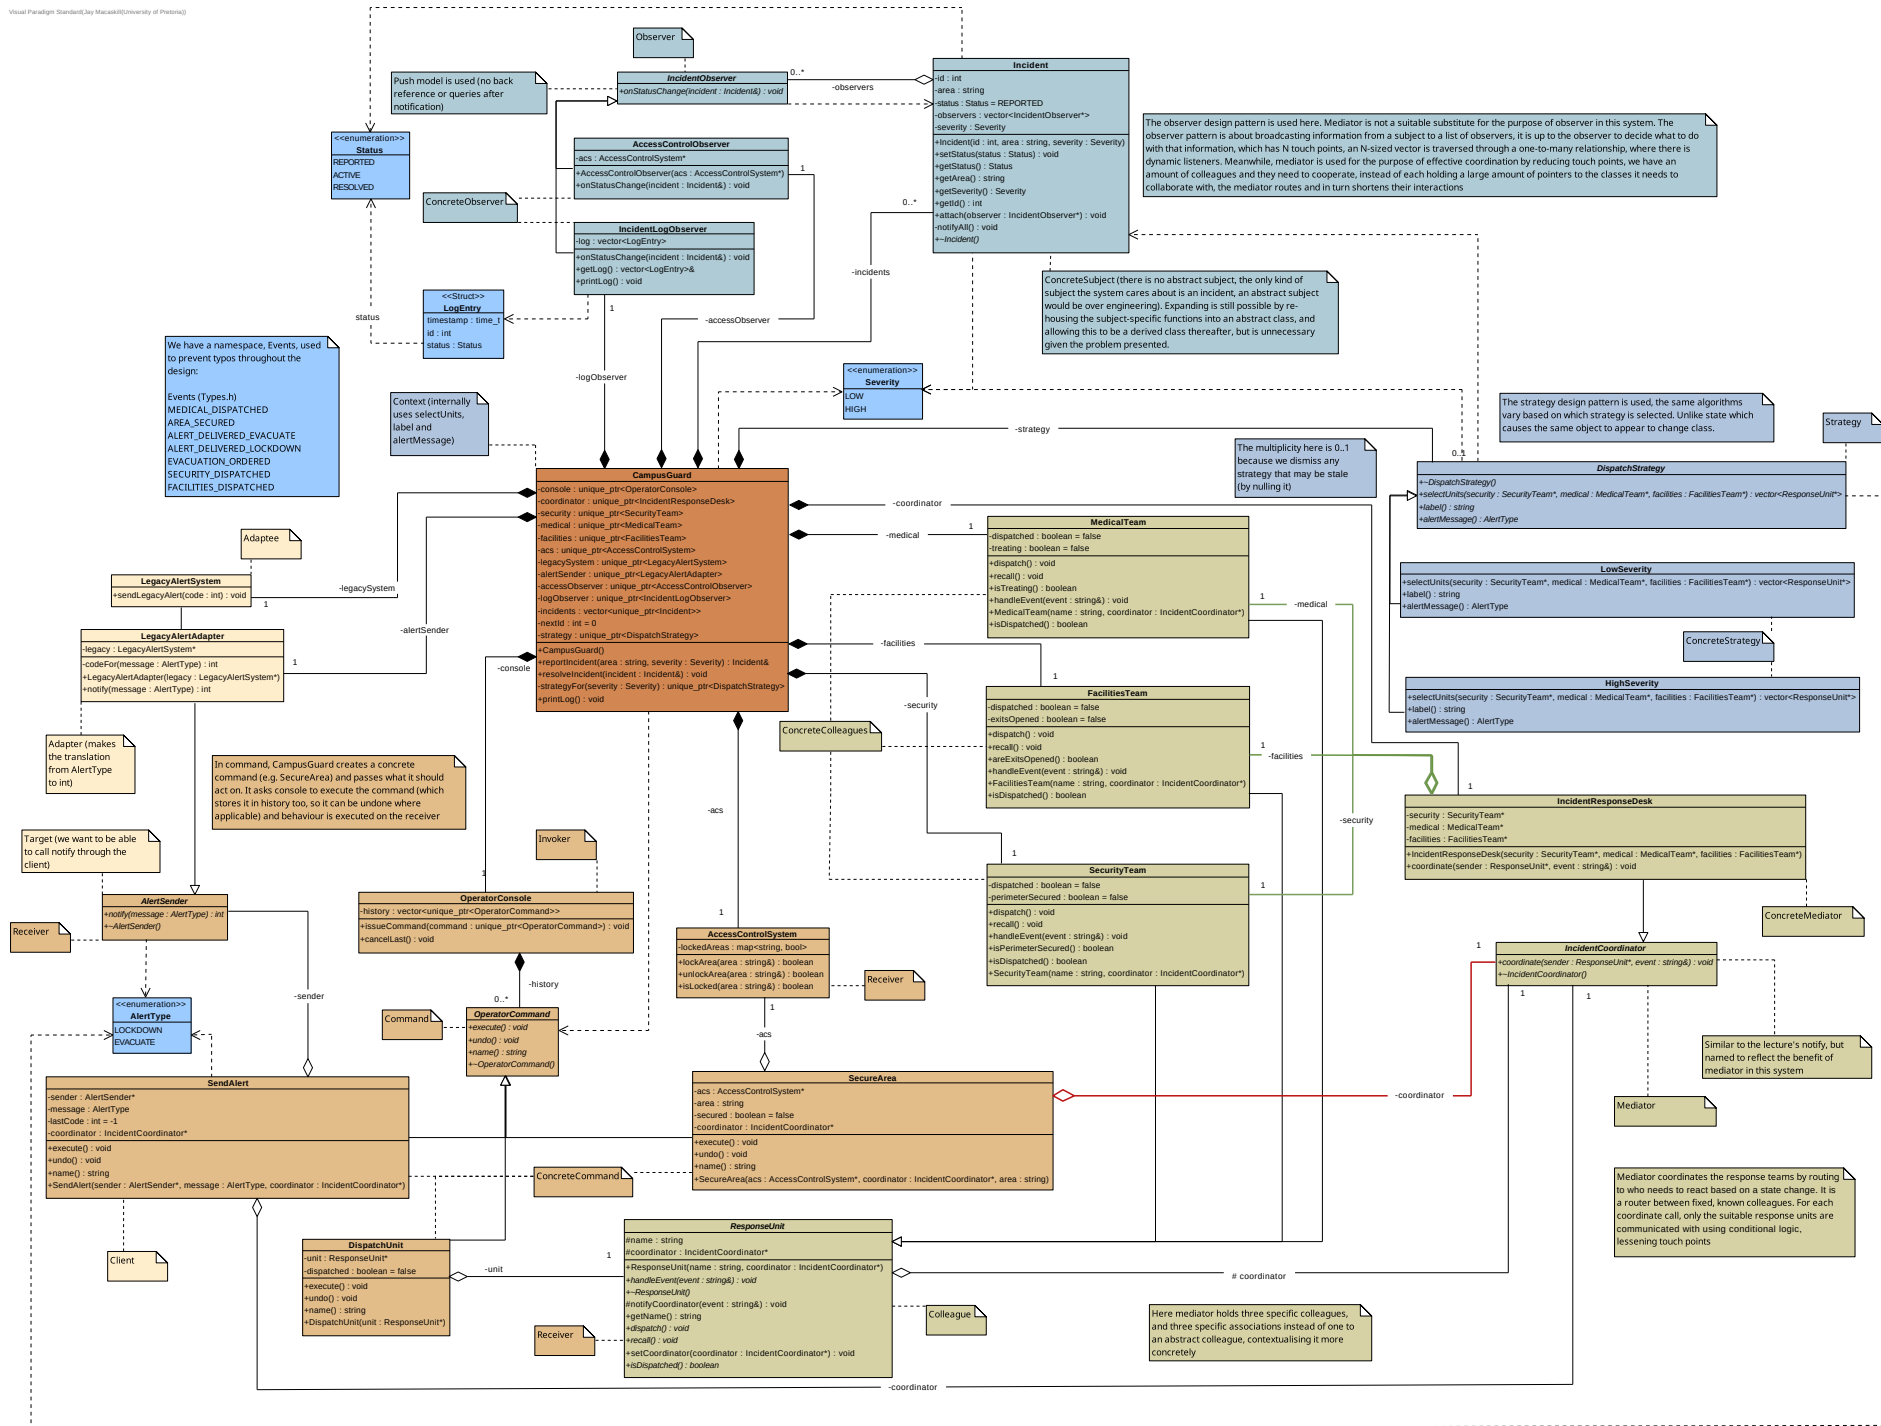

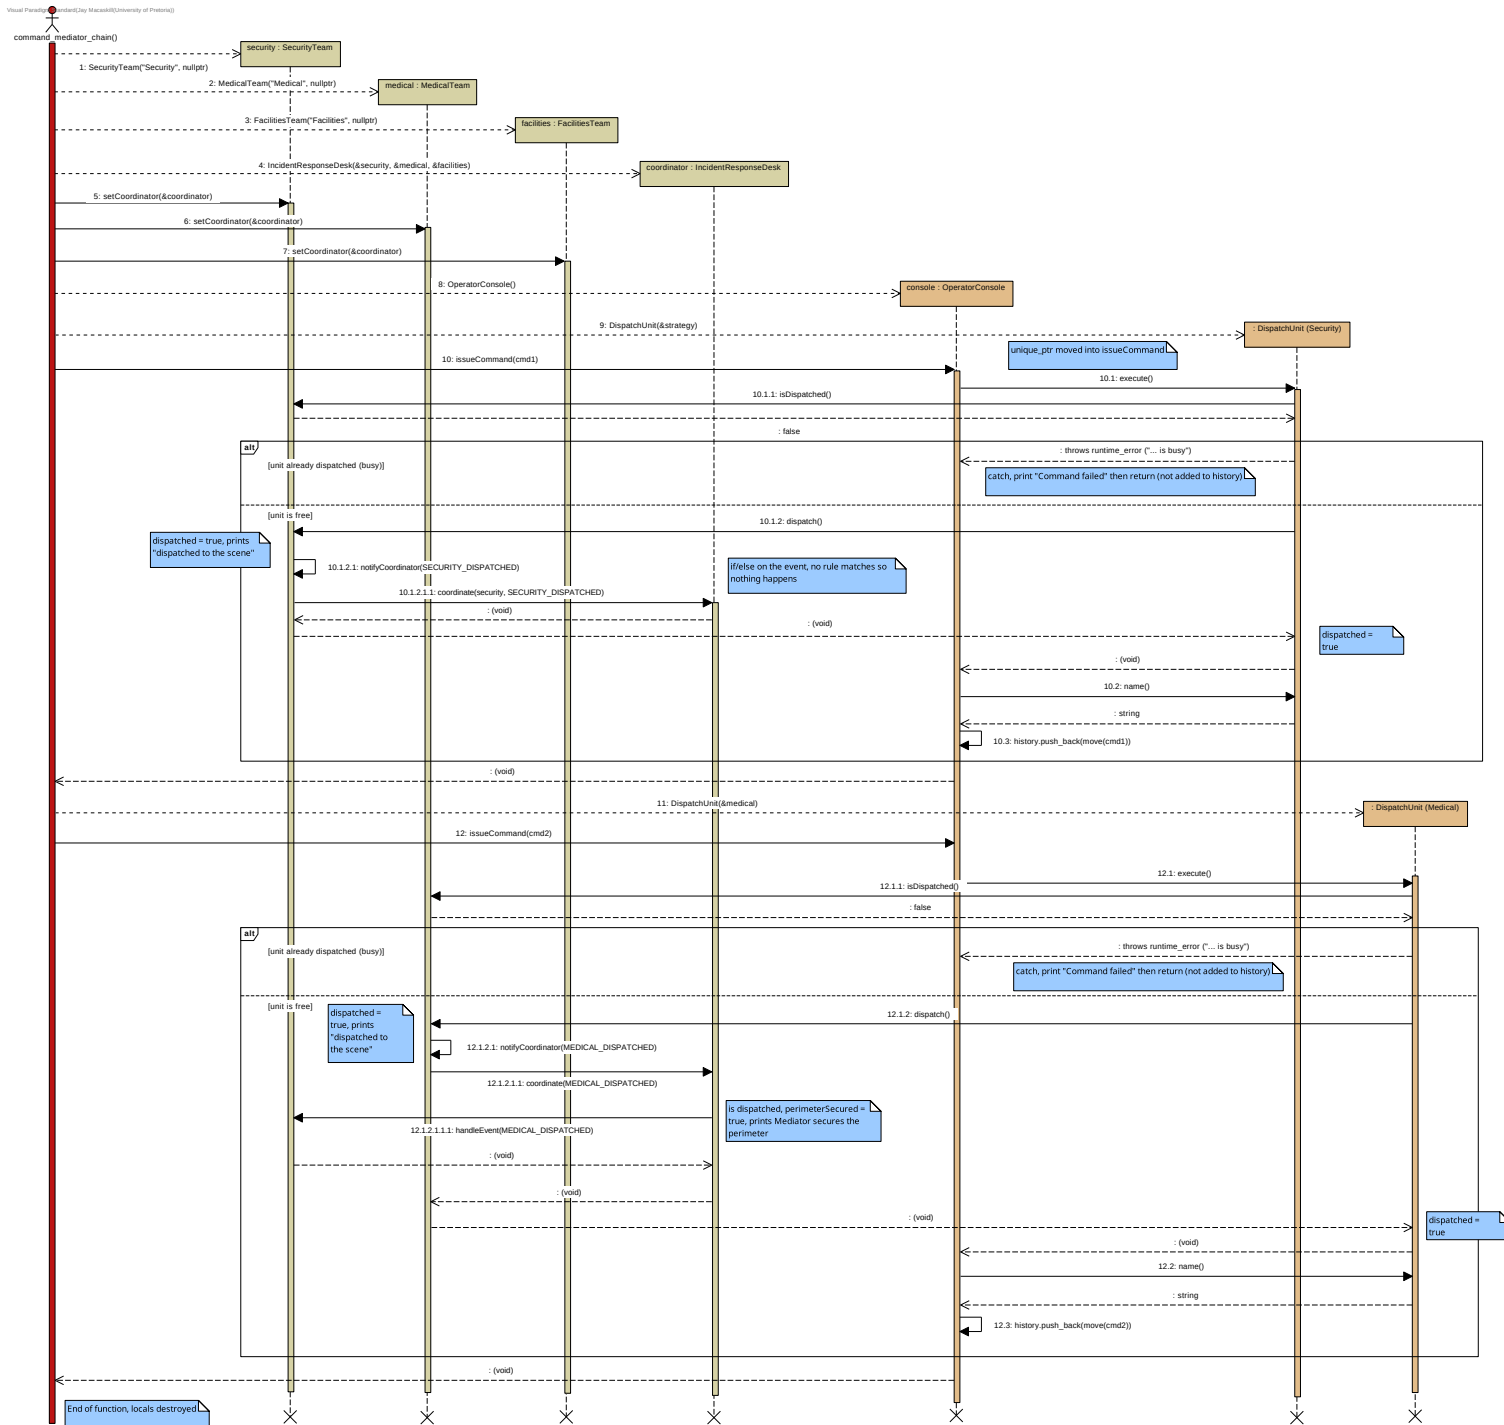

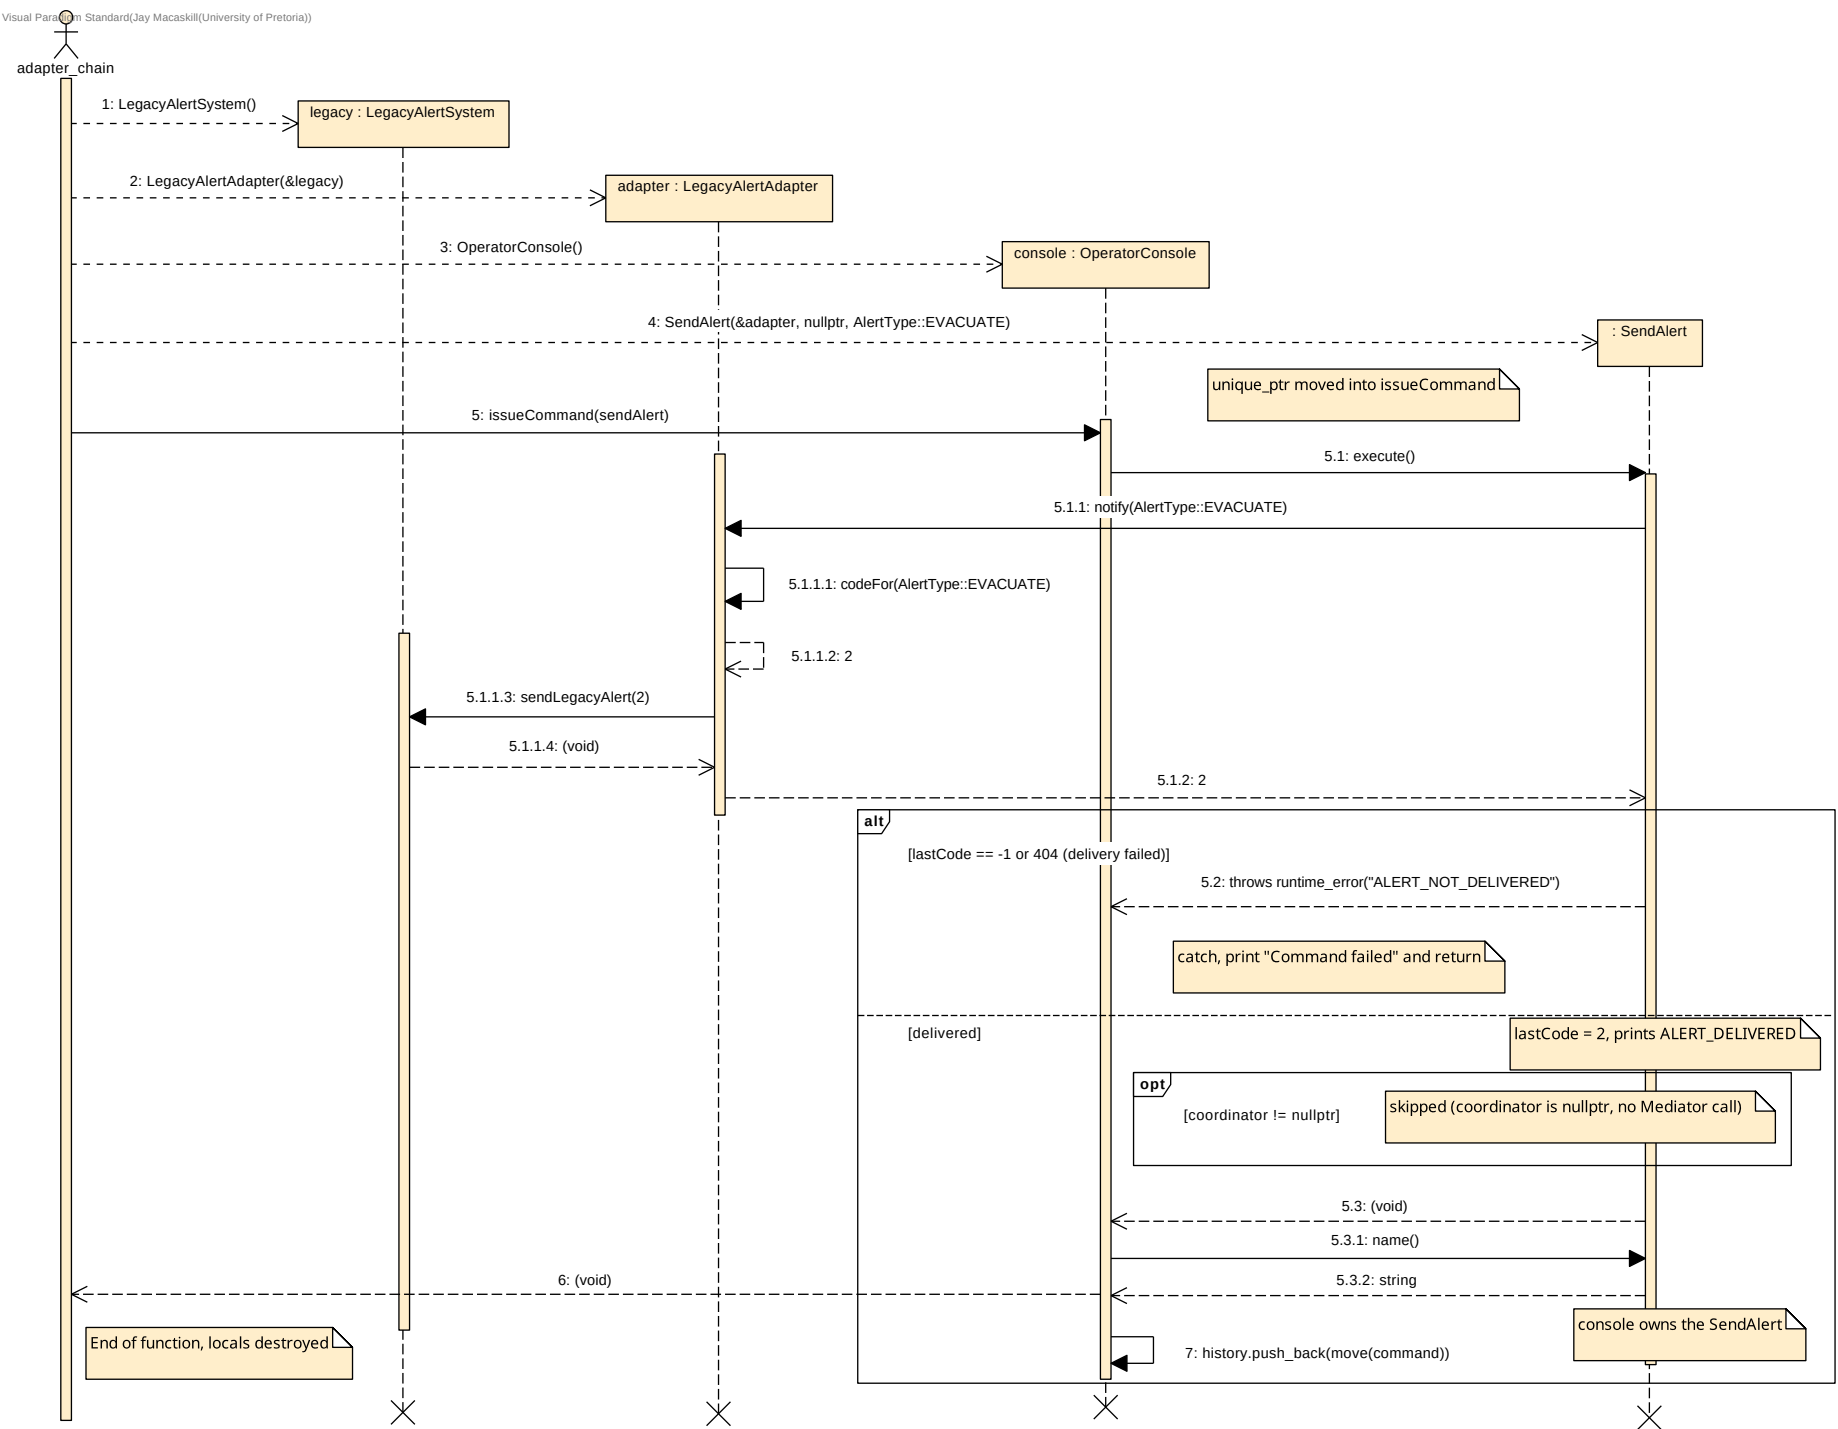

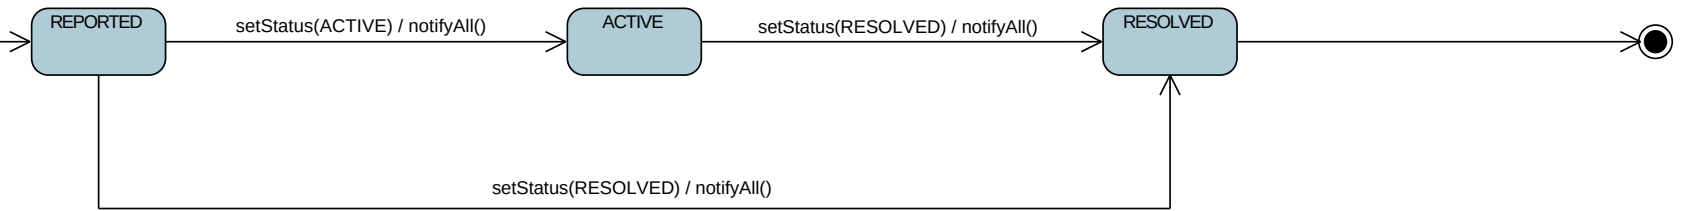

Guards:

Same-status calls (except the initial REPORTED broadcast) are refused.

Only the three transitions shown are permitted; any other transition is refused and reported.

The code refuses to call `setStatus` that would not result in one of the transitions shown here

No-op calls and illegal transitions are silently refused and logged

`notifyAll()` fires each attached observer:

`AccessControlObserver::onStatusChange`

`ACTIVE → acs->lockArea(incident.getArea())`

`RESOLVED → acs->unlockArea(incident.getArea())`

`IncidentLogObserver::onStatusChange`

appends {now, id, status} to its internal log